






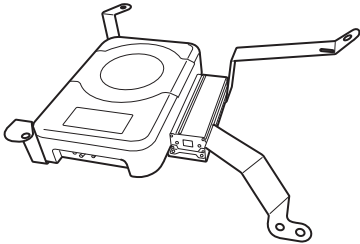







Tools Required

Panel Removal Tool	Sockets	Phillips Screwdriver
	 7mm 10mm	
Wire Cutters	Extension	Ratchet
		
T50 Torx	Cordless Power Drill	Cordless Impact Gun
		

Accessory List

Amplifier Assembly	T-Harness	Main Harness
		
(10) Cable Ties	RCA Adapters	Power Cable
		
Front Top Dash Speakers		
		

OEM Head Unit Wiring Diagram

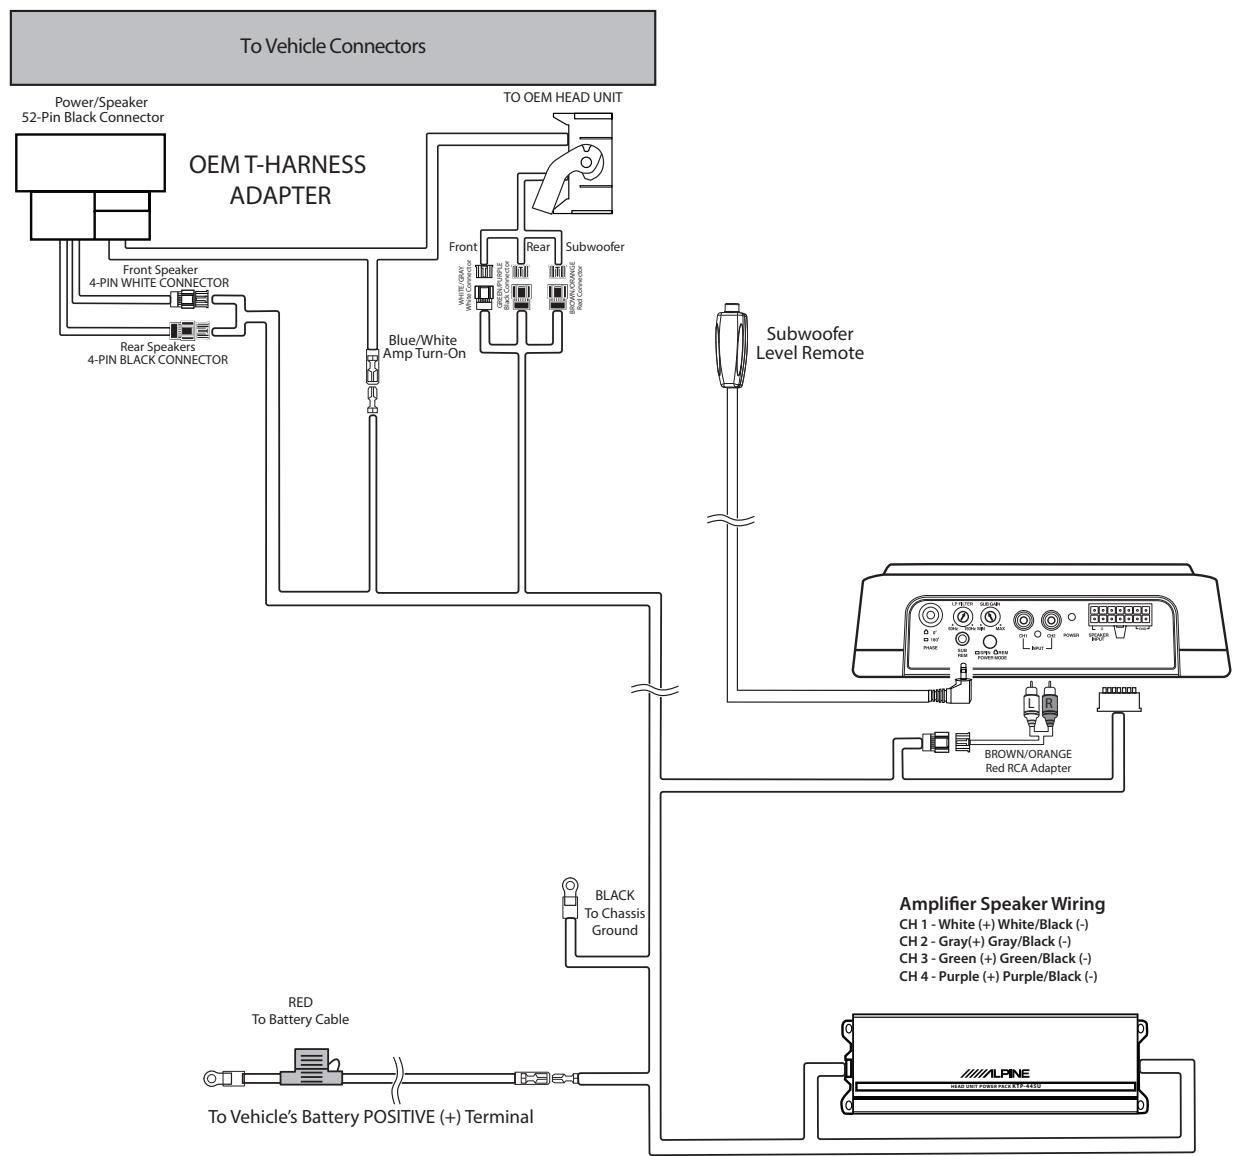

POWER PACK AMPLIFIER KTP-445U

FRONT HPF: OFF, 60Hz, 80Hz, 120Hz

REAR HPF: OFF, 60Hz, 80Hz, 120Hz

2CH SPKR INPUT

4CH SPKR INPUT

FRONT GAIN: MIN, MAX

REAR GAIN: MIN, MAX

SUBWOOFER PWE-S8

LP FILTER: 50Hz, 150Hz, MIN, MAX



SUB GAIN: MIN, MAX

PHASE: 0°, 180°

SUB REM: SPIN, REM, POWER MODE


NOTE: FOR BEST PERFORMANCE SET AMPLIFIER AND SUBWOOFER TO RECOMMENDED SETTINGS AS SHOWN ABOVE

Aftermarket Head Unit Wiring Diagram

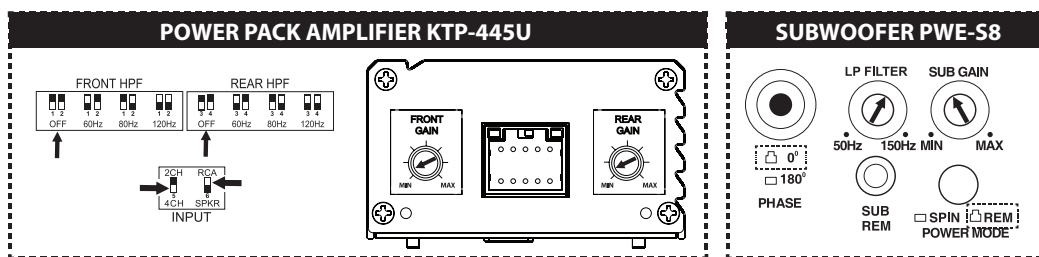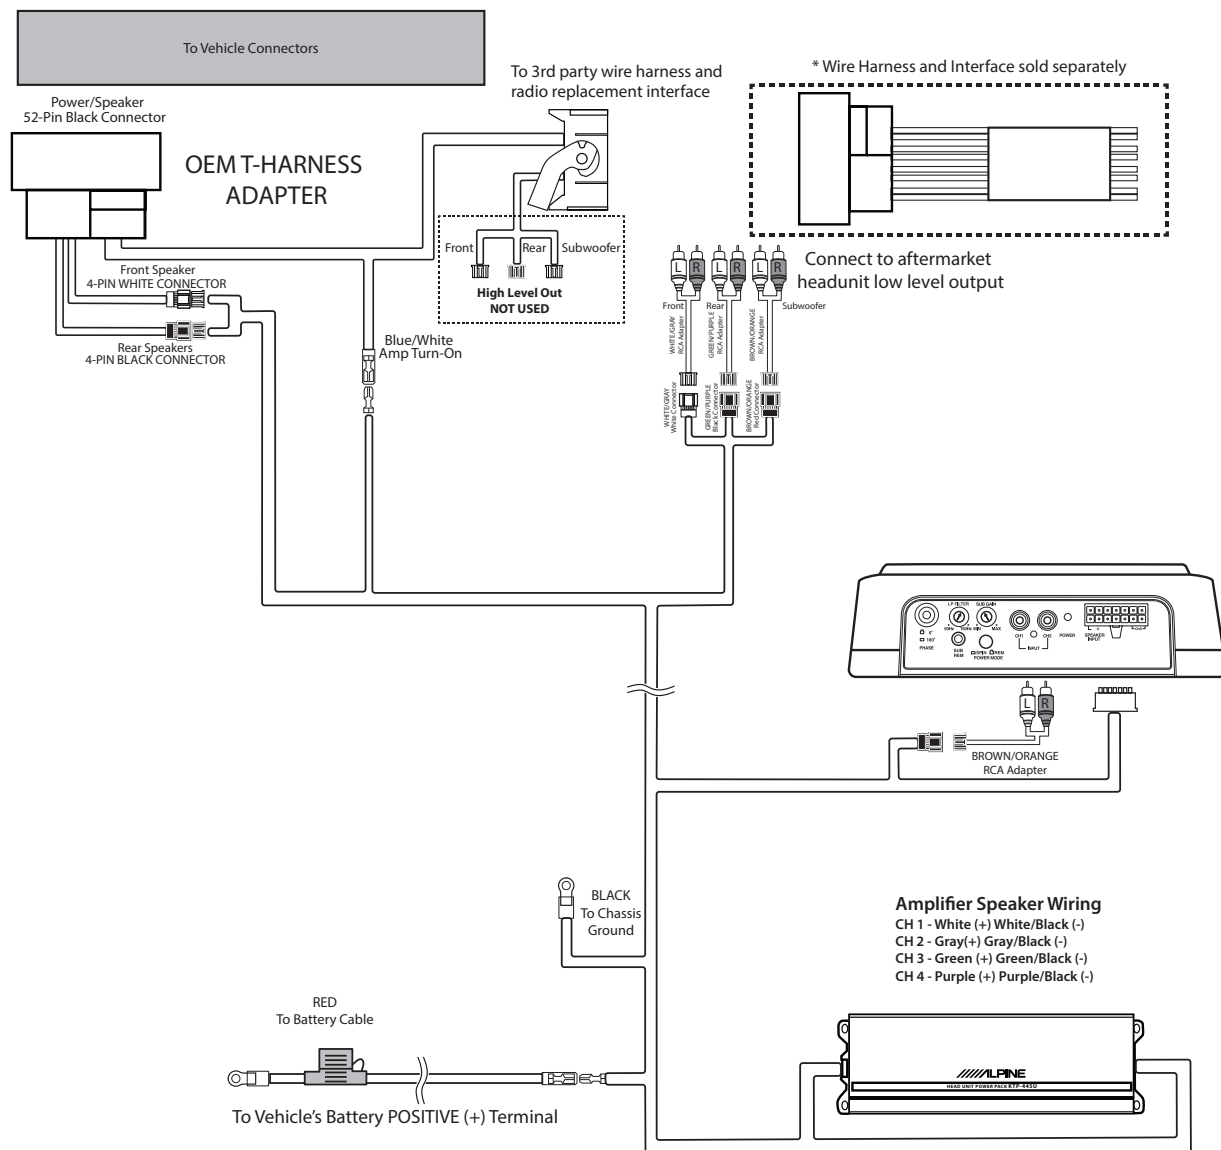


NOTE: FOR BEST PERFORMANCE SET AMPLIFIER AND SUBWOOFER TO RECOMMENDED SETTINGS AS SHOWN ABOVE

Alpine Restyle Head Unit Wiring Diagram

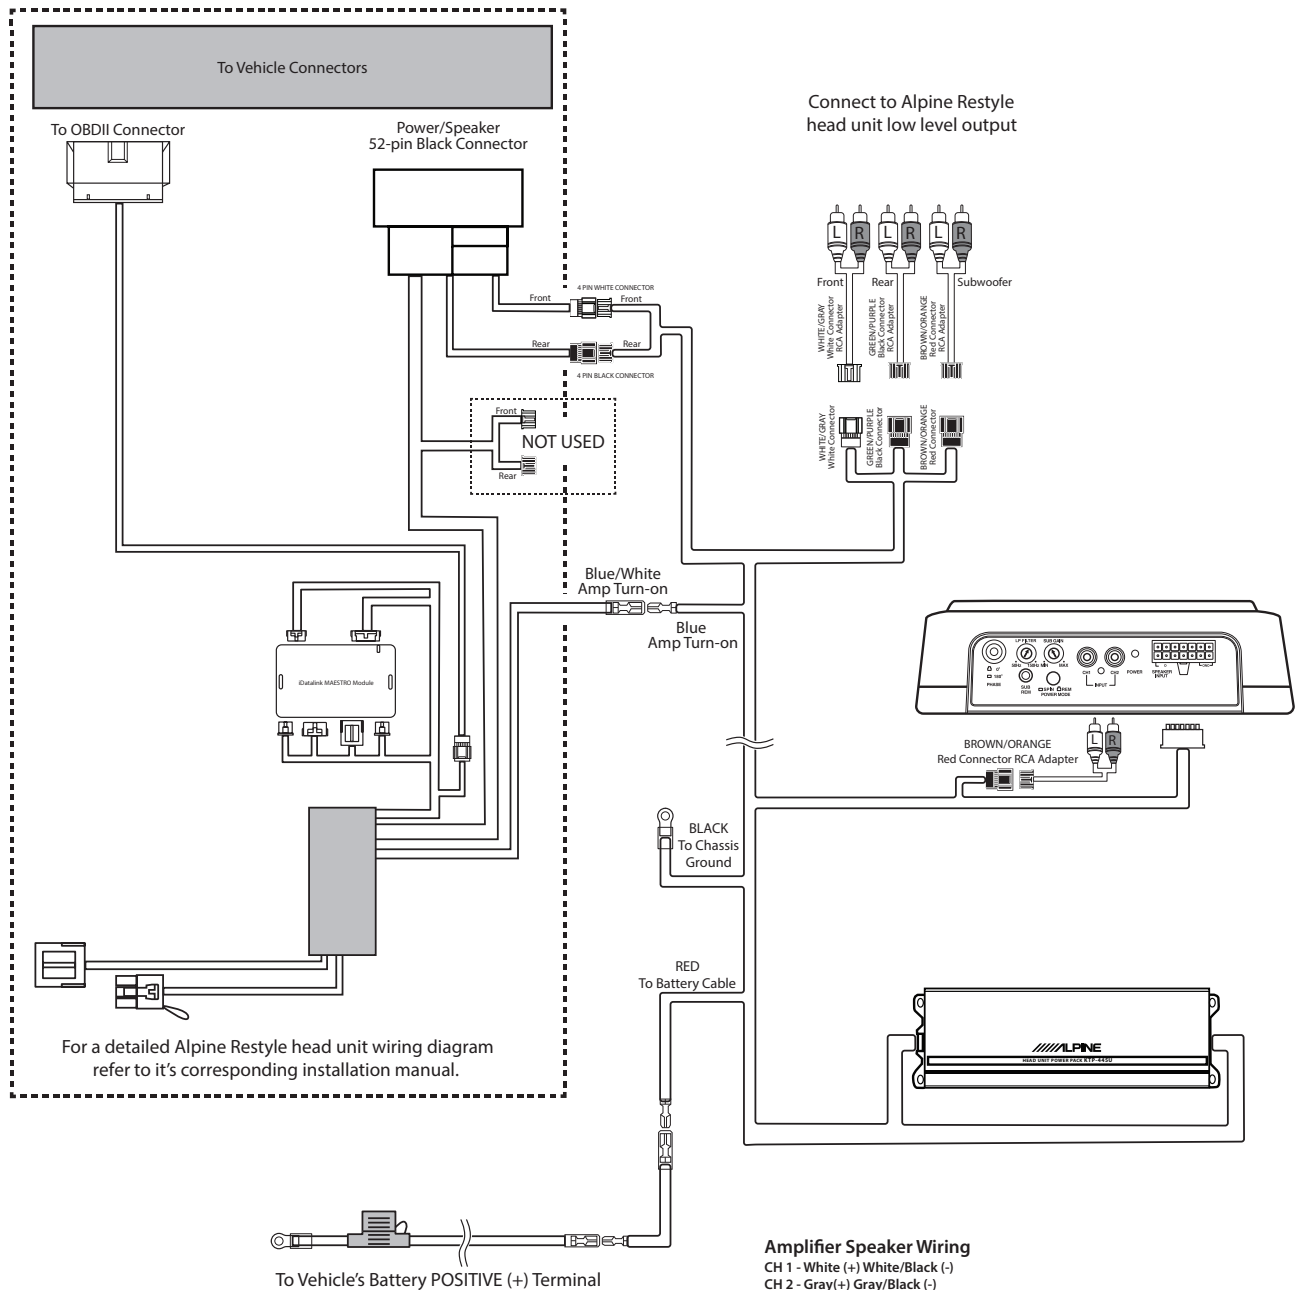

Amplifier Speaker Wiring

- CH 1 - White (+) White/Black (-)
- CH 2 - Gray (+) Gray/Black (-)
- CH 3 - Green (+) Green/Black (-)
- CH 4 - Purple (+) Purple/Black (-)

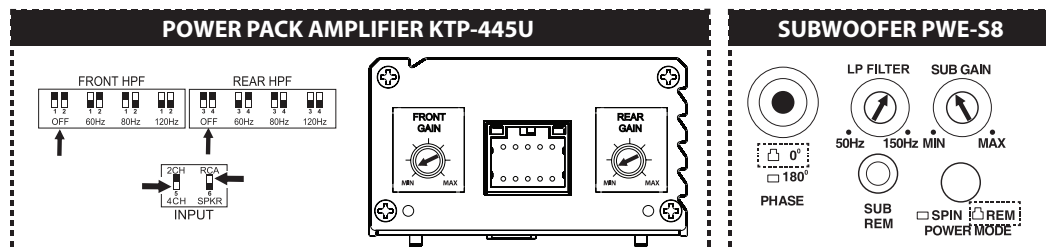

NOTE: FOR BEST PERFORMANCE SET AMPLIFIER AND SUBWOOFER TO RECOMMENDED SETTINGS AS SHOWN ABOVE