EXPLODED VIEW

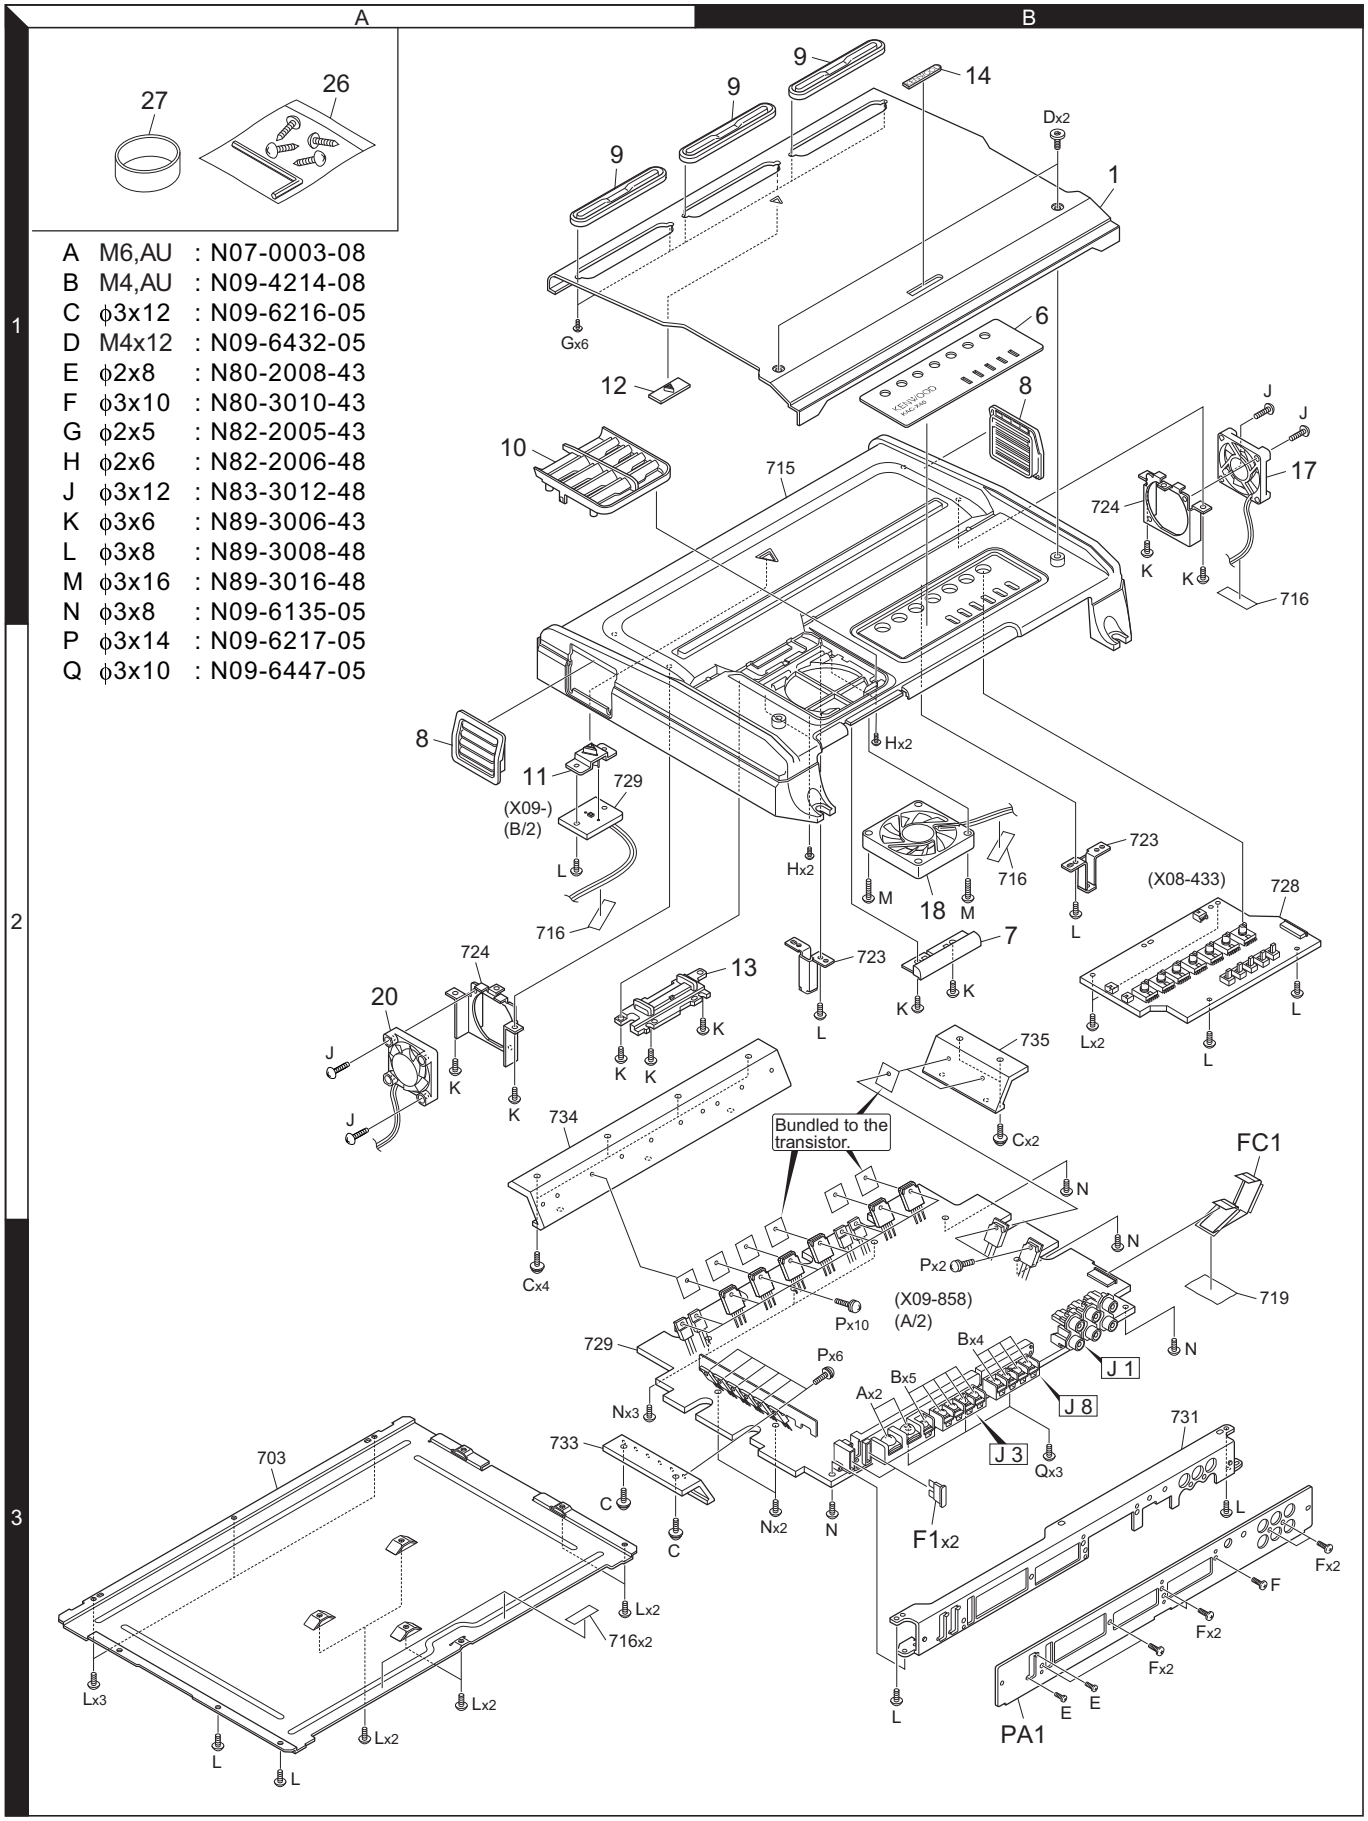

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
KAC-X40					
1	1B	✻	A21-6571-01	DRESSING PANEL	K
1	1B	✻	A21-6572-01	DRESSING PANEL	M1
PA1	3B	✻	A64-4087-12	PANEL	
6	1B	✻	B03-5088-22	DRESSING PLATE	K
6	1B	✻	B03-5089-12	DRESSING PLATE	M1
7	2B		B07-3194-03	ESCUTCHEON	
8	2A		B07-3197-02	ESCUTCHEON	
9	1B	✻	B07-3207-03	ESCUTCHEON	
10	1A	✻	B07-3208-12	ESCUTCHEON	
11	2A		B19-2324-03	LIGHTING BOARD	
12	1A	✻	B19-2424-04	LIGHTING BOARD	
13	2A	✻	B19-2431-02	LIGHTING BOARD	
14	1B		B43-0336-04	BADGE	
-		✻	B64-3520-00	INSTRUCTION MANUAL (ENG.FRE.SPA	K
-		✻	B64-3521-00	INSTRUCTION MA (ENG.T-CHI.S-CHI	M1
FC1	2B	✻	E39-0886-05	FLAT CABLE	
17	1B		F09-1846-15	FAN	
18	2B		F09-1885-15	FAN	
20	2A	✻	F09-2889-05	FAN	
⚠ F1	3B		F52-0014-05	FUSE (BLADE TYPE) 25A	
-		✻	H54-3886-03	ITEM CARTON CASE	K
-		✻	H54-3887-03	ITEM CARTON CASE	M1
26	1A		N99-1794-05	SCREW & WRENCH KEY SET	
A	3B		N07-0003-08	SCREW (M6,AU)	
B	3B		N09-4214-08	SCREW (M4,AU)	
C	3A		N09-6216-05	TAPTITE SCREW (3X12)	
D	1B	✻	N09-6432-05	DRESSED SCREW (M4X12)	
E	3B		N80-2008-43	PAN HEAD TAPTITE SCREW	
F	3B		N80-3010-43	PAN HEAD TAPTITE SCREW	
G	1A		N82-2005-43	BINDING HEAD TAPTITE SCREW	
H	2B		N82-2006-48	BINDING HEAD TAPTITE SCREW	
J	2A		N83-3012-48	PAN HEAD TAPTITE SCREW	
K	2A		N89-3006-43	BINDING HEAD TAPTITE SCREW	
L	3A		N89-3008-48	BINDING HEAD TAPTITE SCREW	
M	2B		N89-3016-48	BINDING HEAD TAPTITE SCREW	
27	1A		W01-1606-05	ACCESSORIES	
PREAMPLIFIER UNIT (X08-4330-10)					
C1,2			CD04AS1V100M	ELECTRO 10UF 35WV	
C3-6			CD04BJ1H100M	ELECTRO 10UF 50WV	
C7,8			CD04AS1V100M	ELECTRO 10UF 35WV	
C9-11			CC73GCH1H070D	CHIP C 7.0PF D	
C13-16			CD04BJ1H100M	ELECTRO 10UF 50WV	
C17			CD04AS1V100M	ELECTRO 10UF 35WV	
C18			CD04AS1C470M	ELECTRO 47UF 16WV	
C19,20			CC73GCH1H070D	CHIP C 7.0PF D	
C23			CC73GCH1H070D	CHIP C 7.0PF D	
C25,26			CK73GB1H103K	CHIP C 0.010UF K	
C27-38			CC73GCH1H070D	CHIP C 7.0PF D	
C41-48			CC73GCH1H070D	CHIP C 7.0PF D	
C101-104			CK73GB1H104K	CHIP C 0.10UF K	
C105,106			CD04AS1V100M	ELECTRO 10UF 35WV	
C108			CC73GCH1H101J	CHIP C 100PF J	
C109,110			CD04BJ1H100M	ELECTRO 10UF 50WV	
C113,114			CC73GCH1H070D	CHIP C 7.0PF D	
C207-210			CK73GB1H104K	CHIP C 0.10UF K	
C211			CD04BJ1H100M	ELECTRO 10UF 50WV	
C212			CD04AS1V100M	ELECTRO 10UF 35WV	
C213,214			CD04BJ1H100M	ELECTRO 10UF 50WV	
C215,216			CK73FB1E474K	CHIP C 0.47UF K	
C217,218			CD04AS1H2R2M	ELECTRO 2.2UF 50WV	
C219,220			CC73GCH1H101J	CHIP C 100PF J	
C221,222			CD04BJ1H100M	ELECTRO 10UF 50WV	
C228			CC73GCH1H101J	CHIP C 100PF J	
C233,234			CC73GCH1H070D	CHIP C 7.0PF D	
C251,252			CD04BJ1H100M	ELECTRO 10UF 50WV	
C301			CK73FB1E154K	CHIP C 0.15UF K	
C303			CK73GB1H333K	CHIP C 0.033UF K	
C304			CK73GB1H104K	CHIP C 0.10UF K	
C306			CK73GB1H333K	CHIP C 0.033UF K	
C307			CD04AS1V100M	ELECTRO 10UF 35WV	
CN1			E41-2202-05	FLAT CABLE CONNECTOR	
CN2,3			E41-1699-05	PIN ASSY	
CN5			E41-1700-05	PIN ASSY	
R1			RK73EB2E2R2J	CHIP R 2.2 J 1/4W	
R3,4			RK73GB2A101J	CHIP R 100 J 1/10W	
R11-15			RK73GB2A101J	CHIP R 100 J 1/10W	
R21-27			RK73GB2A101J	CHIP R 100 J 1/10W	
R29,30			RK73GB2A101J	CHIP R 100 J 1/10W	
R51,52			RK73GB2A1R0J	CHIP R 1.0 J 1/10W	
R101,102			RK73GB2A473J	CHIP R 47K J 1/10W	
R103,104			RK73GB2A133J	CHIP R 13K J 1/10W	
R107,108			RK73GB2A203J	CHIP R 20K J 1/10W	
R109-112			RK73GB2A473J	CHIP R 47K J 1/10W	
R113			RK73GB2A101J	CHIP R 100 J 1/10W	
R115,116			RK73GB2A103J	CHIP R 10K J 1/10W	
R117,118			RK73GB2A431J	CHIP R 430 J 1/10W	
R119			RK73GB2A103J	CHIP R 10K J 1/10W	
R121,122			RK73GB2A101J	CHIP R 100 J 1/10W	
R125			RK73GB2A101J	CHIP R 100 J 1/10W	
R201,202			RK73GB2A203J	CHIP R 20K J 1/10W	
R203,204			RK73GB2A473J	CHIP R 47K J 1/10W	
R219,220			RK73GB2A473J	CHIP R 47K J 1/10W	
R221,222			RK73GB2A133J	CHIP R 13K J 1/10W	
R225,226			RK73GB2A203J	CHIP R 20K J 1/10W	
R227-230			RK73GB2A473J	CHIP R 47K J 1/10W	
R231,232			RK73GB2A123J	CHIP R 12K J 1/10W	
R233,234			RK73GB2A201J	CHIP R 200 J 1/10W	
R235,236			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R237,238			RK73GB2A103J	CHIP R 10K J 1/10W	
R239,240			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R243,244			RK73GB2A431J	CHIP R 430 J 1/10W	
R245			RK73GB2A101J	CHIP R 100 J 1/10W	
R246,247			RK73GB2A103J	CHIP R 10K J 1/10W	
R248			RK73GB2A473J	CHIP R 47K J 1/10W	

K : KAC-X40 (North America) **M1** : KAC-X40 (Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

PREAMPLIFIER UNIT (X08-4330-10)

Ref. No.	Add	New	Parts No.	Description				Destination
R249,250			RK73GB2A101J	CHIP R	100	J	1/10W	
R251			RK73GB2A103J	CHIP R	10K	J	1/10W	
R255			RK73GB2A101J	CHIP R	100	J	1/10W	
R301			RK73GB2A822J	CHIP R	8.2K	J	1/10W	
R303			RK73GB2A184J	CHIP R	180K	J	1/10W	
R304			RK73GB2A103J	CHIP R	10K	J	1/10W	
R305			RK73GB2A752J	CHIP R	7.5K	J	1/10W	
R306			RK73GB2A912J	CHIP R	9.1K	J	1/10W	
R308			RK73GB2A104J	CHIP R	100K	J	1/10W	
R309			RK73GB2A752J	CHIP R	7.5K	J	1/10W	
R310			RK73GB2A473J	CHIP R	47K	J	1/10W	
VR1			R31-0241-05	VARIABLE RESISTOR				
VR2,3			R31-0238-05	VARIABLE RESISTOR				
VR4,5			R31-0241-05	VARIABLE RESISTOR				
VR6			R31-0246-05	VARIABLE RESISTOR				
VR8			R31-0241-05	VARIABLE RESISTOR				
W1-4			R92-1252-05	CHIP R	0 OHM	J	1/16W	
S1-4		*	S62-0879-05	SLIDE SWITCH				
S6		*	S62-0880-05	SLIDE SWITCH				
D1			LM1MA142WK-G	DIODE				
IC1			BA4560RF	ANALOGUE IC				
IC4			BA4560RF	ANALOGUE IC				
IC6-10			BA4560RF	ANALOGUE IC				

AUDIO UNIT (X09-8580-10)

Ref. No.	Add	New	Parts No.	Description				Destination
D600			B30-1743-05	LED (RED LED)				
C1			CD04AU1H100M	NP ELEC	10UF	50WV		
C2,3			CD04BJ1E470M	ELECTRO	47UF	25WV		
C4			CD04BJ1H220M	ELECTRO	22UF	50WV		
C5			CD04BJ1H100M	ELECTRO	10UF	50WV		
C6,7		*	C90-6842-05	ELECTR	4700UF	42WV		
C8,9			CK45FB1H152K	CERAMIC	1500PF	K		
C10,11			C90-6816-05	ELECTR	3300UF	16WV		
C12			CD04BJ1H100M	ELECTRO	10UF	50WV		
C13			CD04AU1H2R2M	NP-ELEC	2.2UF	50WV		
C14			CD04BJ1H010M	ELECTRO	1.0UF	50WV		
C15			CD04BJ1H220M	ELECTRO	22UF	50WV		
C16			CD04BJ1H100M	ELECTRO	10UF	50WV		
C17			CQ93FMG1H102J	MYLAR	1000PF	J		
C32			CK45FB1H152K	CERAMIC	1500PF	K		
C33,34			CK73GB1H103K	CHIP C	0.010UF	K		
C100			CC45FCH1H070D	CERAMIC	7.0PF	D		
C101,102			CC73GCH1H471J	CHIP C	470PF	J		
C103,104			CD04BJ1H100M	ELECTRO	10UF	50WV		
C105,106			CC73GCH1H150J	CHIP C	15PF	J		
C107			CK73GB1H103K	CHIP C	0.010UF	K		
C113,114			CC73GCH1H150J	CHIP C	15PF	J		
C115,116			CD04BJ1H100M	ELECTRO	10UF	50WV		
C117,118			CC73GCH1H070D	CHIP C	7.0PF	D		
C124			CK73GB1H103K	CHIP C	0.010UF	K		
C126			CK73GB1H102K	CHIP C	1000PF	K		
C127-130			CC73GCH1H070D	CHIP C	7.0PF	D		
C131-134			CC73GCH1H101J	CHIP C	100PF	J		
C150			CD04BJ1H220M	ELECTRO	22UF	50WV		
C156			CC73GCH1H471J	CHIP C	470PF	J		
C201,202			CD04BJ1H100M	ELECTRO	10UF	50WV		
C203,204			CC73GCH1H471J	CHIP C	470PF	J		
C205,206			CK73GB1H472K	CHIP C	4700PF	K		
C207,208			CD04BJ1E470M	ELECTRO	47UF	25WV		
C209,210			CC45FCH1H100D	CERAMIC	10PF	D		
C211,212			CC73GCH1H101J	CHIP C	100PF	J		
C213,214			CC73GCH1H470J	CHIP C	47PF	J		
C215,216			CD04BJ1H100M	ELECTRO	10UF	50WV		
C217,218			CC73GCH1H470J	CHIP C	47PF	J		
C219-222			CK73GB1H102K	CHIP C	1000PF	K		
C223			CD04BJ1A101M	ELECTRO	100UF	10WV		
C225-230			CC73GCH1H070D	CHIP C	7.0PF	D		
C250,251			CQ93FMG1H473J	MYLAR	0.047UF	J		
C260			CD04BJ1H100M	ELECTRO	10UF	50WV		
C261		*	CD04BJ1H471M	ELECTRO	470UF	50WV		
C263,264			CC73GCH1H221J	CHIP C	220PF	J		
C300			CC45FCH1H070D	CERAMIC	7.0PF	D		
C301,302			CC73GCH1H471J	CHIP C	470PF	J		
C303,304			CD04BJ1H100M	ELECTRO	10UF	50WV		
C305,306			CC73GCH1H150J	CHIP C	15PF	J		
C313,314			CC73GCH1H150J	CHIP C	15PF	J		
C315,316			CD04BJ1H220M	ELECTRO	22UF	50WV		
C317,318			CC73GCH1H070D	CHIP C	7.0PF	D		
C324			CK73GB1H103K	CHIP C	0.010UF	K		
C326			CK73GB1H102K	CHIP C	1000PF	K		
C331-334			CC73GCH1H101J	CHIP C	100PF	J		
C337,338			CK73GB1H103K	CHIP C	0.010UF	K		
C350			CD04BJ1H220M	ELECTRO	22UF	50WV		
C356			CC73GCH1H471J	CHIP C	470PF	J		
C401,402			CD04BJ1H100M	ELECTRO	10UF	50WV		
C403,404			CC73GCH1H471J	CHIP C	470PF	J		
C405,406			CK73GB1H472K	CHIP C	4700PF	K		
C407,408			CD04BJ1E470M	ELECTRO	47UF	25WV		
C409,410			CC45FCH1H100D	CERAMIC	10PF	D		
C411,412			CC73GCH1H101J	CHIP C	100PF	J		
C413,414			CC73GCH1H470J	CHIP C	47PF	J		
C415,416			CD04BJ1H100M	ELECTRO	10UF	50WV		
C417,418			CC73GCH1H470J	CHIP C	47PF	J		
C419-422			CK73GB1H102K	CHIP C	1000PF	K		
C423,424			CC73GCH1H070D	CHIP C	7.0PF	D		
C450,451			CQ93FMG1H473J	MYLAR	0.047UF	J		
C463,464			CC73GCH1H221J	CHIP C	220PF	J		
C600			CK73GB1H103K	CHIP C	0.010UF	K		
C601			CD04BJ1V330M	ELECTRO	33UF	35WV		
C602,603			CD04BJ1H100M	ELECTRO	10UF	50WV		
C604			CD04BJ1H010M	ELECTRO	1.0UF	50WV		
C605			CD04BJ1H100M	ELECTRO	10UF	50WV		
C606			CD04BJ1A101M	ELECTRO	100UF	10WV		
C607			CK73GB1H103K	CHIP C	0.010UF	K		
C608			CD04BJ1A101M	ELECTRO	100UF	10WV		
C609,610			CK73GB1H103K	CHIP C	0.010UF	K		
C611			CD04BJ1H100M	ELECTRO	10UF	50WV		
C616			CD04BJ1H100M	ELECTRO	10UF	50WV		
C617			CK73GB1H104K	CHIP C	0.10UF	K		

K : KAC-X40 (North America) **M1** : KAC-X40 (Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-8580-10)

Ref. No.	Add	New	Parts No.	Description				Destination
C618			CK73GB1H103K	CHIP C	0.010UF	K		
C619			CD04BJ1H100M	ELECTRO	10UF	50WV		
C620			CK73GB1H103K	CHIP C	0.010UF	K		
C681			CD04BJ1H100M	ELECTRO	10UF	50WV		
C682			CK73GB1H103K	CHIP C	0.010UF	K		
C721,722			CC73GCH1H070D	CHIP C	7.0PF	D		
C906-909			CC73GCH1H471J	CHIP C	470PF	J		
C910-913			CC73GCH1H030C	CHIP C	3.0PF	C		
C929,930			CK73GB1H103K	CHIP C	0.010UF	K		
CN1			E41-2202-05	FLAT CABLE CONNECTOR				
J1			E63-0922-05	PIN JACK				
J3			E70-0838-05	SCREW TERMINAL BOARD				
J8			E70-0840-05	SCREW TERMINAL BOARD				
WH1			E39-0710-05	WIRING HARNESS				
⚠ CN3			J13-0602-05	FUSE HOLDER				
L1,2		*	L33-2413-05	CHOKE COIL				
L3			L19-0772-05	TRANSFORMER FOR CONVERTER				
N	3B		N09-6135-05	TAPTITE SCREW (3X8 B-T)				
P	3B		N09-6217-05	TAPTITE SCREW (3X14)				
Q	3B		N09-6447-05	TAPTITE SCREW (3X10 P-T)				
R1			RK73GB2A821J	CHIP R	820	J	1/10W	
R2			RD14BB2C103J	RD	10K	J	1/6W	
R3,4			RK73FB2B273J	CHIP R	27K	J	1/8W	
R5,6			RD14DB2H100J	SMALL-RD	10	J	1/2W	
R7,8			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R9,10			RK73GB2A150J	CHIP R	15	J	1/10W	
R11,12			RK73GB2A470J	CHIP R	47	J	1/10W	
R13,14			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R15			RK73GB2A273J	CHIP R	27K	J	1/10W	
R16			RK73GB2A822J	CHIP R	8.2K	J	1/10W	
R17			RK73GB2A103J	CHIP R	10K	J	1/10W	
R18			RK73GB2A334J	CHIP R	330K	J	1/10W	
R19			RK73GB2A103J	CHIP R	10K	J	1/10W	
R20			RK73GB2A913J	CHIP R	91K	J	1/10W	
R21			RK73GB2A103J	CHIP R	10K	J	1/10W	
R22			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R23			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R24			RK73GB2A163J	CHIP R	16K	J	1/10W	
R25			RK73GB2A104J	CHIP R	100K	J	1/10W	
R32			RD14DB2H100J	SMALL-RD	10	J	1/2W	
R33-38			RK73GB2A470J	CHIP R	47	J	1/10W	
R101,102			RD14BB2C102J	RD	1.0K	J	1/6W	
R103-106			RK73GB2A103J	CHIP R	10K	J	1/10W	
R107,108			RK73GB2A123J	CHIP R	12K	J	1/10W	
R109-112			RK73GH2A103D	CHIP R	10K	D	1/10W	
R113,114			RK73GB2A2R2J	CHIP R	2.2	J	1/10W	
R123-126			RK73GH2A103D	CHIP R	10K	D	1/10W	
R170			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R172			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R194-196			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R198			RD14BB2C301J	RD	300	J	1/6W	
R201			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R203,204			RK73GB2A433J	CHIP R	43K	J	1/10W	

Ref. No.	Add	New	Parts No.	Description				Destination
R205-208			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R209,210			RK73GB2A101J	CHIP R	100	J	1/10W	
R211,212			RK73GB2A821J	CHIP R	820	J	1/10W	
R213,214			RD14BB2C433J	RD	43K	J	1/6W	
R215-218			RK73GB2A151J	CHIP R	150	J	1/10W	
R219-222			RK73EB2E472J	CHIP R	4.7K	J	1/4W	
R223,224			RK73GB2A151J	CHIP R	150	J	1/10W	
R225			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R227,228			RK73GB2A433J	CHIP R	43K	J	1/10W	
R229-232			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R233-236			RK73EB2E101J	CHIP R	100	J	1/4W	
R237-240			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R241			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R242			RK73GB2A362J	CHIP R	3.6K	J	1/10W	
R243,244			RK73GB2A101J	CHIP R	100	J	1/10W	
R245-248			R92-0205-05	METAL-PLATE	0.1	K	2W	
R249,250			RK73GB2A151J	CHIP R	150	J	1/10W	
R251,252			RK73GB2A242J	CHIP R	2.4K	J	1/10W	
R255,256			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R257			RK73GB2A362J	CHIP R	3.6K	J	1/10W	
R259			RK73EB2E221J	CHIP R	220	J	1/4W	
R260,261			RD14NB2E4R7J	RD	4.7	J	1/4W	
R262			RK73EB2E221J	CHIP R	220	J	1/4W	
R263,264			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R265,266			RK73GB2A103J	CHIP R	10K	J	1/10W	
R267,268			RK73GB2A101J	CHIP R	100	J	1/10W	
R270,271			RD14DB2H100J	SMALL-RD	10	J	1/2W	
R273,274			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R280			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R282			RK73GB2A103J	CHIP R	10K	J	1/10W	
R284			RK73GB2A103J	CHIP R	10K	J	1/10W	
R285			RK73GB2A203J	CHIP R	20K	J	1/10W	
R287			RK73GB2A203J	CHIP R	20K	J	1/10W	
R289,290			RK73GB2A123J	CHIP R	12K	J	1/10W	
R291,292			RK73GB2A103J	CHIP R	10K	J	1/10W	
R301,302			RD14BB2C102J	RD	1.0K	J	1/6W	
R303-306			RK73GB2A103J	CHIP R	10K	J	1/10W	
R307,308			RK73GB2A123J	CHIP R	12K	J	1/10W	
R309-312			RK73GH2A103D	CHIP R	10K	D	1/10W	
R313,314			RK73GB2A2R2J	CHIP R	2.2	J	1/10W	
R323-326			RK73GH2A103D	CHIP R	10K	D	1/10W	
R370			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R372			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R394-396			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R398			RD14BB2C301J	RD	300	J	1/6W	
R401			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R403,404			RK73GB2A433J	CHIP R	43K	J	1/10W	
R405-408			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R409,410			RK73GB2A101J	CHIP R	100	J	1/10W	
R411,412			RK73GB2A821J	CHIP R	820	J	1/10W	
R413,414			RD14BB2C433J	RD	43K	J	1/6W	
R416-418			RK73GB2A151J	CHIP R	150	J	1/10W	
R419,420			RK73EB2E472J	CHIP R	4.7K	J	1/4W	
R422			RK73EB2E472J	CHIP R	4.7K	J	1/4W	
R423,424			RK73GB2A151J	CHIP R	150	J	1/10W	

K : KAC-X40 (North America) **M1** : KAC-X40 (Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-8580-10)

Ref. No.	Add	New	Parts No.	Description				Destination
R425			RK73EB2E152J	CHIP R	1.5K	J	1/4W	
R427,428			RK73GB2A433J	CHIP R	43K	J	1/10W	
R429-432			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R433-436			RK73EB2E101J	CHIP R	100	J	1/4W	
R437-440			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R441,442			RK73GB2A362J	CHIP R	3.6K	J	1/10W	
R443,444			RK73GB2A101J	CHIP R	100	J	1/10W	
R445-448			R92-0205-05	METAL-PLATE	0.1	K	2W	
R449,450			RK73GB2A151J	CHIP R	150	J	1/10W	
R451,452			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R453			RK73GB2A151J	CHIP R	150	J	1/10W	
R454			RK73EB2E221J	CHIP R	220	J	1/4W	
R455			RK73EB2E472J	CHIP R	4.7K	J	1/4W	
R457,458			RK73GB2A242J	CHIP R	2.4K	J	1/10W	
R459			RK73EB2E221J	CHIP R	220	J	1/4W	
R463,464			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R465,466			RK73GB2A103J	CHIP R	10K	J	1/10W	
R467,468			RK73GB2A101J	CHIP R	100	J	1/10W	
R470,471			RD14DB2H100J	SMALL-RD	10	J	1/2W	
R473,474			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R480			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R481			RK73GB2A103J	CHIP R	10K	J	1/10W	
R484			RK73GB2A103J	CHIP R	10K	J	1/10W	
R486			RK73GB2A203J	CHIP R	20K	J	1/10W	
R488			RK73GB2A203J	CHIP R	20K	J	1/10W	
R489,490			RK73GB2A123J	CHIP R	12K	J	1/10W	
R491,492			RK73GB2A103J	CHIP R	10K	J	1/10W	
R601,602			RK73GB2A103J	CHIP R	10K	J	1/10W	
R603			RD14BB2C101J	RD	100	J	1/6W	
R604			RK73GB2A103J	CHIP R	10K	J	1/10W	
R605			RK73GB2A333J	CHIP R	33K	J	1/10W	
R606			RK73GB2A103J	CHIP R	10K	J	1/10W	
R607			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R608			RD14DB2H332J	SMALL-RD	3.3K	J	1/2W	
R609			RK73GB2A333J	CHIP R	33K	J	1/10W	
R610			RK73GB2A303J	CHIP R	30K	J	1/10W	
R611,612			RK73GB2A362J	CHIP R	3.6K	J	1/10W	
R613			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R614			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R615,616			RD14BB2C392J	RD	3.9K	J	1/6W	
R617			RK73GB2A333J	CHIP R	33K	J	1/10W	
R620-623			RK73GB2A473J	CHIP R	47K	J	1/10W	
R624			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R625			RK73GB2A272J	CHIP R	2.7K	J	1/10W	
R627			RK73GB2A103J	CHIP R	10K	J	1/10W	
R628			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R629			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R632			RK73GB2A473J	CHIP R	47K	J	1/10W	
R633,634			RK73GB2A123J	CHIP R	12K	J	1/10W	
R635			RK73GB2A622J	CHIP R	6.2K	J	1/10W	
R636			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R637			RK73GB2A103J	CHIP R	10K	J	1/10W	
R642			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R643			RK73GB2A224J	CHIP R	220K	J	1/10W	
R644			RK73GB2A272J	CHIP R	2.7K	J	1/10W	

Ref. No.	Add	New	Parts No.	Description				Destination
R646,647			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R648			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R649			RK73GB2A182J	CHIP R	1.8K	J	1/10W	
R650			RK73GB2A103J	CHIP R	10K	J	1/10W	
R651			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R653			RK73GB2A224J	CHIP R	220K	J	1/10W	
R656			RK73GB2A272J	CHIP R	2.7K	J	1/10W	
R659			RK73GB2A104J	CHIP R	100K	J	1/10W	
R660			RK73GB2A154J	CHIP R	150K	J	1/10W	
R661,662			RK73GB2A220J	CHIP R	22	J	1/10W	
R663-665			RK73GB2A103J	CHIP R	10K	J	1/10W	
R666			RK73GB2A153J	CHIP R	15K	J	1/10W	
R667			RK73GB2A103J	CHIP R	10K	J	1/10W	
R668			RK73GB2A153J	CHIP R	15K	J	1/10W	
R669			RK73GB2A273J	CHIP R	27K	J	1/10W	
R670			RK73GB2A562J	CHIP R	5.6K	J	1/10W	
R671			RK73GB2A513J	CHIP R	51K	J	1/10W	
R672			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R673			RK73GB2A272J	CHIP R	2.7K	J	1/10W	
R674			RK73GB2A104J	CHIP R	100K	J	1/10W	
R675			RK73GB2A272J	CHIP R	2.7K	J	1/10W	
R676			RK73GB2A432J	CHIP R	4.3K	J	1/10W	
R681,682			RK73GB2A100J	CHIP R	10	J	1/10W	
R683,684			RD14BB2C4R7J	RD	4.7	J	1/6W	
R685			RK73GB2A331J	CHIP R	330	J	1/10W	
R721,722			RK73GB2A101J	CHIP R	100	J	1/10W	
R909,910			RD14BB2C102J	RD	1.0K	J	1/6W	
R911			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R912			RD14NB2E220J	RD	22	J	1/4W	
R913			RK73GB2A103J	CHIP R	10K	J	1/10W	
R914			RK73GB2A183J	CHIP R	18K	J	1/10W	
R915			RD14NB2E220J	RD	22	J	1/4W	
R916,917			RK73GB2A103J	CHIP R	10K	J	1/10W	
R918			RK73GB2A101J	CHIP R	100	J	1/10W	
R986			RK73GB2A103J	CHIP R	10K	J	1/10W	
VR1-4			R32-0340-05	SEMI FIXED VARIABLE RESISTOR				
W601-603			R92-1252-05	CHIP R	0 OHM	J	1/16W	
W650-668			R92-2053-05	CHIP R	0 OHM	J	1/8W	
W670-673			R92-2053-05	CHIP R	0 OHM	J	1/8W	
W675-680			R92-2053-05	CHIP R	0 OHM	J	1/8W	
W682-688			R92-2053-05	CHIP R	0 OHM	J	1/8W	
W690-705			R92-2053-05	CHIP R	0 OHM	J	1/8W	
W751-755			R92-1252-05	CHIP R	0 OHM	J	1/16W	
D1,2			RM4ZLF-J4NF	DIODE				
D3			UDZS5.1B	ZENER DIODE				
D4			1SS133	DIODE				
D5			FCH10A20	DIODE				
D6			FRH10A20	DIODE				
D7-9			1SS133	DIODE				
D10			LM1MA142WK-G	DIODE				
D11			1SS133	DIODE				
D100			UMZ6.8N	ZENER DIODE				
D101			LM1MA142WK-G	DIODE				
D102			LM1MA142WA-G	DIODE				

K : KAC-X40 (North America) **M1** : KAC-X40 (Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-8580-10)

Ref. No.	Add	New	Parts No.	Description	Destination
D107			UMZ6.8N	ZENER DIODE	
D152			1SS133	DIODE	
D203-206			1SS133	DIODE	
D207			UDZS5.1B	ZENER DIODE	
D209			1SS355	DIODE	
D210,211			1SS133	DIODE	
D229			LM1MA142WA-G	DIODE	
D251			1SS133	DIODE	
D253			LM1MA142WK-G	DIODE	
D254			LM1MA142WA-G	DIODE	
D255			LM1MA142WK-G	DIODE	
D260,261			1SS133	DIODE	
D295,296			LM1MA142WA-G	DIODE	
D300			UMZ6.8N	ZENER DIODE	
D301			LM1MA142WK-G	DIODE	
D302			LM1MA142WA-G	DIODE	
D403-405			1SS133	DIODE	
D408			1SS133	DIODE	
D430			LM1MA142WA-G	DIODE	
D457,458			1SS133	DIODE	
D459			LM1MA142WK-G	DIODE	
D460			LM1MA142WA-G	DIODE	
D461			LM1MA142WK-G	DIODE	
D462,463			1SS133	DIODE	
D495,496			LM1MA142WA-G	DIODE	
D602,603			1SS133	DIODE	
D604			UDZS10B	ZENER DIODE	
D605			1SS133	DIODE	
D606			UDZS15B	ZENER DIODE	
D607			UDZS6.8B	ZENER DIODE	
D609			1SS133	DIODE	
D613			1SS133	DIODE	
D614			UDZS10B	ZENER DIODE	
D616			1SS133	DIODE	
D617,618			LM1MA142WA-G	DIODE	
D619			1SS355	DIODE	
D911			UDZS12B	ZENER DIODE	
IC1-4			BA4560RF	ANALOGUE IC	
IC5			TL494IDR	ANALOGUE IC	
IC6			BA4560RF	ANALOGUE IC	
Q1			2SD2012-F	TRANSISTOR	
Q2			2SB1375-F	TRANSISTOR	
Q3-8			STP60NF06FP	FET	
Q9			2SC4097	TRANSISTOR	
Q10,11			2SA1577	TRANSISTOR	
Q12			2SC4097	TRANSISTOR	
Q13,14			DTA114EUA	DIGITAL TRANSISTOR	
Q15			2SC4081	TRANSISTOR	
Q16			2SA1576A	TRANSISTOR	
Q17			2SK246 (BL) -F	FET	
Q201-204			2SA992-A (F,E)	TRANSISTOR	
Q205-208			2SC1845-A (F,E)	TRANSISTOR	
Q209,210			2SA992-A (F,E)	TRANSISTOR	
Q211,212			2SA1576A	TRANSISTOR	
Q215,216			2SC1845-A (F,E)	TRANSISTOR	

Ref. No.	Add	New	Parts No.	Description	Destination
Q217,218			2SA992-A (F,E)	TRANSISTOR	
Q220			TRAIT9N	TRANSISTOR	
Q222			TRAIT9P	TRANSISTOR	
Q223			TRAIT9N	TRANSISTOR	
Q225			TRAIT9P	TRANSISTOR	
Q241,242			2SC4081	TRANSISTOR	
Q280			2SC4081	TRANSISTOR	
Q282-284			2SC4081	TRANSISTOR	
Q401-404			2SA992-A (F,E)	TRANSISTOR	
Q405-408			2SC1845-A (F,E)	TRANSISTOR	
Q409,410			2SA992-A (F,E)	TRANSISTOR	
Q411,412			2SA1576A	TRANSISTOR	
Q415,416			2SC1845-A (F,E)	TRANSISTOR	
Q417,418			2SA992-A (F,E)	TRANSISTOR	
Q423,424			TRAIT9N	TRANSISTOR	
Q425,426			TRAIT9P	TRANSISTOR	
Q443,444			2SC4081	TRANSISTOR	
Q481-484			2SC4081	TRANSISTOR	
Q601			2SC1845-A (F,E)	TRANSISTOR	
Q602			2SC4081	TRANSISTOR	
Q603			2SA1576A	TRANSISTOR	
Q604			2SB1241	TRANSISTOR	
Q605,606			2SC4081	TRANSISTOR	
Q610-613			2SC4081	TRANSISTOR	
Q614,615			2SA1576A	TRANSISTOR	
Q616			2SC4081	TRANSISTOR	
Q617			2SA1576A	TRANSISTOR	
Q618			2SC4081	TRANSISTOR	
Q619			DTA114EUA	DIGITAL TRANSISTOR	
Q620			DTC114EUA	DIGITAL TRANSISTOR	
Q621			2SC4081	TRANSISTOR	
Q684,685			2SD1863	TRANSISTOR	
TH601-605			NCP18XH103J0S	THERMISTOR	

K : KAC-X40 (North America) **M1** : KAC-X40 (Other Areas)

⚠ Indicates safety critical components.