
# EXPLODED VIEW • PART LIST

DCP section

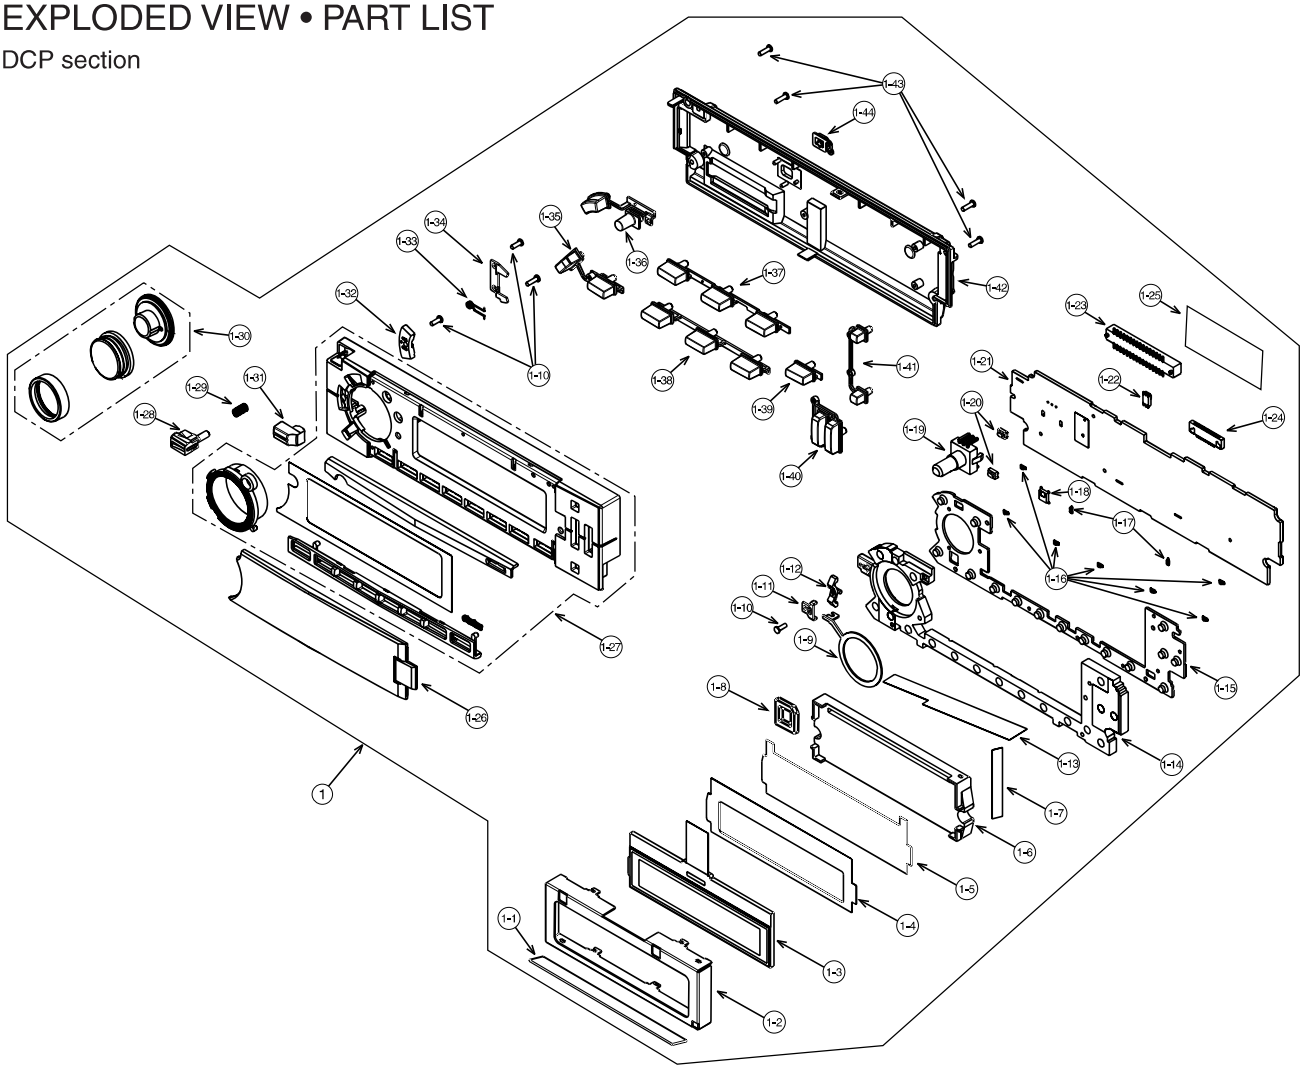



Note:- Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | DCP-548-600 | DCP-ASSY (PE-2799B-A) | 1 |
| | DCP-567-800 | DCP-ASSY (PE-2799K-A) | 1 |
| 1-1 | 291-0121-00 | STICKER | 1 |
| 1-2 | 331-4235-01 | LCD COVER | 1 |
| 1-3 | 379-1354-80 | LCD | 1 |
| 1-4 | 347-7937-00 | FILM | 1 |
| 1-5 | 347-7933-00 | SHADE | 1 |
| 1-6 | 335-7857-00 | LCD HOLDER | 1 |
| 1-7 | 291-0119-00 | STICKER | 1 |
| 1-8 | 345-5542-01 | SPONGE | 1 |
| 1-9 | 331-4237-00 | EARTH PLATE | 1 |
| 1-10 | 716-0872-50 | PAD SCREW (M1.7x5) | 4 |
| 1-11 | 331-4240-00 | ARM COVER | 1 |
| 1-12 | 335-7855-00 | LEVEL ARM | 1 |
| 1-13 | 291-0120-00 | STICKER (PE-2799B-A) | 1 |
| | 291-0120-01 | STICKER (PE-2799K-A) | 1 |
| 1-14 | 335-7849-00 | ILLUMI PLATE | 1 |
| 1-15 | 345-5916-00 | RUBBER KEYPAD | 1 |
| 1-16 | 001-7819-90 | LED | 7 |
| 1-17 | 001-7818-91 | LED | 2 |
| 1-18 | 060-4017-90 | IR RECEIVER | 1 |
| 1-19 | 016-9901-01 | VR ENCODER | 1 |
| 1-20 | 013-6312-50 | TACT SWITCH | 2 |
| 1-21 | ---------- | SWITCH PWB | 1 |

| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1-22 | 013-6511-50 | LUMI SWITCH | 1 |
| 1-23 | 076-0647-00 | DCP CONNECTOR | 1 |
| 1-24 | 074-2002-76 | CONNECTOR | 1 |
| 1-25 | 331-4345-00 | COPPER SHEET | 1 |
| 1-26 | 373-1107-00 | DIAL COVER (PE-2799B-A) | 1 |
| | 373-1109-00 | DIAL COVER (PE-2799K-A) | 1 |
| 1-27 | 947-0603-02 | ESC-SUB-ASSY | 1 |
| 1-28 | 382-8004-00 | RELEASE BUTTON | 1 |
| 1-29 | 750-6791-00 | SPRING | 1 |
| 1-30 | 947-0605-00 | VOL-KNOB-ASSY | 1 |
| 1-31 | 382-8005-00 | SEEK BUTTON | 1 |
| 1-32 | 335-7856-00 | BASE LEVER | 1 |
| 1-33 | 750-6794-00 | SPRING | 1 |
| 1-34 | 331-4239-00 | LEVER HOLDER | 1 |
| 1-35 | 382-8000-00 | BUTTON AM/SRC | 1 |
| 1-36 | 382-7999-00 | BUTTON ADJ/PLAY | 1 |
| 1-37 | 382-7997-00 | BUTTON 135 | 1 |
| 1-38 | 382-7998-00 | BUTTON 246 | 1 |
| 1-39 | 382-8003-00 | BUTTON BND | 1 |
| 1-40 | 382-8002-00 | BUTTON D/Z | 1 |
| 1-41 | 382-8006-00 | BUTTON ISR/T | 1 |
| 1-42 | 335-7851-02 | REAR COVER | 1 |
| 1-43 | 716-0872-62 | SPECIAL SCREW (M1.7x6) | 4 |
| 1-44 | 382-6109-00 | BUTTON EJECT | 1 |

Main section

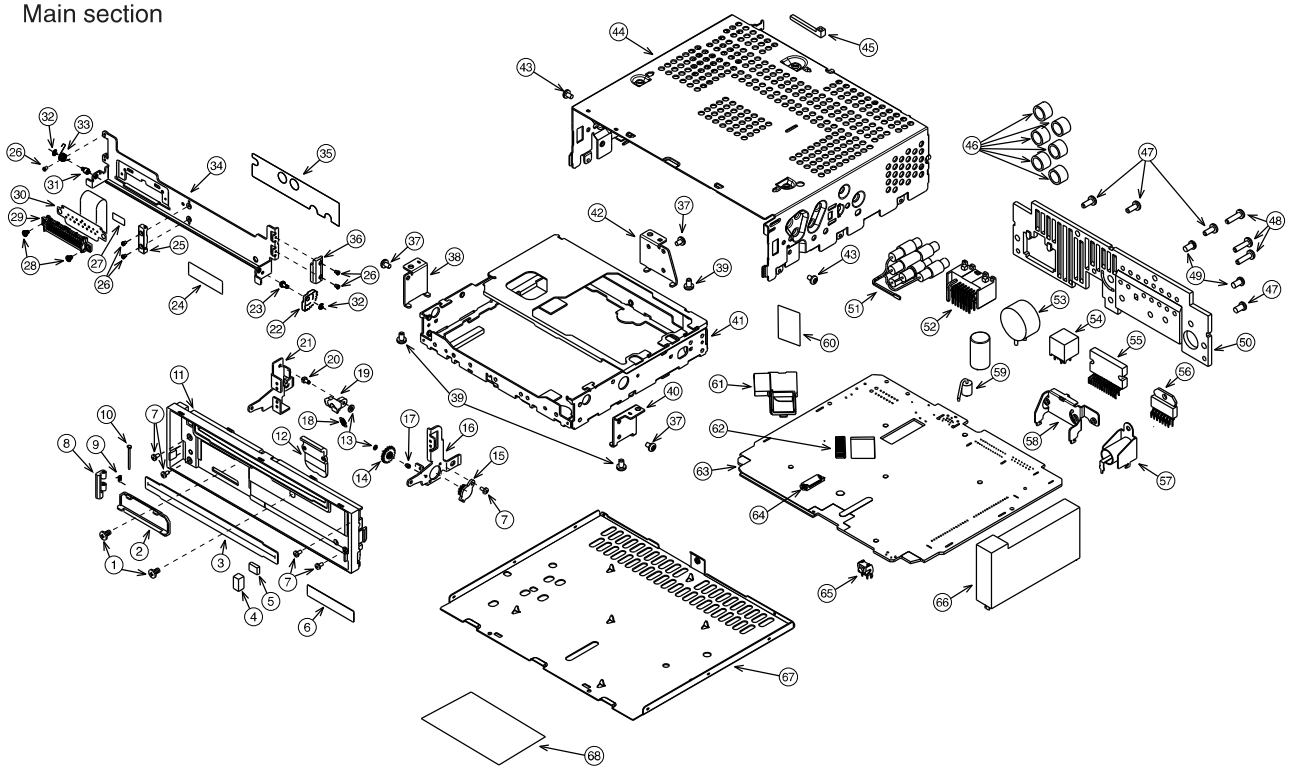


| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | 714-2606-8H | SPECIAL M-SCREW (M2.6x6) | 2 |
| 2 | 335-6499-00 | CN-CVR | 1 |
| 3 | 346-0097-00 | LEATHER SHEET | 1 |
| 4 | 345-5442-00 | CUSHION | 1 |
| 5 | 345-5440-00 | CUSHION | 1 |
| 6 | 347-7008-00 | FPC SUPPORT | 1 |
| 7 | 780-2004-51 | SPECIAL SCREW (M2x4) | 5 |
| 8 | 335-6501-01 | HOOK DCP | 1 |
| 9 | 750-3454-00 | SPRING | 1 |
| 10 | 341-1764-00 | SHAFT | 1 |
| 11 | 370-6025-06 | INNER ESCUTCHEON | 1 |
| 12 | 335-6886-00 | ILLUMI PLATE | 1 |
| 13 | 746-0761-00 | SPECIAL WASHER | 2 |
| 14 | 613-0683-00 | GEAR | 1 |
| 15 | 613-0730-00 | GEAR DAMPER | 1 |
| 16 | 331-3563-01 | ARM-R | 1 |
| 17 | 341-1685-00 | SHART | 1 |
| 18 | 750-3341-00 | SPRING | 1 |
| 19 | 335-6887-00 | HOOK LOCK | 1 |
| 20 | 341-1792-00 | SHAFT | 1 |
| 21 | 331-3564-01 | ARM-L | 1 |
| 22 | 613-0684-00 | FAN GEAR | 1 |
| 23 | 341-1794-00 | SHAFT | 1 |
| 24 | 291-0092-00 | STICKER | 1 |
| 25 | 335-6502-00 | SLIDER | 1 |
| 26 | 738-1722-1H | PRECISION SCREW (M1.7x2.2) | 5 |
| 27 | 347-6356-00 | DOUBLE FACE | 1 |
| 28 | 716-3444-50 | SPECIAL SCREW (M1.7) | 2 |
| 29 | 074-1278-01 | OUTLET SOCKET | 1 |
| 30 | 039-1862-01 | FPC | 1 |
| 31 | 341-1793-00 | SHAFT | 1 |
| 32 | 743-1500-10 | E-RING | 2 |
| 33 | 750-3342-21 | SPRING | 1 |
| 34 | 331-3565-00 | DCP HOLDER | 1 |
| 35 | 290-7995-00 | LABEL | 1 |

| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 36 | 335-6500-01 | HOOK | 1 |
| 37 | 714-2604-8B | MC SCREW (M2.6x4) | 3 |
| 38 | 331-3607-02 | MECH BRACKET | 1 |
| 39 | 731-3005-8B | TAPTIGHT (M3x5) | 3 |
| 40 | 331-4234-00 | MECH BRACKET | 1 |
| 41 | 929-5003-80 | CD MECHA | 1 |
| 42 | 331-3366-02 | MECH BRACKET | 1 |
| 43 | 731-3006-8B | TAPTIGHT (M3x6) | 2 |
| 44 | 310-1835-00 | UPPER CASE | 1 |
| 45 | 335-0833-01 | CABLE TIE | 1 |
| 46 | 345-3799-0L | RUBBER PART | 6 |
| 47 | 731-3008-8B | TAPTIGHT (M3x8) | 4 |
| 48 | 731-3012-8B | TAPTIGHT (M3x12) | 3 |
| 49 | 714-3006-8B | MC SCREW (M3x8) | 2 |
| 50 | 313-1976-00 | HEAT SINK | 1 |
| 51 | 855-5538-60 | RCA PIN CORD | 1 |
| 52 | 074-1214-00 | OUTLET SOCKET | 1 |
| 53 | 010-8039-00 | CHOKE COIL | 1 |
| 54 | 074-1194-00 | CeNET CONNECTOR | 1 |
| 55 | 051-2057-00 | IC | 1 |
| 56 | 051-3349-00 | IC | 1 |
| 57 | 092-4000-51 | ANT RECEPT | 1 |
| 58 | 331-3996-00 | IC HOLDER | 1 |
| 59 | 001-0592-61 | DIODE | 1 |
| 60 | 347-3977-0L | LABEL | 1 |
| 61 | 335-7501-01 | FPC PROTECTOR | 1 |
| 62 | 074-1143-15 | FPC CONNECTOR | 1 |
| 63 | ---------- | MAIN PWB | 1 |
| 64 | 074-1138-60 | FPC CONNECTOR | 1 |
| 65 | 013-6103-00 | TACT SWITCH | 1 |
| 66 | 880-2150A | CCC-TUNER | 1 |
| 67 | 311-1929-00 | LOWER CASE | 1 |
| 68 | 286-6788-00 | SET PLATE (PE-2799B-A) | 1 |
| | 286-6790-00 | SET PLATE (PE-2799K-A) | 1 |

# EXPLODED VIEW • PARTS LIST

CD mechanism section 929-5003-80

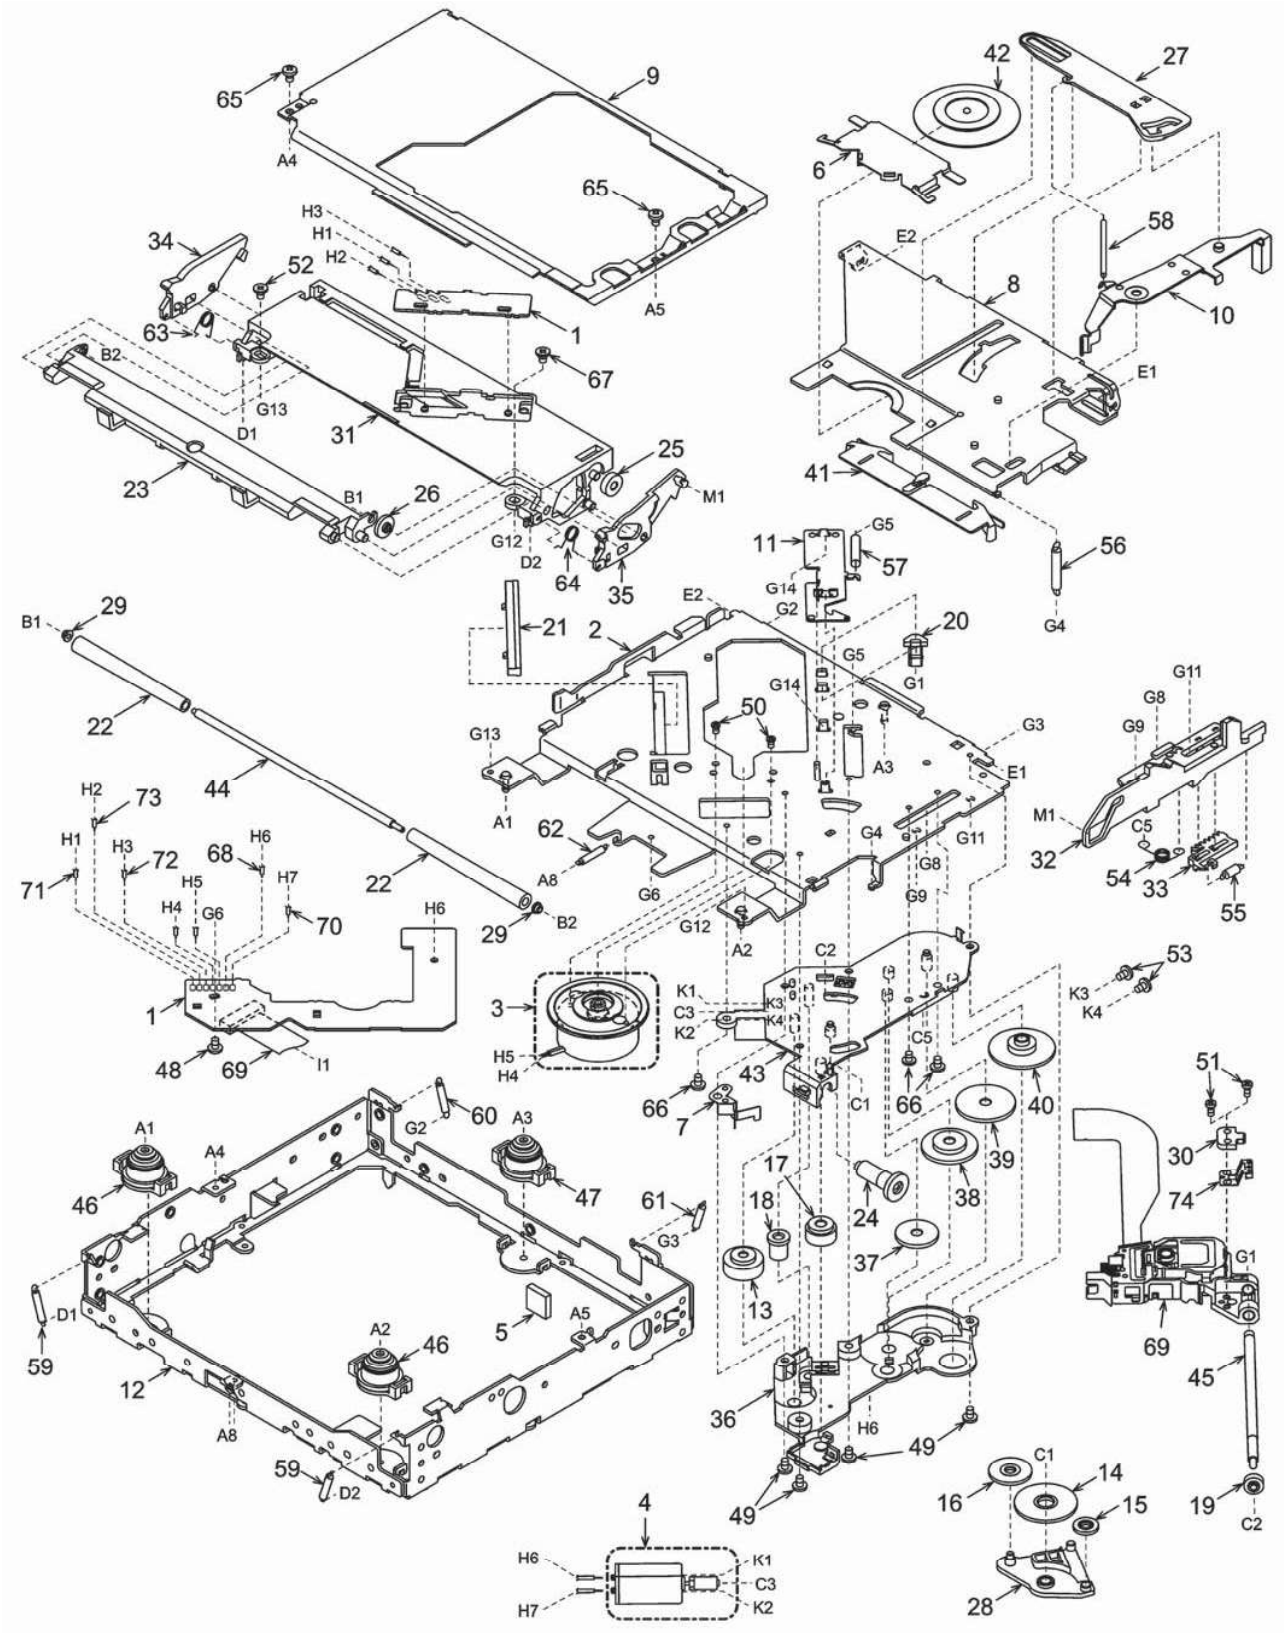

| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | ---------- | SENSOR PWB | 1 |
| 2 | 966-1743-21 | DRIVE-PLT-ASSY | 1 |
| 3 | SMA-182-100 | SPINDLE MOTOR-ASSY | 1 |
| 4 | SMA-183-100 | SLED MOTOR-ASSY | 1 |
| 5 | 345-5476-20 | CUSHION RUBBER | 1 |
| 6 | 620-1023-23 | CLAMPER PLATE | 1 |
| 7 | 620-1026-21 | SPRING PLATE | 1 |
| 8 | 620-1596-23 | CLAMPER LINK | 1 |
| 9 | 620-1598-22 | UPPER CHASSIS | 1 |
| 10 | 620-1752-20 | SENSOR ARM | 1 |
| 11 | 620-1753-20 | ID-LOCK PLATE | 1 |
| 12 | 620-1748-21 | LOWER CHASSIS | 1 |
| 13 | 621-0608-21 | SECOND GEAR | 1 |
| 14 | 621-0609-20 | BASE GEAR | 1 |
| 15 | 621-0610-20 | IDLE GEAR A | 1 |
| 16 | 621-0611-20 | IDLE GEAR B | 1 |
| 17 | 621-0612-21 | ROLLER GEAR A | 1 |
| 18 | 621-0620-20 | THREAD GEAR A | 1 |
| 19 | 621-0621-20 | THREAD GEAR B | 1 |
| 20 | 621-0623-23 | LS-HOLDER | 1 |
| 21 | 621-0624-22 | GUIDE RAIL | 1 |
| 22 | 621-0711-20 | LOADING ROLLER | 2 |
| 23 | 621-0718-21 | ROLLER GUIDE | 1 |
| 24 | 621-0719-20 | ROLLER GEAR | 1 |
| 25 | 621-0720-20 | ROLLER GEAR C | 1 |
| 26 | 621-0721-20 | ROLLER GEAR D | 1 |
| 27 | 621-0728-20 | STOPPER LINK | 1 |
| 28 | 621-1719-20 | IDLE CASE | 1 |
| 29 | 621-1726-20 | ROLLER SLEEVE | 2 |
| 30 | 621-1729-20 | SH-BASE | 1 |
| 31 | 621-1742-20 | UPPER GUIDE | 1 |
| 32 | 621-1743-20 | SHIFT LEVER | 1 |
| 33 | 621-1744-20 | RACK | 1 |
| 34 | 621-1745-20 | LOCK ARM L | 1 |
| 35 | 621-1746-20 | LOCK ARM R | 1 |
| 36 | 621-1747-20 | GEAR COVER | 1 |
| 37 | 621-1748-20 | POWER GEAR A | 1 |

| No. | PART No. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 38 | 621-1749-20 | POWER GEAR B | 1 |
| 39 | 621-1750-20 | POWER GEAR C | 1 |
| 40 | 621-1751-20 | POWER GEAR D | 1 |
| 41 | 621-1752-20 | DISC STOPPER | 1 |
| 42 | 621-1753-20 | CLAMPER RING | 1 |
| 43 | 621-1754-20 | GEAR BASE | 1 |
| 44 | 622-1571-21 | ROLLER SHAFT | 1 |
| 45 | 624-0020-00 | LEAD SCREW | 1 |
| 46 | 629-0086-20 | DAMPER F | 2 |
| 47 | 629-0087-20 | DAMPER R | 1 |
| 48 | 716-1507-01 | SCREW (M2x3) | 1 |
| 49 | 716-1670-01 | SCREW (M2x4) | 4 |
| 50 | 716-1733-01 | SCREW (M1.7x2.3) | 2 |
| 51 | 716-3469-01 | SCREW (1.7x4) | 2 |
| 52 | 716-3473-01 | SCREW (M2X3) | 1 |
| 53 | 716-3551-00 | SCREW (M1.4X2.5) | 2 |
| 54 | 750-3467-21 | SHIFT SPRING | 1 |
| 55 | 750-3468-20 | RACK SPRING | 1 |
| 56 | 750-3469-20 | CLAMPER SPRING | 1 |
| 57 | 750-3470-20 | ID-LOCK SPRING | 1 |
| 58 | 750-3471-20 | SENSOR SPRING | 1 |
| 59 | 750-3472-21 | DR-SPRING F | 2 |
| 60 | 750-3473-20 | DR-SPRING RA | 1 |
| 61 | 750-3474-20 | DR-SPRING RB | 1 |
| 62 | 750-3475-21 | DR-SPRING C | 1 |
| 63 | 750-6797-20 | ROLLER SPRING L | 1 |
| 64 | 750-6798-20 | ROLLER SPRING R | 1 |
| 65 | 780-2003-01 | SCREW (M2x3) | 2 |
| 66 | 780-2025-00 | SCREW (M2x2.5) | 3 |
| 67 | 781-1730-00 | SCREW (M1.7x3) | 1 |
| 68 | 803-4906-60 | VINYL-COAT-WIRE (ORG) | 1 |
| 69 | 969-0071-30 | PICKUP-ASSY | 1 |
| 70 | 816-2590-00 | SPECIAL LEAD (GRN) | 1 |
| 71 | 816-2591-00 | SPECIAL LEAD (YEL) | 1 |
| 72 | 816-2592-00 | SPECIAL LEAD (BLUE) | 1 |
| 73 | 816-2593-00 | SPECIAL LEAD (PUR) | 1 |
| 74 | 966-1722-20 | SH-RACK-ASSY | 1 |

# ELECTRICAL PARTS LIST

Main PWB (B1) section

Note:- Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Remarks:- #: For PE-2799B-A only @: For PE-2799K-A only

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| ANT101 | 092-4000-51 | ANT-RECEPT |
| BL101 | 880-2150A | CCC-TUNER |
| C101 | 166-1511-50 | 50V 150pF |
| C102 | 166-2201-50 | 50V 22pF |
| C103 | 187-1073-35 | 16V 100uF |
| C104 | 168-2232-55 | 50V 0.022uF |
| C105 | 168-1522-55 | 50V 1500pF |
| C106 | 168-3322-55 | 50V 3300pF |
| C107 | 168-3322-55 | 50V 3300pF |
| C108 | 168-1522-55 | 50V 1500pF |
| C109 | 187-1073-35 | 16V 100uF |
| C110 | 187-1073-35 | 16V 100uF |
| C111 | 168-2232-55 | 50V 0.022uF |
| C112 | 187-1073-35 | 16V 100uF |
| C113 | 168-2232-55 | 50V 0.022uF |
| C114 | 187-2253-65 | 50V 2.2uF |
| C115 | 187-2253-65 | 50V 2.2uF |
| C117 | 168-1242-55 | 25V 0.12uF |
| C118 | 168-2732-55 | 50V 0.027uF |
| C119 | 178-2242-78 | 25V 0.22uF |
| C120 | 178-2242-78 | 25V 0.22uF |
| C121 | 168-2732-55 | 50V 0.027uF |
| C122 | 168-1242-55 | 25V 0.12uF |
| C123 | 168-1022-55 | 50V 1000pF |
| C207 | 166-2201-50 | 50V 22pF |
| C208 | 166-1801-50 | 50V 18pF |
| C209 | 042-0423-94 | 10V 4.7uF |
| C211 | 168-1032-55 | 50V 0.01uF |
| C212 | 178-2242-78 | 25V 0.22uF |
| C213 | 168-1032-55 | 50V 0.01uF |
| C214 | 168-1032-55 | 50V 0.01uF |
| C216 | 168-1032-55 | 50V 0.01uF |
| C217 | 168-2232-55 | 50V 0.022uF |
| C218 | 168-2232-55 | 50V 0.022uF |
| C219 | 168-2232-55 | 50V 0.022uF |
| C220 | 168-1022-55 | 50V 1000pF |
| C221 | 168-1042-78 | 16V 0.1uF |
| C223 | 187-1073-25 | 16V 100uF |
| C224 | 042-0650-01 | 5.5V 0.22F |
| C226 | 168-1042-78 | 16V 0.1uF |
| C227 | 166-4711-50 | 50V 470pF |
| C404 | 187-1063-35 | 16V 10uF |
| C405 | 168-1042-78 | 16V 0.1uF |
| C501 | 172-1041-15 | 50V 0.1uF |
| C502 | 187-1053-65 | 50V 1uF |
| C503 | 187-2253-65 | 50V 2.2uF |
| C504 | 187-1063-35 | 16V 10uF |
| C505 | 178-4742-78 | 25V 0.47uF |
| C506 | 178-4742-78 | 25V 0.47uF |
| C507 | 178-4742-78 | 25V 0.47uF |
| C508 | 178-4742-78 | 25V 0.47uF |
| C509 | 166-1011-50 | 50V 100pF |
| C510 | 166-1011-50 | 50V 100pF |
| C511 | 166-1011-50 | 50V 100pF |
| C512 | 166-1011-50 | 50V 100pF |
| C513 | 166-4711-50 | 50V 470pF |
| C514 | 166-4711-50 | 50V 470pF |
| C515 | 166-4711-50 | 50V 470pF |
| C516 | 166-4711-50 | 50V 470pF |
| C517 | 187-1063-35 | 16V 10uF |
| C518 | 168-3922-55 | 50V 3900pF |
| C519 | 168-3922-55 | 50V 3900pF |
| C520 | 187-1063-35 | 16V 10uF |
| C521 | 187-1063-35 | 16V 10uF |
| C522 | 168-3922-55 | 50V 3900pF |
| C523 | 168-3922-55 | 50V 3900pF |
| C524 | 187-1063-35 | 16V 10uF |
| C525 | 168-1022-55 | 50V 1000pF |
| C526 | 168-1042-78 | 16V 0.1uF |
| C527 | 168-1042-78 | 16V 0.1uF |
| C528 | 168-1042-78 | 16V 0.1uF |
| C601 | 187-1063-35 | 16V 10uF |
| C602 | 178-2242-78 | 25V 0.22uF |
| C603 | 178-2242-78 | 25V 0.22uF |
| C604 | 168-4732-78 | 50V 0.047uF |
| C605 | 168-4732-78 | 50V 0.047uF |
| C606 | 187-1063-35 | 16V 10uF |
| C607 | 178-2242-78 | 25V 0.22uF |
| C608 | 178-2242-78 | 25V 0.22uF |
| C609 | 168-1042-78 | 16V 0.1uF |
| C610 | 187-1063-35 | 16V 10uF |
| C611 | 187-1063-35 | 16V 10uF |
| C612 | 187-1063-35 | 16V 10uF |
| C613 | 187-1063-35 | 16V 10uF |
| C614 | 168-1042-78 | 16V 0.1uF |
| C615 | 187-1063-35 | 16V 10uF |
| C616 | 187-1063-35 | 16V 10uF |
| C701 | 168-1042-78 | 16V 0.1uF |
| C702 | 168-1042-78 | 16V 0.1uF |
| C703 | 166-4701-50 | 50V 47pF |
| C704 | 168-1042-78 | 16V 0.1uF |
| C705 | 168-1532-55 | 50V 0.015uF |
| C706 | 168-1032-55 | 50V 0.01uF |
| C707 | 168-4722-55 | 50V 4700pF |
| C708 | 168-1522-55 | 50V 1500pF |
| C709 | 168-1042-78 | 16V 0.1uF |
| C710 | 168-1042-78 | 16V 0.1uF |
| C711 | 168-1532-55 | 50V 0.015uF |
| C712 | 168-1042-78 | 16V 0.1uF |
| C713 | 168-1042-78 | 16V 0.1uF |
| C714 | 166-6811-50 | 50V 680pF |
| C715 | 166-6801-50 | 50V 68pF |
| C716 | 168-1042-78 | 16V 0.1uF |
| C717 | 178-1052-78 | 16V 1uF |
| C720 | 178-1052-78 | 16V 1uF |
| C721 | 187-1073-15 | 6.3V 100uF |
| C722 | 178-1052-78 | 16V 1uF |
| C728 | 168-3332-78 | 50V 0.033uF |
| C729 | 168-6822-55 | 50V 6800pF |
| C730 | 168-1042-78 | 16V 0.1uF |
| C731 | 168-1042-78 | 16V 0.1uF |
| C732 | 168-4732-78 | 50V 0.047uF |
| C733 | 168-4732-78 | 50V 0.047uF |
| C734 | 166-4711-50 | 50V 470pF |
| C735 | 166-4711-50 | 50V 470pF |
| C736 | 187-2263-35 | 16V 22uF |
| C738 | 168-1042-78 | 16V 0.1uF |
| C739 | 187-1073-25 | 10V 100uF |
| C740 | 168-1042-78 | 16V 0.1uF |
| C741 | 168-1042-78 | 16V 0.1uF |
| C742 | 168-1042-78 | 16V 0.1uF |
| C743 | 168-1042-78 | 16V 0.1uF |
| C744 | 168-5622-55 | 50V 5600pF |
| C745 | 168-1042-78 | 16V 0.1uF |
| C746 | 178-1052-78 | 16V 1uF |
| C754 | 168-1042-78 | 16V 0.1uF |
| C755 | 166-1011-50 | 50V 100pF |
| C761 | 168-1042-78 | 16V 0.1uF |
| C762 | 168-2222-55 | 50V 2200pF |
| C763 | 168-1042-78 | 16V 0.1uF |
| C765 | 168-4722-55 | 50V 4700pF |
| C766 | 168-1042-78 | 16V 0.1uF |
| C767 | 168-1042-78 | 16V 0.1uF |
| C768 | 168-1042-78 | 16V 0.1uF |
| C769 | 168-1042-78 | 16V 0.1uF |
| C770 | 168-1042-78 | 16V 0.1uF |
| C771 | 168-1042-78 | 16V 0.1uF |
| C774 | 178-1052-78 | 16V 1uF |
| C775 | 187-1073-15 | 6.3V 100uF |
| C776 | 168-1032-55 | 50V 0.01uF |
| C777 | 187-1073-15 | 6.3V 100uF |
| C778 | 187-4763-35 | 16V 47uF |
| C801 | 168-1822-55 | 50V 1800pF |
| C802 | 168-1822-55 | 50V 1800pF |
| C803 | 168-1822-55 | 50V 1800pF |
| C804 | 168-1822-55 | 50V 1800pF |
| C805 | 168-1822-55 | 50V 1800pF |
| C806 | 168-1822-55 | 50V 1800pF |
| C807 | 168-1822-55 | 50V 1800pF |
| C808 | 168-1822-55 | 50V 1800pF |
| C809 | 189-2283-32 | 16V 2200uF |
| C811 | 168-1032-55 | 50V 0.01uF |
| C901 | 168-1042-78 | 16V 0.1uF |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C902 | 042-1598-90 | 10V 470uF |
| C903 | 187-1073-25 | 10V 100uF |
| C904 | 168-1042-78 | 16V 0.1uF |
| C905 | 168-1042-78 | 16V 0.1uF |
| C906 | 168-1042-78 | 16V 0.1uF |
| C907 | 168-1042-78 | 16V 0.1uF |
| C908 | 168-1042-78 | 16V 0.1uF |
| C909 | 168-1042-78 | 16V 0.1uF |
| C910 | 168-1042-78 | 16V 0.1uF |
| C911 | 168-1042-78 | 16V 0.1uF |
| C912 | 187-1063-35 | 16V 10uF |
| C913 | 187-4763-35 | 16V 47uF |
| C914 | 168-1032-55 | 50V 0.01uF |
| C915 | 187-4763-35 | 16V 47uF |
| C916 | 168-1042-78 | 16V 0.1uF |
| C917 | 168-1042-78 | 16V 0.1uF |
| C918 | 166-1011-50 | 50V 100pF |
| CCT201 | 050-0148-51 | CCT 47K ohm |
| CCT701 | 050-0148-51 | CCT 47K ohm |
| D201 | 001-7062-90 | LED |
| D202 | 001-1310-00 | KDS160 |
| D203 | 001-1310-00 | KDS160 |
| D204 | 001-1310-00 | KDS160 |
| D205 | 001-2626-90 | KDR357 |
| D401 | 001-0529-24 | MA8043H |
| D701 | 001-1313-00 | KDS226 |
| D702 | 001-2626-90 | KDR357 |
| D801 | 001-0592-61 | 1N5404 |
| D802 | 001-2003-91 | 1A4-J |
| D803 | 001-2003-91 | 1A4-J |
| D804 | 001-2003-91 | 1A4-J |
| D805 | 001-1310-00 | KDS160 |
| D806 | 001-1310-00 | KDS160 |
| D807 | 001-0529-43 | MA8082M |
| D808 | 001-1310-00 | KDS160 |
| D809 | 001-2003-91 | 1A4-J |
| D901 | 001-4312-32 | 02DZ5.6Y |
| D902 | 001-2003-91 | 1A4-J |
| D903 | 001-4312-26 | 02DZ4.7Y |
| IC202 | 052-3958-01 | uPD703270YGC -8EA |
| IC203 | 051-5456-90 | BU4220G |
| IC402 | 051-3049-90 | HA17558AF |
| IC501 | 051-2057-00 | TB2906HQ |
| IC601 | 051-3049-90 | HA17558AF |
| IC602 | 051-3049-90 | HA17558AF |
| IC701 | 051-6399-00 | TC94A15FG |
| IC702 | 051-6079-90 | BA5830FP |
| IC703 | 051-6711-10 | TA94A34FG |
| IC704 | 051-3350-90 | TAR5S15 |
| IC901 | 051-3349-00 | HA13166 |
| IC902 | 051-6648-90 | HA12240FP |
| IC903 | 051-3373-90 | TAR5S40U |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| J1 | 060-0108-90 | 1/4W 0 ohm |
| J200 | 074-1318-68 | DCP-06-18P |
| J600 | 855-5538-60 | 10P |
| J701 | 074-1138-65 | 15P |
| J702 | 074-1138-60 | DCP PLUG 15P |
| J801 | 074-1214-00 | 16P |
| J901 | 074-1194-00 | CE-NET13P |
| L101 | 010-2003-04 | 30uH |
| L102 | 010-4215-00 | 47mH |
| L103 | 010-3001-60 | 6.8uH |
| L104 | 010-3001-60 | 6.8uH |
| L105 | 010-3001-60 | 6.8uH |
| L201 | 010-3105-62 | 1K ohm/100 MHz |
| L202 | 010-3001-56 | 2.2uH |
| L203 | 010-3001-56 | 2.2uH |
| L204 | 010-2285-57 | 1K ohm/100 MHz |
| L501 | 010-2285-57 | 1K ohm/100 MHz |
| L502 | 010-2285-57 | 1K ohm/100 MHz |
| L503 | 010-2285-57 | 1K ohm/100 MHz |
| L504 | 010-2285-57 | 1K ohm/100 MHz |
| L505 | 010-2285-57 | 1K ohm/100 MHz |
| L506 | 010-2285-57 | 1K ohm/100 MHz |
| L507 | 010-2285-57 | 1K ohm/100 MHz |
| L508 | 010-2285-57 | 1K ohm/100 MHz |
| L509 | 010-2285-57 | 1K ohm/100 MHz |
| L510 | 010-2285-57 | 1K ohm/100 MHz |
| L511 | 010-2285-57 | 1K ohm/100 MHz |
| L512 | 010-2285-57 | 1K ohm/100 MHz |
| L701 | 117-0000-05 | 1/8W 0 ohm |
| L702 | 117-0000-05 | 1/8W 0 ohm |
| L704 | 117-0000-05 | 1/8W 0 ohm |
| Q101 | 125-4017-90 | KTC4378 |
| Q205 | 125-2199-92 | KRC102S |
| Q206 | 125-2199-92 | KRC102S |
| Q207 | 125-2199-92 | KRC102S |
| Q209 | 125-3007-90 | KTA1298 |
| Q211 | 125-3007-90 | KTA1298 |
| Q214 | 125-3007-90 | KTA1298 |
| Q216 | 125-0199-93 | KRA103S |
| Q217 | 125-2199-92 | KRC102S |
| Q219 | 125-9015-92 | RN4902 |
| Q500 | 125-4010-90 | KTC3875GR |
| Q501 | 125-4010-90 | KTC3875GR |
| Q502 | 125-4010-90 | KTC3875GR |
| Q503 | 125-4010-90 | KTC3875GR |
| Q701 | 125-3011-90 | KTA1663 |
| Q707 | 125-8014-90 | KTK5134S |
| Q708 | 125-2199-92 | KRC102S |
| Q709 | 125-3007-90 | KTA1298 |
| Q801 | 125-0199-96 | KRA106S |
| Q802 | 125-2199-96 | KRC106S |
| Q803 | 125-3004-90 | KTA1504 |
| Q804 | 125-0199-96 | KRA106S |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| Q805 | 125-2199-96 | KRC106S |
| Q806 | 125-4010-90 | KTC3875GR |
| Q901 | 125-4010-90 | KTC3875GR |
| Q902 | 125-3004-90 | KTA1504 |
| Q903 | 125-4010-90 | KTC3875GR |
| Q904 | 125-2199-92 | KRC102S |
| Q905 | 125-2199-92 | KRC102S |
| Q906 | 125-3005-90 | KTA1273 |
| Q907 | 125-3007-90 | KTA1298 |
| Q908 | 125-2199-92 | KRC102S |
| Q909 | 125-4010-90 | KTC3875GR |
| R101 | 119-1021-15 | 1/16W 1K ohm |
| R102 | 119-1021-15 | 1/16W 1K ohm |
| R103 | 119-4721-15 | 1/16W 4.7K ohm |
| R104 | 119-4721-15 | 1/16W 4.7K ohm |
| R106 | 119-4721-15 | 1/16W 4.7K ohm |
| R107 | 119-3311-15 | 1/16W 330 ohm |
| R108 | 119-1041-15 | 1/16W 100K ohm |
| R110 | 119-1021-15 | 1/16W 1K ohm |
| R111 | 119-4731-15 | 1/16W 47K ohm |
| R112 | 119-4731-15 | 1/16W 47K ohm |
| R113 | 119-1021-15 | 1/16W 1K ohm |
| R114 | 119-1041-15 | 1/16W 100K ohm |
| R221 | 119-1031-15 | 1/16W 10K ohm |
| R222 | 119-1031-15 | 1/16W 10K ohm |
| R223 | 119-1031-15 | 1/16W 10K ohm |
| R224 | 119-1031-15 | 1/16W 10K ohm |
| R225 | 119-1031-15 | 1/16W 10K ohm |
| R229 | 119-2231-15 | 1/16W 22K ohm |
| R230 | 119-3311-15 | 1/16W 330 ohm |
| R232 | 119-1021-15 | 1/16W 1K ohm |
| R233 | 119-1021-15 | 1/16W 1K ohm |
| R234 | 119-1041-15 | 1/16W 100K ohm |
| R238 | 119-0000-05 | 1/16W 0 ohm |
| R239 | 119-0000-05 | 1/16W 0 ohm@ |
| R240 | 119-0000-05 | 1/16W 0 ohm@ |
| R241 | 119-0000-05 | 1/16W 0 ohm# |
| R242 | 119-0000-05 | 1/16W 0 ohm# |
| R253 | 119-3321-15 | 1/16W 3.3K ohm |
| R254 | 119-1531-15 | 1/16W 15K ohm |
| R255 | 119-3331-15 | 1/16W 33K ohm |
| R256 | 119-4731-15 | 1/16W 47K ohm |
| R263 | 119-4731-15 | 1/16W 47K ohm |
| R264 | 119-4731-15 | 1/16W 47K ohm |
| R265 | 119-1031-15 | 1/16W 10K ohm |
| R269 | 119-0000-05 | 1/16W 0 ohm |
| R270 | 119-0000-05 | 1/16W 0 ohm |
| R273 | 119-1531-15 | 1/16W 15K ohm |
| R274 | 119-1031-15 | 1/16W 10K ohm |
| R275 | 119-3321-15 | 1/16W 3.3K ohm |
| R280 | 119-0000-05 | 1/16W 0 ohm |
| R283 | 119-0000-05 | 1/16W 0 ohm |
| R407 | 119-3311-15 | 1/16W 330 ohm |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R502 | 119-3331-15 | 1/16W 33K ohm |
| R503 | 119-2221-15 | 1/16W 2.2K ohm |
| R504 | 119-2221-15 | 1/16W 2.2K ohm |
| R505 | 119-2221-15 | 1/16W 2.2K ohm |
| R506 | 119-2221-15 | 1/16W 2.2K ohm |
| R507 | 119-1021-15 | 1/16W 1K ohm |
| R508 | 119-1021-15 | 1/16W 1K ohm |
| R509 | 119-1021-15 | 1/16W 1K ohm |
| R510 | 119-1021-15 | 1/16W 1K ohm |
| R511 | 119-3311-15 | 1/16W 330 ohm |
| R512 | 119-4711-15 | 1/16W 470 ohm |
| R513 | 119-2231-15 | 1/16W 22K ohm |
| R514 | 119-2231-15 | 1/16W 22K ohm |
| R515 | 119-3311-15 | 1/16W 330 ohm |
| R516 | 119-4711-15 | 1/16W 470 ohm |
| R517 | 119-4711-15 | 1/16W 470 ohm |
| R518 | 119-3311-15 | 1/16W 330 ohm |
| R519 | 119-2231-15 | 1/16W 22K ohm |
| R520 | 119-2231-15 | 1/16W 22K ohm |
| R521 | 119-3311-15 | 1/16W 330 ohm |
| R522 | 119-4711-15 | 1/16W 470 ohm |
| R601 | 032-0140-64 | 1/16W 43K(F) ohm |
| R602 | 032-0140-00 | 1/16W 56K(F) ohm |
| R603 | 032-0140-00 | 1/16W 56K(F) ohm |
| R604 | 032-0140-64 | 1/16W 43K(F) ohm |
| R605 | 032-0140-64 | 1/16W 43K(F) ohm |
| R606 | 119-1041-15 | 1/16W 100K ohm |
| R607 | 119-1021-15 | 1/16W 1K ohm |
| R608 | 119-1021-15 | 1/16W 1K ohm |
| R609 | 119-1041-15 | 1/16W 100K ohm |
| R610 | 032-0140-64 | 1/16W 43K(F) ohm |
| R611 | 032-0140-00 | 1/16W 56K(F) ohm |
| R612 | 032-0140-00 | 1/16W 56K(F) ohm |
| R613 | 032-0140-89 | 1/16W 47K(F) ohm |
| R614 | 032-0140-89 | 1/16W 47K(F) ohm |
| R615 | 032-0140-63 | 1/16W 27K(F) ohm |
| R616 | 032-0140-63 | 1/16W 27K(F) ohm |
| R617 | 032-0140-63 | 1/16W 27K(F) ohm |
| R618 | 032-0140-63 | 1/16W 27K(F) ohm |
| R619 | 032-0140-89 | 1/16W 47K(F) ohm |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R620 | 032-0140-89 | 1/16W 47K(F) ohm |
| R701 | 119-5621-15 | 1/16W 5.6K ohm |
| R702 | 119-4731-15 | 1/16W 47K ohm |
| R703 | 119-3341-15 | 1/16W 330K ohm |
| R704 | 119-2231-15 | 1/16W 22K ohm |
| R705 | 119-2231-15 | 1/16W 22K ohm |
| R706 | 119-2211-15 | 1/16W 220 ohm |
| R707 | 119-1001-15 | 1/16W 10 ohm |
| R708 | 119-6811-15 | 1/16W 680 ohm |
| R711 | 119-0000-05 | 1/16W 0 ohm |
| R712 | 119-1531-15 | 1/16W 15K ohm |
| R713 | 119-4731-15 | 1/16W 47K ohm |
| R714 | 119-2731-15 | 1/16W 27K ohm |
| R715 | 119-2731-15 | 1/16W 27K ohm |
| R716 | 119-2731-15 | 1/16W 27K ohm |
| R717 | 119-8231-15 | 1/16W 82K ohm |
| R718 | 119-8231-15 | 1/16W 82K ohm |
| R719 | 119-2731-15 | 1/16W 27K ohm |
| R720 | 119-1001-15 | 1/16W 10 ohm |
| R721 | 119-1051-15 | 1/16W 1M ohm |
| R722 | 119-6811-15 | 1/16W 680 ohm |
| R723 | 119-2211-15 | 1/16W 220 ohm |
| R724 | 119-2211-15 | 1/16W 220 ohm |
| R725 | 119-1041-15 | 1/16W 100K ohm |
| R726 | 119-1021-15 | 1/16W 1K ohm |
| R741 | 119-2211-15 | 1/16W 220 ohm |
| R751 | 119-1031-15 | 1/16W 10K ohm |
| R752 | 119-3321-15 | 1/16W 3.3K ohm |
| R753 | 119-2251-15 | 1/16W 2.2M ohm |
| R754 | 119-0000-05 | 1/16W 0 ohm |
| R757 | 119-3321-15 | 1/16W 3.3K ohm |
| R758 | 119-3321-15 | 1/16W 3.3K ohm |
| R762 | 119-2221-15 | 1/16W 2.2K ohm |
| R763 | 119-2221-15 | 1/16W 2.2K ohm |
| R764 | 119-1031-15 | 1/16W 10K ohm |
| R765 | 119-2231-15 | 1/16W 22K ohm |
| R766 | 119-4731-15 | 1/16W 47K ohm |
| R801 | 119-1041-15 | 1/16W 100K ohm |
| R802 | 116-4721-15 | 1/4W 4.7K ohm |
| R803 | 119-1031-15 | 1/16W 10K ohm |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R805 | 119-8221-15 | 1/16W 8.2K ohm |
| R806 | 119-3321-15 | 1/16W 3.3K ohm |
| R807 | 119-1021-15 | 1/16W 1K ohm |
| R808 | 119-2231-15 | 1/16W 22K ohm |
| R809 | 116-1521-15 | 1/4W 1.5K ohm |
| R810 | 119-1021-15 | 1/16W 1K ohm |
| R811 | 119-4731-15 | 1/16W 47K ohm |
| R812 | 119-4721-15 | 1/16W 4.7K ohm |
| R813 | 119-1031-15 | 1/16W 10K ohm |
| R814 | 119-8221-15 | 1/16W 8.2K ohm |
| R815 | 119-6831-15 | 1/16W 68K ohm |
| R901 | 119-6831-15 | 1/16W 68K ohm |
| R902 | 119-4731-15 | 1/16W 47K ohm |
| R903 | 119-1041-15 | 1/16W 100K ohm |
| R904 | 119-1031-15 | 1/16W 10K ohm |
| R905 | 119-3321-15 | 1/16W 3.3K ohm |
| R906 | 119-4721-15 | 1/16W 4.7K ohm |
| R907 | 119-4731-15 | 1/16W 47K ohm |
| R911 | 116-1221-15 | 1/4W 1.2K ohm |
| R912 | 119-1031-15 | 1/16W 10K ohm |
| R913 | 119-3321-15 | 1/16W 3.3K ohm |
| R914 | 119-1031-15 | 1/16W 10K ohm |
| R915 | 119-1231-15 | 1/16W 12K ohm |
| R916 | 119-1031-15 | 1/16W 10K ohm |
| R917 | 119-3321-15 | 1/16W 3.3K ohm |
| R918 | 116-6801-15 | 1/4W 68 ohm |
| R919 | 119-4721-15 | 1/16W 4.7K ohm |
| R920 | 119-4721-15 | 1/16W 4.7K ohm |
| R921 | 119-4721-15 | 1/16W 4.7K ohm |
| S201 | 013-6103-00 | RESET SW |
| SUP101 | 060-0122-20 | DSP-141N-S00B |
| T801 | 010-8039-00 | CHOKE |
| X202 | 061-9016-00 | 32.768KHz |
| X203 | 060-1541-90 | 3.14MHz |
| X701 | 060-1535-90 | 16.934MHz |
| X702 | 060-1535-90 | 16.934MHz |
| PWB | 039-2849-02 | PWB (WITHOUT COMPONENT) |

Switch PWB (B2) section

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C1 | 166-1011-50 | 50V 100pF |
| C2 | 166-1011-50 | 50V 100pF |
| C3 | 178-1052-78 | 16V 1uF |
| C5 | 042-0671-00 | 16V 4.7uF |
| C6 | 042-0671-00 | 16V 4.7uF |
| C7 | 042-0671-00 | 16V 4.7uF |
| C8 | 043-0542-00 | 25V 4.7uF |
| C9 | 042-0671-00 | 16V 4.7uF |
| C10 | 042-0671-00 | 16V 4.7uF |
| C11 | 178-1052-78 | 16V 1uF |
| C12 | 178-1052-78 | 16V 1uF |
| C13 | 178-1052-78 | 16V 1uF |
| C14 | 178-1052-78 | 16V 1uF |
| C15 | 178-1052-78 | 16V 1uF |
| C16 | 178-1052-78 | 16V 1uF |
| C17 | 168-1022-55 | 50V 1000pF |
| C18 | 166-1011-50 | 50V 100pF |
| C19 | 168-4732-78 | 50V 0.047uF |
| C20 | 042-0671-00 | 16V 4.7uF |
| C21 | 168-1042-78 | 16V 0.1uF |
| C22 | 168-1022-55 | 50V 1000pF |
| C24 | 168-1022-55 | 50V 1000pF |
| C25 | 042-0671-00 | 16V 4.7uF |
| C26 | 168-1022-55 | 50V 1000pF |
| D1 | 001-4902-91 | HZM6.8MFA |
| D2 | 001-4312-35 | 02DZ6.2Y |
| D3 | 001-4312-35 | 02DZ6.2Y |
| D4 | 001-4312-35 | 02DZ6.2Y |
| D5 | 001-7083-90 | LED |
| D6 | 001-7083-90 | LED |
| D7 | 001-4312-35 | 02DZ6.2Y |
| D8 | 001-4312-35 | 02DZ6.2Y |
| D9 | 001-7083-90 | LED |
| D10 | 001-7083-90 | LED |
| D11 | 001-4312-35 | 02DZ6.2Y |
| D12 | 001-7818-90 | LED |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| D13 | 001-4312-35 | 02DZ6.2Y |
| D14 | 001-7083-90 | LED |
| D16 | 001-4312-35 | 02DZ6.2Y |
| D17 | 001-7818-90 | LED |
| D18 | 001-4312-35 | 02DZ6.2Y |
| D19 | 001-4312-35 | 02DZ6.2Y |
| D20 | 001-4312-35 | 02DZ6.2Y |
| D21 | 001-4902-91 | HZM6.8MFA |
| D22 | 001-4902-91 | HZM6.8MFA |
| D23 | 001-4312-35 | 02DZ6.2Y |
| D24 | 001-4312-35 | 02DZ6.2Y |
| D25 | 001-4312-35 | 02DZ6.2Y |
| D26 | 001-4312-35 | 02DZ6.2Y |
| D28 | 001-4312-35 | 02DZ6.2Y |
| D29 | 001-7083-90 | LED |
| D30 | 001-4312-35 | 02DZ6.2Y |
| D31 | 001-7083-90 | LED |
| IC1 | 052-7300-00 | uPD703271YGC |
| IR1 | 060-4017-90 | IR RECEIVER |
| J1 | 076-0647-00 | OUTLET SOCKET |
| J2 | 074-2002-76 | LCD MODULE-CONN |
| LCD | 379-1354-80 | LCD MODULE |
| L701 | 117-0000-05 | 1/8W 0 ohm |
| Q1 | 125-2199-92 | KRC102S |
| Q2 | 125-3007-90 | KTA1298 |
| Q3 | 125-2199-92 | KRC102S |
| Q4 | 125-3007-90 | KTA1298 |
| R1 | 119-0000-05 | 1/16W 0 ohm |
| R10 | 119-1031-15 | 1/16W 10K ohm |
| R11 | 119-2221-15 | 1/16W 2.2K ohm |
| R12 | 116-1811-15 | 1/4W 180 ohm |
| R13 | 119-1011-15 | 1/16W 100 ohm |
| R14 | 119-1011-15 | 1/16W 100 ohm |
| R15 | 119-1011-15 | 1/16W 100 ohm |
| R16 | 119-1021-15 | 1/16W 1K ohm |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R17 | 119-1241-15 | 1/16W 120K ohm |
| R18 | 119-3921-15 | 1/16W 3.9K ohm |
| R19 | 119-1031-15 | 1/16W 10K ohm |
| R2 | 119-1031-15 | 1/16W 10K ohm |
| R20 | 119-1031-15 | 1/16W 10K ohm |
| R21 | 119-1031-15 | 1/16W 10K ohm |
| R22 | 119-1031-15 | 1/16W 10K ohm |
| R24 | 119-1041-15 | 1/16W 100K ohm |
| R25 | 119-0000-05 | 1/16W 0 ohm |
| R26 | 119-0000-05 | 1/16W 0 ohm |
| R27 | 119-1031-15 | 1/16W 10K ohm |
| R29 | 119-1031-15 | 1/16W 10K ohm |
| R3 | 119-2221-15 | 1/16W 2.2K ohm |
| R30 | 119-4721-15 | 1/16W 4.7K ohm |
| R31 | 119-4721-15 | 1/16W 4.7K ohm |
| R32 | 119-4721-15 | 1/16W 4.7K ohm |
| R33 | 119-1031-15 | 1/16W 10K ohm |
| R36 | 119-1041-15 | 1/16W 100K ohm |
| R38 | 119-0000-05 | 1/16W 0 ohm |
| R39 | 119-0000-05 | 1/16W 0 ohm |
| R4 | 116-1811-15 | 1/4W 180 ohm |
| R41 | 119-0000-05 | 1/16W 0 ohm |
| R42 | 119-0000-05 | 1/16W 0 ohm |
| R5 | 116-1811-15 | 1/4W 180 ohm |
| R6 | 116-1811-15 | 1/4W 180 (330) ohm |
| R7 | 116-3311-15 | 1/4W 330 ohm |
| R8 | 119-2711-15 | 1/16W 270 ohm |
| R9 | 119-2711-15 | 1/16W 270 ohm |
| S15 | 013-6312-50 | TACT SWITCH |
| S16 | 013-6312-50 | TACT SWITCH |
| S19 | 013-6511-50 | SWITCH EJECT |
| VR1 | 016-9901-01 | VR ROTARY |
| X1 | 060-1541-90 | 3.14MHz |
| PWB | 039-2850-02 | PWB (WITHOUT COMPONENT) |

SENSOR PWB (B3) section

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| D1 | 001-7058-90 | AN1105W-RR |
| D2 | 001-7058-90 | AN1105W-RR |
| J1 | 074-1138-60 | 10P |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| Q1 | 060-4015-91 | PS1192HB |
| Q2 | 060-4015-91 | PS1192HB |
| S1 | 013-7414-50 | CHUCKING |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| S2 | 013-7413-50 | LIMIT |
| PWB | 039-2675-20 | PWB (WITHOUT COMPONENT) |

# REMOVING MAIN PWB FOR REPAIR

| No. | PART No. | PART NAME | Q'TY |
|---|---|---|---|
| A | 311-1929-00 | LOWER CASE | 1 |
| B | 039-2849-02 | MAIN PWB | 1 |
| C | 816-4006-60 | FLAT WIRE | 1 |
| D | 731-3005-8B | TAPTIGHT | 3 |
| E | 929-5003-80 | MECHANISM | 1 |
| F | 313-1976-00 | HEAT SINK | 1 |
| G | 731-3012-8B | TAPTIGHT | 3 |
| H | 714-3006-8B | MACHINE SCREW | 2 |
| I | 731-3008-8B | TAPTIGHT | 4 |
| J | 714-2606-8H | MACHINE SCREW | 2 |
| K | 370-6025-06 | INNER ESCUTCHEON | 1 |
| L | - | PICK-UP HEAD CABLE | 1 |
| M | 714-2604-8B | MC SCREW | 3 |
| N | 335-0833-01 | CABLE TIE | 1 |
| P | 335-7501-01 | FPC PROTECTOR | 1 |
| Q | 074-1143-15 | FPC CONNECTOR | 1 |

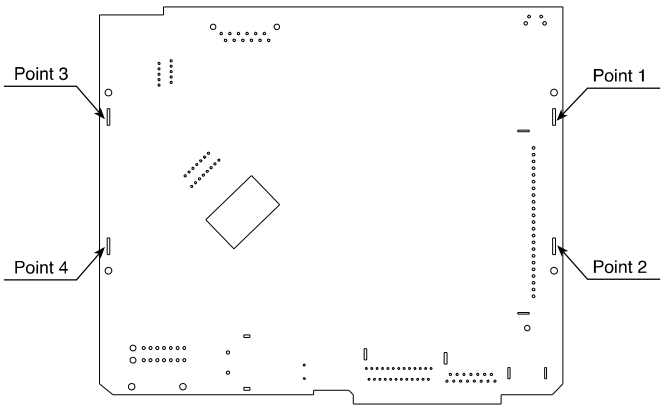



Figure 1

Step 1
Remove all screw Ⓖ, Ⓗ, Ⓘ, from heat sink Ⓕ cut off the cable tie Ⓝ.

Step 2
Remove heat sink Ⓕ.

Step 3
Remove lower case Ⓐ.

Step 4
Remove all screw Ⓙ, from inner escutcheon Ⓚ.

Step 5
Remove inner escutcheon Ⓚ.

Step 6
Unsolder 4 points on the main PWB Ⓑ, (Figure 1).

Step 7
Open FPC protector Ⓟ unplug the pick-up head cable Ⓛ from the FPC connector Ⓠ.

Step 8
Remove flat wire Ⓒ between main PWB Ⓑ, and mechanism Ⓔ.

Step 9
Remove main PWB Ⓑ for repairing.

Step 10
Unscrew Ⓓ and Ⓜ from the upper case, if the mechanism Ⓔ needs replacement.

View from bottom side

