1. SPECIFICATIONS

■ CDJ-1000MK2/ KUCXJ type

1. General

System ..... Compact disc digital audio system
Power requirements ..... AC 120 V, 60 Hz
Power consumption ..... 33 W
Operating temperature ..... +5 ˚C – +35 ˚C
Operating humidity ..... 5% – 85%
(There should be no condensation of moisture.)
Weight ..... 4.2 kg (9.26 lb)
Dimensions ..... 320 (W) × 370 (D) × 105 (H) mm
12 – 5/8 (W) × 14 9/16 (D) × – 1/8 (H) in

2. Audio section

Frequency response ..... 4 Hz – 20 kHz
Signal-to-noise ratio ..... 115 dB or more (JEITA)
Distortion ..... 0.006% (JEITA)

3. Accessories

Operating instructions 1
Power cord 1
Audio cable 1
Control cord 1
Forced eject pin (housed in a groove in the bottom panel) 1
Multimedia Card (MMC) (16 MB) 1
Limited warranty 1

NOTE:
Specifications and design are subject to possible modification without notice.

■ CDJ-1000MK2/ TLXJ type

1. General

System ..... Compact disc digital audio system
Power requirements ..... AC 110–240 V, 50/60 Hz
Power consumption ..... 31 W
Operating temperature ..... +5˚C – +35˚C
Operating humidity ..... 5% – 85%
(There should be no condensation of moisture.)
Weight ..... 4.2 kg
Dimensions ..... 320 (W) × 370 (D) × 105 (H) mm

2. Audio section

Frequency response ..... 4 Hz – 20 kHz
Signal-to-noise ratio ..... 115 dB or more (JEITA)
Distortion ..... 0.006% (JEITA)

3. Accessories

Operating instructions 1
Power cord 1
Audio cable 1
Control cord 1
Forced eject pin (housed in a groove in the bottom panel) 1
Multimedia Card (MMC) (16 MB) 1

NOTE:
Specifications and design are subject to possible modification without notice.

■ CDJ-1000MK2/ WYXJ type

1. General

System ..... Compact disc digital audio system
Power requirements ..... AC 220-240V, 50/60 Hz
Power consumption ..... 31 W
Operating temperature ..... +5˚C – +35˚C
Operating humidity ..... 5% – 85%
(There should be no condensation of moisture.)
Weight ..... 4.2 kg
Dimensions ..... 320 (W) × 370 (D) × 105 (H) mm

2. Audio section

Frequency response ..... 4 Hz – 20 kHz
Signal-to-noise ratio ..... 115 dB or more (JEITA)
Distortion ..... 0.006% (JEITA)

3. Accessories

Operating instructions 1
Power cord 1
Audio cable 1
Control cord 1
Forced eject pin (housed in a groove in the bottom panel) 1
Multimedia Card (MMC) (16 MB) 1

NOTE:
Specifications and design are subject to possible modification without notice.

Accessories

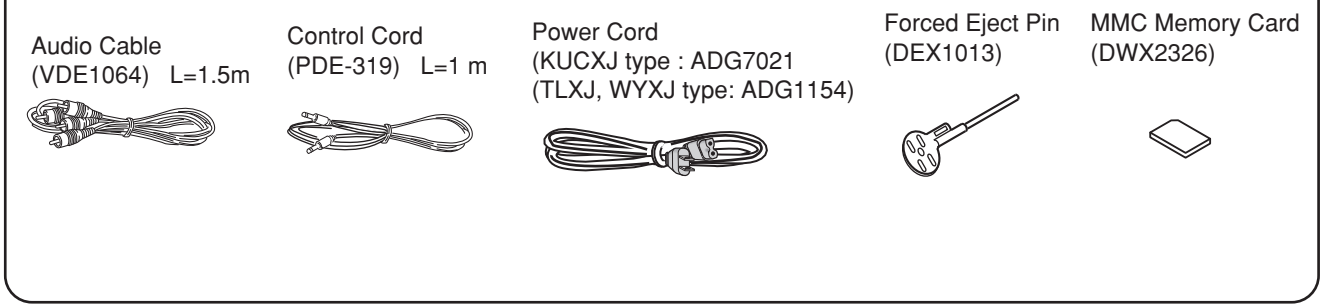

2. EXPLODED VIEWS AND PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *Screws adjacent to ▼ mark on product are used for disassembly.*
● *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 PACKING

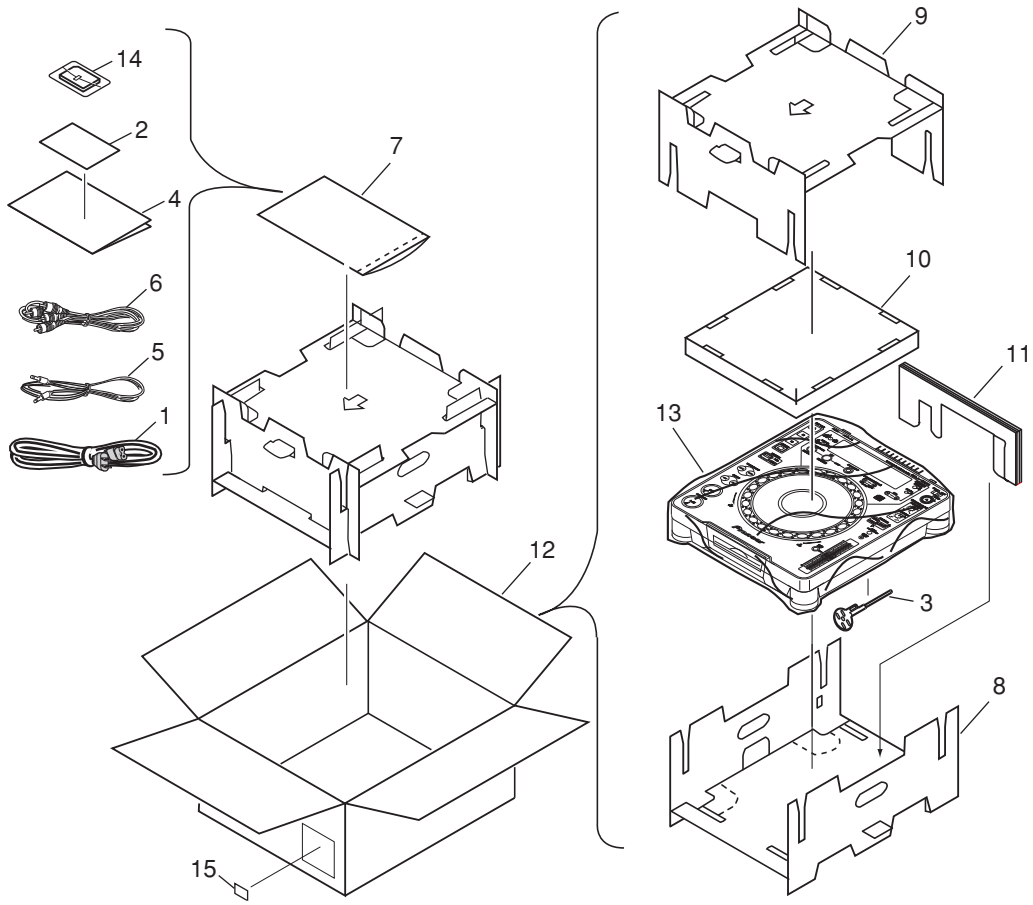

PACKING Parts List

Mark	No.	Description	Part No.
⚠	1	Power Cord	See Contrast Table(2)
NSP	2	Warranty Card	See Contrast Table(2)
	3	Forced Eject Pin	DEX1013
	4	Operating Instructions	See Contrast Table(2)
	5	Control Cord (L= 1m)	PDE-319
	6	Audio Cable (L= 1.5m)	VDE1064
NSP	7	Polyethylene Bag (230 x 340 x 0.03)	Z21-038
	8	Pad (A)	DHA1533
	9	Pad (B)	DHA1534
	10	Pad (C)	DHA1535
	11	Pad (D)	DHA1536
	12	Packing Case	See Contrast Table(2)
	13	Sheet	RHX1006
	14	MMC Memory Card	DWX2326
NSP	15	Label	VRW1629

(2) CONTRAST TABLE

CDJ-1000MK2/KUCXJ, TLXJ and WYXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	Part No.		
			KUCXJ type	TLXJ type	WYXJ type
⚠	1	Power Cord	ADG7021	ADG1154	ADG1154
NSP	2	Warranty Card	ARY7043	Not used	Not used
	4	Operating Instructions (English)	DRB1339	Not used	Not used
	4	Operating Instructions (English, Spanish, Chinese)	Not used	DRB1340	Not used
	4	Operating Instructions (English, French, German, Italian, Dutch, Spanish)	Not used	Not used	DRB1338
	12	Packing Case	DHG2363	DHG2364	DHG2362

2.2 EXTERIOR SECTION (1/2)

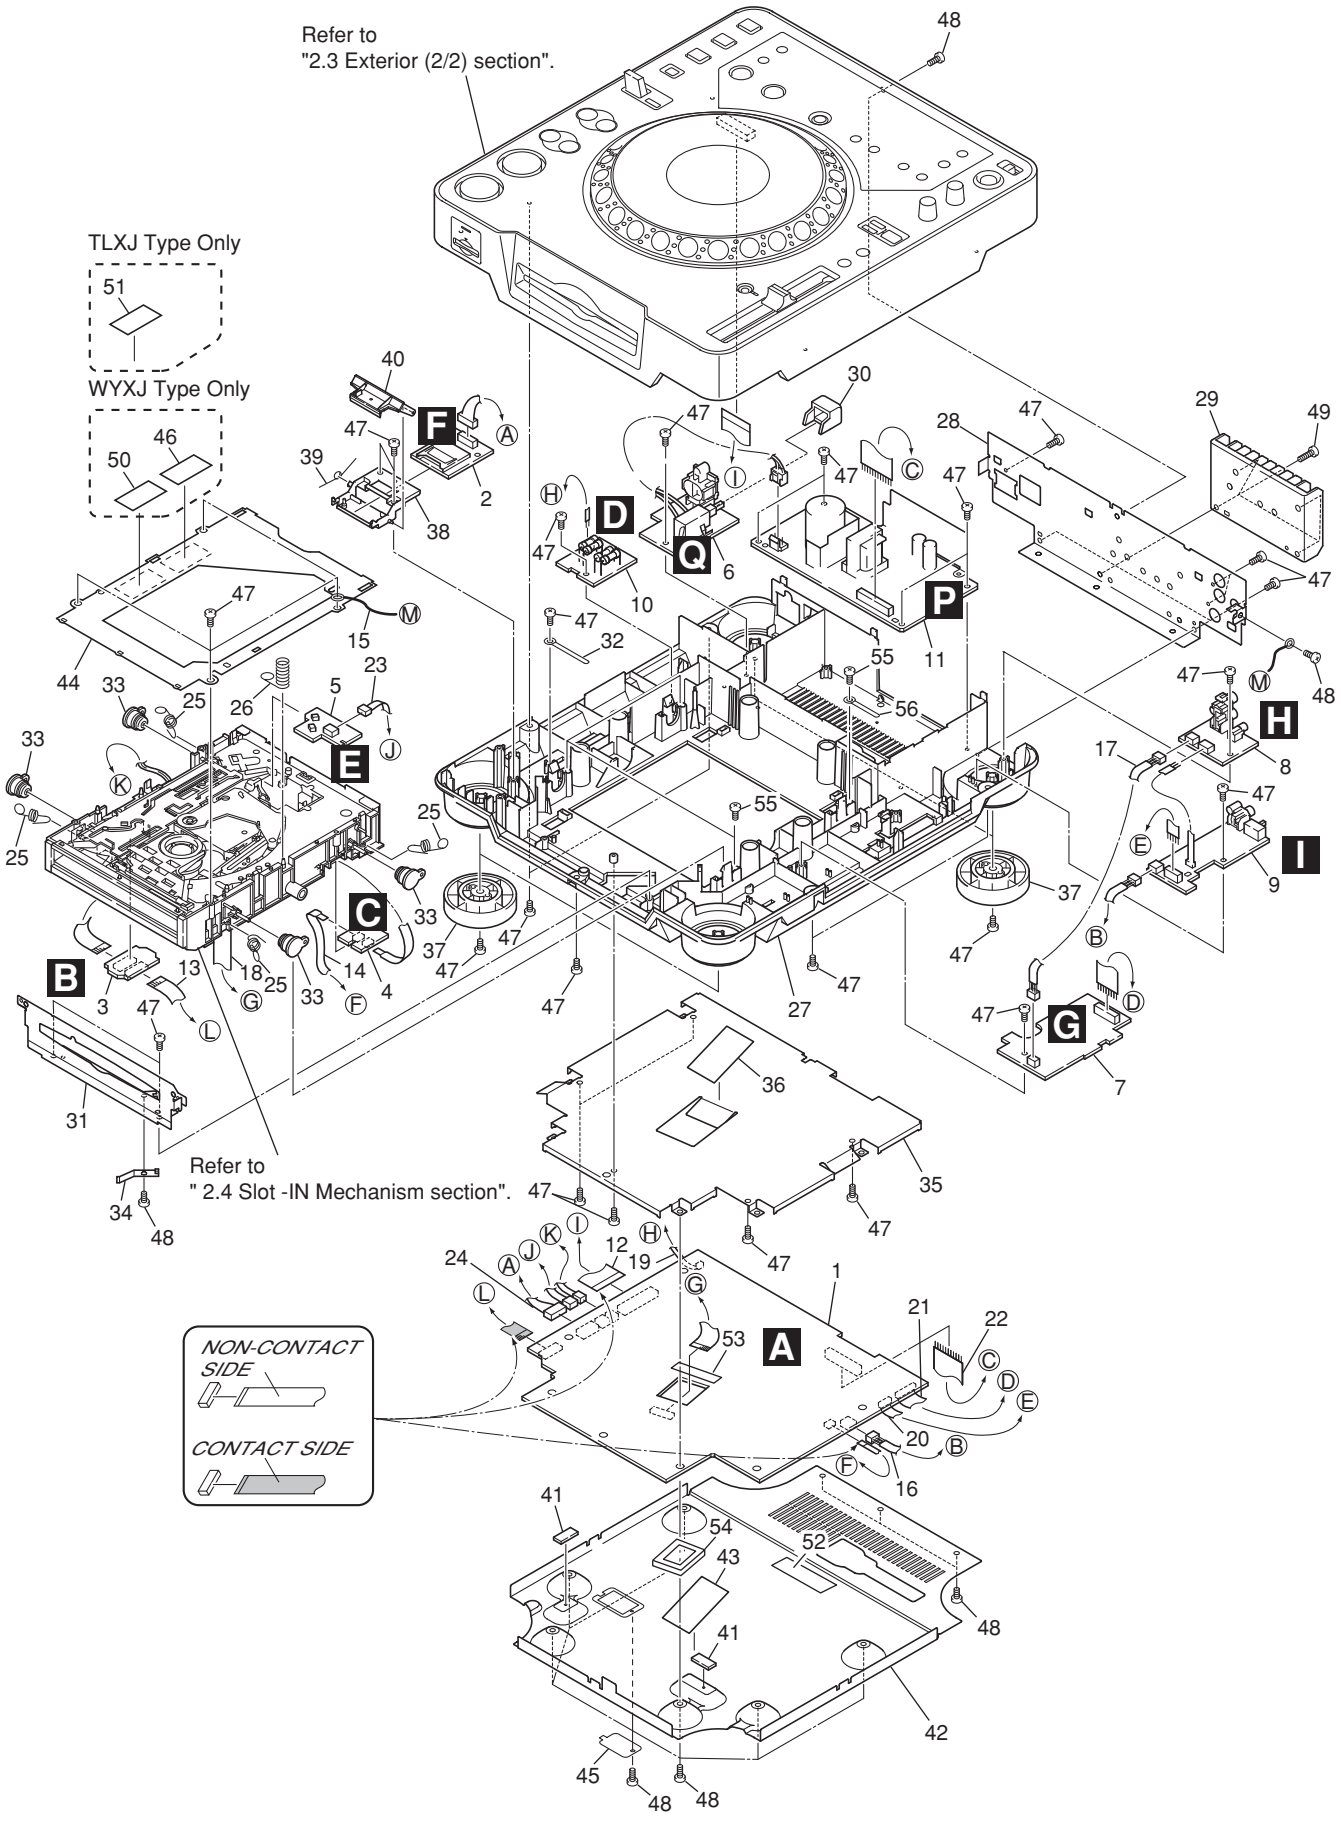

EXTERIOR SECTION (1/2) Parts List

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX2303
	2	MMCB Assy	DWX2304
	3	SPCN Assy	DWX2170
	4	STCN Assy	DWX2171
	5	SLMB Assy	DWX1309
	6	PSWB Assy	See Contrast Table(2)
	7	DABB Assy	DWX2305
	8	JACB Assy	DWX2306
	9	DOUT Assy	DWX2307
	10	FLRB Assy	DWX2308
	11	SW POWER SUPPLY Assy	DWR1370
	12	25P Flexible Cable/60V	DDD1196
	13	12P Flexible Cable/60V	DDD1197
	14	4P Flexible Cable/60V	DDD1198
	15	Earth Lead Unit/300V	DDF1024
	16	Connector Assy 3P	DKP3562
	17	Connector Assy 6P	DKP3654
	18	FPC D5 Slot	DNP1948
	19	Jumper Wire 03P	D20PYY0310E
	20	Jumper Wire 05P	D20PYY0510E
	21	Jumper Wire 09P	D20PYY0910E
	22	Jumper Wire 15P	D20PYY1510E
	23	Connector Assy	PF03PP-B30
	24	Connector Assy	PF09PP-D15
	25	Float Spring (G5)	DBH1494
	26	Earth Spring	DBH1398
	27	Chassis	DNK3869
NSP	28	Rear Panel	See Contrast Table(2)
	29	Heat Sink	DNG1082
	30	Power Knob	DAC1895
	31	Front Plate	DNH2480
	32	Cord Clamper	RNH-184
	33	Damper	CNV6011
	34	Earth Plate (CU)	VBK1070
	35	Shield Case	DNH2481
	36	Shield Cushion	DEC2445
	37	Insulator Assy	DXA1904
	38	Memory Holder	DNK3884
	39	Flap Spring	DBH1487
	40	SD Flap	DNK3883
NSP	41	Silicone Rubber D5L	DEB1456
	42	Bottom Plate 2	DNH2558
	43	Bottom Cushion	DEC2444
	44	Mecha Plate	DNH2339
	45	Bottom Cover	DNH2559
	46	Caution Label	See Contrast Table(2)
	47	Screw	BPZ30P080FZK
	48	Screw	BBZ30P060FZK
	49	Screw	BBZ30P120FZK
	50	Caution Label HE	See Contrast Table(2)
	51	Caution Label	See Contrast Table(2)
	52	65 Label	See Contrast Table(2)
	53	Protect Sheet	DEC2559
	54	PU Packing	DEC2593
	55	Screw	SBPZ30P140FMC
	56	Cord Clamper	ZCB-069Z

(2) CONTRAST TABLE

CDJ-1000MK2/KUCXJ, TLXJ and WYXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	Part No.		
			KUCXJ type	TLXJ type	WYXJ type
	6	PSWB Assy	DWS1312	DWS1311	DWS1311
NSP	28	Rear Panel	DNC1647	DNC1648	DNC1646
	46	Caution Label	Not used	Not used	VRW1094
	50	Caution Label HE	Not used	Not used	PRW1233
	51	Caution Label	Not used	PRW 1018	Not used
	52	65 Label	ARW7050	Not used	Not used

2.3 EXTERIOR SECTION (2/2)

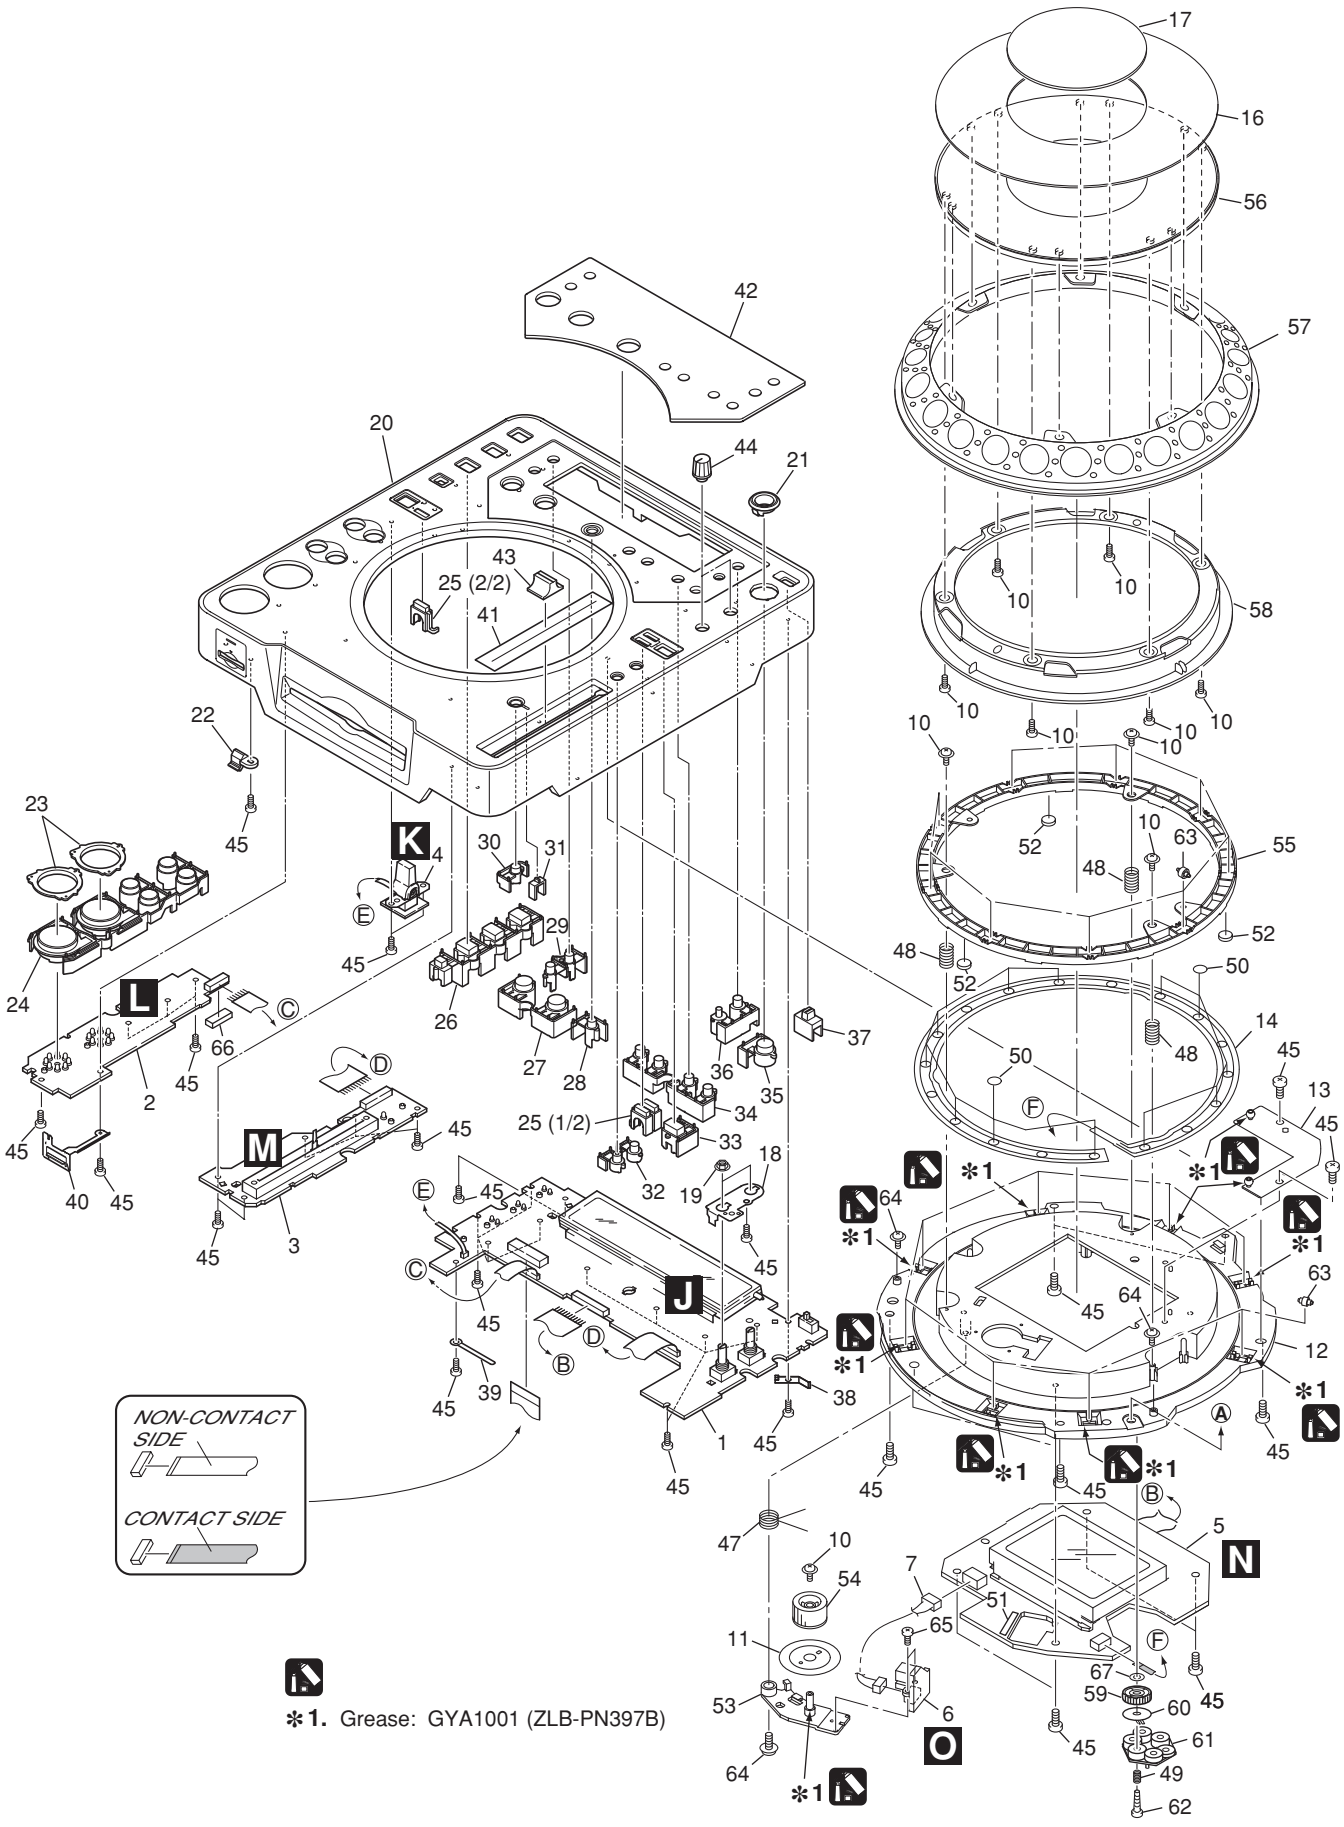

EXTERIOR SECTION (2/2) Parts List

Mark	No.	Description	Part No.
	1	MFLB Assy	DWG1567
	2	KSWB Assy	DWS1324
	3	SLDB Assy	DWS1325
	4	RSWB Assy	DWS1310
	5	JFLB Assy	DWG1568
	6	JOGB Assy	DWG1569
	7	Connector Assy	PF04PP-B07
	8	• • • • •	
	9	• • • • •	
	10	Screw	PBA1062
	11	Encoder Plate	DEC2498
	12	JOG Holder 2	DNK4175
	13	JOG Stay Assy	DXB1780
	14	Sheet SW	DSX1060
	15	• • • • •	
	16	JOG Plate	DAH2052
	17	JOG Panel	DAH2182
	18	VR Stay	DNF1663
	19	Flange Nut (M9)	DBN1004
	20	Control Panel	DNK4180
	21	Eject Guard	DNK3958
	22	Card Lens	DNK3885
	23	Ring Lens	DNK3880
	24	Set Knob (PLAY) Assy	DXB1762
	25	Mode Lens	DNK3881
	26	Set Knob (HS)	DAC1986
	27	Set Knob (LOOP)	DAC1995
	28	Re-loop Knob	DAC1992
	29	Set Knob (TIME)	DAC1991
	30	Tempo Reset Knob	DAC1993
	31	Tempo Lens	DNK3882
	32	Set Knob (MT)	DAC1987
	33	Mode Select Knob	DAC1989
	34	Set Knob (SC)	DAC1988
	35	Eject Knob	DAC1990
	36	Set Knob (MEMO)	DAC1994
	37	Slide SW Knob	DAC1926
	38	Earth Plate (CU)	VBK1070
NSP	39	Cord Clamper	ZCB-069Z
	40	Card Plate	DBK1212
	41	Slide Sheet 1C	DAH1988
	42	Display Panel	DAH2022
	43	Slide Knob	DNK2936
	44	Rotary Knob C	DAA1143
	45	Screw	BPZ30P080FZK
	46	• • • • •	
	47	Arm Spring	DBH1503
	48	SW Spring 25	DBH1514
	49	Gear Spring 200	DBH1525
	50	SW Cushion HH48/2	DEC2538
	51	Spacer	DEC2554
	52	Ring Cushion	DEC2604
	53	Gear Arm	DNK4065
	54	D Gear	DNK4066
	55	SW Ring	DNK4070
	56	JOG A	DNK4172
	57	JOG B	DNK4173
	58	JOG C	DNK4174
	59	Gear	DNK4176
	60	Smoother	DNK4177
	61	ADJ Plate	DNK4178
	62	Screw	BPZ20P100FMC
	63	Roller A Assy	DXB1773
	64	Screw	IPZ30P100FMC
	65	Screw	BPZ20P060FMC
	66	FFC Guard	DEC2586
	67	Washer	WA42D080D050

2.4 SLOT-IN MECHANISM SECTION

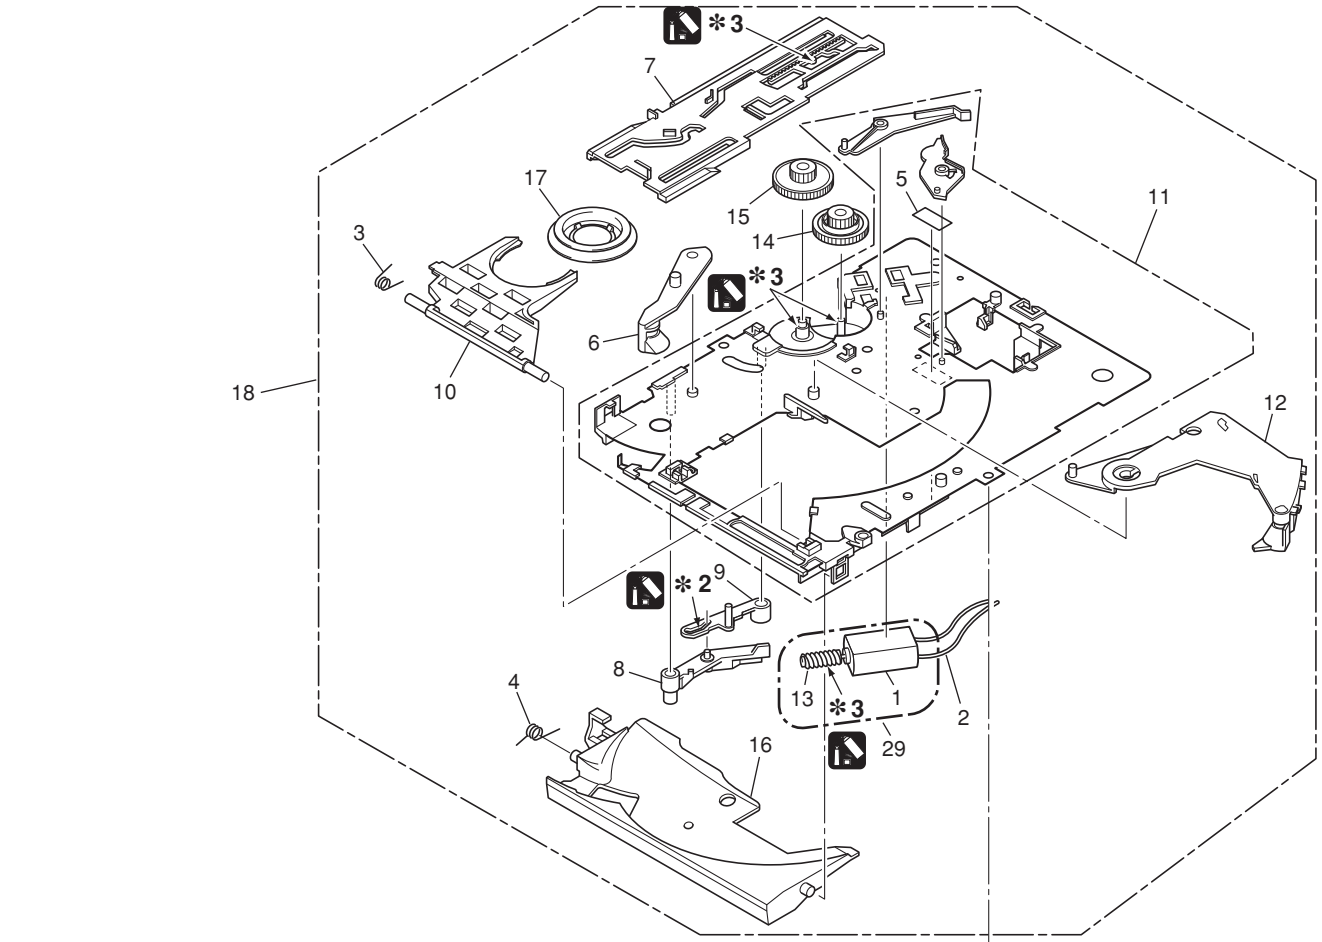

Refer to " 2.5 TRAVERSE MECHANISM ASSY-S ".

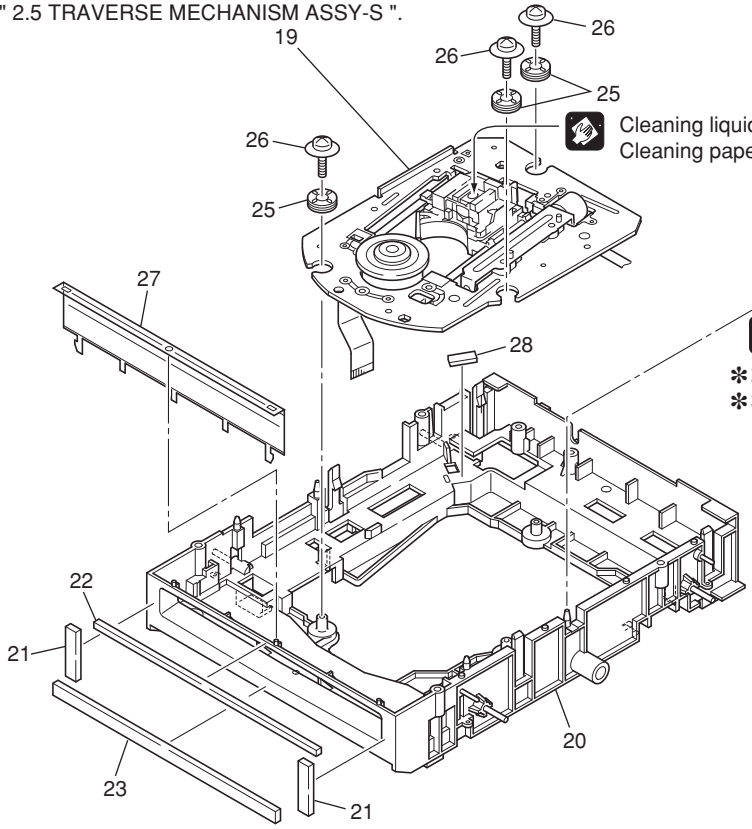

***2.** Dyefree : GEM1036 (ZLX-ME413A)
***3.** Grease: GYA1001 (ZLB-PN397B)

SLOT-IN MECHANISM SECTION Parts List

Mark	No.	Description	Part No.
NSP	1	DC Motor	DXM1093
	2	Connector Assy	PF02PY-B32
	3	Clamp Spring	DBH1374
	4	Guide Spring	DBH1375
	5	SW Lever Spacer (PET)	DEC2420
	6	Loading Lever	DNK3406
	7	Main Cam	DNK3407
	8	Lever B	DNK3558
	9	Lever A	DNK3564
	10	Clamp Arm	DNK3576
	11	Loading Base Assy-S	DEA1022
	12	Eject Lever	DNK3684
NSP	13	Worm Gear	DNK3910
	14	Loading Gear	DNK3911
	15	Drive Gear	DNK3912
	16	Disc Guide	DNK3914
	17	Clamper D4 Assy	DXA1881
NSP	18	Slot-in Mechanism G5 Assy	DXA1906
	19	Traverse Mechanism Assy-S	DXX2502
	20	Float Base (G5) Assy	DXB1748
	21	Vessel Cushion C	DEC2457
	22	Vessel Cushion A	DEC2455
	23	Vessel Cushion B	DEC2456
	24	•••••	
	25	Float Rubber D3	DEB1404
	26	Float Fastener	DBA1139
	27	Front Sheet	DED1132
	28	Spacer POR (T3)	DEB1566
	29	Loading Motor Assy-S	DEA1008

2.5 TRAVERSE MECHANISM ASSY-S

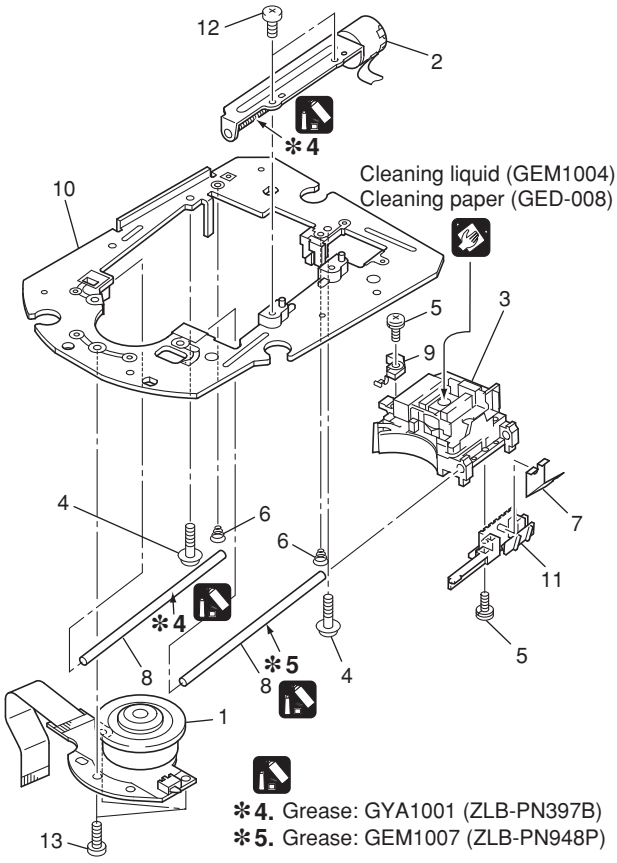

TRAVERSE MECHANISM ASSY-S Parts List

Mark	No.	Description	Part No.
NSP	1	Spindle Motor	DXM1138
NSP	2	Stepping Motor	DXM1142
NSP	3	Pickup Assy	VWY1069
NSP	4	Adjust Screw	DBA1119
NSP	5	Precision Screw	DBA1124
NSP	6	Skew Spring	DBH1437
NSP	7	Joint Spring	DBK1188
NSP	8	Guide Shaft	DLA1840
NSP	9	Slider G4	DNK3733
NSP	10	Mechanism Frame G5	DNK3776
NSP	11	Joint	DNK3777
	12	Screw	BPZ20P080FMC
	13	Screw	BPZ26P080FMC

5. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*
Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω	→	*56 x 10¹* →	*561*	····· *RD1/4PU 5 6 1 J*
47k Ω	→	*47 x 10³* →	*473*	····· *RD1/4PU 4 7 3 J*
0.5 Ω	→	*R50*		····· *RN2H R 5 0 K*
1 Ω	→	*1R0*		····· *RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω	→	*562 x 10¹* →	*5621*	····· *RN1/4PC 5 6 2 1 F*

LIST OF PCB ASSEMBLIES

Mark	Symbol and Description	CDJ-1000MK2 KUCXJ	CDJ-1000MK2 TLXJ	CDJ-1000MK2 WYXJ
NSP	1..MOTHER ASSY	DWM2162	DWM2162	DWM2162
	2..MAIN ASSY	DWX2303	DWX2303	DWX2303
	2..SPCN ASSY	DWX2170	DWX2170	DWX2170
	2..STCN ASSY	DWX2171	DWX2171	DWX2171
	2..MMCB ASSY	DWX2304	DWX2304	DWX2304
NSP	1..DISP ASSY	DWM2165	DWM2163	DWM2163
	2..SLMB ASSY	DWS1309	DWS1309	DWS1309
	2..MFLB ASSY	DWG1567	DWG1567	DWG1567
	2..RSWB ASSY	DWS1310	DWS1310	DWS1310
	2..KSWB ASSY	DWS1324	DWS1324	DWS1324
	2..SLDB ASSY	DWS1325	DWS1325	DWS1325
	2..PSWB ASSY	DWS1312	DWS1311	DWS1311
NSP	1..SUB ASSY	DWM2164	DWM2164	DWM2164
	2..FLRB ASSY	DWX2308	DWX2308	DWX2308
	2..DABB ASSY	DWX2305	DWX2305	DWX2305
	2..JACB ASSY	DWX2306	DWX2306	DWX2306
	2..DOUT ASSY	DWX2307	DWX2307	DWX2307
	2..JFLB ASSY	DWG1568	DWG1568	DWG1568
	2..JOGB ASSY	DWG1569	DWG1569	DWG1569
⚠	1..SW POWER SUPPLY ASSY	DWR1370	DWR1370	DWR1370

CONTRAST OF PCB ASSEMBLIES

Q PSWB ASSY

DWS1312 and DWS1311 are constructed the same except for the following:

Mark	Symbol and Description	DWS1312	DWS1311
	AN1 (AC SOCKET)	AKP7032	Not used
	AN1 (1P AC INLET)	Not used	BKP1046

PARTS LIST OF CDJ-1000MK2/ KUCXJ

A MAIN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC800		AN8702NFH
	IC850		BA10358F
	IC10		BA178M05FP
	IC202		BR24C64F
⚠	IC106	(0.4A)	ICP-N10
⚠	IC102,IC103	(0.6A)	ICP-N15
⚠	IC101,IC104	(0.8A)	ICP-N20
⚠	IC105		ICP-N25
	IC606		K4S641632F-TC75
	IC950		LA6562
	IC900		LB11975
	IC600		M51957BFP
	IC404		MM1561JF
	IC700		MN677061ZY
	IC201		PD3445A8
	IC300		PD3446A8
	IC11		PE8001A
	IC100,IC607		PQ025EZ01ZP
	IC150,IC206		PQ1R33
	IC203		TC74HC4053AFT

Mark No.	Description	Part No.
IC12		TC74HCT7007AF
IC205		TC74VHC08FT
IC405		TC74VHC541FT
IC407		TC7S04FU
IC204,IC710		TC7SET08FU
IC711		TC7SET32FU
IC610		TC7SH08FU
IC406,IC506		TC7SU04F
IC605		TC7WT241FU
IC13,IC402,IC608,IC612,IC701		TC7WU04FU
IC601		XC2S50-5PQ208C
IC401,IC501		XCA56367PV150
Q600		2SA1577
Q204		2SC4081
Q11,Q202		DTA124EUA
Q201,Q203,Q301,Q701,Q800		DTC124EUA
Q950		DTC124EUA
D11,D203-D232		1SS355

COILS AND FILTERS

L401,L402,L501,L502 CHIP FERRITE BEAD	ATL7002
L601,L602 CHIP FERRITE BEAD	ATL7002
L11,L13,L200 (CHIP COIL 4R7)	DTL1024
L404,L504	LCTAW1R0J2520
L10,L101,L111,L15,L152 CHIP BEAD	PTL1014
L201,L603-L606,L608 CHIP BEAD	PTL1014
L701-L706 CHIP BEAD	PTL1014

CAPACITORS

C417,C418,C517,C518,C638	CCSRCH100D50
C831	CCSRCH100D50
C221,C223,C236,C38-C40	CCSRCH101J50
C405,C411,C413,C415,C421	CCSRCH101J50
C423,C425,C427,C429,C435	CCSRCH101J50
C437,C439,C445,C458,C459	CCSRCH101J50
C469,C505,C511,C513,C515	CCSRCH101J50
C521,C523,C525,C527,C529	CCSRCH101J50
C535,C537,C539,C545,C569	CCSRCH101J50
C700	CCSRCH101J50
C635,C637	CCSRCH120J50
C633	CCSRCH121J50
C464,C634	CCSRCH150J50
C463	CCSRCH180J50
C803	CCSRCH181J50
C957	CCSRCH220J50
C407,C431,C441,C461,C507	CCSRCH221J50
C531,C541,C614	CCSRCH221J50
C959	CCSRCH270J50
C914	CCSRCH331J50
C807	CCSRCH390J50
C467,C468,C567,C568,C707	CCSRCH470J50
C713	CCSRCH470J50
C453	CCSRCH471J50
C723,C818,C819	CCSRCH561J50
C724	CCSRCH681J50
C103,C108,C110,C121,C155	CEHAR101M10
C17,C20,C201,C21,C211	CEHAR101M10
C22,C29,C401,C452,C499	CEHAR101M10
C501,C502,C599,C622	CEHAR101M10
C624,C625,C901,C951	CEHAR101M10
C101,C105,C25-C28,C828	CEHAR470M16
C900	CEHAR470M16
C237,C33,C704,C708,C712	CKSRYB102K50
C806,C811-C813	CKSRYB102K50
C10,C102,C104,C106,C109	CKSRYB103K50
C11,C112,C122,C123,C154	CKSRYB103K50
C157,C158,C16,C200	CKSRYB103K50
C202,C203,C205-C210,C217	CKSRYB103K50
C225,C226,C230-C233	CKSRYB103K50
C31,C32,C331-C333,C400	CKSRYB103K50
C402,C403,C406,C408,C412	CKSRYB103K50
C414,C416,C422,C424,C426	CKSRYB103K50
C428,C430,C432,C436,C438	CKSRYB103K50
C440,C442,C446-C451	CKSRYB103K50
C456,C457,C462,C466,C500	CKSRYB103K50
C506,C508,C512,C514,C516	CKSRYB103K50
C522,C524,C526,C528,C530	CKSRYB103K50
C532,C536,C538,C540,C542	CKSRYB103K50
C546-C551,C556,C557	CKSRYB103K50
C6001,C6002,C613,C616,C618	CKSRYB103K50
C623,C626-C632,C636	CKSRYB103K50
C641-C644,C651-C683,C714	CKSRYB103K50
C726,C730,C733,C751-C755	CKSRYB103K50
C800,C857,C910,C964,C971	CKSRYB103K50
C159,C18,C204,C213,C215	CKSRYB104K16
C228,C23,C24,C30,C300	CKSRYB104K16
C306,C620,C621,C715,C716	CKSRYB104K16
C725,C902,C904,C905	CKSRYB104K16
C229,C648	CKSRYB105K6R3
C218,C911	CKSRYB222K50
C833,C903	CKSRYB224K10
C820	CKSRYB273K16
C470,C570	CKSRYB472K50
C706,C802,C821	CKSRYB473K25
C107	CKSRYB473K50
C703	CKSRYB562K50
C834,C835	CKSRYB682K50
C301,C303,C305,C702,C705	CKSRYF104Z25
C709-C711,C717-C722,C732	CKSRYF104Z25
C801,C804,C805,C808-C810	CKSRYF104Z25
C815,C822,C825,C826,C830	CKSRYF104Z25
C832,C950,C952-C956	CKSRYF104Z25
C455,C940	CKSRYF105Z10
C454 (2.2 microF/10V)	VCG1031

RESISTORS

R825 (47 ohm)	DCN1133
R900,R901 (4.7 ohm)	DCN1141
R323,R324,R419,R654-R657	RAB4C101J
R681,R682	RAB4C101J
R828	RAB4C123J
R453	RAB4C220J
R800,R801	RAB4C273J
R834	RAB4C303J
R401,R420,R421,R501	RAB4C473J
R829	RAB4C822J
R610	RS1/16S1501D
R806	RS1/16S2202F

Mark No.	Description	Part No.
	R609	RS1/16S3901D
	Other Resistors	RS1/16S###J
	OTHERS	
	X401 CRYSTAL RESONATOR (20.000MHz)	ASS7023
	X701 CHIP CERALOCK (33.86MHz)	DSS1126
	X201,X300 CHIP CERALOCK (20MHz)	DSS1127
	X601 CRYSTAL RESONATOR (33.8MHz)	RSS1055
	X602 CRYSTAL RESONATOR (27MHz)	VSS1086
	CN13 5P JUMPER CONNECTOR	52147-0510
	CN11 9P JUMPER CONNECTOR	52147-0910
	CN101 15P JUMPER CONNECTOR	52147-1510
	CN102 3P JUMPER CONNECTOR	52151-0310
	CN201,CN301 KR CONNECTOR	B6B-PH-K-S
	CN900 12P FFC CONNECTOR	DKN1205
	CN950 4P FFC CONNECTOR	DKN1223
	CN203 25P FFC CONNECTOR	HLEM25R-1
	CN302 KR CONNECTOR	S2B-PH-K-S
	CN12,CN303 KR CONNECTOR	S3B-PH-K-S
	CN202 KR CONNECTOR	S9B-PH-K-S

B SPCN ASSY

	OTHERS	
	CN911,CN912 12P FFC CONNECTOR	DKN1205

C STCN ASSY

	OTHERS	
	CN913,CN914 4P FFC CONNECTOR	DKN1223

D FLRB ASSY

	RESISTORS	
	R1504,R1507-R1509	RS3LMF330J
	R1505,R1506	RS3LMF360J
	OTHERS	
	CN1501 3P JUMPER CONNECTOR	52147-0310

E SLMB ASSY

	SWITCHES AND RELAYS	
	S1501,S1502	DSG1017
	OTHERS	
	CN1501 KR CONNECTOR	S3B-PH-K-M

F MMCB ASSY

	SEMICONDUCTORS	
	D92,D93	NNCD6.2MF
	D91	UDZS6.2B
	CAPACITORS	
	C91	CCSRCH221J50
	C99	CKSRYB103K50
	C97	CKSRYB104K16
	C94	CKSRYB105K6R3
	RESISTORS	
	All Resistors	RS1/16S###J
	OTHERS	
	CN99 KR CONNECTOR	B9B-PH-K-S
	CN999 SD CONNECTOR	DKN1231

G DABB ASSY

	SEMICONDUCTORS	
	IC1901	NJM4580D
	Q1907	2SA1145
	Q1901-Q1904	2SD2144S
	Q1906	DTA124EUA
⚠	Q1905	DTC124EUA
	D1906	1SR154-400
	D1904,D1905,D1907	1SS355
	D1918	UDZS13B
	CAPACITORS	
	C1906,C1907	CEANP101M16
	C1912	CEAT101M50
	C1905,C1908	CKSRYB104K16
	C1915,C1916	CQMBA102J50
	C1909,C1910,C1913,C1914	CQMBA152J50
	RESISTORS	
	R1908,R1919	RD1/2VM103J
	R1909,R1918	RD1/2VM113J
	R1907,R1920,R1938,R1939	RD1/2VM182J
	R1916,R1917	RD1/2VM273J
	R1906,R1910,R1913,R1923	RD1/2VM471J
	R1936,R1937	RD1/2VM471J
	R1999	RS1/10S0R0J
	Other Resistors	RS1/16S###J
	OTHERS	
	CN1901 9P JUMPER CONNECTOR	52147-0910
	CN1902 KR CONNECTOR	B6B-PH-K-S

H JACB ASSY

	SEMICONDUCTORS	
	D1902	1SS355
	D1901,D1903	UDZS10B
	CAPACITORS	
	C1902,C1920	CFTLA103J50
	C1901	CKSRYB104K16
	C1903,C1904	CQMBA102J50
	RESISTORS	
	R1903	RD1/2VM271J
	R1902,R1911,R1912	RD1/2VM471J
	OTHERS	
	CN1904 3P JUMPER CONNECTOR	52151-0310
	JA1902 2P PIN JACK	BKB1017
	JA1901 REMOTE CONTROL JACK	RKN1004
	CN1903 KR CONNECTOR	S6B-PH-K-S

Mark	No.	Description	Part No.

I DOUT ASSY

SEMICONDUCTORS

	IC1801	TC74HCU04AF

COILS AND FILTERS

	L1802	PULS TRANS. PTL1003
	L1803	CHIP BEAD PTL1014
⚠	L1801	COMMON CHOKE COIL PTL1017

SWITCHES AND RELAYS

	S1801	DSH1025

CAPACITORS

	C1810	CEAT101M6R3
	C1809	CEAT470M10
	C1808	CFTLA104J50
	C1803,C1804,C1806,C1807	CKSRYB104K16

RESISTORS

	All Resistors	RS1/16S###J

OTHERS

0	3P CABLE HOLDER	51048-0300
	J1801 JUMPER WIRE 3P	D20PYY0305E
	JA1801 1P JACK (ORANGE)	PKB1028
	CN1801 KR CONNECTOR	S3B-PH-K-M

J MFLB ASSY

SEMICONDUCTORS

⚠	IC1101	PE5387A
	Q1007-Q1017,Q1113-Q1118	2SC4081
	Q1112	DTA124EUA
	Q1101-Q1104,Q1106-Q1111	DTC124EUA
	D1108	NSPB500-0008
	D1111,D1113,D1115,D1117	SLI-343URCW
	D1104-D1107	SLI-343YCW
	D1112,D1114,D1116	SLR-343EBT
	D1101,D1109	SLR-343MC
	D1121-D1125	UDZS6.8B

COILS AND FILTERS

	L1001,L1002	CHIP BEAD PTL1014

SWITCHES AND RELAYS

	S1104-S1107,S1109-S1112	VSG1024
	S1116,S1117,S1119	VSG1024
	S1101-S1103,S1113-S1115	DSG1063
	S1118	DSH1049

CAPACITORS

	C1143-C1145	CCSRCH101J50
	C1112-C1114,C1138-C1142	CCSRCH102J50
	C1121-C1137	CCSRCH471J50
	C1108,C1109,C1116,C1118	CEHAR470M16
	C1100-C1107,C1110,C1111,C1115	CKSRYB103K50
	C1117,C1119,C1120	CKSRYB103K50

RESISTORS

	VR1101,VR1102 (10kB)	DCS1045
	Other Resistors	RS1/16S###J

Mark	No.	Description	Part No.

OTHERS

	X1101	CERAMIC RESONATOR (4.19MHz) DSS1130
0		2P CABLE HOLDER 51048-0200
0		9P CABLE HOLDER 51048-0900
0		12P CABLE HOLDER 51048-1200
	CN1101	25P FFC CONNECTOR 52492-2520
	J1103	JUMPER WIRE 9P D20PYY0915E
	J1101	JUMPER WIRE 12P D20PYY1215E
	V1101	FL TUBE DEL1051
0		FL HOLDER DNF1665

K RSWB ASSY

SWITCHES AND RELAYS

	S1701	DSK1021

OTHERS

0		2P CABLE HOLDER 51048-0200
	J1701	JUMPER WIRE 2P D20PYY0210E

L KSWB ASSY

SEMICONDUCTORS

	Q1301-Q1303	DTA124EUA
	D1321-D1328	1SS355
	D1301,D1304,D1310,D1317	SLI-343YCW
	D1305-D1308	SLR-343EBT
	D1309	SLR-343VC

COILS AND FILTERS

	L1304-L1308	CHIP BEAD PTL1014

SWITCHES AND RELAYS

	S1303-S1306	VSG1024
	S1301,S1302	DSG1063

CAPACITORS

	C1302	CCSRCH101J50
	C1301	CCSRCH102J50

RESISTORS

	All Resistors	RS1/16S###J

OTHERS

	CN1301	9P JUMPER CONNECTOR 52151-0910

M SLDB ASSY

SEMICONDUCTORS

	Q1401,Q1402	DTA124EUA
	D1401-D1404	1SS355
	D1405	SLR-343MC
	D1406	SLR-343VC

SWITCHES AND RELAYS

	S1401-S1403	VSG1024

CAPACITORS

	C1407	CCSRCH101J50
	C1404	CCSRCH102J50
	C1406	CEHAT100M50
	C1401	CKSRYB103K50
	C1402,C1403	CKSRYB104K16

Mark No.	Description	Part No.
RESISTORS		
	VR1401	DCV1013
	VR1402 (1 kohm)	RCP1110
	Other Resistors	RS1/16S###J

N JFLB ASSY

Mark No.	Description	Part No.
SEMICONDUCTORS		
⚠	IC1201	UPD16306B
⚠	Q1212	2SA933S
	Q1213,Q1215	2SB1237X
	Q1202-Q1207,Q1214	2SC2412K
	Q1208-Q1211	2SJ209
	D1201-D1208	1SS355
	D1210	MTZJ30D
⚠	D1219	UDZS4.3B
	D1211-D1214	UDZS6.8B
⚠	D1221	UDZS9.1B
COILS AND FILTERS		
	L1201	LRCA101J
	L1203-L1205 CHIP BEAD	PTL1014
CAPACITORS		
	C1211,C1213,C1214,C1216	CEHAT100M50
	C1201,C1215	CEHAT101M16
	C1203	CKSRYB102K50
	C1202,C1206,C1207,C1209,C1212	CKSRYB103K50
	C1218-C1221,C1223,C1226	CKSRYB103K50
RESISTORS		
	R1281,R1282	RD1/2VM101J
	Other Resistors	RS1/16S###J
OTHERS		
	CN1201 FLEXIBLE CONNECTOR	5597-03APB
	J1202 JUMPER WIRE 15P	D20PYY1505E
	V1201 FL TUBE	DEL1050
	0 FL HOLDER	DNK3959
	CN1602 KR CONNECTOR	S4B-PH-K-S

O JOGB ASSY

Mark No.	Description	Part No.
SEMICONDUCTORS		
	D1601	GP1A038RBK
CAPACITORS		
	C1601,C1602	CKSRYB103K50
RESISTORS		
	All Resistors	RS1/16S###J
OTHERS		
	CN1601 KR CONNECTOR	B4B-PH-K-S

P SW POWER SUPPLY ASSY

There is no service parts.

Q PSWB ASSY

Mark No.	Description	Part No.
SWITCHES AND RELAYS		
⚠	S1	RSA1001
OTHERS		
⚠	AN1 AC SOCKET	AKP7032
⚠	J1 CONNECTOR ASSY	DKP3560
	0 PCB BINDER	VEF1040