
2. EXPLODED VIEWS AND PARTS LIST

*NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• Screw adjacent to ▽ mark on the product are used for disassembly.
• For the applying amount of lobricants or glue, follow the instructions in this manual.
(In the case of no amount instructions,apply as you think it appropriate.)

2.1 PACKING

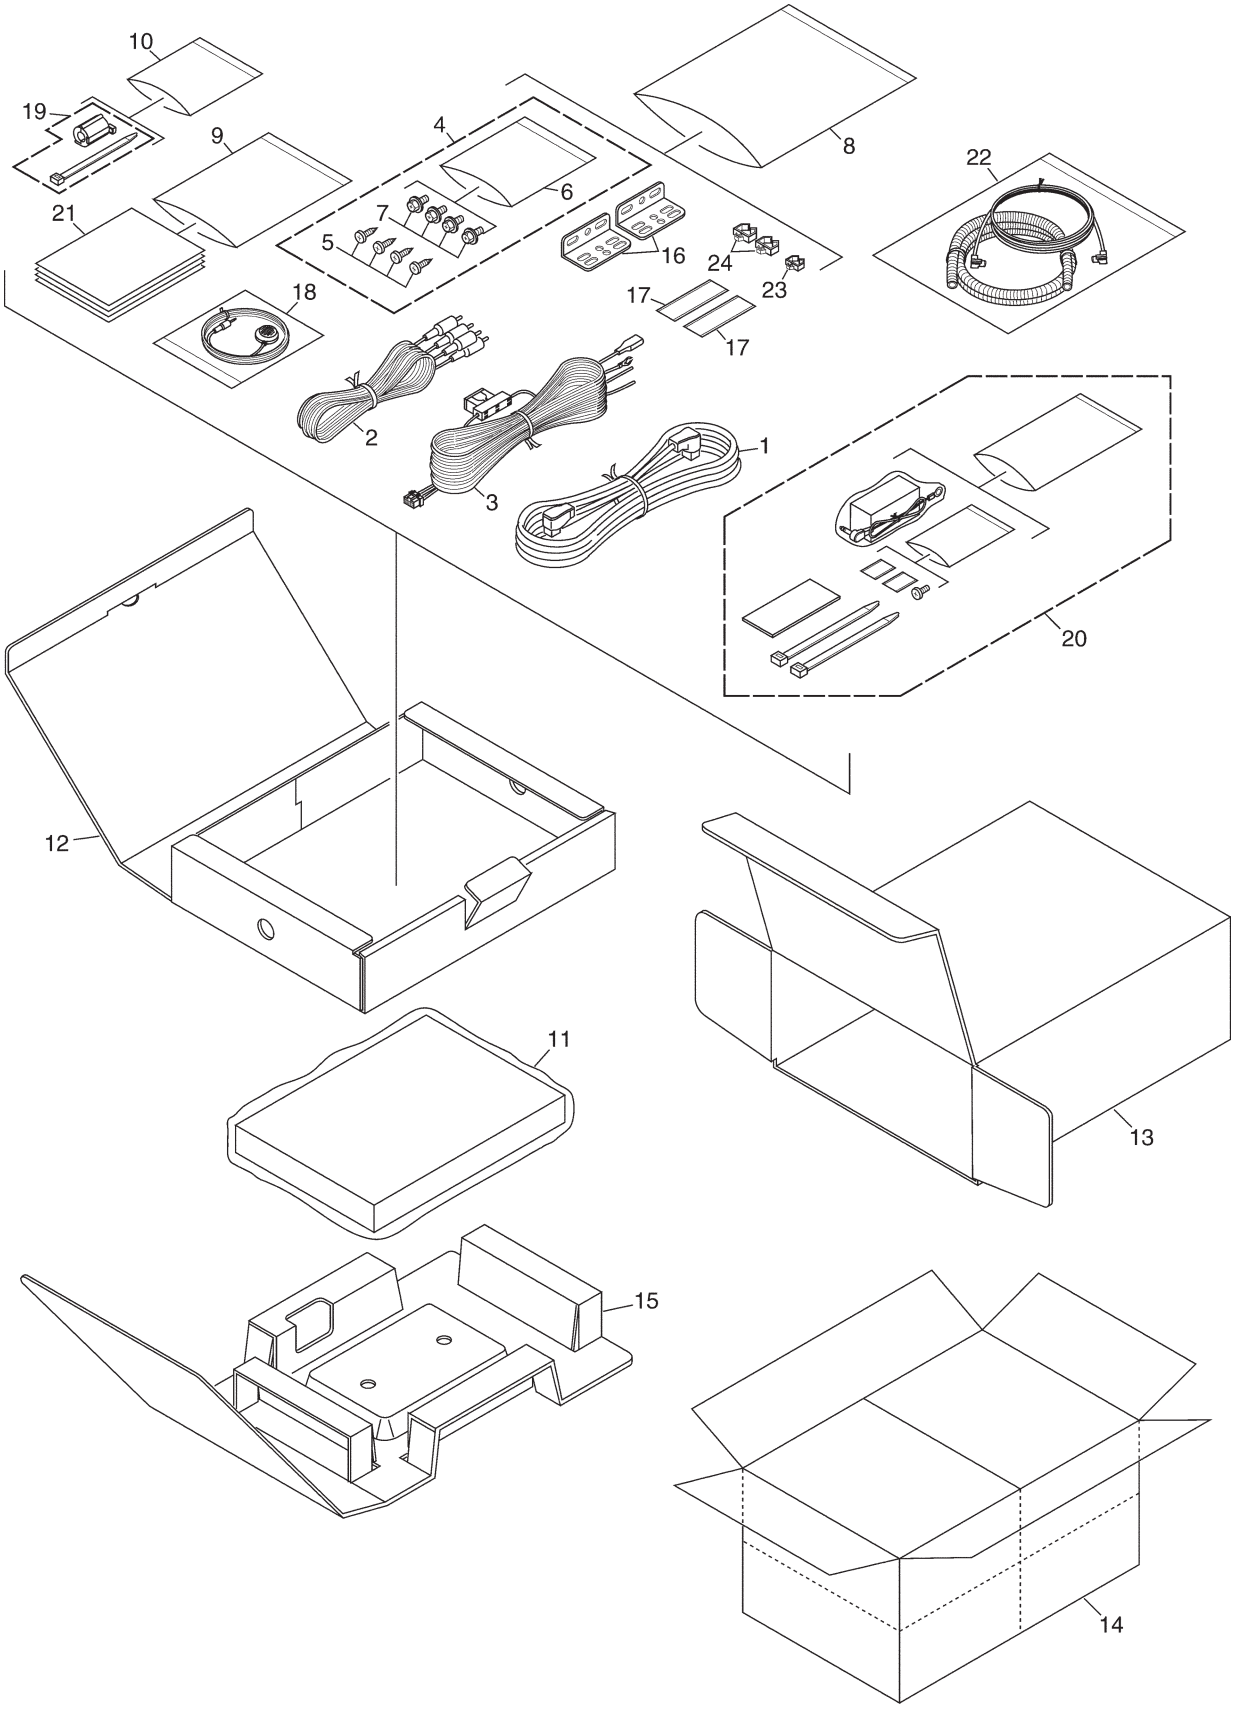

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE5880
	2	Cord	CDE6775
	3	Cord Assy	CDE7531
*	4	Screw Assy	CEA2440
	5	Screw	BNC40P120FZK
*	6	Polyethylene Bag	CEG1158
	7	Screw	HMF40P080FZK
*	8	Polyethylene Bag	CEG1101
	9	Polyethylene Bag	CEG1116
*	10	Polyethylene Bag	See contrast table(2)
	11	Polyethylene Bag	See contrast table(2)
	12	Sub Carton	CHG4691
	13	Carton	See contrast table(2)
	14	Contain Box	See contrast table(2)
	15	Protector	CHP2552
	16	Angle	CNB2351
	17	Fastener	CNM3728
	18	Microphone Assy	CPM1066
	19	Filter	See contrast table(2)
	20	Optical Cable Connection Box	See contrast table(2)
	21-1	Owner's Manual	See contrast table(2)
	21-2	Installation Manual	See contrast table(2)
	21-3	Caution Card	See contrast table(2)
*	21-4	Card	See contrast table(2)
	21-5	Owner's Manual	See contrast table(2)
*	21-6	Warranty Card	See contrast table(2)
	22	Cable	CDE6366
*	23	Clamper	CNV1272
	24	Clamper	CNV1343

(2) CONTRAST TABLE


DEQ-P8000/UC, DEQ-P6600/EW and DEQ-P7650/ES are constructed the same except for the following:

Mark	NO	Description	DEQ-P8000/UC	DEQ-P6600/EW	DEQ-P7650/ES
*	10	Polyethylene Bag	CEG1160	Not used	CEG1160
	11	Polyethylene Bag	CEG1173	CEG-162	CEG-162
	13	Carton	CHG5244	CHG5243	CHG5242
	14	Contain Box	CHL5244	CHL5243	CHL5242
	19	Filter	CTX1054	Not used	CTX1054
	20	Optical Cable Connection Box	CXC3584	CXC3584	Not used
	21-1	Owner's Manual	CRD3877	CRD3874	CRD3879
	21-2	Installation Manual	CRD3878	CRD3876	CRD3880
	21-3	Caution Card	CRP1310	Not used	CRP1310
*	21-4	Card	ARY1048	Not used	Not used
	21-5	Owner's Manual	Not used	CRD3875	Not used
*	21-6	Warranty Card	Not used	CRY1157	Not used

Owner's Manual,Installation Manual

Part No.	Language
CRD3877	English, French
CRD3878	English, French
CRD3874	English, Spanish, German
CRD3875	French, Italian, Dutch
CRD3876	English, Spanish, German, French, Italian, Dutch
CRD3879	English, Spanish, Portuguese(B), Traditional Chinese
CRD3880	English, Spanish, Portuguese(B), Traditional Chinese

2.2 EXTERIOR

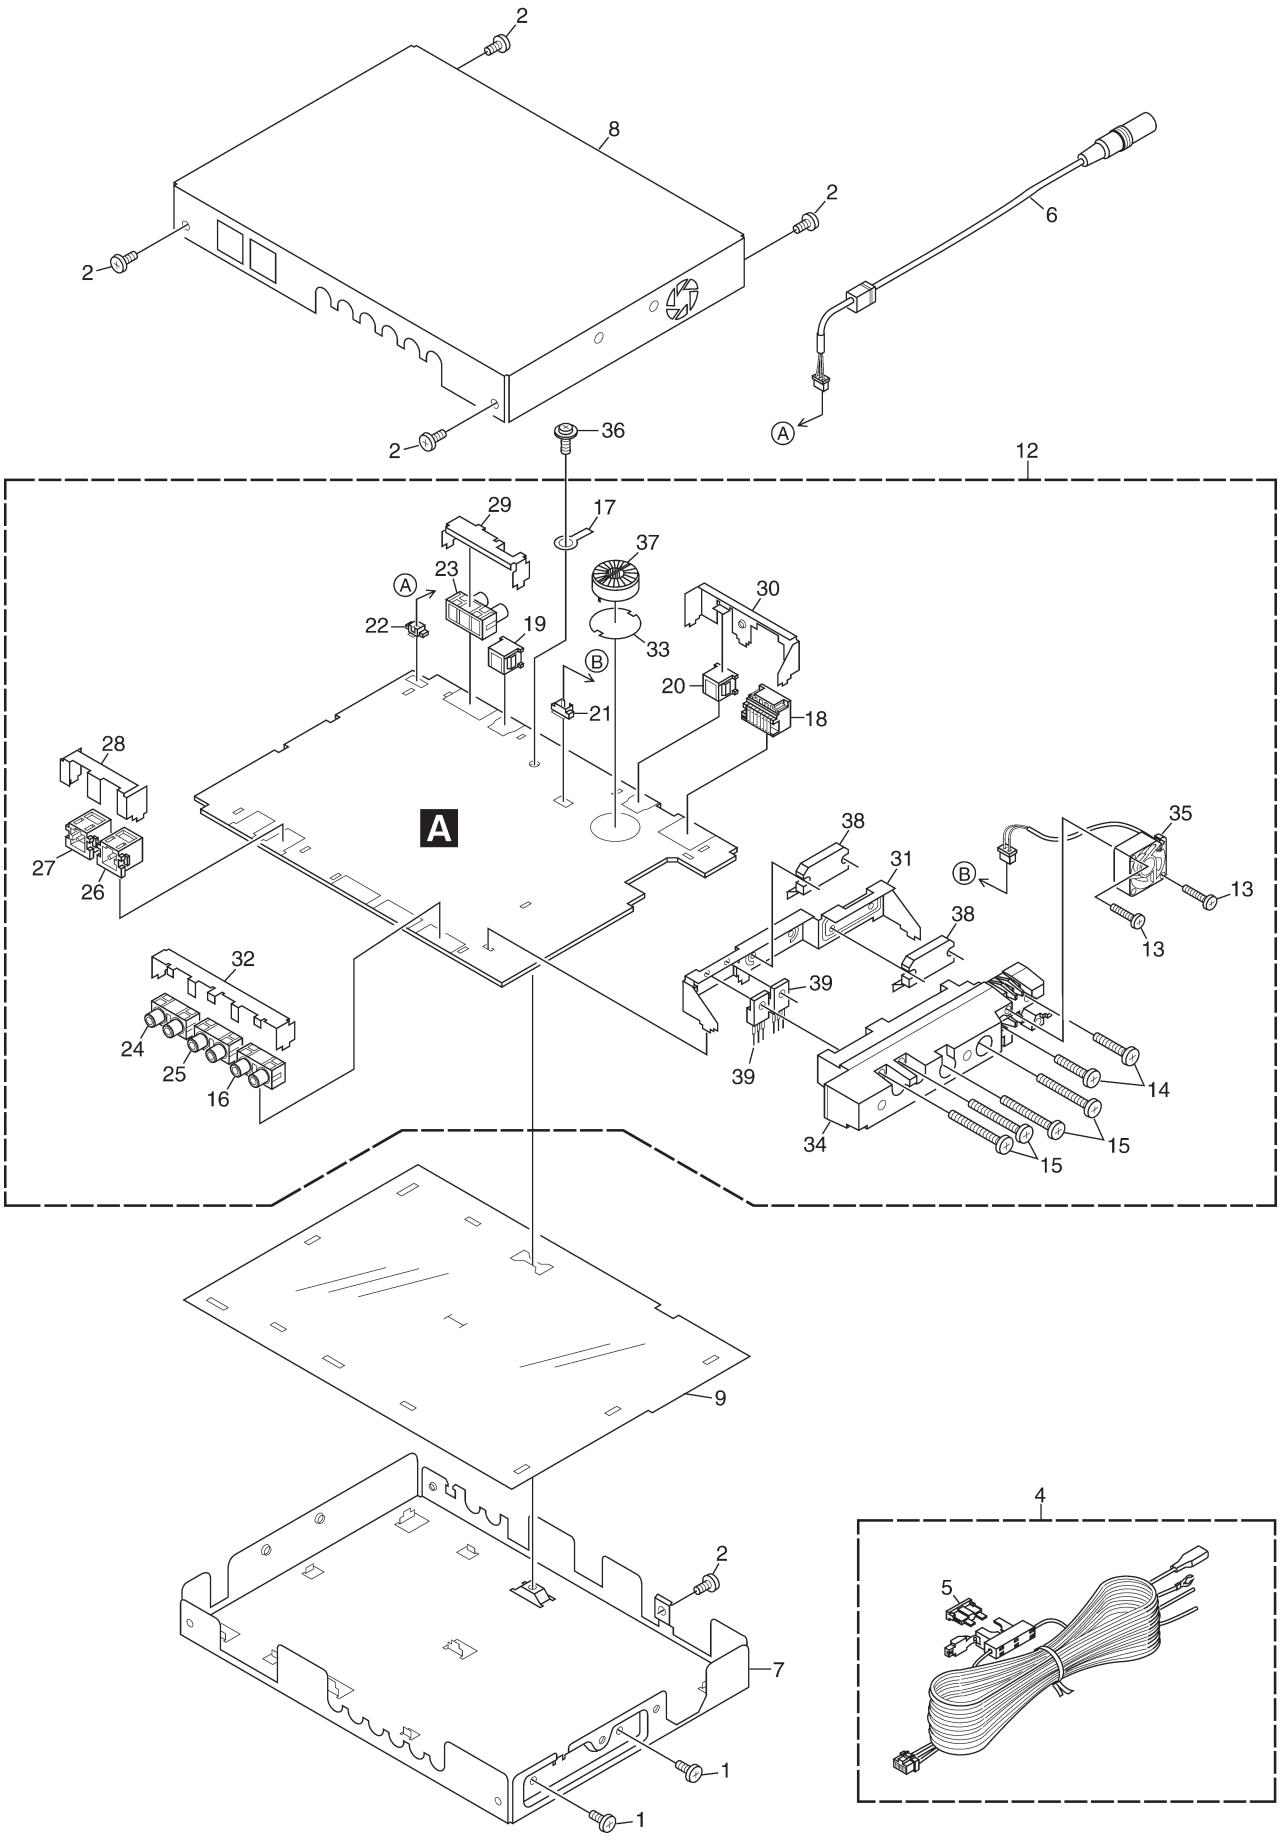
2
8
2
2
6
A
2
36
12
29
17
37
23
A
30
22
19
33
B
20
21
18
28
A
27
26
38
35
31
B
13
38
13
32
39
24
25
16
39
14
34
15
15
9
2
7
1
1
4
5

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ30P040FTC
	2	Screw	BSZ30P060FZK
	3	•••••	
	4	Cord Assy	CDE7531
	5	Fuse(10A)	CEK1136
	6	Cord Assy	CDE7719
	7	Chassis	CNA2741
	8	Case	See contrast table(2)
	9	Insulator	CNM8816
	10	•••••	
	11	•••••	
	12	Audio Control Unit	See contrast table(2)
	13	Screw	BMZ26P150FTC
	14	Screw	BMZ26P200FTC
	15	Screw	BMZ26P350FTC
	16	Pin Jack(CN753)	CKB1053
	17	Terminal(CN103)	CKF1064
	18	Plug(CN801)	CKM1432
	19	Connector(CN101)	CKS2600
	20	Connector(CN102)	CKS2601
	21	Connector(CN961)	CKS3124
	22	Connector(CN172)	CKS3125
	23	Pin Jack(CN122)	CKS3144
	24	Pin Jack(CN751)	CKS3144
	25	Pin Jack(CN752)	CKS3144
	26	Connector(CN201)	CKS3410
	27	Connector(CN202)	CKS3413
	28	Holder	CNC9810
	29	Holder	CND2230
	30	Holder	CND2231
	31	Holder	CND2232
	32	Holder	CND2233
	33	Insulator	CNM7788
	34	Heat Sink	CNR1753
	35	Fan Motor	CXM1301
	36	Screw	ISS26P050FTC
	37	Choke Coil(L801)	CTH1275
	38	IC(IC801, 802)	PAL007A
	39	Transistor(Q941, 981)	2SD2375

(2) CONTRAST TABLE

DEQ-P8000/UC, DEQ-P6600/EW and DEQ-P7650/ES are constructed the same except for the following:

Mark	NO	Description	DEQ-P8000/UC	DEQ-P6600/EW	DEQ-P7650/ES
	8	Case	CNB3004	CNB2998	CNB2999
	12	Audio Control Unit	CWM9422	CWM9423	CWM9424

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A

Unit Number:CWM9422(UC)
Unit Number:CWM9423(EW)
Unit Number:CWM9424(ES)
Unit Name:Audio Control Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	IC	TC7WH08FU
IC 121	IC	BA3129F
IC 123	IC	NJM2100M
IC 125	IC	NJM2100M
IC 201	IC	HA12240FP
IC 221	IC	AK7730VT
IC 251	IC	YSS932-S
IC 252	IC	MSM51V4265EP-70TS
IC 253	IC	TC7SET08FU
IC 301	IC	XC25BS5118MR
IC 302	IC	PCM1604Y-2
IC 303	IC	TC7WB383FK
IC 351	IC	TC9164AF
IC 361	IC	NJM4580MD
IC 381	IC	NJM4580MD
IC 401	IC	NJM4558MD
IC 402	IC	NJM2068MD
IC 451	IC	NJM4580MD
IC 452	IC	NJM4580MD
IC 501	IC	PML011A
IC 502	IC	PML011A
IC 551	IC	TC74VHC08FT
IC 552	IC	TC74VHC541FT
IC 553	IC	TC74VHCT541AFT
IC 601	IC	PD5967A
IC 602	IC	S-80835CNUA-B8U
IC 701	IC	NJM4580MD
IC 703	IC	NJM4558MD
IC 705	IC	NJM4558MD
IC 801	IC	PAL007A
IC 802	IC	PAL007A
IC 901	IC	AN8015SH
IC 921	IC	S-812C56AUA-C3K
IC 941	IC	PQ1X331M2ZP
IC 981	IC	PQ1X251M2ZP
IC 982	IC	BA033FP
Q 101	Transistor	2SC2412K
Q 102	Transistor	2SC2412K
Q 121	Transistor	DTC124EU
Q 174	Transistor	2SC2412K
Q 501	Transistor	FMG12
Q 502	Transistor	FMG12
Q 503	Transistor	FMG12
Q 504	Transistor	DTA124EU
Q 505	Transistor	IMD2A
Q 601	Transistor	2SA1576
Q 681	Transistor	2SC2412K
Q 682	Transistor	2SC2412K
Q 751	Transistor	2SC2412K
Q 752	Transistor	DTC124EU
Q 753	Transistor	2SA1576
Q 754	Transistor	DTA114EU
Q 755	Transistor	IMX9
Q 756	Transistor	IMX9
Q 757	Transistor	IMX9
Q 758	Transistor	IMX9
Q 759	Transistor	IMX9
Q 760	Transistor	IMX9
Q 803	Transistor	DTC124EU
Q 804	Transistor	DTC124EU
Q 901	Transistor	UMZ1N
Q 902	Transistor	2SA1797
Q 903	Transistor	2SD1767
Q 904	Transistor	2SA1797
Q 905	Transistor	DTC124EU
Q 921	Transistor	2SD1767
Q 941	Transistor	2SD2375
Q 942	Transistor	2SD1760F5
Q 943	Transistor	IMD2A
Q 944	Transistor	IMD2A
Q 945	Transistor	DTC114EU
Q 961	Transistor	2SD1767
Q 981	Transistor	2SD2375
Q 982	Transistor	IMD2A
D 101	Diode	MA111
D 102	Diode	MA111
D 171	Diode	UDZS3R9(B)
D 501	Diode	DAP202U
D 502	Diode	DAP202U
D 503	Diode	DAP202U
D 504	Diode	DAN202U
D 601	Diode	MA111
D 602	Diode	1SS355
D 681	Diode	UDZS7R5(B)
D 751	Diode	UDZS8R2(B)
D 752	Diode	DAN202U

Circuit Symbol and No.		Part No.
D 754	Diode	1SS355
D 801	Diode	SC016-2
D 802	Diode	SC016-2
D 803	Diode	SC016-2
D 804	Diode	SC016-2
D 901	Diode	SC802-06
D 902	Diode	UDZS18(B)
D 921	Diode	1SS355
D 922	Diode	UDZS18(B)
D 923	Diode	RSX201L-30
D 941	Diode	UDZS9R1(B)
D 942	Diode	UDZS5R6(B)
D 943	Diode	UDZS6R2(B)
D 961	Diode	UDZS11(B)
D 981	Diode	UDZS5R6(B)
L 101	Inductor	CTF1473
L 121	Inductor	CTF1473
L 122	Inductor	CTF1473
L 123	Inductor	CTF1473
L 124	Inductor	CTF1473
L 201	Inductor	CTF1379
L 202	Inductor	CTF1473
L 203	Inductor	CTF1379
L 221	Inductor	CTF1473
L 222	Inductor	CTF1473
L 223	Inductor	CTF1473
L 224	Inductor	CTF1473
L 251	Inductor	CTF1473
L 252	Inductor	CTF1473
L 253	Inductor	CTF1473
L 254	Inductor	CTF1473
L 255	Inductor	CTF1473
L 256	Inductor	CTF1473
L 257	Inductor	CTF1473
L 258	Inductor	CTF1473
L 259	Inductor	CTF1473
L 260	Inductor	CTF1473
L 261	Inductor	CTF1473
L 262	Inductor	CTF1357
L 263	Inductor	CTF1473
L 264	Inductor	CTF1379
L 301	Inductor	CTF1473
L 302	Inductor	CTF1473
L 303	Inductor	CTF1473
L 304	Inductor	CTF1473
L 305	Inductor	CTF1357
L 306	Inductor	LCTAW220J2016
L 307	Inductor	CTF1306
L 351	Inductor	CTF1410
L 352	Inductor	CTF1410
L 551	Inductor	CTF1473
L 552	Inductor	CTF1473
L 553	Inductor	CTF1473
L 601	Inductor	CTF1473
L 602	Inductor	CTF1473
L 751	Inductor	CTF1487
L 752	Inductor	CTF1473
L 753	Inductor	CTF1473
L 754	Inductor	CTF1473
L 755	Inductor	CTF1473
L 756	Inductor	CTF1473
L 757	Inductor	CTF1473
L 801	Choke Coil 600µH	CTH1275
L 901	Coil	CTH1267
L 902	Coil	CTH1267
L 903	Coil	CTH1267
X 251	Radiator 24.576MHz	CSS1630
X 601	Radiator 10.0MHz	CSS1577
S 601	Switch(RESET)	CSG1046
FU751	Fuse 3A	CEK1286
FU941	Fuse 0.5A	CEK1278
FU942	Fuse 375mA	CEK1277
	Fan Motor	CXM1301

RESISTORS

R 101	RS1/16S102J
R 102	RS1/16S102J
R 103	RS1/16S102J
R 104	RS1/16S102J
R 105	RS1/16S473J
R 106	RS1/16S473J
R 107	RS1/16S101J
R 108	RS1/16S101J
R 109	RS1/16S680J
R 110	RS1/16S680J
R 121	RS1/16S223J
R 122	RS1/16S223J
R 123	RS1/16S223J
R 124	RS1/16S223J
R 125	RS1/16S472J
R 126	RS1/16S104J
R 128	RS1/16S472J
R 130	RS1/16S561J
R 131	RS1/16S223J
R 132	RS1/16S472J
R 133	RS1/16S472J
R 134	RS1/16S223J
R 138	RS1/16S183J
R 139	RS1/16S104J
R 140	RS1/16S822J
R 142	RS1/16S183J
R 143	RS1/16S223J
R 144	RS1/16S103J
R 145	RS1/16S183J
R 146	RS1/16S103J
R 147	RS1/16S822J
R 148	RS1/16S473J
R 149	RS1/16S183J
R 151	RS1/16S103J
R 153	RS1/16S223J
R 155	RS1/16S223J
R 157	RS1/16S103J
R 172	RS1/16S471J
R 177	RS1/16S104J
R 179	RS1/16S222J
R 180	RS1/16S102J
R 183	RS1/16S561J
R 186	RS1/16S472J
R 187	RS1/16S104J
R 193	RS1/16S104J

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
R 198	RS1/16S104J	R 366	RS1/16S3901D
R 199	RS1/16S222J	R 367	RS1/16S822J
R 201	RS1/16S101J	R 368	RS1/16S822J
R 202	RS1/16S101J	R 369	RS1/16S1502D
R 204	RS1/16S472J	R 370	RS1/16S1502D
R 221	RS1/16S0R0J	R 381	RS1/16S8200D
R 222	RS1/16S470J	R 382	RS1/16S8200D
R 223	RS1/16S0R0J	R 383	RS1/16S1002D
R 224	RS1/16S0R0J	R 384	RS1/16S1002D
R 225	RS1/16S470J	R 385	RS1/16S3901D
R 226	RS1/16S0R0J	R 386	RS1/16S3901D
R 227	RS1/16S0R0J	R 387	RS1/16S822J
R 228	RS1/16S470J	R 388	RS1/16S822J
R 229	RS1/16S0R0J	R 389	RS1/16S1502D
R 230	RS1/16S0R0J	R 390	RS1/16S1502D
R 231	RS1/16S102J	R 401	RS1/16S8200D
R 232	RS1/16S102J	R 402	RS1/16S1001D
R 233	RS1/16S562J	R 403	RS1/16S1002D
R 235	RS1/16S0R0J	R 404	RS1/16S1002D
R 236	RAB4C471J	R 405	RS1/16S3901D
R 237	RAB4C471J	R 406	RS1/16S4701D
R 251	RS1/16S103J	R 407	RS1/16S1802D
R 252	RS1/16S101J	R 408	RS1/16S1001D
R 253	RAB4C101J	R 409	RS1/16S1001D
R 254	RS1/16S331J	R 410	RS1/16S1202D
R 255	RS1/16S105J	R 411	RS1/16S1502D
R 256	RAB4C471J	R 412	RS1/16S8201D
R 257	RAB4C471J	R 413	RS1/16S8201D
R 258	RS1/16S0R0J	R 414	RS1/16S332J
R 259	RS1/16S0R0J	R 415	RS1/16S822J
R 260	RAB4C471J	R 416	RS1/16S222J
R 261	RAB4C471J	R 417	RS1/16S222J
R 262	RS1/16S102J	R 418	RS1/16S223J
R 263	RS1/16S471J	R 419	RS1/16S223J
R 264	RS1/16S471J	R 451	RS1/16S1002D
R 265	RS1/16S152J	R 452	RS1/16S1002D
R 266	RAB4C471J	R 453	RS1/16S3901D
R 267	RS1/16S512J	R 454	RS1/16S3901D
R 269	RAB4C471J	R 455	RS1/16S3301D
R 270	RAB4C471J	R 456	RS1/16S3301D
R 271	RAB4C0R0J	R 457	RS1/16S1802D
R 272	RAB4C0R0J	R 458	RS1/16S1802D
R 273	RS1/16S0R0J	R 459	RS1/16S3301D
R 274	RS1/16S680J	R 460	RS1/16S3301D
R 275	RS1/16S470J	R 461	RS1/16S5601D
R 276	RS1/16S680J	R 462	RS1/16S5601D
R 277	RAB4C470J	R 463	RS1/16S1802D
R 301	RS1/16S220J	R 464	RS1/16S1802D
R 302	RS1/16S0R0J	R 465	RS1/16S5601D
R 303	RS1/16S0R0J	R 466	RS1/16S5601D
R 304	RS1/16S0R0J	R 467	RS1/16S1201D
R 305	RS1/16S0R0J	R 468	RS1/16S1201D
R 306	RS1/16S0R0J	R 469	RS1/16S2201D
R 307	RS1/16S0R0J	R 470	RS1/16S2201D
R 309	RAB4C471J	R 471	RS1/16S4701D
R 361	RS1/16S8200D	R 472	RS1/16S4701D
R 362	RS1/16S8200D	R 473	RS1/16S1001D
R 363	RS1/16S1002D	R 474	RS1/16S1001D
R 364	RS1/16S1002D	R 475	RS1/16S1001D
R 365	RS1/16S3901D	R 476	RS1/16S1001D

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
R 477	RS1/16S4701D	R 632	RAB4C101J
R 478	RS1/16S4701D	R 633	RAB4C471J
R 479	RS1/16S0R0J	R 634	RS1/16S473J
R 480	RS1/16S0R0J	R 635	RS1/16S473J
R 481	RS1/16S0R0J	R 636	RS1/16S471J
R 482	RS1/16S0R0J	R 637	RS1/16S473J
R 483	RS1/16S8201D	R 638	RAB4C471J
R 484	RS1/16S8201D	R 639	RS1/16S471J
R 485	RS1/16S8201D	R 640	RS1/16S473J
R 486	RS1/16S8201D	R 641	RS1/16S102J
R 487	RS1/16S222J	R 642	RS1/16S104J
R 488	RS1/16S222J	R 643	RAB4C101J
R 489	RS1/16S222J	R 644	RS1/16S0R0J
R 490	RS1/16S222J	R 645	RS1/16S0R0J
R 491	RS1/16S223J	R 646	RS1/16S102J
R 492	RS1/16S223J	R 647	RAB4C102J
R 493	RS1/16S223J	R 648	RAB4C471J
R 494	RS1/16S223J	R 649	RS1/16S0R0J
R 501	RS1/16S153J	R 650	RS1/16S102J
R 502	RS1/16S153J	R 651	RS1/16S0R0J
R 503	RS1/16S103J	R 681	RS1/16S473J
R 504	RS1/16S103J	R 682	RS1/16S473J
R 505	RS1/16S103J	R 683	RS1/16S104J
R 506	RS1/16S103J	R 684	RS1/16S473J
R 507	RS1/16S682J	R 701	RS1/16S103J
R 508	RS1/16S682J	R 702	RS1/16S6801D
R 509	RS1/16S0R0J	R 703	RS1/16S6801D
R 510	RS1/16S0R0J	R 704	RS1/16S103J
R 513	RS1/16S222J	R 705	RS1/16S8200D
R 601	RS1/16S474J	R 706	RS1/16S8200D
R 602	RS1/16S103J	R 707	RS1/16S1202D
R 603	RS1/16S104J	R 708	RS1/16S1202D
R 604	RS1/16S123J	R 709	RS1/16S103J
R 605	RS1/16S102J	R 710	RS1/16S6801D
R 606	RS1/16S103J	R 711	RS1/16S6801D
R 607	RS1/16S223J	R 712	RS1/16S103J
R 608	RS1/16S103J	R 713	RS1/16S8200D
R 609	RS1/16S473J	R 714	RS1/16S8200D
R 610	RAB4C471J	R 715	RS1/16S1202D
R 611	RS1/16S104J	R 716	RS1/16S1202D
R 612	RS1/16S562J	R 717	RS1/16S103J
R 613	RAB4C102J	R 718	RS1/16S6801D
R 614	RS1/16S102J	R 719	RS1/16S0R0J
R 615	RS1/16S473J	R 720	RS1/16S103J
R 616	RS1/16S105J	R 721	RS1/16S1801D
R 617	RS1/16S473J	R 722	RS1/16S8200D
R 618	RS1/16S104J	R 723	RS1/16S4701D
R 619	RS1/16S102J	R 724	RS1/16S1202D
R 620	RS1/16S102J	R 751	RS1/16S102J
R 621	RS1/16S473J	R 752	RS1/16S473J
R 622	RS1/16S473J	R 753	RS1/16S223J
R 623	RS1/16S472J	R 754	RS1/16S472J
R 624	RAB4C101J	R 755	RS1/16S103J
R 625	RS1/16S473J	R 756	RS1/16S102J
R 626	RS1/16S473J	R 757	RS1/16S390J
R 627	RAB4C471J	R 758	RS1/16S390J
R 628	RS1/16S473J	R 759	RS1/16S390J
R 629	RS1/16S473J	R 760	RS1/16S390J
R 630	RAB4C471J	R 761	RS1/16S390J
R 631	RS1/16S474J	R 762	RS1/16S390J

Circuit Symbol and No.	Part No.
R 763	RS1/16S390J
R 764	RS1/16S390J
R 765	RS1/16S390J
R 766	RS1/16S390J
R 767	RS1/16S390J
R 768	RS1/16S390J
R 769	RS1/16S223J
R 770	RS1/16S223J
R 771	RS1/16S223J
R 772	RS1/16S223J
R 773	RS1/16S223J
R 774	RS1/16S223J
R 775	RS1/16S103J
R 776	RS1/16S103J
R 777	RS1/16S103J
R 778	RS1/16S103J
R 779	RS1/16S103J
R 780	RS1/16S103J
R 781	RS1/16S103J
R 782	RS1/16S103J
R 783	RS1/16S103J
R 784	RS1/16S103J
R 785	RS1/16S103J
R 786	RS1/16S103J
R 787	RS1/16S103J
R 804	RS1/16S331J
R 806	RS1/16S103J
R 807	RS1/16S103J
R 808	RS1/16S103J
R 810	RS1/16S101J
R 901	RS1/16S101J
R 902	RS1/16S3601D
R 903	RS1/16S1002D
R 904	RS1/16S222J
R 905	RS1/16S222J
R 906	RS1/16S223J
R 907	RS1/16S681J
R 908	RS1/16S104J
R 909	RS1/16S1803D
R 910	RS1/16S3302D
R 911	RS1/16S8201D
R 912	RS1/16S1001D
R 913	RAB4C332J
R 914	RS1/16S223J
R 915	RS1/16S471J
R 916	RS1/16S0R0J
R 921	RS1/16S471J
R 922	RS1/16S2R2J
R 923	RS1/16S2R2J
R 924	RS1/16S2R2J
R 925	RS1/16S2R2J
R 941	RS1/16S473J
R 942	RS1/16S471J
R 943	RS1/16S471J
R 944	RS1/16S102J
R 961	RS1/16S101J
R 962	RS1/16S101J
R 981	RS1/16S473J
R 982	RS1/16S332J
R 983	RS1/16S472J

CAPACITORS

Circuit Symbol and No.	Part No.
C 101	CKSRYB104K25
C 102	CKSRYB104K25
C 103	CKSRYB104K25
C 104	CCSRCH470J50
C 105	CCSRCH470J50
C 106	CKSYB106K6R3
C 107	CKSYB106K6R3
C 121	CKSYB106K6R3
C 122	CCSRCH470J50
C 123	CCSRCH470J50
C 124	CKSYB106K6R3
C 125	CCSRCH150J50
C 126	CKSYB106K6R3
C 127	CEVW100M16
C 128	CKSRYB105K10
C 129	CKSYB106K6R3
C 130	CEVW100M16
C 132	CCSRCH471J50
C 133	CKSRYB104K25
C 134	CCSRCH121J50
C 135	CEVW100M16
C 136	CKSRYB105K10
C 138	CCSRCH150J50
C 140	CKSRYB104K25
C 141	CEVW100M16
C 142	CEVW100M16
C 143	CCSRCH471J50
C 145	CCSRCH121J50
C 147	CEVW100M16
C 149	CKSRYB104K25
C 151	CCSRCH150J50
C 174	CKSRYB105K10
C 176	CCSRCH471J50
C 178	CCSRCH471J50
C 185	CKSRYB102K50
C 201	CKSRYB104K25
C 202	CKSRYB102K50
C 203	CKSRYB102K50
C 204	CKSRYB105K10
C 205	CKSRYB102K50
C 221	CKSRYB104K25
C 222	CKSRYB102K50
C 223	CKSRYB102K50
C 224	CKSRYB104K25
C 225	CKSRYB104K25
C 226	CEVW100M16
C 227	CKSRYB104K25
C 228	CEVW100M16
C 229	CKSRYB104K25
C 231	CKSRYB682K50
C 233	CKSRYB104K25
C 234	CEVW100M16
C 235	CKSRYB104K25
C 251	CKSRYB104K25
C 252	CKSRYB104K25
C 253	CKSRYB104K25
C 254	CKSRYB104K25

Circuit Symbol and No.	Part No.
C 255	CKSRYB104K25
C 256	CCSRCH100D50
C 257	CKSRYB104K25
C 258	CKSRYB104K25
C 259	CCSRCH100D50
C 260	CCSRCH471J50
C 261	CKSRYB472K50
C 262	CKSRYB104K25
C 263	CKSRYB472K50
C 264	CKSRYB104K25
C 265	CKSRYB104K25
C 266	CEVW101M10
C 267	CKSRYB104K25
C 268	CKSRYB104K25
C 269	CKSRYB104K25
C 270	CKSRYB104K25
C 271	CKSYB106K6R3
C 272	CCSRCH470J50
C 273	CCSRCH470J50
C 274	CCSRCH471J50
C 275	CKSRYB104K25
C 276	CKSRYB102K50
C 301	CCSRCH100D50
C 302	CKSRYB105K10
C 303	CEVW100M16
C 304	CKSRYB104K25
C 305	CEVW100M16
C 306	CKSRYB104K25
C 307	CEVW100M16
C 308	CKSRYB104K25
C 309	CEVW100M16
C 310	CEVW100M16
C 311	CEVW100M16
C 312	CEVW100M16
C 313	CEVW100M16
C 314	CEVW100M16
C 315	CEVW100M16
C 316	CKSRYB104K25
C 317	CKSRYB102K50
C 318	CKSQYB475K6R3
C 319	CKSRYB104K25
C 320	CKSRYB104K25
C 351	CEVW100M16
C 352	CEVW100M16
C 361	CKSRYB472K50
C 362	CKSRYB472K50
C 363	CKSRYB102K50
C 364	CKSRYB102K50
C 365	CCSRCH121J50
C 366	CCSRCH121J50
C 367	CKSRYB105K10
C 368	CKSRYB105K10
C 381	CKSRYB472K50
C 382	CKSRYB472K50
C 383	CKSRYB102K50
C 384	CKSRYB102K50
C 385	CCSRCH121J50
C 386	CCSRCH121J50
C 387	CKSRYB105K10
C 388	CKSRYB105K10

Circuit Symbol and No.	Part No.
C 401	CKSRYB472K50
C 402	CKSRYB104K25
C 403	CKSRYB102K50
C 404	CKSRYB473K50
C 405	CCSRCH470J50
C 406	CCSRCH150J50
C 407	CCSRCH121J50
C 408	CKSRYB472K50
C 409	CEVWNP100M10
C 410	CEVWNP100M10
C 411	CKSRYB105K10
C 412	CKSRYB105K10
C 413	CKSRYB105K10
C 414	CKSRYB105K10
C 451	CCSRCH470J50
C 452	CCSRCH470J50
C 453	CCSRCH470J50
C 454	CCSRCH470J50
C 455	CEVWNP100M10
C 456	CEVWNP100M10
C 457	CEVWNP100M10
C 458	CEVWNP100M10
C 459	CKSRYB105K10
C 460	CKSRYB105K10
C 461	CKSRYB105K10
C 462	CKSRYB105K10
C 501	CEVW470M10
C 502	CEVW470M10
C 503	CKSRYB104K25
C 504	CKSRYB104K25
C 505	CKSRYB105K10
C 506	CKSRYB105K10
C 507	CKSRYB105K10
C 508	CKSRYB105K10
C 509	CKSRYB105K10
C 510	CKSRYB105K10
C 511	CKSRYB105K10
C 512	CKSRYB105K10
C 513	CEVW100M16
C 514	CEVW100M16
C 515	CKSRYB105K10
C 516	CKSRYB105K10
C 517	CEVW100M16
C 518	CEVW100M16
C 519	CKSRYB104K25
C 520	CKSRYB104K25
C 551	CKSRYB104K25
C 552	CKSRYB104K25
C 553	CKSRYB104K25
C 601	CKSRYB103K50
C 602	CKSRYB105K10
C 603	CKSRYB104K25
C 604	CEVW100M16
C 606	CEVW100M16
C 607	CKSRYB104K25
C 701	CEVW100M16
C 702	CEVW100M16
C 703	CKSRYB105K10
C 704	CCSRCH470J50
C 705	CCSRCH470J50

Circuit Symbol and No.		Part No.
C 706		CKSRYB105K10
C 707		CEVW100M16
C 708		CEVW100M16
C 709		CKSRYB105K10
C 710		CCSRCH470J50
C 711		CCSRCH470J50
C 712		CKSRYB105K10
C 713		CEVW100M16
C 714		CEVW100M16
C 715		CKSRYB105K10
C 716		CCSRCH470J50
C 717		CCSRCH470J50
C 718		CKSRYB105K10
C 751		CEVWNP100M10
C 752		CEVWNP100M10
C 753		CEVWNP100M10
C 754		CEVWNP100M10
C 755		CEVWNP100M10
C 756		CEVWNP100M10
C 757		CKSRYB102K50
C 758		CKSRYB102K50
C 759		CKSRYB102K50
C 760		CKSRYB102K50
C 761		CKSRYB102K50
C 762		CKSRYB102K50
C 763		CKSRYB104K25
C 764		CKSYB475K10
C 765		CKSYB475K10
C 766		CKSRYB104K50
C 801		CKSRYB102K50
C 802		CEHVW330M16
C 803		CEVW100M16
C 804	2200µF/16V	CCH1447(P35)
C 805		CKSRYB104K25
C 806		CKSRYB103K50
C 807		CKSYB225K16
C 808		CKSRYB105K10
C 809		CKSYB225K16
C 810		CKSRYB105K10
C 811		CKSRYB105K10
C 812		CKSRYB105K10
C 813		CKSRYB105K10
C 814		CKSRYB104K25
C 815		CEVW100M16
C 816		CKSRYB105K10
C 817		CKSRYB105K10
C 818		CKSRYB105K10
C 819		CKSRYB105K10
C 820	4700µF/16V	CCH1068(P35)
C 823		CKSRYB105K10
C 824		CKSRYB105K10
C 825		CKSQYB225K10
C 826		CKSYB475K16
C 901		CCSRCH151J50
C 902		CKSRYB104K25
C 903		CKSRYB104K25
C 904		CKSRYB104K25
C 905		CCSRCH101J50
C 906		CCSRCH471J50
C 907		CKSRYB104K25

Circuit Symbol and No.		Part No.
C 908		CEHVW330M16
C 909		CEHVW330M16
C 910		CKSYB475K10
C 911		CKSYB225K16
C 912		CEVW330M16
C 914		CKSRYB104K25
C 921	0.1F	CCL1023
C 922		CEVW100M16
C 923		CKSRYB103K50
C 924		CKSRYB104K25
C 925		CKSRYB104K25
C 926	2200µF/16V	CCH1405(P35)
C 941		CKSRYB105K10
C 942		CKSRYB103K50
C 943		CEVW101M10
C 944		CKSRYB103K50
C 945		CKSRYB103K50
C 946		CEVW4R7M35
C 947		CKSRYB105K10
C 948		CKSRYB104K25
C 949		CEVW101M10
C 950		CKSRYB103K50
C 951		CKSRYB473K50
C 952		CEVW100M16
C 953		CKSRYB104K25
C 961		CKSRYB104K25
C 962		CKSRYB104K25
C 963		CEVW100M16
C 981		CEVW470M10
C 982		CKSRYB105K10
C 983		CKSRYB103K50
C 984		CKSRYB105K10
C 985		CKSRYB103K50
C 986		CEVW470M10
C 987		CKSRYB104K25
C 988		CEVW101M10
C 989		CKSRYB103K50
C 990		CKSRYB473K50
C 991		CKSRYB104K25
C 992		CEVW100M16