
9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

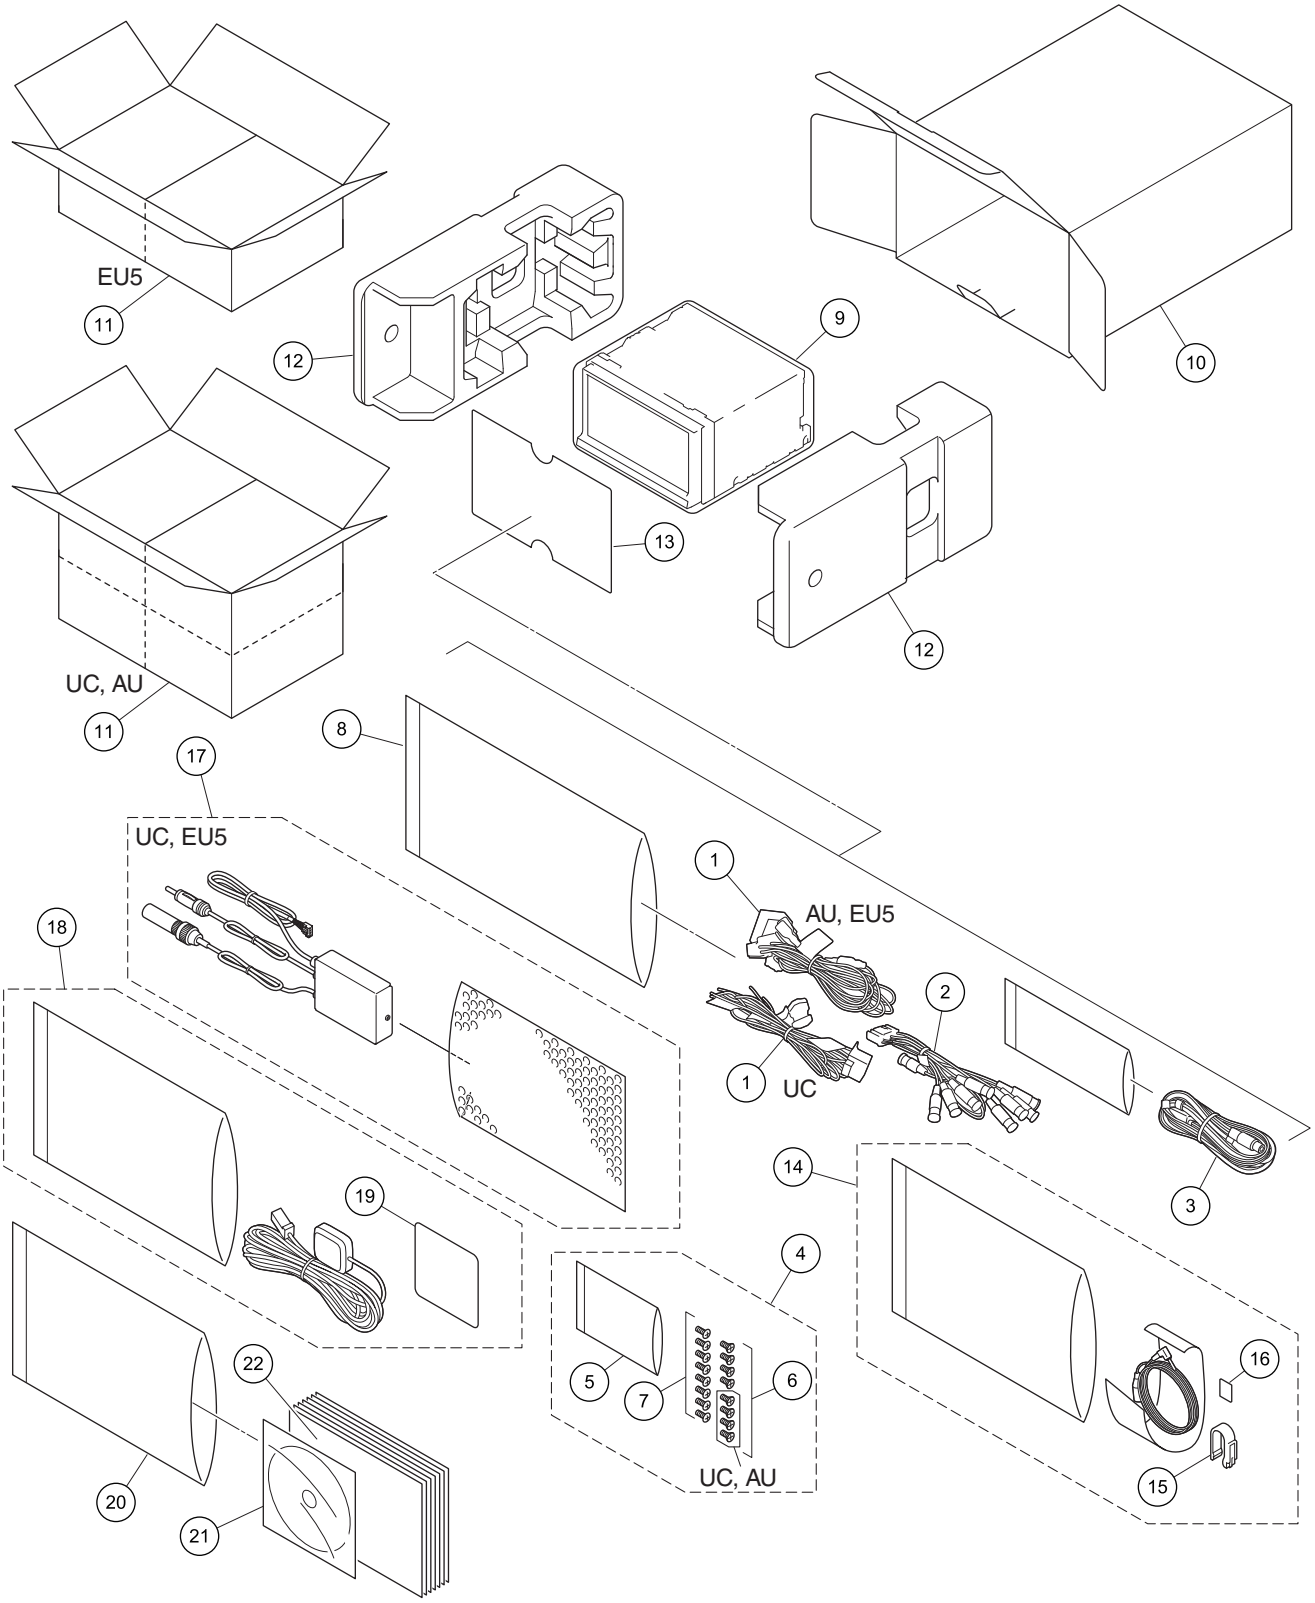

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	See Contrast table (2)
	2	MBL CMPX CONN-CORD	CDP1375
	3	USB CONN-Cable Assy	CDP1425
	4	Screw Assy	See Contrast table (2)
*	5	Polyethylene Bag	CEG-127
	6	Screw	CRZ50P090FTC
	7	Screw	TRZ50P080FTC
	8	Polyethylene Bag	CEG1116
	9	Cover	See Contrast table (2)
	10	Unit Box	See Contrast table (2)
	11	Contain Box	See Contrast table (2)
	12	Protector	See Contrast table (2)
*	13	Board	CHW2174
	14	Microphone Assy	CPM1083
	15	Holder	CZN7192
	16	Cushion	CZN7193
	17	RDS-TMC Tuner	See Contrast table (2)
	18	GPS Antenna Assy	CXE3204
	19	Sheet	CZN8510
	20	Polyethylene Bag	CEG1116
	21	IM CD-ROM	See Contrast table (2)
	22-1	Important Information	See Contrast table (2)
	22-2	Quick Start Guide	See Contrast table (2)
	22-3	Quick Start Guide	See Contrast table (2)
	22-4	Quick Start Guide	See Contrast table (2)
	22-5	Quick Start Guide	See Contrast table (2)
	22-6	Quick Start Guide	See Contrast table (2)
	22-7	Quick Start Guide	See Contrast table (2)
	22-8	Installation Manual	See Contrast table (2)
	22-9	Caution Card	See Contrast table (2)
*	22-10	Registration Card	See Contrast table (2)
*	22-11	Warranty Card	See Contrast table (2)
*	22-12	Passport	See Contrast table (2)

(2) CONTRAST TABLE

AVIC-Z130BT/XNUC, AVIC-F30BT/XNAU and AVIC-F30BT/XNEU5 are constructed the same except for the following:

Mark	No.	Description	AVIC-Z130BT/XNUC	AVIC-F30BT/XNAU	AVIC-F30BT/XNEU5
	1	Cord Assy	CDP1307	CDP1306	CDP1306
	4	Screw Assy	CEA3559	CEA3559	CEC6446
	9	Cover	CEG1359	CEG1356	CEG1356
	10	Unit Box	CHG7534	CHG7537	CHG7535
	11	Contain Box	CHL7534	CHL7537	CHL7535
	12	Protector	CHP4138	CHP4138	CHP4137
	17	RDS-TMC Tuner	CXE2176	Not Used	CXE2176
	21	IM CD-ROM	CPJ1334	CPJ1334	CPJ1335
	22-1	Important Information	CRD4575	CRB3620	CRD4572
	22-2	Quick Start Guide	CRB3612	CRB3619	CRB3604
	22-3	Quick Start Guide	CRB3613	Not Used	CRB3605
	22-4	Quick Start Guide	Not Used	Not Used	CRB3606
	22-5	Quick Start Guide	Not Used	Not Used	CRB3607
	22-6	Quick Start Guide	Not Used	Not Used	CRB3608
	22-7	Quick Start Guide	Not Used	Not Used	CRB3609
	22-8	Installation Manual	CRD4576	CRB3621	CRD4573
	22-9	Caution Card	CRP1310	CRP1310	Not Used
*	22-10	Registration Card	CRY1271	Not Used	Not Used
*	22-11	Warranty Card	CRY1276	Not Used	CRY1316
*	22-12	Passport	Not Used	Not Used	CRY1268

Owner's Manual,Installation Manual


Part No.	Language
CRB3612	English
CRB3613	French
CRD4575	English, French
CRD4576	English, French
CRB3619	English
CRB3620	English
CRB3621	English
CRB3604	English
CRB3605	Spanish(Espanol)
CRB3606	German
CRB3607	French
CRB3608	Italian
CRB3609	Dutch
CRD4572	English, Spanish(Espanol), German, French, Italian, Dutch
CRD4573	English, Spanish(Espanol), German, French, Italian, Dutch

CONTENTS OF IM CD-ROM (Operation Manual), CPJ1334, CPJ1335

Part No.	Language
CPJ1334	
* CRB3610	English
* CRB3611	French
* CRB3618	English
CPJ1335	
* CRB3598	English
* CRB3599	Spanish(Espanol)
* CRB3600	German
* CRB3601	French
* CRB3602	Italian
* CRB3603	Dutch

All operation manuals are supplied in PDF files by the CD-ROM.
Regarding the availability of paper manual, contact Pioneer Service representative in your region.

9.2 EXTERIOR (1)

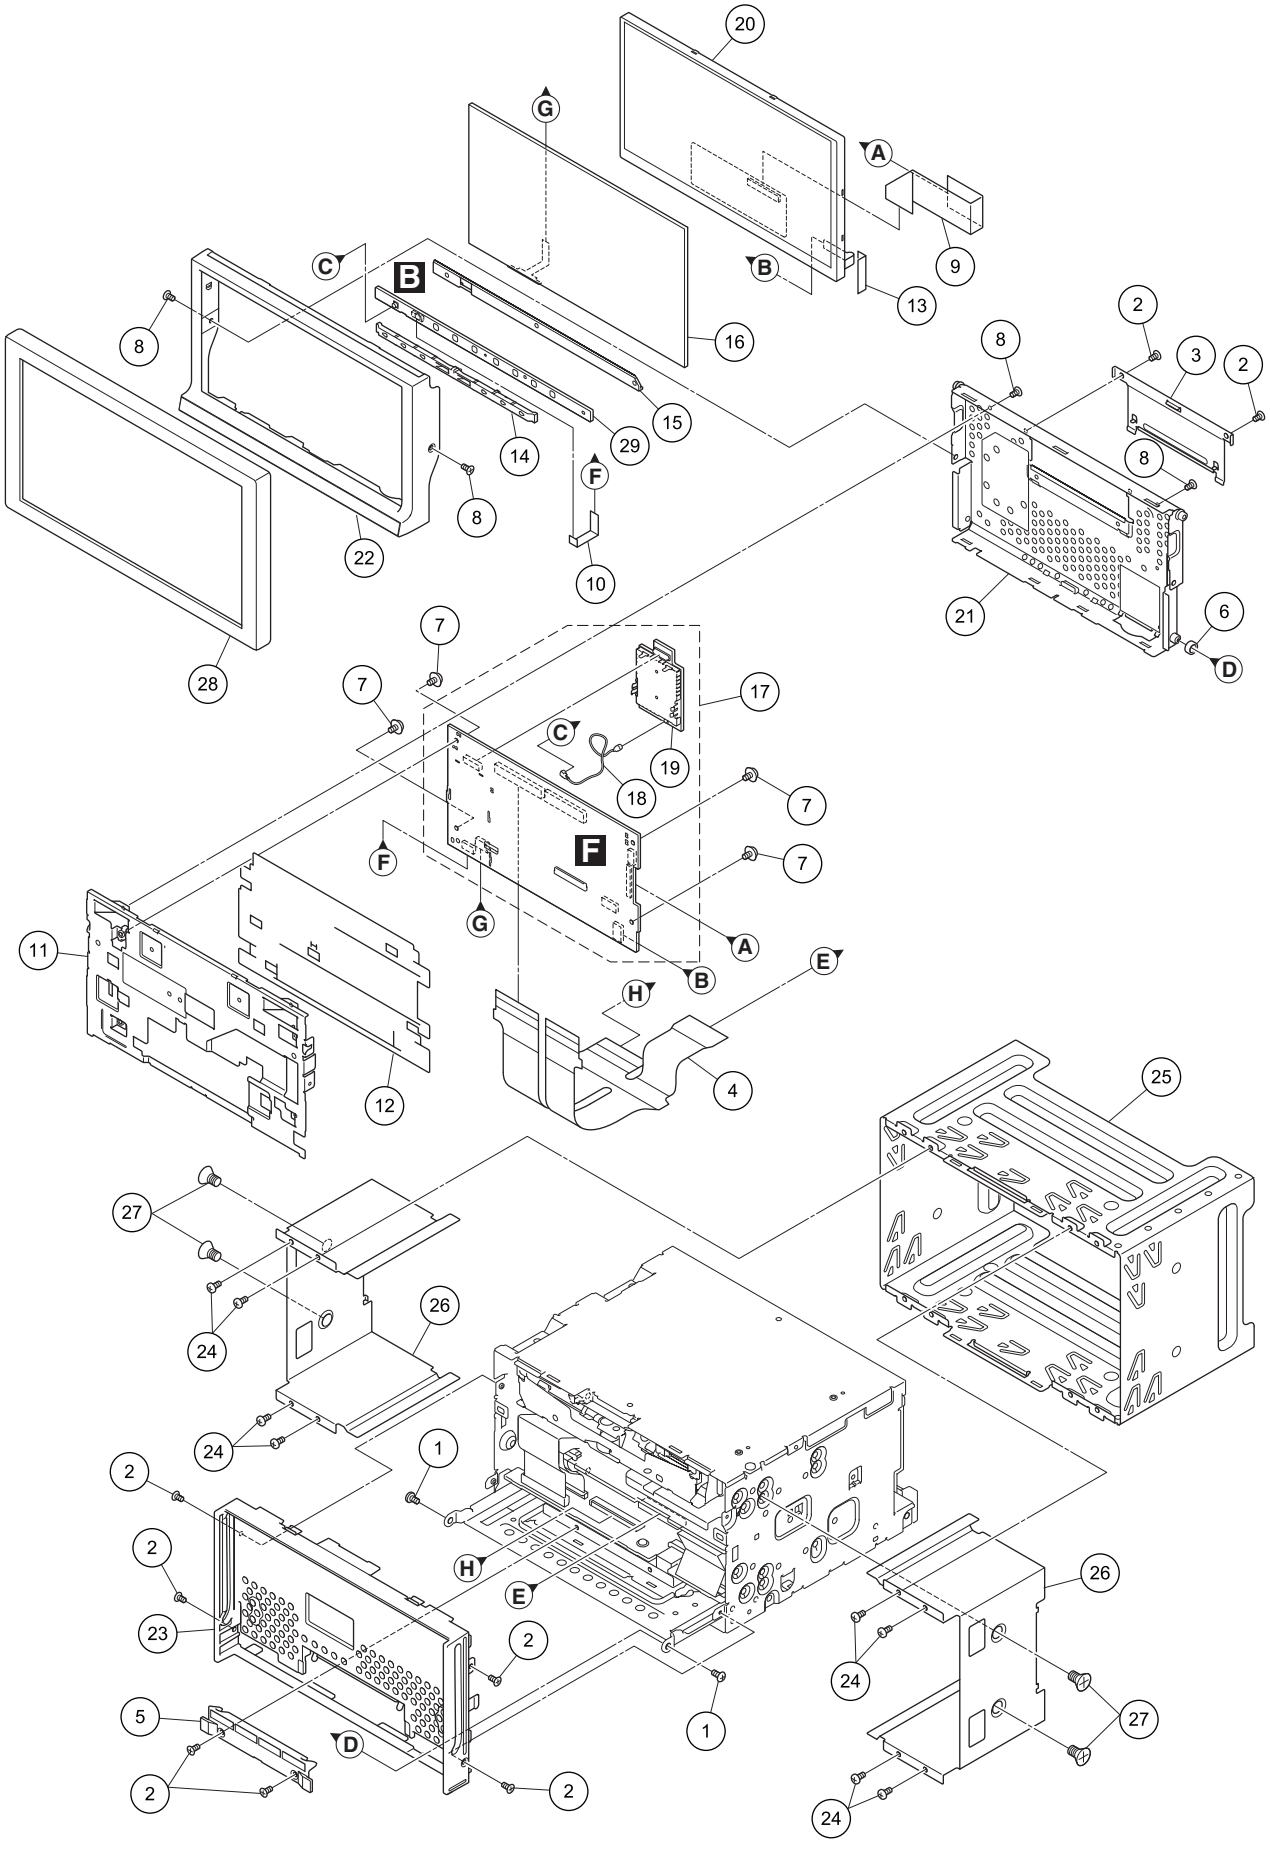

(1) EXTERIOR (1) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	CBA1735
	2	Screw(M2 x 3)	CBA1877
	3	Holder	CND5946
	4	FPC	CNQ4272
	5	Cover	CNU1510
	6	Collar	CNW2038
	7	Screw	AMZ20P040FTC
	8	Screw(M2 x 4)	CBA2265
	9	FFC	CDE9391
	10	FFC	CDE9393
	11	Holder	CND5942
	12	Insulator	CNN3541
	13	Sheet	CNN3728
	14	Lighting Conductor	CNW2110
	15	Spacer	CNW2111
	16	Touch Panel	CSX1165
	17	CC Monitor Unit(Service)	See Contrast table (2)
	18	Cord Assy	CDE9389
	19	Bluetooth Module	CWX4140
	20	LCD Panel	CWX4021
	21	Case Unit	CXE3929
	22	Grille Unit	See Contrast table (2)
	23	Panel Unit	See Contrast table (2)
	24	Screw	See Contrast table (2)
	25	Holder	See Contrast table (2)
	26	Holder	See Contrast table (2)
	27	Screw	See Contrast table (2)
	28	Panel	See Contrast table (2)
	29	AV Unit(Keyboard PCB)	See Contrast table (2)

(2) CONTRAST TABLE

AVIC-Z130BT/XNUC, AVIC-F30BT/XNAU and AVIC-F30BT/XNEU5 are constructed the same except for the following:

Mark	No.	Description	AVIC-Z130BT/XNUC	AVIC-F30BT/XNAU	AVIC-F30BT/XNEU5
	17	CC Monitor Unit(Service)	CXX3396	CXX3399	CXX3397
	22	Grille Unit	CXE4278	CXE4404	CXE4404
	23	Panel Unit	CXE3928	CXE4204	CXE4204
	24	Screw	Not Used	Not Used	BMZ30P060FTC
	25	Holder	Not Used	Not Used	CND4337
	26	Holder	Not Used	Not Used	CND4338
	27	Screw	Not Used	Not Used	CRZ50P090FTC
	28	Panel	Not Used	Not Used	CNS9952
	29	AV Unit(Keyboard PCB)	CWN5677	CWN5680	CWN5678

9.3 EXTERIOR (2)

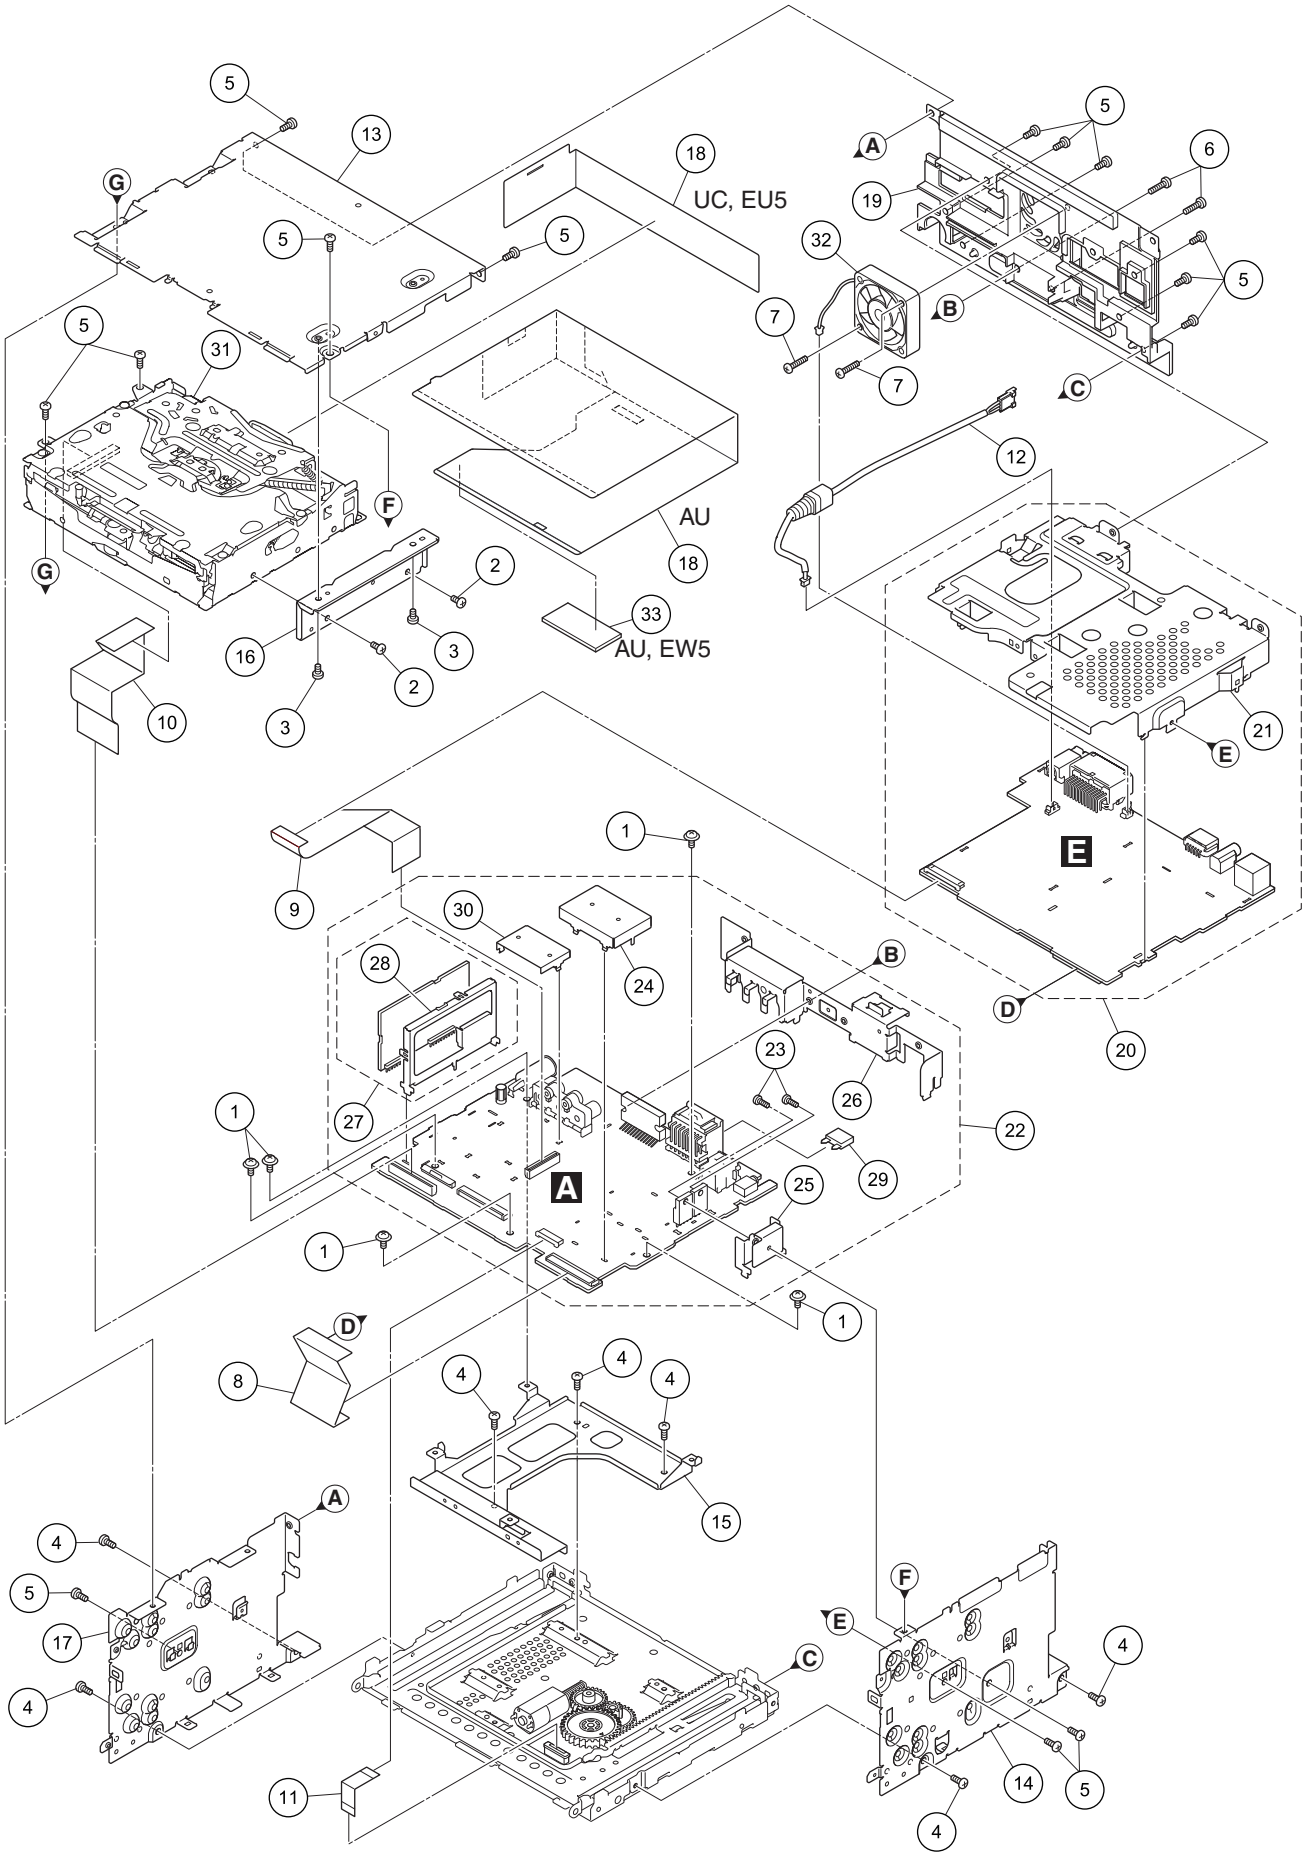

(1) EXTERIOR (2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	ASZ26P060FTC
	2	Screw	BMZ25P040FTB
	3	Screw	BMZ26P040FTC
	4	Screw	BSZ26P050FTB
	5	Screw	BSZ26P060FTC
	6	Screw	BSZ26P160FTC
	7	Screw(M2.6 x 14)	CBA2103
	8	FFC	CDE9384
	9	FFC	CDE9385
	10	FFC	CDE9386
	11	FFC	CDE9387
	12	Cord Assy	See Contrast table (2)
	13	Case	CNB3720
	14	Bracket	CND5924
	15	Bracket	CND5932
	16	Bracket	CND5933
	17	Bracket	See Contrast table (2)
	18	Sheet	See Contrast table (2)
	19	Heat Sink	CNR2097
	20	IF Unit	See Contrast table (2)
	21	Holder	CND5939
	22	AV Unit	See Contrast table (2)
	23	Screw	BSZ26P060FTC
	24	Shield	CND4926
	25	Holder	CND5834
	26	Holder	See Contrast table (2)
	27	WWR C-TUN Unit	See Contrast table (2)
	28	Holder	See Contrast table (2)
⚠	29	Fuse(10 A)	YEK5001
	30	Shield	See Contrast table (2)
	31	DVD Mechanism Module(LS1)	CXK6822
	32	Fan Motor	CXM1394
	33	Cushion	See Contrast table (2)


(2) CONTRAST TABLE

AVIC-Z130BT/XNUC, AVIC-F30BT/XNAU and AVIC-F30BT/XNEU5 are constructed the same except for the following:

Mark	No.	Description	AVIC-Z130BT/XNUC	AVIC-F30BT/XNAU	AVIC-F30BT/XNEU5
	12	Cord Assy	Not Used	Not Used	CDE9388
	17	Bracket	CND6116	CND6116	CND5928
	18	Sheet	CNN3540	CNN3734	CNN3540
	20	IF Unit	CWN5675	CWN5865	CWN5676
	22	AV Unit	CWN5677	CWN5680	CWN5678
	26	Holder	CND5934	CND5935	CND5935
	27	WWR C-TUN Unit	CWE2254	Not Used	Not Used
	28	Holder	CND5830	Not Used	Not Used
	30	Shield	Not Used	CND5938	CND5938
	33	Cushion	Not Used	CNN3843	CNN3843

9.4 EXTERIOR (3)

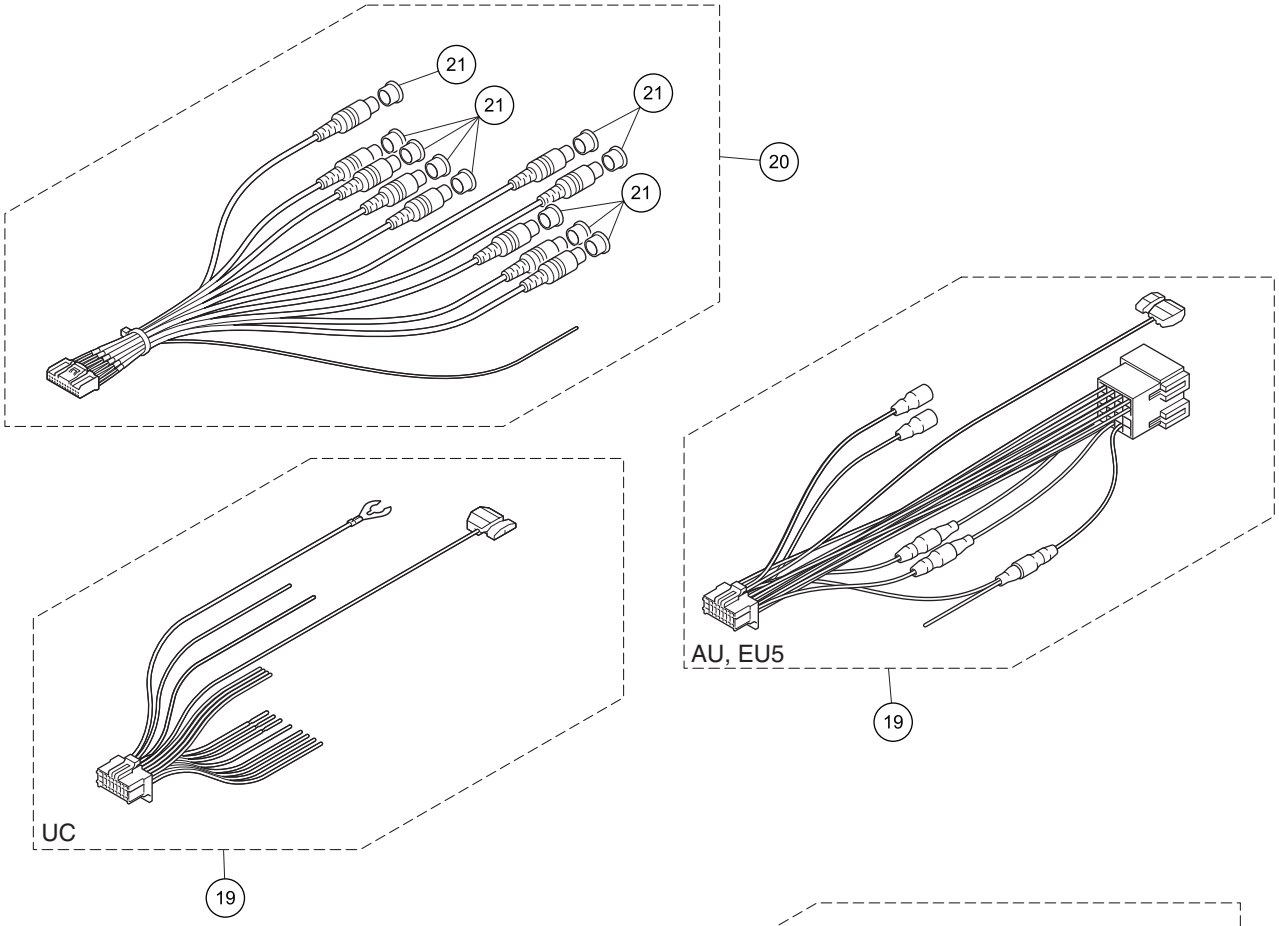


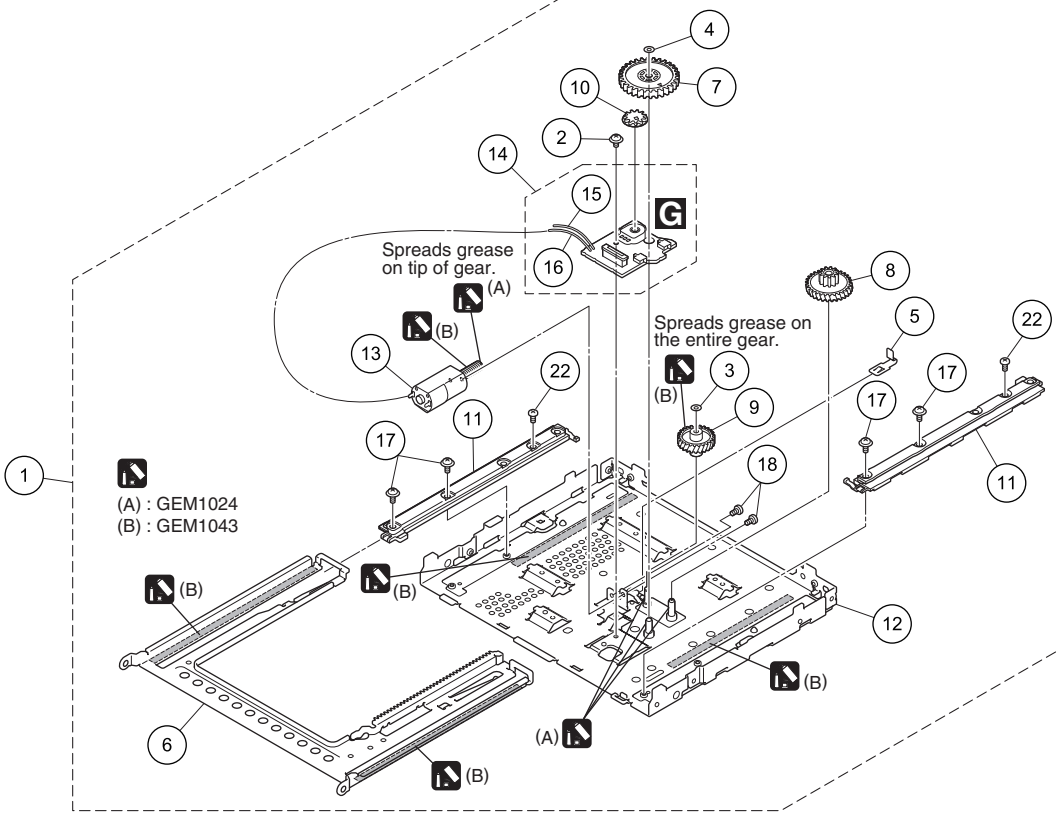

EXTERIOR (3) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Drive Unit	CXE3878
	2	Screw	AMZ26P030FTC
	3	Washer	CBF1039
	4	Washer	CBF1064
	5	Spring	EBL1034
	6	Frame	ENC2001
	7	Gear	ENV1630
	8	Gear	ENV1631
	9	Gear	ENV1632
	10	Gear	ENV1635
	11	Guide	ENV3001
	12	Chassis Unit	EXA4001
	13	Motor Unit	EXA4003
	14	PCB Assy(Service)	EXX2001
*	15	Cord(Green)	CDC1056
*	16	Cord(White)	CDC1057
	17	Screw	IMS26P060FTC
	18	Screw	JFZ20P025FTC
	19	Cord Assy(UC)	CDP1307
		Cord Assy(AU, EU5)	CDP1306
	20	MBL CMPX CONN-CORD	CDP1375
	21	Cap	CNW1490
	22	Screw	EBA2002

9.5 DVD MECHANISM MODULE

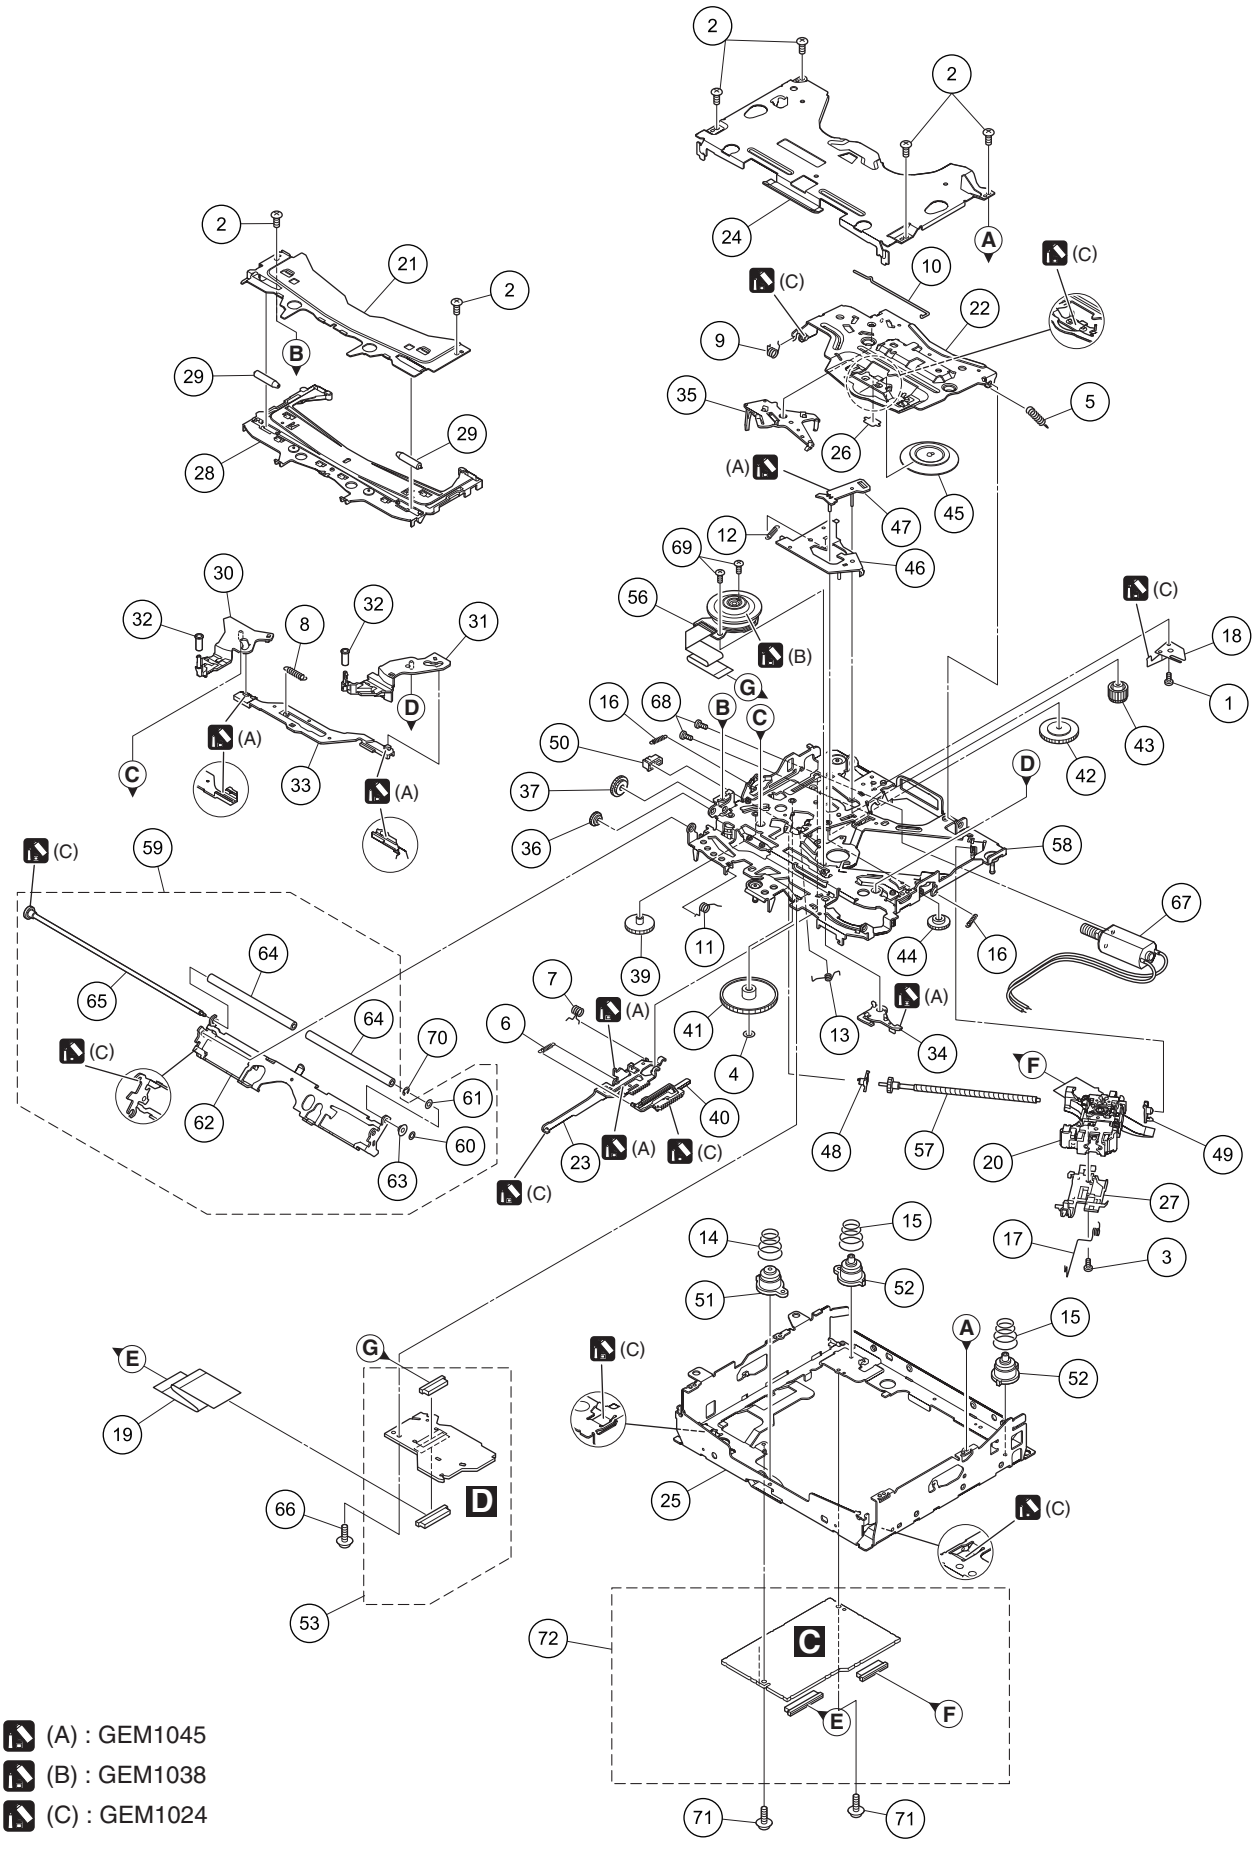



(A) : GEM1045
(B) : GEM1038
(C) : GEM1024

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FTC
	2	Screw	BSZ20P040FTC
	3	Screw(M2 x 4)	CBA1835
	4	Washer	CBF1038
	5	Spring	CBH2860
	6	Spring	CBH3010
	7	Spring	CBH3011
	8	Spring	CBH3012
	9	Spring	CBH3013
	10	Spring	CBH3014
	11	Spring	CBH3015
	12	Spring	CBH3016
	13	Spring	CBH3017
	14	Spring	CBH3018
	15	Spring	CBH3019
	16	Spring	CBH3020
	17	Spring	CBH3030
	18	Plate Spring	CBL1822
	19	Cable	CDE8631
	20	Pickup Unit(Service)	CXX2398
	21	Bracket	CND4553
	22	Arm	CND4555
	23	Lever	CND5398
	24	Frame	CND6203
	25	Frame	CND4558
	26	Sheet	CNN2280
	27	Rack	CNW1170
	28	Guide	CNW1171
	29	Roller	CNW1172
	30	Arm	CNW2157
	31	Arm	CNW1174
	32	Roller	CNW1175
	33	Lever	CNW1176
	34	Arm	CNW1177
	35	Arm	CNW1178
	36	Gear	CNW1180
	37	Gear	CNW1181
	38	•••••	
	39	Gear	CNW1183
	40	Rack	CNW1184
	41	Gear	CNW1185
	42	Gear	CNW1186
	43	Gear	CNW1187
	44	Gear	CNW1188
	45	Clamper	CNW1190
	46	Arm	CNW1191
	47	Arm	CNW1192
	48	Holder	CNW1193
	49	Holder	CNW1194
	50	Holder	CNW1195
	51	Damper	CNW1197
	52	Damper	CNW1198
*	53	Connect PCB	CWX3618
	54	•••••	
	55	•••••	
	56	Motor(SPINDLE)(M2)	EXM1050
	57	Screw Unit	CXC8894
	58	Chassis Unit	CXE4562
	59	Arm Assy	CXC8896
	60	Washer	CBF1037
	61	Washer	CBF1038
	62	Arm	CND4554
	63	Collar	CNV6906
	64	Roller	CNW1196
	65	Gear Unit	CXC8893
	66	Screw	IMS20P030FTC
	67	Motor Unit(LOAD/CRG)(M1)	CXC4026
	68	Screw	JFZ20P025FTC
	69	Screw	JGZ17P022FTC
	70	Washer	YE15FTC
	71	Screw	IMS20P030FTC
	72	DVD Core Unit	YWX5025

SECTION PARTS LIST

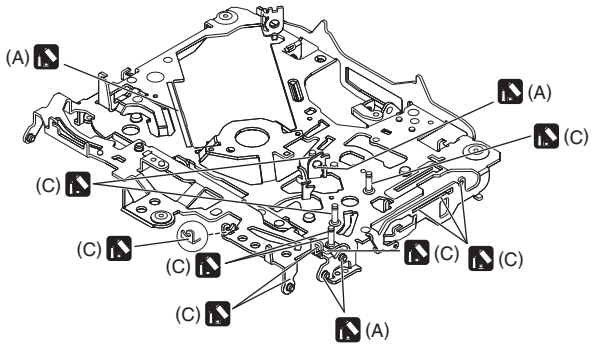

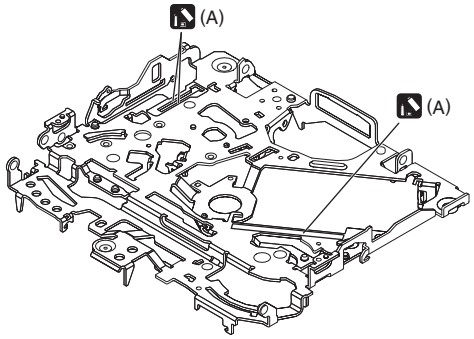

(A) : GEM1045
(B) : GEM1038
(C) : GEM1024

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Unit Number : CWN5677(UC)
: CWN5678(EU5)
: CWN5680(AU)
Unit Name : AV Unit
Unit Number : YWX5025
Unit Name : DVD Core Unit
Unit Number :
Unit Name : Connect PCB
Unit Number : CWN5675(UC)
: CWN5676(EU5)
: CWN5865(AU)
Unit Name : IF Unit
Unit Number : CXX3396(UC)
: CXX3397(EU5)
: CXX3399(AU)
Unit Name : CC Monitor Unit(Service)
Unit Number : EXX2001
Unit Name : PCB Unit(Service)

AV Unit
Consists of
AV PCB
Keyboard PCB

A B
Unit Number : CWN5677(UC)
: CWN5678(EU5)
: CWN5680(AU)
Unit Name : AV Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 1051	(A,89,129) IC	PA2030A
IC 1091	(B,162,109) IC	S-1200B33-M5
IC 1111	(B,155,101) IC	BD3931FP
IC 1161	(A,164,87) IC	NJM2388F84
IC 1171	(A,164,99) IC	NJM2388F84
IC 1201	(B,150,45) IC	LTC3850IGN
IC 1241	(A,149,84) Regulator IC	BD9781HFP
IC 1261	(A,101,79) IC	S-812C56AUA-C3K
IC 1263	(A,136,71) IC	LT3461AES6
IC 1281	(A,121,76) IC	LT3505EDD
IC 1301	(B,72,38) IC	S-80929CNMC-G8Z
IC 1302	(A,95,52) IC(UC)	PEG742A8
	(A,95,52) IC(EU5)	PEG743A8
	(A,95,52) IC(AU)	PEG744A8
IC 1303	(B,108,46) IC	S-93C56BD0I-I8
IC 1471	(B,165,67) IC	NJM2904M
IC 1511	(B,81,64) IC	TC74VHCT541AFK
IC 1621	(A,62,31) IC	NJM2125F
IC 1641	(B,103,83) IC	BA4558RFVM
IC 1691	(B,83,86) IC	AK4223VQ
IC 1761	(B,83,101) IC	PML020A
IC 1831	(B,152,110) IC(UC)	HA12241FP
IC 1921	(B,29,41) Regulator IC(UC)	S-1172B33-E6
IC 1931	(B,30,52) IC(UC)	R1173S001D
IC 1941	(A,30,52) Regulator IC	NJM2846DL3-05
IC 2001	(A,46,74) IC(EU5,AU)	TDA7706
IC 2141	(B,125,48) IC(UC)	LT1912EMSE
IC 2221	(A,105,26) IC	BH30NB1WHFV
IC 2222	(A,106,20) Sensor	CSX1149
IC 2223	(B,107,22) IC	ADS7828E
Q 1011	(B,118,143) Transistor	LSC4081UB
Q 1012	(B,121,143) Transistor	LSC4081UB
Q 1031	(B,132,143) Transistor	LSA1576UB
Q 1051	(B,125,121) Chip Transistor	RN1907
Q 1101	(A,164,108) Transistor	LSA1576UB
Q 1102	(A,161,107) Transistor	LTC114EUB
Q 1121	(A,158,109) Transistor	LSA1576UB
Q 1122	(A,157,112) Transistor	LTC114EUB
Q 1131	(A,153,103) Chip Transistor	HN1C01FU
Q 1141	(B,104,138) Transistor	LTC114EUB

Circuit Symbol and No.		Part No.
Q 1151	(B,56,125) Transistor	LSC4081UB
Q 1181	(A,77,119) Transistor	LTC114EUB
Q 1191	(B,58,120) Chip Transistor	RN4982
Q 1204	(A,157,35) FET	SP8K10S
Q 1205	(A,156,54) FET	SP8K10S
Q 1302	(A,112,60) Transistor	LSA1576UB
Q 1471	(B,161,70) Transistor	LTC114EUB
Q 1472	(B,168,57) Transistor	LTC114EUB
Q 1501	(B,118,53) Transistor	LSC4081UB
Q 1521	(B,45,11) Chip Transistor	RN4982
Q 1522	(B,27,10) Transistor	IMH23
Q 1662	(B,111,85) Chip Transistor	RN4982
Q 1664	(B,111,89) Transistor	DTC623TU
Q 1751	(B,65,66) Chip Transistor	HN1C03FU
Q 1752	(B,60,61) Chip Transistor	RN4982
Q 1753	(B,67,61) Chip Digital Transistor	LTA124EUB
Q 1793	(B,40,118) Chip Transistor	HN1C03FU
Q 1801	(B,35,118) Chip Digital Transistor	LTA124EUB
Q 1831	(B,141,124) Transistor(UC)	LTC114EUB
Q 1832	(B,140,128) Transistor(UC)	LSA1576UB
Q 1861	(B,161,8) Transistor	UMF23N
Q 1862	(B,161,12) Transistor	LSA1576UB
Q 1863	(B,157,10) Transistor	UMF23N
Q 1864	(B,161,14) Transistor	LSA1576UB
Q 1865	(B,156,15) Transistor	LTA114EUB
Q 1866	(B,161,18) Transistor	2SD2114K
Q 2201	(B,133,23) Chip Transistor	RN4982
Q 2202	(A,140,23) Transistor	2SB1184F5
Q 2203	(B,137,18) Chip Transistor	HN1C01FU
Q 2204	(B,126,26) Chip Transistor	UMF21N
Q 2441	(A,160,26) Transistor	IMH23
Q 2442	(A,156,26) Chip Transistor	RN4983
D 1001	(A,120,120) Diode	CRG03
D 1002	(A,120,123) Diode	CRG03
D 1012	(B,119,140) Diode	RKZ5.6KG(B2)
D 1031	(B,135,142) Diode	1SS352
D 1042	(B,127,140) Diode	1SR154-400
D 1051	(B,61,131) Diode	1SR154-400
D 1052	(B,61,128) Diode	1SR154-400
D 1072	(B,118,117) Diode	RF501B2S
D 1131	(A,149,94) Diode	HZU7R5(B3)
D 1132	(A,149,102) Diode	RKZ20KG(B2)
D 1133	(A,149,96) Diode	1SS352
D 1134	(A,149,98) Diode	1SS352
D 1141	(B,111,142) Diode	1SS352
D 1151	(B,54,127) Diode	UDZS6R8(B)
D 1202	(B,158,41) Diode	RB160M-40
D 1203	(B,158,51) Diode	RB160M-40
D 1241	(A,154,75) Diode	RB050L-40
D 1242	(A,95,93) Diode	RB051LA-40
D 1281	(A,119,73) Diode	1SS352
D 1282	(A,126,75) Diode	RB160M-40
D 1301	(A,74,45) Diode	RB501V-40
D 1302	(A,74,43) Diode	RB751S-40
D 1471	(B,172,66) Diode	1SS352
D 1501	(B,121,56) Diode	UDZS8R2(B)
D 1504	(B,99,58) Diode	1SS301
D 1521	(B,23,10) Diode	DAP202U
D 1621	(A,56,28) Diode	UDZS4R3(B)
D 1662	(B,109,86) Diode	RB715Z

Circuit Symbol and No.		Part No.
D 1751	(B,64,61) Diode	DAN202U
D 1861	(B,167,9) Diode	RKZ3.6KG(B2)
D 1931	(B,36,37) Diode(UC)	1SR154-400
D 1932	(B,33,37) Diode(UC)	1SR154-400
D 2001	(A,55,89) Diode(EU5,AU)	KP2311E
D 2002	(A,55,83) Diode(EU5,AU)	KP2311E
D 2141	(A,130,43) Diode(UC)	RB060L-40
D 2203	(B,135,23) Diode	RKZ6.2KG(B2)
D 2204	(B,137,23) Diode	RKZ7.5KG(B2)
D 2205	(A,135,24) Diode	RSX201L-30
D 2223	(B,134,18) Diode	1SS352
D 2901	(A,149,6) Chip LED	NSSM038A-7306
D 2902	(A,24,6) Chip LED	NSSM038A-7306
L 1001	(A,123,106) Choke Coil 600 uH	CTH1221
L 1202	(A,147,53) Choke Coil 4.7 uH	CTH1399
L 1203	(A,148,36) Choke Coil 6.8 uH	CTH1396
L 1241	(A,144,70) Inductor	CTH1254
L 1242	(A,123,84) Choke Coil 10 uH	CTH1398
L 1262	(A,138,79) Choke Coil 22 uH	CTH1426
L 1263	(A,133,80) Ferrite Bead	CTF1528
L 1281	(A,123,69) Inductor	BTH1112
L 1304	(A,100,34) Ferrite Bead	CTF1528
L 1309	(A,111,69) Inductor	LCTAW2R2J2520
L 1522	(B,55,16) Choke Coil 22 uH(EU5)	CTH1400
L 1691	(A,89,93) Chip Coil	LCTAW100J2520
L 1692	(A,86,94) Chip Coil	LCTAW100J2520
L 1831	(B,148,114) Inductor(UC)	LCYC2R2K1608
L 2001	(A,56,86) Chip Coil(EU5,AU)	LCTAWR15J2520
L 2002	(A,48,84) Inductor(EU5,AU)	CTF1786
L 2003	(A,44,86) Inductor(EU5,AU)	CTF1786
L 2004	(A,52,87) Chip Coil(EU5,AU)	LCTAWR27J2520
L 2005	(A,38,86) Inductor(EU5,AU)	CTF1389
L 2008	(A,35,85) Inductor(EU5,AU)	LCTAW220J2520
L 2009	(A,59,79) Inductor(EU5,AU)	CTF1786
L 2010	(A,59,77) Inductor(EU5,AU)	CTF1786
L 2011	(A,34,77) Chip Coil(EU5,AU)	LCTAW470J2520
L 2012	(A,37,72) Inductor(EU5,AU)	CTF1786
L 2014	(A,43,63) Inductor(EU5,AU)	CTF1786
L 2015	(A,55,65) Inductor(EU5,AU)	CTF1786
L 2018	(A,51,63) Inductor(EU5,AU)	CTF1786
L 2020	(A,36,82) Inductor(EU5,AU)	LCYB68NJ1608
L 2021	(A,52,84) Inductor(EU5,AU)	CTF1794
L 2141	(A,129,36) Choke Coil 10 uH(UC)	CTH1398
L 2142	(A,128,55) Inductor(UC)	BTH1110
L 2224	(B,100,26) Chip Ferrite Bead	OTL8019
L 2351	(B,160,115) Chip EMI Filter	DTF1106
L 2901	(A,10,4) Inductor	CTF1754
L 2902	(A,8,3) Inductor	CTF1770
L 2903	(A,6,3) Inductor	CTF1752
X 1301	(A,96,35) Oscillator 15 000 kHz	CSS1781
X 2001	(A,58,70) Oscillator(EU5,AU) 36.48 MHz	CSS1805
F 1201	(A,162,55) EMI Filter	CCG1267
F 1202	(B,135,39) EMI Filter	CCG1267
F 1203	(B,133,51) EMI Filter	CCG1267
F 1241	(A,98,93) EMI Filter	CCG1267
S 2902	(A,138,6) Push Switch	CSG1196
S 2903	(A,95,6) Push Switch	CSG1196
S 2904	(A,35,6) Push Switch	CSG1196
S 2905	(A,78,6) Push Switch	CSG1196
S 2906	(A,49,6) Push Switch	CSG1196
S 2907	(A,64,6) Push Switch	CSG1196

Circuit Symbol and No.		Part No.
S 2908	(A,109,6) Push Switch	CSG1196
S 2909	(A,124,6) Push Switch	CSG1196
⚠ P1201	(A,169,57) Fuse 3.15 A	CEK1259
⚠ P1242	(A,136,16) Fuse 250 mA	CEK1276
⚠ P1243	(A,96,100) Fuse 3.15 A	CEK1259
⚠ P1291	(A,67,31) Fuse 1 A	CEK1254
P 1891	(B,61,115) Poly Switch	MINISMDC075F/24
P 1892	(B,55,115) Poly Switch	MINISMDC075F/24
P 2061	(B,21,96) Surge Protector	IMSA-6802-01Y900
P 2441	(A,165,25) Poly Switch	MINISMDC050F
GY2221	(A,99,20) Sensor	CSX1147
CN1521	(A,33,8) Connector	VKN1620
CN1851	(A,74,66) Connector	VKN1610
CN1951	(A,11,8) Connector(UC)	CKS5561
CN2201	(A,124,22) Connector	CKS6095
CN2301	(A,75,20) Connector	CKS6118
CN2401	(A,151,10) Connector	CKS5732
CN2901	(A,15,6) Connector	CKS5749
CN2902	(B,32,6) Connector	CKS6291
JA1001	(A,121,136) Plug	CKM1550
JA1831	(A,150,125) Connector(UC)	CKS5271
JA1891	(A,48,106) Pin Jack	CKB1100
JA2061	(A,13,117) Antenna Jack	CKX1070
JA2351	(A,166,130) Jack	CKN1018
JA2901	(A,4,6) Antenna	CTX1110
SN2221	(A,110,15) Sensor	S-58LM20A-N4
	WWR C-TUN Unit(UC)	CWE2254
⚠	Fuse(10 A)	YEK5001

RESISTORS

R 1011	(B,118,141)	RS1/16SS473J
R 1012	(B,116,138)	RS1/16SS104J
R 1013	(B,120,141)	RS1/16SS473J
R 1014	(B,123,139)	RS1/16SS472J
R 1015	(B,119,138) 1 kohm	CCN1326
R 1031	(B,130,141)	RS1/16SS102J
R 1032	(B,131,141)	RS1/16SS103J
R 1033	(B,133,141)	RS1/16SS153J
R 1034	(B,136,138) 10 kohm	CCN1327
R 1041	(B,129,137)	RS1/10SR0R0J
R 1071	(B,112,120)	RS1/10SR473J
R 1072	(B,109,117)	RS1/4S0R0J
R 1073	(B,109,112)	RS1/4S0R0J
R 1074	(B,144,95)	RS1/4SA0R0J
R 1091	(B,162,107)	RS1/16SS472J
R 1101	(A,163,110)	RS1/16SS473J
R 1102	(A,162,105)	RS1/16SS222J
R 1103	(A,164,105)	RS1/16SS222J
R 1122	(A,155,112)	RS1/16SS472J
R 1123	(A,155,110)	RS1/16SS472J
R 1131	(A,152,101)	RS1/16SS473J
R 1132	(A,148,104)	RS1/16SS103J
R 1133	(A,153,101)	RS1/10SR473J
R 1134	(A,148,103)	RS1/16SS103J
R 1141	(B,110,142)	RS1/16SS103J
R 1143	(B,115,142) 1 kohm	CCN1326
R 1151	(B,51,125)	RS1/16SS223J
R 1152	(B,50,125)	RS1/16SS223J
R 1153	(B,56,131) 1 kohm	CCN1326

Circuit Symbol and No.		Part No.
R 1154	(B,53,131)	RS1/16SS562J
R 1162	(A,167,81)	RS1/16SS0R0J
R 1172	(A,170,93)	RS1/16SS0R0J
R 1181	(A,75,122)	RS1/16SS103J
R 1182	(A,75,120)	RS1/16SS103J
R 1194	(B,62,63)	RS1/10SR0R0J
R 1201	(B,144,50)	RS1/10SR7502D
R 1202	(B,141,43)	RS1/10SR2402D
R 1203	(B,139,48)	RS1/10SR682J
R 1204	(B,141,46)	RS1/10SR6802D
R 1205	(B,139,41)	RS1/10SR682J
R 1206	(B,144,47)	RS1/10SR1503D
R 1207	(B,144,42)	RS1/10SR1303D
R 1208	(B,143,50)	RS1/10SR0R0J
R 1209	(B,143,40)	RS1/10SR0R0J
R 1210	(B,147,52)	RS1/16SS100J
R 1211	(B,147,37)	RS1/16SS100J
R 1212	(B,148,52)	RS1/16SS100J
R 1213	(B,148,37)	RS1/16SS100J
R 1214	(B,150,51)	RS1/16SS104J
R 1215	(B,149,34)	RS1/16SS0R0J
R 1218	(B,164,38)	RS1/16SS103J
R 1219	(B,153,37)	RS1/16SS0R0J
R 1220	(B,161,41)	RS1/16SS104J
R 1221	(B,157,41)	RS1/10SR100J
R 1222	(B,156,51)	RS1/10SR100J
R 1226	(B,159,45)	RS1/10SR2R2J
R 1227	(A,140,56) 0.027 ohm	CCN1190
R 1228	(A,141,32) 0.027 ohm	CCN1190
R 1229	(A,163,50)	RS1/8SQ0R0J
R 1230	(B,139,36)	RS1/4SA0R0J
R 1231	(B,137,51)	RS1/4SA0R0J
R 1232	(B,135,41)	RS1/4SA221J
R 1233	(B,135,47)	RS1/4SA221J
R 1234	(B,155,41)	RS1/10SR0R0J
R 1235	(B,160,39)	RS1/10SR0R0J
R 1236	(B,160,51)	RS1/10SR0R0J
R 1237	(B,155,51)	RS1/10SR0R0J
R 1241	(B,151,72)	RS1/10SR0R0J
R 1242	(B,153,72)	RS1/10SR6802D
R 1243	(B,153,75)	RS1/10SR3001D
R 1244	(B,152,77)	RS1/10SR1002D
R 1246	(B,150,74)	RS1/10SR333J
R 1247	(B,147,80)	RS1/10SR1003D
R 1248	(B,149,80)	RS1/10SR1002D
R 1250	(B,155,76)	RS1/10SR102J
R 1251	(A,137,15)	RS1/4SA0R0J
R 1261	(A,100,83)	RS1/16SS5601D
R 1262	(A,105,82)	RS1/16SS6801D
R 1267	(B,136,69)	RS1/10SR473J
R 1268	(B,137,71)	RS1/16SS1003D
R 1269	(B,137,72)	RS1/16SS1603D
R 1270	(B,137,73)	RS1/16SS1202D
R 1271	(B,135,74)	RS1/16SS1102D
R 1273	(A,134,65)	RS1/4SA182J
R 1274	(A,131,78)	RS1/10SR0R0J
R 1276	(A,138,65)	RS1/16SS0R0J
R 1281	(B,120,72)	RS1/16SS0R0J
R 1282	(B,120,74)	RS1/10SR1303D
R 1283	(B,120,76)	RS1/16SS2402D

Circuit Symbol and No.		Part No.
R 1285	(B,119,77)	RS1/16SS2002D
R 1286	(B,119,72)	RS1/16SS223J
R 1287	(A,140,112)	RS1/4SA0R0J
R 1288	(A,126,79)	RS1/10SR0R0J
R 1291	(B,61,16)	RS1/4SA0R0J
R 1307	(B,103,41)	RS1/16SS0R0J
R 1308	(A,106,36)	RS1/16SS0R0J
R 1309	(A,111,45)	RS1/16SS471J
R 1310	(B,107,51)	RS1/16SS104J
R 1314	(A,115,43) (UC)	RS1/16SS0R0J
R 1315	(A,111,44) (UC)	RS1/16SS0R0J
R 1317	(A,109,52)	RS1/16SS101J
R 1318	(A,109,53)	RS1/16SS102J
R 1319	(B,109,51)	RS1/16SS104J
R 1320	(B,106,57)	RS1/16SS104J
R 1321	(A,109,58)	RS1/16SS0R0J
R 1326	(B,92,68)	RS1/16SS104J
R 1327	(A,87,70)	RS1/16SS472J
R 1328	(A,88,70)	RS1/16SS472J
R 1329	(A,108,38)	RS1/16SS0R0J
R 1332	(A,79,52)	RS1/16SS0R0J
R 1334	(B,80,43)	RS1/16SS104J
R 1336	(A,108,42)	RS1/16SS0R0J
R 1337	(A,108,45)	RS1/16SS0R0J
R 1338	(A,106,41)	RS1/16SS0R0J
R 1342	(A,105,39)	RS1/16SS561J
R 1344	(A,82,58) (UC)	RS1/16SS0R0J
R 1345	(B,76,61) (UC)	RS1/16SS104J
R 1352	(B,104,40)	RS1/16SS562J
R 1353	(A,105,71)	RS1/16SS562J
R 1354	(B,108,45)	RS1/16SS473J
R 1355	(A,111,51)	RS1/16SS104J
R 1356	(B,108,48)	RS1/16SS473J
R 1357	(A,117,51) (UC)	RS1/16SS472J
R 1358	(A,117,49)	RS1/16SS472J
R 1359	(B,113,60)	RS1/16SS473J
R 1361	(B,106,49)	RS1/16SS473J
R 1362	(A,107,38)	RS1/16SS471J
R 1363	(A,109,38)	RS1/16SS101J
R 1364	(A,114,49)	RS1/16SS681J
R 1365	(A,114,51) (UC)	RS1/16SS101J
R 1366	(A,111,52)	RS1/16SS102J
R 1367	(A,109,56)	RS1/16SS102J
R 1368	(A,109,59)	RS1/16SS102J
R 1369	(A,109,62)	RS1/16SS681J
R 1370	(A,107,63) (UC)	RS1/16SS471J
R 1371	(A,107,42)	RS1/16SS101J
R 1372	(A,111,47)	RS1/16SS471J
R 1373	(B,75,36)	RS1/16SS102J
R 1374	(B,85,37)	RS1/16SS104J
R 1375	(B,97,66)	RS1/16SS473J
R 1376	(B,98,63)	RS1/16SS473J
R 1377	(B,96,68)	RS1/16SS104J
R 1378	(B,74,35)	RS1/16SS104J
R 1379	(B,102,43)	RS1/16SS221J
R 1380	(A,102,67)	RS1/16SS102J
R 1381	(A,101,67)	RS1/16SS102J
R 1382	(A,100,67)	RS1/16SS221J
R 1383	(A,102,34)	RS1/16SS473J
R 1384	(A,112,57)	RS1/10SR473J
R 1385	(A,112,55)	RS1/10SR472J
R 1387	(A,96,67)	RS1/16SS221J
R 1388	(A,85,37)	RS1/16SS122J
R 1389	(B,89,38)	RS1/16SS103J
R 1390	(A,95,39)	RS1/16SS561J
R 1391	(A,83,37)	RS1/16SS473J
R 1392	(A,92,35)	RS1/16SS473J
R 1393	(A,93,35)	RS1/16SS472J
R 1394	(A,86,37)	RS1/16SS122J
R 1395	(A,81,37)	RS1/16SS182J
R 1396	(A,95,67)	RS1/16SS221J
R 1397	(A,93,67)	RS1/16SS681J
R 1398	(A,92,67)	RS1/16SS681J
R 1399	(A,91,67)	RS1/16SS681J
R 1400	(A,90,67)	RS1/16SS681J
R 1401	(B,79,53)	RS1/16SS104J
R 1403	(A,88,67)	RS1/16SS470J
R 1404	(A,87,67)	RS1/16SS470J
R 1405	(A,94,67)	RS1/16SS0R0J
R 1406	(A,83,67)	RS1/16SS102J
R 1407	(A,82,39)	RS1/16SS470J
R 1408	(A,82,67)	RS1/16SS221J
R 1410	(A,83,70)	RS1/16SS104J
R 1411	(A,85,70)	RS1/16SS104J
R 1413	(B,106,51)	RS1/16SS104J
R 1414	(B,90,38)	RS1/16SS473J
R 1415	(A,109,55)	RS1/16SS104J
R 1416	(B,94,66)	RS1/16SS104J
R 1417	(B,111,57)	RS1/16SS104J
R 1418	(B,111,59)	RS1/16SS104J
R 1419	(A,74,46)	RS1/16SS103J
R 1420	(A,75,42)	RS1/16SS103J
R 1421	(A,82,42)	RS1/16SS470J
R 1422	(A,81,42)	RS1/16SS681J
R 1423	(A,80,42)	RS1/16SS681J
R 1424	(B,80,34)	RS1/16SS101J
R 1427	(A,78,47)	RS1/16SS681J
R 1428	(A,78,49)	RS1/16SS0R0J
R 1429	(B,111,47)	RS1/16SS0R0J
R 1430	(A,109,60)	RS1/16SS221J
R 1431	(A,82,57)	RS1/16SS681J
R 1432	(A,80,57)	RS1/16SS681J
R 1433	(A,82,60)	RS1/16SS471J
R 1434	(A,80,62)	RS1/16SS102J
R 1435	(A,80,63)	RS1/16SS102J
R 1436	(B,76,62)	RS1/16SS104J
R 1437	(A,79,38)	RS1/16SS182J
R 1438	(B,77,54)	RS1/16SS124J
R 1439	(A,78,38)	RS1/16SS392J
R 1441	(A,77,38)	RS1/16SS392J
R 1442	(B,79,51)	RS1/16SS104J
R 1445	(B,90,41)	RS1/16SS0R0J
R 1451	(A,78,53)	RS1/16SS0R0J
R 1452	(A,78,45)	RS1/16SS0R0J
R 1453	(A,89,67)	RS1/16SS0R0J
R 1457	(B,87,37)	RS1/16SS101J
R 1458	(B,82,37)	RS1/16SS101J
R 1459	(B,85,54)	RS1/16SS0R0J
R 1460	(B,84,52)	RS1/16SS104J
R 1461	(B,87,33)	RS1/16SS102J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 1462	(B,86,33)	RS1/16SS0R0J	R 1646	(B,110,81)	RS1/10SR332J
R 1471	(B,164,72)	RS1/16SS104J	R 1647	(B,109,81)	RS1/10SR332J
R 1472	(B,169,70)	RS1/16SS473J	R 1648	(B,106,81)	RS1/10SR103J
R 1473	(B,168,70)	RS1/16SS563J	R 1649	(B,108,83)	RS1/10SR103J
R 1474	(B,168,68)	RS1/16SS513J	R 1650	(B,104,78)	RS1/10SR102J
R 1475	(B,169,68)	RS1/16SS104J	R 1651	(B,101,79)	RS1/10SR104J
R 1476	(B,169,65)	RS1/16SS513J	R 1652	(B,101,81)	RS1/10SR104J
R 1477	(B,167,62)	RS1/16SS513J	R 1653	(B,99,81)	RS1/10SR683J
R 1478	(B,170,66)	RS1/16SS102J	R 1654	(B,99,83)	RS1/10SR473J
R 1479	(B,168,63)	RS1/16SS102J	R 1662	(B,106,89)	RS1/10SR821J
R 1480	(B,169,64)	RS1/16SS564J	R 1664	(B,109,89)	RS1/16SS104J
R 1481	(B,170,70)	RS1/16SS202J	R 1667	(B,102,87)	RS1/16SS0R0J
R 1482	(B,170,68)	RS1/16SS822J	R 1689	(B,95,97)	RS1/16SS0R0J
R 1483	(B,171,55)	RS1/16SS203J	R 1690	(B,95,98)	RS1/16SS0R0J
R 1484	(B,171,57)	RS1/16SS333J	R 1691	(B,83,76)	RS1/16SS0R0J
R 1485	(A,162,65)	RS1/10SR0R0J	R 1692	(B,81,76)	RS1/16SS0R0J
R 1486	(B,160,66)	RS1/10SR0R0J	R 1693	(B,84,76)	RS1/16SS0R0J
R 1491	(B,106,42)	RS1/16SS0R0J	R 1694	(B,81,72)	RS1/16SS0R0J
R 1492	(B,106,56)	RS1/16SS0R0J	R 1695	(B,83,72)	RS1/10SR0R0J
R 1493	(B,105,63)	RS1/16SS0R0J	R 1700	(B,67,79)	RS1/10SR0R0J
R 1494	(B,94,64)	RS1/16SS0R0J	R 1701	(B,70,80)	RS1/16SS750J
R 1495	(B,83,42)	RS1/16SS0R0J	R 1703	(B,72,80)	RS1/16SS101J
R 1496	(B,84,49)	RS1/16SS0R0J	R 1704	(B,72,81)	RS1/16SS101J
R 1501	(B,93,56)	RS1/16SS561J	R 1705	(B,70,83)	RS1/16SS75R0F
R 1502	(B,118,56)	RS1/10SR473J	R 1706	(B,72,82)	RS1/16SS101J
R 1503	(B,119,56)	RS1/10SR104J	R 1707	(B,72,84)	RS1/16SS101J
R 1504	(B,76,58)	RS1/16SS0R0J	R 1716	(B,71,89)	RS1/16SS75R0F
R 1505	(B,101,56)	RS1/16SS104J	R 1717	(B,72,87)	RS1/16SS101J
R 1507	(B,79,60)	RS1/16SS0R0J	R 1718	(B,73,89)	RS1/16SS101J
R 1511	(B,87,66)	RS1/16SS104J	R 1719	(B,73,90)	RS1/16SS0R0J
R 1512	(B,89,66)	RS1/16SS104J	R 1720	(B,73,91)	RS1/16SS0R0J
R 1513	(B,87,65)	RS1/16SS104J	R 1722	(B,82,92)	RS1/16SS104J
R 1514	(B,89,64)	RS1/16SS104J	R 1723	(B,84,91)	RS1/16SS0R0J
R 1515	(B,87,64)	RS1/16SS104J	R 1725	(B,89,74)	RS1/16SS223J
R 1516	(B,89,63)	RS1/16SS104J	R 1726	(B,89,75)	RS1/16SS223J
R 1517	(B,89,60)	RS1/16SS104J	R 1727	(B,85,75)	RS1/16SS0R0J
R 1518	(B,85,60)	RS1/16SS224J	R 1728	(B,89,76)	RS1/16SS0R0J
R 1519	(B,79,67)	RS1/16SS0R0J	R 1729	(B,94,78)	RS1/16SS0R0J
R 1521	(B,31,10)	RS1/10SR104J	R 1730	(B,94,80)	RS1/16SS0R0J
R 1522	(B,34,10)	RS1/10SR104J	R 1731	(B,94,79)	RS1/16SS0R0J
R 1523	(B,32,8)	RS1/10SR182J	R 1732	(B,94,83)	RS1/16SS0R0J
R 1524	(B,33,8)	RS1/10SR182J	R 1733	(B,95,81)	RS1/16SS0R0J
R 1525	(B,44,8)	RS1/16SS471J	R 1734	(B,95,84)	RS1/16SS0R0J
R 1526	(A,39,12)	RS1/16SS221J	R 1741	(B,91,91)	RS1/16SS0R0J
R 1527	(A,38,12)	RS1/16SS471J	R 1742	(A,78,78)	RS1/16SS0R0J
R 1528	(A,37,12)	RS1/16SS221J	R 1748	(A,70,93)	RS1/8SQ75R0D
R 1529	(A,36,12)	RS1/16SS221J	R 1749	(A,67,93)	RS1/16SS0R0J
R 1530	(A,35,12)	RS1/16SS471J	R 1750	(B,87,75)	RS1/16SS0R0J
R 1531	(B,52,9) (UC,AU)	RS1/4SA0R0J	R 1755	(B,68,66)	RS1/16SS821J
R 1532	(B,52,24)	RS1/10SR0R0J	R 1756	(B,64,69)	RS1/16SS821J
R 1534	(A,48,16)	RS1/16SS0R0J	R 1757	(B,68,65)	RS1/16SS223J
R 1535	(A,42,13)	RS1/8SQ0R0J	R 1758	(B,62,68)	RS1/16SS223J
R 1601	(B,52,31)	RS1/16SS0R0J	R 1761	(A,92,104)	RS1/10SR0R0J
R 1602	(B,68,31)	RS1/16SS0R0J	R 1762	(B,92,108)	RS1/16SS473J
R 1611	(B,80,74)	RS1/16SS0R0J	R 1764	(A,91,99)	RS1/10SR0R0J
R 1612	(B,84,74)	RS1/16SS0R0J	R 1765	(B,71,105) (UC)	RS1/16SS0R0J
R 1615	(B,80,77)	RS1/16SS0R0J	R 1766	(B,71,109) (UC)	RS1/16SS0R0J
R 1616	(B,79,77)	RS1/16SS0R0J	R 1768	(B,71,107) (UC)	RS1/16SS0R0J
R 1621	(A,56,31)	RS1/16SS102J	R 1771	(B,93,91)	RS1/16SS0R0J
R 1623	(A,56,33)	RS1/10SR0R0J	R 1772	(B,90,93)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 1773	(B,65,64)	RS1/16SS472J
R 1774	(B,66,64)	RS1/16SS472J
R 1775	(B,71,104) (EU5,AU)	RS1/16SS0R0J
R 1776	(B,71,108) (EU5,AU)	RS1/16SS0R0J
R 1777	(B,89,73)	RS1/16SS182J
R 1778	(B,71,106) (EU5,AU)	RS1/16SS0R0J
R 1781	(B,94,81)	RS1/16SS223J
R 1782	(B,94,84)	RS1/16SS223J
R 1783	(B,78,77)	RS1/16SS0R0J
R 1784	(B,74,79)	RS1/16SS0R0J
R 1787	(A,78,83)	RS1/16SS0R0J
R 1788	(A,78,84)	RS1/16SS0R0J
R 1791	(B,86,114)	RS1/16SS182J
R 1792	(B,88,113)	RS1/16SS182J
R 1793	(B,85,114)	RS1/16SS272J
R 1794	(B,89,113)	RS1/16SS272J
R 1795	(B,81,113)	RS1/16SS182J
R 1796	(B,79,113)	RS1/16SS182J
R 1797	(B,83,114)	RS1/16SS272J
R 1798	(B,77,114)	RS1/16SS272J
R 1801	(B,37,117)	RS1/16SS472J
R 1802	(B,37,118)	RS1/16SS472J
R 1803	(B,43,116)	RS1/10SR390J
R 1804	(B,43,118)	RS1/10SR390J
R 1805	(B,41,114)	RS1/10SR223J
R 1806	(B,42,122)	RS1/10SR223J
R 1831	(B,157,109) (UC)	RS1/16SS103J
R 1832	(B,157,112) (UC)	RS1/16SS681J
R 1833	(B,157,111) (UC)	RS1/16SS101J
R 1835	(B,139,125) (UC)	RS1/10SR332J
R 1836	(B,141,128) (UC)	RS1/10SR682J
R 1837	(B,137,126) (UC)	RS1/10SR222J
R 1838	(B,147,111) (UC)	RS1/10SR101J
R 1839	(B,145,110) (UC)	RS1/16SS680J
R 1841	(B,147,108) (UC)	RS1/10SR101J
R 1845	(B,142,118) (UC)	RS1/10SR102J
R 1846	(B,142,116) (UC)	RS1/10SR102J
R 1847	(B,142,119) (UC)	RS1/10SR223J
R 1848	(B,142,115) (UC)	RS1/10SR223J
R 1849	(B,142,121) (UC)	RS1/10SR181J
R 1850	(B,142,114) (UC)	RS1/10SR181J
R 1861	(B,166,7)	RS1/16SS271J
R 1862	(B,165,7)	RS1/16SS152J
R 1863	(B,166,9)	RS1/16SS333J
R 1864	(B,165,10)	RS1/16SS104J
R 1865	(B,164,9)	RS1/16SS104J
R 1866	(B,164,7)	RS1/16SS473J
R 1867	(B,164,12)	RS1/16SS104J
R 1868	(B,165,13)	RS1/16SS104J
R 1869	(B,157,13)	RS1/16SS102J
R 1870	(B,156,7)	RS1/16SS472J
R 1871	(B,157,7)	RS1/16SS104J
R 1872	(B,156,8)	RS1/16SS473J
R 1873	(B,163,15)	RS1/16SS104J
R 1874	(B,163,17)	RS1/16SS104J
R 1875	(B,157,17)	RS1/16SS103J
R 1921	(B,33,42) (UC)	RS1/16SS102J
R 1931	(B,28,47) (UC)	RS1/10SR1001D
R 1932	(B,31,47) (UC)	RS1/10SR1002D

Circuit Symbol and No.		Part No.
R 1934	(B,25,55) (UC)	RS1/16SS102J
R 1941	(B,25,56)	RS1/16SS102J
R 1951	(A,27,66) (UC)	RS1/16SS104J
R 1952	(A,27,68) (UC)	RS1/16SS104J
R 1953	(A,28,66) (UC)	RS1/16SS101J
R 1954	(A,29,68) (UC)	RS1/16SS101J
R 1955	(A,27,62) (UC)	RS1/16SS101J
R 1956	(A,26,62) (UC)	RS1/16SS101J
R 1957	(B,22,33) (UC)	RS1/16SS103J
R 1958	(B,22,34) (UC)	RS1/16SS0R0J
R 1959	(A,28,62) (UC)	RS1/16SS101J
R 1960	(A,27,65) (UC)	RS1/16SS103J
R 1961	(A,27,20) (UC)	RS1/16SS101J
R 1962	(A,27,19) (UC)	RS1/16SS101J
R 1963	(B,22,35) (UC)	RS1/16SS101J
R 1964	(B,22,36) (UC)	RS1/16SS101J
R 1965	(B,24,67) (UC)	RS1/8SQ0R0J
R 1966	(B,28,67) (EU5,AU)	RS1/8SQ0R0J
R 1967	(B,7,9) (UC)	RS1/16SS0R0J
R 1968	(B,9,10) (UC)	RS1/16SS0R0J
R 1969	(B,15,11) (UC)	RS1/16SS0R0J
R 1970	(B,11,11) (UC)	RS1/16SS0R0J
R 1971	(B,12,11) (UC)	RS1/16SS0R0J
R 1972	(B,13,11) (UC)	RS1/16SS0R0J
R 1973	(B,14,11) (UC)	RS1/16SS0R0J
R 1974	(A,27,17) (UC)	RS1/16SS101J
R 1975	(A,27,16) (UC)	RS1/16SS103J
R 1976	(A,27,18) (UC)	RS1/16SS101J
R 1977	(B,26,63)	RS1/8SQ0R0J
R 1978	(B,7,66)	RS1/10SR0R0J
R 1979	(B,8,61) (UC)	RS1/10SR0R0J
R 1986	(A,54,62) (UC)	RS1/16SS0R0J
R 1987	(A,55,61) (UC)	RS1/16SS0R0J
R 1988	(A,56,60) (UC)	RS1/16SS0R0J
R 2001	(A,41,88) (EU5,AU)	RS1/16SS105J
R 2002	(A,58,89) (EU5,AU)	RS1/16SS221J
R 2003	(A,58,83) (EU5,AU)	RS1/16SS751J
R 2004	(A,36,86) (EU5,AU)	RS1/16SS152J
R 2005	(A,39,82) (EU5,AU)	RS1/16SS105J
R 2006	(A,35,80) (EU5,AU)	RS1/16SS471J
R 2007	(A,36,79) (EU5,AU)	RS1/16SS330J
R 2008	(A,34,75) (EU5,AU)	RS1/16SS681J
R 2009	(A,55,72) (EU5,AU)	RS1/16SS0R0J
R 2010	(B,36,66) (EU5,AU)	RS1/4SA8R2J
R 2011	(A,44,89) (EU5,AU)	RS1/10SR0R0J
R 2012	(B,34,66) (EU5,AU)	RS1/4SA8R2J
R 2013	(B,40,88) (EU5,AU)	RS1/10SR0R0J
R 2016	(A,42,66) (EU5,AU)	RS1/16SS101J
R 2017	(A,41,65) (EU5,AU)	RS1/16SS0R0J
R 2018	(A,40,68) (EU5,AU)	RS1/16SS102J
R 2019	(A,40,66) (EU5,AU)	RS1/16SS103J
R 2022	(A,57,62) (EU5,AU)	RS1/16SS0R0J
R 2051	(A,53,63) (EU5,AU)	RS1/16SS680J
R 2075	(B,21,91) (UC)	RS1/10SR0R0J
R 2076	(B,23,92) (EU5,AU)	RS1/10SR0R0J
R 2141	(B,121,49) (UC)	RS1/16SS472J
R 2142	(B,123,50) (UC)	RS1/16SS124J
R 2143	(B,124,44) (UC)	RS1/16SS0R0J
R 2144	(B,120,44) (UC)	RS1/16SS0R0J
R 2145	(B,120,47) (UC)	RS1/16SS4303D
R 2146	(B,119,46) (UC)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 2147	(B,120,48) (UC)	RS1/16SS1003D
R 2148	(B,128,45) (UC)	RS1/16SS104J
R 2150	(A,131,40) (UC)	RS1/10SR2R2J
R 2201	(B,125,14)	RS1/10SR473J
R 2202	(B,121,14)	RS1/10SR473J
R 2203	(A,129,28)	RS1/16SS303J
R 2204	(B,122,16)	RS1/10SR0R0J
R 2205	(B,126,16)	RS1/10SR0R0J
R 2207	(B,138,21)	RS1/16SS271J
R 2209	(B,138,20)	RS1/16SS471J
R 2210	(A,140,17)	RS1/16SS223J
R 2211	(B,140,20)	RS1/4SA151J
R 2212	(B,135,16)	RS1/16SS120J
R 2213	(B,136,16)	RS1/16SS332J
R 2214	(B,129,25)	RS1/16SS102J
R 2215	(B,128,26)	RS1/16SS473J
R 2221	(A,108,33)	RS1/10SR0R0J
R 2222	(A,99,25)	RS1/10SR471J
R 2223	(A,95,20)	RS1/16SS153J
R 2224	(A,97,24)	RS1/16SS153J
R 2225	(A,111,24)	RS1/16SS0R0J
R 2226	(A,111,21)	RS1/16SS0R0J
R 2227	(A,112,18)	RS1/16SS0R0J
R 2228	(B,101,30)	RS1/10SR101J
R 2229	(B,114,19)	RS1/16SS471J
R 2233	(B,112,19)	RS1/16SS101J
R 2237	(B,102,24)	RS1/16SS0R0J
R 2238	(B,102,23)	RS1/16SS0R0J
R 2239	(B,102,22)	RS1/16SS202J
R 2240	(B,102,21)	RS1/16SS202J
R 2242	(B,97,26)	RS1/10SR222J
R 2243	(B,98,26)	RS1/10SR222J
R 2248	(A,102,25)	RS1/16SS0R0J
R 2249	(A,98,15)	RS1/16SS0R0J
R 2250	(A,106,16)	RS1/16SS0R0J
R 2312	(B,77,23)	RS1/16SS101J
R 2313	(B,77,22)	RS1/16SS101J
R 2314	(B,83,26)	RS1/16SS221J
R 2315	(B,72,14)	RS1/16SS331J
R 2352	(B,164,120)	RS1/10SR0R0J
R 2353	(A,165,122)	RS1/10SR0R0J
R 2357	(B,163,116)	RS1/10SR102J
R 2358	(B,162,116)	RS1/10SR102J
R 2402	(B,140,9) (UC)	RS1/16SS0R0J
R 2403	(B,138,9) (UC)	RS1/16SS0R0J
R 2408	(A,145,24) (AU)	RS1/16SS0R0J
R 2407	(B,152,22)	RS1/8SQ0R0J
R 2410	(A,147,26) (AU)	RS1/16SS0R0J
R 2412	(A,162,18)	RS1/16SS0R0J
R 2413	(B,79,17)	RS1/16SS0R0J
R 2440	(A,36,32) (EU5,AU)	RS1/10SR0R0J
R 2442	(A,161,23)	RS1/10SR0R0J
R 2443	(A,21,99) (EU5,AU)	RS1/10SR0R0J
R 2446	(A,55,7)	RS1/16SS0R0J
R 2449	(A,113,10) (UC)	RS1/16SS0R0J
R 2450	(A,113,9) (EU5)	RS1/16SS271J
R 2452	(A,113,7) (AU)	RS1/16SS271J
R 2459	(A,43,34)	RS1/10SR0R0J
R 2901	(A,99,4)	RS1/10SR122J
R 2902	(A,83,8)	RS1/10SR242J
R 2903	(A,60,8)	RS1/10SR122J
R 2904	(A,68,8)	RS1/10SR242J
R 2905	(A,114,7)	RS1/10SR682J

CAPACITORS

C 1001	(A,95,115) 3 300 uF/16 V	CCH1928(P35)
C 1011	(B,123,140)	CKSSYB102K50
C 1051	(B,62,125)	CKSRYB104K50
C 1053	(B,86,115)	CKSRYB474K16
C 1054	(B,89,115)	CKSRYB474K16
C 1055	(B,86,116)	CKSRYB474K16
C 1056	(B,89,116)	CKSRYB474K16
C 1057	(B,82,115)	CKSRYB474K16
C 1058	(B,78,115)	CKSRYB474K16
C 1059	(B,82,116)	CKSRYB474K16
C 1060	(B,78,116)	CKSRYB474K16
C 1061	(B,97,134)	CKSRYB104K50
C 1062	(B,97,136)	CKSRYB104K50
C 1064	(B,92,135)	CKSQYB225K10
C 1065	(B,89,135)	CKSQYB225K10
C 1066	(A,82,117) Capacitor	CEHVW100M16
C 1067	(B,59,125)	CKSRYB104K50
C 1071	(B,111,120)	CKSRYB104K50
C 1072	(A,107,103) 10 000 uF/16 V	CCH1849(P35)
C 1091	(B,159,109)	CKSRYB105K16
C 1092	(B,164,110)	CKSRYB105K16
C 1112	(B,158,108)	CKSSYB103K16
C 1113	(A,155,105)	CKSYB105K35
C 1141	(B,110,139)	CKSRYB105K10
C 1142	(B,112,138)	CKSRYB102K50
C 1151	(B,53,128)	CKSSYB102K50
C 1161	(A,167,66)	CEVW100M16
C 1162	(A,161,84)	CKSSYB102K50
C 1164	(A,161,87)	CKSRYB104K50
C 1171	(A,156,97)	CEVW100M16
C 1172	(A,161,96)	CKSSYB102K50
C 1174	(A,161,99)	CKSRYB104K50
C 1181	(A,66,98) Capacitor	CEVW330M10
C 1201	(B,164,39)	CKSSYB472K25
C 1204	(B,141,49)	CCSRCH821J50
C 1205	(B,141,42)	CCSRCH221J50
C 1206	(B,143,47)	CCSRCH220J50
C 1207	(B,143,42)	CCSRCH330J50
C 1208	(B,141,40)	CCSRCH821J50
C 1209	(B,147,51)	CCSRCH102J50
C 1210	(B,147,39)	CCSRCH102J50
C 1211	(B,144,52)	CKSRYB152K50
C 1212	(B,144,40)	CKSSYB273K16
C 1216	(B,156,46) 4.7 uF	CCG1201
C 1217	(B,155,38)	CKSRYB104K50
C 1218	(B,156,44)	CKSRYB104K50
C 1219	(B,153,51)	CKSRYB104K50
C 1220	(A,160,39) 10 uF	CCG1236
C 1221	(A,157,50) 10 uF	CCG1236
C 1223	(A,138,40) 22 uF	CCG1254
C 1224	(A,140,40) 22 uF	CCG1254
C 1226	(A,140,49) 22 uF	CCG1254
C 1227	(A,138,49) 22 uF	CCG1254
C 1241	(B,158,69) 10 uF	CCG1236

Circuit Symbol and No.			Part No.
C 1243	(B,148,75)		CKSRYB104K50
C 1244	(A,153,69)	100 uF/16 V	CCH1565
C 1246	(B,148,78)		CKSSYB104K16
C 1248	(A,131,85)	100 uF/16 V	CCH1565
C 1249	(A,137,86)	10 uF	CCG1236
C 1250	(A,140,86)	10 uF	CCG1236
C 1261	(A,99,83)		CKSSYB103K25
C 1262	(A,104,82)		CKSSYB104K16
C 1266	(A,137,66)		CKSSYB103K25
C 1267	(B,138,66)		CKSSYB103K25
C 1268	(A,134,70)		CKSSYB473K16
C 1269	(A,135,68)		CKSQYB105K25
C 1270	(B,136,72)		CCSRCH560J50
C 1271	(A,134,77)		CKSYB475K16
C 1272	(A,133,78)		CKSRYB104K16
C 1281	(A,128,67)	22 uF	CCG1254
C 1282	(B,119,75)		CCSSCH221J50
C 1283	(A,122,73)		CKSRYB104K16
C 1285	(B,118,70)		CCSRCH151J50
C 1287	(A,127,77)		CKSYB225K25
C 1302	(B,111,45)		CCSSCH101J50
C 1306	(B,107,40)		CCSSCH221J50
C 1309	(B,106,36)		CCSSCH471J50
C 1310	(B,110,47)		CKSRYB104K16
C 1311	(B,93,67)		CKSSYB104K16
C 1312	(B,89,62)		CCSSCH101J50
C 1313	(B,106,44)		CKSRYB103K50
C 1314	(B,105,54)		CKSRYB103K50
C 1315	(B,99,68)		CKSSYB103K16
C 1316	(B,103,43)		CCSSCH101J50
C 1317	(B,71,41)		CKSRYB153K50
C 1318	(B,103,63)		CKSRYB103K50
C 1319	(A,97,37)		CCSSCH100D50
C 1320	(B,71,36)		CKSRYB104K16
C 1321	(A,97,40)		CKSRYB103K50
C 1322	(A,97,38)		CKSRYB105K10
C 1323	(A,95,37)		CCSSCH100D50
C 1324	(A,77,36)		CKSRYB104K16
C 1325	(B,94,62)		CKSRYB103K50
C 1326	(A,91,37)	4.7 uF	CCG1201
C 1327	(B,86,37)		CCSSCH121J50
C 1328	(B,81,39)		CCSSCH180J50
C 1332	(B,83,37)	(UC)	CCSSCH121J50
	(EU5,AU)		CCSSCH680J50
C 1334	(B,84,44)		CKSRYB103K50
C 1335	(B,83,44)		CKSRYB105K10
C 1336	(B,85,50)		CKSRYB103K50
C 1337	(A,78,51)		CKSSYB104K16
C 1339	(B,89,46)		CKSSYB103K16
C 1345	(A,108,69)		CKSRYB102K50
C 1346	(A,107,66)		CEVW100M16
C 1347	(B,79,38)		CCSSCH180J50
C 1349	(B,91,63)		CKSSYB681K50
C 1471	(B,164,62)		CKSRYB104K16
C 1472	(B,169,66)		CKSSYB102K50
C 1473	(B,169,59)		CKSRYB104K16
C 1474	(B,165,53)		CKSRYB103K50
C 1475	(B,169,55)		CKSRYB823K16
C 1511	(B,81,67)		CKSRYB104K16
C 1521	(B,31,11)		CCSRCH101J50
C 1522	(B,34,11)		CCSRCH101J50
C 1526	(A,46,13)	10 uF	DCH1201
C 1527	(A,45,12)		CKSRYB104K16
C 1531	(A,54,14)	Capacitor	CEVW220M16
C 1622	(A,58,27)		CKSSYB103K16
C 1623	(A,60,32)		CKSQYB106K6R3
C 1624	(A,62,34)		CKSSYB104K16
C 1641	(B,111,77)	10 uF	DCH1201
C 1642	(B,107,78)	10 uF	DCH1201
C 1643	(B,108,81)		CCSRCH221J50
C 1644	(B,106,83)		CCSRCH221J50
C 1645	(B,97,84)		CKSSYB104K16
C 1646	(B,104,79)		CKSRYB103K50
C 1647	(B,99,78)		CKSRYB104K16
C 1648	(B,104,81)		CCSRCH151J50
C 1649	(B,98,82)		CCSRCH151J50
C 1650	(B,105,86)		CKSQYB225K10
C 1691	(B,83,78)		CKSRYB105K10
C 1692	(B,81,78)		CKSRYB105K10
C 1693	(B,84,78)		CKSRYB105K10
C 1694	(A,89,81)		CEVW100M16
C 1695	(A,86,81)		CKSRYB104K50
C 1698	(B,74,80)		CKSRYB104K50
C 1699	(B,74,81)		CKSRYB104K50
C 1700	(B,74,82)		CKSRYB104K50
C 1701	(B,74,84)		CKSRYB104K50
C 1704	(B,74,87)		CKSRYB104K50
C 1705	(B,75,89)		CKSRYB104K50
C 1706	(B,75,90)		CKSRYB104K50
C 1707	(B,75,91)		CKSRYB104K50
C 1708	(B,75,93)		CKSSYB104K16
C 1709	(B,81,92)		CKSSYB104K16
C 1710	(A,76,89)	Capacitor	CEVW330M25
C 1711	(B,80,92)		CKSSYB104K16
C 1713	(B,73,99)		CKSYB475K16
C 1714	(B,93,102)		CKSYB475K16
C 1715	(A,86,91)		CKSSYB104K16
C 1716	(A,89,88)		CEVW100M16
C 1717	(A,82,92)		CKSSYB104K16
C 1718	(A,83,88)		CEVW100M16
C 1721	(B,85,78)		CKSRYB105K10
C 1722	(B,88,78)		CKSRYB105K10
C 1723	(B,91,78)		CKSRYB105K10
C 1724	(B,91,81)		CKSRYB105K10
C 1726	(B,91,80)		CKSRYB105K10
C 1727	(B,91,82)		CKSRYB105K10
C 1728	(B,91,85)		CKSRYB105K10
C 1729	(B,91,83)		CKSRYB105K10
C 1733	(B,90,89)		CKSRYB105K10
C 1734	(B,88,91)		CKSRYB105K10
C 1735	(B,90,91)		CKSRYB105K10
C 1738	(B,86,78)		CKSRYB105K10
C 1751	(B,69,68)	4.7 uF	CCG1201
C 1752	(B,65,70)	4.7 uF	CCG1201
C 1761	(A,91,106)		CKSSYB104K10
C 1763	(A,80,110)		CKSSYB104K10
C 1765	(A,81,106)	10 uF	DCH1165
C 1766	(B,83,108)		CCSSCH100D50
C 1767	(B,81,109)		CKSRYB474K10
C 1769	(B,91,100)		CKSRYB105K10

Circuit Symbol and No.		Part No.
C 1770	(B,92,99)	CKSRYB105K10
C 1771	(B,92,97)	CKSRYB105K10
C 1772	(A,86,96)	CKSSYB104K16
C 1773	(A,86,100) Capacitor	CEVW470M16
C 1774	(B,84,94)	CCSSCH100D50
C 1775	(A,80,96) 10 uF	DCH1165
C 1776	(B,77,95)	CKSRYB105K10
C 1777	(A,77,104)	CKSSYB222K50
C 1778	(B,75,95)	CKSRYB105K10
C 1779	(A,79,98)	CCSQCH223J50
C 1780	(A,79,100)	CCSQCH223J50
C 1781	(B,74,103) (UC)	CKSRYB105K10
C 1782	(B,93,106) (UC)	CKSRYB105K10
C 1783	(B,74,102) (UC)	CKSRYB105K10
C 1784	(B,93,105) (UC)	CKSRYB105K10
C 1785	(B,74,100)	CKSRYB105K10
C 1786	(B,74,105)	CKSRYB105K10
C 1787	(B,74,104)	CKSRYB105K10
C 1788	(B,74,107)	CKSRYB105K10
C 1789	(B,77,108)	CKSQYB225K10
C 1799	(B,47,116) 10 uF	DCH1165
C 1800	(B,47,119) 10 uF	DCH1165
C 1831	(B,150,114) (UC)	CKSSYB472K50
C 1832	(B,148,130) (UC)	CKSRYB104K50
C 1861	(B,165,9)	CCSSCH471J50
C 1921	(B,25,44) 10 uF(UC)	CCG1192
C 1922	(B,28,36) 10 uF(UC)	CCG1192
C 1931	(B,34,54) (UC)	CKSQYB475K6R3
C 1932	(B,26,48) (UC)	CKSQYB475K6R3
C 1933	(A,30,43) Capacitor(UC)	CEVW470M16
C 1941	(B,33,59) 4.7 uF	CCG1222
C 1943	(B,25,59) 4.7 uF	CCG1201
C 1951	(B,24,48) 10 uF(UC)	CCG1192
C 1952	(B,22,44) 10 uF(UC)	CCG1192
C 1953	(A,26,66) (UC)	CKSSYB122K50
C 1954	(A,26,68) (UC)	CKSSYB122K50
C 1957	(A,30,63) (UC)	CKSRYB105K16
C 1958	(A,31,63) (UC)	CKSRYB105K16
C 2001	(A,52,90) (EU5,AU)	CCSSCH330J50
C 2002	(A,41,87) (EU5,AU)	CKSRYB103K50
C 2003	(A,54,88) (EU5,AU)	CCSSCH6R0D50
C 2004	(A,57,88) (EU5,AU)	CKSSYB103K16
C 2005	(A,47,83) (EU5,AU)	CKSSYB104K10
C 2006	(A,44,83) (EU5,AU)	CKSSYB104K10
C 2009	(A,57,84) (EU5,AU)	CKSSYB103K16
C 2010	(A,45,83) (EU5,AU)	CKSSYB104K10
C 2012	(A,58,84) (EU5,AU)	CKSSYB103K16
C 2013	(A,45,82) (EU5,AU)	CKSSYB103K16
C 2014	(A,42,83) (EU5,AU)	CKSSYB103K16
C 2015	(A,41,84) 10 uF(EU5,AU)	CCG1192
C 2016	(A,39,84) (EU5,AU)	CKSSYB223K16
C 2017	(A,51,84) (EU5,AU)	CKSSYB103K16
C 2018	(A,49,85) (EU5,AU)	CKSRYB105K10
C 2019	(A,50,83) (EU5,AU)	CKSSYB223K16
C 2020	(A,53,80) (EU5,AU)	CKSSYB223K16
C 2021	(A,44,64) (EU5,AU)	CCSRCH680J50
C 2022	(A,56,80) (EU5,AU)	CKSRYB224K16
C 2023	(A,56,79) (EU5,AU)	CKSSYB104K10
C 2024	(A,34,81) 10 uF(EU5,AU)	CCG1192
C 2025	(A,55,76) (EU5,AU)	CKSRYB105K10

Circuit Symbol and No.		Part No.
C 2026	(A,37,80) (EU5,AU)	CKSSYB104K10
C 2027	(A,58,75) (EU5,AU)	CKSSYB472K25
C 2028	(A,58,76) (EU5,AU)	CKSSYB472K25
C 2029	(A,34,79) (EU5,AU)	CCSSCH101J50
C 2030	(A,39,81) (EU5,AU)	CKSSYB104K10
C 2031	(A,33,79) (EU5,AU)	CKSSYB103K16
C 2032	(A,58,73) (EU5,AU)	CCSSCH8R0D50
C 2033	(A,55,74) (EU5,AU)	CKSSYB104K10
C 2034	(A,34,74) (EU5,AU)	CCSSCH820J50
C 2036	(A,36,69) (EU5,AU)	CKSRYB474K10
C 2037	(A,58,68) (EU5,AU)	CCSSCH8R0D50
C 2038	(A,39,63) (EU5,AU)	CKSSYB104K10
C 2041	(A,53,66) 2.2 uF(EU5,AU)	CCG1205
C 2042	(A,40,63) (EU5,AU)	CKSSYB104K10
C 2045	(A,52,65) (EU5,AU)	CKSSYB104K10
C 2046	(A,44,66) (EU5,AU)	CKSSYB104K10
C 2047	(A,50,65) 2.2 uF(EU5,AU)	CCG1205
C 2048	(A,49,66) (EU5,AU)	CKSSYB104K10
C 2049	(A,38,68) (EU5,AU)	CKSSYB102K50
C 2050	(A,46,83) (EU5,AU)	CKSSYB223K16
C 2051	(A,38,82) (EU5,AU)	CCSSCJ3R0C50
C 2074	(B,20,93) (UC)	CCSSCK2R0C50
C 2101	(B,46,33)	CKSRYB103K50
C 2141	(A,120,37) 47 uF(UC)	CCG1256
C 2142	(B,121,51) (UC)	CKSSYB102K50
C 2143	(B,130,48) (UC)	CKSRYB474K16
C 2144	(A,127,46) 10 uF(UC)	CCG1236
C 2145	(B,120,46) (UC)	CCSSCH330J50
C 2147	(B,127,45) (UC)	CKSSYB104K10
C 2149	(A,128,40) (UC)	CKSRYB222K50
C 2201	(A,119,29)	CKSRYB105K10
C 2202	(A,115,30) 100 uF/16 V	CCH1565
C 2203	(B,137,16)	CKSSYB153K16
C 2221	(A,107,29)	CKSQYB106K6R3
C 2222	(A,106,28)	CKSSYB104K10
C 2223	(A,105,28)	CKSSYB104K10
C 2224	(A,104,30)	CKSQYB106K6R3
C 2226	(A,102,23)	CKSQYB106K6R3
C 2227	(A,104,23)	CKSSYB104K10
C 2228	(A,98,16)	CKSSYB104K10
C 2230	(A,108,15)	CKSSYB104K10
C 2232	(A,111,23) 2.2 uF	CCG1205
C 2235	(B,112,26)	CKSSYB104K10
C 2239	(B,116,23)	CKSSYB104K10
C 2240	(B,115,21)	CKSSYB105K6R3
C 2241	(B,116,19)	CKSSYB105K6R3
C 2242	(B,113,19)	CKSSYB104K10
C 2245	(B,100,19)	CKSRYB104K16
C 2246	(B,103,26)	CKSRYB104K16
C 2247	(B,101,26)	CKSQYB106K6R3
C 2248	(B,102,20)	CKSSYB104K10
C 2360	(B,161,119) 22 uF	DCH1256
C 2663	(B,160,121) 47 uF	CCG1251
C 2901	(A,153,5)	CKSRYB104K50
C 2902	(A,153,7)	CKSRYB104K50
C 2903	(A,20,7)	CKSRYB104K50
C 2904	(A,22,4)	CKSRYB104K50

C

Unit Number : YWX5025
Unit Name : DVD Core Unit

MISCELLANEOUS

Circuit Symbol and No.			Part No.
IC 1002	(B,21,41)	Regulator IC	S-1133B50-U5
IC 1003	(B,35,23)	IC	S-1200B50-M5
IC 1004	(B,25,11)	IC	NJM2885DL1-33
IC 1005	(B,19,21)	IC	R1232D121B
IC 1201	(A,15,29)	IC	BD8231EFV
*IC1401	(B,63,36)	Flash ROM Unit	CWW3159
*IC1402	(B,50,36)	Flash ROM Unit	CWW3160
IC 1480	(B,59,13)	SDRAM(64M)	IS42S16400F-7TL
IC 1501	(A,60,20)	IC	MN2DS0018MA
IC 1801	(B,37,16)	D/A Converter	PCM1753DBQ
Q 1101	(A,35,39)	Transistor	LSC4081UB
Q 1102	(A,46,42)	Transistor	LSC4081UB
Q 1103	(A,38,45)	Transistor	2SB1132
Q 1104	(A,45,49)	Transistor	2SB1132
L 1003	(B,22,26)	Inductor	CTF1677
L 1004	(B,14,17)	Inductor	CTF1678
L 1512	(A,57,5)	Inductor	CTF1743
L 1902	(B,5,8)	Inductor	CTF1487
L 1903	(B,12,11)	Inductor	CTF1558
L 1904	(B,46,19)	Inductor	CTF1473
X 1501	(B,43,7)	Oscillator 27.000 MHz	CSS1768
EF1001	(B,5,12)	Chip EMI Filter	DTF1106
EF1002	(B,11,13)	Chip EMI Filter	DTL1106
CN1101	(A,66,49)	Connector	CKS5775
CN1201	(A,16,44)	Connector	CKS6003
CN1901	(A,21,7)	Connector	CKS6025

RESISTORS

Circuit Symbol and No.		Part No.
R 1002	(B,18,27)	RS1/16SS101J
R 1004	(A,29,27)	RS1/16SS4702D
R 1007	(A,29,26)	RS1/16SS6801D
R 1019	(B,15,9)	RS1/16SS101J
R 1021	(A,27,15)	RS1/16SS0R0J
R 1025	(B,19,11)	RS1/16SS101J
R 1027	(A,27,19)	RS1/16SS101J
R 1101	(A,35,36)	RS1/16SS104J
R 1102	(A,43,42)	RS1/16SS104J
R 1103	(A,34,41)	RS1/16SS391J
R 1104	(A,36,36)	RS1/16SS511J
R 1105	(A,42,44)	RS1/16SS4300F
R 1106	(A,45,39)	RS1/16SS5600F
R 1109	(A,34,43)	RS1/16SS3R3J
R 1110	(A,41,43)	RS1/16SS3R3J
R 1111	(A,38,39)	RS1/10SR1R5J
R 1112	(A,38,38)	RS1/10SR1R5J
R 1113	(A,49,46)	RS1/10SR3R3J
R 1114	(A,48,46)	RS1/10SR3R9J
R 1115	(A,41,38)	RS1/10SR1R5J
R 1116	(A,41,39)	RS1/10SR1R5J
R 1117	(A,48,43)	RS1/10SR3R9J
R 1118	(A,49,43)	RS1/10SR3R9J
R 1201	(A,16,36)	RS1/16SS221J
R 1202	(A,17,35)	RS1/16SS221J
R 1203	(A,22,35)	RS1/16SS103J
R 1204	(A,19,35)	RS1/16SS153J
R 1212	(A,7,36)	RS1/16SS271J
R 1213	(B,8,29)	RS1/16SS1R0J
R 1214	(B,8,27)	RS1/16SS1R0J
R 1215	(B,8,28)	RS1/16SS1R0J
R 1216	(B,8,24)	RS1/16SS1R0J
R 1217	(B,8,25)	RS1/16SS1R0J
R 1218	(B,8,26)	RS1/16SS1R0J
R 1222	(B,26,39)	RS1/16SS271J
R 1300	(B,39,24)	RS1/16SS0R0J
R 1401	(B,63,49)	RS1/16SS221J
R 1402	(B,70,27)	RS1/16SS104J
R 1405	(B,56,24)	RS1/16SS104J
R 1406	(B,54,25)	RS1/16SS104J
R 1480	(B,52,21)	RAB4CQ560J
R 1481	(B,56,21)	RAB4CQ560J
R 1482	(B,61,21)	RAB4CQ560J
R 1483	(B,64,21)	RAB4CQ560J
R 1484	(B,67,21)	RAB4CQ560J
R 1485	(B,50,5)	RAB4CQ560J
R 1486	(B,55,5)	RAB4CQ560J
R 1487	(B,64,5)	RAB4CQ560J
R 1488	(B,68,5)	RAB4CQ560J
R 1489	(B,59,5)	RS1/16SS560J
R 1490	(B,50,21)	RS1/16SS560J
R 1501	(B,46,7)	RS1/16SS122J
R 1503	(B,45,8)	RS1/16SS105J
R 1504	(B,45,13)	RS1/16SS120J
R 1505	(A,43,13)	RS1/16SS101J
R 1506	(A,37,14)	RS1/16SS101J
R 1507	(A,44,14)	RS1/16SS101J
R 1508	(A,43,15)	RS1/16SS221J
R 1509	(A,63,35)	RS1/16SS102J
R 1510	(A,64,35)	RS1/16SS102J
R 1511	(B,46,13)	RS1/16S0R0J
R 1512	(A,58,5)	RS1/16SS101J
R 1513	(A,66,35)	RS1/16SS103J
R 1514	(A,68,35)	RS1/16SS183J
R 1516	(A,65,36)	RS1/16SS103J
R 1517	(A,76,16)	RS1/16SS103J
R 1518	(A,74,24)	RS1/16SS103J
R 1519	(A,70,34)	RS1/16SS102J
R 1522	(A,65,38)	RS1/16SS104J
R 1523	(A,66,37)	RS1/16SS221J
R 1524	(A,64,37)	RS1/16SS472J
R 1525	(A,71,34)	RS1/16SS103J
R 1526	(A,67,34)	RS1/16SS103J
R 1527	(B,77,29)	RS1/16SS682J
R 1528	(A,78,20)	RS1/16SS103J
R 1529	(A,76,18)	RS1/16SS103J
R 1530	(A,77,20)	RS1/16SS103J
R 1531	(A,75,24)	RS1/16SS103J
R 1533	(A,75,29)	RS1/16SS104J
R 1534	(A,78,30)	RS1/16SS221J
R 1535	(B,70,34)	RS1/16SS104J
R 1536	(A,78,31)	RS1/16SS104J
R 1537	(A,73,35)	RS1/16SS104J
R 1538	(A,61,4)	RS1/16SS104J
R 1539	(A,77,23)	RS1/16SS104J
R 1540	(A,73,32)	RS1/16SS221J

Circuit Symbol and No.			Part No.
R 1541	(A,75,32)		RS1/16SS221J
R 1542	(A,77,29)		RS1/16SS103J
R 1544	(B,77,28)		RS1/16SS181J
R 1546	(B,75,29)		RS1/16SS682J
R 1601	(A,42,25)		RS1/16SS123J
R 1602	(A,44,25)		RS1/16SS123J
R 1603	(A,43,30)		RN1/16SE1002D
R 1604	(A,50,35)		RS1/16SS105J
R 1605	(A,49,37)		RS1/16SS105J
R 1670	(A,34,21)		RS1/16SS1002D
R 1671	(A,36,21)		RS1/16SS2402D
R 1672	(A,45,19)		RS1/16SS2000D
R 1674	(A,45,20)		RS1/16SS3002D
R 1801	(B,35,6)		RS1/16SS104J
R 1802	(B,33,6)		RS1/16SS104J
R 1803	(B,35,11)		RS1/16SS821J
R 1804	(B,34,11)		RS1/16SS821J

CAPACITORS

C 1001	(B,36,21)		CKSRYB105K10
C 1003	(B,18,44)		CKSSYB104K16
C 1004	(B,24,40)	4.7 uF	CCG1201
C 1005	(B,32,23)		CKSRYB105K16
C 1008	(B,20,31)	10 uF	DCH1201
C 1009	(B,18,31)	10 uF	DCH1201
C 1010	(B,26,18)		CKSQYB225K10
C 1011	(B,22,18)		CKSRYB105K10
C 1013	(B,15,25)	10 uF	DCH1201
C 1014	(B,13,25)	10 uF	DCH1201
C 1015	(B,7,8)		CKSSYB102K50
C 1016	(B,12,10)		CKSSYB102K50
C 1018	(A,28,28)		CKSSYB104K10
C 1019	(A,10,17)		CKSSYB104K10
C 1021	(B,34,4)		CCSRCH681J50
C 1022	(A,23,21)		CCSRCH681J50
C 1101	(B,31,40)	10 uF	CCG1192
C 1104	(A,34,42)		CKSSYB104K10
C 1105	(A,42,45)		CKSSYB104K10
C 1106	(A,37,48)		CKSSYB103K16
C 1107	(A,41,49)		CKSSYB103K16
C 1108	(A,74,42)		CKSSYB103K16
C 1109	(A,56,41)		CKSRYB224K16
C 1110	(A,71,42)		CKSSYB103K16
C 1111	(A,61,39)		CKSRYB224K16
C 1112	(B,40,39)		CKSYB226K6R3
C 1113	(B,36,38)		CKSYB226K6R3
C 1201	(B,12,34)		CEVW101M16
C 1204	(A,8,24)		CKSSYB222K50
C 1205	(A,13,23)		CKSSYB104K16
C 1207	(A,22,25)		CKSSYB104K16
C 1208	(A,15,36)		CKSSYB103K16
C 1209	(B,10,25)		CKSSYB104K16
C 1210	(B,6,23)		CKSSYB104K16
C 1211	(B,9,22)		CKSYB475K16
C 1401	(B,63,48)		CKSSYB103K16
C 1403	(B,69,23)		CKSSYB104K10
C 1404	(B,58,25)		CKSQYB475K6R3
C 1408	(B,47,25)		CKSSYB104K10
C 1409	(B,47,23)		CKSQYB475K6R3

Circuit Symbol and No.		Part No.
C 1480	(B,47,21)	CKSSYB104K10
C 1481	(B,49,23)	CKSSYB104K10
C 1482	(B,54,21)	CKSSYB104K10
C 1484	(B,59,20)	CKSSYB104K10
C 1485	(B,69,21)	CKSSYB104K10
C 1487	(B,58,4)	CKSSYB104K10
C 1488	(B,52,5)	CKSSYB104K10
C 1489	(B,45,20)	CKSQYB106K6R3
C 1490	(B,45,23)	CKSSYB102K50
C 1501	(B,72,9)	CKSQYB106K6R3
C 1502	(A,35,32)	CKSQYB106K6R3
C 1503	(A,60,4)	CKSSYB104K10
C 1504	(A,51,5)	CKSSYB104K10
C 1505	(A,53,5)	CKSSYB104K10
C 1506	(A,55,5)	CKSSYB104K10
C 1507	(A,62,5)	CKSSYB104K10
C 1508	(A,66,5)	CKSSYB104K10
C 1509	(A,69,5)	CKSSYB104K10
C 1510	(B,46,5)	CCSSCH120J50
C 1511	(A,46,9)	CKSSYB104K10
C 1512	(B,43,10)	CCSSCH100D50
C 1513	(B,74,12)	CKSSYB104K10
C 1514	(A,46,13)	CKSSYB104K10
C 1515	(A,45,15)	CKSSYB104K10
C 1516	(A,75,15)	CKSSYB104K10
C 1517	(A,74,16)	CKSSYB104K10
C 1518	(A,75,22)	CKSSYB104K10
C 1519	(A,74,26)	CKSSYB104K10
C 1520	(A,75,30)	CKSSYB104K10
C 1521	(A,60,37)	CKSSYB104K10
C 1522	(A,65,34)	CKSSYB104K10
C 1523	(A,68,37)	CKSSYB104K10
C 1524	(A,69,37)	CKSSYB473K16
C 1526	(A,68,37)	CKSSYB103K16
C 1528	(A,78,29)	CCSSCH471J50
C 1601	(A,44,29)	CKSSYB103K16
C 1602	(A,42,24)	CCSSCH101J50
C 1603	(A,44,27)	CCSSCH101J50
C 1604	(A,41,27)	CCSSCH680J50
C 1605	(A,43,27)	CCSSCH680J50
C 1606	(A,41,23)	CKSSYB104K10
C 1607	(A,41,35)	CKSQYB106K6R3
C 1608	(A,43,36)	CKSRYB105K10
C 1609	(A,48,35)	CKSSYB104K10
C 1610	(A,50,37)	CKSSYB104K10
C 1611	(A,51,37)	CKSSYB104K10
C 1612	(A,52,34)	CKSSYB104K10
C 1613	(A,52,37)	CKSSYB104K10
C 1614	(A,53,34)	CKSSYB104K10
C 1615	(A,54,34)	CKSSYB104K10
C 1616	(A,54,37)	CKSSYB104K10
C 1617	(A,54,38)	CKSSYB104K10
C 1618	(A,56,34)	CCSSCH101J50
C 1619	(A,57,34)	CKSSYB562K25
C 1620	(A,58,34)	CKSSYB224K6R3
C 1621	(A,57,37)	CKSSYB224K6R3
C 1622	(A,59,35)	CKSSYB333K16
C 1623	(A,45,35)	CKSRYB105K10
C 1624	(A,58,37)	CKSSYB104K10
C 1625	(A,56,37)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 1671	(A,44,17)	CKSSYB104K10
C 1672	(A,45,18)	CKSSYB104K10
C 1673	(A,45,22)	CKSSYB104K10
C 1674	(A,43,21)	CKSSYB104K10
C 1676	(A,38,22)	CKSRYB105K10
C 1801	(B,34,8)	CKSQYB475K6R3
C 1802	(B,32,8)	CKSQYB475K6R3
C 1803	(B,36,8)	CCSRCH182J50
C 1804	(B,31,7)	CCSRCH182J50
C 1805	(B,32,19)	CKSSYB104K10
C 1806	(B,39,9) 10 uF	CCG1192
C 1809	(B,43,16)	CKSSYB104K10
C 1934	(B,42,29)	CCSRCH680J50
C 1954	(B,43,49)	CCSRCH470J50

D

Unit Number :
Unit Name : Connect PCB

MISCELLANEOUS

S 101	(B,52,38)	Spring Switch(HOME)	CSN1081
S 102	(B,12,23)	Spring Switch(DSCSNS)	CSN1081
S 103	(B,22,10)	Spring Switch(8SNS)	CSN1081
CN101	(B,41,25)	Connector	CKS6063
CN701	(A,40,25)	Connector	CKS6003

RESISTORS

R 101	(B,53,27)	RS1/16S101J
R 102	(B,16,29)	RS1/16S101J
R 103	(B,16,11)	RS1/16S101J

CAPACITORS

C 101	(B,51,23)	CKSRYB104K50

E

Unit Number : CWN5675(UC)
: CWN5676(EU5)
: CWN5865(AU)
Unit Name : IF Unit

MISCELLANEOUS

IC 101	(A,165,19)	IC(AU)	RS-470
IC 151	(A,15,99)	IC	GRF3I-0336S
IC 152	(B,14,108)	IC	BA10358F
IC 153	(B,25,94)	IC	BU33TA2WNVX
IC 187	(A,28,88)	IC	TC7SH08FUS1
IC 191	(A,31,88)	IC	TC7SH08FUS1
IC 195	(A,33,88)	IC	TC7SH08FUS1
IC 221	(A,168,91)	IC	TC7SET04FUS1
IC 223	(A,164,91)	L-MOS And Gate	TC7SET08FUS1
IC 251	(A,119,103)	Logic IC	TC7WH126FK
IC 252	(A,110,108)	IC	TPD1018F
IC 301	(A,54,79)	L-MOS And Gate(EU5)	TC7SET08FUS1
IC 303	(A,48,83)	IC(EU5)	TC7SH08FUS1
IC 381	(A,152,77)	IC	BD9008F
IC 382	(A,161,94)	IC	BD82001FVJ
Q 151	(B,26,105)	Transistor	2SB1132
Q 201	(A,85,96)	Transistor	LTC114EUB
Q 202	(A,82,96)	Transistor	2SA1587
Q 204	(A,88,87)	Transistor	LTC143EUB
Q 205	(A,82,105)	Transistor	2SD1760F5
Q 261	(B,50,97)	Chip Transistor	HN1C03FU
Q 262	(B,44,98)	Chip Transistor	HN1C03FU
Q 263	(A,63,90)	Transistor(UC)	LSA1576UB
Q 264	(B,43,92)	Chip Digital Transistor	LTA124EUB
D 202	(A,89,94)	Diode	RB551V-30
D 203	(A,88,91)	Diode	RKZ6.8KG(B2)
D 204	(A,86,113)	Diode	RKZ11KG(B2)
D 233	(A,159,113)	Diode	DZ2S180C
D 234	(A,159,112)	Diode	DZ2S180C
D 235	(A,165,113)	Diode	DZ2S180C
D 236	(B,164,112)	Diode	RSB12JS2
D 237	(A,162,101)	Diode	1SR154-400
D 266	(A,67,96)	Diode	1SS352
D 271	(B,36,105)	Diode	DZ2S180C
D 272	(B,39,123)	Diode	DZ2S180C
D 301	(A,44,83)	Diode(EU5)	1SS352
D 381	(A,159,71)	Diode	RB055LA-40
L 151	(B,20,99)	Inductor	CTF1736
L 152	(A,22,97)	Inductor	CTF1736
L 153	(A,20,98)	Inductor	CTF1736
L 157	(A,22,112)	Inductor	LCYC1R0K2125
L 158	(A,20,108)	Inductor	CTF1736
L 211	(A,27,81)	Inductor	CTF1708
L 212	(A,30,81)	Inductor	CTF1708
L 213	(A,32,81)	Inductor	CTF1708
L 234	(B,164,109)	Choke Coil	CTH1319
L 381	(A,160,81)	Coil	CTH1475
X 151	(B,17,96)	TCXO 16.367 667 MHz	CWX3728
F 151	(A,14,107)	Filter	CTF1706
F 231	(A,167,111)	EMI Filter	CCG1067
F 232	(A,163,111)	EMI Filter	CCG1067
F 233	(A,160,110)	EMI Filter	CCG1060
F 261	(A,56,102)	EMI Filter	CCG1082
F 262	(B,37,103)	EMI Filter	CCG1082
⚠ P201	(B,76,103)	Fuse 1 A	CEK1254
P 241	(B,149,125)	Poly Switch	MINISMDC075F/24
P 261	(B,49,126)	Poly Switch	MINISMDC075F/24
P 262	(B,39,126)	Poly Switch	MINISMDC075F/24
P 263	(B,44,128)	Poly Switch	MINISMDC075F/24
VA261	(B,34,103)	Varistor	AVR-M1608C270KT2AB
VA262	(B,32,103)	Varistor	AVR-M1608C270KT2AB
VA263	(A,28,111)	Varistor	AVR-M1608C270KT2AB
VA264	(A,28,114)	Varistor	AVR-M1608C270KT2AB
CN101	(B,110,9)	Connector	CKS6299
CN103	(B,151,8)	Connector	CKS5732
CN201	(A,70,121)	Connector	CKS4822
CN231	(A,164,123)	Connector	CKS5867
CN251	(A,119,128)	Connector	CKS6155
CN261	(A,44,126)	Connector	CKS6262
CN291	(A,42,9)	Connector	CKS6261
CN301	(A,42,93)	Connector(EU5)	AKM1274
JA151	(A,16,126)	Connector	CKS5702
JA241	(A,140,124)	Connector	CKS4124

RESISTORS

R 102	(B,106,18)	RS1/16SS182J

Circuit Symbol and No.		Part No.
R 103	(B,104,17)	RS1/16SS221J
R 104	(B,119,20)	RS1/16SS0R0J
R 106	(B,117,16)	RS1/16SS0R0J
R 107	(B,138,16)	RS1/16SS0R0J
R 108	(B,136,14)	RS1/16SS0R0J
R 112	(B,119,16)	RS1/16SS0R0J
R 115	(B,102,15)	RS1/16SS331J
R 116	(A,162,18) (AU)	RS1/16SS470J
R 117	(B,145,83)	RS1/16SS0R0J
R 118	(B,142,64)	RS1/16SS0R0J
R 119	(B,120,26)	RS1/16SS0R0J
R 120	(B,124,46)	RS1/16SS0R0J
R 121	(B,159,93)	RS1/16SS0R0J
R 122	(A,145,11)	RS1/10SR0R0J
R 123	(A,145,16)	RS1/16SS0R0J
R 124	(A,143,16)	RS1/16SS0R0J
R 131	(A,55,74)	RS1/10SR0R0J
R 141	(A,134,10)	RS1/10SR0R0J
R 142	(A,56,22)	RS1/10SR0R0J
R 150	(A,105,12)	RS1/10SR0R0J
R 151	(A,20,94)	RS1/16SS151J
R 152	(A,17,104)	RS1/16SS2R7J
R 153	(A,18,94)	RS1/16SS0R0J
R 154	(A,16,94)	RS1/16SS0R0J
R 155	(A,14,94)	RS1/16SS0R0J
R 156	(A,13,94)	RS1/16SS101J
R 157	(A,12,94)	RS1/16SS101J
R 158	(A,14,103)	RS1/16SS0R0J
R 159	(A,11,94)	RS1/16SS101J
R 160	(A,13,110)	RS1/16SS0R0J
R 161	(B,13,99)	RS1/16SS472J
R 162	(B,13,98)	RS1/16SS203J
R 165	(A,26,107)	RN1/16SC10R0D
R 166	(A,24,107)	RN1/16SSE1501D
R 167	(A,24,108)	RN1/16SSE2402D
R 168	(A,22,108)	RN1/16SSE3302D
R 170	(B,14,103)	RN1/16SSE4702D
R 171	(B,10,110)	RN1/16SSE4702D
R 172	(B,18,104)	RS1/16SS432J
R 173	(A,19,110)	RS1/16SS0R0J
R 174	(B,10,106)	RN1/16SSE1002D
R 175	(B,10,107)	RN1/16SSE2202D
R 176	(B,10,108)	RN1/16SSE3302D
R 177	(B,16,113)	RS1/16SS103J
R 178	(B,15,114)	RS1/16SS102J
R 179	(B,22,104)	RS1/16SS102J
R 180	(B,25,96)	RS1/16SS103J
R 183	(B,27,96)	RS1/16SS0R0J
R 184	(B,31,100)	RS1/10SR0R0J
R 185	(A,14,111)	RS1/16SS0R0J
R 186	(A,15,111)	RS1/16SS0R0J
R 187	(A,29,83)	RS1/16SS0R0J
R 190	(A,28,90)	RS1/16SS104J
R 191	(A,32,83)	RS1/16SS0R0J
R 194	(A,31,90)	RS1/16SS104J
R 195	(A,35,84)	RS1/16SS0R0J
R 198	(A,33,90)	RS1/16SS104J
R 199	(B,22,98)	RS1/16SS0R0J
R 202	(A,82,99)	RS1/16SS103J
R 203	(A,84,99)	RS1/16SS512J

Circuit Symbol and No.		Part No.
R 207	(A,84,93)	RS1/4SA681J
R 211	(A,27,84)	RS1/16SS101J
R 212	(A,30,84)	RS1/16SS101J
R 213	(A,33,84)	RS1/16SS101J
R 214	(A,17,96)	RS1/16SS101J
R 215	(A,16,95)	RS1/16SS101J
R 216	(A,14,95)	RS1/16SS101J
R 222	(A,167,88)	RS1/16SS0R0J
R 223	(A,168,93)	RS1/16SS0R0J
R 226	(A,165,88)	RS1/16SS0R0J
R 231	(A,167,108)	RS1/10SR0R0J
R 232	(A,163,108)	RS1/10SR0R0J
R 233	(A,165,111)	RS1/10SR0R0J
R 241	(B,150,120)	RS1/16SS102J
R 242	(B,149,120)	RS1/16SS102J
R 246	(A,118,107)	RS1/16SS0R0J
R 249	(A,122,107)	RS1/16SS0R0J
R 251	(A,118,99)	RS1/16SS221J
R 252	(A,120,100)	RS1/10SR105J
R 254	(A,116,117)	RS1/8SQ102J
R 255	(A,118,117)	RS1/8SQ102J
R 256	(A,120,117)	RS1/8SQ102J
R 257	(A,122,117)	RS1/8SQ102J
R 258	(A,115,103)	RS1/16SS0R0J
R 259	(A,110,120)	RS1/8SQ0R0J
R 261	(A,49,98)	RS1/10SR390J
R 262	(A,47,98)	RS1/10SR390J
R 263	(A,54,98)	RS1/10SR390J
R 264	(A,52,98)	RS1/10SR390J
R 265	(B,46,99)	RS1/10SR223J
R 266	(B,41,99)	RS1/10SR223J
R 267	(B,53,99)	RS1/10SR223J
R 268	(B,48,99)	RS1/10SR223J
R 275	(A,59,93) (UC)	RS1/16SS103J
R 276	(A,61,104)	RS1/16SS102J
R 277	(A,59,104)	RS1/16SS102J
R 278	(A,68,105)	RS1/16SS102J
R 279	(A,63,98)	RS1/16SS153J
R 280	(A,61,90) (UC)	RS1/16SS103J
R 281	(A,62,92) (UC)	RS1/10SR0R0J
R 282	(A,64,87) (UC)	RS1/16SS102J
R 283	(A,64,88) (UC)	RS1/16SS103J
R 284	(A,65,97)	RS1/16SS0R0J
R 285	(B,50,93)	RS1/10SR472J
R 286	(B,51,93)	RS1/10SR472J
R 287	(B,43,95)	RS1/10SR472J
R 288	(B,44,95)	RS1/10SR472J
R 289	(A,62,87) (EU5,AU)	RS1/16SS104J
R 301	(A,42,85) (EU5)	RS1/16SS102J
R 302	(A,40,84) (EU5)	RS1/16SS0R0J
R 305	(A,42,84) (EU5)	RS1/16SS104J
R 308	(A,55,81) (EU5)	RS1/16SS0R0J
R 310	(A,50,85) (EU5)	RS1/16SS0R0J
R 385	(A,150,81)	RS1/10SR471J
R 386	(A,151,83)	RS1/10SR6202D
R 387	(A,153,82)	RS1/10SR4701D
R 389	(A,153,81)	RS1/10SR1202D
R 390	(A,155,82)	RS1/16SS183J
R 391	(A,147,78)	RS1/16SS513J
R 393	(A,152,61)	RS1/8SQ0R0J
R 394	(A,148,79)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 396	(A,164,97)	RS1/4SA151J
R 397	(A,166,97)	RS1/4SA151J
R 398	(A,168,97)	RS1/4SA151J
R 401	(B,59,18) (UC)	RS1/10SR0R0J
R 402	(B,62,18) (EU5)	RS1/10SR0R0J
R 404	(B,68,18) (AU)	RS1/10SR0R0J

CAPACITORS

C 102	(A,162,22) (AU)	CKSRYB104K50
C 131	(A,48,18)	CKSRYB103K50
C 151	(B,17,98)	CKSSYB103K16
C 152	(B,20,97)	CKSSYB102K50
C 153	(A,22,100)	CKSSYB104K10
C 154	(A,19,100)	CCSSCH101J50
C 156	(A,22,98) 10 uF	CCG1244
C 157	(A,19,98)	CKSSYB104K10
C 158	(A,19,101)	CCSSCH470J50
C 159	(A,18,104)	CKSSYB105K6R3
C 160	(A,16,104)	CKSSYB104K10
C 161	(A,15,104)	CCSSCH470J50
C 162	(A,14,105)	CCSSCH101J50
C 163	(A,11,102)	CCSSCH470J50
C 164	(B,13,101)	CCSSCH470J50
C 167	(A,15,114)	CCSSCH101J50
C 168	(A,24,109)	CKSSYB104K10
C 169	(B,20,105)	CKSSYB103K16
C 170	(A,23,113)	CCSSCH101J50
C 171	(B,17,104)	CCSSCH101J50
C 172	(A,19,112)	CKSSYB102K50
C 173	(A,20,112)	CKSSYB103K16
C 174	(B,18,107)	CKSSYB104K10
C 175	(A,20,109)	CKSSYB104K10
C 176	(B,28,94)	CKSRYB105K10
C 177	(B,23,95)	CKSRYB105K10
C 187	(A,29,84)	CKSSYB104K16
C 191	(A,31,84)	CKSSYB104K16
C 195	(A,34,84)	CKSSYB104K16
C 203	(A,88,112)	CKSSYB103K16
C 205	(A,80,112)	CKSSYB103K16
C 206	(A,81,116)	CEVW101M16
C 221	(A,160,89)	CKSRYB105K10
C 222	(A,166,91)	CKSSYB104K10
C 223	(A,161,98)	CKSRYB103K50
C 224	(A,155,106)	CEVW101M16
C 225	(A,165,89)	CKSSYB104K10
C 241	(B,148,121)	CKSSYB102K50
C 242	(B,150,121)	CKSSYB102K50
C 251	(A,117,103)	CKSRYB104K16
C 254	(A,116,111)	CKSRYB103K50
C 255	(A,116,115)	CKSRYB103K50
C 256	(A,105,108)	CKSSYB103K25
C 257	(A,106,108)	CKSRYB102K50
C 258	(A,111,103)	CKSRYB104K50
C 261	(A,49,94) 10 uF	DCH1165
C 262	(A,47,94) 10 uF	DCH1165
C 263	(A,54,94) 10 uF	DCH1165
C 264	(A,52,94) 10 uF	DCH1165
C 271	(A,62,102)	CKSRYB103K50
C 273	(A,65,99)	CKSRYB102K50

Circuit Symbol and No.		Part No.
C 274	(A,62,88) (UC)	CKSSYB104K10
C 275	(B,53,128)	CKSRYB103K50
C 276	(B,37,129)	CKSRYB103K50
C 301	(A,56,79) (EU5)	CKSRYB104K16
C 303	(A,52,84) (EU5)	CKSRYB104K16
C 382	(A,166,70) 220 uF/6.3 V	CCH1688
C 383	(A,154,82)	CKSSYB153K16
C 384	(A,154,72) 4.7 uF	CCG1222
C 385	(A,155,80)	CCSSCH220J50
C 386	(A,154,74)	CKSRYB105K16
C 387	(A,153,67) 100 uF/16 V	CCH1565
C 388	(A,146,67) 100 uF/16 V	CCH1565

F

Unit Number : CXX3396(UC)
: CXX3397(EU5)
: CXX3399(AU)
Unit Name : CC Monitor Unit(Service)

MISCELLANEOUS

IC 3300	(A,55,21) IC	NJU6062V
IC 3360	(A,14,25) IC	AK4388VT
IC 4001	(A,47,95) IC	TT4421
IC 4203	(A,20,60) IC	S-80944CNMC-G9E
IC 4204	(B,63,42) IC	LTC3412AEFE
IC 4205	(B,42,43) IC	LTC3412AEFE
IC 4206	(A,20,63) IC	S-80929CNMC-G8Z
IC 4207	(A,21,43) IC	TC7SH08FUS1
IC 4208	(B,22,128) Regulator IC	NJM2878F3-15
IC 4209	(A,20,104) Regulator IC	NJM2878F3-25
IC 4211	(A,19,72) Regulator IC	NJM2878F3-18
IC 4212	(A,26,44) IC	TC7SH08FUS1
IC 4216	(B,42,52) IC	S-80830CLMC-B6P
IC 4217	(A,24,55) IC	S-80835CLMC-B6U
IC 4219	(A,40,131) IC	BD6522F
IC 4281	(B,67,49) IC	S-80844CLMC-B65
IC 4361	(A,26,137) IC	S-1132B33-M5
IC 4401	(A,71,95) IC	H5DU5162ETR-E3C
IC 4402	(A,71,68) IC	H5DU5162ETR-E3C
IC 4403	(A,46,77) Flash ROM Unit(Service)	CXX3406
IC 4404	(B,71,95) IC	H5DU5162ETR-E3C
IC 4405	(B,71,68) IC	H5DU5162ETR-E3C
IC 4406	(A,36,70) SRAM	CY62147EV30LL45BVA
IC 4407	(A,29,66) IC	TC7PA53FU
IC 4501	(B,41,122) IC	PEN002A
IC 4602	(A,45,143) IC	TC7SH86FUS1
IC 4621	(B,50,61) IC	PE9019A
IC 4654	(B,31,81) IC	WM1616LGEFL
IC 4701	(B,25,52) IC	341S2162
IC 4901	(A,25,119) IC	TC90192XBG
IC 5402	(A,30,22) IC(UC,EU5)	NJM13403V
IC 5451	(A,39,45) IC	BA2115F
IC 5508	(A,74,125) IC	OZ9990IRN
IC 5513	(A,28,81) IC	AK8859VN
IC 5514	(A,41,25) IC	NJM2125F
Q 3360	(B,12,27) Transistor	LTC114EUB
Q 4206	(A,42,140) Transistor	LTC114EUB
Q 4207	(B,58,80) Transistor	LTC114EUB
Q 4209	(A,45,137) Transistor	2SB1689
Q 4210	(B,60,72) Transistor	LSA1576UB

Circuit Symbol and No.		Part No.
Q 4211	(B,56,73) Transistor	LSC4081UB
Q 4212	(B,60,94) Transistor	LTC114EUB
Q 4214	(B,60,100) Transistor	LSA1576UB
Q 4216	(B,60,90) Transistor	LTC114EUB
Q 4217	(B,56,95) Transistor	LSA1576UB
Q 4218	(B,53,82) Transistor	LSA1576UB
Q 4701	(B,25,58) Transistor	LTC114TUB
Q 4903	(A,32,109) Transistor	2SC4617
Q 5117	(A,64,133) FET	SP8K22
D 3300	(B,61,29) Diode	RKZ5.6KG(B2)
D 3301	(B,61,31) Diode	RKZ5.6KG(B2)
D 3302	(B,61,32) Diode	RKZ5.6KG(B2)
D 3303	(B,61,34) Diode	RKZ5.6KG(B2)
D 4201	(B,35,47) Diode	RB521G-30
D 4202	(B,64,36) Diode	RB521G-30
D 4361	(A,21,133) Diode	RB551V-30
D 4601	(A,55,114) Diode	RB520G-30
D 5504	(A,67,134) Diode	RB160VA-40
D 5509	(A,70,132) Diode	RB551V-30
L 3300	(A,59,28) Ferrite Bead	CTF1528
L 3301	(A,64,28) Ferrite Bead	CTF1528
L 3302	(A,59,30) Ferrite Bead	CTF1528
L 3303	(A,57,32) Ferrite Bead	CTF1528
L 3360	(A,13,34) Inductor	LCTAW2R7J2520
L 3361	(B,11,24) Inductor	CTF1792
L 4002	(B,56,99) Inductor	CTF1736
L 4005	(B,43,87) Inductor	CTF1736
L 4006	(B,52,104) Inductor	CTF1736
L 4007	(B,42,88) Inductor	CTF1736
L 4010	(B,36,91) Inductor	CTF1736
L 4011	(B,47,102) Inductor	CTF1736
L 4012	(B,47,104) Inductor	CTF1736
L 4013	(B,47,104) Inductor	CTF1736
L 4014	(B,56,91) Inductor	CTF1736
L 4015	(B,50,82) Inductor	CTF1736
L 4016	(B,45,99) Inductor	CTF1736
L 4018	(B,41,89) Inductor	CTF1736
L 4202	(B,22,91) Choke Coil	CTH1319
L 4209	(A,10,69) Inductor	CTF1739
L 4210	(A,13,98) Inductor(UC)	CTF1739
L 4213	(A,12,89) Inductor	CTF1739
L 4215	(A,16,63) Inductor	CTF1739
L 4224	(B,56,42) Choke Coil 1.2 uH	CTH1495
L 4225	(B,48,43) Choke Coil 1.2 uH	CTH1495
L 4246	(A,19,51) Inductor	CTF1739
L 4380	(B,24,66) Chip EMI Filter	DTF1106
L 4410	(A,54,75) Inductor	CTF1736
L 4414	(A,26,69) Inductor	CTF1736
L 4415	(A,28,64) Inductor	CTF1736
L 4501	(A,47,121) Inductor	CTF1736
L 4502	(A,42,123) Inductor	CTF1736
L 4651	(B,45,82) Inductor	CTF1736
L 4781	(B,39,78) Inductor	CTF1736
L 4782	(B,32,89) Inductor	CTF1736
L 4784	(B,60,67) Inductor	CTF1736
L 4785	(A,48,137) Inductor	CTF1736
L 4786	(B,39,65) Inductor	CTF1736
L 4788	(B,21,57) Inductor	CTF1736
L 4903	(B,27,129) Inductor	CTF1736
L 4904	(B,22,104) Inductor	CTF1736

Circuit Symbol and No.		Part No.
L 4905	(B,19,126) Inductor	CTF1736
L 4931	(A,36,75) Inductor	CTF1736
L 4933	(A,18,79) Inductor	CTF1736
L 4934	(B,25,104) Inductor	CTF1736
L 4936	(A,19,79) Inductor	CTF1736
L 5609	(A,63,125) Inductor	ATH7074
L 5632	(B,33,134) Inductor	CTF1635
L 5695	(B,35,139) Resistor	RS1/16SS0R0J
L 5696	(B,35,137) Resistor	RS1/16SS0R0J
L 5697	(B,47,139) Resistor	RS1/16SS271J
L 5698	(B,46,139) Resistor	RS1/16SS271J
L 5699	(B,46,137) Resistor	RS1/16SS271J
L 5700	(B,45,139) Resistor	RS1/16SS271J
L 5701	(B,45,137) Resistor	RS1/16SS271J
L 5702	(B,44,139) Resistor	RS1/16SS271J
L 5703	(B,44,137) Resistor	RS1/16SS271J
L 5704	(B,43,139) Resistor	RS1/16SS271J
L 5705	(B,42,137) Resistor	RS1/16SS271J
L 5706	(B,42,139) Resistor	RS1/16SS271J
L 5707	(B,41,137) Resistor	RS1/16SS271J
L 5708	(B,41,139) Resistor	RS1/16SS271J
L 5709	(B,40,137) Resistor	RS1/16SS271J
L 5710	(B,39,139) Resistor	RS1/16SS271J
L 5711	(B,39,137) Resistor	RS1/16SS271J
L 5712	(B,38,139) Resistor	RS1/16SS271J
L 5713	(B,38,137) Resistor	RS1/16SS271J
L 5714	(B,37,139) Resistor	RS1/16SS271J
L 5715	(B,37,137) Resistor	RS1/16SS271J
TH3201	(A,78,33) Thermistor	CCX1084
X 4001	(A,34,92) Oscillator 12.000 MHz	CSS1708
X 4002	(A,36,98) Oscillator 32.768 kHz	CSS1777
X 4652	(B,42,81) Oscillator 24.576 MHz	CWX3635
X 4901	(A,28,109) Oscillator 42.000 000 MHz	CSS1779
X 4902	(A,29,89) Oscillator 24.576 MHz	CSS1699
F 4001	(B,55,100) Chip EMI Filter	VTL1171
F 4003	(B,51,103) Chip EMI Filter	VTL1171
F 4005	(B,35,92) Chip EMI Filter	VTL1171
F 4201	(A,13,51) EMI Filter	CCG1162
F 4202	(A,13,61) EMI Filter	CCG1162
F 4204	(A,20,67) EMI Filter	CCG1162
F 4409	(A,28,69) Chip EMI Filter	DTL1106
F 4651	(B,45,81) Chip EMI Filter	DTL1106
F 4901	(B,18,124) Chip EMI Filter	DTL1106
F 5005	(A,10,45) Chip EMI Filter	DTF1106
⚠ P4201	(B,49,39) Fuse 1.75 A	CEK1283
⚠ P4202	(B,52,44) Fuse 1.5 A	CEK1282
VA3300	(A,61,27) Varistor	AVR-M1608C120MT6AB
VA3301	(A,66,30) Varistor	AVR-M1608C120MT6AB
VA3302	(A,60,29) Varistor	AVR-M1608C120MT6AB
VA3303	(A,59,33) Varistor	AVR-M1608C120MT6AB
CN3300	(B,69,30) Connector	CKS6327
CN3302	(B,77,19) Connector	CKS6286
CN3360	(B,19,23) Connector	CKS6117
CN5604	(B,75,143) Connector	CKS6277
CN5605	(B,38,142) Connector	CKS6278
CN5607	(B,11,59) Connector	CKS6118
CN5608	(B,11,93) Connector	CKS5732

Circuit Symbol and No.			Part No.
JA4712	(B,64,123)	Connector	CKS6341
SN4201	(A,38,114)	Sensor	S-58LM20A-N4

RESISTORS

R 3100	(A,79,127)	RS1/16SS103J
R 3101	(A,79,124)	RS1/16SS103J
R 3102	(A,76,132)	RS1/16SS103J
R 3103	(A,58,119)	RS1/8SQ0R0J
R 3201	(B,10,40)	RS1/16SS183J
R 3202	(B,10,39)	RS1/16SS0R0J
R 3325	(A,53,16)	RS1/10SR471J
R 3330	(A,54,15)	RS1/10SR101J
R 3335	(A,56,15)	RS1/10SR301J
R 3336	(A,55,27)	RS1/16SS0R0J
R 3337	(A,54,27)	RS1/16SS0R0J
R 3338	(A,56,27)	RS1/16SS471J
R 3339	(A,11,61)	RS1/10SR0R0J
R 3343	(A,14,49)	RS1/16SS0R0J
R 3344	(A,54,29)	RS1/16SS472J
R 3345	(A,55,30)	RS1/16SS472J
R 3360	(A,23,35)	RS1/16SS221J
R 3361	(A,23,36)	RS1/16SS221J
R 3362	(A,21,34)	RS1/16SS223J
R 3363	(A,21,37)	RS1/16SS223J
R 3364	(A,15,19)	RS1/16SS103J
R 3365	(A,17,19)	RS1/16SS103J
R 3366	(B,15,18)	RS1/16SS470J
R 3367	(A,16,19)	RS1/16SS103J
R 3368	(B,15,17)	RS1/16SS470J
R 3369	(B,15,19)	RS1/16SS470J
R 3371	(A,13,19)	RS1/16SS470J
R 3372	(A,21,19)	RS1/16SS473J
R 3373	(A,17,41)	RS1/16SS470J
R 3374	(A,17,39)	RS1/16SS103J
R 3375	(A,16,41)	RS1/16SS470J
R 3376	(B,9,24)	RS1/16SS470J
R 3377	(B,12,19)	RS1/16SS0R0J
R 3378	(B,10,26)	RS1/16SS0R0J
R 3380	(B,15,21)	RS1/16SS223J
R 3383	(B,15,27)	RS1/16SS0R0J
R 3386	(B,15,25)	RS1/16SS222J
R 4000	(A,56,109)	RS1/16SS0R0J
R 4001	(B,58,96)	RS1/16SS222J
R 4002	(B,58,97)	RS1/16SS222J
R 4004	(B,59,108)	RS1/16SS103J
R 4005	(A,63,43)	RS1/16SS103J
R 4006	(B,58,99)	RS1/16SS182J
R 4007	(B,58,100)	RS1/16SS103J
R 4008	(B,61,108)	RS1/16SS103J
R 4009	(B,60,108)	RS1/16SS103J
R 4010	(B,50,85)	RS1/16SS0R0J
R 4013	(A,32,96)	RS1/16SS103J
R 4014	(B,47,101)	RS1/16SS0R0J
R 4016	(B,48,105)	RS1/16SS6041F
R 4017	(A,37,93)	RS1/16SS105J
R 4018	(B,48,103)	RS1/16SS0R0J
R 4020	(A,37,98)	RS1/16SS106J
R 4021	(A,33,96)	RS1/16SS103J
R 4022	(A,37,96)	RS1/16SS101J

Circuit Symbol and No.		Part No.
R 4024	(A,36,94)	RS1/16SS471J
R 4025	(B,43,102)	RS1/16SS103J
R 4026	(A,55,77)	RS1/16SS220J
R 4027	(A,62,101)	RAB4CQ104J
R 4028	(A,58,101)	RAB4CQ104J
R 4029	(A,61,107)	RAB4CQ104J
R 4030	(B,48,101)	RS1/16SS102J
R 4032	(B,49,84)	RS1/16SS0R0J
R 4033	(A,57,81)	RS1/16SS220J
R 4034	(A,63,39)	RS1/16SS103J
R 4035	(A,63,38)	RS1/16SS103J
R 4036	(A,63,41)	RS1/16SS103J
R 4037	(A,63,42)	RS1/16SS103J
R 4038	(A,61,104)	RAB4CQ104J
R 4040	(A,63,37)	RS1/16SS103J
R 4043	(B,33,91)	RS1/16SS222J
R 4044	(B,34,92)	RS1/16SS222J
R 4045	(B,61,84)	RS1/16SS222J
R 4046	(A,63,40)	RS1/16SS103J
R 4048	(A,14,96)	RS1/16SS222J
R 4049	(A,14,101)	RS1/16SS222J
R 4050	(A,33,88)	RS1/16SS104J
R 4051	(A,33,87)	RS1/16SS104J
R 4052	(A,40,108)	RS1/16SS104J
R 4053	(A,31,99)	RS1/16SS104J
R 4054	(A,31,103)	RS1/16SS104J
R 4055	(A,31,87)	RS1/16SS684J
R 4057	(B,35,101)	RS1/16SS821J
R 4058	(B,50,106)	RS1/16SS222J
R 4059	(B,42,96)	RS1/16SS153J
R 4060	(A,33,103)	RS1/16SS222J
R 4061	(B,38,102)	RS1/16SS104J
R 4062	(A,35,103)	RS1/16SS222J
R 4063	(B,52,102)	RS1/16SS222J
R 4064	(A,38,96)	RS1/16SS103J
R 4065	(A,34,104)	RS1/16SS222J
R 4066	(A,52,109)	RS1/16SS0R0J
R 4067	(A,51,109)	RS1/16SS0R0J
R 4068	(B,45,86)	RS1/8SQ0R0J
R 4069	(A,39,77)	RS1/16SS471J
R 4070	(A,31,101)	RS1/16SS102J
R 4071	(A,31,100)	RS1/16SS102J
R 4072	(A,31,102)	RS1/16SS102J
R 4073	(B,49,104)	RS1/16SS272J
R 4101	(B,62,101)	RAB4CQ220J
R 4102	(B,62,91)	RAB4CQ220J
R 4103	(B,62,88)	RAB4CQ220J
R 4104	(B,62,98)	RAB4CQ220J
R 4105	(B,63,75)	RAB4CQ220J
R 4106	(B,63,81)	RAB4CQ220J
R 4107	(B,63,78)	RAB4CQ220J
R 4108	(B,63,72)	RAB4CQ220J
R 4109	(B,41,102)	RS1/16SS0R0J
R 4110	(A,47,85)	RAB4CQ220J
R 4111	(A,44,85)	RAB4CQ220J
R 4112	(A,45,82)	RAB4CQ220J
R 4113	(A,42,82)	RAB4CQ220J
R 4114	(B,42,102)	RS1/16SS0R0J
R 4115	(A,44,104)	RS1/16SS560J
R 4116	(A,46,107)	RS1/16SS220J

Circuit Symbol and No.		Part No.
R 4117	(A,45,104)	RS1/16SS220J
R 4118	(A,45,104)	RS1/16SS220J
R 4119	(A,44,106)	RS1/16SS220J
R 4120	(A,45,106)	RS1/16SS220J
R 4121	(A,39,80)	RS1/16SS0R0J
R 4133	(A,40,81)	RS1/16SS330J
R 4134	(A,39,81)	RS1/16SS330J
R 4135	(A,41,80)	RS1/16SS220J
R 4136	(A,52,80)	RS1/16SS220J
R 4137	(A,51,80)	RS1/16SS470J
R 4138	(A,40,80)	RS1/16SS0R0J
R 4139	(A,54,81)	RAB4CQ470J
R 4140	(A,51,82)	RAB4CQ470J
R 4141	(A,50,85)	RAB4CQ470J
R 4142	(A,48,82)	RAB4CQ470J
R 4143	(A,46,105) Ferrite Bead	CTF1801
R 4144	(A,47,104)	RS1/16SS470J
R 4145	(B,46,106)	RAB4CQ680J
R 4146	(B,43,106)	RAB4CQ680J
R 4147	(A,38,81)	RS1/16SS330J
R 4148	(B,63,86)	RS1/16SS220J
R 4149	(B,63,86)	RS1/16SS220J
R 4150	(B,63,85)	RS1/16SS220J
R 4151	(B,63,84)	RS1/16SS220J
R 4152	(B,42,101)	RS1/16SS473J
R 4153	(B,42,104)	RS1/16SS103J
R 4154	(B,55,89)	RN1/16SSE1501D
R 4155	(B,53,89)	RN1/16SSE1501D
R 4194	(A,52,105)	RS1/16SS0R0J
R 4196	(B,62,56)	RS1/16SS104J
R 4197	(B,62,62)	RS1/16SS104J
R 4198	(B,45,84)	RS1/16SS104J
R 4199	(A,41,85)	RS1/16SS272J
R 4200	(B,18,78)	RS1/10SR0R0J
R 4201	(A,11,71)	RS1/10SR0R0J
R 4202	(B,16,78)	RS1/10SR0R0J
R 4206	(A,66,44)	RS1/16SS4702D
R 4207	(A,64,44)	RS1/16SS1003D
R 4208	(A,23,48)	RS1/16SS4702D
R 4209	(A,22,49)	RS1/16SS1003D
R 4210	(B,64,37)	RS1/16SS223J
R 4211	(B,36,46)	RS1/16SS223J
R 4212	(B,69,44)	RS1/16SS562J
R 4213	(B,34,42)	RS1/16SS562J
R 4214	(B,54,47)	RS1/4S0R0J
R 4215	(B,44,38)	RS1/10SR0R0J
R 4216	(B,65,46)	RS1/10SR103J
R 4217	(B,37,40)	RS1/10SR103J
R 4218	(B,70,41)	RS1/16SS5102D
R 4219	(B,68,42)	RS1/16SS0R0J
R 4220	(B,70,44)	RS1/16SS2402D
R 4221	(B,35,44)	RS1/16SS1003D
R 4222	(B,36,44)	RS1/16SS9101D
R 4223	(B,33,42)	RS1/16SS2003D
R 4224	(B,52,37)	RS1/16SS0R0J
R 4225	(B,46,46)	RS1/16SS0R0J
R 4226	(A,19,56)	RS1/16SS104J
R 4228	(A,19,41)	RS1/16SS103J
R 4229	(B,60,75)	RS1/10SR103J
R 4230	(B,58,74)	RS1/10SR102J

Circuit Symbol and No.		Part No.
R 4231	(A,54,79)	RS1/16SS220J
R 4233	(A,18,105)	RS1/10SR0R0J
R 4234	(B,25,129)	RS1/10SR0R0J
R 4236	(B,55,79)	RS1/10SR103J
R 4237	(B,52,73)	RS1/10SR103J
R 4238	(B,58,70)	RS1/10SR103J
R 4239	(A,63,73)	RS1/8SQ0R0J
R 4241	(A,43,137)	RS1/10SR103J
R 4242	(B,34,48)	RS1/8SQ0R0J
R 4243	(A,47,131)	RS1/8SQ0R0J
R 4246	(A,45,139)	RS1/10SR331J
R 4247	(B,56,79)	RS1/10SR561J
R 4249	(A,20,69)	RS1/10SR0R0J
R 4250	(B,40,50)	RS1/16SS0R0J
R 4251	(B,22,68)	RS1/16SS0R0J
R 4254	(B,60,98)	RS1/10SR103J
R 4255	(A,12,93)	RS1/16SS101J
R 4256	(A,13,94)	RS1/16SS330J
R 4257	(B,64,52)	RS1/16SS0R0J
R 4259	(B,60,96)	RS1/10SR681J
R 4261	(A,47,139)	RS1/16SS102J
R 4262	(A,40,140)	RS1/16SS0R0J
R 4265	(B,22,101)	RS1/10SR0R0J
R 4266	(A,20,54)	RS1/16SS105J
R 4267	(A,23,43)	RS1/16SS0R0J
R 4268	(B,58,93)	RS1/10SR103J
R 4269	(A,57,64)	RS1/10SR471J
R 4271	(B,58,90)	RS1/10SR101J
R 4275	(A,38,117)	RS1/16SS471J
R 4278	(A,29,73)	RS1/10SR0R0J
R 4281	(B,27,70)	RS1/16SS0R0J
R 4284	(B,22,72)	RS1/16SS103J
R 4285	(A,27,41)	RS1/16SS101J
R 4286	(B,22,73)	RS1/16SS103J
R 4287	(B,53,147) (UC)	RS1/16SS0R0J
R 4288	(B,54,147) (EU5)	RS1/16SS0R0J
R 4290	(B,57,147) (AU)	RS1/16SS0R0J
R 4291	(A,9,88) Ferrite Bead	CTF1802
R 4294	(B,45,73)	RS1/10SR102J
R 4296	(A,11,74)	RS1/16SS0R0J
R 4298	(B,31,119)	RS1/16SS0R0J
R 4299	(A,9,90) Ferrite Bead	CTF1802
R 4304	(A,13,96) Ferrite Bead	CTF1802
R 4305	(A,16,74)	RS1/16SS0R0J
R 4307	(B,21,68)	RS1/16SS0R0J
R 4308	(A,9,71)	RS1/16SS0R0J
R 4309	(B,21,66)	RS1/16SS0R0J
R 4310	(B,21,64)	RS1/16SS0R0J
R 4311	(A,9,63)	RS1/16SS0R0J
R 4312	(A,9,65)	RS1/16SS0R0J
R 4313	(A,10,52)	RS1/16SS0R0J
R 4315	(A,9,53)	RS1/16SS0R0J
R 4316	(A,9,58)	RS1/16SS0R0J
R 4317	(A,13,95) Ferrite Bead	CTF1802
R 4318	(A,14,46)	RS1/16SS0R0J
R 4319	(A,17,45)	RS1/16SS0R0J
R 4320	(A,11,79) Ferrite Bead	CTF1802
R 4321	(A,10,79) Ferrite Bead	CTF1802
R 4322	(A,9,83) Ferrite Bead	CTF1802
R 4323	(A,9,84) Ferrite Bead	CTF1802
R 4324	(A,11,84) Ferrite Bead	CTF1802

Circuit Symbol and No.		Part No.
R 4325	(A,9,86) Ferrite Bead	CTF1802
R 4326	(A,13,86) Ferrite Bead	CTF1802
R 4327	(A,13,85) Ferrite Bead	CTF1802
R 4328	(A,13,87) Ferrite Bead	CTF1802
R 4329	(A,9,79) Ferrite Bead	CTF1802
R 4334	(A,12,74)	RS1/16SS0R0J
R 4335	(A,14,74)	RS1/16SS0R0J
R 4341	(B,60,36)	RS1/10SR0R0J
R 4342	(A,79,108)	RS1/10SR0R0J
R 4343	(A,59,108)	RS1/10SR0R0J
R 4344	(A,61,54)	RS1/10SR0R0J
R 4361	(A,24,139)	RS1/10SR0R0J
R 4363	(A,21,135)	RS1/16SS0R0J
R 4365	(A,16,129)	RS1/10SR0R0J
R 4380	(A,25,75)	RS1/10SR0R0J
R 4381	(B,21,89)	RS1/16SS0R0J
R 4383	(B,33,63)	RS1/16SS0R0J
R 4391	(A,24,46)	RS1/16SS0R0J
R 4392	(A,38,111)	RS1/16SS0R0J
R 4393	(A,14,44)	RS1/16SS0R0J
R 4395	(A,20,46)	RS1/16SS0R0J
R 4396	(A,41,142)	RS1/16SS0R0J
R 4397	(B,23,69)	RS1/16SS0R0J
R 4401	(B,80,105)	RAB4CQ220J
R 4402	(B,80,102)	RAB4CQ220J
R 4403	(B,80,99)	RAB4CQ220J
R 4404	(A,78,92)	RS1/16SS471J
R 4405	(B,80,96)	RAB4CQ220J
R 4406	(B,80,58)	RAB4CQ220J
R 4407	(B,80,61)	RAB4CQ220J
R 4408	(B,80,63)	RAB4CQ220J
R 4409	(B,80,66)	RAB4CQ220J
R 4410	(B,80,94)	RS1/16SS220J
R 4411	(B,80,93)	RS1/16SS220J
R 4412	(B,79,73)	RS1/16SS220J
R 4413	(B,79,72)	RS1/16SS220J
R 4414	(A,52,77)	RS1/16SS103J
R 4415	(A,64,70)	RS1/16SS471J
R 4419	(A,52,78)	RS1/16SS473J
R 4420	(B,64,92)	RS1/16SS471J
R 4424	(A,40,77)	RS1/16SS0R0J
R 4431	(B,78,70)	RS1/16SS471J
R 4432	(A,58,92)	RS1/16SS150J
R 4433	(A,58,92)	RS1/16SS150J
R 4434	(A,61,79)	RS1/16SS390J
R 4435	(B,63,83)	RS1/16SS390J
R 4436	(A,64,90)	RS1/16SS560J
R 4437	(A,64,92)	RS1/16SS560J
R 4438	(A,63,80)	RS1/16SS560J
R 4439	(A,63,79)	RS1/16SS560J
R 4440	(A,62,98)	RAB4CQ330J
R 4441	(A,62,96)	RAB4CQ330J
R 4442	(A,58,97)	RAB4CQ330J
R 4443	(A,58,94)	RAB4CQ330J
R 4444	(A,59,79)	RAB4CQ330J
R 4446	(A,40,69)	RS1/16SS104J
R 4448	(A,31,66)	RS1/16SS104J
R 4449	(A,41,69)	RS1/16SS104J
R 4450	(B,79,69)	RN1/16SSE1501D
R 4451	(B,79,70)	RN1/16SSE1501D
R 4452	(B,63,94)	RN1/16SSE1501D
R 4453	(B,62,94)	RN1/16SSE1501D
R 4454	(A,64,67)	RN1/16SSE1501D
R 4455	(A,63,67)	RN1/16SSE1501D
R 4456	(A,79,94)	RN1/16SSE1501D
R 4457	(A,79,95)	RN1/16SSE1501D
R 4501	(B,48,106)	RS1/16SS470J
R 4502	(B,49,106)	RS1/16SS472J
R 4503	(B,43,111)	RAB4CQ563J
R 4504	(B,40,111)	RAB4CQ563J
R 4505	(B,45,112)	RS1/16SS0R0J
R 4506	(A,45,126)	RS1/10SR0R0J
R 4507	(A,47,127)	RS1/10SR0R0J
R 4603	(A,52,123)	RS1/16SS0R0J
R 4604	(A,52,135)	RS1/16SS220J
R 4605	(A,52,132)	RS1/16SS220J
R 4606	(A,52,130)	RS1/16SS220J
R 4607	(A,52,119)	RS1/16SS220J
R 4608	(A,52,116)	RS1/16SS220J
R 4609	(A,54,113)	RS1/16SS152J
R 4610	(A,55,111)	RS1/16SS0R0J
R 4612	(A,49,142)	RS1/16SS104J
R 4613	(A,55,115)	RS1/16SS104J
R 4614	(A,47,142)	RS1/16SS102J
R 4615	(A,56,115)	RS1/16SS0R0J
R 4617	(B,47,51)	RS1/16SS103J
R 4618	(B,62,59)	RS1/16SS104J
R 4619	(B,61,57)	RS1/16SS104J
R 4620	(B,62,60)	RS1/16SS104J
R 4622	(B,60,61)	RS1/16SS101J
R 4623	(B,60,60)	RS1/16SS0R0J
R 4624	(B,60,59)	RS1/16SS101J
R 4625	(B,60,58)	RS1/16SS101J
R 4628	(B,58,53)	RS1/16SS0R0J
R 4631	(B,54,71)	RS1/16SS151J
R 4633	(B,60,52)	RS1/16SS0R0J
R 4634	(B,56,51)	RS1/16SS0R0J
R 4635	(B,60,54)	RS1/16SS0R0J
R 4636	(B,47,51)	RS1/16SS0R0J
R 4637	(B,48,71)	RS1/16SS0R0J
R 4638	(B,46,51)	RS1/16SS0R0J
R 4639	(B,45,51)	RS1/16SS0R0J
R 4640	(A,64,36)	RS1/16SS473J
R 4641	(A,64,33)	RS1/16SS473J
R 4642	(A,64,34)	RS1/16SS473J
R 4643	(A,64,35)	RS1/16SS473J
R 4647	(B,51,51)	RS1/16SS103J
R 4648	(B,51,51)	RS1/16SS103J
R 4649	(B,54,51)	RS1/16SS103J
R 4652	(A,16,98)	RS1/16SS0R0J
R 4661	(B,26,86)	RS1/16SS0R0J
R 4667	(B,38,81)	RS1/16SS101J
R 4668	(B,21,76)	RS1/10SR0R0J
R 4669	(B,27,76)	RS1/16SS0R0J
R 4670	(B,27,77)	RS1/16SS0R0J
R 4671	(B,29,76)	RS1/16SS0R0J
R 4677	(B,29,76)	RS1/16SS0R0J
R 4678	(B,38,80)	RS1/16SS0R0J
R 4679	(B,36,77)	RS1/16SS330J
R 4680	(B,36,76)	RS1/16SS330J

Circuit Symbol and No.			Part No.
R 4681	(B,36,76)		RS1/16SS0R0J
R 4682	(B,34,76)		RS1/16SS0R0J
R 4683	(B,26,88)		RS1/16SS1000D
R 4684	(B,26,87)		RS1/16SS1000D
R 4685	(B,32,72)		RS1/16SS0R0J
R 4686	(B,33,72)		RS1/16SS0R0J
R 4687	(B,35,72)		RS1/16SS0R0J
R 4688	(B,36,72)		RS1/16SS0R0J
R 4702	(B,23,59)		RS1/16SS0R0J
R 4703	(B,26,48)		RS1/16SS0R0J
R 4704	(B,25,48)		RS1/16SS0R0J
R 4707	(B,26,56)		RS1/16SS473J
R 4708	(B,23,48)		RS1/16SS104J
R 4709	(B,22,55)		RS1/16SS103J
R 4710	(B,22,58)		RS1/16SS223J
R 4771	(A,52,136)		RS1/16SS103J
R 4772	(A,52,133)		RS1/16SS103J
R 4773	(A,52,130)		RS1/16SS103J
R 4774	(A,52,122)		RS1/16SS103J
R 4775	(A,52,118)		RS1/16SS103J
R 4776	(A,52,116)		RS1/16SS103J
R 4777	(A,54,111)		RS1/16SS330J
R 4778	(A,56,112)		RS1/16SS330J
R 4781	(A,42,144)		RS1/16SS221J
R 4801	(A,32,83)		RS1/16SS470J
R 4802	(A,32,84)		RS1/16SS470J
R 4803	(A,28,76)		RS1/16SS470J
R 4804	(A,28,77)		RS1/16SS470J
R 4805	(A,29,76)		RS1/16SS470J
R 4806	(A,27,77)		RS1/16SS470J
R 4807	(A,32,78)		RS1/16SS470J
R 4808	(A,32,79)		RS1/16SS470J
R 4809	(A,33,80)		RS1/16SS470J
R 4810	(A,32,81)		RS1/16SS470J
R 4811	(A,32,82)		RS1/16SS470J
R 4812	(A,24,84)		RS1/16SS6801D
R 4813	(A,30,86)		RS1/16SS0R0J
R 4814	(A,26,77)		RS1/16SS0R0J
R 4815	(A,33,81)		RS1/16SS470J
R 4816	(A,23,80)		RS1/16SS103J
R 4817	(A,25,88)		RS1/16SS470J
R 4818	(A,26,88)		RS1/16SS300J
R 4819	(A,25,77)		RS1/16SS0R0J
R 4821	(A,23,78)		RS1/16SS0R0J
R 4824	(A,26,130)	Ferrite Bead	CTF1803
R 4901	(A,19,110)		RS1/16SS151J
R 4902	(A,18,110)		RS1/16SS151J
R 4904	(A,25,107)		RS1/16SS151J
R 4905	(A,25,111)		RS1/16SS151J
R 4906	(A,24,111)		RS1/16SS151J
R 4907	(A,24,107)		RS1/16SS151J
R 4908	(A,25,109)		RS1/16SS151J
R 4909	(A,24,109)		RS1/16SS151J
R 4910	(A,23,109)		RS1/16SS151J
R 4911	(A,23,107)		RS1/16SS151J
R 4912	(A,22,109)		RS1/16SS151J
R 4913	(A,22,111)		RS1/16SS151J
R 4914	(A,23,111)		RS1/16SS151J
R 4915	(A,21,109)		RS1/16SS151J
R 4916	(A,21,111)		RS1/16SS151J

Circuit Symbol and No.			Part No.
R 4917	(A,21,107)		RS1/16SS151J
R 4918	(A,20,109)		RS1/16SS151J
R 4919	(A,20,107)		RS1/16SS151J
R 4920	(A,20,111)		RS1/16SS151J
R 4921	(B,32,110)		RS1/16SS152J
R 4922	(A,36,119)		RS1/16SS0R0J
R 4923	(A,36,118)		RS1/16SS0R0J
R 4924	(A,21,81)		RS1/16SS561J
R 4925	(A,36,120)		RS1/16SS0R0J
R 4926	(A,28,111)		RS1/16SS274J
R 4928	(A,16,112)		RS1/16SS0R0J
R 4929	(A,16,113)		RS1/16SS0R0J
R 4930	(A,15,114)		RS1/16SS0R0J
R 4932	(A,17,106)		RS1/16SS223J
R 4933	(B,22,114)		RS1/16SS104J
R 4937	(A,18,77)		RS1/10SR0R0J
R 4951	(B,33,112)		RS1/16SS821J
R 4955	(A,34,115)		RS1/16SS0R0J
R 4956	(A,35,115)		RS1/16SS0R0J
R 4957	(B,27,115)		RS1/16SS0R0J
R 4958	(A,34,114)		RS1/16SS0R0J
R 4960	(A,32,111)		RS1/16SS152J
R 4961	(A,30,111)		RS1/16SS1001D
R 4962	(A,31,109)		RS1/16SS1201F
R 4963	(B,31,112)		RS1/10SR0R0J
R 4966	(A,22,84)		RS1/16SS222J
R 4994	(A,32,85)		RS1/16SS470J
R 5453	(A,35,39)		RS1/16SS153J
R 5454	(A,41,39)		RS1/16SS153J
R 5455	(A,37,39)		RS1/10SR473J
R 5456	(A,40,39)		RS1/10SR473J
R 5457	(A,34,43)		RS1/10SR103J
R 5458	(A,43,42)		RS1/10SR103J
R 5694	(A,36,140)		RS1/16SS0R0J
R 5716	(A,72,132)		RS1/16SS0R0J
R 5719	(A,75,118)		RS1/16SS470J
R 5720	(A,78,118)		RS1/16SS470J
R 5723	(A,75,120)		RS1/16SS0R0J
R 5724	(A,77,120)		RS1/16SS104J
R 5725	(A,79,129)		RS1/16SS0R0J
R 5726	(A,78,129)		RS1/16SS123J
R 5727	(A,73,130)		RS1/16SS3902D
R 5728	(A,63,137)		RS1/10SR150J
R 5729	(A,72,118)		RS1/16SS102J
R 5730	(A,72,137)		RS1/10SR1004D
R 5731	(A,72,133)		RS1/10SR6802D
R 5732	(A,71,129)		RS1/16SS0R0J
R 5733	(A,34,141)		RS1/16SS150J
R 5734	(A,33,142)		RS1/16SS104J
R 5735	(A,34,126)		RS1/16SS151J
R 5736	(A,34,123)		RS1/16SS151J
R 5738	(A,33,128)	Ferrite Bead	CTF1803
R 5740	(A,24,130)	Ferrite Bead	CTF1803
R 5741	(A,24,128)	Ferrite Bead	CTF1803
R 5742	(A,23,130)	Ferrite Bead	CTF1803
R 5743	(A,23,128)	Ferrite Bead	CTF1803
R 5744	(A,22,130)	Ferrite Bead	CTF1803
R 5745	(A,25,130)	Ferrite Bead	CTF1803
R 5747	(A,26,128)	Ferrite Bead	CTF1803
R 5748	(A,27,128)	Ferrite Bead	CTF1803

Circuit Symbol and No.			Part No.
R 5749	(A,27,130)	Ferrite Bead	CTF1803
R 5750	(A,28,128)	Ferrite Bead	CTF1803
R 5751	(A,28,130)	Ferrite Bead	CTF1803
R 5752	(A,29,128)	Ferrite Bead	CTF1803
R 5753	(A,29,130)	Ferrite Bead	CTF1803
R 5754	(A,30,128)	Ferrite Bead	CTF1803
R 5755	(A,30,130)	Ferrite Bead	CTF1803
R 5756	(A,25,128)	Ferrite Bead	CTF1803
R 5757	(A,31,128)	Ferrite Bead	CTF1803
R 5758	(A,34,125)		RS1/16SS221J
R 5760	(A,73,139)		RS1/16SS0R0J
R 5778	(A,35,23)	(UC,EU5)	RS1/10SR333J
R 5779	(A,33,26)	(UC,EU5)	RS1/10SR683J
R 5780	(A,35,27)	(UC,EU5)	RS1/10SR154J
R 5781	(A,35,30)	(UC,EU5)	RS1/10SR0R0J
R 5783	(A,38,25)		RS1/10SR393J
R 5784	(A,41,20)		RS1/10SR393J
R 5790	(A,29,13)	(UC,EU5)	RS1/10SR683J
R 5792	(A,28,16)	(UC,EU5)	RS1/10SR153J
R 5794	(A,33,15)	(UC,EU5)	RS1/10SR683J
R 5799	(A,36,16)	(UC,EU5)	RS1/10SR473J
R 5800	(A,36,17)	(UC,EU5)	RS1/10SR101J
R 5801	(A,33,13)	(UC,EU5)	RS1/10SR153J
R 5819	(A,29,97)		RS1/16SS0R0J
R 5820	(A,29,99)		RS1/16SS0R0J
R 5821	(A,28,101)		RS1/16SS0R0J
R 5822	(A,28,99)		RS1/16SS0R0J
R 5823	(A,27,97)		RS1/16SS0R0J
R 5830	(A,29,101)		RS1/16SS0R0J
R 5831	(A,27,101)		RS1/16SS0R0J
R 5832	(A,26,95)		RS1/16SS0R0J
R 5833	(A,26,97)		RS1/16SS0R0J
R 5834	(A,25,95)		RS1/16SS0R0J
R 5835	(A,24,95)		RS1/16SS0R0J
R 5839	(B,33,139)		RS1/16SS101J
R 5840	(B,33,137)		RS1/16SS101J
R 5862	(B,11,21)		RS1/16SS0R0J
R 5870	(A,27,26)	(UC,EU5)	RS1/16SS103J
R 5871	(A,26,26)	(UC,EU5)	RS1/16SS103J
R 5872	(A,27,28)	(UC,EU5)	RS1/16SS103J
R 5873	(A,29,27)	(UC,EU5)	RS1/16SS103J

CAPACITORS

C 3201	(B,10,38)	CKSSYB104K10
C 3309	(A,51,24)	CKSRYB104K16
C 3310	(A,56,26)	CCSSCH101J50
C 3312	(A,62,27)	CCSRCH102J50
C 3313	(A,66,28)	CCSRCH102J50
C 3314	(A,62,29)	CCSRCH102J50
C 3315	(A,60,33)	CCSRCH102J50
C 3360	(A,24,34)	CKSSYB222K50
C 3361	(A,24,37)	CKSSYB222K50
C 3362	(A,18,34)	CKSQYB106K6R3
C 3363	(A,18,36)	CKSQYB106K6R3
C 3364	(A,16,31)	CKSQYB106K6R3
C 3365	(A,17,31)	CKSSYB102K50
C 3366	(A,13,30)	CKSQYB106K6R3
C 3367	(A,14,29)	CKSSYB102K50
C 3368	(B,15,23)	CKSQYB106K6R3
C 3369	(B,13,23)	CKSQYB106K6R3
C 3370	(A,20,25)	CKSSYB104K10
C 3371	(A,18,26)	CKSSYB104K10
C 3372	(B,21,29)	CKSSYB104K10
C 3373	(B,16,29)	CKSSYB104K10
C 3375	(B,15,26)	CKSSYB105K6R3
C 4001	(A,38,99)	CCSSCH101J50
C 4002	(B,54,98)	CKSQYB106K6R3
C 4003	(B,53,87)	CKSSYB102K50
C 4004	(B,53,88)	CKSRYB104K16
C 4005	(B,56,97)	CKSSYB104K10
C 4007	(B,51,84)	CKSSYB104K10
C 4008	(B,54,91)	CKSSYB104K10
C 4009	(B,48,84)	CKSSYB104K10
C 4010	(B,54,93)	CKSSYB102K50
C 4011	(B,54,94)	CKSSYB102K50
C 4012	(B,54,94)	CKSSYB102K50
C 4013	(B,54,95)	CKSSYB102K50
C 4014	(B,54,96)	CKSSYB102K50
C 4015	(B,54,97)	CKSSYB102K50
C 4016	(B,51,92)	CKSSYB102K50
C 4017	(B,51,93)	CKSSYB102K50
C 4018	(B,51,94)	CKSSYB104K10
C 4019	(B,51,94)	CKSSYB102K50
C 4020	(B,51,95)	CKSSYB102K50
C 4021	(B,51,96)	CKSSYB104K10
C 4022	(B,51,98)	CKSSYB104K10
C 4023	(B,50,93)	CKSSYB104K10
C 4026	(B,50,96)	CKSSYB104K10
C 4027	(B,51,97)	CKSSYB104K10
C 4028	(B,51,98)	CKSSYB104K10
C 4029	(B,57,82)	CKSSYB103K16
C 4030	(B,55,82)	CKSSYB103K16
C 4031	(B,50,90)	CKSSYB102K50
C 4032	(B,50,98)	CKSSYB104K10
C 4033	(B,49,100)	CKSSYB104K10
C 4034	(B,50,91)	CKSSYB104K10
C 4035	(B,49,90)	CKSSYB102K50
C 4036	(B,49,98)	CKSSYB104K10
C 4037	(B,49,91)	CKSSYB104K10
C 4038	(B,48,93)	CKSSYB104K10
C 4039	(B,48,98)	CKSSYB104K10
C 4040	(B,56,82)	CKSSYB103K16
C 4041	(B,48,93)	CKSSYB104K10
C 4042	(B,48,100)	CKSSYB104K10
C 4043	(B,47,93)	CKSSYB104K10
C 4044	(B,48,98)	CKSSYB104K10
C 4045	(B,47,91)	CKSSYB104K10
C 4046	(B,47,98)	CKSSYB104K10
C 4047	(B,46,91)	CKSSYB104K10
C 4048	(B,46,98)	CKSSYB104K10
C 4049	(B,45,91)	CKSSYB104K10
C 4050	(B,45,98)	CKSSYB104K10
C 4051	(B,45,91)	CKSSYB104K10
C 4052	(B,47,100)	CKSSYB104K10
C 4053	(B,45,90)	CKSSYB104K10
C 4054	(B,44,92)	CKSSYB104K10
C 4055	(B,46,93)	CKSSYB104K10
C 4056	(B,45,93)	CKSSYB104K10

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 4057	(B,44,94)	CKSSYB104K10	C 4228	(B,43,46) 10 uF	DCH1201
C 4059	(B,44,95)	CKSSYB104K10	C 4229	(A,18,62)	CKSSYB104K10
C 4060	(B,45,96)	CKSSYB104K10	C 4230	(B,61,46) 10 uF	DCH1201
C 4061	(B,44,97)	CKSSYB104K10	C 4231	(B,45,39) 10 uF	DCH1201
C 4062	(B,44,98)	CKSSYB104K10	C 4232	(B,61,49) 47 uF	CCG1233
C 4063	(B,43,91)	CKSSYB104K10	C 4233	(B,40,38) 47 uF	CCG1233
C 4064	(B,44,93)	CKSSYB104K10	C 4236	(B,54,38) 10 uF	CCG1234
C 4065	(B,44,95)	CKSSYB104K10	C 4237	(B,44,48) 10 uF	CCG1234
C 4066	(B,42,94)	CKSSYB104K10	C 4238	(B,53,38) 10 uF	CCG1234
C 4069	(B,40,97)	CKSSYB104K10	C 4239	(B,46,48) 10 uF	CCG1234
C 4070	(B,40,94)	CKSSYB104K10	C 4240	(A,23,64)	CKSSYB392K50
C 4071	(B,50,88)	CKSQYB106K6R3	C 4241	(B,58,38) 100 uF	CCG1232
C 4072	(B,51,101)	CKSQYB106K6R3	C 4242	(B,48,47) 100 uF	CCG1232
C 4073	(B,41,93)	CKSSYB104K10	C 4243	(A,19,57)	CKSSYB102K50
C 4074	(B,45,89)	CKSRYB105K10	C 4244	(B,61,68)	CKSSYB104K10
C 4075	(B,44,87)	CKSSYB104K10	C 4245	(B,54,73)	CKSRYB474K16
C 4076	(B,42,99)	CKSSYB104K10	C 4246	(A,20,45)	CKSSYB104K10
C 4077	(B,43,101)	CKSSYB104K10	C 4247	(A,24,44)	CKSSYB104K10
C 4078	(B,52,103)	CKSSYB104K10	C 4248	(B,23,129)	CKSRYB105K10
C 4079	(B,40,95)	CKSSYB104K10	C 4249	(A,18,102)	CKSRYB105K10
C 4080	(B,42,96)	CKSSYB104K10	C 4251	(A,22,102)	CKSRYB105K10
C 4081	(B,43,99)	CKSSYB104K10	C 4252	(B,20,128)	CKSRYB105K10
C 4082	(B,43,103)	CKSSYB104K10	C 4255	(A,47,138)	CKSSYB104K10
C 4083	(B,41,90)	CKSRYB105K10	C 4256	(B,51,82)	CKSSYB104K10
C 4084	(B,40,92)	CKSRYB105K10	C 4257	(A,20,70)	CKSRYB105K10
C 4086	(B,37,94)	CKSQYB106K6R3	C 4259	(A,19,74)	CKSRYB105K10
C 4087	(B,42,98)	CKSRYB105K10	C 4260	(B,60,103)	CKSSYB104K10
C 4088	(B,37,91)	CKSSYB104K10	C 4261	(B,39,52)	CKSSYB103K16
C 4089	(B,45,101)	CKSRYB105K10	C 4265	(B,58,95)	CKSSYB104K10
C 4090	(B,44,104)	CKSRYB105K10	C 4266	(B,50,47) 100 uF	CCG1232
C 4091	(B,45,104)	CKSRYB105K10	C 4267	(A,55,39) 100 uF	CCG1232
C 4092	(A,34,89)	CCSSCH120J50	C 4269	(A,22,54)	CKSSYB103K16
C 4093	(A,35,100)	CCSSCH220J50	C 4270	(B,64,49)	CKSSYB103K16
C 4094	(A,34,96)	CCSSCH220J50	C 4271	(A,45,129)	CKSSYB104K10
C 4095	(A,34,94)	CCSSCH120J50	C 4272	(A,36,133)	CKSSYB104K10
C 4096	(B,55,91)	CKSRYB105K10	C 4273	(A,38,112)	CKSSYB104K10
C 4097	(B,51,83)	CKSRYB105K10	C 4278	(A,39,117)	CKSSYB104K10
C 4098	(B,57,82)	CKSSYB103K16	C 4361	(A,32,137)	CKSQYB106K6R3
C 4103	(B,47,88) 47 uF	CCG1251	C 4362	(A,26,135)	CKSSYB104K10
C 4104	(B,49,101)	CKSSYB104K10	C 4363	(A,27,140)	CKSSYB104K10
C 4201	(A,12,53)	CKSSYB104K10	C 4364	(A,24,142)	CKSQYB105K16
C 4202	(A,12,59)	CKSSYB104K10	C 4365	(B,12,128)	CEVW101M16
C 4204	(A,20,65)	CKSSYB104K10	C 4380	(B,26,67)	CKSRYB104K16
C 4205	(A,15,53) 10 uF	DCH1201	C 4401	(A,64,105)	CKSSYB103K16
C 4206	(A,15,58) 10 uF	DCH1201	C 4402	(A,64,104)	CKSSYB103K16
C 4208	(A,23,66) 10 uF	DCH1201	C 4403	(A,64,101)	CKSSYB103K16
C 4209	(A,15,55) 10 uF	DCH1201	C 4404	(A,64,97)	CKSSYB103K16
C 4210	(A,15,56) 10 uF	DCH1201	C 4405	(A,64,94)	CKSSYB103K16
C 4212	(A,25,66) 10 uF	DCH1201	C 4406	(A,64,85)	CKSSYB103K16
C 4213	(B,64,38)	CKSSYB104K10	C 4407	(A,79,82)	CKSQYB106K6R3
C 4214	(B,37,45)	CKSSYB104K10	C 4408	(B,71,55)	CKSRYB105K10
C 4215	(A,17,59)	CKSSYB104K10	C 4409	(A,78,102)	CKSSYB103K16
C 4216	(B,68,44)	CCSSCH101J50	C 4410	(A,78,97)	CKSSYB103K16
C 4217	(B,35,42)	CCSSCH101J50	C 4411	(A,74,81)	CKSSYB104K10
C 4218	(B,69,45)	CCSSCH102J50	C 4412	(A,78,94)	CKSSYB103K16
C 4219	(B,35,40)	CKSSYB472K50	C 4413	(B,64,107)	CKSRYB105K10
C 4222	(B,70,42)	CCSSCH470J50	C 4414	(A,79,57)	CKSSYB103K16
C 4223	(B,35,43)	CCSSCH470J50	C 4415	(A,79,59)	CKSSYB103K16
C 4224	(A,22,60)	CKSSYB392K50	C 4416	(A,79,62)	CKSSYB103K16
C 4227	(B,62,38) 10 uF	DCH1201	C 4417	(A,78,65)	CKSSYB103K16

Circuit Symbol and No.		Part No.
C 4418	(A,78,69)	CKSSYB103K16
C 4419	(A,78,78)	CKSSYB103K16
C 4420	(A,76,54)	CKSQYB106K6R3
C 4421	(A,72,55)	CKSRYB105K10
C 4422	(A,64,61)	CKSSYB103K16
C 4423	(A,64,65)	CKSSYB103K16
C 4424	(A,71,54)	CKSSYB104K10
C 4425	(A,64,69)	CKSSYB103K16
C 4426	(A,75,82)	CKSRYB105K10
C 4427	(B,78,106)	CKSSYB103K16
C 4428	(B,78,103)	CKSSYB103K16
C 4429	(B,78,100)	CKSSYB103K16
C 4430	(B,78,97)	CKSSYB103K16
C 4431	(B,78,94)	CKSSYB103K16
C 4432	(B,78,85)	CKSSYB103K16
C 4433	(B,69,107)	CKSQYB106K6R3
C 4435	(B,64,102)	CKSSYB103K16
C 4436	(B,64,98)	CKSSYB103K16
C 4437	(A,51,76)	CKSSYB104K10
C 4438	(B,63,106)	CKSSYB104K10
C 4439	(B,64,94)	CKSSYB103K16
C 4441	(A,52,76)	CKSRYB105K10
C 4442	(B,64,56)	CKSSYB103K16
C 4443	(B,64,58)	CKSSYB103K16
C 4444	(B,64,62)	CKSSYB103K16
C 4445	(B,64,66)	CKSSYB103K16
C 4446	(B,64,69)	CKSSYB103K16
C 4447	(B,65,79)	CKSSYB103K16
C 4448	(B,67,54)	CKSQYB106K6R3
C 4450	(B,78,60)	CKSSYB103K16
C 4451	(B,78,65)	CKSSYB103K16
C 4452	(B,72,54)	CKSSYB104K10
C 4453	(B,78,69)	CKSSYB103K16
C 4455	(A,28,65)	CKSSYB104K10
C 4456	(A,27,71)	CKSSYB104K10
C 4457	(A,30,70)	CKSQYB106K6R3
C 4458	(A,32,71)	CKSSYB104K10
C 4459	(A,40,70)	CKSSYB104K10
C 4511	(A,43,124)	CKSSYB105K6R3
C 4512	(A,46,122)	CKSRYB105K10
C 4513	(A,41,124)	CKSSYB104K10
C 4514	(A,42,123)	CKSSYB104K10
C 4515	(A,40,124)	CKSSYB104K10
C 4516	(A,42,121)	CKSSYB104K10
C 4517	(A,41,119)	CKSSYB104K10
C 4518	(A,44,121)	CKSSYB104K10
C 4519	(A,43,121)	CKSSYB104K10
C 4520	(A,39,122)	CKSSYB104K10
C 4521	(A,40,121)	CKSSYB104K10
C 4522	(A,39,124)	CKSRYB105K10
C 4607	(A,56,113)	CKSSYB104K10
C 4608	(A,57,111)	CKSSYB104K10
C 4609	(A,50,126)	CKSRYB104K50
C 4613	(B,41,59)	CKSSYB473K16
C 4614	(A,43,142)	CKSSYB104K10
C 4621	(B,60,57)	CKSSYB473K16
C 4622	(B,58,53)	CKSSYB473K16
C 4623	(B,49,51)	CKSSYB473K16
C 4624	(B,41,54)	CKSSYB473K16
C 4625	(B,49,70)	CKSSYB473K16

Circuit Symbol and No.		Part No.
C 4626	(B,56,70)	CKSSYB473K16
C 4651	(B,44,82)	CKSSYB104K10
C 4653	(B,31,87) 4.7 uF	CCG1201
C 4661	(B,32,76) 4.7 uF	CCG1201
C 4662	(B,36,79) 4.7 uF	CCG1201
C 4665	(B,37,82) 4.7 uF	CCG1201
C 4666	(B,24,78) 4.7 uF	CCG1201
C 4667	(B,28,87) 4.7 uF	CCG1201
C 4668	(B,29,74)	CKSRYB105K10
C 4670	(B,25,83) 4.7 uF	CCG1201
C 4671	(B,24,80) 4.7 uF	CCG1201
C 4701	(B,27,57)	CKSSYB104K10
C 4781	(B,37,78) 10 uF	CCG1234
C 4784	(B,60,69)	CKSRYB105K10
C 4785	(A,51,128)	CKSRYB105K10
C 4786	(B,40,64)	CKSRYB105K10
C 4803	(B,29,123)	CKSSYB103K16
C 4804	(B,26,123)	CKSSYB103K16
C 4805	(B,25,123)	CKSSYB103K16
C 4806	(B,23,123)	CKSSYB103K16
C 4807	(B,23,126)	CKSSYB103K16
C 4808	(B,21,123)	CKSSYB103K16
C 4809	(B,29,123)	CKSSYB103K16
C 4810	(B,27,121)	CKSSYB103K16
C 4811	(B,29,122)	CKSSYB103K16
C 4812	(B,28,123)	CKSSYB103K16
C 4813	(B,28,121)	CKSSYB103K16
C 4814	(B,27,121)	CKSSYB103K16
C 4815	(B,29,121)	CKSSYB103K16
C 4816	(B,27,119)	CKSSYB103K16
C 4817	(B,27,119)	CKSSYB103K16
C 4818	(B,28,119)	CKSSYB103K16
C 4819	(B,30,119)	CKSSYB103K16
C 4820	(B,30,121)	CKSSYB103K16
C 4821	(B,30,119)	CKSSYB103K16
C 4822	(B,30,118)	CKSSYB104K10
C 4823	(B,29,115)	CKSSYB104K10
C 4824	(B,28,117)	CKSSYB104K10
C 4825	(B,29,117)	CKSSYB104K10
C 4826	(B,28,115)	CKSSYB104K10
C 4827	(B,27,117)	CKSSYB104K10
C 4828	(B,28,114)	CKSSYB104K10
C 4829	(A,34,122)	CKSSYB104K10
C 4830	(A,36,121)	CKSSYB104K10
C 4831	(A,34,121)	CKSSYB104K10
C 4832	(A,34,120)	CKSSYB104K10
C 4833	(A,34,118)	CKSSYB104K10
C 4834	(A,34,119)	CKSSYB104K10
C 4835	(A,34,116)	CKSSYB104K10
C 4836	(A,34,117)	CKSSYB104K10
C 4837	(B,28,113)	CKSSYB103K16
C 4838	(B,26,123)	CKSSYB103K16
C 4839	(B,26,122)	CKSSYB103K16
C 4840	(B,25,123)	CKSSYB103K16
C 4841	(B,25,122)	CKSSYB103K16
C 4842	(B,23,122)	CKSSYB103K16
C 4843	(B,23,122)	CKSSYB103K16
C 4844	(B,22,122)	CKSSYB103K16
C 4845	(B,21,122)	CKSSYB103K16
C 4846	(B,22,121)	CKSSYB103K16

Circuit Symbol and No.		Part No.
C 4847	(B,23,121)	CKSSYB103K16
C 4848	(B,21,121)	CKSSYB103K16
C 4849	(B,20,121)	CKSSYB103K16
C 4850	(B,20,119)	CKSSYB103K16
C 4851	(B,20,118)	CKSSYB103K16
C 4852	(B,22,118)	CKSSYB103K16
C 4853	(B,21,119)	CKSSYB103K16
C 4854	(B,22,119)	CKSSYB103K16
C 4855	(B,23,119)	CKSSYB103K16
C 4856	(B,20,116)	CKSSYB103K16
C 4857	(B,21,114)	CKSSYB103K16
C 4858	(B,21,116)	CKSSYB103K16
C 4859	(B,22,116)	CKSSYB103K16
C 4860	(B,22,114)	CKSSYB103K16
C 4861	(B,23,116)	CKSSYB103K16
C 4862	(B,23,118)	CKSSYB103K16
C 4863	(B,23,116)	CKSSYB103K16
C 4864	(B,24,118)	CKSSYB103K16
C 4865	(B,24,116)	CKSSYB103K16
C 4866	(B,25,117)	CKSSYB103K16
C 4867	(B,26,118)	CKSSYB103K16
C 4868	(B,25,119)	CKSSYB103K16
C 4869	(B,25,115)	CKSSYB103K16
C 4870	(B,24,114)	CKSSYB103K16
C 4871	(B,24,114)	CKSSYB103K16
C 4872	(B,25,114)	CKSSYB103K16
C 4901	(B,29,124)	CKSSYB103K16
C 4902	(B,26,124)	CKSSYB103K16
C 4903	(B,25,124)	CKSSYB103K16
C 4904	(B,23,124)	CKSSYB103K16
C 4905	(B,22,126)	CKSSYB103K16
C 4906	(B,21,124)	CKSSYB103K16
C 4912	(A,35,117)	CKSSYB104K10
C 4913	(B,30,115)	CKSSYB104K10
C 4914	(B,30,115)	CKSSYB104K10
C 4915	(B,30,113)	CKSSYB104K10
C 4916	(B,30,116)	CKSSYB104K10
C 4917	(B,30,117)	CKSSYB104K10
C 4918	(B,32,113)	CKSSYB474K6R3
C 4920	(A,17,115)	CCSSCH101J50
C 4921	(A,34,77)	CKSQYB106K6R3
C 4922	(A,16,83)	CKSQYB106K6R3
C 4924	(A,18,82)	CKSQYB106K6R3
C 4925	(A,23,82)	CKSSYB333K16
C 4926	(A,24,81)	CKSSYB104K10
C 4928	(A,24,83)	CKSSYB104K10
C 4929	(A,24,83)	CKSSYB104K10
C 4931	(A,24,85)	CKSSYB104K10
C 4932	(A,29,88)	CCSSCH7R0D50
C 4933	(A,26,86)	CKSSYB333K16
C 4938	(A,30,85)	CKSSYB104K10
C 4939	(A,28,88)	CCSSCH7R0D50
C 4943	(A,20,78)	CKSQYB106K6R3
C 4944	(A,22,78)	CKSQYB106K6R3
C 4963	(B,29,108)	CKSQYB106K6R3
C 4964	(B,30,110)	CKSSYB103K16
C 4982	(B,30,128) 47 uF	CCG1251
C 4983	(B,29,125)	CKSSYB103K16
C 4985	(B,27,112)	CKSSYB103K16
C 4986	(B,25,111)	CKSQYB106K6R3

Circuit Symbol and No.		Part No.
C 4987	(B,19,120)	CKSQYB106K6R3
C 4988	(A,31,111)	CKSSYB103K16
C 4989	(A,34,111)	CCSSCH4R0C50
C 4990	(A,30,108)	CCSSCH100D50
C 4991	(A,26,109)	CCSSCH100D50
C 4993	(B,29,126)	CKSRYB105K10
C 5129	(A,11,46)	CKSRYB103K50
C 5130	(A,13,38)	CKSRYB104K16
C 5451	(A,34,35) 4.7 uF	CCG1201
C 5452	(A,40,35) 4.7 uF	CCG1201
C 5453	(A,33,44)	CCSRCH391J50
C 5454	(A,44,43)	CCSRCH391J50
C 5455	(A,40,42)	CCSRCH221J50
C 5456	(A,37,42)	CCSRCH221J50
C 5460	(A,43,48)	CKSRYB104K16
C 5471	(A,33,47) 4.7 uF	CCG1201
C 5472	(A,45,47) 4.7 uF	CCG1201
C 5629	(A,78,132)	CKSQYB104K25
C 5630	(A,73,119)	CKSRYB105K16
C 5631	(A,78,120)	CCSSCH470J50
C 5632	(A,70,141) 10 uF	CCG1223
C 5634	(A,68,138)	CKSSYB102K50
C 5635	(A,70,119) 2.2 uF	CCG1205
C 5637	(A,61,118) 10 uF	CCG1236
C 5642	(B,29,133) 10 uF	DCH1201
C 5643	(B,29,135) 10 uF	DCH1201
C 5644	(B,29,137) 10 uF	DCH1201
C 5647	(A,66,115) 10 uF	CCG1236
C 5651	(A,74,141)	CKSRYB473K50
C 5652	(A,74,139)	CKSRYB473K50
C 5653	(A,74,138)	CKSRYB473K50
C 5654	(A,74,137)	CKSRYB473K50
C 5666	(A,35,25) (UC,EU5)	CCSRCH471J50
C 5667	(A,33,28) (UC,EU5)	CCSRCH680J50
C 5668	(A,31,27)	CKSRYB104K16
C 5672	(A,41,22)	CKSRYB105K10
C 5673	(A,33,17) (UC,EU5)	CCSRCH471J50
C 5674	(A,35,14) (UC,EU5)	CCSRCH821J50
C 5678	(A,27,14) (UC,EU5)	CKSRYB473K50
C 5679	(A,29,16) (UC,EU5)	CKSRYB473K50
C 5684	(A,36,32) (UC,EU5)	CKSRYB105K10
C 5685	(A,35,20) (UC,EU5)	CKSRYB105K10
C 5686	(A,32,13) (UC,EU5)	CKSRYB104K16
C 5697	(A,30,77)	CKSSYB104K10
C 5698	(A,39,28)	CKSRYB104K16
C 5699	(A,28,26) (UC,EU5)	CCSSCH221J50
C 5700	(A,26,24) 10 uF(UC,EU5)	DCH1201
C 5701	(A,24,24) 10 uF(UC,EU5)	DCH1201
C 5702	(A,30,27) (UC,EU5)	CCSSCH221J50

G

Unit Number : EXX2001
Unit Name : PCB Unit(Service)

MISCELLANEOUS

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch	CSN1067
S 102	Switch	CSN1068

Circuit Symbol and No.		Part No.
CN101	Connector	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

CAPACITORS

C 101	CEVW220M16
C 102	CKSRYB104K16

Miscellaneous Parts List

	Pickup Unit(Service)	CXX2398
M 1	Motor Unit(LOAD/CRG)	CXC4026
M 2	Motor(SPINDLE)	EXM1050