


2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

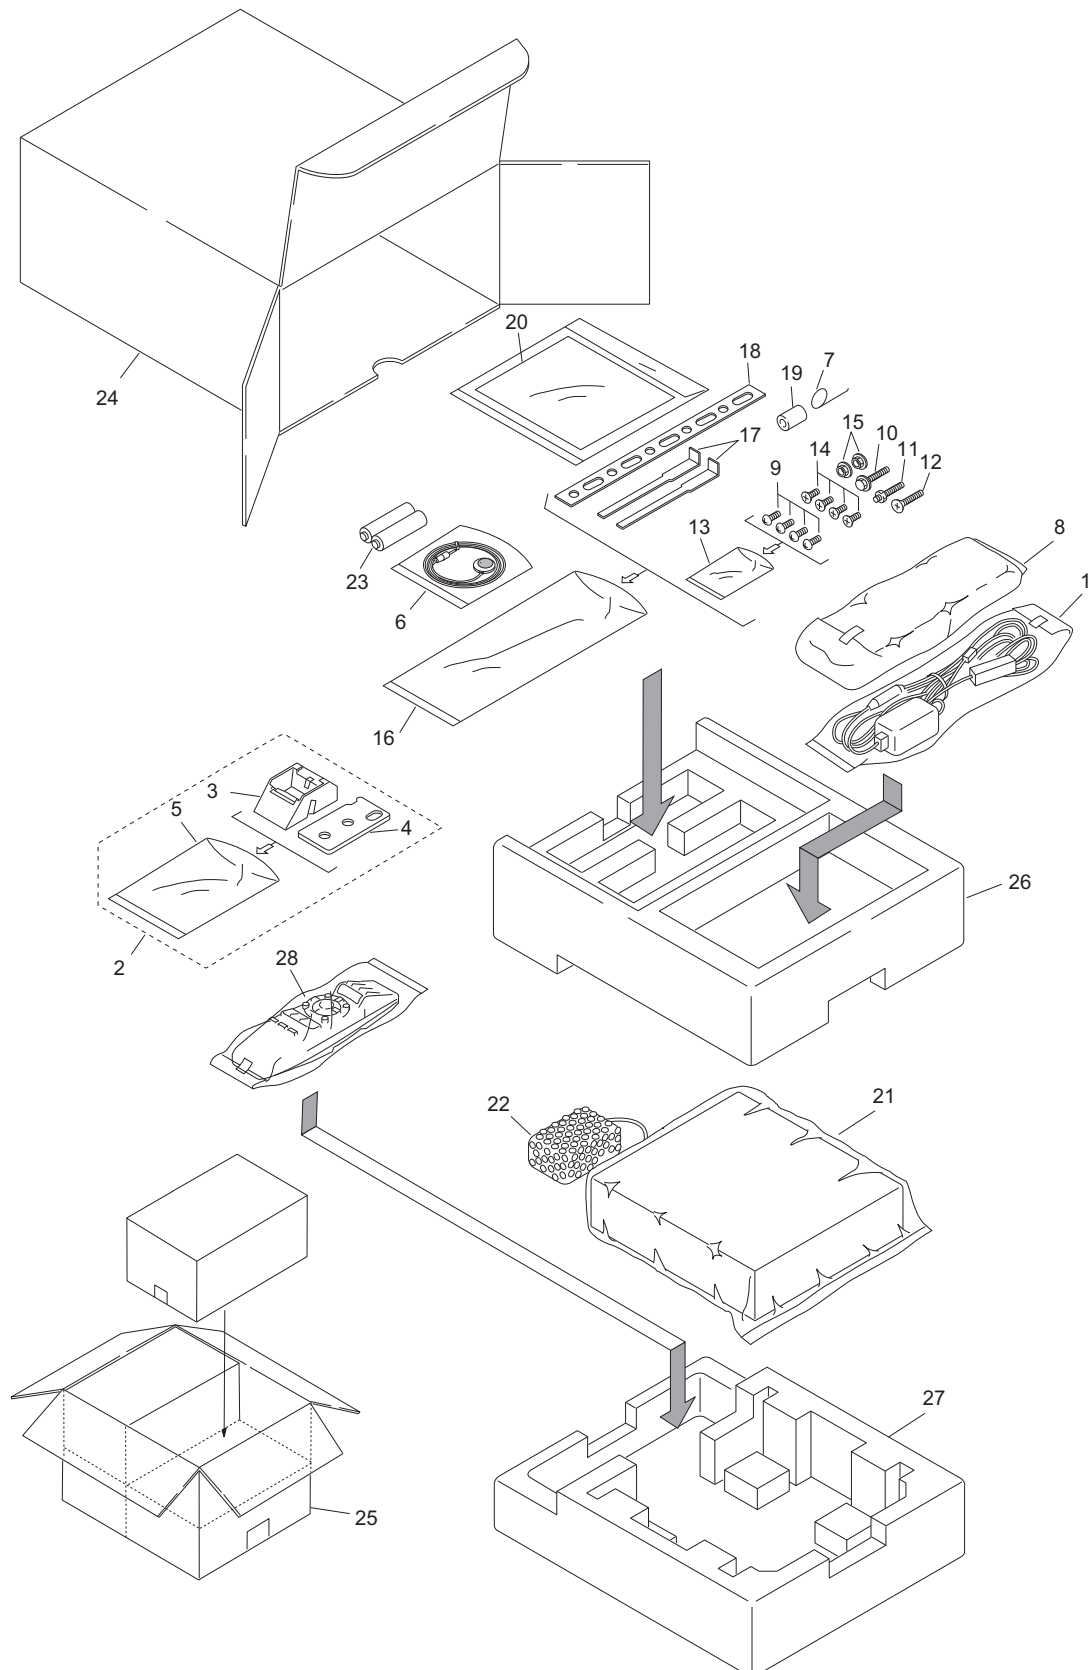

NOTE:

- Parts marked by “*” are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ∇ mark on the product are used for disassembly.


● PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.		
			DEH-P920R/UC	DEH-P9200R/UC	DEH-P9250/ES
	1	Cord Assy	CDE6336	CDE6336	CDE6336
	2	Base Assy	CEA2426	CEA2426	CEA2426
*	3	Base	CNS5031	CNS5031	CNS5031
*	4	Sheet	CZA3371	CZA3371	CZA3371
	5	Polyethylene Bag	CZE3188	CZE3188	CZE3188
	6	Microphone Assy	CPM1022	Not used	CPM1022
	7	Spring	CBH-865	CBH-865	CBH-865
	8	Case Assy	CXB3520	CXB3520	CXB3520
	9	Screw	BMZ50P060FMC	BMZ50P060FMC	BMZ50P060FMC
	10	Screw	CBA-102	CBA-102	Not used
	11	Screw	CBA1002	CBA1002	CBA1002
	12	Screw	CBA1120	CBA1120	CBA1120
*	13	Polyethylene Bag	CEG-127	CEG-127	CEG-127
	14	Screw	CMZ50P060FMC	CMZ50P060FMC	CMZ50P060FMC
	15	Nut	NF50FMC	NF50FMC	Not used
*	16	Polyethylene Bag	CEG-158	CEG-158	CEG-158
	17	Handle	CNC5395	CNC5395	CNC5395
	18	Strap	CNC5402	CNC5402	Not used
	19	Bush	CNV1917	CNV1917	CNV1917
	20-1	Polyethylene Bag	CEG1116	CEG1116	CEG1116
	20-2	Owner's Manual	CRD3211	CRD3220	CRD3213
	20-3	Owner's Manual	Not used	Not used	CRD3214
	20-4	Installation Manual	CRD3212	CRD3221	CRD3215
*	20-5	Caution Card	CRP1207	CRP1207	CRP1207
*	20-6	Warranty Card	CRY1070	Not used	Not used
*	20-7	Label	CRW1343	CRW1343	Not used
*	20-8	Card	Not used	ARY1048	Not used
	21	Polyethylene Bag	CEG1185	CEG1185	* CEG1088(Cover)
	22	Air Cushioned Bag	CEG1192	Not used	CEG1192
	23	Battery	CEX1006	CEX1006	CEX1006
	24	Carton	CHG4039	CHG4040	CHG4038
	25	Contain Box	CHL4039	CHL4040	CHL4038
	26	Protector	CHP2032	CHP2032	CHP2032
	27	Protector	CHP2033	CHP2033	CHP2033
	28	Remote Control Assy	CXB3875	CXB3875	CXB3875

● Owner's Manual, Installation Manual

Model	Part No.	Language
DEH-P920R/UC	CRD3211	English, French
	CRD3112	English, French
DEH-P9200R/UC	CRD3220	English, French
	CRD3221	English, French
DEH-P9250/ES	CRD3213	English, Spanish
	CRD3214	Portuguese(B), Arabic
	CRD3115	English, Spanish, Portuguese(B), Arabic

2.2 EXTERIOR(DEH-P920R/UC, DEH-P9250/ES)

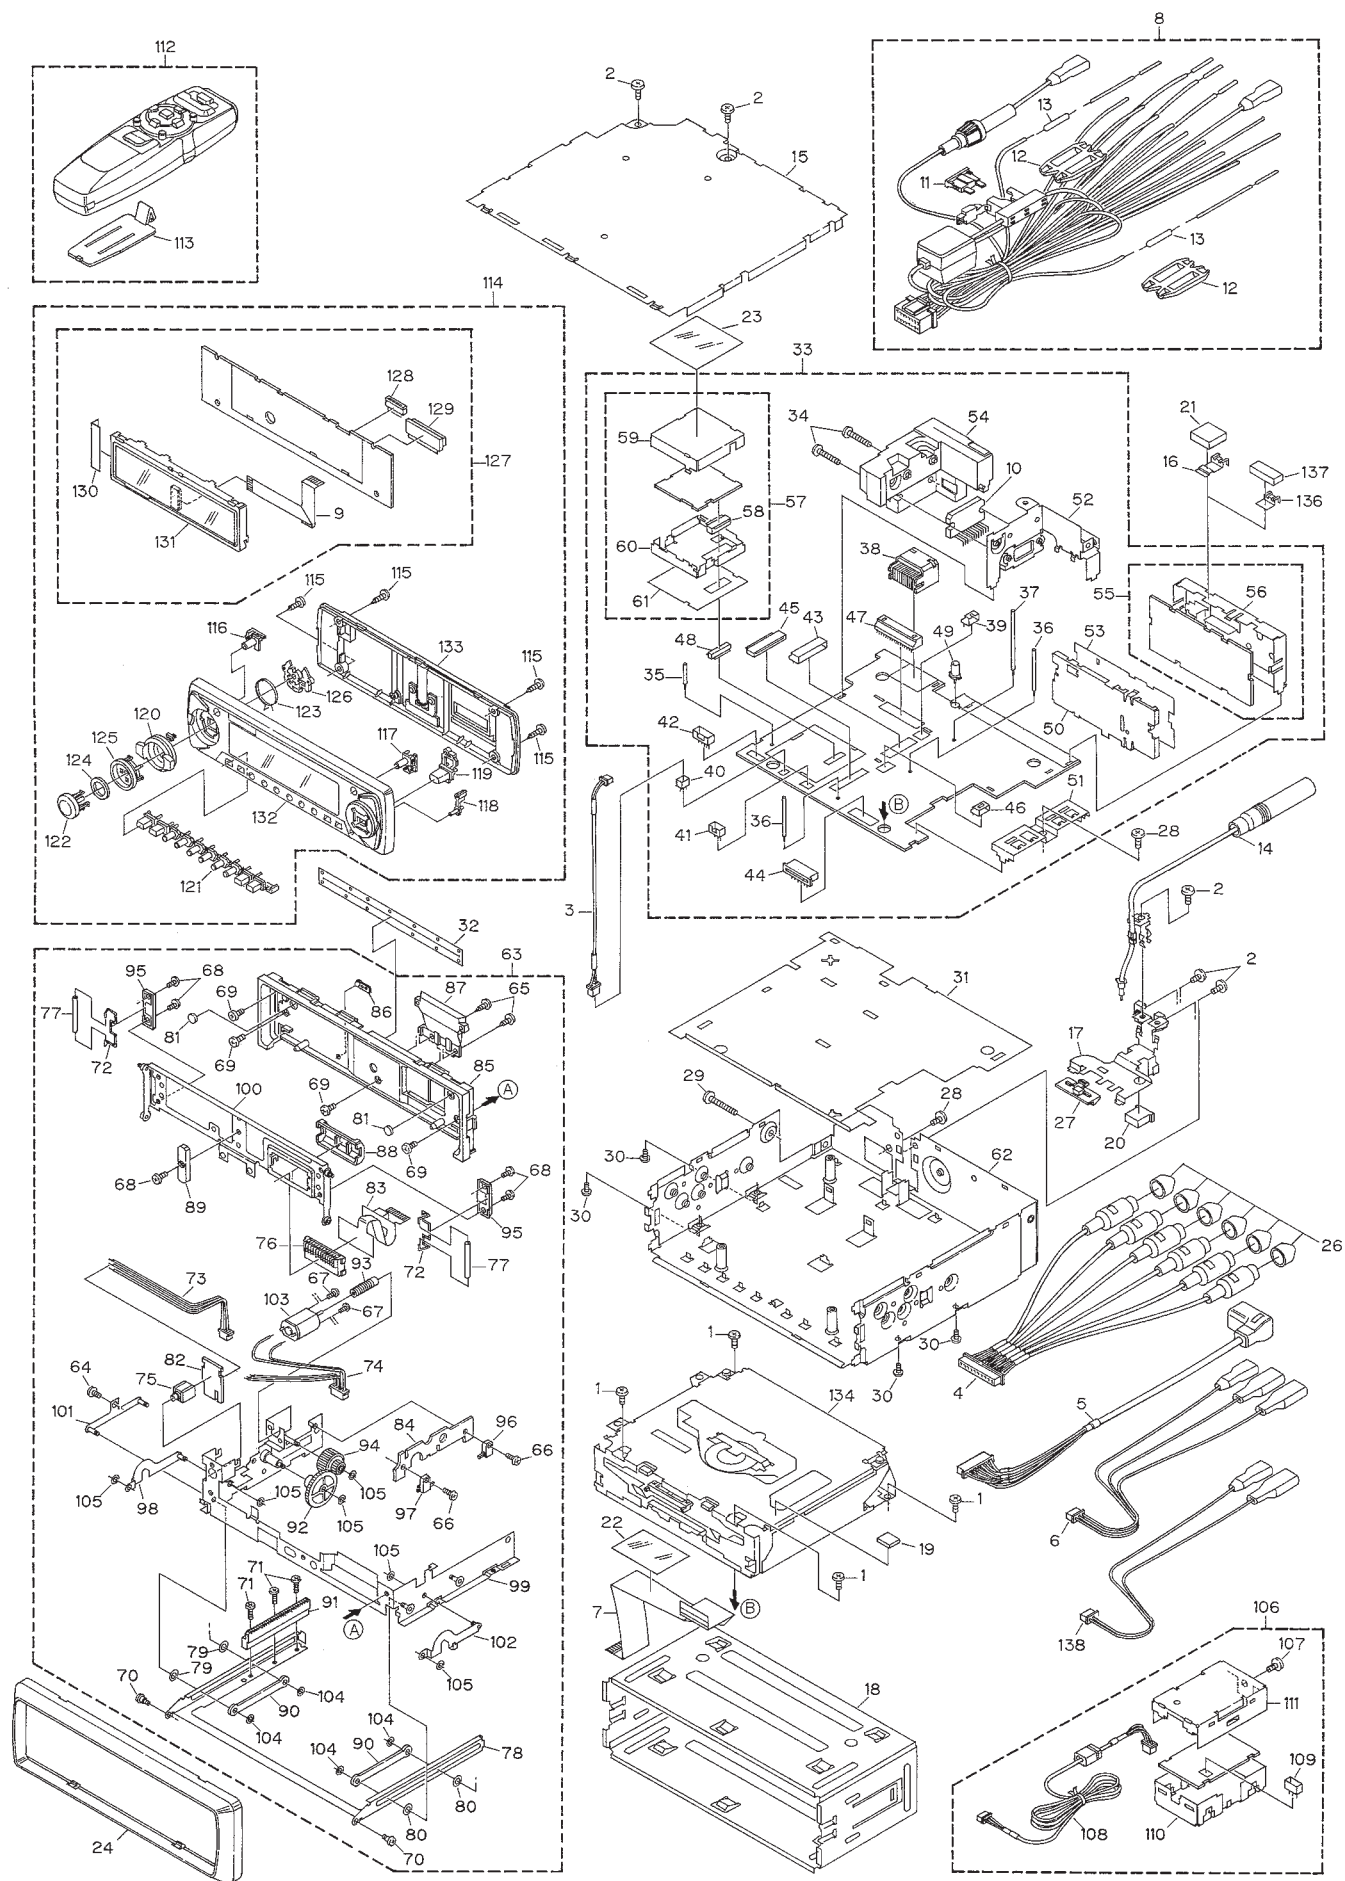

(1) EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
	1 Screw	BSZ26P060FMC		46 Connector(CN681)	CKS3597
	2 Screw	BSZ30P050FMC		47 Connector(CN351)	CKS3606
	3 Cord	CDE5536		48 Connector(CN252)	CKS3781
	4 Cord Assy	CDE5840		49 Mini Pin Jack(CN451)	CKX1046
	5 Cord Assy	CDE5842		50 Holder	See Contrast table(2)
	6 Cord Assy	See Contrast table(2)		51 Holder	CNC8168
	7 Connector	CDE5846		52 Holder	CNC8169
	8 Cord Assy	CDE6336		53 Insulator	See Contrast table(2)
*	9 PCB	CNP5508		54 Heat Sink	CNR1535
	10 IC(IC301)	PAL005A		55 FM/AM Tuner Unit	CWE1501
	11 Fuse(10A)	CEK1136		56 Holder	CNC7532
	12 Cap	CNS1472		57 DSP Unit	CWX2323
	13 Resistor	RS1/2PMF102J		58 Connector(CN3001)	CKS3782
	14 Antenna Cable	CDH1256		59 Case	CNC8166
	15 Case	CNB2426		60 Case	CNC8167
	16 Earth Plate	See Contrast table(2)		61 Insulator	CNM6130
	17 Holder	CNC8170		62 Chassis Unit	CXB3556
	18 Holder	CNC8659		63 Panel Assy	CXB5801
	19 Cushion	CNM6065		64 Screw	BMZ20P030FMC
	20 Cushion	CNM6387		65 Screw	BPZ20P060FMC
	21 Spacer	See Contrast table(2)		66 Screw(M2x7)	CBA1060
	22 Insulator	CNM6897		67 Screw(M2x3)	CBA1061
	23 Insulator	CNM6898		68 Screw(M2x3)	CBA1082
	24 Panel	See Contrast table(2)		69 Screw(M2x3)	CBA1154
	25			70 Screw(M2x1.5)	CBA1430
	26 Cap	CNV2680		71 Screw(M1.4x4)	CBA1454
	27 Holder	CNV6396		72 Spring	CBH2130
	28 Screw	BSZ30P050FMC		73 Cord	CDE5856
	29 Screw	BSZ30P200FMC		74 Cord	CDE5960
	30 Screw(M2x2.5)	CBA1447		75 Mini Jack(CN4602)	CKN1015
	31 Insulator	CNM6135		76 Connector	CKS3997
	32 Cover	CNM6489		77 Roller	CLA3583
	33 Tuner Amp Unit	See Contrast table(2)		78 Frame	CNC8201
	34 Screw	BMZ26P160FMC		79 Spacer	CNM6155
	35 Clamper	CEF1004		80 Spacer	CNM6156
	36 Clamper	CEF1008		81 Spacer	CNM6419
	37 Clamper	CEF1009		82 PCB	CNP5341
	38 Plug(CN901)	CKM1278		83 PCB	CNP5355
	39 Plug(CN141)	CKS-766		84 PCB	CNP5941
	40 Plug(CN251)	CKS-783		85 Panel	CNS5232
	41 Plug(CN131)	CKS-784			
	42 Plug(CN851)	CKS-786			
*	43 Plug(CN101)	CKS1058	*	86 Lighting Conductor	CNV5391
	44 Connector(CN801)	CKS1532		87 Lighting Conductor	CNV5605
	45 Connector(CN991)	CKS1960		88 Cover	CNV5610
				89 Guide	CNV5672
				90 Guide	CNV5696

Mark No.	Description	Part No.	Mark No.	Description	Part No.
91	Rack	CNV5697	116	Button(DISP)	CAC6511
92	Gear	CNV5698	117	Button(OPEN)	CAC6512
93	Gear	CNV5761	118	Button(RESET)	CAC6513
94	Torque Limiter Unit	CNV5762	119	Button(BAND)	CAC6515
95	Holder	CNV5763	120	Knob(EQ)	CAC6732
96	Switch(S951)	CSN1012	121	Button(1-6)	See Contrast table(2)
97	Switch(S952)	CSN1022	122	Button(SOURCE)	See Contrast table(2)
98	Arm Unit	CXB3574	123	Spring	CBH2415
99	Frame Unit	CXB3575	124	Cushion	CNM6767
100	Holder Unit	CXB3576	125	Lighting Conductor	CNV6214
101	Bracket Unit	CXB3577	126	Lighting Conductor	CNV6215
102	Arm Unit	CXB3866	127	Keyboard Unit	CWM7064
103	Motor(M951)	CXM1085	128	Connector(CN1902)	CKS3995
104	Washer	2-1816-0035-D2-00	129	Connector(CN1901)	CKS3996
105	Washer	2-1821-0045-D2-00	130	Insulator	CNM6775
106	ASL Unit	CWX2322	131	OEL Module	MXK8002
107	Screw	BSZ30P050FMC	132	Grille Unit	See Contrast table(2)
108	Cord Assy	CDE5845	133	Cover Unit	See Contrast table(2)
109	Plug(CN4501)	CKS-784	134	CD Mechanism Module(S8)	CXK5252
110	Case	CNB2299	135		
111	Case	CNB2300	136	Holder	See Contrast table(2)
112	Remote Control Assy	CXB3875	137	Cushion	See Contrast table(2)
113	Battery Cover	CNS5032	138	Cord Assy	See Contrast table(2)
114	Detach Grille Assy	See Contrast table(2)			
115	Screw	BPZ20P080FZK			

(2) CONTRAST TABLE

DEH-P920R/UC and DEH-P9250/ES are constructed same except for the following:

Mark No.	Description	Part No.	
		DEH-P920R/UC	DEH-P9250/ES
6	Cord Assy	CDE5843	Not used
16	Earth Plate	CNC7358	Not used
21	Spacer	CNM6482	Not used
24	Panel	CNS5256	CNS5548
33	Tuner Amp Unit	CWM6214	CWM6126
50	Holder	CNC7533	Not used
53	Insulator	CNM5967	Not used
114	Detach Grille Assy	CXB5456	CXB5457
121	Button(1-6)	CAC6722	CAC6723
122	Button(SOURCE)	CAC6719	CAC6718
132	Grille Unit	CXB5330	CXB5331
133	Cover Unit	CXB5339	CXB5340
136	Holder	Not used	CNC6469
137	Cushion	Not used	CNM4870
138	Cord Assy	Not used	CDE5844




● EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw	BSZ26P060FMC		46	*****	
	2	Screw	BSZ30P050FMC		47	Connector(CN351)	CKS3606
	3	*****			48	*****	
	4	Cord Assy	CDE5840		49	Mini Pin Jack(CN451)	CKX1046
	5	Cord Assy	CDE5842		50	Holder	CNC7533
	6	*****			51	Holder	CNC8168
	7	Connector	CDE5846		52	Holder	CNC8169
	8	Cord Assy	CDE6336		53	Insulator	CNM5967
*	9	PCB	CNP5508		54	Heat Sink	CNR1535
	10	IC(IC301)	PAL005A		55	FM/AM Tuner Unit	CWE1501
	11	Fuse(10A)	CEK1136		56	Holder	CNC7532
	12	Cap	CNS1472		57	*****	
	13	Resistor	RS1/2PMF102J		58	*****	
	14	Antenna Cable	CDH1256		59	*****	
	15	Case	CNB2426		60	*****	
	16	Earth Plate	CNC7358		61	*****	
	17	Holder	CNC8170		62	Chassis Unit	CXB3556
	18	Holder	CNC8659		63	Panel Assy	CXB3580
	19	Cushion	CNM6065		64	Screw	BMZ20P030FMC
	20	Cushion	CNM6132		65	Screw	BPZ20P060FMC
	21	Spacer	CNM6482		66	Screw(M2x7)	CBA1060
	22	Insulator	CNM6897		67	Screw(M2x3)	CBA1061
	23	*****			68	Screw(M2x3)	CBA1082
	24	Panel	CNS5256		69	Screw(M2x3)	CBA1154
	25	*****			70	Screw(M2x1.5)	CBA1430
	26	Cap	CNV2680		71	Screw(M1.4x4)	CBA1454
	27	Holder	CNV6396		72	Spring	CBH2130
	28	Screw	BSZ30P050FMC		73	*****	
	29	Screw	BSZ30P200FMC		74	Cord	CDE5960
	30	Screw(M2x2.5)	CBA1447		75	*****	
	31	Insulator	CNM6135		76	Connector	CKS3997
	32	Cover	CNM6489		77	Roller	CLA3583
	33	Tuner Amp Unit	CWM6222		78	Frame	CNC8201
	34	Screw	BMZ26P160FMC		79	Spacer	CNM6155
	35	Clamper	CEF1004		80	Spacer	CNM6156
	36	*****			81	Spacer	CNM6419
	37	Clamper	CEF1009		82	*****	
	38	Plug(CN901)	CKM1278		83	PCB	CNP5355
	39	*****			84	PCB	CNP5321
	40	*****			85	Panel	CNS5247
	41	*****		*	86	Lighting Conductor	CNV5391
	42	Plug(CN851)	CKS-786		87	Lighting Conductor	CNV5605
*	43	Plug(CN101)	CKS1058		88	Cover	CNV5610
	44	Connector(CN801)	CKS1532		89	Guide	CNV5672
	45	Connector(CN991)	CKS1960		90	Guide	CNV5696

Mark No.	Description	Part No.
91	Rack	CNV5697
92	Gear	CNV5698
93	Gear	CNV5761
94	Torque Limiter Unit	CNV5762
95	Holder	CNV5763
96	Switch(S951)	CSN1012
97	Switch(S952)	CSN1022
98	Arm Unit	CXB3574
99	Frame Unit	CXB3575
100	Holder Unit	CXB3576
101	Bracket Unit	CXB3577
102	Arm Unit	CXB3866
103	Motor(M951)	CXM1085
104	Washer	2-1816-0035-D2-00
105	Washer	2-1821-0045-D2-00
106		
107		
108		
109		
110		
111		
112	Remote Control Assy	CXB3875
113	Battery Cover	CNS5032
114	Detach Grille Assy	CXB5459
115	Screw	BPZ20P080FZK
116	Button(DISP)	CAC6511
117	Button(OPEN)	CAC6512
118	Button(RESET)	CAC6513
119	Button(BAND)	CAC6515
120	Knob(EQ)	CAC6732
121	Button(1-6)	CAC6722
122	Button(SOURCE)	CAC6719
123	Spring	CBH2415
124	Cushion	CNM6767
125	Lighting Conductor	CNV6214
126	Lighting Conductor	CNV6215
127	Keyboard Unit	CWM7064
128	Connector(CN1902)	CKS3995
129	Connector(CN1901)	CKS3996
130	Insulator	CNM6775
131	OEL Module	MXK8002
132	Grille Unit	CXB5333
133	Cover Unit	CXB5339
134	CD Mechanism Module(S8)	CXK5251

2.4 CD MECHANISM MODULE

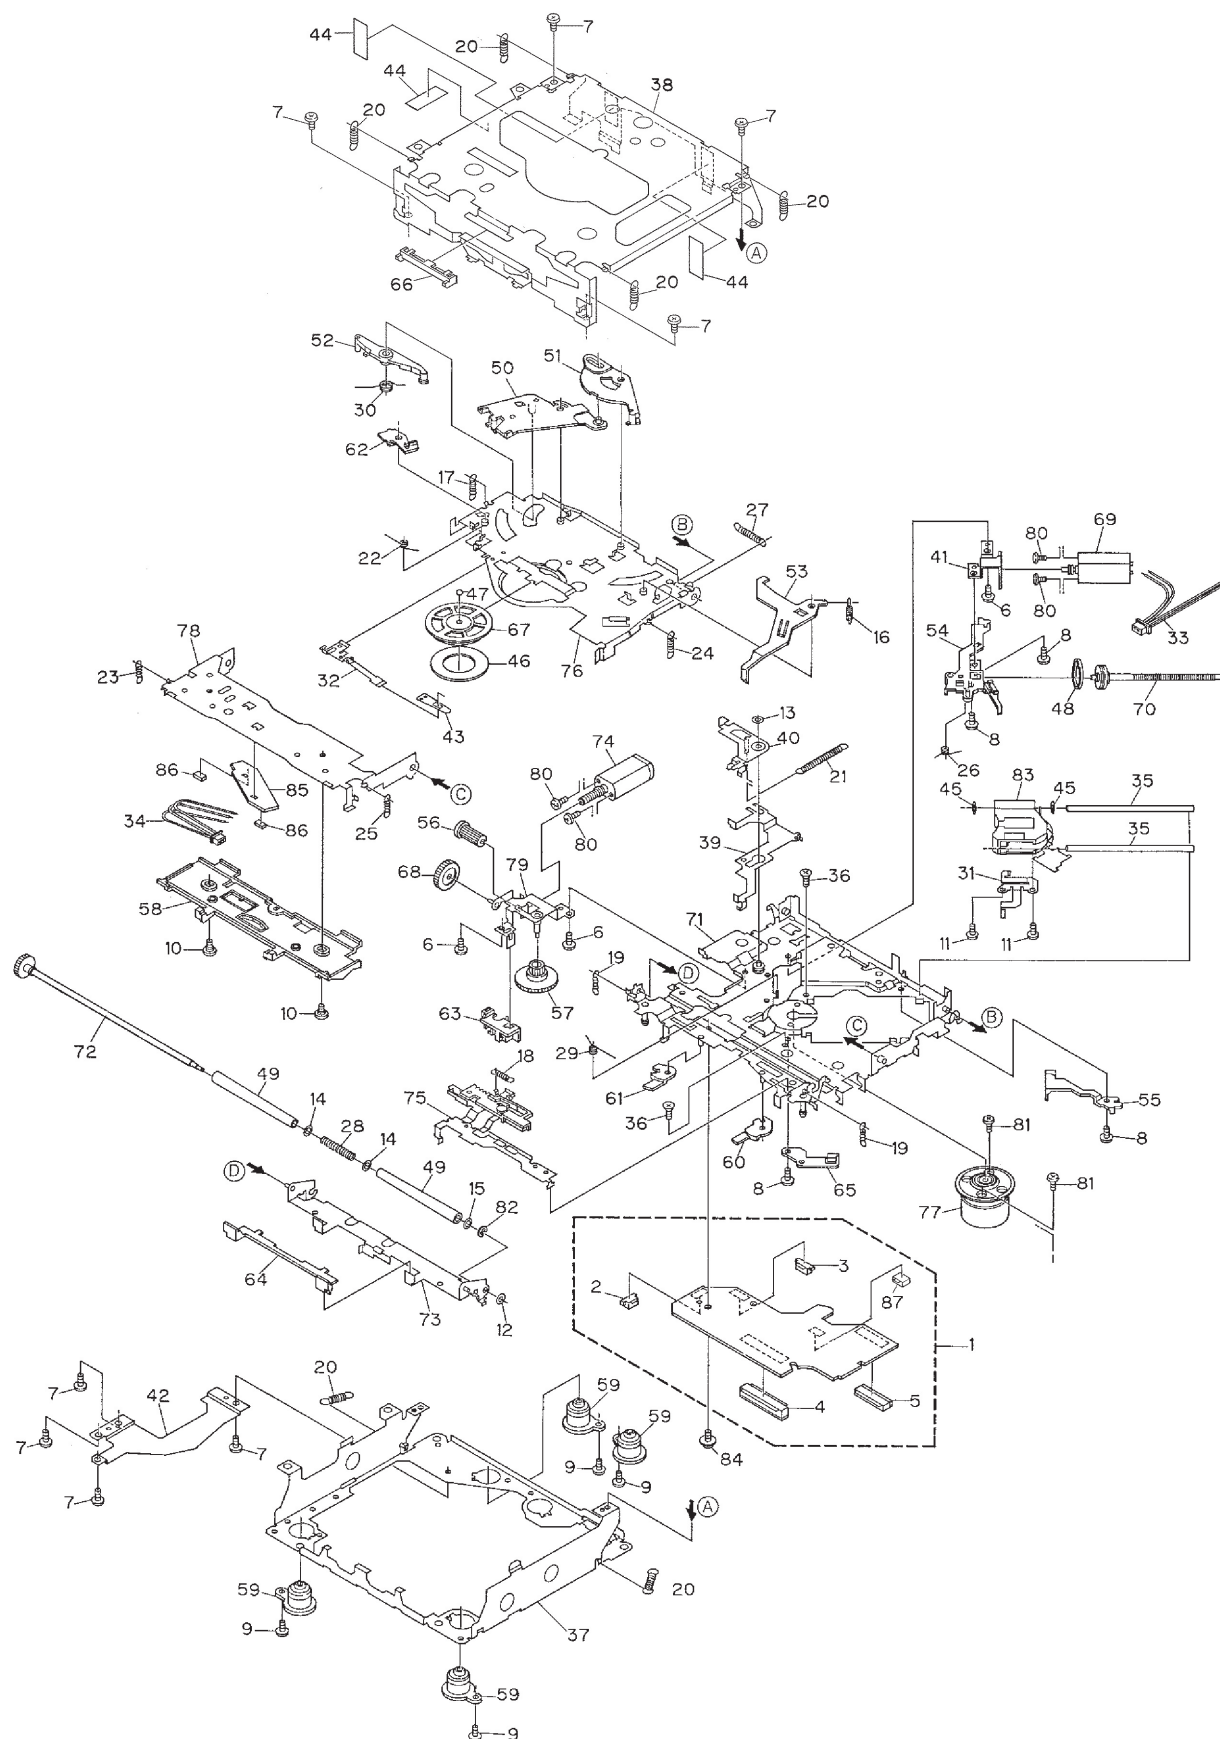

(1) CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Control Unit	See Contrast table(2)	46	Sheet	CNM6215
2	Connector(CN802)	CKS2192	47	Ball	CNR1189
3	Connector(CN801)	CKS2193	48	Belt	CNT1086
4	Connector(CN701)	CKS2771	49	Roller	CNV4509
5	Connector(CN101)	CKS3486	50	Arm	CNV5246
6	Screw	BMZ20P030FZK	51	Arm	CNV5247
7	Screw	BSZ20P040FZK	52	Arm	CNV5248
8	Screw(M2×3)	CBA1077	53	Arm	CNV5249
9	Screw(M2×6)	CBA1489	54	Guide	CNV5254
10	Screw	CBA1243	55	Guide	CNV5255
11	Screw(M2×4)	CBA1362	56	Gear	CNV5257
12	Washer	CBF1037	57	Gear	CNV5256
13	Washer	CBF1038	58	Guide	CNV6176
14	Washer	CBF1060	59	Damper	CNV5266
* 15	Washer	CBF1075	60	Arm	CNV5359
16	Spring	CBH2079	61	Arm	CNV5360
17	Spring	CBH2117	62	Arm	CNV6211
18	Spring	CBH2278	63	Guide	CNV5509
19	Spring	CBH2110	64	Guide	CNV5510
20	Spring	CBH2282	65	Holder	CNV5578
21	Spring	CBH2114	66	Guide	CNV5751
22	Spring	CBH2115	67	Clamper	CNV5758
23	Spring	CBH2080	68	Gear	CNV5813
24	Spring	CBH2118	69	Motor Unit(M1)	CXB2190
25	Spring	CBH2161	70	Screw Unit	CXB2191
26	Spring	CBH2163	71	Chassis Unit	CXB2192
27	Spring	CBH2189	72	Gear Unit	CXB2193
28	Spring	CBH2249	73	Arm Unit	CXB2194
29	Spring	CBH2260	74	Motor Unit(M2)	CXB2195
30	Spring	CBH2262	75	Lever Unit	CXB2553
31	Spring	CBL1367	76	Arm Unit	CXB2554
32	Spring	CBL1369	77	Motor Unit(M3)	CXB2562
33	Connector	CDE5531	78	Arm Unit	CXB2795
34	Connector	CDE5532	79	Bracket Unit	CXB4071
35	Shaft	CLA3304	80	Screw	JFZ20P025FMC
36	Screw(M2.6×6)	CBA1458	81	Screw	JGZ17P025FZK
37	Frame	CNC7544	82	Washer	YE15FUC
38	Frame	CNC7545	83	Pickup Unit(Service)(P8)	CXX1285
39	Lever	CNC7546	84	Screw	IMS26P030FMC
40	Arm	CNC7739	* 85	PCB	CNX2982
41	Bracket	CNC7798	86	Photo-transistor(Q1, 2)	CPT230SX-TU
42	Plate	CNC8090	87	Connector(CN702)	See Contrast table(2)
43	Spacer	CNM3315			
44	Sheet	CNM6170			
45	Cushion	CNM6204			

(2) CONTRAST TABLE

DEH-P920R/UC, DEH-P9200R/UC and DEH-P9250/ES are constructed same except for the following:

Mark No.	Description	Part No.	
		DEH-P920R/UC DEH-P9250/ES	DEH-P9200R/UC
2	Control Unit	CWX2359	CWX2358
87	Connector(CN702)	CKS2191	Not used

5. ELECTRICAL PARTS LIST

NOTES:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

====Circuit Symbol and No.====Part Name	Part No.	====Circuit Symbol and No.====Part Name	Part No.
A Unit Number : CWM6214(DEH-P920R/UC) Unit Name : Tuner Amp Unit		Q 932 Transistor	DTC114EK
MISCELLANEOUS		Q 941 Transistor	2SB1243
IC 101 IC	CA0008AM	Q 942 Transistor	DTC124EK
IC 203 IC	PML004AF	Q 951 Transistor	2SA1162
IC 271 IC	PA2028A	Q 962 Transistor	2SC2412K
IC 301 IC	PAL005A	Q 971 Transistor	DTC123EK
IC 401 IC	S-81250SGUP	Q 972 Transistor	2SB1238
IC 501 IC	PM4009A	Q 981 Transistor	2SC2412K
IC 601 IC	PD5483C	Q 982 Transistor	2SC2412K
IC 681 IC	TPD1018F	Q 991 Transistor	IMD2A
IC 851 IC	BA6288FS	Q 998 Transistor	2SD2396
IC 961 IC	S-80735ANDZI	D 131 Diode	MA3039(L)
IC 971 IC	NJM7805FA	D 271 Diode	1SS396
Q 101 Transistor	2SA1162	D 291 Diode	MA3056(M)
Q 102 Transistor	DTC124EK	D 401 Diode	1SR154-400
Q 131 Transistor	2SC2412K	D 402 Diode	HZS16(2)
Q 132 Transistor	IMD2A	D 681 Diode	ERA15-02VH
Q 261 Transistor	IMD2A	D 682 Diode	ERA15-02VH
Q 291 Transistor	2SD1859	D 683 LED	BR4361F
Q 292 Transistor	IMD2A	D 801 Diode Network	DA204U
Q 301 Transistor	DTC124EK	D 802 Diode Network	DA204U
Q 302 Transistor	DTC124EK	D 803 Diode Network	DA204U
Q 351 Transistor	2SC3326	D 804 Diode Network	MA3056(M)
Q 352 Transistor	2SC3326	D 805 Diode	HZS9L(C2)
Q 353 Transistor	2SC3326	D 806 Diode	CL170PGCD
Q 354 Transistor	2SC3326	D 807 LED	CL170PGCD
Q 355 Transistor	2SC3326	D 808 LED	CL170PGCD
Q 356 Transistor	2SC3326	D 809 LED	MA3062(M)
Q 401 Transistor	2SC2412K	D 810 Diode	HZS7L(C3)
Q 501 Transistor	DTA124EK	D 851 Diode	1SS133
Q 641 Transistor	DTC114EK	D 852 Diode	1SS133
Q 681 Transistor	2SA1162	D 853 Diode	ERA15-02VH
Q 682 Transistor	DTC124EK	D 901 Diode	ERA15-02VH
Q 683 Transistor	2SC2412K	D 902 Diode	ERA15-02VH
Q 684 Transistor	2SC2412K	D 903 Diode	ERA15-02VH
Q 685 Transistor	2SC2412K	D 911 Diode	ERA15-02VH
Q 801 Transistor	2SD1760F5	D 912 Diode	HZS6L(B1)
Q 802 Transistor	IMD2A	D 921 Diode	HZS9L(C1)
Q 803 Transistor	2SD2396	D 931 Diode	HZS7L(A1)
Q 805 Transistor	2SC2412K	D 932 Diode	HZS7L(C3)
Q 806 Transistor	2SB1238	D 933 Diode	ERA15-02VH
Q 807 Transistor	DTC143EK	D 941 Diode	ERA15-02VH
Q 808 Transistor	IMD2A	D 942 Diode	ERA15-02VH
Q 851 Transistor	2SD1760F5	D 951 Diode	MA152WK
Q 852 Transistor	DTA114EK	D 961 Diode	MA152K
Q 853 Transistor	DTC124EK	D 971 Diode	MA152WK
Q 911 Transistor	2SD1760F5	D 981 Diode	MA152WK
Q 913 Transistor	IMD2A	D 982 Diode	HZS9L(A2)
Q 921 Transistor	2SD2396	D 983 Diode	MA152K
Q 922 Transistor	DTC114EK	D 984 Diode	MA152WK
Q 923 Transistor	2SB1238	D 985 Diode	1SS133
Q 931 Transistor	IMX1	D 991 Diode	HZS9L(B1)
		ZNR 451	DSPS-201M-S00B
		L 101 Inductor	LAU3R3K
		L 141 Inductor	CTF1420

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
L	251	Ferri-Inductor	LAU2R2K	R	352		RS1/10S820J
L	252	Ferri-Inductor	LAU1R0M	R	353		RS1/10S820J
L	271	Ferri-Inductor	LAU101K	R	354		RS1/10S820J
L	401	Ferri-Inductor	LAU2R2K	R	355		RS1/10S820J
L	402	Inductor	LCTB4R7K2125	R	356		RS1/10S820J
L	403	Inductor	CTF1420	R	357		RS1/16S223J
L	404	Inductor	LCTA1R0J3225	R	358		RS1/16S223J
L	501	Inductor	CTF1295	R	359		RS1/16S223J
L	502	Inductor	CTF1420	R	360		RS1/16S223J
L	601	Inductor	LAU100K	R	361		RS1/16S223J
L	801	Inductor	LAU100K	R	362		RS1/16S223J
L	802	Inductor	CTF1484	R	363		RS1/16S103J
L	951	Ferri-Inductor	LAU2R2K	R	364		RS1/16S103J
X	501	Crystal Resonator 3.648MHz	CSS1447	R	365		RS1/16S103J
X	601	Radiator 10.00MHz	CSS1475	R	366		RS1/16S103J
SP	641	DSP Unit	CWX2323	R	367		RS1/16S103J
		Buzzer	CPV1012	R	368		RS1/16S103J
		FM/AM Tuner Unit	CWE1501	R	369		RS1/16S471J
				R	370		RS1/16S471J
				R	371		RS1/16S471J
RESISTORS							
R	101		RS1/10S101J	R	372		RS1/16S471J
R	102		RS1/10S620J	R	373		RS1/16S471J
R	103		RS1/10S101J	R	374		RS1/16S471J
R	104		RS1/10S222J	R	375		RS1/10S0R0J
R	105		RS1/10S103J	R	376		RS1/10S0R0J
R	106		RS1/10S562J	R	377		RS1/10S0R0J
R	107		RS1/10S332J	R	401		RS1/10S473J
R	108		RS1/16S102J	R	402		RS1/10S473J
R	109		RS1/16S102J	R	403		RS1/10S681J
R	110		RS1/16S223J	R	404		RS1/10S681J
R	111		RS1/16S223J	R	409		RS1/16S681J
R	112		RS1/16S181J	R	410		RS1/16S103J
R	113		RS1/16S181J	R	411		RS1/16S681J
R	131		RS1/10S104J	R	412		RS1/16S681J
R	132		RS1/10S222J	R	413		RS1/16S681J
R	133		RS1/10S103J	R	414		RS1/16S473J
R	134		RS1/10S561J	R	415		RS1/16S472J
R	135		RS1/10S223J	R	416		RS1/16S473J
R	136		RS1/10S473J	R	417		RS1/16S473J
R	151		RS1/10S0R0J	R	418		RS1/10S473J
R	152		RS1/10S0R0J	R	419		RS1/10S222J
R	161		RS1/16S272J	R	420		RS1/10S222J
R	162		RS1/16S272J	R	423		RS1/10S0R0J
R	163		RS1/16S162J	R	424		RS1/16S393J
R	164		RS1/16S162J	R	431		RS1/8S151J
R	208		RS1/16S102J	R	501		RS1/16S102J
R	209		RS1/16S102J	R	502		RS1/16S102J
R	210		RS1/16S102J	R	503		RS1/16S102J
R	241		RS1/10S102J	R	507		RS1/10S0R0J
R	242		RS1/10S102J	R	508		RS1/16S0R0J
R	251		RS1/10S472J	R	511		RS1/16S102J
R	252		RS1/10S472J	R	512		RS1/16S0R0J
R	253		RS1/10S472J	R	513		RS1/16S225J
R	254		RS1/10S472J	R	514		RS1/10S0R0J
R	255		RS1/10S223J	R	518		RS1/16S681J
R	256		RS1/10S223J	R	601		RS1/16S473J
R	257		RS1/10S331J	R	602		RS1/16S472J
R	258		RS1/10S331J	R	603		RS1/16S221J
R	259		RS1/10S331J	R	604		RS1/16S682J
R	260		RS1/10S331J	R	605		RS1/16S221J
R	261		RN1/10SE4702D	R	606		RS1/16S682J
R	262		RN1/10SE4702D	R	607		RS1/16S102J
R	263		RS1/10S102J	R	608		RS1/16S102J
R	283		RS1/10S203J	R	609		RS1/16S473J
R	291		RD1/4PU911J	R	610		RS1/16S473J
R	301		RS1/10S103J	R	611		RS1/16S473J
R	302		RS1/10S103J	R	612		RS1/16S221J
R	303		RS1/10S103J	R	613		RS1/16S682J
R	304		RS1/10S331J	R	614		RS1/16S221J
R	351		RS1/10S820J	R	615		RS1/16S682J

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 616	RS1/16S221J	R 933	RS1/10S103J
R 617	RS1/16S473J	R 934	RS1/10S473J
R 618	RS1/16S221J	R 935	RS1/10S103J
R 619	RS1/16S682J	R 936	RS1/10S103J
R 620	RS1/16S473J	R 941	RS1/10S472J
R 623	RS1/16S473J	R 942	RS1/4S221J
R 627	RS1/16S473J	R 943	RS1/4S221J
R 628	RS1/16S473J	R 951	RS1/8S153J
R 633	RS1/10S0R0J	R 952	RS1/10S472J
R 634	RS1/10S102J	R 953	RS1/10S472J
R 637	RS1/16S473J	R 954	RS1/16S102J
R 641	RS1/10S202J	R 962	RS1/10S102J
R 642	RS1/10S102J	R 963	RS1/10S473J
R 651	RS1/10S0R0J	R 964	RS1/10S822J
R 652	RS1/10S0R0J	R 971	RS1/10S102J
R 653	RS1/10S0R0J	R 972	RD1/4PU102J
R 658	RS1/16S473J	R 973	RS1/10S473J
R 681	RS1/8S102J	R 981	RS1/16S223J
R 682	RS1/8S102J	R 982	RS1/10S473J
R 683	RS1/8S102J	R 983	RS1/10S103J
R 684	RS1/10S103J	R 984	RS1/10S473J
R 685	RS1/10S103J	R 985	RS1/10S102J
R 686	RS1/10S103J	R 986	RS1/10S224J
R 687	RS1/10S223J	R 989	RS1/10S473J
R 688	RS1/10S223J	R 991	RD1/4PU221J
R 689	RS1/10S223J	R 992	RS1/10S221J
R 690	RS1/10S272J	CAPACITORS	
R 691	RS1/10S223J		
R 692	RS1/10S272J		
R 693	RS1/10S223J		
R 694	RS1/10S272J		
R 695	RS1/16S473J	C 101	CKSQYB104K16
R 696	RS1/16S473J	C 102	CKSQYB104K16
R 697	RS1/16S473J	C 131	CKSQYB681K50
R 698	RS1/16S473J	C 132	CEJA101M10
R 699	RS1/8S471J	C 141	CCSQCH101J50
R 700	RS1/10S102J	C 161	CKSQYB183K25
R 801	RS1/10S103J	C 162	CKSQYB183K25
R 802	RS1/8S222J	C 171	CEJA470M16
R 803	RS1/8S222J	C 172	CKSQYB104K16
R 804	RS1/8S103J	C 173	CEJA100M16
R 805	RS1/8S472J	C 201	CKSYB105K16
R 806	RS2PMF220J	C 205	CKSYB224K16
R 807	RS1/8S221J	C 206	CKSYB224K16
R 809	RS1/10S103J	C 207	CKSYB105K16
R 810	RS1/10S222J	C 208	CKSYB105K16
R 811	RD1/4PU102J	C 209	CKSYB105K16
R 812	RS1/10S152J	C 210	CKSYB105K16
R 813	RS1/4S221J	C 211	CEJANP4R7M16
R 814	RD1/4PU391J	C 212	CEJANP4R7M16
R 818	RS1/10S103J	C 213	CEJANP4R7M16
R 819	RS1/8S221J	C 214	CEJANP4R7M16
R 820	RS1/10S1R0J	C 215	CKSQYB473K50
R 821	RS1/10S1R0J	C 216	CKSQYB473K50
R 851	RD1/4PU271J	C 217	CKSQYB473K50
R 852	RS1/10S102J	C 218	CKSQYB473K50
R 853	RS1/10S102J	C 219	CKSYB105K16
R 862	RS1/10S102J	C 220	CKSYB105K16
R 864	RS1/10S102J	C 221	CKSYB105K16
R 911	RS1/10S0R0J	C 222	CKSYB105K16
R 912	RS1/10S152J	C 223	CKSYB105K16
R 913	RS1/10S512J	C 224	CKSYB105K16
R 914	RS1/10S0R0J	C 225	CKSQYB333K50
R 921	RS1/10S1R0J	C 226	CKSQYB123K50
R 922	RD1/4PU221J	C 227	CKSQYB473K50
R 923	RS1/10S102J	C 228	CKSQYB153K50
R 924	RS1/4S152J	C 229	CKSQYB153K50
R 926	RS1/10S223J	C 241	CKSQYB152K50
R 931	RS1/10S472J	C 242	CKSQYB152K50
R 932	RS1/10S473J	C 251	CEJA4R7M35
		C 252	CEJA4R7M35

A Unit Number : CWM6222(DEH-P9200R/UC)
Unit Name : Tuner Amp Unit

IC	101	IC
IC	203	IC
IC	231	IC
IC	271	IC
IC	301	IC

CA0008AM
PML004AF
NJM2068MD
PA2028A
PAL005A

S-81250SGUP
PM4009A
PD5487C
BA6288FS
S-80735ANDZI

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
Q	101	Transistor	2SA1162	D	933	Diode	ERA15-02VH
Q	102	Transistor	DTC124EK	D	941	Diode	ERA15-02VH
Q	261	Transistor	IMD2A	D	942	Diode	ERA15-02VH
Q	301	Transistor	DTC124EK	D	951	Diode	MA152WK
Q	302	Transistor	DTC124EK	D	961	Diode	MA152K
Q	351	Transistor	2SC3326	D	981	Diode	MA152WK
Q	352	Transistor	2SC3326	D	982	Diode	HZS9L(A2)
Q	353	Transistor	2SC3326	D	983	Diode	MA152K
Q	354	Transistor	2SC3326	D	984	Diode	MA152WK
Q	355	Transistor	2SC3326	D	985	Diode	1SS133
Q	356	Transistor	2SC3326	D	991	Diode	HZS9L(B1)
Q	401	Transistor	2SC2412K	ZNR	451		DSPS-201M-S00B
Q	501	Transistor	DTA124EK	L	101	Inductor	LAU3R3K
Q	641	Transistor	DTC114EK	L	251	Ferri-Inductor	LAU2R2K
Q	681	Transistor	2SA1162	L	271	Ferri-Inductor	LAU101K
Q	682	Transistor	DTC124EK	L	401	Ferri-Inductor	LAU2R2K
Q	683	Transistor	2SC2412K	L	402	Inductor	LCTB4R7K2125
Q	801	Transistor	2SD1760F5	L	403	Inductor	CTF1420
Q	802	Transistor	IMD2A	L	404	Inductor	LCTA1R0J3225
Q	803	Transistor	2SD2396	L	501	Inductor	CTF1295
Q	805	Transistor	2SC2412K	L	502	Inductor	CTF1420
Q	806	Transistor	2SB1238	L	601	Inductor	LAU100K
Q	807	Transistor	DTC143EK	L	801	Inductor	LAU100K
Q	808	Transistor	IMD2A	L	802	Inductor	CTF1484
Q	851	Transistor	2SD1760F5	L	951	Ferri-Inductor	LAU2R2K
Q	852	Transistor	DTA114EK	X	501	Crystal Resonator 3.648MHz	CSS1447
Q	853	Transistor	DTC124EK	X	601	Radiator 10.00MHz	CSS1475
Q	911	Transistor	2SD1760F5			FM/AM Tuner Unit	CWE1501
Q	913	Transistor	IMD2A	SP	641	Buzzer	CPV1012
Q	921	Transistor	2SD2396				
Q	922	Transistor	DTC114EK	RESISTORS			
Q	923	Transistor	2SB1238	R	101		RS1/10S101J
Q	931	Transistor	IMX1	R	102		RS1/10S620J
Q	932	Transistor	DTC114EK	R	103		RS1/10S101J
Q	941	Transistor	2SB1243	R	104		RS1/10S222J
				R	105		RS1/10S103J
Q	942	Transistor	DTC124EK				
Q	951	Transistor	2SA1162	R	106		RS1/10S562J
Q	962	Transistor	2SC2412K	R	107		RS1/10S332J
Q	981	Transistor	2SC2412K	R	108		RS1/16S102J
Q	982	Transistor	2SC2412K	R	109		RS1/16S102J
				R	110		RS1/16S223J
Q	991	Transistor	IMD2A				
Q	998	Transistor	2SD2396	R	111		RS1/16S223J
D	231	Diode Network	DA204U	R	112		RS1/16S181J
D	232	Diode Network	DA204U	R	113		RS1/16S181J
D	233	Diode Network	DA204U	R	151		RS1/10S0R0J
				R	152		RS1/10S0R0J
D	234	Diode Network	DA204U				
D	401	Diode	1SR154-400	R	161		RS1/16S272J
D	402	Diode	HZS16(2)	R	162		RS1/16S272J
D	683	LED	BR4361F	R	163		RS1/16S162J
D	801	Diode Network	DA204U	R	164		RS1/16S162J
				R	201		RS1/10S0R0J
D	802	Diode Network	DA204U				
D	803	Diode Network	DA204U	R	203		RS1/10S102J
D	804	Diode Network	DA204U	R	204		RS1/10S102J
D	805	Diode	MA3056(M)	R	205		RA3C102J
D	806	Diode	HZS9L(C2)	R	231		RS1/10S474J
				R	232		RS1/10S474J
D	807	LED	CL170PGCD				
D	808	LED	CL170PGCD	R	233		RS1/10S104J
D	809	LED	CL170PGCD	R	234		RS1/10S104J
D	810	Diode	MA3062(M)	R	235		RS1/10S273J
D	851	Diode	HZS7L(C3)	R	236		RS1/10S273J
				R	283		RS1/10S203J
D	852	Diode	1SS133				
D	853	Diode	1SS133	R	284		RS1/10S0R0J
D	901	Diode	ERA15-02VH	R	301		RS1/10S103J
D	902	Diode	ERA15-02VH	R	302		RS1/10S103J
D	903	Diode	ERA15-02VH	R	303		RS1/10S103J
				R	304		RS1/10S331J
D	911	Diode	ERA15-02VH				
D	912	Diode	HZS6L(B1)				
D	921	Diode	HZS9L(C1)				
D	931	Diode	HZS7L(A1)				
D	932	Diode	HZS7L(C3)				

====Circuit Symbol and No.====Part Name	Part No.	====Circuit Symbol and No.====Part Name	Part No.
R 351	RS1/10S820J	R 610	RS1/16S473J
R 352	RS1/10S820J	R 611	RS1/16S473J
R 353	RS1/10S820J	R 614	RS1/16S221J
R 354	RS1/10S820J	R 615	RS1/16S682J
R 355	RS1/10S820J	R 616	RS1/16S221J
R 356	RS1/10S820J	R 617	RS1/16S473J
R 357	RS1/16S223J	R 618	RS1/16S221J
R 358	RS1/16S223J	R 619	RS1/16S682J
R 359	RS1/16S223J	R 620	RS1/16S473J
R 360	RS1/16S223J	R 623	RS1/16S473J
R 361	RS1/16S223J	R 627	RS1/16S473J
R 362	RS1/16S223J	R 628	RS1/16S473J
R 363	RS1/16S103J	R 633	RS1/10S0R0J
R 364	RS1/16S103J	R 634	RS1/10S102J
R 365	RS1/16S103J	R 637	RS1/16S473J
R 366	RS1/16S103J	R 641	RS1/10S202J
R 367	RS1/16S103J	R 642	RS1/10S102J
R 368	RS1/16S103J	R 654	RS1/10S0R0J
R 369	RS1/16S471J	R 655	RS1/10S0R0J
R 370	RS1/16S471J	R 656	RS1/10S0R0J
R 371	RS1/16S471J	R 658	RS1/16S473J
R 372	RS1/16S471J	R 659	RS1/16S0R0J
R 373	RS1/16S471J	R 681	RS1/8S102J
R 374	RS1/16S471J	R 686	RS1/10S103J
R 375	RS1/10S0R0J	R 687	RS1/10S223J
R 376	RS1/10S0R0J	R 688	RS1/10S223J
R 377	RS1/10S0R0J	R 689	RS1/10S223J
R 401	RS1/10S473J	R 690	RS1/10S272J
R 402	RS1/10S473J	R 695	RS1/16S473J
R 403	RS1/10S681J	R 698	RS1/8S471J
R 404	RS1/10S681J	R 699	RS1/10S102J
R 409	RS1/16S681J	R 700	RS1/10S103J
R 410	RS1/16S103J	R 801	RS1/8S222J
R 411	RS1/16S681J	R 802	RS1/8S222J
R 412	RS1/16S681J	R 803	RS1/8S222J
R 413	RS1/16S681J	R 804	RS1/8S103J
R 414	RS1/16S473J	R 805	RS1/8S472J
R 415	RS1/16S472J	R 806	RS2PMF220J
R 416	RS1/16S473J	R 807	RS1/8S221J
R 417	RS1/16S473J	R 809	RS1/10S103J
R 418	RS1/10S473J	R 810	RS1/10S222J
R 419	RS1/10S222J	R 811	RD1/4PU102J
R 420	RS1/10S222J	R 812	RS1/10S152J
R 423	RS1/10S0R0J	R 813	RS1/4S221J
R 424	RS1/16S393J	R 814	RD1/4PU391J
R 431	RS1/8S151J	R 818	RS1/10S103J
R 501	RS1/16S102J	R 819	RS1/8S221J
R 502	RS1/16S102J	R 820	RS1/10S1R0J
R 503	RS1/16S102J	R 821	RS1/10S1R0J
R 507	RS1/10S0R0J	R 851	RD1/4PU271J
R 508	RS1/16S0R0J	R 852	RS1/10S102J
R 511	RS1/16S102J	R 853	RS1/10S102J
R 512	RS1/16S0R0J	R 862	RS1/10S102J
R 513	RS1/16S225J	R 864	RS1/10S102J
R 514	RS1/10S0R0J	R 911	RS1/10S0R0J
R 518	RS1/16S681J	R 912	RS1/10S152J
R 601	RS1/16S473J	R 913	RS1/10S512J
R 602	RS1/16S472J	R 914	RS1/10S0R0J
R 603	RS1/16S221J	R 921	RS1/10S1R0J
R 604	RS1/16S682J	R 922	RD1/4PU221J
R 605	RS1/16S221J	R 923	RS1/10S102J
R 606	RS1/16S682J	R 924	RS1/4S152J
R 607	RS1/16S102J	R 926	RS1/10S223J
R 608	RS1/16S102J	R 931	RS1/10S472J
R 609	RS1/16S473J	R 932	RS1/10S473J

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 933	RS1/10S103J	C 238	CKSQYB104K25
R 934	RS1/10S473J	C 239	CCSQCH470J50
R 935	RS1/10S103J	C 240	CCSQCH470J50
R 936	RS1/10S103J	C 241	CKSQYB152K50
R 941	RS1/10S472J	C 242	CKSQYB152K50
R 942	RS1/4S221J	C 262	CKSYB475K10
R 943	RS1/4S221J	C 277	CEJA4R7M35
R 951	RS1/8S153J	C 278	CEJA101M16
R 952	RS1/10S472J	C 279	CEJA100M16
R 953	RS1/10S472J	C 280	CEJA100M16
R 954	RS1/16S102J	C 281	CKSYB225K16
R 962	RS1/10S102J	C 282	CEJA330M25
R 963	RS1/10S473J	C 283	CEJA330M25
R 964	RS1/10S822J	C 286	CASAQ3R3M16
R 981	RS1/16S223J	C 287	CKSYB684K25
R 982	RS1/10S473J	C 301	CKSQYB224K16
R 983	RS1/10S103J	C 302	CKSQYB224K16
R 984	RS1/10S473J	C 303	CKSQYB224K16
R 985	RS1/10S102J	C 304	CKSQYB224K16
R 986	RS1/10S224J	C 306	CEJA330M10
R 989	RS1/10S473J	C 307	CCH1339
R 991	RD1/4PU221J	C 309	CKSQYB104K16
R 992	RS1/10S221J	C 310	CEJA100M16
CAPACITORS		C 311	CKSYB105K16
		C 351	CEJA100M35
C 101	CKSQYB104K16	C 352	CEJA100M35
C 102	CKSQYB104K16	C 353	CEJA100M35
C 161	CKSQYB183K25	C 354	CEJA100M35
C 162	CKSQYB183K25	C 355	CEJA100M35
C 171	CEJA470M16	C 356	CEJA100M35
C 172	CKSQYB104K16	C 357	CKSRYB222K50
C 173	CEJA100M16	C 358	CKSRYB222K50
C 203	CKSYB225K16	C 359	CKSRYB222K50
C 204	CKSYB225K16	C 360	CKSRYB222K50
C 205	CKSYB224K16	C 361	CKSRYB222K50
C 206	CKSYB224K16	C 362	CKSRYB222K50
C 207	CKSYB105K16	C 403	CKSQYB473K16
C 208	CKSYB105K16	C 404	CEJA101M10
C 209	CKSYB105K16	C 405	CKSQYB103K50
C 210	CKSYB105K16	C 406	CEJA220M10
C 211	CEJANP4R7M16	C 407	CKSQYB103K50
C 212	CEJANP4R7M16	C 408	CKSQYB223K50
C 213	CEJANP4R7M16	C 409	CKSQYB223K50
C 214	CEJANP4R7M16	C 411	CKSRYB472K50
C 215	CKSQYB473K50	C 413	CKSQYB103K50
C 216	CKSQYB473K50	C 431	CEJA101M16
C 217	CKSQYB473K50	C 432	CKSQYB104K16
C 218	CKSQYB473K50	C 435	CCSQCH101J50
C 219	CKSYB105K16	C 502	CCSQCH101J50
C 220	CKSYB105K16	C 503	CCSQCH270J50
C 221	CKSYB105K16	C 504	CCSQCH270J50
C 222	CKSYB105K16	C 505	CKSQYB104K16
C 223	CKSYB105K16	C 506	CKSQYB471K50
C 224	CKSYB105K16	C 507	CKSQYB471K50
C 225	CKSQYB333K50	C 508	CKSQYB104K16
C 226	CKSQYB123K50	C 509	CEJA220M6R3
C 227	CKSQYB473K50	C 511	CKSQYB103K50
C 228	CKSQYB153K50	C 512	CCSRCH101J50
C 229	CKSQYB153K50	C 601	CEJA4R7M35
C 231	CKSQYB103K50	C 602	CKSQYB103K50
C 233	CKSQYB474K16	C 603	CCSQCH101J50
C 234	CKSQYB474K16	C 604	CCSQCH150J50
C 235	CKSQYB104K16	C 605	CCSQCH220J50
C 236	CKSQYB104K16	C 651	CKSYB225K16
C 237	CKSQYB104K25	C 683	CKSQYB103K50

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
C	686		CKSQYB473K16	Q	641	Transistor	DTC114EK
C	801		CKSYB475K10	Q	681	Transistor	2SA1162
C	802		CKSQYB104K16	Q	682	Transistor	DTC124EK
C	803		CEJA470M10	Q	683	Transistor	2SC2412K
C	804		CKSQYB103K50	Q	684	Transistor	2SC2412K
C	805		CEJA470M10	Q	685	Transistor	2SC2412K
C	806		CKSQYB103K50	Q	801	Transistor	2SD1760F5
C	807		CKSQYB102K50	Q	802	Transistor	IMD2A
C	808		CKSYB221K50	Q	803	Transistor	2SD2396
C	809		CKSYB103K50	Q	805	Transistor	2SC2412K
C	810		CKSYB475K10	Q	806	Transistor	2SB1238
C	811		CKSYB225K16	Q	807	Transistor	DTC143EK
C	812		CCSCH101J50	Q	808	Transistor	IMD2A
C	813		CKSQYB103K50	Q	851	Transistor	2SD1760F5
C	814		CKSQYB105K10	Q	852	Transistor	DTA114EK
C	851		CKSQYB103K50	Q	853	Transistor	DTC124EK
C	852		CKSYB104K16	Q	911	Transistor	2SD1760F5
C	853		CEJA220M16	Q	913	Transistor	IMD2A
C	855		CKSQYB102K50	Q	921	Transistor	2SD2396
C	856		CCSQCH101J50	Q	922	Transistor	DTC114EK
C	857		CCSQCH101J50	Q	923	Transistor	2SB1238
C	901		CKSYB103K50	Q	931	Transistor	IMX1
C	911	470μF/16V	CCH1183	Q	932	Transistor	DTC114EK
C	912		CKSQYB472K50	Q	941	Transistor	2SB1243
C	913		CKSQYB103K50	Q	942	Transistor	DTC124EK
C	914		CEJA470M10	Q	951	Transistor	2SA1162
C	915	470μF/16V	CCH1183	Q	962	Transistor	2SC2412K
C	921	330μF/10V	CCH1181	Q	971	Transistor	DTC123EK
C	922		CKSQYB103K50	Q	972	Transistor	2SB1238
C	923		CEJA101M16	Q	981	Transistor	2SC2412K
C	931		CKSYB105K16	Q	982	Transistor	2SC2412K
C	951		CKSYB103K50	Q	991	Transistor	IMD2A
C	961		CKSQYB102K50	Q	998	Transistor	2SD2396
C	962		CKSQYB104K16	D	131	Diode	MA3039(L)
C	963		CEJA2R2M50	D	291	Diode	MA3056(M)
C	981		CEJA220M16	D	401	Diode	1SR154-400
C	991		CKSQYB473K50	D	402	Diode	HZS16(2)
C	992		CKSQYB102K50	D	683	LED	BR4361F
C	993		CEJA101M10	D	801	Diode Network	DA204U
				D	802	Diode Network	DA204U
				D	803	Diode Network	DA204U
				D	804	Diode Network	DA204U
				D	805	Diode	MA3056(M)
				D	806	Diode	HZS9L(C2)
				D	807	LED	CL170PGCD
				D	808	LED	CL170PGCD
				D	809	LED	CL170PGCD
				D	810	Diode	MA3062(M)
				D	851	Diode	HZS7L(C3)
				D	852	Diode	1SS133
				D	853	Diode	1SS133
				D	901	Diode	ERA15-02VH
				D	902	Diode	ERA15-02VH
				D	903	Diode	ERA15-02VH
				D	911	Diode	ERA15-02VH
				D	912	Diode	HZS6L(B1)
				D	921	Diode	HZS9L(C1)
				D	931	Diode	HZS7L(A1)
				D	932	Diode	HZS7L(C3)
				D	933	Diode	ERA15-02VH
				D	941	Diode	ERA15-02VH
				D	942	Diode	ERA15-02VH
				D	951	Diode	MA152WK
				D	961	Diode	MA152K
				D	971	Diode	MA152WK
				D	981	Diode	MA152WK
				D	982	Diode	HZS9L(A2)
				D	983	Diode	MA152K
				D	984	Diode	MA152WK
				D	985	Diode	1SS133



Unit Number : CWM6216(DEH-P9250/ES)

Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	CA0008AM
IC	203	IC	PML004AF
IC	271	IC	PA2028A
IC	301	IC	PAL005A
IC	401	IC	S-81250SGUP
IC	601	IC	PD5484C
IC	851	IC	BA6288FS
IC	961	IC	S-80735ANDZI
IC	971	IC	NJM7805FA
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EK
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	261	Transistor	IMD2A
Q	291	Transistor	2SD1859
Q	292	Transistor	IMD2A
Q	301	Transistor	DTC124EK
Q	302	Transistor	DTC124EK
Q	351	Transistor	2SC3326
Q	352	Transistor	2SC3326
Q	353	Transistor	2SC3326
Q	354	Transistor	2SC3326
Q	355	Transistor	2SC3326
Q	356	Transistor	2SC3326
Q	401	Transistor	2SC2412K

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
D	991	Diode	HZS9L(B1)	R	291		RD1/4PU911J
ZNR	451		DSPS-201M-S00B	R	301		RS1/10S103J
L	101	Inductor	LAU3R3K	R	302		RS1/10S103J
L	141	Inductor	CTF1420	R	303		RS1/10S103J
L	251	Ferri-Inductor	LAU2R2K	R	304		RS1/10S331J
L	252	Ferri-Inductor	LAU1R0M	R	351		RS1/10S820J
L	271	Ferri-Inductor	LAU101K	R	352		RS1/10S820J
L	401	Ferri-Inductor	LAU2R2K	R	353		RS1/10S820J
L	402	Inductor	LCTB4R7K2125	R	354		RS1/10S820J
L	403	Inductor	CTF1420	R	355		RS1/10S820J
L	404	Inductor	LCTA1R0J3225	R	356		RS1/10S820J
L	601	Inductor	LAU100K	R	357		RS1/16S223J
L	801	Inductor	LAU100K	R	358		RS1/16S223J
L	802	Inductor	CTF1484	R	359		RS1/16S223J
L	951	Ferri-Inductor	LAU2R2K	R	360		RS1/16S223J
X	601	Radiator 10.00MHz FM/AM Tuner Unit	CSS1475	R	361		RS1/16S223J
		DSP Unit	CWE1501	R	362		RS1/16S223J
SP	641	Buzzer	CWX2323	R	363		RS1/16S103J
			CPV1012	R	364		RS1/16S103J
				R	365		RS1/16S103J
RESISTORS				R	366		RS1/16S103J
R	101		RS1/10S101J	R	367		RS1/16S103J
R	102		RS1/10S620J	R	368		RS1/16S103J
R	103		RS1/10S101J	R	369		RS1/16S471J
R	104		RS1/10S222J	R	370		RS1/16S471J
R	105		RS1/10S103J				
R	106		RS1/10S562J	R	371		RS1/16S471J
R	107		RS1/10S332J	R	372		RS1/16S471J
R	108		RS1/16S102J	R	373		RS1/16S471J
R	109		RS1/16S102J	R	374		RS1/16S471J
R	110		RS1/16S223J	R	375		RS1/10S0R0J
R	111		RS1/16S223J	R	376		RS1/10S0R0J
R	112		RS1/16S181J	R	377		RS1/10S0R0J
R	113		RS1/16S181J	R	401		RS1/10S473J
R	131		RS1/10S104J	R	402		RS1/10S473J
R	132		RS1/10S222J	R	403		RS1/10S681J
R	133		RS1/10S103J	R	404		RS1/10S681J
R	134		RS1/10S561J	R	409		RS1/16S681J
R	135		RS1/10S223J	R	410		RS1/16S103J
R	136		RS1/10S473J	R	411		RS1/16S681J
R	151		RS1/10S0R0J	R	412		RS1/16S681J
R	152		RS1/10S0R0J	R	413		RS1/16S681J
R	161		RS1/16S272J	R	414		RS1/16S473J
R	162		RS1/16S272J	R	415		RS1/16S472J
R	163		RS1/16S162J	R	416		RS1/16S473J
R	164		RS1/16S162J	R	417		RS1/16S473J
R	208		RS1/16S102J	R	418		RS1/10S473J
R	209		RS1/16S102J	R	419		RS1/10S222J
R	210		RS1/16S102J	R	420		RS1/10S222J
R	241		RS1/10S102J	R	423		RS1/10S0R0J
R	242		RS1/10S102J	R	424		RS1/16S393J
R	251		RS1/10S472J	R	431		RS1/8S151J
R	252		RS1/10S472J	R	601		RS1/16S473J
R	253		RS1/10S472J	R	602		RS1/16S472J
R	254		RS1/10S472J	R	603		RS1/16S221J
R	255		RS1/10S223J	R	604		RS1/16S682J
R	256		RS1/10S223J	R	605		RS1/16S221J
R	257		RS1/10S331J	R	606		RS1/16S682J
R	258		RS1/10S331J	R	607		RS1/16S102J
R	259		RS1/10S331J	R	608		RS1/16S102J
R	260		RS1/10S331J	R	609		RS1/16S473J
R	261		RN1/10SE4702D	R	610		RS1/16S473J
R	262		RN1/10SE4702D	R	611		RS1/16S473J
R	263		RS1/10S102J	R	612		RS1/16S221J
R	283		RS1/10S203J	R	613		RS1/16S682J
R	284		RS1/10S0R0J	R	614		RS1/16S221J

====Circuit Symbol and No.===Part Name	Part No.	====Circuit Symbol and No.===Part Name	Part No.
R 615	RS1/16S682J	R 933	RS1/10S103J
R 616	RS1/16S221J	R 934	RS1/10S473J
R 617	RS1/16S473J	R 935	RS1/10S103J
R 618	RS1/16S221J	R 936	RS1/10S103J
R 619	RS1/16S682J	R 941	RS1/10S472J
R 620	RS1/16S473J	R 942	RS1/4S221J
R 623	RS1/16S473J	R 943	RS1/4S221J
R 627	RS1/16S473J	R 951	RS1/8S153J
R 628	RS1/16S473J	R 952	RS1/10S472J
R 633	RS1/10S0R0J	R 953	RS1/10S472J
R 634	RS1/10S102J	R 954	RS1/16S102J
R 637	RS1/16S473J	R 962	RS1/10S102J
R 641	RS1/10S202J	R 963	RS1/10S473J
R 642	RS1/10S102J	R 964	RS1/10S822J
R 651	RS1/10S0R0J	R 971	RS1/10S102J
R 652	RS1/10S0R0J	R 972	RD1/4PU102J
R 653	RS1/10S0R0J	R 973	RS1/10S473J
R 658	RS1/16S473J	R 981	RS1/16S223J
R 681	RS1/8S102J	R 982	RS1/10S473J
R 682	RS1/8S102J	R 983	RS1/10S103J
R 683	RS1/8S102J	R 984	RS1/10S473J
R 685	RS1/10S103J	R 985	RS1/10S102J
R 686	RS1/10S103J	R 986	RS1/10S224J
R 687	RS1/10S223J	R 989	RS1/10S473J
R 688	RS1/10S223J	R 991	RD1/4PU221J
R 689	RS1/10S223J	R 992	RS1/10S221J
R 690	RS1/10S272J	CAPACITORS	
R 691	RS1/10S223J	C 101	CKSQYB104K16
R 692	RS1/10S272J	C 102	CKSQYB104K16
R 693	RS1/10S223J	C 131	CKSQYB681K50
R 694	RS1/10S272J	C 132	CEJA101M10
R 695	RS1/16S473J	C 141	CCSQCH101J50
R 696	RS1/16S473J	C 161	CKSQYB183K25
R 697	RS1/16S473J	C 162	CKSQYB183K25
R 698	RS1/8S471J	C 171	CEJA470M16
R 699	RS1/10S102J	C 172	CKSQYB104K16
R 700	RS1/10S103J	C 173	CEJA100M16
R 801	RS1/8S222J	C 201	CKSYB105K16
R 802	RS1/8S222J	C 205	CKSYB224K16
R 803	RS1/8S222J	C 206	CKSYB224K16
R 804	RS1/8S103J	C 207	CKSYB105K16
R 805	RS1/8S472J	C 208	CKSYB105K16
R 806	RS2PMF220J	C 209	CKSYB105K16
R 807	RS1/8S221J	C 210	CKSYB105K16
R 809	RS1/10S103J	C 211	CEJANP4R7M16
R 810	RS1/10S222J	C 212	CEJANP4R7M16
R 811	RD1/4PU102J	C 213	CEJANP4R7M16
R 812	RS1/10S152J	C 214	CEJANP4R7M16
R 813	RS1/4S221J	C 215	CKSQYB473K50
R 814	RD1/4PU391J	C 216	CKSQYB473K50
R 818	RS1/10S103J	C 217	CKSQYB473K50
R 819	RS1/8S221J	C 218	CKSQYB473K50
R 820	RS1/10S1R0J	C 219	CKSYB105K16
R 821	RS1/10S1R0J	C 220	CKSYB105K16
R 851	RD1/4PU271J	C 221	CKSYB105K16
R 852	RS1/10S102J	C 222	CKSYB105K16
R 853	RS1/10S102J	C 223	CKSYB105K16
R 862	RS1/10S102J	C 224	CKSYB105K16
R 864	RS1/10S102J	C 225	CKSQYB333K50
R 911	RS1/10S0R0J	C 226	CKSQYB123K50
R 912	RS1/10S152J	C 227	CKSQYB473K50
R 913	RS1/10S512J	C 228	CKSQYB153K50
R 914	RS1/10S0R0J	C 229	CKSQYB153K50
R 921	RS1/10S1R0J	C 241	CKSQYB152K50
R 922	RD1/4PU221J	C 242	CKSQYB152K50
R 923	RS1/10S102J	C 251	CEJA4R7M35
R 924	RS1/4S152J	C 252	CEJA4R7M35
R 926	RS1/10S223J		
R 931	RS1/10S472J		
R 932	RS1/10S473J		

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
C 253	CEJA100M16	C 805	CEJA470M10
C 254	CEJA100M16	C 806	CKSQYB103K50
C 255	CKSQYB104K16	C 807	CKSQYB102K50
C 256	CKSQYB104K16	C 808	CKSYB221K50
C 257	CEJA100M16	C 809	CKSYB103K50
C 258	CEJA100M16	C 810	CKSYB475K10
C 259	CKSQYB103K50	C 811	CKSYB225K16
C 260	CKSQYB103K50	C 812	CCSCH101J50
C 261	CKSQYB103K50	C 813	CKSQYB103K50
C 262	CKSYB475K10	C 814	CKSQYB105K10
C 263	CEJANP100M10	C 851	CKSQYB103K50
C 277	CEJA4R7M35	C 852	CKSYB104K16
C 278	CEJA101M16	C 853	CEJA220M16
C 279	CEJA100M16	C 855	CKSQYB102K50
C 280	CEJA100M16	C 856	CCSQCH101J50
C 281	CKSYB225K16	C 857	CCSQCH101J50
C 282	CEJA330M25	C 901	CKSYB103K50
C 283	CEJA330M25	C 911	CCH1183
C 286	CASAQ3R3M16	C 912	CKSQYB472K50
C 287	CKSYB684K25	C 913	CKSQYB103K50
C 291	CKSYB225K16	C 914	CEJA470M10
C 292	CKSQYB103K50	C 915	CCH1183
C 293	CKSQYB103K50	C 921	CCH1181
C 301	CKSQYB224K16	C 922	CKSQYB103K50
C 302	CKSQYB224K16	C 923	CEJA101M16
C 303	CKSQYB224K16	C 931	CKSYB105K16
C 304	CKSQYB224K16	C 951	CKSYB103K50
C 306	CEJA330M10	C 961	CKSQYB102K50
C 307	CCH1339	C 962	CKSQYB104K16
C 309	CKSQYB104K16	C 963	CEJA2R2M50
C 310	CEJA100M16	C 971	CEJA101M16
C 311	CKSYB105K16	C 972	CEJA100M16
C 351	CEJA100M35	C 973	CKSQYB103K50
C 352	CEJA100M35	C 975	CKSQYB102K50
C 353	CEJA100M35	C 981	CEJA220M16
C 354	CEJA100M35	C 991	CKSQYB473K50
C 355	CEJA100M35	C 992	CKSQYB102K50
C 356	CEJA100M35	C 993	CEJA101M10
C 357	CKSRYB222K50		
C 358	CKSRYB222K50		
C 359	CKSRYB222K50		
C 360	CKSRYB222K50		
C 361	CKSRYB222K50		
C 362	CKSRYB222K50		
C 403	CKSQYB473K16		
C 404	CEJA101M10		
C 405	CKSQYB103K50		
C 406	CEJA220M10		
C 407	CKSQYB103K50		
C 408	CKSQYB223K50		
C 409	CKSQYB223K50		
C 411	CKSRYB472K50		
C 431	CEJA101M16		
C 432	CKSQYB104K16		
C 433	CCSQCH101J50		
C 435	CCSQCH101J50		
C 601	CEJA4R7M35		
C 602	CKSQYB103K50		
C 603	CCSQCH101J50		
C 604	CCSQCH150J50		
C 605	CCSQCH220J50		
C 651	CKSYB225K16		
C 683	CKSQYB103K50		
C 684	CKSQYB103K50		
C 685	CKSQYB103K50		
C 686	CKSQYB473K16		
C 801	CKSYB475K10		
C 802	CKSQYB104K16		
C 803	CEJA470M10		
C 804	CKSQYB103K50		

B Unit Number : CWE1501
Unit Name : FM/AM Tuner Unit

MISCELLANEOUS

IC 1	IC	PML002A
IC 2	IC	PM4008A
IC 3	IC	BR9010FV
Q 1	Transistor	2SC4081
Q 2	Transistor	DTC124EU
Q 3	FET	3SK263
Q 51	Transistor	2SC4081
Q 201	FET	2SK932
Q 202	Transistor	DTC124EU
Q 204	Transistor	2SC4081
D 1	Diode	KV1410(23)
D 2	Diode	1SV248
D 6	Diode	KV1410(23)
D 201	Diode	DAN217U
D 202	Diode	MA147
D 903	Diode	KV1410(23)
D 904	Diode	SVC253
L 1	Coil	CTC1155
L 3	Inductor	LCTB1R5K2125
L 4	Coil	CTC1155
L 201	Inductor	LCTB330K1608
L 202	Inductor	LFEA102J
L 203	Inductor	LCTA121J3225
L 901	Coil	CTC1154
L 902	Inductor	LCTA3R3J3225

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
L	904	Inductor	LCTBR47K1608	C	12		CCSRCH8R0D50
L	905	Inductor	LCTBR47K1608	C	14		CCSRCJ3R0C50
T	51	Coil	CTE1132	C	15		CKSBYB103K50
CF	51	Ceramic Filter	CTF1442	C	16		CKSBYB222K50
CF	52	Ceramic Filter	CTF1442	C	17		CKSBYB222K50
CF	53	Ceramic Filter	CTF1442	C	18		CCSRCJ3R0C50
CF	202	Ceramic Filter	CTF1476	C	19		CKSBYB103K50
X	901	Crystal Resonator 10.250MHz	CSS1432	C	20		CKSBYB103K50
RESISTORS				C	21		CKSBYB103K50
				C	24		CKSQYB334K16
R	1		RS1/16S183J	C	26		CKSBYB472K50
R	2		RS1/16S103J	C	30		CCSRCH220J50
R	5		RS1/16S0R0J	C	32		CCSRCH470J50
R	7		RS1/16S273J	C	35		CKSBYB103K50
R	8		RS1/16S473J	C	51		CKSBYB103K50
R	9		RS1/16S223J	C	52		CKSBYB473K16
R	10		RS1/16S473J	C	53		CCSRCK2R0C50
R	11		RS1/16S221J	C	54		CKSBYB103K50
R	12		RS1/16S103J	C	55		CKSBYB104K16
R	13		RS1/16S104J	C	56		CKSBYB104K16
R	16		RS1/16S223J	C	58		CKSQYB224K16
R	17		RS1/16S221J	C	101		CEALNP100M10
R	18		RS1/16S221J	C	102		CCSRCH151J50
R	19		RS1/16S473J	C	103		CKSBYB473K16
R	20		RS1/16S470J	C	105		CKSBYB682K25
R	31		RS1/16S0R0J	C	106		CEALR68M50
R	51		RS1/16S470J	C	107		CKSBYB103K50
R	52		RS1/16S103J	C	108		CKSQYB474K16
R	53		RS1/16S103J	C	109		CKSQYB474K16
R	54		RS1/16S331J	C	110		CKSBYB104K16
R	55		RS1/16S331J	C	111		CKSBYB104K16
R	56		RS1/16S560J	C	112		CKSBYB104K16
R	57		RS1/16S560J	C	113		CKSBYB123K25
R	58		RS1/16S102J	C	114		CEAL220M6R3
R	59		RS1/16S225J	C	115		CKSBYB473K16
R	60		RS1/16S133J	C	116		CEAL2R2M50
R	61		RS1/16S433J	C	117		CKSBYB102K50
R	101		RS1/16S333J	C	120		CKSBYB183K25
R	102		RS1/16S103J	C	121		CKSBYB332K50
R	103		RS1/16S333J	C	122		CKSBYB562K25
R	104		RS1/16S562J	C	123		CKSBYB681K50
R	110		RS1/16S154J	C	125		CKSBYB103K50
R	111		RS1/16S273J	C	126		CKSBYB103K50
R	113		RS1/16S222J	C	127		CEAL2R2M50
R	114		RS1/16S333J	C	128		CKSBYB103K50
R	115		RS1/16S334J	C	201		CCSRCH471J50
R	116		RS1/16S473J	C	202		CCSRCH100D50
R	202		RS1/16S472J	C	203		CKSBYB104K16
R	203		RS1/16S225J	C	204		CKSBYB332K50
R	204		RS1/16S102J	C	205		CKSBYB103K50
R	205		RS1/16S220J	C	206		CKSBYB104K16
R	206		RS1/16S471J	C	207		CKSBYB473K16
R	208		RS1/16S104J	C	208		CCSRCH560J50
R	209		RS1/16S104J	C	209		CEAL470M6R3
R	210		RS1/16S563J	C	210		CKSBYB103K50
R	213		RS1/16S223J	C	211		CKSBYB103K50
R	251		RS1/16S225J	C	212		CCSRCH101J50
R	902		RS1/16S103J	C	215		CKSBYB223K25
R	904		RS1/16S473J	C	216		CKSQYB334K16
R	907		RS1/16S103J	C	217		CKSBYB103K50
R	908		RS1/16S681J	C	219		CKSQYB105K10
R	909		RS1/16S473J	C	220		CKSBYB104K16
R	914		RS1/16S562J	C	221		CKSBYB473K16
CAPACITORS				C	222		CKSQYB334K16
				C	223		CKSQYB474K16
C	1		CCSQCH4R0C50	C	224		CKSBYB104K16
C	6		CKSQYB105K10	C	225		CKSBYB272K50
C	8		CKSBYB222K50	C	226		CKSBYB682K25
C	10		CCSRCH220J50	C	902		CCSRCH270J50
C	11		CCSRCH150J50	C	904		CKSBYB223K25

====Circuit Symbol and No.==Part Name	Part No.
C 905	CKSRYP103K50
C 906	CCSRTH100D50
C 907	CCSRTH150J50
C 909	CCSRTH100D50
C 910	CKSRYP332K50
C 912	CKSQYB474K16
C 913	CKSRYP223K25
C 914	CKSRYP682K25
C 915	CKSQYB223K25
C 916	CKSQYB474K16
C 917	CKSYB475K10
C 918	CKSRYP223K25
C 919	CKSQYB225K10
C 920	CCSRCH270J50
C 921	CCSRCH270J50
C 922	CKSYB105K16
C 923	CKSRYP103K50

C Unit Number : CWM7064
Unit Name : Keyboard Unit

MISCELLANEOUS

IC 1901	IC	PD5471A
IC 1902	IC	PD8051A
IC 1903		RS-140
D 1901	Diode Network	DA204U
D 1902	Diode Network	DA204U
D 1904	Diode	MA110
D 1907	LED	CL170UBX
D 1908	LED	CL170UBX
D 1910	LED	CL155DPGD
L 1901		LCTA2R2J3225
L 1902		LCTA2R2J3225
L 1903	Inductor	CTF1484
L 1904	Inductor	LCTA220J2520
L 1905		CTF1421
L 1906		CTF1421
L 1907	Inductor	CTF1295
L 1908	Inductor	CTF1295
X 1901	Ceramic Resonator 15.62MHz	CSG1458
S 1901		CSG1112
S 1902		CSG1112
S 1903	Spring Switch	CSN1033
S 1904	Spring Switch	CSN1033
S 1905		CSG1112
S 1906	Switch	CSG1043
S 1907		CSG1112
S 1908		CSG1112
S 1909		CSG1112
S 1910		CSG1112
S 1911		CSG1112
S 1912		CSG1112
S 1913		CSG1112
S 1914		CSG1112
S 1915		CSG1112
S 1916		CSG1112
S 1917		CSG1112
S 1918		CSG1112
S 1919		CSG1111
S 1920		CSG1112
S 1921		CSG1112
S 1922		CSG1112
S 1923		CSG1112
S 1924		CSG1112
S 1925		CSG1111

====Circuit Symbol and No.==Part Name	Part No.
RESISTORS	
R 1901	RS1/16S154J
R 1902	RS1/16S473J
R 1903	RA4C101J
R 1904	RA3C101J
R 1905	RA3C101J
R 1906	RA4C101J
R 1907	RS1/16S473J
R 1908	RA3C101J
R 1909	RA3C101J
R 1910	RA4C101J
R 1911	RA4C101J
R 1912	RA4C101J
R 1913	RA3C101J
R 1914	RA4C101J
R 1915	RA4C101J
R 1922	RS1/10S121J
R 1923	RS1/10S2R2J
R 1924	RS1/8S222J
R 1925	RS1/8S222J
R 1930	RS1/16S222J

R 1931	RS1/16S473J
R 1956	RS1/10S0R0J
R 1957	RS1/10S0R0J
R 1958	RS1/10S0R0J
R 1959	RS1/10S0R0J
R 1962	RS1/10S511J
R 1963	RS1/10S511J
R 1964	RS1/10S821J
R 1965	RS1/10S821J
R 1966	RS1/8S821J
R 1967	RS1/8S821J
R 1968	RS1/8S511J
R 1969	RS1/8S511J
R 1970	RS1/8S511J
R 1971	RS1/8S511J
R 1972	RS1/8S511J
R 1973	RS1/8S511J
R 1974	RS1/8S511J
R 1975	RS1/8S511J
R 1976	RS1/8S751J
R 1977	RS1/8S751J
R 1978	RS1/8S391J
R 1979	RS1/8S391J
R 1982	RS1/16S0R0J
R 1983	RS1/16S0R0J

CAPACITORS

C 1901	CKSQYB105K10
C 1902	CKSRYP103K25
C 1903	CSZS100M6R3
C 1904	CSZS100M6R3
C 1906	CKSQYB103K25
C 1907	CSZS100M6R3
C 1908	CKSRYP473K16
C 1911	CKSRYP473K16
C 1914	CKSRYP103K25
C 1917	CSZSR100M16
C 1918	CKSRYP102K50
C 1919	CCSQCH221J50
C 1921	CKSQYB104K25
C 1922	CKSQYB104K25

====Circuit Symbol and No.==Part Name Part No.

D Unit Number : CWX2323(DEH-P920R/ES,
DEH-P9250/ES)
Unit Name : DSP Unit

MISCELLANEOUS

IC 3001	IC	PD5504A
IC 3101	IC	AK7714
IC 3201	IC	TC74HC393AF
IC 3202	IC	TC9246F
IC 3203	IC	HD74HCT126FP
IC 3301	IC	NJM4580M
D 3301	Diode	MA8043(L)
L 3001		CTF1410
L 3101		CTF1410
L 3201		CTF1410
L 3202	Inductor	LCTB2R2K1608
L 3203		CTF1410
L 3301		CTF1410
L 3302		CTF1410
L 3303		CTF1410
L 3304		CTF1410
L 3305		CTF1410
L 3306		CTF1410
L 3307		CTF1410
L 3308		CTF1410
L 3309		CTF1410
L 3310		CTF1410
X 3001	Radiator 10.00MHz	CSS1428
X 3101	Crystal Resonator 22.5792MHz	CSS1403

RESISTORS

R 3001	RA4C102J
R 3004	RS1/16S102J
R 3010	RS1/16S681J
R 3011	RS1/16S102J
R 3012	RS1/16S102J
R 3013	RS1/16S102J
R 3014	RS1/16S102J
R 3018	RS1/16S102J
R 3023	RA3C221J
R 3024	RS1/16S102J
R 3025	RA3C102J
R 3026	RA4C681J
R 3028	RS1/16S473J
R 3029	RS1/16S473J
R 3033	RS1/16S102J
R 3034	RS1/16S102J
R 3038	RS1/16S102J
R 3039	RS1/16S102J
R 3040	RS1/16S102J
R 3041	RS1/16S102J
R 3042	RS1/16S102J
R 3043	RS1/16S102J
R 3044	RS1/16S102J
R 3045	RS1/16S473J
R 3047	RS1/16S473J
R 3048	RS1/16S473J
R 3049	RS1/16S473J
R 3101	RS1/16S0R0J
R 3102	RS1/16S0R0J
R 3103	RS1/16S471J
R 3104	RS1/16S473J
R 3105	RS1/16S473J
R 3106	RS1/16S105J
R 3107	RS1/16S102J
R 3108	RS1/16S102J

====Circuit Symbol and No.==Part Name Part No.

R 3109	RS1/16S102J
R 3110	RS1/16S0R0J
R 3201	RS1/16S332J
R 3202	RS1/16S391J
R 3203	RS1/16S101J

R 3204	RS1/16S271J
R 3301	RS1/16S273J
R 3302	RS1/16S273J
R 3303	RS1/16S512J
R 3304	RS1/16S512J

R 3305	RS1/16S272J
R 3306	RS1/16S272J
R 3307	RS1/16S681J

CAPACITORS

C 3001	CKSRYB103K50
C 3101	CCSRCH180J50
C 3102	CCSRCH180J50
C 3103	CKSQYB103K50
C 3104	CKSYB106K6R3

C 3105	CKSRYB104K16
C 3106	CKSRYB104K16
C 3107	CKSRYB104K16
C 3108	CKSRYB104K16
C 3201	CKSRYB103K50

C 3202	CKSQYB474K16
C 3203	CKSRYB103K50
C 3204	CKSRYB123K25
C 3205	CKSRYB103K50
C 3206	CKSRYB103K50

C 3207	CCSRCH330J50
C 3208	CKSYB106K6R3
C 3301	CKSRYB332K50
C 3302	CKSRYB332K50
C 3303	CKSYB106K6R3

C 3304	CKSYB106K6R3
C 3305	CKSYB106K6R3
C 3306	CKSYB106K6R3
C 3307	CKSYB225K16
C 3308	CKSRYB104K16

C 3309	CKSYB106K6R3
C 3310	CKSRYB104K16
C 3311	CSZSR470M6R3
C 3312	CKSRYB104K16
C 3313	CKSYB106K6R3

C 3314	CKSRYB103K50
C 3315	CKSQYB105K10

E Unit Number : CWX2322(DEH-P920R/UC,
DEH-P9250/ES)
Unit Name : ASL Unit

MISCELLANEOUS

IC 4501	IC	NJM2068MD
IC 4502	IC	NJM2068MD
Q 4501	Transistor	2SC2458
D 4501	Diode	MA152WK
D 4502	Diode	MA3043(LMH)
D 4503	Diode	MA3075(M)
VR 4501	Semi-fixed 10kΩ(B)	CCP1319
MIC4501	Microphone	CPM1011

RESISTORS

R 4501	RS1/8S222J
R 4502	RS1/8S683J
R 4503	RS1/8S103J
R 4504	RS1/8S472J
R 4505	RS1/8S471J

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
R	4506		RS1/8S682J	R	218		RS1/16S681J
R	4507		RS1/8S684J	R	309		RS1/16S473J
R	4508		RS1/8S562J	R	310		RS1/16S473J
R	4509		RS1/8S391J	R	501		RS1/16S102J
R	4510		RS1/8S472J	R	502		RS1/16S681J
R	4511		RS1/8S472J	R	503		RS1/16S681J
R	4512		RS1/8S472J	R	504		RS1/16S681J
R	4513		RS1/8S153J	R	505		RS1/16S681J
R	4514		RS1/8S153J	R	506		RS1/16S681J
R	4515		RS1/8S102J	R	507		RS1/16S0R0J
R	4517		RS1/8S270J	R	511		RS1/16S0R0J
CAPACITORS				R	512		RS1/16S512J
C	4501		CEJA470M10	R	605		RA4C0R0J
C	4502		CEJA470M10	R	801		RS1/8S751J
C	4503		CEJAR68M50	R	802		RS1/8S751J
C	4504		CEJA100M16	R	901		RS1/16S222J
C	4505		CEJA470M10	R	902		RS1/16S473J
C	4506		CEJA470M16	R	903		RS1/16S222J
C	4507		CEJA100M16	R	904		RS1/16S473J
C	4508		CEJANP220M10	R	905		RN1/16SE1502D
C	4509		CEJAR68M50	R	907		RS1/16S473J
C	4510		CEJANP100M10	R	908		RS1/16S222J
C	4511		CKSYB823K50	R	909		RS1/16S104J
C	4512		CCSCH101J50	R	910		RS1/16S103J
C	4513		CEJA470M10	R	911		RS1/16S223J
				R	912		RS1/16S473J
				R	917		RS1/16S0R0J
				CAPACITORS			
				C	101		CCSRCH102J25
				C	102		CKSQYB104K16
				C	103		CEV101M6R3
				C	104		CEV470M6R3
				C	105		CKSQYB334K16
				C	106		CKSQYB334K16
				C	107		CKSQYB334K16
				C	201		CKSQYB104K16
				C	202		CEV101M6R3
				C	203		CKSQYB104K16
				C	204		CKSRYB332K50
				C	205		CKSQYB104K16
				C	206		CKSRYB392K50
				C	207		CKSQYB224K16
				C	208		CCSRCH270J50
				C	209		CCSRJ3R0C50
				C	210		CCSRCH221J50
				C	211		CCSRCH101J50
				C	212		CKSRYB682K25
				C	213		CKSQYB104K16
				C	214		CKSRYB104K16
				C	215		CKSQYB104K16
				C	216		CKSRYB104K16
				C	217		CKSRYB104K16
				C	218		CKSRYB104K16
				C	219		CKSRYB104K16
				C	220		CKSRYB104K16
				C	223		CKSQYB471K50
				C	301		CEV101M10
				C	501		CKSRYB221K50
				C	611		CKSRYB104K16
				C	701		CEV101M6R3
				C	702		CCH1300
				C	703		CKSQYB334K16
				C	801		CKSRYB103K25
				C	802		CKSRYB103K25
				C	901		CKSRYB472K50
				C	902		CKSYB475K10
				C	903		CKSRYB103K25
R	101		RS1/8S120J	22μF/6.3V			
R	102		RS1/8S100J				
R	103		RS1/16S222J				
R	201		RS1/16S104J				
R	205		RS1/16S103J				
R	206		RS1/16S393J				
R	207		RS1/16S182J				
R	208		RS1/16S304J				
R	210		RS1/16S0R0J				
R	212		RS1/16S103J				
R	213		RS1/16S103J				
R	214		RS1/16S123J				
R	215		RS1/16S273J				
R	216		RS1/16S273J				
R	217		RS1/16S681J				

F Unit Number :
Unit Name : Switch PCB

S 951 Switch(CLOSE) CSN1012
S 952 Switch(OPEN) CSN1022

H Unit Number : CWX2359(DEH-P920R/UC,
DEH-P9250/ES)
Unit Name : Control Unit

MISCELLANEOUS

IC 201 IC UPD63710GC
IC 301 IC BA5985FM
IC 601 IC PD0236AM
IC 701 IC BA05SFP
IC 901 IC PE5011C

Q 101 Transistor 2SB1132
Q 901 Transistor UN2111
D 801 Chip LED CL200IRX
D 802 Chip LED CL200IRX
TH 901 Thermistor CCX1037

X 901 Radiator 8.380MHz CSS1453
S 801 Spring Switch CSN1051
S 802 Spring Switch CSN1052

RESISTORS

R 101 RS1/8S120J
R 102 RS1/8S100J
R 103 RS1/16S222J
R 201 RS1/16S104J
R 205 RS1/16S103J

R 206 RS1/16S393J
R 207 RS1/16S182J
R 208 RS1/16S304J
R 210 RS1/16S0R0J
R 212 RS1/16S103J

R 213 RS1/16S103J
R 214 RS1/16S123J
R 215 RS1/16S273J
R 216 RS1/16S273J
R 217 RS1/16S681J

====Circuit Symbol and No.==Part Name

Part No.

Unit Number : CWX2358(DEH-P9200R/UC)
Unit Name : Control Unit

MISCELLANEOUS

IC	201	IC	UPD63710GC
IC	301	IC	BA5985FM
IC	602	IC	AK4321VF
IC	701	IC	BA05SFP
IC	901	IC	PE5011C

Q	101	Transistor	2SB1132
Q	901	Transistor	UN2111
D	801	Chip LED	CL200IRX
D	802	Chip LED	CL200IRX
TH	901	Thermistor	CCX1037

X	201	Ceramic Resonator 16.934MHz	CSS1456
X	901	Radiator 8.380MHz	CSS1453
S	801	Spring Switch	CSN1051
S	802	Spring Switch	CSN1052

RESISTORS

R	101	RS1/8S120J
R	102	RS1/8S100J
R	103	RS1/16S222J
R	201	RS1/16S104J
R	205	RS1/16S103J
R	206	RS1/16S393J
R	207	RS1/16S182J
R	208	RS1/16S304J
R	210	RS1/16S0R0J
R	212	RS1/16S103J
R	213	RS1/16S103J
R	214	RS1/16S123J
R	215	RS1/16S273J
R	216	RS1/16S273J
R	217	RS1/16S681J
R	218	RS1/16S681J
R	309	RS1/16S473J
R	310	RS1/16S473J
R	501	RS1/16S102J
R	502	RS1/16S681J
R	503	RS1/16S681J
R	504	RS1/16S681J
R	505	RS1/16S681J
R	506	RS1/16S681J
R	511	RS1/16S0R0J
R	601	RS1/16S102J
R	602	RS1/16S102J
R	603	RS1/16S223J
R	604	RS1/16S223J
R	606	RS1/16S0R0J
R	607	RS1/16S0R0J
R	612	RA4C0R0J
R	801	RS1/8S751J
R	802	RS1/8S751J
R	901	RS1/16S222J
R	902	RS1/16S473J
R	903	RS1/16S222J
R	904	RS1/16S473J
R	905	RN1/16SE1502D
R	906	RS1/16S473J
R	908	RS1/16S222J
R	909	RS1/16S104J
R	910	RS1/16S103J
R	911	RS1/16S223J
R	912	RS1/16S473J
R	917	RS1/16S0R0J

====Circuit Symbol and No.==Part Name

Part No.

CAPACITORS

C	101	CCSRCH102J25
C	102	CKSQYB104K16
C	103	CEV101M6R3
C	104	CEV470M6R3
C	105	CKSQYB334K16
C	106	CKSQYB334K16
C	107	CKSQYB334K16
C	201	CKSQYB104K16
C	202	CEV101M6R3
C	203	CKSQYB104K16
C	204	CKSRYB332K50
C	205	CKSQYB104K16
C	206	CKSRYB392K50
C	207	CKSQYB224K16
C	208	CCSRCH270J50
C	209	CCSRCJ3R0C50
C	210	CCSRCH221J50
C	211	CCSRCH101J50
C	212	CKSRYB682K25
C	213	CKSQYB104K16
C	214	CKSRYB104K16
C	215	CKSQYB104K16
C	216	CKSRYB104K16
C	217	CKSRYB104K16
C	218	CKSRYB104K16
C	219	CKSRYB104K16
C	220	CKSRYB104K16
C	223	CKSQYB471K50
C	301	CEV101M10
C	601	CEV4R7M35
C	602	CEV4R7M35
C	603	CCSQSL152J50
C	604	CCSQSL152J50
C	605	CEV470M6R3
C	606	CKSRYB104K16
C	607	CKSRYB104K16
C	608	CKSRYB104K16
C	609	CEV100M16
C	610	CKSRYB104K16
C	612	CKSRYB104K16
C	701	CEV101M6R3
C	702	CCH1300
C	703	CKSQYB334K16
C	801	CKSRYB103K25
C	802	CKSRYB103K25
C	901	CKSRYB472K50
C	902	CKSYB475K10
C	903	CKSRYB103K25

Unit Number :
Unit Name : Photo Unit

Q	1	Photo-transistor	CPT230SX-TU
Q	2	Photo-transistor	CPT230SX-TU

Miscellaneous Parts List

M	1	Pickup Unit(Service)(P8)	CXX1285
M	2	Motor Unit(CARRIAGE)	CXB2190
M	2	Motor Unit(LOADING)	CXB2195
M	3	Motor Unit(SPINDLE)	CXB2562
M	951	Motor (AUTO FLAP)	CXM1085