


EXPLODED VIEW (UNIT)

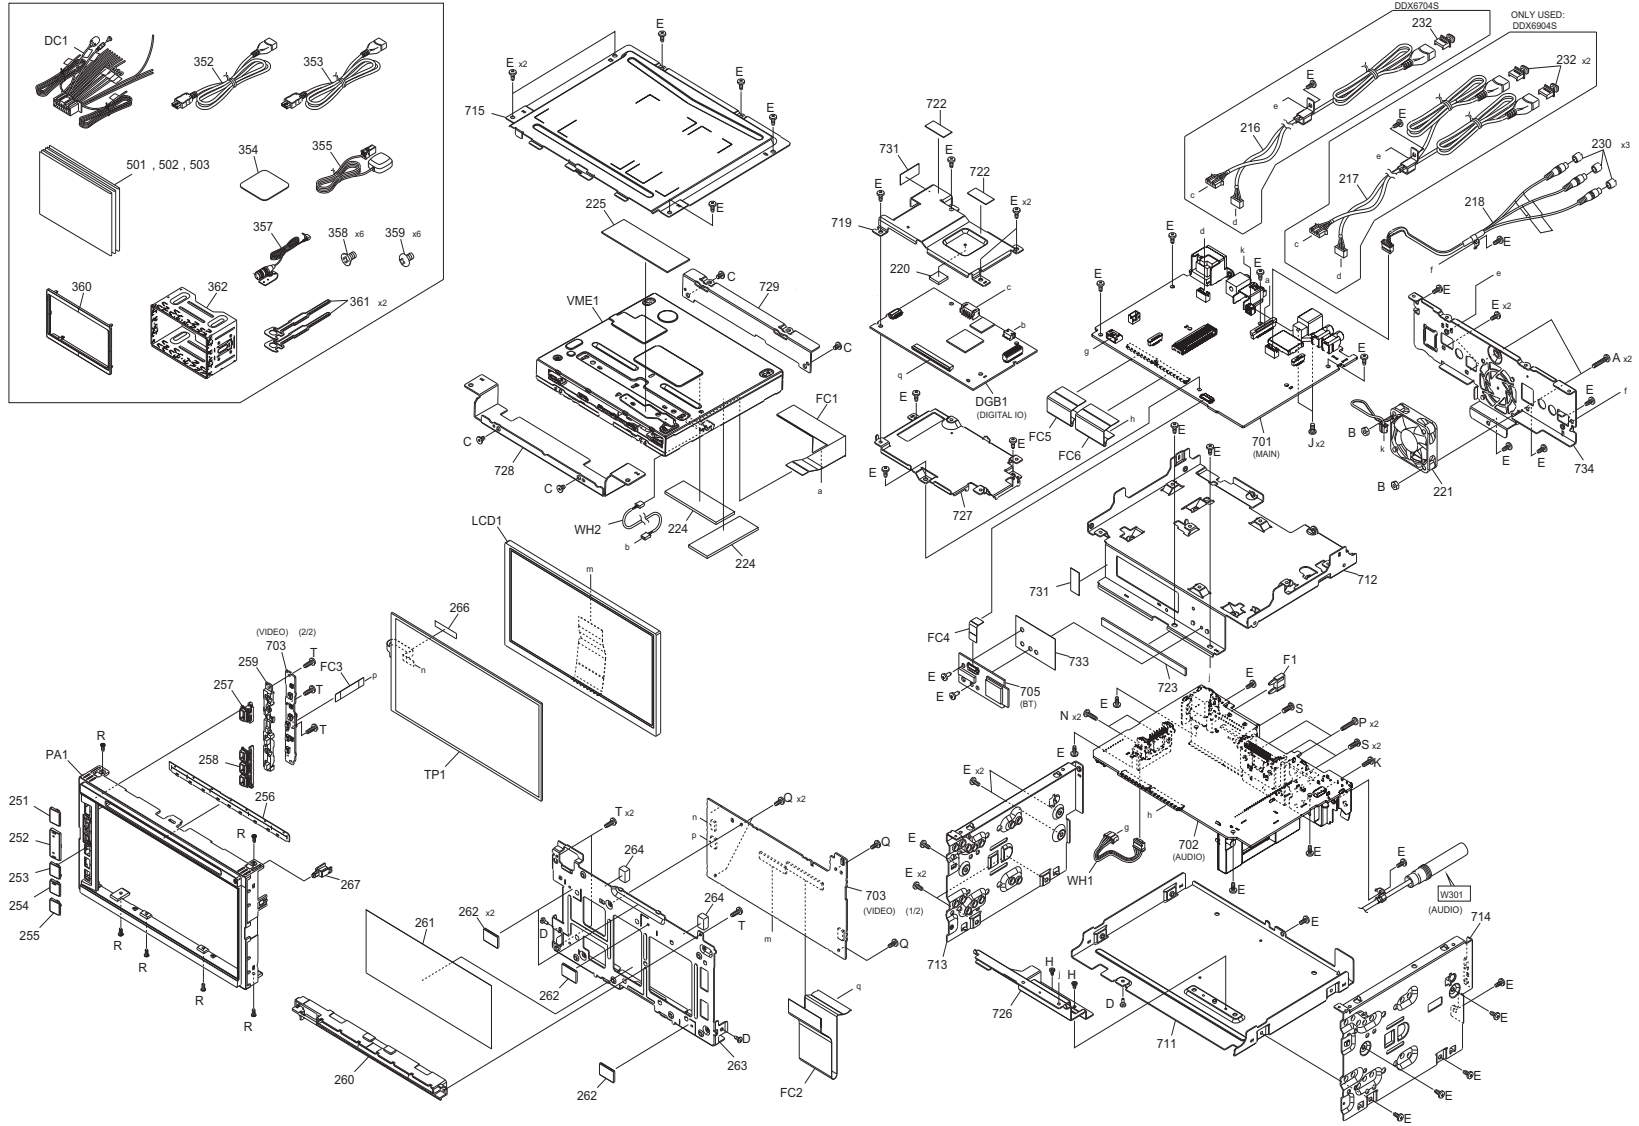

Parts with the exploded numbers larger than 700 are not supplied.

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|--|------------|---------------|---------------------|-----------------|-----|-------|
| EXPLODED VIEW (UNIT) <M1MM> | | | | | | |
| | DC1 | E3A-0358-00 | DC CORD | | 1 | |
| | DGB1 | CB-XJA057K0BN | DIGITAL IO PWB ASSY | XJA-057K-0B | 1 | K1 |
| | DGB1 | CB-XJA057K0AN | DIGITAL IO PWB ASSY | XJA-057K-0A | 1 | K0 |
| △ | F1 | FZB10AU-150 | BLADE FUSE | 15A | 1 | |
| | FC1 | E3F-0111-00 | FLAT CABLE | | 1 | |
| | FC2 | E3G-0060-00 | FFC WIRE | | 1 | |
| | FC3 | EF0AF051003AC | FFC WIRE | | 1 | |
| | FC4 | EF0AA051503AC | FFC WIRE | | 1 | |
| | FC5 | EF0AD0550X4BC | FFC WIRE | | 1 | |
| | FC6 | EF0AD0560X4BC | FFC WIRE | | 1 | |
| | LCD1 | B3H-0085-00 | LCD ASSY | | 1 | |
| | PA1 | A6C-0076-03 | PANEL | | 1 | K1 |
| | PA1 | A6C-0076-02 | PANEL | | 1 | K0 |
| | TP1 | W0C-0299-00 | TOUCH PANEL | | 1 | |
| | VME1 | FD2-3A00NXN | DVD MECHA MODUL | | 1 | |
| | WH1 | E3F-0116-00 | WIRING HARNESS | | 1 | |
| | WH2 | E3F-0112-00 | WIRING HARNESS | | 1 | |
| | A | LV45522-001A | SPECIAL SCREW | | 2 | |
| | B | QYNTS2600ZA | NUT | M2.6 | 2 | |
| | C | LV45552-003A | SPECIAL SCREW | | 4 | |
| | D | QYSDST2005ZA | TAP SCREW | M2 x 5mm | 3 | |
| | E | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | 46 | |
| | H | VKZ4539-054 | MINI SCREW | | 2 | |
| | J | QYSDSG3006ZA | TAP SCREW | M3 x 6mm | 2 | |
| | K | QYSDSF2608ZA | TAP SCREW | M2.6 x 8mm | 1 | |
| | N | QYSDST2610ZA | TAP SCREW | M2.6 x 10mm | 2 | |
| | P | QYSPST2614ZA | TAP SCREW | M2.6 x 14mm | 2 | |
| | Q | N0Z-0200-00 | SPECIAL SCREW | | 4 | |
| | R | LV45701-003A | SPECIAL SCREW | | 6 | |
| | S | QYSPSG3008ZA | TAP SCREW | M3 x 8mm | 3 | |
| | T | VKZ4777-012 | SCREW | | 6 | |
| | 216 | E3A-0363-00 | CORD W.CON. | | 1 | K1 |
| | 217 | E3A-0362-00 | CORD W.CON. | | 1 | K0 |
| | 218 | E3A-0421-00 | CORD W.CON. | | 1 | |
| | 220 | F0C-0071-00 | COOL SHEET | | 1 | |
| | 221 | F0K-0240-00 | FAN | | 1 | |
| | 224 | G1B-0071-0G | CUSHION | | 2 | |
| | 225 | G1G-0055-05 | SHEET | | 1 | |
| | 230 | F2K-0012-00 | INS.COVER | | 3 | |
| | 232 | LV45959-001A | CAP | | 1 | K1 |
| | 232 | LV45959-001A | CAP | | 2 | K0 |
| | 251 | K2K-0269-00 | KEY TOP | | 1 | |
| | 252 | K2A-0054-00 | KNOB | | 1 | |
| | 253 | K2K-0270-01 | KEY TOP | | 1 | |
| | 254 | K2K-0271-00 | KEY TOP | | 1 | |
| | 255 | K2K-0272-00 | KEY TOP | | 1 | |
| | 256 | F1K-0087-00 | BLIND PLATE | | 1 | |
| | 257 | K2K-0267-00 | KNOB BASE | | 1 | |
| | 258 | K2K-0268-00 | KNOB BASE | | 1 | |
| | 259 | B1K-0090-00 | LIGHTING BOARD | | 1 | |
| | 260 | J9A-0020-00 | GUIDE | | 1 | |
| | 261 | F2A-0055-00 | INS.SHEET | | 1 | |
| | 262 | G1D-0034-0C | CONDUCT CUSHION | | 4 | |
| | 263 | J2B-0368-00 | BRACKET | | 1 | |
| | 264 | G1D-0034-00 | CONDUCT CUSHION | | 2 | |
| | 266 | LV40847-064A | SPACER(H) | | 1 | |
| | 267 | T6A-0062-00 | PLASTIC LENS | | 1 | |
| | 352 | E3A-0364-00 | USB CORD | BLACK | 1 | |
| | 353 | E3A-0365-00 | USB CORD | GRAY | 1 | K0 |
| | 354 | LV45939-001A | GPS BRACKET | | 1 | |
| | 355 | QAL1550-001 | ANTENNA | | 1 | |
| | 357 | QAN0137-001 | MICROPHONE | | 1 | |
| | 358 | QYSSP5008ZA | SCREW | M5 x 8mm | 6 | |
| | 359 | QYSTSP5008ZA | SCREW | M5 x 8mm | 6 | |
| | 360 | B9H-0007-00 | ESCUTCHEON | | 1 | |
| | 361 | D1A-0007-00 | LEVER | | 2 | |
| | 362 | J2C-0006-00 | MOUNTING ASSY | | 1 | |
| | 501 | B5A-2062-00 | INST.MANUAL | ENG | 1 | |
| | 502 | B5A-2062-01 | INST.MANUAL | FRE | 1 | |
| | 503 | B5A-2062-02 | INST.MANUAL | SPA | 1 | |
| | 701 | ----- | MAIN PWB ASSY | NO SERVICE PART | 1 | K1 |
| | 701 | ----- | MAIN PWB ASSY | NO SERVICE PART | 1 | K0 |
| | 702 | ----- | AUDIO PWB ASSY | NO SERVICE PART | 1 | K1 |
| | 702 | ----- | AUDIO PWB ASSY | NO SERVICE PART | 1 | K0 |
| | 703 | ----- | VIDEO PWB ASSY | NO SERVICE PART | 1 | |
| | 705 | ----- | BT PWB ASSY | NO SERVICE PART | 1 | |
| | 711 | ----- | CHASSIS | NO SERVICE PART | 1 | |
| | 712 | ----- | SUB CHASSIS | NO SERVICE PART | 1 | |
| | 713 | ----- | SIDE PLATE | NO SERVICE PART | 1 | |
| | 714 | ----- | SIDE PLATE | NO SERVICE PART | 1 | |
| | 715 | ----- | TOP PLATE | NO SERVICE PART | 1 | |
| | 719 | ----- | HEAT SINK | NO SERVICE PART | 1 | |
| | 722 | ----- | SOFT TAPE | NO SERVICE PART | 2 | |
| | 723 | ----- | CUSHION | NO SERVICE PART | 1 | |
| | 726 | ----- | BRACKET | NO SERVICE PART | 1 | |
| | 727 | ----- | BRACKET | NO SERVICE PART | 1 | |
| | 728 | ----- | BRACKET | NO SERVICE PART | 1 | |
| | 729 | ----- | BRACKET | NO SERVICE PART | 1 | |
| | 731 | ----- | SPACER(H) | NO SERVICE PART | 2 | |
| | 733 | ----- | SHEET | NO SERVICE PART | 1 | |
| | 734 | ----- | REAR PANEL | NO SERVICE PART | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

EXPLODED VIEW (DVD MECHANISM: FD2-3A00NXN) <MJMM>

| | | | | | | |
|-----|---------------|-----------------|-----------------|--|----|--|
| VM1 | CM-FD2-ALM | LOADING M ASSY | | | 1 | |
| VT1 | CM-FD2-ATM2 | TM ASSY | | | 1 | |
| A | LV44959-002A | SPECIAL SCREW | | | 16 | |
| B | LV45727-001A | GEAR SCREW | | | 2 | |
| C | QYSPSPU1425MA | SCREW | M1.4 x 2.5mm | | 2 | |
| D | VKZ4539-054 | MINI SCREW | | | 3 | |
| F | LV44586-001A | SPECIAL SCREW | | | 1 | |
| 4 | LV45709-002A | CLAMP SPRING | | | 1 | |
| 7 | LV23006-002A | GUIDE 2 L | | | 1 | |
| 8 | LV23007-002A | GUIDE 2 R | | | 1 | |
| 9 | LV11842-004A | DISC GUIDE | | | 1 | |
| 14 | LV45704-001A | DAMPER SHAFT | | | 4 | |
| 15 | LV45724-001A | RUBBER ROLLER | | | 2 | |
| 17 | LV37652-002A | SHAFT GUIDE | | | 1 | |
| 18 | LV39938-001A | GEAR RETAINER | | | 1 | |
| 19 | LV45730-001A | ROLLER C WASHER | | | 1 | |
| 20 | CM-FD2-AROS | RO SHAFT ASSY | | | 1 | |
| 21 | LV45731-001A | ROLLER WASHER | | | 1 | |
| 22 | LV45718-001A | ROLLER RETAINER | | | 1 | |
| 23 | LV23003-002A | ROLLER HOLDER | | | 1 | |
| 24 | LV45982-001A | ROLLER SPG R2 | | | 1 | |
| 26 | LV39932-003A | TRIGGER SLIDER | | | 1 | |
| 27 | LV45715-001A | TRIGGER SPRING | | | 1 | |
| 28 | LV23004-004A | SLIDER | | | 1 | |
| 29 | LV39935-003A | SLIDER SPRING | | | 1 | |
| 31 | LV39929-001A | DRIVE GEAR 4 | | | 1 | |
| 32 | LV39928-001A | DRIVE GEAR 3 | | | 3 | |
| 33 | LV39927-001A | DRIVE GEAR 2 | | | 1 | |
| 34 | LV39926-001A | DRIVE GEAR 1 | | | 1 | |
| 35 | LV23005-001A | GEAR HOLDER | | | 1 | |
| 36 | LV39923-002A | UD LEVER | | | 1 | |
| 37 | LV45983-001A | ROLLER SPG L2 | | | 1 | |
| 38 | LV39934-001A | DAMPER | | | 4 | |
| 39 | LV45719-001A | PU FPC SHEET | | | 1 | |
| 802 | ----- | CLAMP ARM ASSY | NO SERVICE PART | | 1 | |
| 805 | ----- | BOTTOM CHASSIS | NO SERVICE PART | | 1 | |
| 806 | ----- | TOP CHASSIS | NO SERVICE PART | | 1 | |
| 810 | ----- | CLAMPER CUSHION | NO SERVICE PART | | 1 | |
| 811 | ----- | CL A CUSHION B | NO SERVICE PART | | 1 | |
| 812 | ----- | CL A CUSHION A | NO SERVICE PART | | 1 | |
| 825 | ----- | ROLLER ARM | NO SERVICE PART | | 1 | |
| 830 | ----- | GEAR BKT | NO SERVICE PART | | 1 | |
| 840 | ----- | SPACER(H) | NO SERVICE PART | | 2 | |
| 841 | ----- | BOTTOM SHEET | NO SERVICE PART | | 1 | |
| 842 | ----- | FE BOARD ASSY | NO SERVICE PART | | 1 | |
| 847 | ----- | LOADING MOTOR | NO SERVICE PART | | 1 | |
| 848 | ----- | SIN TWIST WIRE | NO SERVICE PART | | 1 | |
| 849 | ----- | SIN TWIST WIRE | NO SERVICE PART | | 1 | |
| 850 | ----- | WORM GEAR | NO SERVICE PART | | 1 | |
| 851 | ----- | TM CHASSIS ASSY | NO SERVICE PART | | 1 | |
| 852 | ----- | FEED MOTOR | NO SERVICE PART | | 1 | |
| 853 | ----- | SPINDLE MOTOR | NO SERVICE PART | | 1 | |
| 854 | ----- | SUB SHAFT | NO SERVICE PART | | 1 | |
| 855 | ----- | SUB SHAFT SP | NO SERVICE PART | | 1 | |
| 856 | ----- | PICKUP | NO SERVICE PART | | 1 | |
| 857 | ----- | PICKUP ARM | NO SERVICE PART | | 1 | |
| 858 | ----- | PICKUP ARM SP | NO SERVICE PART | | 1 | |
| 859 | ----- | SHAFT | NO SERVICE PART | | 1 | |
| 860 | ----- | MAIN SHAFT SP 2 | NO SERVICE PART | | 1 | |
| 861 | ----- | MAIN SHAFT SP | NO SERVICE PART | | 1 | |
| 862 | ----- | TM COVER MAIN | NO SERVICE PART | | 1 | |
| 863 | ----- | TM COVER SUB | NO SERVICE PART | | 1 | |
| 864 | ----- | ROLLER SHAFT | NO SERVICE PART | | 1 | |
| 865 | ----- | ROLLER GEAR | NO SERVICE PART | | 1 | |
| 866 | ----- | SCREW | NO SERVICE PART | | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|--|------------|---------------|-----------------|-------------|-----|-------|
| MAIN PWB ASSY (XJ1-208K-0x) <XJ1> | | | | | | |
| | IC31 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC51 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC52 | TC7SH08FUJF | MOS IC | | 1 | |
| | IC91 | MP9942AGJ | ANALOG IC | | 1 | |
| | IC92 | TC7SH08FUJF | MOS IC | | 1 | |
| | IC110 | BA2904WV | ANALOG IC | | 1 | |
| | IC131 | MP9942AGJ | ANALOG IC | | 1 | K0 |
| | IC132 | TC7SH08FUJF | MOS IC | | 1 | K0 |
| | IC150 | BA2904WV | ANALOG IC | | 1 | K0 |
| | IC201 | NJM2819ADL333 | BIPOLAR IC | | 1 | |
| | IC205 | XC6223B331P-G | ANALOG IC | | 1 | |
| | IC207 | BD00C0AWFP | MOS IC | | 1 | |
| | IC301 | W3F-0289-00 | MCU IC | | 1 | |
| | IC302 | XC6120N282N-G | MOS IC | | 1 | |
| | IC303 | TC7SH08FUJF | MOS IC | | 1 | |
| | IC304 | BR24T32FVT-W | ROM IC | | 1 | |
| | IC305 | NJU7108F3 | MOS IC | | 1 | |
| | IC501 | AK7738VQ | MOS IC | | 1 | |
| | IC502 | AK4388AET | ANALOG IC | | 1 | |
| | IC503 | AK4388AET | ANALOG IC | | 1 | |
| | IC506 | AK4388AET | ANALOG IC | | 1 | |
| | IC507 | XC6209B502P-G | MOS IC | | 1 | |
| | IC508 | BU33TD3WG | MOS IC | | 1 | |
| | IC601 | NJM4580CV | ANALOG IC | | 1 | |
| | IC602 | NJM2871BF05 | ANALOG IC | | 1 | |
| | IC721 | TC7SH08FUJF | MOS IC | | 1 | |
| | IC722 | TC7SZ125FUF | MOS IC | | 1 | |
| | IC731 | TC7SH08FUJF | MOS IC | | 1 | |
| | IC732 | TC7SZ125FUF | MOS IC | | 1 | |
| | IC871 | NJW1341VC3 | MOS IC | | 1 | |
| | IC872 | XC6209B502P-G | MOS IC | | 1 | |
| | IC921 | NJG1143UA2 | MOS IC | | 1 | |
| | IC922 | XC6213B332N-G | MOS IC | | 1 | |
| | IC923 | BU18TD3WG | MOS IC | | 1 | |
| | IC951 | BD00KA5WFP | MOS IC | | 1 | |
| | Q1 | MTM98140-X | TRANSISTOR | | 1 | |
| | Q3 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q4 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q5 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q6 | LTA014TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q7 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q8 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q9 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q10 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q11 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q12 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q51 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q52 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q110 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q111 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q112 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q113 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q114 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q115 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q116 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q117 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q150 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q151 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q152 | LSCR523EBFS8 | TRANSISTOR | | 1 | K0 |
| | Q153 | LSAR523EBFS8 | TRANSISTOR | | 1 | K0 |
| | Q154 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q155 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q156 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q157 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | K0 |
| | Q301 | 2SB1689 | TRANSISTOR | | 1 | |
| | Q302 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q303 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q304 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q305 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q306 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q307 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q312 | LTA014TEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q313 | LTC014EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q314 | LTC014EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q315 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q316 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q317 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q318 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q319 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q501 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q502 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q921 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q922 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | D1 | RB080L-30 | SCHOTTKY DIODE | | 1 | |
| | D2 | DA2J101 | DIODE | | 1 | |
| | D3 | DZ2J160M | ZENER DIODE | | 1 | |
| | D5 | DZ2J062M | ZENER DIODE | | 1 | |
| | D6 | DZ2J062M | ZENER DIODE | | 1 | |
| | D201 | GS1J-LTP | DIODE | | 1 | |
| | D202 | DA2J101 | DIODE | | 1 | |
| | D301 | DA2J101 | DIODE | | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|--------------|-----|-------|
| | D601 | DZ2J110M | ZENER DIODE | | 1 | |
| | D602 | DZ2J110M | ZENER DIODE | | 1 | |
| | D603 | DA2J101 | DIODE | | 1 | |
| | D721 | DZ2J056M | ZENER DIODE | | 1 | |
| | D722 | DZ2J056M | ZENER DIODE | | 1 | |
| | D732 | DZ2J056M | ZENER DIODE | | 1 | |
| | D733 | DZ2J056M | ZENER DIODE | | 1 | |
| | D734 | DA2J101 | DIODE | | 1 | |
| | D921 | DA2J101 | DIODE | | 1 | |
| | D951 | DA2J101 | DIODE | | 1 | |
| | C1 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C4 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C7 | CD040CP1C222M | E CAPACITOR | 2200uF 16V M | 1 | |
| | C31 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C32 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C33 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C34 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C35 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C36 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C37 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C38 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C40 | CC73HCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C41 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C43 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C44 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C48 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C51 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C52 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C53 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C54 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C55 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C56 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C57 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C58 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C60 | CC73HCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C61 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C63 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C64 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C65 | CC73HCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C66 | CC73HCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C67 | CC73HCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C69 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C70 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C91 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C92 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C93 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C94 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C95 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C96 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C97 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C98 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C100 | CC73HCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C101 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C103 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C104 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C105 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C110 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C111 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C112 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C113 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C114 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C131 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | K0 |
| | C132 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | K0 |
| | C133 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | K0 |
| | C134 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | K0 |
| | C135 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | K0 |
| | C136 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | K0 |
| | C137 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C138 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C140 | CC73HCH1H560J | C CAPACITOR | 56pF 50V J | 1 | K0 |
| | C141 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | K0 |
| | C143 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C144 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | K0 |
| | C145 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | K0 |
| | C150 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C151 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C152 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C153 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C154 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | K0 |
| | C201 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C202 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C203 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C210 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C211 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C215 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C216 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C251 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C252 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C253 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C254 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C255 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | K0 |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|--------------|-----|-------|
| | C256 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | K0 |
| | C257 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | K0 |
| | C258 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | K0 |
| | C301 | CC73HCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C302 | CC73HCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C303 | CE32BQ0J221M | E CAPACITOR | 220uF 6.3V M | 1 | |
| | C304 | CE32BQ0J221M | E CAPACITOR | 220uF 6.3V M | 1 | |
| | C305 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C306 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C307 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C308 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C309 | CC73HCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C310 | CC73HCH1H040C | C CAPACITOR | 4pF 50V C | 1 | |
| | C311 | CC73HCH1H080D | C CAPACITOR | 8pF 50V D | 1 | |
| | C312 | CC73HCH1H080D | C CAPACITOR | 8pF 50V D | 1 | |
| | C313 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C314 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C315 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C316 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C317 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C318 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C319 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C320 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C321 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C322 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C324 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C327 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C328 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C329 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C330 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C331 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C332 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C339 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C340 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C341 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C342 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C343 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C344 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C345 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C346 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C501 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C502 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C503 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C504 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C505 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C506 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C507 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C512 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C513 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C514 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C515 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C520 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C521 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C522 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C523 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C524 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C525 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C526 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C527 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C528 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C529 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C530 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C531 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C532 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C533 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C534 | CK73GXR0J225K | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C535 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C536 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C537 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C538 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C539 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C540 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C541 | CK73GXR0J225K | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C542 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C543 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C544 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C545 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C549 | CC73HCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C550 | CC73HCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C551 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C552 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C553 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C554 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C558 | CK73HBB1H332K | C CAPACITOR | 3300pF 50V K | 1 | |
| | C559 | CK73HBB1H332K | C CAPACITOR | 3300pF 50V K | 1 | |
| | C560 | CK73HBB1H332K | C CAPACITOR | 3300pF 50V K | 1 | |
| | C561 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C562 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C563 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C564 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C565 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C566 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C567 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|----------------|---------------|-----|-------|
| | C568 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C569 | CK73GXR1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C571 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C603 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C605 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C606 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C607 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C609 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C611 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C613 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C615 | CK73HBB1A683K | C CAPACITOR | 0.068uF 10V K | 1 | |
| | C616 | CK73HBB1A683K | C CAPACITOR | 0.068uF 10V K | 1 | |
| | C617 | CK730BY1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C620 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C621 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C622 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C721 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C722 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C734 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C736 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C737 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C751 | CA32AK0J221M | AS E CAPACITOR | 220uF 6.3V M | 1 | |
| | C752 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C753 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C760 | CK73HBB1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C761 | CK73FXR0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C791 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C792 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C793 | CK73HBB1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C794 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C795 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C832 | CK73FXR0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C833 | CK73GXR1E224K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C879 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C881 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C882 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C884 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C885 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C887 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C888 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C890 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C891 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C892 | CE32BJ1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C893 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C895 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C896 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C897 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C898 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C899 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C921 | CK73GXR1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C922 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C923 | CC73HCH1H470J | C CAPACITOR | 47pF 50V J | 1 | |
| | C924 | NDCA1HG-2R7W | C CAPACITOR | 2.7pF 50V G | 1 | |
| | C925 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C926 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C927 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C928 | CC73HCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C929 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C930 | CK73GXR1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C931 | CK73GXR0J225K | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C932 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C933 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C934 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C935 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C936 | CC73HCH1H070D | C CAPACITOR | 7pF 50V D | 1 | |
| | C937 | CC73HCH1H070D | C CAPACITOR | 7pF 50V D | 1 | |
| | C938 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C939 | CC73HCH1H020C | C CAPACITOR | 2pF 50V C | 1 | |
| | C940 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C951 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C952 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C978 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | R1 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R2 | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J | 1 | |
| | R3 | RK73HB1J334J | MG RESISTOR | 330kΩ 1/16W J | 1 | |
| | R4 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | |
| | R5 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | |
| | R6 | RK73HH1J333D | MG RESISTOR | 33kΩ 1/16W D | 1 | |
| | R7 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R8 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R9 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R10 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R11 | RK73HH1J134D | MG RESISTOR | 130kΩ 1/16W D | 1 | |
| | R12 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R13 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R14 | RK73HH1J304D | MG RESISTOR | 300kΩ 1/16W D | 1 | |
| | R15 | RK73HH1J304D | MG RESISTOR | 300kΩ 1/16W D | 1 | |
| | R16 | RK73HH1J822D | MG RESISTOR | 8.2kΩ 1/16W D | 1 | |
| | R17 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R18 | RK73HH1J683D | MG RESISTOR | 68kΩ 1/16W D | 1 | |
| | R19 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R20 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R31 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R33 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R34 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R35 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R36 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R37 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R38 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R39 | RK73HH1J101D | MG RESISTOR | 100Ω 1/16W D | 1 | |
| | R40 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R51 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R53 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R54 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R55 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R56 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R57 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R58 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R59 | RK73HH1J101D | MG RESISTOR | 100Ω 1/16W D | 1 | |
| | R60 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R62 | RK73HH1J100D | MG RESISTOR | 10Ω 1/16W D | 1 | |
| | R64 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R65 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R66 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R91 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R92 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R94 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R95 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R96 | RK73HH1J100D | MG RESISTOR | 10Ω 1/16W D | 1 | |
| | R97 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R98 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R99 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R100 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R101 | RK73EB2E151J | MG RESISTOR | 150Ω 1/4W J | 1 | |
| | R104 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R105 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R106 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R107 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R110 | RZ73F0CH30LJ | RESISTOR | | 1 | |
| | R111 | RZ73F0CH30LJ | RESISTOR | | 1 | |
| | R112 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R113 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R114 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R115 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R116 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R117 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R118 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R119 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R120 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R121 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R122 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R123 | RK73HH1J302D | MG RESISTOR | 3kΩ 1/16W D | 1 | |
| | R124 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R125 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R127 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R129 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R131 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | K0 |
| | R132 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | K0 |
| | R134 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | K0 |
| | R135 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R136 | RK73HH1J100D | MG RESISTOR | 10Ω 1/16W D | 1 | K0 |
| | R137 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | K0 |
| | R138 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | K0 |
| | R139 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | K0 |
| | R140 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R141 | RK73EB2E151J | MG RESISTOR | 150Ω 1/4W J | 1 | K0 |
| | R144 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | K0 |
| | R145 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | K0 |
| | R146 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R147 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R150 | RZ73F0CH30LJ | RESISTOR | | 1 | K0 |
| | R151 | RZ73F0CH30LJ | RESISTOR | | 1 | K0 |
| | R152 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | K0 |
| | R153 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | K0 |
| | R154 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | K0 |
| | R155 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | K0 |
| | R156 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | K0 |
| | R157 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | K0 |
| | R158 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | K0 |
| | R159 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | K0 |
| | R160 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | K0 |
| | R161 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | K0 |
| | R162 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | K0 |
| | R163 | RK73HH1J302D | MG RESISTOR | 3kΩ 1/16W D | 1 | K0 |
| | R164 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R165 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | K0 |
| | R167 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R169 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R188 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R189 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R203 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R206 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R207 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R208 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R209 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R210 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R211 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R216 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R224 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R225 | RK73HH1J822D | MG RESISTOR | 8.2kΩ 1/16W D | 1 | |
| | R226 | RK73HH1J821D | MG RESISTOR | 820Ω 1/16W D | 1 | |
| | R227 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R228 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R229 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R230 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R301 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R308 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R309 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R310 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R311 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R312 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R313 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R314 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R315 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R316 | RK73HB1J154J | MG RESISTOR | 150kΩ 1/16W J | 1 | |
| | R317 | RK73HB1J154J | MG RESISTOR | 150kΩ 1/16W J | 1 | |
| | R318 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R320 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R321 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R322 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R323 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R324 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R325 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R326 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R327 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R329 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R330 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R331 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R332 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R333 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R334 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R335 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R337 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R338 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R339 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R340 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R341 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R342 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R343 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R344 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R347 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R348 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R349 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R350 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R351 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R352 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R355 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R356 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R357 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R358 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R359 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R360 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R361 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R362 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R363 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R365 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R366 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R367 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R368 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R369 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R370 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R371 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R372 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R373 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R374 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R375 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R376 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R378 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R379 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R380 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R381 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R382 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R383 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R384 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R385 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R386 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R387 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R388 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R389 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R390 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R391 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R392 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R393 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R394 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R396 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R397 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R398 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R399 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R400 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R401 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R404 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R405 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R406 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R407 | RK73HH1J564D | MG RESISTOR | 560kΩ 1/16W D | 1 | K1 |
| | R408 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R409 | RK73HH1J134D | MG RESISTOR | 130kΩ 1/16W D | 1 | |
| | R410 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R411 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R412 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R413 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R414 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R420 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R421 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R422 | RK73HB1J821J | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R423 | RK73HB1J271J | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R424 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R425 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R426 | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R427 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R428 | RK73HB1J124J | MG RESISTOR | 120kΩ 1/16W J | 1 | |
| | R429 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R430 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R431 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R432 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R433 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R434 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R437 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R443 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R444 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R503 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R504 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R506 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R507 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R510 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R511 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R512 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R513 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R514 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R515 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R518 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R519 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R520 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R521 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R522 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R523 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R524 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R531 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R532 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R533 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R534 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R535 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R536 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R538 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R539 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R540 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R541 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R542 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R543 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R544 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R545 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R546 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R547 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R550 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R551 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R552 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R553 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R554 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R555 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R556 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R558 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R559 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R560 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R561 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R562 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R563 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R564 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R565 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R566 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R567 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R568 | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R569 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R570 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R573 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R574 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R575 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R576 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R577 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R578 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R579 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R582 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R583 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R584 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R585 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R586 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R588 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R589 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R590 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R591 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R592 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R593 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R594 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R595 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R596 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R599 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R600 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R604 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R609 | RK73HB1J203J | MG RESISTOR | 20kΩ 1/16W J | 1 | |
| | R610 | RK73HB1J203J | MG RESISTOR | 20kΩ 1/16W J | 1 | |
| | R611 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R612 | RK73HB1J304J | MG RESISTOR | 300kΩ 1/16W J | 1 | |
| | R614 | RK73HB1J304J | MG RESISTOR | 300kΩ 1/16W J | 1 | |
| | R615 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R616 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R617 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R618 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R620 | RK73HB1J123J | MG RESISTOR | 12kΩ 1/16W J | 1 | |
| | R621 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R622 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R624 | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1 | |
| | R638 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R721 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R722 | RK73GB2A220J | MG RESISTOR | 22Ω 1/10W J | 1 | |
| | R724 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R725 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R726 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R727 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R734 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R735 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R741 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R743 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R754 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R755 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R756 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R757 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R758 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R759 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R760 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R791 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R792 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R793 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R794 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R795 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R796 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R803 | RK73GH2A472D | MG RESISTOR | 4.7kΩ 1/10W D | 1 | |
| | R804 | RK73GH2A472D | MG RESISTOR | 4.7kΩ 1/10W D | 1 | |
| | R807 | RK73HB1J152J | MG RESISTOR | 1.5kΩ 1/16W J | 1 | |
| | R808 | RK73HB1J152J | MG RESISTOR | 1.5kΩ 1/16W J | 1 | |
| | R809 | RK73HB1J681J | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R810 | RK73HB1J681J | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R821 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R825 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R826 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R827 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R839 | RK73HB1J750J | MG RESISTOR | 75Ω 1/16W J | 1 | |
| | R871 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R873 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R874 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R876 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R877 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R878 | RK73HH1J391D | MG RESISTOR | 390Ω 1/16W D | 1 | |
| | R879 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R884 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R886 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R887 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R888 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R889 | RK73HH1J683D | MG RESISTOR | 68kΩ 1/16W D | 1 | |
| | R890 | RK73HH1J683D | MG RESISTOR | 68kΩ 1/16W D | 1 | |
| | R891 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R921 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R922 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R923 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R925 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R926 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R929 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R930 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R951 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | |
| | R952 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R953 | RK73HH1J303D | MG RESISTOR | 30kΩ 1/16W D | 1 | |
| | R987 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R988 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R989 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R990 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------------------------------------|------------|---------------|-----------------|--------------|-----|-------|
| | R991 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R992 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R993 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R994 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R995 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R996 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | RA791 | RK74GB1J301J | NET RESISTOR | 300Ω 1/16W J | 1 | |
| | RA821 | RK74GB1J301J | NET RESISTOR | 300Ω 1/16W J | 1 | |
| | RA822 | RK74GB1J301J | NET RESISTOR | 300Ω 1/16W J | 1 | |
| | L32 | NQR0723-001X | CHOKO COIL | | 1 | |
| | L52 | NQR0723-001X | CHOKO COIL | | 1 | |
| | L92 | NQR0723-001X | CHOKO COIL | | 1 | |
| | L132 | NQR0723-001X | CHOKO COIL | | 1 | K0 |
| | L301 | LB73G0BD-006 | CHIP FERRITE | | 1 | |
| | L751 | LR79Z0AG100M | CHIP INDUCTOR | 10uH | 1 | |
| | L871 | LR73Z0AC100K | CHIP INDUCTOR | 10uH | 1 | |
| | L921 | NQLP9AJ-27NX | INDUCTOR | 27nH J | 1 | |
| | L922 | LR79H0AZ8N2G | CHIP INDUCTOR | | 1 | |
| | L923 | NQLZ021-9N1X | INDUCTOR | 9.1nH | 1 | |
| | L924 | NQR0593-001X | FERRITE BEADS | | 1 | |
| | L925 | NQR0593-001X | FERRITE BEADS | | 1 | |
| | L926 | NAX1261-001X | SAW FILTER | | 1 | |
| | A921 | W0C-0070-00 | RF MODULE | QFN | 1 | |
| | CN1 | QGA2001F1-04 | W TO B CONNE | W-B (1-4) | 1 | |
| | CN201 | QGA2001C1-02 | W TO B CONNE | W-B (1-2) | 1 | |
| | CN251 | QGA2001C1-04 | W TO B CONNE | W-B (1-4) | 1 | |
| | CN301 | QGA1002F1-08X | W TO B CONNE | W-B (1-8) | 1 | |
| | CN601 | EB770AX-05C0A | B TO B CONNE | | 1 | |
| | CN602 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN603 | EC720AA-0560A | FFC FPC CONNE | | 1 | |
| | CN721 | EA120CE-2503A | W TO B CONNE | | 1 | |
| | CN731 | QGA2021F1-04 | W TO B CONNE | W-B (1-4) | 1 | |
| | CN751 | EC710AM-0535A | FFC FPC CONNE | | 1 | |
| | CN802 | QGA2001C1-04 | W TO B CONNE | W-B (1-4) | 1 | |
| | CN952 | EC720AA-0515A | FFC FPC CONNE | | 1 | |
| △ | F1 | FZA10BZ-7R0 | FUSE (CC) | | 1 | |
| △ | F721 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F731 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F732 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F751 | FZA10AC-1R0 | FUSE (CC) | | 1 | |
| △ | F791 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F801 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F832 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| | J601 | QNS0307-001 | 3.5 JACK | | 1 | |
| | J791 | QNS0291-001 | 3.5 JACK | | 1 | |
| | J921 | E5J-0023-00 | R.RECEPTACLE | | 1 | |
| | VA734 | EZJZ0180HA | VARIATOR | | 1 | |
| | VA735 | EZJZ0180HA | VARIATOR | | 1 | |
| | VA791 | EZJP0080MA | VARIATOR | | 1 | |
| | VA792 | EZJP0080MA | VARIATOR | | 1 | |
| | VA793 | EZJP0270RA | VARIATOR | | 1 | |
| | VA794 | EZJP0270RA | VARIATOR | | 1 | |
| | VA823 | EZJP0270RA | VARIATOR | | 1 | |
| | VA824 | EZJP0270RA | VARIATOR | | 1 | |
| | VA835 | EZJP0270RA | VARIATOR | | 1 | |
| | VA921 | NAF0029-002X | ESD SUPPRESSOR | | 1 | |
| | X301 | NAX1248-001X | CRYSTAL | | 1 | |
| | X302 | NAX1137-001X | CRYSTAL | | 1 | |
| | X501 | NAX1204-001X | CRYSTAL | | 1 | |
| | X921 | L7H-0069-00 | TCXO | | 1 | |
| | X922 | NAX1248-001X | CRYSTAL | | 1 | |
| AUDIO PWB ASSY (XJ6-106K-0x) <XJ6> | | | | | | |
| | IC1 | LV5680NPVC-H | MOS IC | | 1 | |
| | IC41 | XC6223B331P-G | ANALOG IC | | 1 | |
| | IC42 | XC6216B852P-G | ANALOG IC | | 1 | |
| | IC101 | JCV8031 | IC | | 1 | |
| | IC115 | TC7SH17FUF | MOS IC | | 1 | |
| | IC201 | TDA7715 | ANALOG IC | | 1 | |
| | IC260 | TC74HCT4053FT | MOS IC | | 1 | |
| | IC261 | NJM2794RB2 | BIPOLAR IC | | 1 | |
| | IC301 | XC6223B331P-G | ANALOG IC | | 1 | |
| | IC511 | TC7SET32FU-X | IC(DIGITAL) | OR | 1 | |
| | IC512 | TC7SH17FUF | MOS IC | | 1 | |
| | IC601 | NJW1240V | MOS IC | | 1 | |
| | IC1101 | NJM2746V | ANALOG IC | | 1 | K0 |
| | IC1102 | NJM2746V | ANALOG IC | | 1 | K0 |
| | Q31 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q32 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q51 | LTC024EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q60 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q61 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q62 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q63 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q80 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q81 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q82 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q90 | LTC024EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q96 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q151 | LTC014YUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q152 | LTA043ZUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q155 | LTC014YUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q156 | LTA043ZUBFS8 | DIGI TRANSISTOR | | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|----------------|-----------------|---------------|-----|-------|
| | Q161 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q162 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q163 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q164 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q165 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q191 | LTA043ZUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q193 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q194 | LTC043TUBFS8 | DIGI TRANSISTOR | | 1 | |
| | D1 | 1N5402-BPC07 | DIODE | | 1 | |
| | D11 | RB161M-20 | SCHOTTKY DIODE | | 1 | |
| | D32 | DZ2J110M | ZENER DIODE | | 1 | |
| | D41 | GS1J-LTP | DIODE | | 1 | |
| | D42 | GS1J-LTP | DIODE | | 1 | |
| | D43 | GS1J-LTP | DIODE | | 1 | |
| | D44 | GS1J-LTP | DIODE | | 1 | |
| | D55 | DZ2J062M | ZENER DIODE | | 1 | |
| | D60 | DA2J101 | DIODE | | 1 | |
| | D71 | MC2846-X | SI DIODE | | 1 | |
| | D80 | DA2J101 | DIODE | | 1 | |
| | D90 | DA2J101 | DIODE | | 1 | |
| | D96 | DZ2J160M | ZENER DIODE | | 1 | |
| | D101 | MC2846-X | SI DIODE | | 1 | |
| | D151 | MC2846-X | SI DIODE | | 1 | |
| | D155 | MC2846-X | SI DIODE | | 1 | |
| | D191 | MC2846-X | SI DIODE | | 1 | |
| | D202 | DA2J101 | DIODE | | 1 | |
| | D203 | MC2846-X | SI DIODE | | 1 | |
| | D204 | MC2846-X | SI DIODE | | 1 | |
| | D205 | MC2846-X | SI DIODE | | 1 | |
| | D260 | DA2J101 | DIODE | | 1 | |
| | D261 | DZ2J047M | ZENER DIODE | | 1 | |
| | D302 | GS1J-LTP | DIODE | | 1 | |
| | C1 | CD04AZ1C332M2 | E CAPACITOR | 3300uF 16V M | 1 | K1 |
| | C1 | CD04EW1C332M2 | E CAPACITOR | 3300uF 16V M | 1 | K0 |
| | C11 | CE32CB1V101M | E CAPACITOR | 100uF 35V M | 1 | |
| | C12 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C13 | CE32CB1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C14 | CE32CB1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C15 | CE32CB1A101M | E CAPACITOR | 100uF 10V M | 1 | |
| | C16 | CE32CC1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C18 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C19 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C20 | CE32CC1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C21 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C23 | CK73GGB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C24 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C25 | CK73GGB1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C26 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C27 | CE32CC1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C31 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C32 | CK73GGB1H333K | C CAPACITOR | 0.033uF 50V K | 1 | |
| | C41 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C42 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C43 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C44 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C51 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C52 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C60 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C71 | NCJA1EK-104W-G | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C80 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C90 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C96 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C97 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C100 | CE32CB1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C101 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C102 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C103 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C104 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C105 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C106 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C109 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C110 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C111 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C112 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C113 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C114 | CK73FBB1E474K | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C115 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C121 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C122 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C123 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C124 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C125 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C126 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C127 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C128 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C131 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C132 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C133 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C134 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C135 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C136 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C137 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|--------------|-----|-------|
| | C138 | CK73HBB1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C145 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C146 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C151 | CE32CB1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C152 | CE32CB1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C153 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C154 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C155 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C171 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C172 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C173 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C174 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C175 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C177 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C191 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C192 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C195 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C196 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C197 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C201 | CE32CB1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C202 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C203 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C204 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C205 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C206 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C207 | CK73GXR1C474K | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C208 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C209 | CK73GXR1C474K | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C211 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C212 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C215 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C216 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C217 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C218 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C219 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C220 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C223 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C224 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C225 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C227 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C228 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C229 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C234 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C235 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C264 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C265 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C266 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C267 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C268 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C272 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C273 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C274 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C275 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C276 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C277 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C278 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C279 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C280 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C281 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C282 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C283 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C284 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C285 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C286 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C302 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C303 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C304 | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C305 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C306 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C308 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C309 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C321 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C322 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C501 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C502 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C503 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C511 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C512 | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C601 | CE32CB1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C602 | CE32CB1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C603 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C604 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C605 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C610 | CK73EBB1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C611 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C612 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C613 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C614 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C616 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C618 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C619 | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C711 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | K1 |
| | C712 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | K1 |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|----------------|---------------|-----|-------|
| | C713 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | K1 |
| | C714 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | K1 |
| | C715 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C716 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C721 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C722 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C1204 | CB73QAD1C106M | FILM CAPACITOR | 10uF 16V M | 1 | K0 |
| | C1711 | CB73QAD1C106M | FILM CAPACITOR | 10uF 16V M | 1 | K0 |
| | C1712 | CB73QAD1C106M | FILM CAPACITOR | 10uF 16V M | 1 | K0 |
| | C1713 | CB73QAD1C106M | FILM CAPACITOR | 10uF 16V M | 1 | K0 |
| | C1714 | CB73QAD1C106M | FILM CAPACITOR | 10uF 16V M | 1 | K0 |
| | R1 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R15 | RK73GH2A273D | MG RESISTOR | 27kΩ 1/10W D | 1 | |
| | R17 | RK73GH2A472D | MG RESISTOR | 4.7kΩ 1/10W D | 1 | |
| | R18 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R19 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R23 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R24 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R25 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R27 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R31 | RK73EB2E622J | MG RESISTOR | 6.2kΩ 1/4W J | 1 | |
| | R32 | RK73EB2E622J | MG RESISTOR | 6.2kΩ 1/4W J | 1 | |
| | R33 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | |
| | R34 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R35 | RK73HH1J474D | MG RESISTOR | 470kΩ 1/16W D | 1 | |
| | R36 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R37 | RK73EB2E153J | MG RESISTOR | 15kΩ 1/4W J | 1 | |
| | R38 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R41 | RK73FB2B472J | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R42 | RK73FB2B472J | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R51 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R52 | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J | 1 | |
| | R55 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R60 | RK73HB1J182J | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R61 | RK73GB2A111J | MG RESISTOR | 110Ω 1/10W J | 1 | |
| | R62 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R63 | RK73HB1J243J | MG RESISTOR | 24kΩ 1/16W J | 1 | |
| | R64 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R65 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R66 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R67 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R68 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R69 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R70 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R72 | RK73HB1J123J | MG RESISTOR | 12kΩ 1/16W J | 1 | |
| | R73 | RK73HB1J683J | MG RESISTOR | 68kΩ 1/16W J | 1 | |
| | R74 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R80 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R81 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R82 | RK73FB2B103J | MG RESISTOR | 10kΩ 1/8W J | 1 | |
| | R83 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R84 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R90 | RK73GB2A272J | MG RESISTOR | 2.7kΩ 1/10W J | 1 | |
| | R91 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R96 | RK73FB2B752J | MG RESISTOR | 7.5kΩ 1/8W J | 1 | |
| | R97 | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J | 1 | |
| | R98 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R101 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R101 | RK73HH1J680D | MG RESISTOR | 68Ω 1/16W D | 1 | K0 |
| | R102 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R102 | RK73HH1J680D | MG RESISTOR | 68Ω 1/16W D | 1 | K0 |
| | R103 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R103 | RK73HH1J680D | MG RESISTOR | 68Ω 1/16W D | 1 | K0 |
| | R104 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R104 | RK73HH1J680D | MG RESISTOR | 68Ω 1/16W D | 1 | K0 |
| | R115 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R141 | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1 | |
| | R142 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R143 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R144 | RK73HB1J751J | MG RESISTOR | 750Ω 1/16W J | 1 | K1 |
| | R144 | RK73HB1J432J | MG RESISTOR | 4.3kΩ 1/16W J | 1 | K0 |
| | R145 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R146 | RK73HB1J3R0J | MG RESISTOR | 3Ω 1/16W J | 1 | K1 |
| | R146 | RK73HB1J1R0J | MG RESISTOR | 1Ω 1/16W J | 1 | K0 |
| | R147 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R148 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R151 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R152 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R153 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R154 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R155 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R156 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R157 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R159 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R160 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R161 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R162 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R163 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R164 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R165 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R171 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R172 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-----------------|---------------|-----|-------|
| | R173 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R174 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R175 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R191 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R192 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R193 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R194 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R195 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R196 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R201 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R202 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R204 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R205 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R206 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R209 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R264 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R265 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R266 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R274 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R275 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R276 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R279 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R280 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R281 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R283 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R284 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R285 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R290 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R291 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R293 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R294 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R301 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R331 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R332 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R333 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R334 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R500 | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J | 1 | |
| | R501 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R502 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R503 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R511 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R512 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R513 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R514 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R515 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R516 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R517 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R581 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R582 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R583 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R611 | RK73GB2A2R2J | MG RESISTOR | 2.2Ω 1/10W J | 1 | |
| | R612 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R614 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R615 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R616 | RK73HB1J684J | MG RESISTOR | 680kΩ 1/16W J | 1 | |
| | R824 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R825 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R967 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R968 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R1101 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R1101 | RK73GH2A680D | MG RESISTOR | 68Ω 1/10W D | 1 | K0 |
| | R1102 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R1102 | RK73GH2A680D | MG RESISTOR | 68Ω 1/10W D | 1 | K0 |
| | R1103 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R1103 | RK73GH2A680D | MG RESISTOR | 68Ω 1/10W D | 1 | K0 |
| | R1104 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R1104 | RK73GH2A680D | MG RESISTOR | 68Ω 1/10W D | 1 | K0 |
| | R1111 | RK73HB1J120J | MG RESISTOR | 12Ω 1/16W J | 1 | K1 |
| | R1112 | RK73HB1J120J | MG RESISTOR | 12Ω 1/16W J | 1 | K1 |
| | R1113 | RK73HB1J120J | MG RESISTOR | 12Ω 1/16W J | 1 | K1 |
| | R1114 | RK73HB1J120J | MG RESISTOR | 12Ω 1/16W J | 1 | K1 |
| | R1146 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R1146 | RK73HH1J160D | MG RESISTOR | 16Ω 1/16W D | 1 | K0 |
| | L1 | QQR1909-001 | CHOKE COIL | | 1 | |
| | L301 | LR73Z0AD4R7M | CHIP INDUCTOR | 4.7uH | 1 | |
| | L601 | LK73G0AQ1R0K | M.CHIP INDUCTOR | 1uH | 1 | |
| | A301 | QAU0565-001 | TUNER | | 1 | |
| | CN201 | EC720AA-0560A | FFC FPC CONNE | | 1 | |
| | CN301 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN302 | QGA2001C1-04 | W TO B CONNE | W-B (1-4) | 1 | |
| △ | F6 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F7 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F171 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F191 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| △ | F581 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| | J1 | E5J-0022-00 | R.RECEPTACLE | | 1 | |
| | J151 | QNN0889-001 | PIN JACK | | 1 | K1 |
| | J151 | QNN0888-001 | PIN JACK | | 1 | K0 |
| | J191 | QNS0307-001 | 3.5 JACK | | 1 | |
| | J501 | QNZ0907-001 | CIR CONNECTOR | | 1 | |
| | J581 | QNS0307-001 | 3.5 JACK | | 1 | |
| | TH101 | PRF18BE471QS5 | P THERMISTOR | | 1 | |
| | VA52 | EZJP0270EA | VARISTOR | | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|--|------------|---------------|-----------------|--------------|-----|-------|
| | VA60 | EZJP0270RA | VARISTOR | | 1 | |
| | VA62 | EZJP0270EA | VARISTOR | | 1 | |
| | VA72 | EZJP0270EA | VARISTOR | | 1 | |
| | VA74 | EZJP0270RA | VARISTOR | | 1 | |
| | VA75 | EZJP0270RA | VARISTOR | | 1 | |
| | VA96 | EZJP0270EA | VARISTOR | | 1 | |
| | VA171 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA172 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA173 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA174 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA175 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA177 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA195 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA196 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA197 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA301 | NAF0029-002X | ESD SUPPRESSOR | | 1 | |
| | VA501 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA502 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA503 | EZJZ0180HA | VARISTOR | | 1 | |
| | VA511 | EZJP0270EA | VARISTOR | | 1 | |
| | VA512 | EZJP0270EA | VARISTOR | | 1 | |
| | VA513 | EZJP0270EA | VARISTOR | | 1 | |
| | VA581 | EZJP0080MA | VARISTOR | | 1 | |
| | VA582 | EZJP0080MA | VARISTOR | | 1 | |
| | VA583 | EZJP0080MA | VARISTOR | | 1 | |
| | W301 | QAM1484-001 | CAR CABLE | | 1 | |
| DIGITAL IO PWB ASSY (XJA-057K-0x) <XJA> | | | | | | |
| | IC501 | TCC8930G-0CX2 | MPU IC | | 1 | |
| | IC503 | W3F-0314-00 | ROM IC | | 1 | |
| | IC525 | ----- | ROM IC | BGA | 1 | |
| | IC531 | H5TQ463CFRRDC | DRAM IC | BGA | 1 | |
| | IC532 | H5TQ463CFRRDC | DRAM IC | BGA | 1 | |
| | IC541 | ML86250LAZ07F | MOS IC | BGA | 1 | |
| | IC543 | TC7WBL3305CFK | MOS IC | | 1 | |
| | IC544 | TC7SH08FUJC | MOS IC | | 1 | |
| | IC545 | TC7SH32FUJC | MOS IC | | 1 | |
| | IC546 | TC7SH08FUJC | MOS IC | | 1 | |
| | IC563 | MFI337S395901 | MCU IC | | 1 | |
| | IC571 | TPS2543RTE | MOS IC | | 1 | |
| | IC573 | CYUSB230268LI | MOS IC | | 1 | K0 |
| | IC574 | XC6223B121P-G | ANALOG IC | | 1 | K0 |
| | IC591 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC592 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC594 | XC6223H251M-G | ANALOG IC | | 1 | |
| | IC595 | BU18TD3WG | MOS IC | | 1 | |
| | IC596 | BD00IC0EEFJ-M | ANALOG IC | | 1 | |
| | IC597 | BD15KA5WFP | MOS IC | | 1 | |
| | IC601 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC602 | TC7SH08FUJC | MOS IC | | 1 | |
| | IC631 | NJM2561F1 | BIPOLAR IC | | 1 | |
| | Q5401 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q5402 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q5403 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q5603 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q5604 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q5605 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q5606 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q5607 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q5608 | 2SC4617EB/QR/ | TRANSISTOR | | 1 | |
| | Q6301 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | C631 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C632 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C633 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5001 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5002 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5003 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5004 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5005 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C5006 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5007 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5008 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5009 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5010 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5014 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5015 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5016 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5018 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5019 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C5020 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5021 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5022 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5023 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5024 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5025 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5026 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5027 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5028 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5029 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5030 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5031 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5032 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|----------------|--------------|-----|-------|
| | C5033 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5034 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5035 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5036 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5037 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5038 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5039 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5041 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5045 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5047 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5048 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5049 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5053 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5054 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5055 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5056 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5057 | CC73HCH1H080D | C CAPACITOR | 8pF 50V D | 1 | |
| | C5058 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5061 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5062 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5063 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5065 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5066 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5067 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5068 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5069 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5071 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5072 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5073 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5074 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5075 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5076 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5077 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5078 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5079 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5080 | CC73HCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C5083 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5084 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5085 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5086 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5087 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5088 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5089 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5096 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5097 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5098 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5099 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5100 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5102 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5103 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5104 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5201 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5202 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5203 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5204 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5251 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5252 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5253 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5255 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5259 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5263 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5269 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5301 | CS77FBK0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C5302 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5303 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5304 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5305 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5306 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5307 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5308 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5309 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5311 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5312 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5313 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5314 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5315 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5316 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5317 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5318 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5319 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5320 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5321 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5322 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5323 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5324 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5325 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5326 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5327 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5328 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5329 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5330 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5331 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5332 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|--------------|-----|-------|
| | C5333 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5334 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5335 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5336 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5337 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5338 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5339 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5340 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5341 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5342 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5343 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5344 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5345 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5346 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5347 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5348 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5349 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5350 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5351 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5352 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5353 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5354 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5355 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5356 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5357 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5358 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5359 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5360 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5361 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5362 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5363 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5364 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5365 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5366 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5367 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5368 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5369 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5370 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5372 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5373 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5374 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5375 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5376 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5377 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5378 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5379 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5380 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5381 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5382 | CC73HCH1H181J | C CAPACITOR | 180pF 50V J | 1 | |
| | C5383 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5385 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5401 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5402 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5471 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5472 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5473 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5474 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5475 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5476 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5479 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5480 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5481 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5482 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5484 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5485 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5486 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5487 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5488 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5489 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5490 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5491 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5493 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5494 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C5495 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C5496 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5497 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C5498 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5499 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C5500 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5501 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5502 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5503 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5504 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5505 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5506 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5507 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5508 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5509 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5510 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5511 | CC73HCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C5512 | CC73HCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C5513 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
| | C5514 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5515 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5517 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C5518 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5519 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5520 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5521 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5523 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5524 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5530 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5531 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5532 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5533 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5632 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5701 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5704 | CC73HCH1H080D | C CAPACITOR | 8pF 50V D | 1 | K0 |
| | C5705 | CC73HCH1H080D | C CAPACITOR | 8pF 50V D | 1 | K0 |
| | C5710 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5711 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5712 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5713 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5714 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5715 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5716 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5717 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5718 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5719 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5720 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5721 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5722 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5723 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5724 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5725 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5726 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5727 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5728 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5729 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C5730 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C5731 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C5740 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C5741 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C5903 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5904 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5905 | CK73GXR1E224K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C5907 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5908 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5910 | CC73HCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C5911 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5912 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5913 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5916 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5917 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5918 | CK73GXR1E224K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C5920 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5921 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5923 | CC73HCH1H470J | C CAPACITOR | 47pF 50V J | 1 | |
| | C5924 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5925 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5926 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C5931 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5932 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5933 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5934 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C5936 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5937 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5938 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5940 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5941 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C5961 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C5962 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C5963 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J | 1 | |
| | C5965 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C5983 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5984 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C5985 | CK73GXR1E224K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C5991 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5993 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C5995 | CC73HCH1H470J | C CAPACITOR | 47pF 50V J | 1 | |
| | C5996 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5997 | CK73EXR1A476K | C CAPACITOR | 47uF 10V K | 1 | |
| | C5998 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C6025 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C6026 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C6027 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C6028 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C6029 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C6030 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C6301 | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | R2 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R6 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R631 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R632 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
| | R633 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R5001 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5002 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R5003 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5005 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5007 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5008 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5009 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5012 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5014 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5015 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5016 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5017 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5019 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5020 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5021 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5023 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5024 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5025 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5027 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5028 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5029 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5030 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5031 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5032 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5033 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5034 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5035 | RK73HH1J44R2D | MG RESISTOR | 44.2Ω 1/16W D | 1 | |
| | R5036 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5037 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5038 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5039 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5040 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5043 | RK73HH1J241D | MG RESISTOR | 240Ω 1/16W D | 1 | |
| | R5044 | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R5045 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5046 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5047 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5048 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5050 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5051 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5052 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R5053 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5054 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5057 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R5058 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5060 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5061 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5063 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5064 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5065 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5066 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5068 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5070 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5071 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5072 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5073 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5074 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5076 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5078 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5079 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5081 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5083 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5089 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5090 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5091 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5093 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5095 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5098 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5100 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5102 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5103 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5105 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5109 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5113 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5115 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5116 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5122 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5123 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5125 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5126 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5127 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5128 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5134 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5135 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5136 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5137 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5139 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5140 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5151 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5152 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5153 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5201 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R5203 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5204 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5205 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5206 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5220 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5221 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5222 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5223 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5224 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5225 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5226 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5227 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5231 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5232 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5233 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5234 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5236 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5237 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5238 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5251 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R5265 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5266 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5268 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5269 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5270 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5271 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5272 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5273 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5274 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5275 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5276 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5277 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5278 | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J | 1 | |
| | R5301 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5302 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5303 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5304 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5305 | RK73HH1J241D | MG RESISTOR | 240Ω 1/16W D | 1 | |
| | R5306 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5307 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5308 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5309 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5310 | RK73HH1J241D | MG RESISTOR | 240Ω 1/16W D | 1 | |
| | R5311 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5312 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5313 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R5407 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5408 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R5410 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R5411 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R5419 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5420 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5422 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5424 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5425 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5428 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5429 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5430 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R5434 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5435 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5437 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5438 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5444 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5445 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5450 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5451 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5452 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5453 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5454 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5456 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5471 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5472 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R5473 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5474 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5477 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5478 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5481 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5482 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5484 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5485 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5486 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5487 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5488 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5489 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5490 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5491 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5494 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5496 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5497 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5501 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5502 | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R5503 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R5504 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5505 | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R5506 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R5507 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | |
| | R5508 | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R5509 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R5631 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5633 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5634 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5641 | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R5643 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5644 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5645 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5646 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5647 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5648 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5649 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5651 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5658 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5665 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5666 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R5667 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5668 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5669 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5670 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5672 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5673 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5679 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5680 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5703 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5704 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5705 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5707 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5709 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5712 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5713 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5714 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5717 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5718 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5719 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R5723 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5727 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R5729 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5731 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5732 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R5733 | RK73HH1J201D | MG RESISTOR | 200Ω 1/16W D | 1 | K0 |
| | R5734 | RK73HH1J362D | MG RESISTOR | 3.6kΩ 1/16W D | 1 | K0 |
| | R5735 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | K0 |
| | R5736 | RK73HH1J241D | MG RESISTOR | 240Ω 1/16W D | 1 | K0 |
| | R5751 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R5752 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R5753 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R5754 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K1 |
| | R5755 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | R5756 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | R5759 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | R5760 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | R5790 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | K0 |
| | R5791 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | K0 |
| | R5804 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5805 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5806 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5808 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5809 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5810 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5811 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5812 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5813 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5815 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5816 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5817 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5828 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5830 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5831 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5832 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5833 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5834 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5836 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R5837 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5838 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5839 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5840 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5841 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5842 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5843 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5844 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5845 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5846 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5847 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5853 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5855 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5856 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5857 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R5858 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5859 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5887 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5911 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5914 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5915 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R5916 | RK73FB2B000J | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R5918 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R5920 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R5921 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5922 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R5923 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R5924 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R5925 | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D | 1 | |
| | R5926 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R5927 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5928 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R5930 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R5931 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5932 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5933 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5934 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5935 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R5952 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R5954 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5955 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |
| | R5956 | RK73HH1J751D | MG RESISTOR | 750Ω 1/16W D | 1 | |
| | R5962 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R5964 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R5967 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R5970 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R5971 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R5987 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R5988 | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J | 1 | |
| | R5990 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R5991 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R5992 | RK73HH1J912D | MG RESISTOR | 9.1kΩ 1/16W D | 1 | |
| | R5993 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5994 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R5995 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R6002 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6003 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6004 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6005 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6007 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6009 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6010 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6011 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6012 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6013 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6014 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6015 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6016 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6018 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6043 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6044 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6045 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6046 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6047 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6048 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6049 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6050 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6051 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6052 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6053 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6054 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6055 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6056 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6057 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6058 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6059 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6060 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R6061 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6062 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6063 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6064 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6065 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6066 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R6075 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6081 | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J | 1 | |
| | R6082 | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J | 1 | |
| | R6270 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6271 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6272 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6273 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6274 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6275 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6276 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6277 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6278 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6279 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6280 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|---------------|---------------|-----|-------|
| | R6281 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6282 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6283 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6284 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6285 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6286 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6287 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6288 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6289 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6290 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6291 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6292 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6293 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6294 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6295 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6296 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R6301 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6302 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6303 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6304 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6305 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6306 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6307 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6308 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6309 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6310 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6311 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6312 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6313 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R6314 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R6315 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R6317 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6318 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6319 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6321 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6322 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6323 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R6324 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6327 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R6329 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R6330 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R6331 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | RA5001 | RK74HB1J103J | NET RESISTOR | 10kΩ 1/16W J | 1 | |
| | RA5201 | RK74HB1J473J | NET RESISTOR | 47kΩ 1/16W J | 1 | |
| | RA5202 | RK74HB1J473J | NET RESISTOR | 47kΩ 1/16W J | 1 | |
| | L631 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5001 | LB73G0BK-002 | CHIP FERRITE | | 1 | |
| | L5002 | LB73G0BK-002 | CHIP FERRITE | | 1 | |
| | L5004 | LB73G0BK-002 | CHIP FERRITE | | 1 | |
| | L5402 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5403 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5405 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5406 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5501 | LB73G0BK-003 | CHIP FERRITE | | 1 | |
| | L5704 | LB73G0BK-003 | CHIP FERRITE | | 1 | K0 |
| | L5705 | LB73G0BK-003 | CHIP FERRITE | | 1 | K0 |
| | L5706 | LB73G0BK-003 | CHIP FERRITE | | 1 | K0 |
| | L5901 | LR79Z0EW5R1N | CHIP INDUCTOR | | 1 | |
| | L5902 | LR79Z0HX5R1N | CHIP INDUCTOR | | 1 | |
| | L5903 | LR79Z0EW5R1N | CHIP INDUCTOR | | 1 | |
| | L6001 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6002 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6003 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6004 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6005 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6006 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6007 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6008 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6009 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6010 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6011 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6012 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6013 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6014 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6015 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6016 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6017 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6018 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6019 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6020 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6021 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6022 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6023 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6024 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | L6025 | NQLQ2EN-5R1X | INDUCTOR | 5.1uH N | 1 | |
| | L6026 | LB73H0CJ-001 | CHIP FERRITE | | 1 | |
| | CN527 | EC720AT-0516A | FFC FPC CONNE | | 1 | |
| | CN571 | QGA2001F6-05X | W TO B CONNE | W-B (1-5) | 1 | |
| | CN572 | QGA1501F4-03W | W TO B CONNE | W-B (1-3) | 1 | |
| | CN581 | EB760AX-05C0B | B TO B CONNE | | 1 | |
| | CN601 | EC720AB-0570A | FFC FPC CONNE | | 1 | |
| △ | F5901 | FZA10BF-R50 | FUSE (CC) | 0.5A | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------------------------------------|------------|---------------|-----------------|---------------|-----|-------|
| △ | F5902 | FZA10BF-R50 | FUSE (CC) | 0.5A | 1 | |
| | VA5730 | SDV1005H26//0 | VARIATOR | | 1 | K0 |
| | VA5731 | SDV1005H26//0 | VARIATOR | | 1 | K0 |
| | VA5732 | SDV1005H26//0 | VARIATOR | | 1 | |
| | VA5733 | SDV1005H26//0 | VARIATOR | | 1 | |
| | VA6301 | SDV1005H26//0 | VARIATOR | | 1 | |
| | VA6302 | SDV1005H26//0 | VARIATOR | | 1 | |
| | VA6303 | SDV1005H26//0 | VARIATOR | | 1 | |
| | X5001 | NAX1179-001X | CRYSTAL | | 1 | |
| | X5401 | NAX1145-001X | CRYSTAL | | 1 | |
| | X5701 | L7J-0128-00 | QUARTZ CRYSTAL | | 1 | K0 |
| VIDEO PWB ASSY (XJ8-046K-01) <XJ8> | | | | | | |
| | IC100 | W3F-0326-00 | MCU IC | | 1 | |
| | IC102 | BU4228F | ANALOG IC | | 1 | |
| | IC103 | XC6223B331P-G | ANALOG IC | | 1 | |
| | IC105 | 74AHC1G32GW | MOS IC | | 1 | |
| | IC106 | TC7SH17FUJ | MOS IC | | 1 | |
| | IC200 | LM3481MMXNOPB | ANALOG IC | | 1 | |
| | IC201 | TC7SH17FUJ | MOS IC | | 1 | |
| | IC202 | XC6213B332N-G | MOS IC | | 1 | |
| | IC300 | NJM11100F1 | ANALOG IC | | 1 | |
| | IC600 | PICA38603-NV | IR DETECT UNIT | | 1 | |
| | Q100 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q101 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q200 | LTA043ZEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q201 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q202 | RTQ035N03 | FET | | 1 | |
| | Q203 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q204 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q205 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q206 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q207 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q208 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q209 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q210 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q211 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q212 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q213 | LTC043ZEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q214 | LTC043ZEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q300 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q301 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q302 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q303 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q304 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q305 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q306 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q307 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q308 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q309 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q310 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q311 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q313 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q400 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q401 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q402 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q403 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q404 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q405 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q500 | 2SC5585 | TRANSISTOR | | 1 | |
| | Q501 | 2SC5585 | TRANSISTOR | | 1 | |
| | Q502 | 2SA2018 | TRANSISTOR | | 1 | |
| | Q503 | 2SA2018 | TRANSISTOR | | 1 | |
| | Q504 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q505 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q506 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q750 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q751 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q752 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | D100 | RB521S-30 | SCHOTTKY DIODE | | 1 | |
| | D200 | SJPB-L4 | SCHOTTKY DIODE | | 1 | |
| | D201 | DA2J101 | DIODE | | 1 | |
| | D202 | DA2J101 | DIODE | | 1 | |
| | D205 | RB162M-60 | SCHOTTKY DIODE | | 1 | |
| | D206 | RB162M-60 | SCHOTTKY DIODE | | 1 | |
| | D705 | MC2850-1 | DIODE ARRAY | | 1 | |
| | D800 | NSSM124F | LED | | 1 | |
| | D801 | NSSM124F | LED | | 1 | |
| | D802 | NSSM124F | LED | | 1 | |
| | C100 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C101 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C104 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C105 | CC73HCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C106 | CK73HXR1H473K | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C107 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C108 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C109 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C111 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C112 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C113 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C114 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C115 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C116 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|---------------|-------------|--------------|-----|-------|
| | C117 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C119 | CK73HXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C120 | CK73HXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C121 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C122 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C123 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C124 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C125 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C126 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C200 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C203 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C204 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C205 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C206 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C207 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C208 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C209 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C210 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C211 | CC73HCH1H391J | C CAPACITOR | 390pF 50V J | 1 | |
| | C212 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C213 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C214 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C215 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C216 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C217 | CK73FXR0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C218 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C219 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C220 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C221 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C224 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C225 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C300 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C301 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C302 | CK73FXR1E475K | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C303 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C304 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C305 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C306 | CK73FXR1E225K | C CAPACITOR | 2.2uF 25V K | 1 | |
| | C307 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C308 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C408 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C409 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C410 | CK73FXR1E475K | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C411 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C412 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C413 | CK73FXR1E475K | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C414 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C415 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C416 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C417 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C418 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C419 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C420 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C421 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C422 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C433 | CC73HCH1H150J | C CAPACITOR | 15pF 50V J | 1 | |
| | C441 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C508 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C600 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C601 | CK73HXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C602 | CK73FXR0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C603 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C701 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C702 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C753 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C754 | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C755 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C756 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C757 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | R5 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R34 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R36 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R37 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R39 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R41 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R42 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R43 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R44 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R45 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R46 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R47 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R48 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R49 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R50 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R51 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R52 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R53 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R54 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R55 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R56 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R57 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R58 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R100 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| | | | |
|----------|------|----------|------|
| MODEL | MARK | MODEL | MARK |
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R101 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R102 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R103 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R104 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R105 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R106 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R107 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R108 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R110 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R112 | RK73HB1J123J | MG RESISTOR | 12kΩ 1/16W J | 1 | |
| | R113 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R114 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R115 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R116 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R117 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R120 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R122 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R125 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R126 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R127 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R128 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R129 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R130 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R131 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R132 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R133 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R134 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R135 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R136 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R137 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R138 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R139 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R140 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R141 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R142 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R143 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R144 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R145 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R146 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R147 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R148 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R149 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R150 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R200 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R201 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R203 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R204 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R207 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R208 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R209 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R210 | RK73HH1J152D | MG RESISTOR | 1.5kΩ 1/16W D | 1 | |
| | R211 | RK73HH1J134D | MG RESISTOR | 130kΩ 1/16W D | 1 | |
| | R212 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R213 | RK73HH1J751D | MG RESISTOR | 750Ω 1/16W D | 1 | |
| | R214 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R215 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R216 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R217 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R218 | RZ73F0AK33LJ | RESISTOR | 0.033Ω 1/3W J | 1 | |
| | R219 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R220 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R221 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R222 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R223 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R224 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R225 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R227 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R228 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R229 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R230 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R231 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R232 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R233 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R234 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R235 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R236 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R237 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R238 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R239 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R240 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R241 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R242 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R243 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R244 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R245 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R246 | RZ73F0BS560J | RESISTOR | 56Ω 1/3W J | 1 | |
| | R247 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R248 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R249 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R250 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R251 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R252 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
| | R253 | RK73GH2A361D | MG RESISTOR | 360Ω 1/10W D | 1 | |
| | R254 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R255 | RK73GH2A391D | MG RESISTOR | 390Ω 1/10W D | 1 | |
| | R256 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R257 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R259 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R300 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R301 | RK73HB1J392J | MG RESISTOR | 3.9kΩ 1/16W J | 1 | |
| | R302 | RK73HB1J681J | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R303 | RK73HB1J393J | MG RESISTOR | 39kΩ 1/16W J | 1 | |
| | R304 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R305 | RK73HH1J332D | MG RESISTOR | 3.3kΩ 1/16W D | 1 | |
| | R306 | RK73HH1J473D | MG RESISTOR | 47kΩ 1/16W D | 1 | |
| | R307 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R308 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R309 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R310 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R311 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R312 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R313 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R316 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R317 | RK73HB1J821J | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R318 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R319 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R320 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R321 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R322 | RK73HH1J823D | MG RESISTOR | 82kΩ 1/16W D | 1 | |
| | R323 | RK73HH1J113D | MG RESISTOR | 11kΩ 1/16W D | 1 | |
| | R401 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R402 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R403 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R404 | RK73HH1J154D | MG RESISTOR | 150kΩ 1/16W D | 1 | |
| | R405 | RK73HH1J274D | MG RESISTOR | 270kΩ 1/16W D | 1 | |
| | R406 | RK73HH1J334D | MG RESISTOR | 330kΩ 1/16W D | 1 | |
| | R407 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |
| | R408 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R409 | RK73HH1J823D | MG RESISTOR | 82kΩ 1/16W D | 1 | |
| | R411 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R412 | RK73EB2E392J | MG RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R426 | RK73EB2E102J | MG RESISTOR | 1kΩ 1/4W J | 1 | |
| | R427 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R428 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R443 | RK73GB2A750J | MG RESISTOR | 75Ω 1/10W J | 1 | |
| | R478 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R479 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R480 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R482 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R483 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R484 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R485 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R486 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R487 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R490 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R491 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R495 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R515 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R516 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R517 | RK73GH2A220D | MG RESISTOR | 22Ω 1/10W D | 1 | |
| | R518 | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D | 1 | |
| | R519 | RK73GH2A220D | MG RESISTOR | 22Ω 1/10W D | 1 | |
| | R520 | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D | 1 | |
| | R521 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R522 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R523 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R524 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R525 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R526 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R527 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R528 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R529 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R530 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R531 | RK73HH1J621D | MG RESISTOR | 620Ω 1/16W D | 1 | |
| | R532 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R533 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R534 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R535 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R536 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R600 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R601 | RK73GB2A221J | MG RESISTOR | 220Ω 1/10W J | 1 | |
| | R750 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R751 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R752 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R753 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R754 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R757 | RK73GH2A751D | MG RESISTOR | 750Ω 1/10W D | 1 | |
| | R758 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R759 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R760 | RK73GH2A751D | MG RESISTOR | 750Ω 1/10W D | 1 | |
| | R761 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R762 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R763 | RK73GH2A751D | MG RESISTOR | 750Ω 1/10W D | 1 | |
| | R764 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R765 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|--|------------|----------------|-----------------|---------------|-----|-------|
| | R800 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R801 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R802 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R803 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | L100 | LB73G0BF-002 | CHIP FERRITE | | 1 | |
| | L200 | LR7920FB220M | CHIP INDUCTOR | | 1 | |
| | L201 | NQR0716-001X | FERRITE CORE | | 1 | |
| | L404 | NQR0717-001X | FERRITE CORE | | 1 | |
| | L501 | LR73Z0AC100K | CHIP INDUCTOR | 10uH | 1 | |
| | L600 | LB73G0BF-002 | CHIP FERRITE | | 1 | |
| | L750 | LB73G0BF-002 | CHIP FERRITE | | 1 | |
| | CN1 | EC720AB-0570A | FFC FPC CONNE | | 1 | |
| | CN100 | EC720AA-0510A | FFC FPC CONNE | | 1 | |
| | CN400 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN500 | EC720CX-1004A | FFC FPC CONNE | | 1 | |
| | CN750 | EC720AA-0510A | FFC FPC CONNE | | 1 | |
| | CN800 | EC710AM-0510A | FFC FPC CONNE | | 1 | |
| △ | F2 | FZA10BF-1R0 | FUSE (CC) | 1A | 1 | |
| | S800 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | S801 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | S802 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | S803 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | S804 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | S805 | S7A-0001-00 | TACTILE PUSH SW | | 1 | |
| | VA500 | EZJP0270EA | VARIATOR | | 1 | |
| | VA501 | EZJP0270EA | VARIATOR | | 1 | |
| | VA502 | EZJP0270EA | VARIATOR | | 1 | |
| | VA503 | EZJP0270EA | VARIATOR | | 1 | |
| | VA600 | EZJP0270EA | VARIATOR | | 1 | |
| BT PWB ASSY (XJ9-017E-00) <XJ9> | | | | | | |
| | C951 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C952 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C953 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | R1 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R2 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R952 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R954 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R956 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R958 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R960 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R961 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R962 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R963 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R964 | RK73HB1J561J | MG RESISTOR | 560Ω 1/16W J | 1 | |
| | R965 | RK73HB1J561J | MG RESISTOR | 560Ω 1/16W J | 1 | |
| | R966 | RK73HB1J271J | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R967 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R968 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R970 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | A951 | W0C-0167-00 | CIRCUIT MODULE | | 1 | |
| | CN1 | EC720AA-0515A | FFC FPC CONNE | | 1 | |
| DVD MECHA PWB ASSY (LVA11172-04A) <L17> | | | | | | |
| | IC1 | AN41250A | ANALOG IC | | 1 | |
| | IC2 | M12L1281686TN | DRAM IC | | 1 | |
| | IC3 | WZZ-0025-00 | PROGRAMMED IC | | 1 | |
| | IC4 | MN2DS0041MD | IC | | 1 | |
| | IC5 | BD12KA5FP | ANALOG IC | | 1 | |
| | IC6 | XC6120N282N-G | IC | | 1 | |
| | IC8 | MM1663DTE | MOS IC | | 1 | |
| | Q1 | 2SK3019 | FET | | 1 | |
| | Q2 | 2SK3019 | FET | | 1 | |
| | Q3 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q4 | 2SB1709MG | TRANSISTOR | | 1 | |
| | Q5 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q6 | 2SB1709MG | TRANSISTOR | | 1 | |
| | Q11 | LTA014TEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q12 | LTA014TEBFS8 | DIGI TRANSISTOR | | 1 | |
| | D1 | TAN1102W-22 | INFRARED LED | | 1 | |
| | D4 | TAN1102W-22 | INFRARED LED | | 1 | |
| | D5 | 1SS355VM | DIODE | | 1 | |
| | C1 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C2 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C6 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C7 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C8 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C10 | CK730BU0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C12 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C13 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C14 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C16 | CK73HBB1C333K | C CAPACITOR | 0.033uF 16V K | 1 | |
| | C17 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C18 | CC73HCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C19 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C20 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C21 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C22 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C23 | CC73HCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C24 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C25 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C26 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C28 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|----------|------|----------|------|
| DDX6704S | K1 | DDX6904S | K0 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|----------------|-------------|--------------|-----|-------|
| | C29 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C31 | CK730BU0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C33 | CK73HBB1H682K | C CAPACITOR | 6800pF 50V K | 1 | |
| | C34 | CK73HBB1H682K | C CAPACITOR | 6800pF 50V K | 1 | |
| | C35 | CC73HCH1H681J | C CAPACITOR | 680pF 50V J | 1 | |
| | C36 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C37 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C38 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C45 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C47 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C48 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C49 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C50 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C51 | CK73HBB1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C52 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C53 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C55 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C56 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C57 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C58 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C59 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C60 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C61 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C62 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C63 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C64 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C65 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C66 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C67 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C68 | CK73HBB1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C70 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C71 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C74 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C75 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C76 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C77 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C78 | CK730BU0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C79 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C80 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C81 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C82 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C83 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C84 | NCJ20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C85 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C86 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C87 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C88 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C89 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C90 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C91 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C92 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C93 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C94 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C95 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C96 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C101 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C102 | CK730BW0J226M | C CAPACITOR | 22uF 6.3V M | 1 | |
| | C103 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C104 | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C105 | CC73HCH1H150J | C CAPACITOR | 15pF 50V J | 1 | |
| | C112 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C115 | CK730BS0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C120 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C121 | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | R1 | RK73GB2A561J | MG RESISTOR | 560Ω 1/10W J | 1 | |
| | R2 | RK73HB1J271J | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R3 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R4 | RK73GB2A561J | MG RESISTOR | 560Ω 1/10W J | 1 | |
| | R5 | RK73HB1J163J | MG RESISTOR | 16kΩ 1/16W J | 1 | |
| | R6 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R7 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R8 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R9 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R10 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R11 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R12 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R15 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R16 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R17 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R18 | RK73HH1J303D | MG RESISTOR | 30kΩ 1/16W D | 1 | |
| | R19 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R20 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R21 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R22 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R23 | RK73HB1J2R2J | MG RESISTOR | 2.2Ω 1/16W J | 1 | |
| | R25 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R27 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R28 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R29 | RK73HB1J560J | MG RESISTOR | 56Ω 1/16W J | 1 | |
| | R30 | RK73HB1J2R2J | MG RESISTOR | 2.2Ω 1/16W J | 1 | |
| | R31 | RK73PB2H270J | MG RESISTOR | 27Ω 1/2W J | 1 | |
| | R32 | RK73HB1J203J | MG RESISTOR | 20kΩ 1/16W J | 1 | |

| MODEL | | MARK | | MODEL | | MARK | |
|----------|------------|---------------|-----------------|----------------|-----|-------|--|
| DDX6704S | | K1 | | DDX6904S | | K0 | |
| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local | |
| | R33 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | | |
| | R34 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | | |
| | R35 | RK73PB2H270J | MG RESISTOR | 27Ω 1/2W J | 1 | | |
| | R51 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | | |
| | R52 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | | |
| | R53 | RK73POCMR27J | MG RESISTOR | | 1 | | |
| | R54 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R55 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | | |
| | R56 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R57 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R58 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R59 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R60 | RK73HB1J821J | MG RESISTOR | 820Ω 1/16W J | 1 | | |
| | R61 | RK73HB1J242J | MG RESISTOR | 2.4kΩ 1/16W J | 1 | | |
| | R62 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R63 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | | |
| | R64 | RK73HB1J202J | MG RESISTOR | 2kΩ 1/16W J | 1 | | |
| | R65 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R66 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R69 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R70 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R73 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | | |
| | R74 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | | |
| | R75 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | | |
| | R76 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | | |
| | R77 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | | |
| | R78 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | | |
| | R79 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | | |
| | R80 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R81 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R82 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R86 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | | |
| | R92 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R95 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | | |
| | R96 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R105 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | | |
| | R106 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | | |
| | R107 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | | |
| | R108 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | | |
| | R113 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | | |
| | R114 | RK73HH1J5901D | MG RESISTOR | | 1 | | |
| | R120 | RK73HB1J432J | MG RESISTOR | 4.3kΩ 1/16W J | 1 | | |
| | R121 | RK73HB1J242J | MG RESISTOR | 2.4kΩ 1/16W J | 1 | | |
| | R122 | RK73HB1J162J | MG RESISTOR | 1.6kΩ 1/16W J | 1 | | |
| | R123 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | | |
| | R125 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | | |
| | R128 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | | |
| | CN1 | EC720AA-0526A | FFC/FPC CONNE | | 1 | | |
| | CN4 | QGF0534F7-35X | FFC/FPC CONNE | FFC/FPC (1-35) | 1 | | |
| | CN5 | QGF0534F7-18X | FFC/FPC CONNE | FFC/FPC (1-18) | 1 | | |
| | CN9 | QGA1501F4-03W | W TO B CONNE | W-B (1-3) | 1 | | |
| | PH1 | PS1192HB-22-X | OPT TRANSMITTER | | 1 | | |
| | PH2 | PS1192HB-22-X | OPT TRANSMITTER | | 1 | | |
| | S1 | NSW0351-001X | LEVER SWITCH | | 1 | | |
| | TH1 | TH05-3H103F | N THERMISTOR | | 1 | | |
| | X1 | NAX1135-001X | CRYSTAL | | 1 | | |