


EXPLODED VIEW (UNIT)

Block No.M1MM

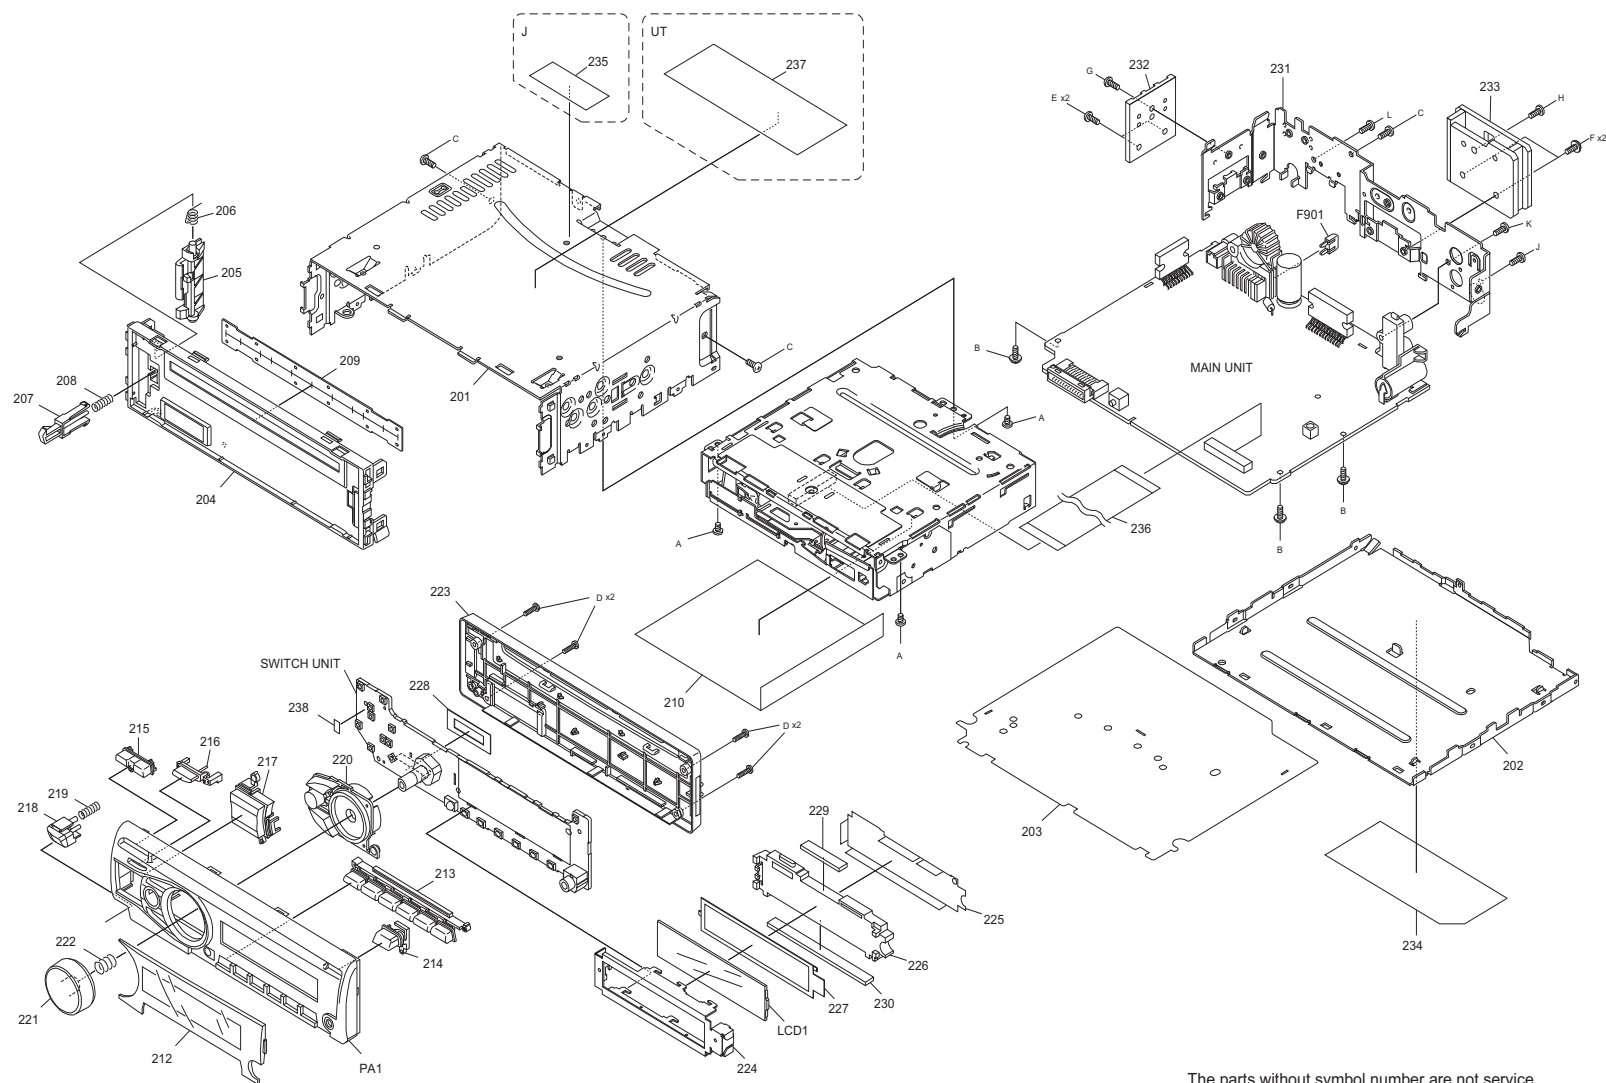

The parts without symbol number are not service.


created date:2011-10-18

No.MA502

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	F901	QMFZ064-100-J1	FUSE	10A	1	
	LCD1	QLD0669-001	LCD MODULE		1	
	PA1	GE10325-001A	FRONT PANEL		1	A,B,C,D,E,F,G,O
	PA1	GE10325-003A	FRONT PANEL		1	H,I,J
	PA1	GE10325-002A	FRONT PANEL		1	K,L,M,N,P
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	GE40377-002A	SCREW		3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	3	
	D	VKZ4777-010	MINI SCREW		4	
	E	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	J	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	K	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	L	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	201	GE10294-001A	TOP CHASSIS		1	
	202	GE20275-002A	BOTTOM COVER		1	
	203	GE34089-001A	INSULATOR		1	
	204	GE10293-001A	FRONT CHASSIS		1	
	205	GE34072-001A	LOCK LEVER		1	
	206	GE40514-002A	TORSION SPRING		1	
	207	GE34073-001A	RELEASE LEVER		1	
	208	GE30999-008A	COMP.SPRING		1	
	209	GE40500-001A	BLIND		1	
	210	GE34327-001A	SHIELD COVER		1	
	212	GE34086-018A	FINDER ASSY		1	A
	212	GE34086-025A	FINDER ASSY		1	B,C,D
	212	GE34086-026A	FINDER ASSY		1	E,F,G
	212	GE34086-022A	FINDER ASSY		1	H
	212	GE34086-023A	FINDER ASSY		1	I,J
	212	GE34086-021A	FINDER ASSY		1	K,L,M,N
	212	GE34086-027A	FINDER ASSY		1	O
	212	GE34086-019A	FINDER ASSY		1	P
	213	GE20282-001A	PRESET BUTTON		1	
	214	GE34084-001A	EJECT BUTTON		1	
	215	GE34088-001A	DISP BUTTON		1	
	216	GE33780-003A	SRC BUTTON		1	
	217	GE33781-001A	NAV1 BUTTON		1	
	218	GE34552-001A	DETACH BUTTON		1	A,B,C,D,E,F,G,K,L,M,N,O, P
	218	GE34552-002A	DETACH BUTTON		1	H,I,J
	219	GE30999-010A	COMP.SPRING		1	
	220	GE20283-005A	BACK BUTTON		1	A,H,I,J,K,L,M,N,P
	220	GE20283-006A	BACK BUTTON		1	B,C,D,E,F,G,O
	221	GE33785-001A	VOL.KNOB		1	A,B,C,D,E,F,G,H,I,J,O
	221	GE33785-002A	VOL.KNOB		1	K,L,M,N,P
	222	GE40127-006A	KNOB SPRING		1	
	223	GE10297-002A	REAR COVER		1	
	224	GE34082-001A	LCD CASE		1	
	225	GE40509-002A	REFLECTION SHT		1	
	226	GE34083-001A	LCD LENS		1	
	227	GE40506-003A	LIGHTING SHEET		1	
	228	GE40493-002A	SHEET		1	
	229	QNZ1002-001	RUBBER CONNE		1	
	230	QNZ1003-001	RUBBER CONNE		1	
	231	GE20276-029A	REAR BRACKET		1	
	232	GE40499-002A	REG HEAT SINK		1	
	233	GE34070-003A	HEAT SINK		1	
	234	GE34674-002A	NAME PLATE		1	A
	234	GE34665-003A	NAME PLATE		1	B,C,D
	234	GE34668-003A	NAME PLATE		1	E,F,G
	234	GE34686-002A	NAME PLATE		1	H
	234	GE34680-002A	NAME PLATE		1	I,J
	234	GE34683-002A	NAME PLATE		1	K,L,N
	234	GE34924-001A	NAME PLATE		1	M
	234	GE34671-002A	NAME PLATE		1	O
	234	GE34677-002A	NAME PLATE		1	P
	235	GE40442-001A	FCC RULE LABEL		1	A,P
	236	WJT0254-001A-E	FFC WIRE		1	
	236	WJT0255-001A-E	FFC WIRE		1	
	237	GE33884-020A	UT LABEL		1	N
	238	FSYH4036-069	SHEET		1	

EXPLODED VIEW (CD MECHANISM : FLM-HC3-1D)

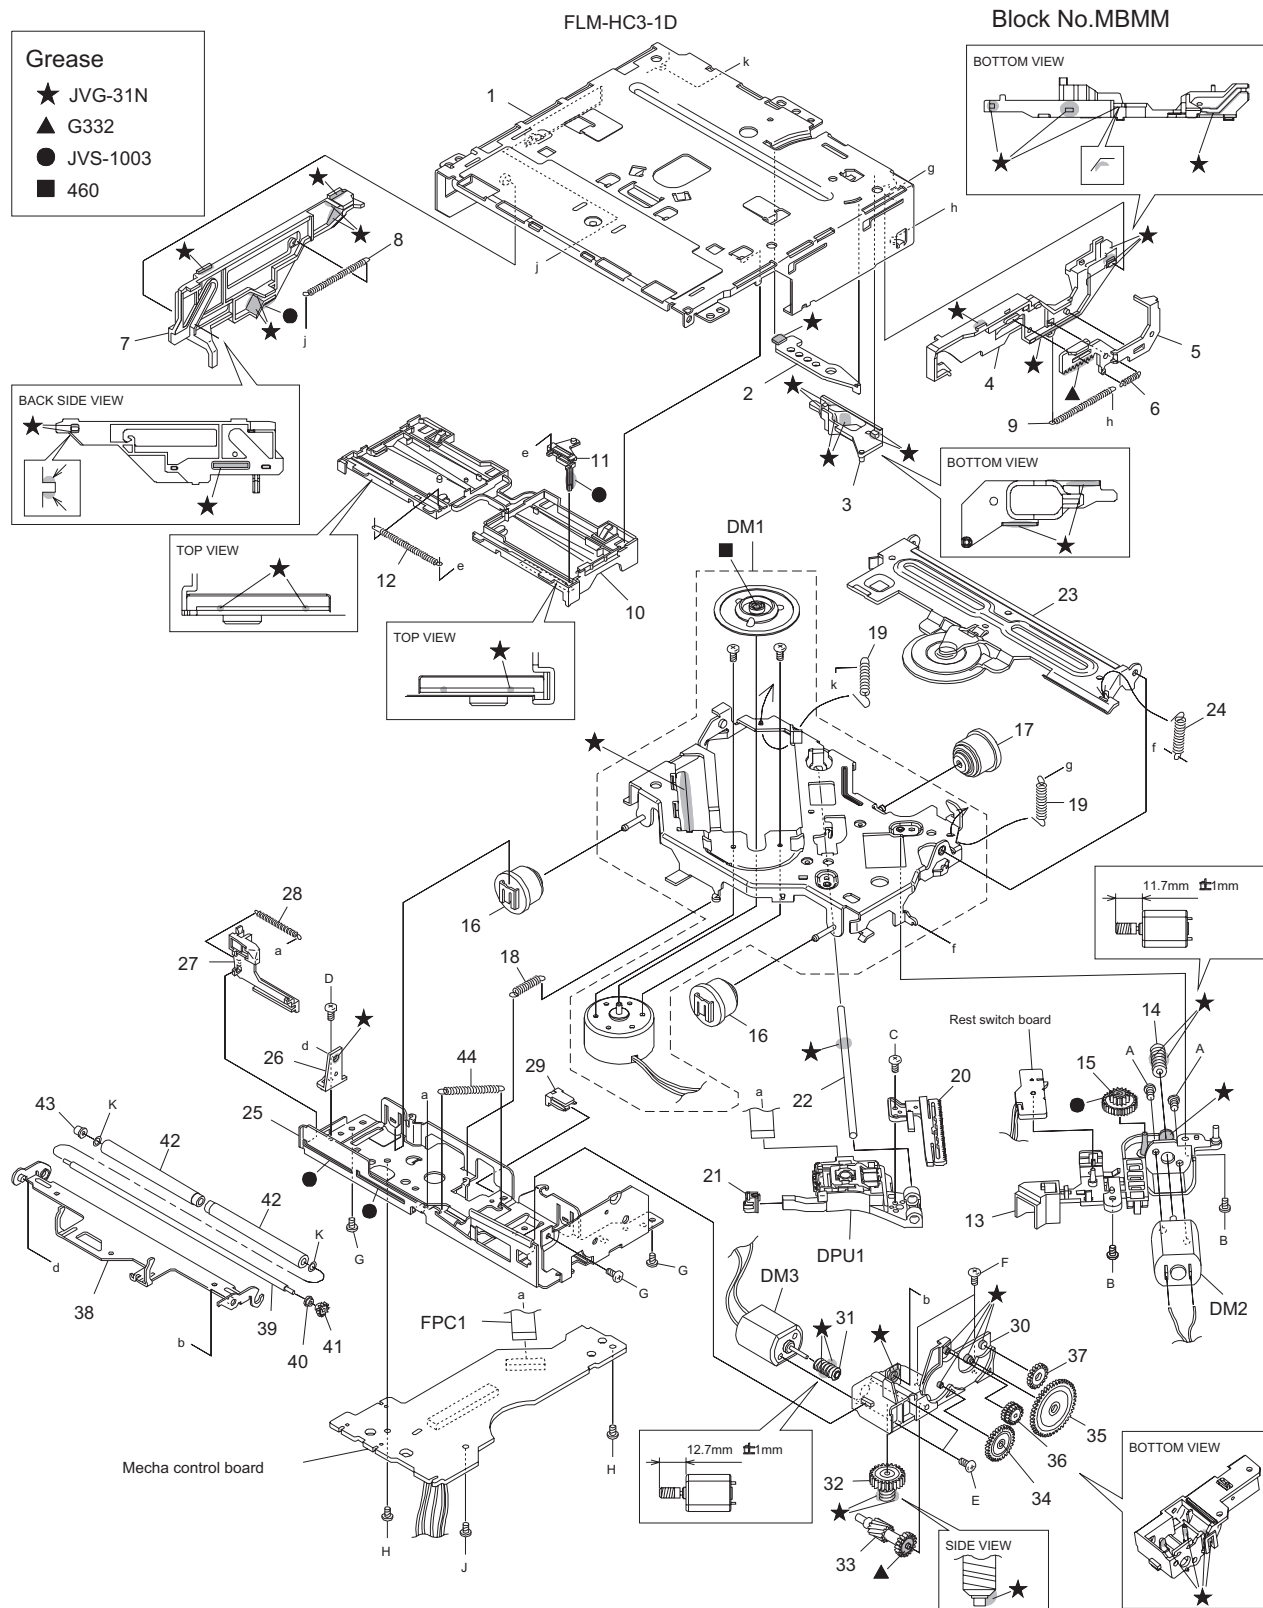

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM>

	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
△	DPU1	QAL1226-001	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-001A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-002A	BOTTOM FRAME		1	
	26	LV38954-002A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	

ELECTRIC UNIT <01>

△	IC1	TEF6614TV1S4-X	IC		1	
	IC161	TDA7718B-X	IC		1	
△	IC301	TB2926CHQ	IC		1	
△	IC501	LA6565-X	IC		1	
	IC530	XC6213B332NG-X	IC		1	
	IC531	XC6213B152NG-X	IC		1	
	IC532	XC6213B152NG-X	IC		1	
△	IC540	JCV8021	IC		1	
△	IC701	JES198D	IC		1	
	IC702	XC6120N282NG-X	IC		1	
	IC771	BR24T02FJ-W-X	IC		1	
	IC771	or R1EX24002ASAA-X	IC		1	
△	IC901	LV5680P	IC		1	
	IC931	XC6213B332NG-X	IC		1	
	Q540	2SA2188/F-X	TRANSISTOR		1	
	Q701	RT1N241C-X	DIGI TRANSISTOR		1	
	Q702	RT1P241C-X	TRANSISTOR		1	
	Q780	RT1P241C-X	TRANSISTOR		1	
	Q782	IMX9-W	PAIR TRANSISTOR		1	
	Q880	RT1N141C-X	DIGI TRANSISTOR		1	
	Q901	2SA812A/5-6/-X	TRANSISTOR		1	
	Q901	or ISA1530AC1/QR/X	TRANSISTOR		1	
	Q902	RT1N441C-X	TRANSISTOR		1	
	Q970	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q970	or 2SC3928A/QR/-X	TRANSISTOR		1	
	Q971	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q971	or 2SC3928A/QR/-X	TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q972	RT1P144C-X	DIGI TRANSISTOR		1	
	D1	RKS801KF-X	SI DIODE		1	
	D1 or	DA2J101-X	SI DIODE		1	
	D2	RKS801KF-X	SI DIODE		1	
	D2 or	DA2J101-X	SI DIODE		1	
	D101	DZ2J068/M/-X	Z DIODE		1	
	D111	DZ2J068/M/-X	Z DIODE		1	
	D120	DZ2J062/M/-X	Z DIODE		1	
	D121	DZ2J062/M/-X	Z DIODE		1	
	D130	DZ2J062/M/-X	Z DIODE		1	
	D131	DZ2J062/M/-X	Z DIODE		1	
	D502	GS1J-LTP-X	DIODE		1	
	D502 or	1SR154-400-X	SI DIODE		1	
	D540	RKS801KF-X	SI DIODE		1	
	D540 or	DA2J101-X	SI DIODE		1	
	D703	MBRX130-TP-X	SB DIODE		1	
	D705	BAW56-TP-X	SI DIODE		1	
	D705 or	MC2836-X	DIODE		1	
	D780	BAW56-TP-X	SI DIODE		1	
	D780 or	MC2836-X	DIODE		1	
	D781	BAW56-TP-X	SI DIODE		1	
	D781 or	MC2836-X	DIODE		1	
	D782	RKS801KF-X	SI DIODE		1	
	D782 or	DA2J101-X	SI DIODE		1	
	D784	BAW56-TP-X	SI DIODE		1	
	D784 or	MC2836-X	DIODE		1	
	D850	MBRX130-TP-X	SB DIODE		1	H,I,J,K,L,M,N
	D851	MBRX130-TP-X	SB DIODE		1	H,I,J,K,L,M,N
	D890	BAW56-TP-X	SI DIODE		1	
	D890 or	MC2836-X	DIODE		1	
△	D901	1N5401-BPC04	SI DIODE		1	
	D941	MBRX130-TP-X	SB DIODE		1	
	D942	MBRX130-TP-X	SB DIODE		1	
	D970	DZ2J068/M/-X	Z DIODE		1	
	D971	DZ2J068/M/-X	Z DIODE		1	
	C1	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C2	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C3	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	
	C4	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1	
	C5	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C6	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C7	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C8	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C9	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C10	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C11	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C12	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C13	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C14	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C15	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C20	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C21	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C22	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C23	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C24	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	
	C25	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C26	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C100	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C102	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C103	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C110	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C120	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C121	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C122	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C123	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C130	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C131	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C162	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C163	QEKJ1HM-475Z-S	E CAPACITOR	4.7uF 50V M	1	
	C164	QEKJ1HM-475Z-S	E CAPACITOR	4.7uF 50V M	1	
	C171	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	
	C172	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C174	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C175	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C176	QEKJ1AM-107Z-S	E CAPACITOR	100uF 10V M	1	
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C303	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C304	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C305	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C307	QEKJ1CM-226Z-S	E CAPACITOR	22uF 16V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C308	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	
	C310	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C315	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C316	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C317	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C318	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C319	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C320	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C321	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C330	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C331	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C502	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C504	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C506	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C507	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C511	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C512	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C530	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C531	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C532	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C533	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C534	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C535	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C540	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C541	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C542	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C543	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C544	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C545	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C546	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C547	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C548	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C549	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C550	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C551	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C552	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C553	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C554	NDC31HJ-391X	C CAPACITOR	390pF 50V J	1	
	C555	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C556	NCB31CK-683X	C CAPACITOR	0.068uF 16V K	1	
	C557	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C558	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C559	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C560	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C561	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C562	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C563	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C564	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C565	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C566	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C567	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C568	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C569	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C570	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C571	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C572	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C573	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C575	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C590	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C591	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C701	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C702	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C703	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C704	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C705	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C706	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C707	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C711	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C713	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C715	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C760	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C761	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C771	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C890	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C901	QEZ0934-338	E CAPACITOR	3300uF	1	
	C902	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C908	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C909	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	H,I,J,K,L,M,N
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C911	NCB21EK-474X	C CAPACITOR	0.47uF 25V K	1	
	C912	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C913	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	C914	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C931	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C941	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C942	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R9	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R10	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R11	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R12	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R14	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R15	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R100	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R101	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R110	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R111	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R120	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R121	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R130	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R161	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R162	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R163	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1	
	R164	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R165	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R166	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R167	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R168	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R169	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R171	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R303	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R308	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R320	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R321	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R322	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R331	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R332	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R501	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R503	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R504	NRS181J-513X	MG RESISTOR	51kΩ 1/8W J	1	
	R505	NRS181J-223X	MG RESISTOR	22kΩ 1/8W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R506	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R507	NRS181J-113X	MG RESISTOR	11kΩ 1/8W J	1	
	R508	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R509	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R513	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R515	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R516	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R517	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R520	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R521	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R522	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R523	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R524	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R525	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R526	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R527	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R528	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R530	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R531	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R532	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R540	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R541	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R543	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F,G,H,I,J,K,L,M, N,O
	R545	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	1	
	R546	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R548	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R549	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R550	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R551	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R552	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R556	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R557	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R558	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R559	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R560	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R561	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R562	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R563	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R564	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R565	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R566	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R567	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R568	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R569	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R570	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R571	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	1	
	R572	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R573	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R574	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R575	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R576	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R577	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R578	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R580	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R586	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R595	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R596	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R701	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R702	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R705	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R709	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R710	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R711	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R712	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R714	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R717	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R718	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R720	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R721	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R723	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R724	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1	
	R726	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R727	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R728	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R729	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,P,O
	R729	NQR0251-002X	MG RESISTOR		1	
	R730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,P,O
	R730	NQR0251-002X	MG RESISTOR		1	
	R731	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R732	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R735	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R736	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R737	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	R738	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R739	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R740	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R741	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R742	NRS181J-272X	MG RESISTOR	2.7kΩ 1/8W J	1	
	R748	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R749	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	B,C,D,E,F,G
	R749	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	H,I,J,K,L,M,N
	R749	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	O
	R750	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,P
	R750	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	B,C,D,E,F,G
	R750	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	H,I,J,K,L,M,N
	R750	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	O
	R751	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R752	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R753	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R754	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R755	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R757	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R771	NRS181J-221X	MG RESISTOR	220Ω 1/8W J	1	
	R772	NRS181J-221X	MG RESISTOR	220Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R773	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R774	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R775	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R776	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R778	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R779	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R780	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R781	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R784	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R785	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R850	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	H,I,J,K,L,M,N
	R881	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R882	NRS181J-273X	MG RESISTOR	27kΩ 1/8W J	1	
	R890	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R891	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	
	R892	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R893	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R901	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1	
	R902	NRSA02J-273X	MG RESISTOR	27kΩ 1/10W J	1	
	R903	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	1	
	R904	NRSA02J-562X	MG RESISTOR	5.6kΩ 1/10W J	1	
	R905	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1	
	R906	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R907	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R908	NRS181J-243X	MG RESISTOR	24kΩ 1/8W J	1	
	R909	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R912	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R941	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R970	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R971	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	1	
	R972	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	1	
	R973	NRS181J-203X	MG RESISTOR	20kΩ 1/8W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R976	NRS181J-683X	MG RESISTOR	68kΩ 1/8W J	1	
	L1	QQL231K-R27Y	COIL	0.27uH K	1	
	L2	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L3	QQL231K-R47Y	COIL	0.47uH K	1	
	L4	QQL231K-R47Y	COIL	0.47uH K	1	
	L5	QQL231K-1R8Y	COIL	1.8uH K	1	
	L6	QQR1872-001	RF COIL		1	
	L7	QQL244J-561Z	COIL	560uH J	1	
	L8	QQL244J-561Z	COIL	560uH J	1	
	L9	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L10	NQL103J-10NX	FERRITE BEADS	10nH J	1	A,P
	L503	NQR0502-001X	FERRITE BEADS		1	
	L504	NQR0502-001X	FERRITE BEADS		1	
	L701	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L901	QQR1884-001	CHOKO COIL		1	
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0190-001	ANT TERMINAL		1	
	J1 or	QNB0348-001	ANT TERMINAL		1	
	J120	QNS0307-001	3.5 JACK		1	
	J321	QNN0864-001	PIN JACK		1	
	S701	QSW0648-001Z	TACT SWITCH		1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X540	QAX0929-001Z	C RESONATOR		1	
	X701	QAX0955-001Z	C RESONATOR		1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	
SWITCH UNIT <02>						
	IC661	PT16580-LQ	IC		1	
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	A,H,I,J,K,L,M,N,P
	Q633	2SC6046-X	TRANSISTOR		1	
	D630	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D630	SML-D12P8W-X	LED		1	E,F,G,O
	D630	SML-311WT-X	LED		1	I,J
	D631	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D631	SML-D12P8W-X	LED		1	E,F,G,O
	D631	SML-311WT-X	LED		1	I,J
	D632	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D632	SML-D12P8W-X	LED		1	E,F,G,O
	D632	SML-311WT-X	LED		1	I,J
	D633	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D633	SML-D12P8W-X	LED		1	E,F,G,O
	D633	SML-311WT-X	LED		1	I,J
	D634	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D634	SML-D12P8W-X	LED		1	E,F,G,O
	D634	SML-311WT-X	LED		1	I,J
	D636	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D636	SML-D12P8W-X	LED		1	E,F,G,O
	D636	SML-311WT-X	LED		1	I,J
	D637	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D637	SML-D12P8W-X	LED		1	E,F,G,O
	D637	SML-311WT-X	LED		1	I,J
	D639	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D639	SML-D12P8W-X	LED		1	E,F,G,O

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D639	SML-311WT-X	LED		1	I,J
	D640	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D640	SML-D12P8W-X	LED		1	E,F,G,O
	D640	SML-311WT-X	LED		1	I,J
	D641	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D641	SML-D12P8W-X	LED		1	E,F,G,O
	D641	SML-311WT-X	LED		1	I,J
	D643	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D643	SML-D12P8W-X	LED		1	E,F,G,O
	D643	SML-311WT-X	LED		1	I,J
	D644	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D644	SML-D12P8W-X	LED		1	E,F,G,O
	D644	SML-311WT-X	LED		1	I,J
	D646	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D646	SML-D12P8W-X	LED		1	E,F,G,O
	D646	SML-311WT-X	LED		1	I,J
	D647	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D647	SML-D12P8W-X	LED		1	E,F,G,O
	D647	SML-311WT-X	LED		1	I,J
	D648	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D648	SML-D12P8W-X	LED		1	E,F,G,O
	D648	SML-311WT-X	LED		1	I,J
	D649	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D649	SML-D12P8W-X	LED		1	E,F,G,O
	D649	SML-311WT-X	LED		1	I,J
	D650	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D650	SML-D12P8W-X	LED		1	E,F,G,O
	D650	SML-311WT-X	LED		1	I,J
	D651	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D651	SML-D12P8W-X	LED		1	E,F,G,O
	D651	SML-311WT-X	LED		1	I,J
	D652	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D652	SML-D12P8W-X	LED		1	E,F,G,O
	D652	SML-311WT-X	LED		1	I,J
	D653	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D653	SML-D12P8W-X	LED		1	E,F,G,O
	D653	SML-311WT-X	LED		1	I,J
	D654	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D656	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D656	SML-D12P8W-X	LED		1	E,F,G,O
	D656	SML-311WT-X	LED		1	I,J
	D658	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D658	SML-D12P8W-X	LED		1	E,F,G,O
	D658	SML-311WT-X	LED		1	I,J
	D659	SML-D12V8W-X	LED		1	A,B,C,D,H,K,L,M,N,P
	D659	SML-D12P8W-X	LED		1	E,F,G,O
	D659	SML-311WT-X	LED		1	I,J
	D660	DZ2J051/M/-X	Z DIODE		1	
	C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C662	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C663	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C664	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C671	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C672	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C674	NCB21AK-106X	C CAPACITOR	10uF 10V K	1	
	C682	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,H,I,J,K,L,M,N,P
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R612	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R613	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R614	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R615	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R616	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R617	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R618	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R628	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	A,B,C,D,H,I,J,K,L,M,N,P
	R628	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	E,F,G,O
	R630	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R632	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R634	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	A,B,C,D,H,I,J,K,L,M,N,P
	R634	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	E,F,G,O
	R636	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	A,B,C,D,H,I,J,K,L,M,N,P
	R636	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	E,F,G,O
	R638	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R641	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R642	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R644	NRS181J-221X	MG RESISTOR	220Ω 1/8W J	1	
	R646	NRS181J-221X	MG RESISTOR	220Ω 1/8W J	1	
	R648	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,H,I,J,K,L,M,N,P
	R648	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	E,F,G,O


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R649	NRS181J-152X	MG RESISTOR	1.5k Ω 1/8W J	1	
	R650	NRS181J-681X	MG RESISTOR	680 Ω 1/8W J	1	
	R651	NRS181J-681X	MG RESISTOR	680 Ω 1/8W J	1	
	R655	NRSA63J-122X	MG RESISTOR	1.2k Ω 1/16W J	1	
	R657	NRS181J-821X	MG RESISTOR	820 Ω 1/8W J	1	
	R658	NRS181J-152X	MG RESISTOR	1.5k Ω 1/8W J	1	
	R660	NRS181J-511X	MG RESISTOR	510 Ω 1/8W J	1	
	R662	NRSA63J-102X	MG RESISTOR	1k Ω 1/16W J	1	
	R663	NRSA63J-102X	MG RESISTOR	1k Ω 1/16W J	1	
	R664	NRSA63J-102X	MG RESISTOR	1k Ω 1/16W J	1	
	R665	NRSA63J-101X	MG RESISTOR	100 Ω 1/16W J	1	
	R666	NRSA63J-101X	MG RESISTOR	100 Ω 1/16W J	1	
	R667	NRSA63J-101X	MG RESISTOR	100 Ω 1/16W J	1	
	R673	NRSA63J-101X	MG RESISTOR	100 Ω 1/16W J	1	
	R674	NRSA63J-101X	MG RESISTOR	100 Ω 1/16W J	1	
	R675	NRS181J-2R2X	MG RESISTOR	2.2 Ω 1/8W J	1	
	BL651	LW812-001A-X	LED		1	
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1	
	J601	QNS0299-001	3.5 JACK		1	
	JS601	QSW1231-002	ROTARY ENCODER		1	
	K601	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	1	
	K602	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	1	
	K603	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	1	
	S601	NSW0326-001X	TACT SWITCH		1	
	S602	NSW0326-001X	TACT SWITCH		1	
	S603	NSW0326-001X	TACT SWITCH		1	
	S604	NSW0326-001X	TACT SWITCH		1	
	S605	NSW0326-001X	TACT SWITCH		1	
	S606	NSW0326-001X	TACT SWITCH		1	
	S607	NSW0326-001X	TACT SWITCH		1	
	S608	NSW0326-001X	TACT SWITCH		1	
	S609	NSW0326-001X	TACT SWITCH		1	
	S610	NSW0326-001X	TACT SWITCH		1	
	S611	NSW0326-001X	TACT SWITCH		1	
	S612	NSW0246-001X	TACK SW		1	
	S613	NSW0246-001X	TACK SW		1	
	S614	NSW0246-001X	TACK SW		1	
	S615	NSW0246-001X	TACK SW		1	
	S616	NSW0246-001X	TACK SW		1	
	S617	NSW0246-001X	TACK SW		1	
CD PLAYER UNIT (FLM-HC3-1D) IN CD MECHA <03>						
	R1	NRSA63J-131X	MG RESISTOR	130 Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	

PACKING AND ACCESSORIES

Block No.M3MM

No additional / supplemental order of WARRANTY CARDS are available.

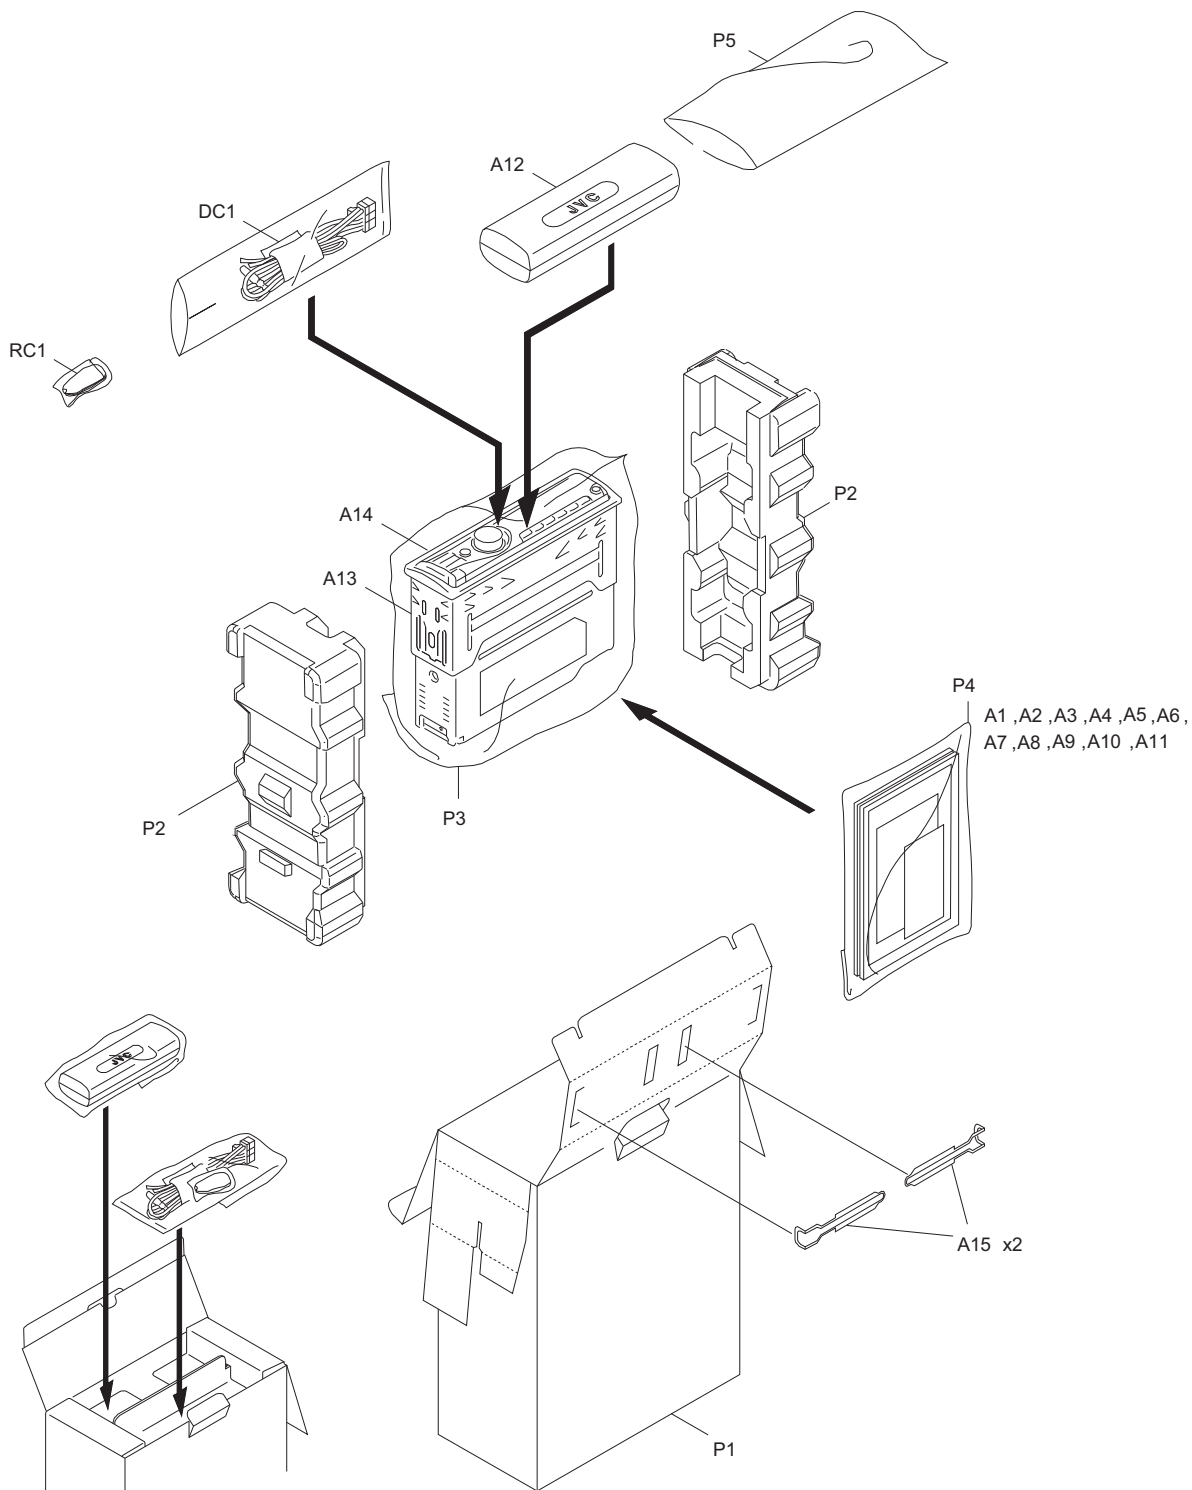

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R330J	A	KD-R331E	B	KD-R331EU	C	KD-R331EY	D
KD-R332E	E	KD-R332EU	F	KD-R332EY	G	KD-R334UI	H
KD-R335U	I	KD-R335UN	J	KD-R336U	K	KD-R336UN	L
KD-R336UP	M	KD-R336UT	N	KD-R337EE	O	KD-R338J	P

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
PACKING AND ACCESSORIES <M3MM>						
DC1		QAM1326-001	CAR CABLE		1	A,P
DC1		QAM1344-001	CAR CABLE		1	B,C,D,E,F,G,O
DC1		QAM1328-001	CAR CABLE		1	H,I,J,K,L,M,N
RC1		RM-RK52M	REMOCON UNIT		1	A,P
RC1		RM-RK52C	REMOCON UNIT		1	H,I,J,K,L,M,N
A1		GET0760-001A	INST BOOK	ENG SPA FRE	1	A,P
A1		GET0758-001A	INST BOOK	GER	1	B,D,E,G
A1		GET0758-005A	INST BOOK	TUR SPA ARA PER	1	C,F
A1		GET0762-001A	INST BOOK	ENG	1	H
A1		GET0761-002A	INST BOOK	CHI(TAIWAN)	1	I,K,N
A1		GET0761-004A	INST BOOK	ENG IND	1	J,L
A1		GET0761-003A	INST BOOK	KOR	1	M
A1		GET0759-001A	INST BOOK	RUS UKR	1	O
A2		GET0758-003A	INST BOOK	ENG FRE	1	B,C,E,F
A2		GET0758-006A	INST BOOK	POL RUS GER UKR	1	D,G
A2		GET0761-001A	INST BOOK	ENG RUS THA ARA PER	1	I,K
A3		GET0758-002A	INST BOOK	DUT SPA ITA POR	1	B,E
A3		GET0758-007A	INST BOOK	RUM BUL CZE HUN	1	D,G
A4		GET0760-002A	INSTALL MANUAL	ENG SPA FRE	1	A,P
A4		GET0758-008A	INSTALL MANUAL	GER	1	B,D,E,G
A4		GET0758-012A	INSTALL MANUAL	TUR SPA	1	C,F
A4		GET0762-002A	INSTALL MANUAL	ENG	1	H
A4		GET0761-006A	INSTALL MANUAL	CHI(TAIWAN)	1	I,K,N
A4		GET0761-008A	INSTALL MANUAL	ENG IND	1	J,L
A4		GET0761-007A	INSTALL MANUAL	KOR	1	M
A4		GET0759-002A	INSTALL MANUAL	RUS UKR	1	O
A5		GET0758-010A	INSTALL MANUAL	ENG FRE	1	B,C,E,F
A5		GET0758-013A	INSTALL MANUAL	POL RUS	1	D,G
A5		GET0761-005A	INSTALL MANUAL	ENG RUS THA	1	I,K
A6		GET0758-009A	INSTALL MANUAL	DUT SPA	1	B,E
A6		GET0758-014A	INSTALL MANUAL	RUM BUL	1	D,G
A7		-----	WARRANTY CARD	BT-52008-1	1	A,P
A8		-----	WARRANTY CARD	BT-51018-6	1	A,P
A9		BT-51044-1	REGISTRATION CARD		1	A,P
A10		-----	WARRANTY CARD	BT-54045-1	1	B,D,E,G,O
A11		GET0796-001A	RUSSIAN SHEET		1	O
A12		GE32320-001A	HARD CASE ASSY		1	H,I,J,K,L,M,N,O
A13		GE20279-001A	MOUNTING SLEEVE		1	
A14		GE20284-001A	TRIM PLATE		1	
A14		GE20284-002A	TRIM PLATE		1	A,B,C,D,E,F,G,K,L,M,N,O, P H,I,J
A15		GE40508-001A	HOOK		2	
P1		GE34675-002A	CARTON		1	A
P1		GE34666-002A	CARTON		1	B,C,D
P1		GE34669-002A	CARTON		1	E,F,G
P1		GE34687-002A	CARTON		1	H
P1		GE34681-002A	CARTON		1	I,J
P1		GE34684-002A	CARTON		1	K,L,M,N
P1		GE34672-002A	CARTON		1	O
P1		GE34678-002A	CARTON		1	P
P2		GE10299-002A	CUSHION		1	
P3		QPC03004315PL	POLY BAG	30cm x 43cm	1	
P4		FSPG4002-001	POLY BAG		1	
P5		QPA01003003	POLY BAG	10cm x 30cm	1	H,I,J,K,L,M,N,O