
9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

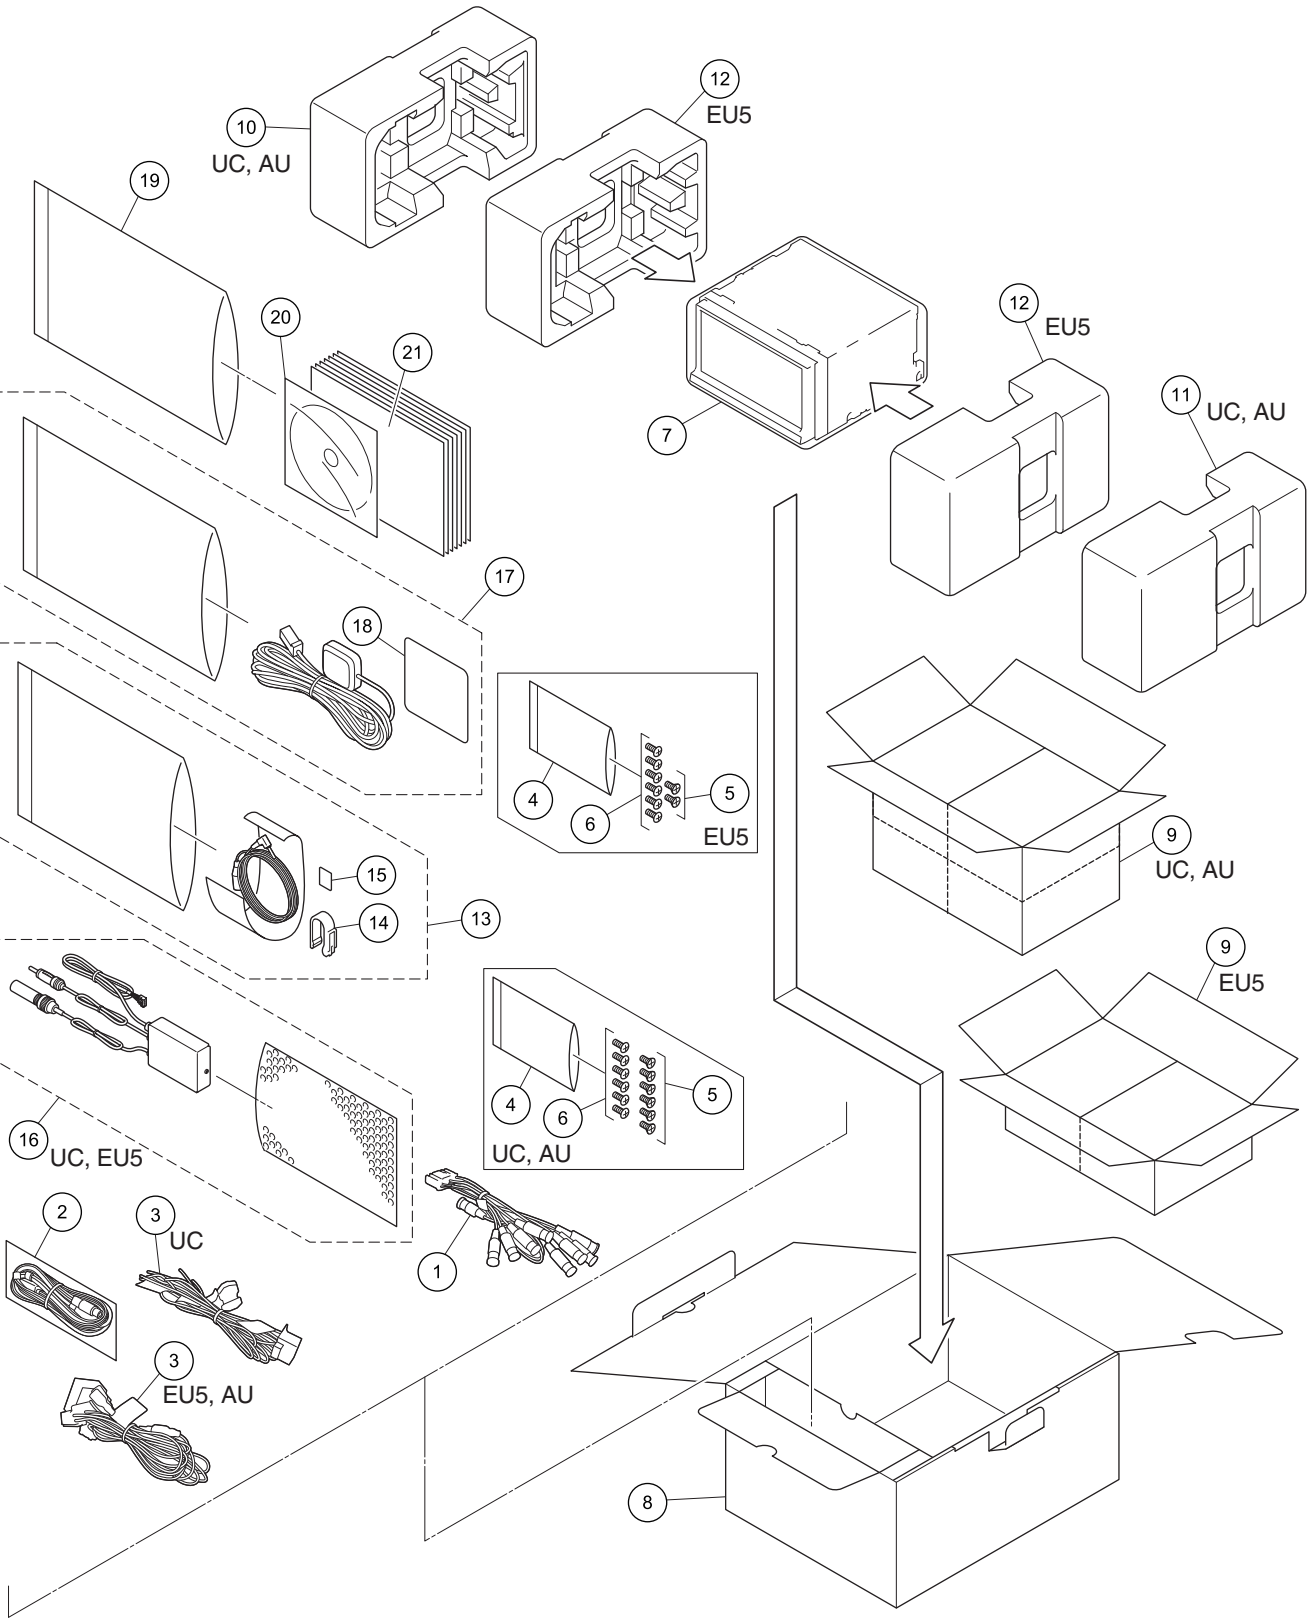

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Cord Assy	CDP1375
	2	USB Extended Cable	CDP1425
	3	Cord Assy	See Contrast table (2)
	4	Polyethylene Bag	CEG1160
	5	Screw	CRZ50P090FTC
	6	Screw	TRZ50P080FTC
	7	Cover	See Contrast table (2)
	8	Unit Box	See Contrast table (2)
	9	Contain Box	See Contrast table (2)
	10	Protector	See Contrast table (2)
	11	Protector	See Contrast table (2)
	12	Protector	See Contrast table (2)
	13	Microphone Assy	CPM1083
	14	Holder	CZN7192
	15	Cushion	CZN7193
	16	RDS-TMC Tuner	See Contrast table (2)
	17	GPS Antenna Assy	CXE3204
	18	Sheet	CZN8510
	19	Polyethylene Bag	CEG1116
	20	IM CD-ROM	See Contrast table (2)
	21-1	Owner's Manual	See Contrast table (2)
	21-2	Installation Manual	See Contrast table (2)
*	21-3	Registration Card	See Contrast table (2)
*	21-4	Registration Card	See Contrast table (2)
*	21-5	Warranty Card	See Contrast table (2)
	21-6	Quick Start Guide	See Contrast table (2)
	21-7	Quick Start Guide	See Contrast table (2)
	21-8	Quick Start Guide	See Contrast table (2)
	21-9	Quick Start Guide	See Contrast table (2)
	21-10	Quick Start Guide	See Contrast table (2)
	21-11	Quick Start Guide	See Contrast table (2)
	21-12	Quick Start Guide	See Contrast table (2)
	21-13	Quick Start Guide	See Contrast table (2)

(2) CONTRAST TABLE

AVIC-Z140BH/XNUC, AVIC-F40BT/XNEU5 and AVIC-F40BT/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-Z140BH/XNUC	AVIC-F40BT/XNEU5	AVIC-F40BT/XNAU
	3	Cord Assy	CDP1479	CDP1306	CDP1306
	7	Cover	CEG1359	CEG1356	CEG1356
	8	Unit Box	CHG7772	CHG7774	CHG7773
	9	Contain Box	CHL7772	CHL7774	CHL7773
	10	Protector	CHP4275	Not used	CHP4275
	11	Protector	CHP4276	Not used	CHP4276
	12	Protector	Not used	CHP4349	Not used
	16	RDS-TMC Tuner	CXE2176	CXE2176	Not used
	20	IM CD-ROM	CPJ1376	CPJ1377	CPJ1376
	21-1	Owner's Manual	CRD4626	CRD4628	CRB3863
	21-2	Installation Manual	CRD4627	CRD4629	CRB3864
*	21-3	Registration Card	CRY1271	Not used	Not used
*	21-4	Registration Card	CRY1373	CRY1375	Not used
*	21-5	Warranty Card	QRY3001	CRY1376	Not used
	21-6	Quick Start Guide	CRB3843	Not used	CRB3862
	21-7	Quick Start Guide	Not used	CRB3851	Not used
	21-8	Quick Start Guide	Not used	CRB3852	Not used
	21-9	Quick Start Guide	Not used	CRB3853	Not used
	21-10	Quick Start Guide	Not used	CRB3854	Not used
	21-11	Quick Start Guide	Not used	CRB3855	Not used
	21-12	Quick Start Guide	Not used	CRB3856	Not used
	21-13	Quick Start Guide	CRB3844	Not used	Not used

9.2 EXTERIOR (1)

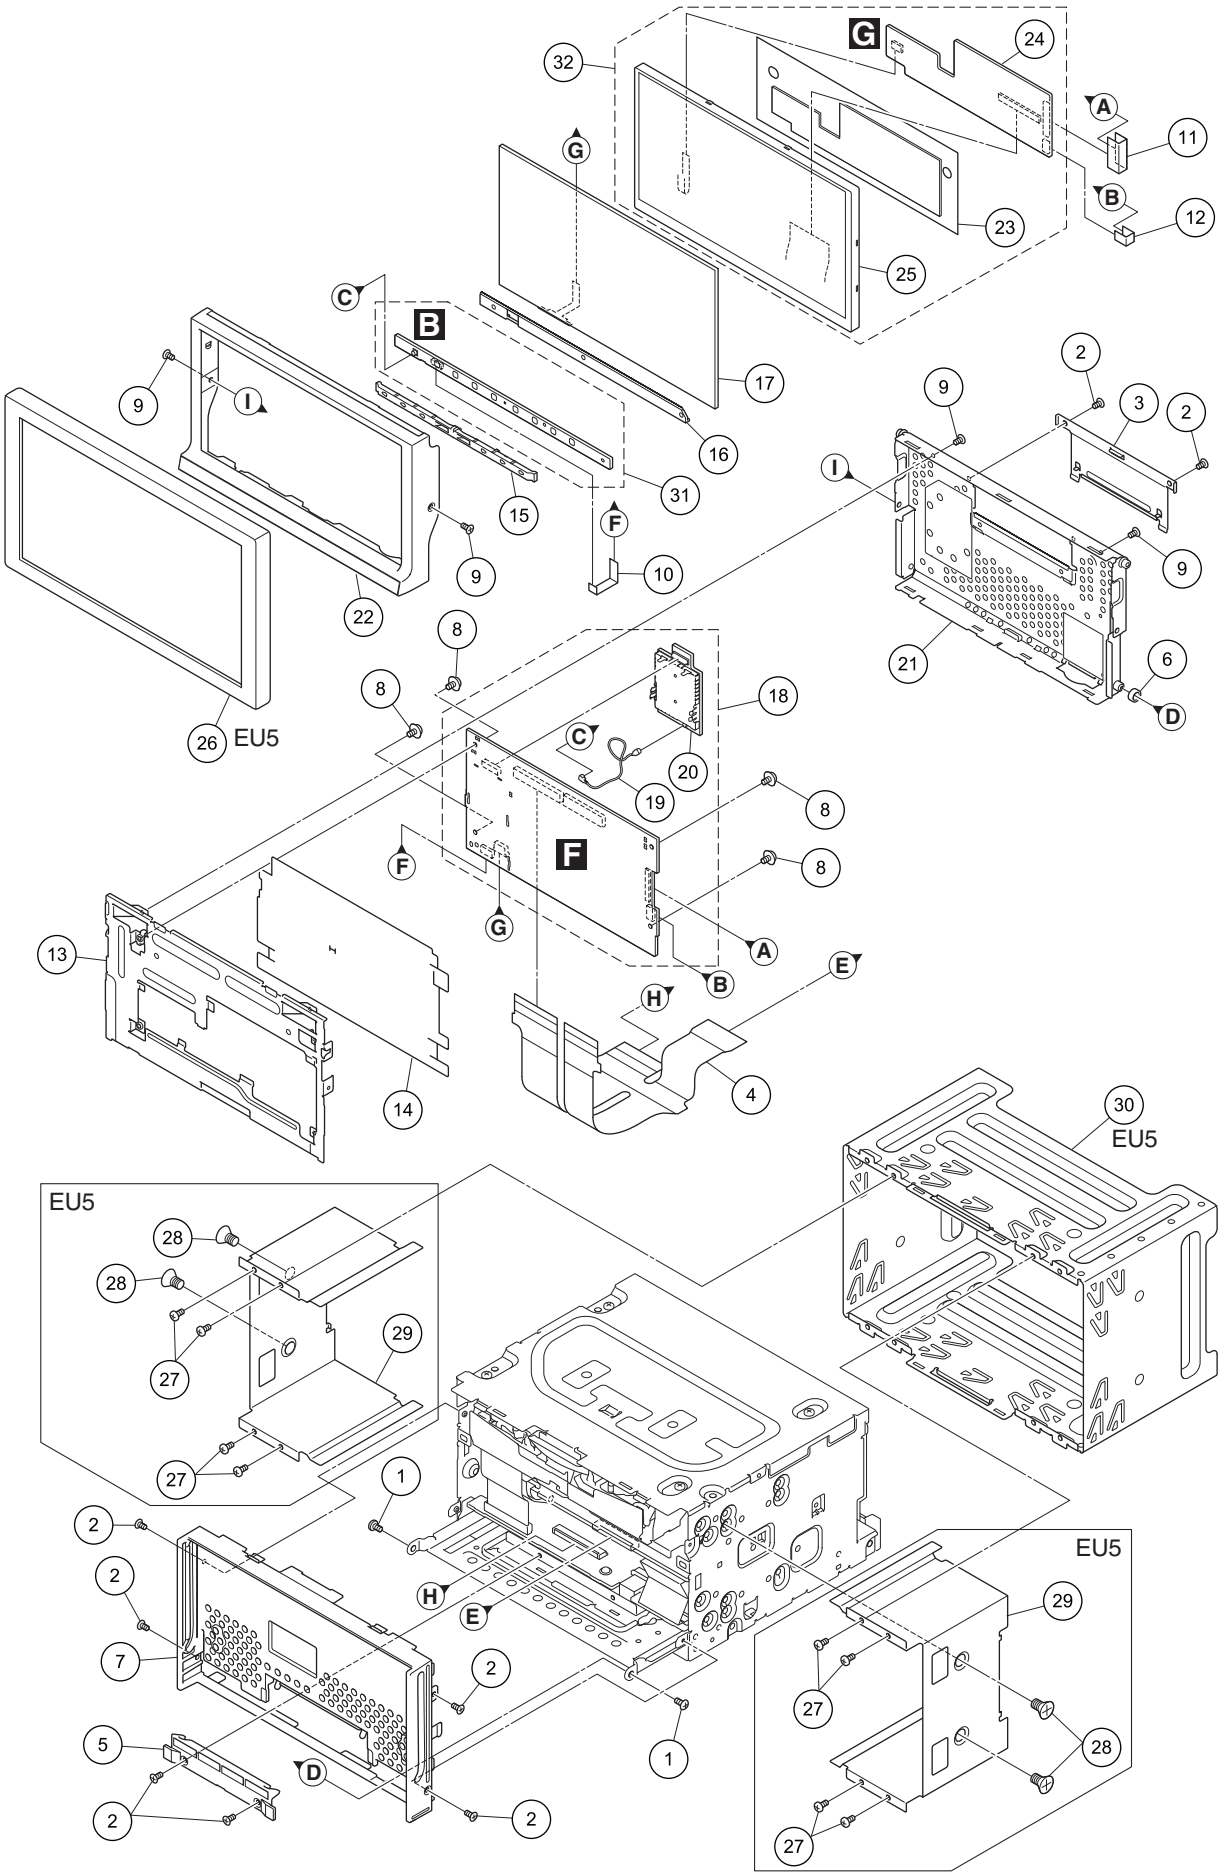

(1) EXTERIOR (1) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	CBA1735
	2	Screw (M2 x 3)	CBA1877
	3	Holder	CND5946
	4	FPC	CNQ4272
	5	Cover	CNU1510
	6	Collar	CNW2038
	7	Panel Unit	See Contrast table (2)
	8	Screw	AMZ20P040FTC
	9	Screw (M2 x 4)	CBA2265
	10	FFC	CDE9393
	11	FFC	CDE9627
	12	FFC	CDE9628
	13	Holder	CND6338
	14	Insulator	CNN3975
	15	Lighting Conductor	CNW2110
	16	Spacer	CNW2111
	17	Touch Panel	CSX1165
	18	CC Monitor Unit(Service)	See Contrast table (2)
	19	Cord Assy	CDE9389
	20	Bluetooth Module	CWX4254
	21	Case Unit	CXE3929
	22	Grille Unit	See Contrast table (2)
	23	Insulator	CNN3976
	24	LCD-IF Unit	CWN6418
	25	TFT LCD	CWX4183
	26	Panel	See Contrast table (2)
	27	Screw	See Contrast table (2)
	28	Screw	See Contrast table (2)
	29	Holder	See Contrast table (2)
	30	Holder	See Contrast table (2)
	31	AV Unit	See Contrast table (2)
	32	TFT LCD Assy	CXE5252

(2) CONTRAST TABLE

AVIC-Z140BH/XNUC, AVIC-F40BT/XNEU5 and AVIC-F40BT/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-Z140BH/XNUC	AVIC-F40BT/XNEU5	AVIC-F40BT/XNAU
	7	Panel Unit	CXE3928	CXE4204	CXE4204
	18	CC Monitor Unit (Service)	CXX4252	CXX4253	CXX4254
	22	Grille Unit	CXE5184	CXE5328	CXE5328
	26	Panel	Not used	CNS8665	Not used
	27	Screw	Not used	BMZ30P060FTC	Not used
	28	Screw	Not used	CRZ50P090FTC	Not used
	29	Holder	Not used	CND3431	Not used
	30	Holder	Not used	CND3430	Not used
	31	AV Unit	CWN6403	CWN6404	CWN6405

9.3 EXTERIOR (2)

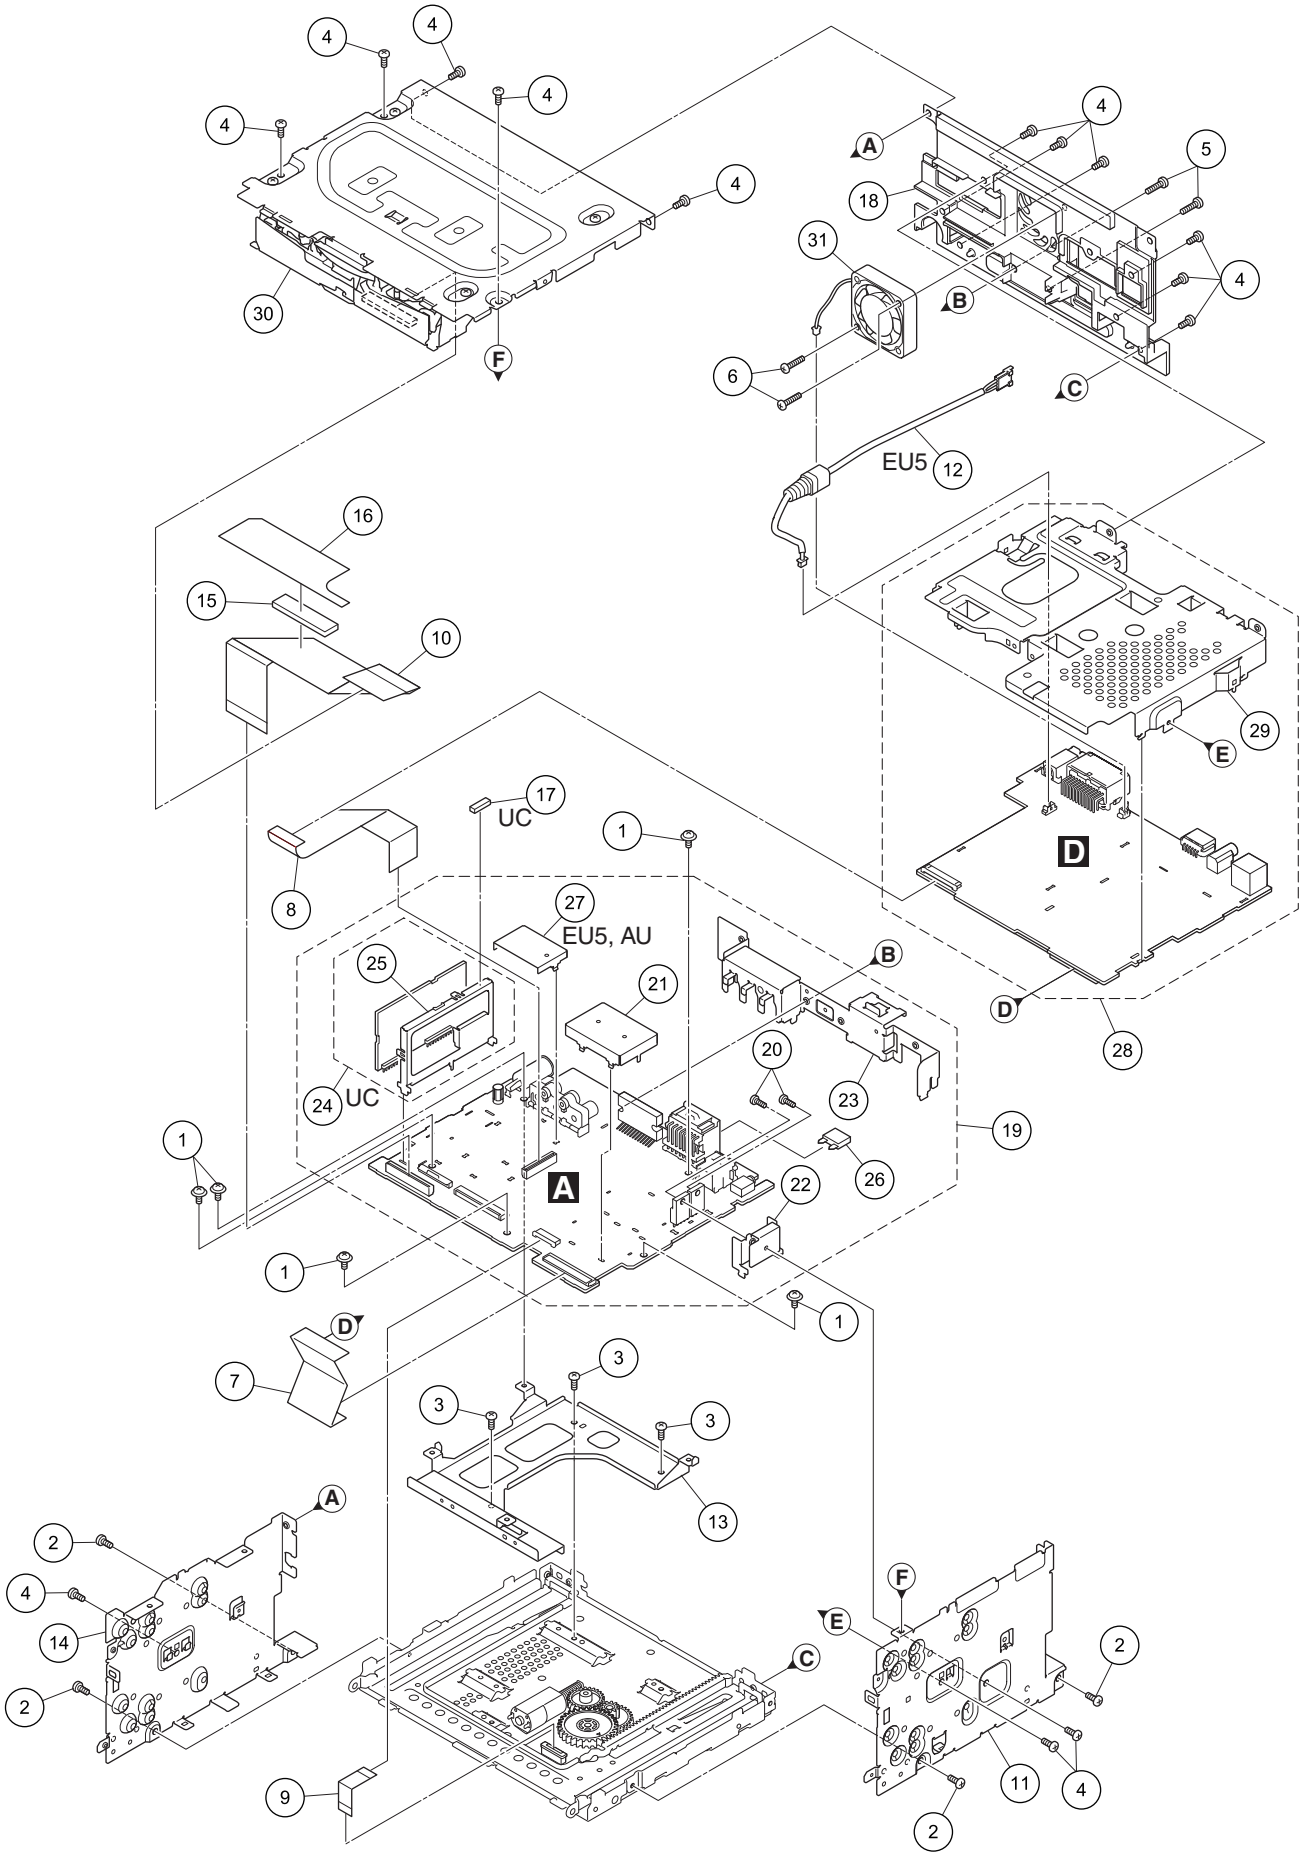

(1) EXTERIOR (2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	ASZ26P060FTC
	2	Screw	BSZ26P050FTB
	3	Screw	BSZ26P050FTC
	4	Screw	BSZ26P060FTC
	5	Screw	BSZ26P160FTC
	6	Screw(M2.6 x 14)	CBA2103
	7	FFC	CDE9384
	8	FFC	CDE9385
	9	FFC	CDE9387
	10	FFC	CDE9631
	11	Bracket	CND5924
	12	Cord Assy	See Contrast table (2)
	13	Bracket	CND5932
	14	Bracket	See Contrast table (2)
	15	Cushion	CNN3843
	16	Insulator	CNN3974
	17	Gasket	See Contrast table (2)
	18	Heat Sink	CNR2097
	19	AV Unit	See Contrast table (2)
	20	Screw	BSZ26P060FTC
	21	Shield	CND4926
	22	Holder	CND5834
	23	Holder	See Contrast table (2)
	24	WWR C-TUN Unit	See Contrast table (2)
	25	Holder	See Contrast table (2)
⚠	26	Fuse(10 A)	YEK5001
	27	Shield	See Contrast table (2)
	28	IF Unit	See Contrast table (2)
	29	Holder	CND5939
	30	DVD Mechanism Module(LS2)	CXK8005
	31	Fan Motor	CXM1441


(2) CONTRAST TABLE

AVIC-Z140BH/XNUC, AVIC-F40BT/XNEU5 and AVIC-F40BT/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-Z140BH/XNUC	AVIC-F40BT/XNEU5	AVIC-F40BT/XNAU
	12	Cord Assy	Not used	CDE9388	Not used
	14	Bracket	CND6351	CND6340	CND6351
	17	Gasket	CNN4015	Not used	Not used
	19	AV Unit	CWN6403	CWN6404	CWN6405
	23	Holder	CND5934	CND5935	CND5935
	24	WWR C-TUN Unit	CWE2347	Not used	Not used
	25	Holder	CND5830	Not used	Not used
	27	Shield	Not used	CND5938	CND5938
	28	IF Unit	CWN6420	CWN6421	CWN6423

9.4 EXTERIOR (3)

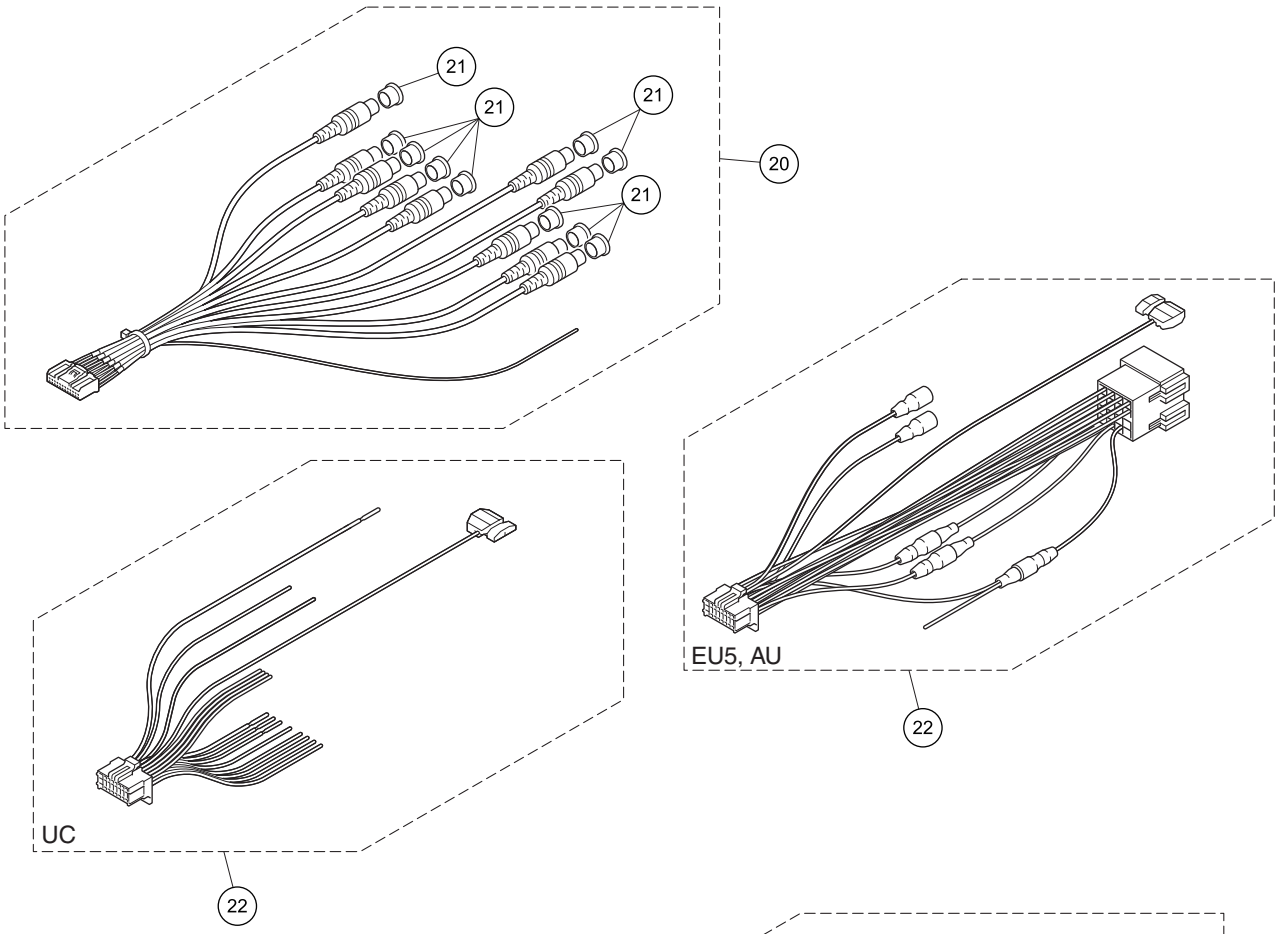


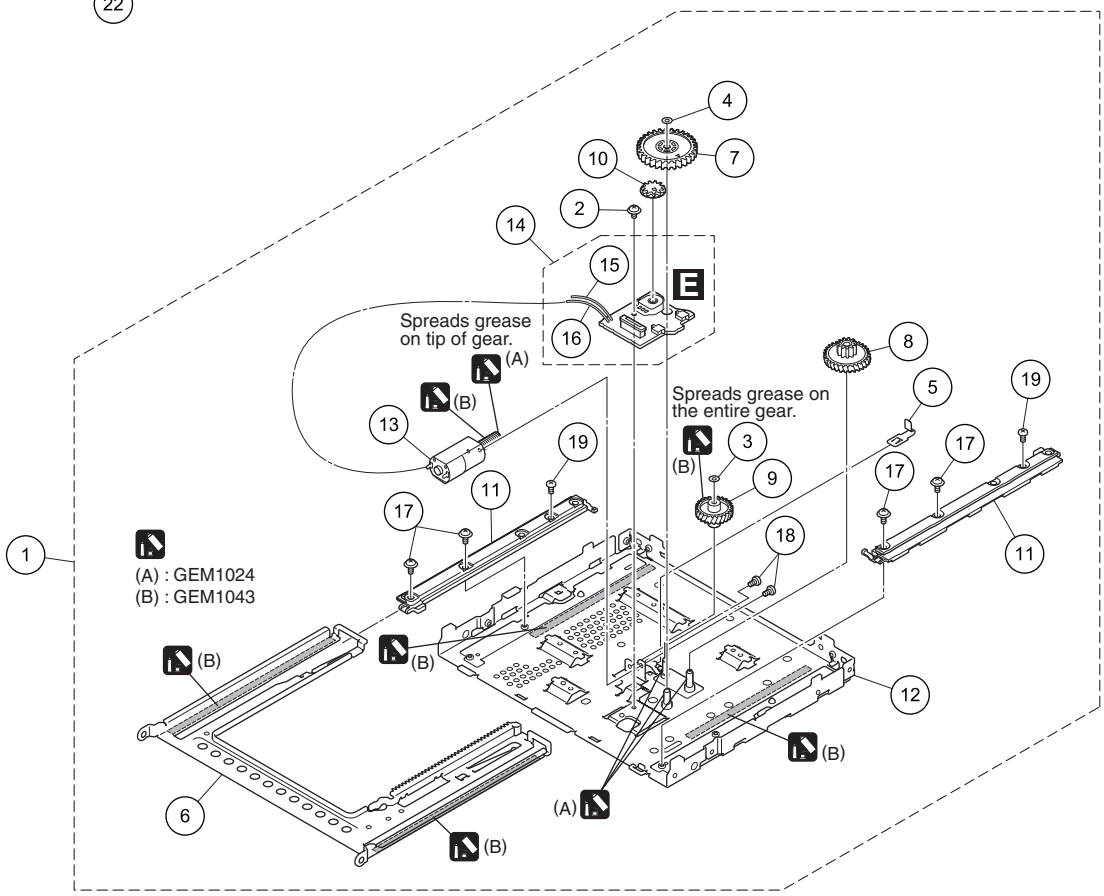

EXTERIOR (3) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Drive Unit	CXE5574
	2	Screw	AMZ26P030FTC
	3	Washer	CBF1039
	4	Washer	CBF1064
	5	Spring	EBL1034
	6	Frame	ENC2001
	7	Gear	ENV1630
	8	Gear	ENV1631
	9	Gear	ENV1632
	10	Gear	ENV1635
	11	Guide	ENV3001
	12	Chassis Unit	EXA4001
	13	Motor Unit	EXA4003
	14	PCB Assy (Service)	EXX2001
*	15	Cord(Green)	CDC1056
*	16	Cord(White)	CDC1057
	17	Screw	IMS26P060FTC
	18	Screw	JFZ20P025FTC
	19	Screw	EBA2002
	20	Cord Assy	CDP1375
	21	Cap	CNW1490
	22	Cord Assy	
		AVIC-Z140BH/XNUC	CDP1479
		AVIC-F40BT/XNEU5	CDP1306
		AVIC-F40BT/XNAU	CDP1306

9.5 DVD MECHANISM MODULE (1)

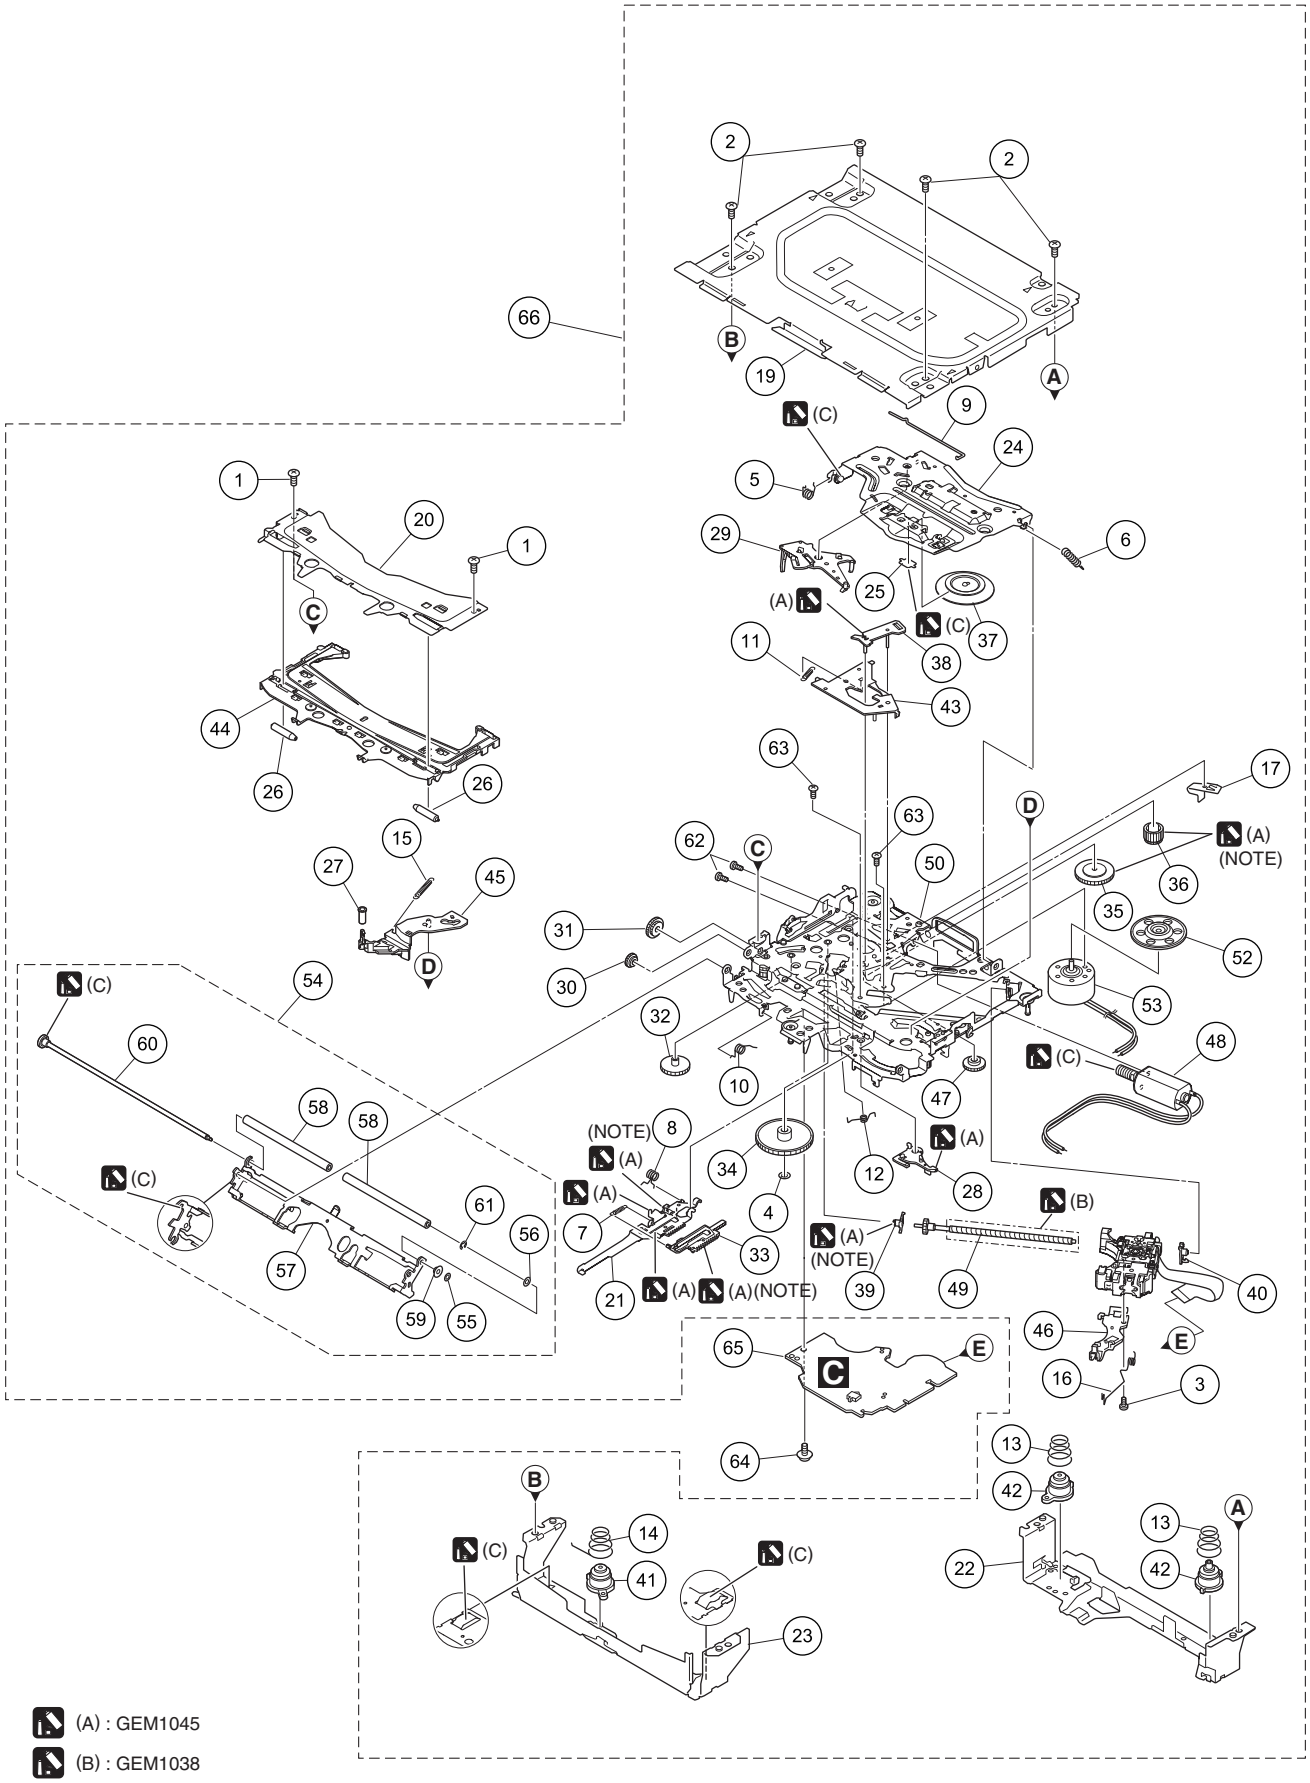

(NOTE) Apply grease to the whole part.

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BSZ20P040FTC
	2	Screw	BSZ26P060FTC
	3	Screw (M2 x 4)	CBA1835
	4	Washer	CBF1038
	5	Spring	CBH2855
	6	Spring	CBH2860
	7	Spring	CBH3010
	8	Spring	CBH3011
	9	Spring	CBH3014
	10	Spring	CBH3015
	11	Spring	CBH3016
	12	Spring	CBH3017
	13	Spring	CBH3019
	14	Spring	CBH3086
	15	Spring	CBH3095
	16	Spring	CBH3096
	17	Plate Spring	CBL1824
	18	•••••	
	19	Case	CNB3760
	20	Bracket	CND4553
	21	Lever	CND5398
	22	Bracket	CND5710
	23	Bracket	CND6127
	24	Arm	CND6406
	25	Sheet	CNN3678
	26	Roller	CNW1172
	27	Roller	CNW1175
	28	Arm	CNW1177
	29	Arm	CNW1178
	30	Gear	CNW1180
	31	Gear	CNW1181
	32	Gear	CNW1183
	33	Rack	CNW1184
	34	Gear	CNW1185
	35	Gear	CNW1186
	36	Gear	CNW1187
	37	Clamper	CNW1190
	38	Arm	CNW1192
	39	Holder	CNW1193
	40	Holder	CNW1194
	41	Damper	CNW1197
	42	Damper	CNW1198
	43	Arm	CNW1726
	44	Guide	CNW2240
	45	Arm	CNW2241
	46	Rack	CNW2265
	47	Gear	CNW2287
	48	Motor Unit(M1)(CRG(L/E))	CXC4026
	49	Screw Unit	CXC8894
*	50	Chassis Unit	CXE4047
	51	•••••	
*	52	Support Wheel	CNW2052
*	53	Spindle Motor(M2)(SPINDLE)	EXM2002
	54	Arm Assy	CXE5027
	55	Washer	CBF1037
	56	Washer	CBF1038
	57	Arm	CND6242
	58	Roller	CNW1196
	59	Collar	CNW2444
	60	Gear Unit	CXC8893
	61	Washer	YE15FTC
	62	Screw	JFZ20P025FTC
	63	Screw	JGZ17P020FTC
	64	Screw (M2 x 5)	EBA1028
	65	DVD Core Unit	YWX5033
	66	Mechanism Unit(Service)	CXX4547

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.*

A:AVIC-Z140BH/XNUC

B:AVIC-F40BT/XNEU5

C:AVIC-F40BT/XNAU

Unit Number : CWN6403(A)
: CWN6404(B)
: CWN6405(C)

Unit Name : AV Unit

Unit Number : YWX5033

Unit Name : DVD Core Unit

Unit Number : CWN6420(A)
: CWN6421(B)
: CWN6423(C)

Unit Name : IF Unit

Unit Number : EXX2001

Unit Name : PCB Unit(Service)

Unit Number : CXX4252(A)
: CXX4253(B)
: CXX4254(C)

Unit Name : CC Monitor Unit(Service)

Unit Number : CWN6418

Unit Name : LCD-IF Unit

AV Unit
Consists of
AV PCB
Keyboard PCB

A B

Unit Number : CWN6403(A)
: CWN6404(B)
: CWN6405(C)

Unit Name : AV Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 1051	(A,89,128) IC	PA2030A
IC 1091	(B,162,108) IC	S-1200B33-M5
IC 1111	(B,155,100) IC	BD3931FP
IC 1161	(A,164,87) IC	NJM2388F84
IC 1171	(A,164,98) IC	NJM2388F84
IC 1201	(B,150,45) IC	LTC3850IGN
IC 1241	(A,149,84) Regulator IC	BD9781HFP
IC 1261	(A,101,79) IC	S-812C56AUA-C3K
IC 1263	(A,136,71) IC	LT3461AES6
IC 1281	(A,121,76) IC	LT3505EDD
IC 1301	(B,72,38) IC	S-80929CNMC-G8Z
IC 1302	(A,95,52) IC(A)	PEQ001A8
	(A,95,52) IC(B)	PEQ002A8
	(A,95,52) IC(C)	PEQ003A8
IC 1303	(B,108,46) IC	S-93C56BD0I-I8
IC 1471	(B,165,67) IC	NJM2904M
IC 1511	(B,81,63) IC	TC74VHCT541AFK
IC 1621	(A,62,31) IC	NJM2125F
IC 1641	(B,103,83) IC	BA4558RFVM
IC 1691	(B,83,85) IC	AK4223VQ
IC 1761	(B,83,101) IC	PML020A
IC 1831	(B,152,110) IC(A)	HA12241FP
IC 1921	(B,29,40) IC(A)	S-1172B33-E6
IC 1931	(B,30,51) IC(A)	R1173S001D
IC 1941	(A,30,52) IC	NJM2846DL3-05
IC 2001	(A,46,73) IC(B,C)	TDA7706
IC 2141	(B,125,48) IC(A)	LT1912EMSE
IC 2221	(A,104,28) IC	S-1167B30-M5
IC 2222	(A,106,20) Sensor	CSX1149
IC 2223	(B,107,21) IC	ADS7828E
Q 1011	(B,118,142) Transistor	2SC4081
Q 1012	(B,121,142) Transistor	2SC4081

Circuit Symbol and No.		Part No.
Q 1031	(B,132,143) Transistor	2SA1576A
Q 1101	(A,164,107) Transistor	2SA1576A
Q 1102	(A,161,107) Chip Transistor	DTC114EUA
Q 1121	(A,158,108) Transistor	2SA1576A
Q 1122	(A,157,111) Chip Transistor	DTC114EUA
Q 1131	(A,153,102) Transistor	KTC801U
Q 1141	(B,104,138) Chip Transistor	DTC114EUA
Q 1151	(B,56,124) Transistor	2SC4081
Q 1181	(A,77,119) Chip Transistor	DTC114EUA
Q 1191	(B,58,119) Transistor	KRX201U
Q 1204	(A,157,34) FET	SP8K10S
Q 1205	(A,156,54) FET	SP8K10S
Q 1302	(A,112,59) Transistor	2SA1576A
Q 1471	(B,161,70) Chip Transistor	DTC114EUA
Q 1472	(B,168,56) Chip Transistor	DTC114EUA
Q 1501	(B,118,53) Transistor	2SC4081
Q 1521	(B,45,10) Transistor	KRX201U
Q 1522	(B,27,10) Transistor	IMH23
Q 1662	(B,111,85) Transistor	KRX201U
Q 1664	(B,111,88) Transistor	DTC623TU
Q 1751	(B,65,66) Chip Transistor	HN1C03FU
Q 1752	(B,60,61) Transistor	KRX201U
Q 1753	(B,67,60) Chip Digital Transistor	DTA124EUA
Q 1793	(B,40,117) Chip Transistor	HN1C03FU
Q 1801	(B,35,118) Chip Digital Transistor	DTA124EUA
Q 1831	(B,141,123) Chip Transistor(A)	DTC114EUA
Q 1832	(B,140,127) Transistor(A)	2SA1576A
Q 1861	(B,161,7) Transistor	PUMF12
Q 1862	(B,161,11) Transistor	2SA1576A
Q 1863	(B,157,10) Transistor	PUMF12
Q 1864	(B,161,14) Transistor	2SA1576A
Q 1865	(B,156,14) Chip Transistor	DTA114EUA
Q 1866	(B,161,17) Chip Transistor	2SD2114K
Q 2201	(B,133,23) Transistor	KRX201U
Q 2202	(A,140,22) Transistor	2SB1184F5
Q 2203	(B,137,17) Transistor	KTC801U
Q 2204	(B,126,25) Transistor	KTX213U
Q 2441	(A,160,26) Transistor	IMH23
Q 2442	(A,156,26) Transistor	KRX202U
D 1001	(A,120,120) Diode	CRG03
D 1002	(A,120,122) Diode	CRG03
D 1012	(B,119,139) Diode	RKZ5.6KG(B2)
D 1031	(B,135,141) Diode	KDS160
D 1042	(B,127,140) Diode	1SR154-400
D 1051	(B,61,130) Diode	1SR154-400
D 1052	(B,61,127) Diode	1SR154-400
D 1072	(B,118,117) Diode	RF501B2S
D 1131	(A,149,94) Diode	HZU7R5(B3)
D 1132	(A,149,101) Diode	RKZ20KG(B2)
D 1133	(A,149,96) Diode	KDS160
D 1134	(A,149,98) Diode	KDS160
D 1141	(B,111,141) Diode	KDS160
D 1151	(B,54,127) Diode	UDZS6R8(B)
D 1202	(B,158,41) Diode	RB160M-40
D 1203	(B,158,51) Diode	RB160M-40
D 1241	(A,154,75) Diode	RB050L-40
D 1242	(A,95,93) Diode	RB051LA-40
D 1281	(A,119,73) Diode	KDS160
D 1282	(A,126,74) Diode	RB160M-40
D 1301	(A,74,44) Diode	RB501V-40

Circuit Symbol and No.		Part No.
D 1302	(A,74,43) Diode	RB751S-40
D 1471	(B,172,66) Diode	KDS160
D 1501	(B,121,56) Diode	UDZS8R2(B)
D 1504	(B,99,57) Diode	KDS121
D 1521	(B,23,9) Diode	DAP202U
D 1621	(A,56,27) Diode	UDZS4R3(B)
D 1751	(B,64,60) Diode	DAN202U
D 1861	(B,167,8) Diode	RKZ3.6KG(B2)
D 1931	(B,36,37) Diode(A)	1SR154-400
D 1932	(B,33,37) Diode(A)	1SR154-400
D 2001	(A,55,89) Diode(B,C)	KP2311E
D 2002	(A,55,82) Diode(B,C)	KP2311E
D 2141	(A,130,42) Diode(A)	RB060L-40
D 2203	(B,135,23) Diode	RKZ6.2KG(B2)
D 2204	(B,137,23) Diode	RKZ7.5KG(B2)
D 2205	(A,135,24) Diode	RSX201L-30
D 2223	(B,134,18) Diode	KDS160
D 2901	(A,149,6) Chip LED	NSSM038A-7306
D 2902	(A,24,6) Chip LED	NSSM038A-7306
L 1001	(A,123,106) Choke Coil 600 uH	CTH1221
L 1202	(A,147,52) Choke Coil 4.7 uH	CTH1480
L 1203	(A,148,36) Choke Coil 6.8 uH	CTH1481
L 1241	(A,144,70) Inductor	CTH1254
L 1242	(A,123,84) Choke Coil 10 uH	CTH1486
L 1262	(A,138,78) Choke Coil 22 uH	CTH1426
L 1263	(A,133,80) Ferrite Bead	CTF1528
L 1281	(A,123,69) Inductor	BTH1112
L 1304	(A,100,34) Ferrite Bead	CTF1528
L 1309	(A,111,69) Inductor	LCTAW2R2J2520
L 1522	(B,55,15) Inductor(B)	CTH1521
L 1691	(A,89,93) Chip Coil	LCTAW100J2520
L 1692	(A,86,94) Chip Coil	LCTAW100J2520
L 1831	(B,148,114) Inductor(A)	LCYC2R2K1608
L 2001	(A,56,85) Chip Coil(B,C)	LCTAWR15J2520
L 2002	(A,48,84) Inductor(B,C)	CTF1786
L 2003	(A,44,85) Inductor(B,C)	CTF1786
L 2004	(A,52,86) Chip Coil(B,C)	LCTAWR27J2520
L 2005	(A,38,86) Inductor(B,C)	CTF1389
L 2008	(A,35,84) Inductor(B,C)	LCTAW220J2520
L 2009	(A,59,78) Inductor(B,C)	CTF1786
L 2010	(A,59,77) Inductor(B,C)	CTF1786
L 2011	(A,34,76) Chip Coil(B,C)	LCTAW470J2520
L 2012	(A,37,72) Inductor(B,C)	CTF1786
L 2014	(A,43,63) Inductor(B,C)	CTF1786
L 2015	(A,55,65) Inductor(B,C)	CTF1786
L 2018	(A,51,62) Inductor(B,C)	CTF1786
L 2020	(A,36,82) Inductor(B,C)	LCYB68NJ1608
L 2021	(A,52,83) Inductor(B,C)	CTF1794
L 2141	(A,129,35) Choke Coil 10 uH(A)	CTH1486
L 2142	(A,128,55) Inductor(A)	BTH1110
L 2224	(B,100,26) Chip Ferrite Bead	OTL8019
L 2351	(B,160,114) Chip EMI Filter	DTF1106
L 2901	(A,10,4) Inductor	CTF1754
L 2902	(A,8,3) Inductor	CTF1770
L 2903	(A,6,3) Inductor	CTF1752
X 1301	(A,96,34) Resonator 15 000 kHz	CSS1781
X 2001	(A,58,70) Resonator 36.480 MHz(B,C)	CSS1805
F 1201	(A,162,55) EMI Filter	CCG1267
F 1202	(B,135,38) EMI Filter	CCG1267
F 1203	(B,133,51) EMI Filter	CCG1267

Circuit Symbol and No.		Part No.
F 1241	(A,98,93) EMI Filter	CCG1267
S 2902	(A,138,6) Push Switch	CSG1196
S 2903	(A,95,6) Push Switch	CSG1196
S 2904	(A,35,6) Push Switch	CSG1196
S 2905	(A,78,6) Push Switch	CSG1196
S 2906	(A,49,6) Push Switch	CSG1196
S 2907	(A,64,6) Push Switch	CSG1196
S 2908	(A,109,6) Push Switch	CSG1196
S 2909	(A,124,6) Push Switch	CSG1196
⚠ P1201	(A,169,56) Fuse 3.15 A	CEK1259
⚠ P1242	(A,136,16) Fuse 250 mA	CEK1276
⚠ P1243	(A,96,99) Fuse 5 A	CEK1261
⚠ P1291	(A,67,30) Fuse 1 A	CEK1254
P 1891	(B,61,115) Poly Switch	FSMD075-24R
P 1892	(B,55,115) Poly Switch	FSMD075-24R
P 2061	(B,20,95) Surge Absorber	IMSA-6803-01Y900
P 2441	(A,165,25) Poly Switch	FSMD050-R
GY2221	(A,99,20) Sensor	CSX1147
CN1521	(A,33,7) Connector	VKN1620
CN1851	(A,74,66) Connector	VKN1610
CN1951	(A,11,8) Connector(A)	CKS5561
CN2201	(A,124,22) Connector	CKS6095
CN2301	(A,75,20) Connector	CKS6118
CN2401	(A,151,9) Connector	CKS5732
CN2901	(A,15,6) Connector	CKS5749
CN2902	(B,32,6) Connector	CKS6291
JA1001	(A,121,135) Plug	CKM1550
JA1831	(A,150,125) Connector(A)	CKS5271
JA1891	(A,48,106) Pin Jack	CKB1100
JA2061	(A,13,117) Antenna Jack	CKX1070
JA2351	(A,166,130) Jack	CKN1018
JA2901	(A,4,6) Antenna	CTX1110
SN2221	(A,110,15) Sensor	S-58LM20A-N4
	WWR C-TUN Unit(A)	CWE2347

RESISTORS

R 1011	(B,118,141)	RS1/16SS473J
R 1012	(B,116,137)	RS1/16SS104J
R 1013	(B,120,141)	RS1/16SS473J
R 1014	(B,123,139)	RS1/16SS472J
R 1015	(B,119,137) 1 kohm	CCN1326
R 1031	(B,130,141)	RS1/16SS102J
R 1032	(B,131,141)	RS1/16SS103J
R 1033	(B,133,141)	RS1/16SS153J
R 1034	(B,136,138) 10 kohm	CCN1327
R 1041	(B,129,136)	RS1/10SR0R0J
R 1071	(B,112,120)	RS1/10SR473J
R 1072	(B,109,116)	RS1/4S0R0J
R 1073	(B,109,111)	RS1/4S0R0J
R 1074	(B,144,94)	RS1/4SA0R0J
R 1091	(B,162,106)	RS1/16SS472J
R 1101	(A,163,109)	RS1/16SS473J
R 1102	(A,162,105)	RS1/16SS222J
R 1103	(A,164,105)	RS1/16SS222J
R 1122	(A,155,112)	RS1/16SS472J
R 1123	(A,155,110)	RS1/16SS472J
R 1131	(A,152,100)	RS1/16SS473J
R 1132	(A,148,104)	RS1/16SS103J
R 1133	(A,153,100)	RS1/10SR473J
R 1134	(A,148,103)	RS1/16SS103J

Circuit Symbol and No.		Part No.
R 1141	(B,110,141)	RS1/16SS103J
R 1143	(B,115,141) 1 kohm	CCN1326
R 1151	(B,51,124)	RS1/16SS223J
R 1152	(B,50,124)	RS1/16SS223J
R 1153	(B,56,131) 1 kohm	CCN1326
R 1154	(B,53,130)	RS1/16SS562J
R 1162	(A,167,81)	RS1/16SS0R0J
R 1172	(A,170,93)	RS1/16SS0R0J
R 1181	(A,75,121)	RS1/16SS103J
R 1182	(A,75,119)	RS1/16SS103J
R 1194	(B,62,62)	RS1/10SR0R0J
R 1201	(B,144,49)	RS1/10SR7502D
R 1202	(B,141,43)	RS1/10SR2402D
R 1203	(B,139,48)	RS1/10SR682J
R 1204	(B,141,46)	RS1/10SR6802D
R 1205	(B,139,41)	RS1/10SR682J
R 1206	(B,144,47)	RS1/10SR1503D
R 1207	(B,144,42)	RS1/10SR1303D
R 1208	(B,143,49)	RS1/10SR0R0J
R 1209	(B,143,39)	RS1/10SR0R0J
R 1210	(B,147,52)	RS1/16SS100J
R 1211	(B,147,37)	RS1/16SS100J
R 1212	(B,148,52)	RS1/16SS100J
R 1213	(B,148,37)	RS1/16SS100J
R 1214	(B,150,51)	RS1/16SS104J
R 1215	(B,149,34)	RS1/16SS0R0J
R 1218	(B,164,38)	RS1/16SS103J
R 1219	(B,153,36)	RS1/16SS0R0J
R 1220	(B,161,41)	RS1/16SS104J
R 1221	(B,157,40)	RS1/10SR100J
R 1222	(B,156,51)	RS1/10SR100J
R 1226	(B,159,44)	RS1/10SR2R2J
R 1227	(A,140,56) 0.027 ohm	CCN1338
R 1228	(A,141,32) 0.027 ohm	CCN1338
R 1229	(A,163,50)	RS1/8SQ0R0J
R 1230	(B,139,36)	RS1/4SA0R0J
R 1231	(B,137,51)	RS1/4SA0R0J
R 1232	(B,135,41)	RS1/4SA221J
R 1233	(B,135,47)	RS1/4SA221J
R 1234	(B,155,40)	RS1/10SR0R0J
R 1235	(B,160,39)	RS1/10SR0R0J
R 1236	(B,160,51)	RS1/10SR0R0J
R 1237	(B,155,51)	RS1/10SR0R0J
R 1241	(B,151,71)	RS1/10SR0R0J
R 1242	(B,153,71)	RS1/10SR6802D
R 1243	(B,153,74)	RS1/10SR3001D
R 1244	(B,152,77)	RS1/10SR1002D
R 1246	(B,150,74)	RS1/10SR333J
R 1247	(B,147,80)	RS1/10SR1003D
R 1248	(B,149,80)	RS1/10SR1002D
R 1250	(B,155,76)	RS1/10SR102J
R 1251	(A,137,14)	RS1/4SA0R0J
R 1261	(A,100,82)	RS1/16SS5601D
R 1262	(A,105,81)	RS1/16SS6801D
R 1267	(B,136,68)	RS1/10SR473J
R 1268	(B,137,70)	RS1/16SS1003D
R 1269	(B,137,71)	RS1/16SS1603D
R 1270	(B,137,73)	RS1/16SS1202D
R 1271	(B,135,73)	RS1/16SS1102D
R 1273	(A,134,65)	RS1/4SA182J

Circuit Symbol and No.		Part No.
R 1274	(A,131,77)	RS1/10SR0R0J
R 1276	(A,138,65)	RS1/16SS0R0J
R 1281	(B,120,71)	RS1/16SS0R0J
R 1282	(B,120,73)	RS1/10SR1303D
R 1283	(B,120,76)	RS1/16SS2402D
R 1285	(B,119,77)	RS1/16SS2002D
R 1286	(B,119,72)	RS1/16SS223J
R 1287	(A,140,112)	RS1/4SA0R0J
R 1291	(B,61,15)	RS1/4SA0R0J
R 1307	(B,103,41)	RS1/16SS0R0J
R 1308	(A,106,35)	RS1/16SS0R0J
R 1309	(A,111,45)	RS1/16SS471J
R 1310	(B,107,51)	RS1/16SS104J
R 1314	(A,115,43) (A)	RS1/16SS0R0J
R 1315	(A,111,44) (A)	RS1/16SS0R0J
R 1317	(A,109,52)	RS1/16SS101J
R 1318	(A,109,53)	RS1/16SS102J
R 1319	(B,109,51)	RS1/16SS104J
R 1320	(B,106,57)	RS1/16SS104J
R 1321	(A,109,58)	RS1/16SS0R0J
R 1326	(B,92,68)	RS1/16SS104J
R 1327	(A,87,69)	RS1/16SS472J
R 1328	(A,88,69)	RS1/16SS472J
R 1329	(A,108,38)	RS1/16SS0R0J
R 1332	(A,79,52)	RS1/16SS0R0J
R 1334	(B,80,43)	RS1/16SS473J
R 1336	(A,108,42)	RS1/16SS0R0J
R 1337	(A,108,44)	RS1/16SS0R0J
R 1338	(A,106,40)	RS1/16SS0R0J
R 1342	(A,105,39)	RS1/16SS561J
R 1344	(A,82,58) (A)	RS1/16SS0R0J
R 1345	(B,76,60) (A)	RS1/16SS104J
R 1352	(B,104,40)	RS1/16SS562J
R 1353	(A,105,71)	RS1/16SS562J
R 1354	(B,108,44)	RS1/16SS473J
R 1355	(A,111,51)	RS1/16SS104J
R 1356	(B,108,48)	RS1/16SS473J
R 1357	(A,117,51) (A)	RS1/16SS472J
R 1358	(A,117,49)	RS1/16SS472J
R 1359	(B,113,60)	RS1/16SS473J
R 1361	(B,106,49)	RS1/16SS473J
R 1362	(A,107,38)	RS1/16SS471J
R 1363	(A,109,38)	RS1/16SS101J
R 1364	(A,114,49)	RS1/16SS681J
R 1365	(A,114,51) (A)	RS1/16SS101J
R 1366	(A,111,52)	RS1/16SS102J
R 1367	(A,109,56)	RS1/16SS102J
R 1368	(A,109,59)	RS1/16SS102J
R 1369	(A,109,62)	RS1/16SS681J
R 1370	(A,107,62) (A)	RS1/16SS471J
R 1371	(A,107,41)	RS1/16SS101J
R 1372	(A,111,47)	RS1/16SS471J
R 1373	(B,75,36)	RS1/16SS102J
R 1375	(B,97,66)	RS1/16SS473J
R 1376	(B,98,62)	RS1/16SS473J
R 1377	(B,96,68)	RS1/16SS104J
R 1378	(B,74,35)	RS1/16SS104J
R 1379	(B,102,43)	RS1/16SS221J
R 1380	(A,102,67)	RS1/16SS102J
R 1381	(A,101,67)	RS1/16SS102J
R 1382	(A,100,67)	RS1/16SS221J
R 1383	(A,102,34)	RS1/16SS473J
R 1384	(A,112,56)	RS1/10SR473J
R 1385	(A,112,54)	RS1/10SR472J
R 1387	(A,96,67)	RS1/16SS221J
R 1388	(A,85,37)	RS1/16SS122J
R 1389	(B,89,38)	RS1/16SS103J
R 1390	(A,95,38)	RS1/16SS561J
R 1391	(A,83,36)	RS1/16SS473J
R 1392	(A,92,35)	RS1/16SS473J
R 1393	(A,93,35)	RS1/16SS472J
R 1394	(A,87,36)	RS1/16SS122J
R 1395	(A,81,36)	RS1/16SS182J
R 1396	(A,95,67)	RS1/16SS221J
R 1397	(A,93,67)	RS1/16SS681J
R 1398	(A,92,67)	RS1/16SS681J
R 1399	(A,91,67)	RS1/16SS681J
R 1400	(A,90,67)	RS1/16SS681J
R 1401	(B,79,53)	RS1/16SS104J
R 1403	(A,88,67)	RS1/16SS470J
R 1405	(A,94,67)	RS1/16SS0R0J
R 1406	(A,83,67)	RS1/16SS102J
R 1407	(A,82,39)	RS1/16SS470J
R 1408	(A,82,67)	RS1/16SS221J
R 1410	(A,83,69)	RS1/16SS104J
R 1411	(A,85,69)	RS1/16SS104J
R 1413	(B,106,51)	RS1/16SS104J
R 1414	(B,90,38)	RS1/16SS473J
R 1415	(A,109,55)	RS1/16SS104J
R 1416	(B,94,65)	RS1/16SS104J
R 1417	(B,111,57)	RS1/16SS104J
R 1418	(B,111,58)	RS1/16SS104J
R 1419	(A,74,46)	RS1/16SS103J
R 1420	(A,75,42)	RS1/16SS103J
R 1421	(A,82,42)	RS1/16SS470J
R 1422	(A,81,42)	RS1/16SS681J
R 1423	(A,80,42)	RS1/16SS681J
R 1424	(B,80,34)	RS1/16SS101J
R 1427	(A,78,46)	RS1/16SS681J
R 1428	(A,78,48)	RS1/16SS0R0J
R 1429	(B,111,46)	RS1/16SS0R0J
R 1430	(A,109,60)	RS1/16SS221J
R 1431	(A,82,56)	RS1/16SS681J
R 1432	(A,80,57)	RS1/16SS681J
R 1433	(A,82,60)	RS1/16SS471J
R 1434	(A,80,61)	RS1/16SS102J
R 1435	(A,80,62)	RS1/16SS102J
R 1436	(B,76,61)	RS1/16SS104J
R 1437	(A,79,38)	RS1/16SS182J
R 1438	(B,77,53)	RS1/16SS124J
R 1439	(A,78,38)	RS1/16SS392J
R 1441	(A,77,38)	RS1/16SS392J
R 1442	(B,79,50)	RS1/16SS104J
R 1445	(B,90,41)	RS1/16SS0R0J
R 1451	(A,78,53)	RS1/16SS0R0J
R 1452	(A,78,45)	RS1/16SS0R0J
R 1453	(A,89,67)	RS1/16SS0R0J
R 1457	(B,87,36)	RS1/16SS101J
R 1458	(B,82,36)	RS1/16SS101J
R 1459	(B,85,53)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 1460	(B,84,52)	RS1/16SS104J	R 1616	(B,79,76)	RS1/16SS0R0J
R 1461	(B,87,33)	RS1/16SS102J	R 1621	(A,56,30)	RS1/16SS102J
R 1462	(B,86,33)	RS1/16SS0R0J	R 1623	(A,56,32)	RS1/10SR0R0J
R 1471	(B,164,71)	RS1/16SS104J	R 1646	(B,110,80)	RS1/10SR332J
R 1472	(B,169,69)	RS1/16SS473J	R 1647	(B,109,80)	RS1/10SR332J
R 1473	(B,168,69)	RS1/16SS563J	R 1648	(B,106,80)	RS1/10SR103J
R 1474	(B,168,67)	RS1/16SS513J	R 1649	(B,108,83)	RS1/10SR103J
R 1475	(B,169,67)	RS1/16SS104J	R 1650	(B,104,78)	RS1/10SR102J
R 1476	(B,169,65)	RS1/16SS513J	R 1651	(B,101,79)	RS1/10SR104J
R 1477	(B,167,62)	RS1/16SS513J	R 1652	(B,101,80)	RS1/10SR104J
R 1478	(B,170,65)	RS1/16SS102J	R 1653	(B,99,80)	RS1/10SR683J
R 1479	(B,168,63)	RS1/16SS102J	R 1654	(B,99,83)	RS1/10SR473J
R 1480	(B,169,64)	RS1/16SS564J	R 1662	(B,106,89)	RS1/10SR821J
R 1481	(B,170,69)	RS1/16SS202J	R 1664	(B,109,89)	RS1/16SS104J
R 1482	(B,170,67)	RS1/16SS822J	R 1665	(B,107,86)	RS1/16SS0R0J
R 1483	(B,171,55)	RS1/16SS203J	R 1667	(B,102,86)	RS1/16SS0R0J
R 1484	(B,171,57)	RS1/16SS333J	R 1689	(B,95,97)	RS1/16SS0R0J
R 1485	(A,162,65)	RS1/10SR0R0J	R 1690	(B,95,98)	RS1/16SS0R0J
R 1486	(B,160,66)	RS1/10SR0R0J	R 1691	(B,83,75)	RS1/16SS0R0J
R 1491	(B,106,41)	RS1/16SS0R0J	R 1692	(B,81,75)	RS1/16SS0R0J
R 1492	(B,106,56)	RS1/16SS0R0J	R 1693	(B,84,75)	RS1/16SS0R0J
R 1493	(B,105,63)	RS1/16SS0R0J	R 1694	(B,81,71)	RS1/16SS0R0J
R 1494	(B,94,63)	RS1/16SS0R0J	R 1695	(B,83,71)	RS1/10SR0R0J
R 1495	(B,83,42)	RS1/16SS0R0J	R 1700	(B,67,79)	RS1/10SR0R0J
R 1496	(B,84,49)	RS1/16SS0R0J	R 1701	(B,70,80)	RS1/16SS750J
R 1498	(A,85,39)	RS1/16SS0R0J	R 1703	(B,72,80)	RS1/16SS101J
R 1501	(B,93,56)	RS1/16SS561J	R 1704	(B,72,81)	RS1/16SS101J
R 1502	(B,118,55)	RS1/10SR473J	R 1705	(B,70,82)	RS1/16SS75R0F
R 1503	(B,119,55)	RS1/10SR104J	R 1706	(B,72,82)	RS1/16SS101J
R 1504	(B,76,58)	RS1/16SS0R0J	R 1707	(B,72,83)	RS1/16SS101J
R 1505	(B,101,56)	RS1/16SS104J	R 1716	(B,71,89)	RS1/16SS75R0F
R 1507	(B,79,60)	RS1/16SS0R0J	R 1717	(B,72,87)	RS1/16SS101J
R 1511	(B,87,66)	RS1/16SS104J	R 1718	(B,73,88)	RS1/16SS101J
R 1512	(B,89,65)	RS1/16SS104J	R 1719	(B,73,90)	RS1/16SS0R0J
R 1513	(B,87,65)	RS1/16SS104J	R 1720	(B,73,91)	RS1/16SS0R0J
R 1514	(B,89,64)	RS1/16SS104J	R 1722	(B,82,91)	RS1/16SS104J
R 1515	(B,87,63)	RS1/16SS104J	R 1723	(B,84,91)	RS1/16SS0R0J
R 1516	(B,89,63)	RS1/16SS104J	R 1725	(B,89,74)	RS1/16SS223J
R 1517	(B,89,60)	RS1/16SS104J	R 1726	(B,89,75)	RS1/16SS223J
R 1518	(B,85,60)	RS1/16SS224J	R 1727	(B,85,75)	RS1/16SS0R0J
R 1519	(B,79,67)	RS1/16SS0R0J	R 1728	(B,89,76)	RS1/16SS0R0J
R 1521	(B,31,10)	RS1/10SR104J	R 1729	(B,94,77)	RS1/16SS0R0J
R 1522	(B,34,10)	RS1/10SR104J	R 1730	(B,94,80)	RS1/16SS0R0J
R 1523	(B,32,8)	RS1/10SR182J	R 1731	(B,94,78)	RS1/16SS0R0J
R 1524	(B,33,8)	RS1/10SR182J	R 1732	(B,94,82)	RS1/16SS0R0J
R 1525	(B,44,8)	RS1/16SS471J	R 1733	(B,95,81)	RS1/16SS0R0J
R 1526	(A,39,12)	RS1/16SS221J	R 1734	(B,95,84)	RS1/16SS0R0J
R 1527	(A,38,12)	RS1/16SS471J	R 1741	(B,91,91)	RS1/16SS0R0J
R 1528	(A,37,12)	RS1/16SS221J	R 1742	(A,78,77)	RS1/16SS0R0J
R 1529	(A,36,12)	RS1/16SS221J	R 1748	(A,70,92)	RS1/8SQ75R0D
R 1530	(A,35,12)	RS1/16SS471J	R 1749	(A,67,92)	RS1/16SS0R0J
R 1531	(B,52,9) (A,C)	RS1/4SA0R0J	R 1750	(B,87,75)	RS1/16SS0R0J
R 1532	(B,52,24)	RS1/10SR0R0J	R 1755	(B,68,66)	RS1/16SS821J
R 1534	(A,48,15)	RS1/16SS0R0J	R 1756	(B,64,68)	RS1/16SS821J
R 1535	(A,42,13)	RS1/8SQ0R0J	R 1757	(B,68,65)	RS1/16SS223J
R 1601	(B,52,31)	RS1/16SS0R0J	R 1758	(B,62,68)	RS1/16SS223J
R 1602	(B,68,31)	RS1/16SS0R0J	R 1761	(A,92,103)	RS1/10SR0R0J
R 1611	(B,80,73)	RS1/16SS0R0J	R 1762	(B,92,107)	RS1/16SS473J
R 1612	(B,84,73)	RS1/16SS0R0J	R 1764	(A,91,99)	RS1/10SR0R0J
R 1615	(B,80,76)	RS1/16SS0R0J	R 1765	(B,71,104) (A)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 1766	(B,71,108) (A)	RS1/16SS0R0J
R 1768	(B,71,106) (A)	RS1/16SS0R0J
R 1771	(B,93,90)	RS1/16SS0R0J
R 1772	(B,90,93)	RS1/16SS0R0J
R 1773	(B,65,63)	RS1/16SS472J
R 1774	(B,66,63)	RS1/16SS472J
R 1775	(B,71,103) (B,C)	RS1/16SS0R0J
R 1776	(B,71,107) (B,C)	RS1/16SS0R0J
R 1777	(B,89,72)	RS1/16SS182J
R 1778	(B,71,105) (B,C)	RS1/16SS0R0J
R 1781	(B,94,81)	RS1/16SS223J
R 1782	(B,94,84)	RS1/16SS223J
R 1783	(B,78,77)	RS1/16SS0R0J
R 1784	(B,74,78)	RS1/16SS0R0J
R 1787	(A,78,83)	RS1/16SS0R0J
R 1788	(A,78,84)	RS1/16SS0R0J
R 1791	(B,86,113)	RS1/16SS182J
R 1792	(B,88,113)	RS1/16SS182J
R 1793	(B,85,112)	RS1/16SS272J
R 1794	(B,89,112)	RS1/16SS272J
R 1795	(B,81,113)	RS1/16SS182J
R 1796	(B,79,113)	RS1/16SS182J
R 1797	(B,83,112)	RS1/16SS272J
R 1798	(B,77,112)	RS1/16SS272J
R 1801	(B,37,117)	RS1/16SS472J
R 1802	(B,37,118)	RS1/16SS472J
R 1803	(B,43,116)	RS1/10SR390J
R 1804	(B,43,118)	RS1/10SR390J
R 1805	(B,41,114)	RS1/10SR223J
R 1806	(B,42,121)	RS1/10SR223J
R 1831	(B,157,109) (A)	RS1/16SS103J
R 1832	(B,157,112) (A)	RS1/16SS681J
R 1833	(B,157,111) (A)	RS1/16SS101J
R 1835	(B,139,125) (A)	RS1/10SR332J
R 1836	(B,141,127) (A)	RS1/10SR682J
R 1837	(B,137,126) (A)	RS1/10SR222J
R 1838	(B,147,111) (A)	RS1/10SR101J
R 1839	(B,145,109) (A)	RS1/16SS680J
R 1841	(B,147,108) (A)	RS1/10SR101J
R 1845	(B,142,118) (A)	RS1/10SR102J
R 1846	(B,142,116) (A)	RS1/10SR102J
R 1847	(B,142,119) (A)	RS1/10SR223J
R 1848	(B,142,114) (A)	RS1/10SR223J
R 1849	(B,142,120) (A)	RS1/10SR181J
R 1850	(B,142,113) (A)	RS1/10SR181J
R 1861	(B,166,7)	RS1/16SS271J
R 1862	(B,165,7)	RS1/16SS152J
R 1863	(B,166,9)	RS1/16SS333J
R 1864	(B,165,10)	RS1/16SS104J
R 1865	(B,164,9)	RS1/16SS104J
R 1866	(B,164,7)	RS1/16SS473J
R 1867	(B,164,11)	RS1/16SS104J
R 1868	(B,165,12)	RS1/16SS104J
R 1869	(B,157,12)	RS1/16SS102J
R 1870	(B,156,6)	RS1/16SS472J
R 1871	(B,157,7)	RS1/16SS104J
R 1872	(B,156,7)	RS1/16SS473J
R 1873	(B,163,14)	RS1/16SS104J
R 1874	(B,163,16)	RS1/16SS104J
R 1875	(B,157,16)	RS1/16SS103J

Circuit Symbol and No.		Part No.
R 1921	(B,33,41) (A)	RS1/16SS102J
R 1931	(B,28,47) (A)	RS1/10SR1001D
R 1932	(B,31,47) (A)	RS1/10SR1002D
R 1934	(B,25,54) (A)	RS1/16SS102J
R 1941	(B,25,56)	RS1/16SS102J
R 1951	(A,27,66) (A)	RS1/16SS104J
R 1952	(A,27,68) (A)	RS1/16SS104J
R 1953	(A,28,66) (A)	RS1/16SS101J
R 1954	(A,29,67) (A)	RS1/16SS101J
R 1955	(A,27,62) (A)	RS1/16SS101J
R 1956	(A,26,62) (A)	RS1/16SS101J
R 1957	(B,22,32) (A)	RS1/16SS103J
R 1958	(B,22,34) (A)	RS1/16SS0R0J
R 1959	(A,28,62) (A)	RS1/16SS101J
R 1960	(A,27,64) (A)	RS1/16SS103J
R 1961	(A,27,20) (A)	RS1/16SS102J
R 1962	(A,27,19) (A)	RS1/16SS102J
R 1963	(B,22,35) (A)	RS1/16SS101J
R 1964	(B,22,36) (A)	RS1/16SS101J
R 1965	(B,24,67) (A)	RS1/8SQ0R0J
R 1966	(B,28,67) (B,C)	RS1/8SQ0R0J
R 1967	(B,7,9) (A)	RS1/16SS0R0J
R 1968	(B,9,10) (A)	RS1/16SS0R0J
R 1969	(B,15,10) (A)	RS1/16SS0R0J
R 1970	(B,11,10) (A)	RS1/16SS0R0J
R 1971	(B,12,10) (A)	RS1/16SS0R0J
R 1972	(B,13,10) (A)	RS1/16SS0R0J
R 1973	(B,14,10) (A)	RS1/16SS0R0J
R 1974	(A,27,17) (A)	RS1/16SS102J
R 1975	(A,27,16) (A)	RS1/16SS103J
R 1976	(A,27,18) (A)	RS1/16SS102J
R 1977	(B,26,63)	RS1/8SQ0R0J
R 1978	(B,7,66)	RS1/10SR0R0J
R 1979	(B,8,61) (A)	RS1/10SR0R0J
R 1986	(A,54,61) (A)	RS1/16SS0R0J
R 1987	(A,55,61)	RS1/16SS0R0J
R 1988	(A,56,60) (A)	RS1/16SS0R0J
R 2001	(A,41,88) (B,C)	RS1/16SS105J
R 2002	(A,58,89) (B,C)	RS1/16SS221J
R 2003	(A,58,82) (B,C)	RS1/16SS751J
R 2004	(A,36,86) (B,C)	RS1/16SS152J
R 2005	(A,39,82) (B,C)	RS1/16SS105J
R 2006	(A,35,79) (B,C)	RS1/16SS471J
R 2007	(A,36,78) (B,C)	RS1/16SS330J
R 2008	(A,34,74) (B,C)	RS1/16SS681J
R 2009	(A,55,72) (B,C)	RS1/16SS0R0J
R 2010	(B,36,66) (B,C)	RS1/4SA8R2J
R 2011	(A,44,89) (B,C)	RS1/10SR0R0J
R 2012	(B,34,66) (B,C)	RS1/4SA8R2J
R 2013	(B,40,88) (B,C)	RS1/10SR0R0J
R 2016	(A,42,66) (B,C)	RS1/16SS101J
R 2017	(A,41,65) (B,C)	RS1/16SS0R0J
R 2018	(A,40,68) (B,C)	RS1/16SS102J
R 2019	(A,40,65) (B,C)	RS1/16SS103J
R 2022	(A,57,61) (B,C)	RS1/16SS0R0J
R 2051	(A,53,63) (B,C)	RS1/16SS680J
R 2075	(B,21,91) (A)	RS1/10SR0R0J
R 2076	(B,23,91) (B,C)	RS1/10SR0R0J
R 2141	(B,121,49) (A)	RS1/16SS472J
R 2142	(B,123,50) (A)	RS1/16SS124J

Circuit Symbol and No.		Part No.
R 2143	(B,124,44) (A)	RS1/16SS0R0J
R 2144	(B,120,44) (A)	RS1/16SS0R0J
R 2145	(B,120,46) (A)	RS1/16SS4303D
R 2146	(B,119,46) (A)	RS1/16SS0R0J
R 2147	(B,120,47) (A)	RS1/16SS1003D
R 2148	(B,128,45) (A)	RS1/16SS104J
R 2150	(A,131,40) (A)	RS1/10SR2R2J
R 2201	(B,125,14)	RS1/10SR473J
R 2202	(B,121,14)	RS1/10SR473J
R 2203	(A,129,28)	RS1/16SS303J
R 2204	(B,122,16)	RS1/10SR0R0J
R 2205	(B,126,16)	RS1/10SR0R0J
R 2207	(B,138,21)	RS1/16SS271J
R 2209	(B,138,19)	RS1/16SS471J
R 2210	(A,140,17)	RS1/16SS223J
R 2211	(B,140,20)	RS1/4SA151J
R 2212	(B,135,15)	RS1/16SS120J
R 2213	(B,136,15)	RS1/16SS332J
R 2214	(B,129,24)	RS1/16SS102J
R 2215	(B,128,26)	RS1/16SS473J
R 2221	(A,108,32)	RS1/10SR0R0J
R 2222	(A,99,24)	RS1/10SR471J
R 2223	(A,95,19)	RS1/16SS153J
R 2224	(A,97,24)	RS1/16SS153J
R 2225	(A,111,24)	RS1/16SS0R0J
R 2226	(A,111,21)	RS1/16SS0R0J
R 2227	(A,112,18)	RS1/16SS0R0J
R 2228	(B,101,29)	RS1/10SR101J
R 2229	(B,114,19)	RS1/16SS471J
R 2233	(B,112,19)	RS1/16SS101J
R 2237	(B,102,24)	RS1/16SS0R0J
R 2238	(B,102,23)	RS1/16SS0R0J
R 2239	(B,102,22)	RS1/16SS202J
R 2240	(B,102,21)	RS1/16SS202J
R 2242	(B,97,26)	RS1/10SR222J
R 2243	(B,98,26)	RS1/10SR222J
R 2248	(A,102,25)	RS1/16SS0R0J
R 2249	(A,98,15)	RS1/16SS0R0J
R 2250	(A,106,16)	RS1/16SS0R0J
R 2312	(B,77,23)	RS1/16SS101J
R 2313	(B,77,22)	RS1/16SS101J
R 2314	(B,83,26)	RS1/16SS221J
R 2315	(B,72,14)	RS1/16SS331J
R 2352	(B,164,120)	RS1/10SR0R0J
R 2353	(A,165,122)	RS1/10SR0R0J
R 2357	(B,163,116)	RS1/10SR102J
R 2358	(B,162,116)	RS1/10SR102J
R 2402	(B,140,9) (A)	RS1/16SS0R0J
R 2403	(B,138,9) (A)	RS1/16SS0R0J
R 2407	(B,152,22)	RS1/8SQ0R0J
R 2408	(A,145,24) (C)	RS1/16SS0R0J
R 2410	(A,147,26) (C)	RS1/16SS0R0J
R 2412	(A,162,17)	RS1/16SS0R0J
R 2413	(B,79,17)	RS1/16SS0R0J
R 2440	(A,36,31) (B,C)	RS1/10SR0R0J
R 2442	(A,161,23)	RS1/10SR0R0J
R 2443	(A,21,99) (B,C)	RS1/10SR0R0J
R 2446	(A,55,6)	RS1/16SS0R0J
R 2449	(A,113,10) (A)	RS1/16SS0R0J
R 2450	(A,113,8) (B)	RS1/16SS271J
R 2452	(A,113,6) (C)	RS1/16SS271J
R 2459	(A,43,34)	RS1/10SR0R0J
R 2901	(A,99,4)	RS1/10SR122J
R 2902	(A,83,8)	RS1/10SR242J
R 2903	(A,60,8)	RS1/10SR122J
R 2904	(A,68,8)	RS1/10SR242J
R 2905	(A,114,7)	RS1/10SR682J

CAPACITORS

C 1001	(A,95,114) 3 300 uF/16 V	CCH1928
C 1011	(B,123,140)	CKSSYB102K50
C 1051	(B,62,125)	CKSRYB104K50
C 1053	(B,85,114)	CKSRYB474K16
C 1054	(B,89,114)	CKSRYB474K16
C 1055	(B,86,116)	CKSRYB474K16
C 1056	(B,89,116)	CKSRYB474K16
C 1057	(B,82,114)	CKSRYB474K16
C 1058	(B,78,114)	CKSRYB474K16
C 1059	(B,82,116)	CKSRYB474K16
C 1060	(B,78,116)	CKSRYB474K16
C 1061	(B,97,134)	CKSRYB104K50
C 1062	(B,97,135)	CKSRYB104K50
C 1064	(B,91,134)	CKSQYB225K10
C 1065	(B,90,136)	CKSQYB225K10
C 1066	(A,82,116) Capacitor	CEHVW100M16
C 1067	(B,59,125)	CKSRYB104K50
C 1071	(B,111,120)	CKSRYB104K50
C 1072	(A,107,102)	CEAT472M16
C 1091	(B,159,108)	CKSRYB105K16
C 1092	(B,164,109)	CKSRYB105K16
C 1112	(B,158,108)	CKSSYB103K16
C 1113	(A,155,105)	CKSYB105K35
C 1141	(B,110,139)	CKSRYB105K10
C 1142	(B,112,138)	CKSRYB102K50
C 1151	(B,53,128)	CKSSYB102K50
C 1161	(A,167,66)	CEVW100M16
C 1162	(A,161,83)	CKSSYB102K50
C 1164	(A,161,86)	CKSRYB104K50
C 1171	(A,156,97)	CEVW100M16
C 1172	(A,161,95)	CKSSYB102K50
C 1174	(A,161,99)	CKSRYB104K50
C 1181	(A,66,98) Capacitor	CEVW330M10
C 1201	(B,164,39)	CKSSYB472K25
C 1204	(B,141,49)	CCSRCH821J50
C 1205	(B,141,41)	CCSRCH221J50
C 1206	(B,143,46)	CCSRCH220J50
C 1207	(B,143,42)	CCSRCH330J50
C 1208	(B,141,40)	CCSRCH821J50
C 1209	(B,147,51)	CCSRCH102J50
C 1210	(B,147,38)	CCSRCH102J50
C 1211	(B,144,51)	CKSRYB152K50
C 1212	(B,144,39)	CKSSYB273K16
C 1216	(B,156,45) 4.7 uF	CCG1201
C 1217	(B,155,38)	CKSRYB104K50
C 1218	(B,156,44)	CKSRYB104K50
C 1219	(B,153,51)	CKSRYB104K50
C 1220	(A,160,39) 10 uF	CCG1236
C 1221	(A,157,50) 10 uF	CCG1236
C 1223	(A,138,39) 22 uF	CCG1254

Circuit Symbol and No.			Part No.
C 1224	(A,140,39)	22 uF	CCG1254
C 1226	(A,140,49)	22 uF	CCG1254
C 1227	(A,138,49)	22 uF	CCG1254
C 1241	(B,158,69)	10 uF	CCG1236
C 1243	(B,148,74)		CKSRYB104K50
C 1244	(A,153,68)	100 uF/16 V	CCH1565
C 1246	(B,148,78)		CKSSYB104K16
C 1248	(A,131,85)	100 uF/16 V	CCH1565
C 1249	(A,137,86)	10 uF	CCG1236
C 1250	(A,140,86)	10 uF	CCG1236
C 1261	(A,99,83)		CKSSYB103K25
C 1262	(A,104,81)		CKSSYB104K16
C 1266	(A,137,65)		CKSSYB103K25
C 1267	(B,138,65)		CKSSYB103K25
C 1268	(A,134,70)		CKSSYB473K16
C 1269	(A,135,67)		CKSQYB105K25
C 1270	(B,136,71)		CCSRCH560J50
C 1271	(A,134,77)		CKSYB475K16
C 1272	(A,133,78)		CKSRYB104K16
C 1281	(A,128,66)	22 uF	CCG1254
C 1282	(B,119,75)		CCSSCH221J50
C 1283	(A,122,73)		CKSRYB104K16
C 1285	(B,118,70)		CCSRCH151J50
C 1287	(A,127,77)		CKSYB225K25
C 1302	(B,111,45)		CCSSCH101J50
C 1306	(B,107,40)		CCSSCH221J50
C 1309	(B,106,36)		CCSSCH471J50
C 1310	(B,110,46)		CKSRYB104K16
C 1311	(B,93,67)		CKSSYB104K16
C 1312	(B,89,62)		CCSSCH101J50
C 1313	(B,106,43)		CKSRYB103K50
C 1314	(B,105,54)		CKSRYB103K50
C 1315	(B,99,68)		CKSSYB103K16
C 1316	(B,103,43)		CCSSCH101J50
C 1317	(B,71,41)		CKSRYB153K50
C 1318	(B,103,63)		CKSRYB103K50
C 1319	(A,97,37)		CCSSCH100D50
C 1320	(B,71,35)		CKSRYB104K16
C 1321	(A,97,39)		CKSRYB103K50
C 1322	(A,97,38)		CKSRYB105K10
C 1323	(A,95,37)		CCSSCH100D50
C 1324	(A,77,35)		CKSRYB104K16
C 1325	(B,94,62)		CKSRYB103K50
C 1326	(A,91,36)	4.7 uF	CCG1201
C 1327	(B,86,36)		CCSSCH121J50
C 1328	(B,81,38)		CCSSCH180J50
C 1332	(B,83,36)	(A)	CCSSCH121J50
	(B,83,36)	(B,C)	CCSSCH680J50
C 1334	(B,84,44)		CKSRYB103K50
C 1335	(B,83,44)		CKSRYB105K10
C 1336	(B,85,49)		CKSRYB103K50
C 1337	(A,78,50)		CKSSYB104K16
C 1339	(B,89,46)		CKSSYB103K16
C 1345	(A,108,69)		CKSRYB102K50
C 1346	(A,107,66)		CEVW100M16
C 1347	(B,79,38)		CCSSCH180J50
C 1349	(B,91,63)		CKSSYB681K50
C 1471	(B,164,62)		CKSRYB104K16
C 1472	(B,169,66)		CKSSYB102K50
C 1473	(B,169,58)		CKSRYB104K16

Circuit Symbol and No.			Part No.
C 1474	(B,165,53)		CKSRYB103K50
C 1475	(B,169,54)		CKSRYB823K16
C 1511	(B,81,67)		CKSRYB104K16
C 1521	(B,31,11)		CCSRCH101J50
C 1522	(B,34,11)		CCSRCH101J50
C 1523	(B,41,13)	(A)	CKSRYB103K50
C 1526	(A,46,13)	10 uF	DCH1201
C 1527	(A,45,11)		CKSRYB104K16
C 1530	(A,48,11)	(A)	CKSRYB103K50
C 1531	(A,54,14)	Capacitor	CEVW220M16
C 1622	(A,58,27)		CKSSYB103K16
C 1623	(A,60,31)		CKSQYB106K6R3
C 1624	(A,62,34)		CKSSYB104K16
C 1641	(B,111,77)	10 uF	DCH1201
C 1642	(B,107,78)	10 uF	DCH1201
C 1643	(B,108,80)		CCSRCH221J50
C 1644	(B,106,83)		CCSRCH221J50
C 1645	(B,97,84)		CKSSYB104K16
C 1646	(B,104,79)		CKSRYB103K50
C 1647	(B,99,78)		CKSRYB104K16
C 1648	(B,104,80)		CCSRCH151J50
C 1649	(B,98,81)		CCSRCH151J50
C 1650	(B,105,86)		CKSQYB225K10
C 1691	(B,83,78)		CKSRYB105K10
C 1692	(B,81,78)		CKSRYB105K10
C 1693	(B,84,78)		CKSRYB105K10
C 1694	(A,89,81)		CEVW100M16
C 1695	(A,86,81)		CKSRYB104K50
C 1698	(B,74,79)		CKSRYB104K50
C 1699	(B,74,81)		CKSRYB104K50
C 1700	(B,74,82)		CKSRYB104K50
C 1701	(B,74,83)		CKSRYB104K50
C 1704	(B,74,87)		CKSRYB104K50
C 1705	(B,75,88)		CKSRYB104K50
C 1706	(B,75,90)		CKSRYB104K50
C 1707	(B,75,91)		CKSRYB104K50
C 1708	(B,75,92)		CKSSYB104K16
C 1709	(B,81,91)		CKSSYB104K16
C 1710	(A,76,89)	Capacitor	CEVW330M25
C 1711	(B,80,92)		CKSSYB104K16
C 1713	(B,73,98)		CKSYB475K16
C 1714	(B,93,101)		CKSYB475K16
C 1715	(A,86,90)		CKSSYB104K16
C 1716	(A,89,87)		CEVW100M16
C 1717	(A,82,92)		CKSSYB104K16
C 1718	(A,83,88)		CEVW100M16
C 1721	(B,85,78)		CKSRYB105K10
C 1722	(B,88,78)		CKSRYB105K10
C 1723	(B,91,78)		CKSRYB105K10
C 1724	(B,91,80)		CKSRYB105K10
C 1726	(B,91,79)		CKSRYB105K10
C 1727	(B,91,82)		CKSRYB105K10
C 1728	(B,91,84)		CKSRYB105K10
C 1729	(B,91,83)		CKSRYB105K10
C 1733	(B,90,88)		CKSRYB105K10
C 1734	(B,88,91)		CKSRYB105K10
C 1735	(B,90,91)		CKSRYB105K10
C 1738	(B,86,78)		CKSRYB105K10
C 1751	(B,69,68)	4.7 uF	CCG1201
C 1752	(B,65,70)	4.7 uF	CCG1201

Circuit Symbol and No.		Part No.
C 1761	(A,91,105)	CKSSYB104K10
C 1763	(A,80,109)	CKSSYB104K10
C 1765	(A,81,106) 10 uF	DCH1165
C 1766	(B,83,108)	CCSSCH100D50
C 1767	(B,81,108)	CKSRYB474K10
C 1769	(B,91,100)	CKSRYB105K10
C 1770	(B,92,98)	CKSRYB105K10
C 1771	(B,92,97)	CKSRYB105K10
C 1772	(A,86,96)	CKSSYB104K16
C 1773	(A,86,100) Capacitor	CEVW470M16
C 1774	(B,84,94)	CCSSCH100D50
C 1775	(A,80,96) 10 uF	DCH1165
C 1776	(B,77,95)	CKSRYB105K10
C 1777	(A,77,104)	CKSSYB222K50
C 1778	(B,75,95)	CKSRYB105K10
C 1779	(A,79,98)	CCSQCH223J50
C 1780	(A,79,100)	CCSQCH223J50
C 1781	(B,74,102) (A)	CKSRYB105K10
C 1782	(B,93,106) (A)	CKSRYB105K10
C 1783	(B,74,101) (A)	CKSRYB105K10
C 1784	(B,93,105) (A)	CKSRYB105K10
C 1785	(B,74,100)	CKSRYB105K10
C 1786	(B,74,105)	CKSRYB105K10
C 1787	(B,74,104)	CKSRYB105K10
C 1788	(B,74,106)	CKSRYB105K10
C 1789	(B,77,108)	CKSQYB225K10
C 1799	(B,47,115) 10 uF	DCH1165
C 1800	(B,47,118) 10 uF	DCH1165
C 1831	(B,150,114) (A)	CKSSYB472K50
C 1832	(B,148,130) (A)	CKSRYB104K50
C 1861	(B,165,9)	CCSSCH471J50
C 1921	(B,25,44) 10 uF(A)	CCG1192
C 1922	(B,28,36) 10 uF(A)	CCG1192
C 1931	(B,34,54) (A)	CKSQYB475K6R3
C 1932	(B,26,47) (A)	CKSQYB475K6R3
C 1933	(A,30,43) Capacitor(A)	CEVW470M16
C 1941	(B,33,59) 4.7 uF	CCG1222
C 1943	(B,25,59) 4.7 uF	CCG1201
C 1951	(B,24,47) 10 uF(A)	CCG1192
C 1952	(B,22,44) 10 uF(A)	CCG1192
C 1953	(A,26,66) (A)	CKSSYB122K50
C 1954	(A,26,68) (A)	CKSSYB122K50
C 1957	(A,30,62) (A)	CKSRYB105K16
C 1958	(A,31,62) (A)	CKSRYB105K16
C 2001	(A,52,89) (B,C)	CCSSCH330J50
C 2002	(A,41,87) (B,C)	CKSRYB103K50
C 2003	(A,54,87) (B,C)	CCSSCH6R0D50
C 2004	(A,57,87) (B,C)	CKSSYB103K16
C 2005	(A,47,83) (B,C)	CKSSYB104K10
C 2006	(A,44,83) (B,C)	CKSSYB104K10
C 2009	(A,57,84) (B,C)	CKSSYB103K16
C 2010	(A,45,83) (B,C)	CKSSYB104K10
C 2012	(A,58,84) (B,C)	CKSSYB103K16
C 2013	(A,45,81) (B,C)	CKSSYB103K16
C 2014	(A,42,83) (B,C)	CKSSYB103K16
C 2015	(A,41,83) 10 uF(B,C)	CCG1192
C 2016	(A,39,84) (B,C)	CKSSYB223K16
C 2017	(A,51,83) (B,C)	CKSSYB103K16
C 2018	(A,49,85) (B,C)	CKSRYB105K10
C 2019	(A,50,82) (B,C)	CKSSYB223K16

Circuit Symbol and No.		Part No.
C 2020	(A,53,79) (B,C)	CKSSYB223K16
C 2021	(A,44,64) (B,C)	CCSRCH680J50
C 2022	(A,56,80) (B,C)	CKSRYB224K16
C 2023	(A,56,78) (B,C)	CKSSYB104K10
C 2024	(A,34,81) 10 uF(B,C)	CCG1192
C 2025	(A,55,76) (B,C)	CKSRYB105K10
C 2026	(A,37,79) (B,C)	CKSSYB104K10
C 2027	(A,58,74) (B,C)	CKSSYB472K25
C 2028	(A,58,75) (B,C)	CKSSYB472K25
C 2029	(A,34,78) (B,C)	CCSSCH101J50
C 2030	(A,39,80) (B,C)	CKSSYB104K10
C 2031	(A,33,78) (B,C)	CKSSYB103K16
C 2032	(A,58,72) (B,C)	CCSSCH8R0D50
C 2033	(A,55,73) (B,C)	CKSSYB104K10
C 2034	(A,34,73) (B,C)	CCSSCH820J50
C 2036	(A,36,68) (B,C)	CKSRYB474K10
C 2037	(A,58,67) (B,C)	CCSSCH8R0D50
C 2038	(A,39,62) (B,C)	CKSSYB104K10
C 2041	(A,53,65) 2.2 uF(B,C)	CCG1205
C 2042	(A,40,62) (B,C)	CKSSYB104K10
C 2045	(A,52,64) (B,C)	CKSSYB104K10
C 2046	(A,44,65) (B,C)	CKSSYB104K10
C 2047	(A,50,65) 2.2 uF(B,C)	CCG1205
C 2048	(A,49,66) (B,C)	CKSSYB104K10
C 2049	(A,38,68) (B,C)	CKSSYB102K50
C 2050	(A,46,83) (B,C)	CKSSYB223K16
C 2051	(A,38,82) (B,C)	CCSSCJ3R0C50
C 2074	(B,20,93) (A)	CCSSCK2R0C50
C 2101	(B,46,33)	CKSRYB103K50
C 2141	(A,120,37) 47 uF(A)	CCG1256
C 2142	(B,121,51) (A)	CKSSYB102K50
C 2143	(B,130,48) (A)	CKSRYB474K16
C 2144	(A,127,45) 10 uF(A)	CCG1236
C 2145	(B,120,45) (A)	CCSSCH330J50
C 2147	(B,127,45) (A)	CKSSYB104K10
C 2149	(A,128,40) (A)	CKSRYB222K50
C 2201	(A,119,28)	CKSRYB105K10
C 2202	(A,115,30) 100 uF/16 V	CCH1565
C 2203	(B,137,15)	CKSSYB153K16
C 2221	(A,108,26)	CKSQYB106K6R3
C 2222	(A,106,26)	CKSSYB104K10
C 2223	(A,101,29)	CKSSYB104K10
C 2224	(A,100,29)	CKSQYB106K6R3
C 2226	(A,102,23)	CKSQYB106K6R3
C 2227	(A,104,23)	CKSSYB104K10
C 2228	(A,98,16)	CKSSYB104K10
C 2230	(A,108,15)	CKSSYB104K10
C 2232	(A,111,22) 2.2 uF	CCG1205
C 2235	(B,112,26)	CKSSYB104K10
C 2239	(B,116,22)	CKSSYB104K10
C 2240	(B,115,20)	CKSSYB105K6R3
C 2241	(B,116,19)	CKSSYB105K6R3
C 2242	(B,113,19)	CKSSYB104K10
C 2245	(B,100,19)	CKSRYB104K16
C 2246	(B,103,26)	CKSRYB104K16
C 2247	(B,101,26)	CKSQYB106K6R3
C 2248	(B,102,20)	CKSSYB104K10
C 2360	(B,161,118) 22 uF	DCH1256
C 2426	(A,43,32) (A)	CKSRYB102K50

Circuit Symbol and No.		Part No.
C 2663	(B,160,120) 47 uF	CCG1251
C 2901	(A,153,5)	CKSRYB104K50
C 2902	(A,153,7)	CKSRYB104K50
C 2903	(A,20,7)	CKSRYB104K50
C 2904	(A,22,4)	CKSRYB104K50

C

Unit Number : YWX5033
Unit Name : DVD Core Unit

MISCELLANEOUS

IC 1002	(B,15,13)	Regulator IC	S-1133B50-U5
IC 1003	(B,37,11)	IC	S-1200B50-M5
IC 1004	(B,64,28)	IC	NJM2855DL1-33
IC 1251	(A,12,42)	IC	BA5839FP
IC 1401	(B,27,41)	Flash ROM Unit	CWW5043
IC 1402	(B,45,28)	Flash ROM Unit	CWW5044
IC 1480	(A,64,30)	SDRAM(16M)	M12L64164A-5TG2M
IC 1501	(A,39,33)	IC	MN2DS0018MA
IC 1801	(B,34,16)	D/A Converter	PCM1753DBQ
IC 1953	(B,57,17)	IC	S-1135D12-A6
Q 1101	(B,13,59)	Transistor	2SC4081
Q 1102	(B,13,56)	Transistor	2SC4081
Q 1103	(B,10,63)	Transistor	KTA1664
Q 1104	(B,22,54)	Transistor	KTA1664
L 1501	(A,54,31)	Inductor	CTF1743
L 1511	(A,48,17)	Chip Beads	VTL1126
L 1902	(A,17,17)	Inductor	CTF1487
L 1903	(B,63,16)	Inductor	CTF1558
L 1904	(A,68,18)	Ferrite Bead	CTF1528
X 1501	(B,48,18)	Oscillator 27.000 MHz	CSS1823
F 1001	(A,14,19)	Chip EMI Filter	DTF1106
F 1002	(B,63,18)	Chip EMI Filter	DTL1106
S 1	(A,47,55)	Spring Switch(HOME)	CSN1080
S 3	(B,25,13)	Spring Switch(12EJ)	CSN1081
VR1101	(A,7,63)	Semi-fixed 6.8 kohm(B)	CCP1447
VR1102	(A,7,60)	Semi-fixed 15 kohm(B)	CCP1449
CN1101	(A,21,63)	Connector	CKS6331
CN1952	(A,42,11)	Connector	CKS6025

RESISTORS

R 1004	(B,12,20)	RS1/16SS4702D
R 1007	(B,12,21)	RS1/16SS6801D
R 1019	(B,34,7)	RS1/16SS101J
R 1025	(B,36,6)	RS1/16SS101J
R 1027	(A,40,18)	RS1/16SS101J
R 1101	(B,15,57)	RS1/16SS104J
R 1102	(B,10,56)	RS1/16SS104J
R 1103	(B,14,61)	RS1/16SS4300F
R 1104	(B,11,59)	RS1/16SS5100F
R 1105	(B,17,54)	RS1/16SS4300F
R 1106	(B,10,57)	RS1/16SS5600F
R 1109	(B,6,57)	RS1/16SS3R3J
R 1110	(B,16,54)	RS1/16SS3R3J
R 1111	(B,6,63)	RS1/10SR3R3J
R 1112	(B,5,58)	RS1/10SR3R3J
R 1113	(B,15,59)	RS1/10SR3R9J
R 1114	(B,19,57)	RS1/10SR3R3J

Circuit Symbol and No.		Part No.
R 1115	(B,6,61)	RS1/10SR2R7J
R 1116	(B,6,62)	RS1/10SR2R7J
R 1117	(B,17,59)	RS1/10SR3R9J
R 1118	(B,16,59)	RS1/10SR3R9J
R 1223	(A,42,50)	RS1/16SS561J
R 1225	(B,29,8)	RS1/16SS471J
R 1251	(A,5,48)	RS1/16SS333J
R 1252	(A,5,47)	RS1/16SS473J
R 1253	(A,5,46)	RS1/16SS333J
R 1254	(A,5,45)	RS1/16SS473J
R 1255	(A,21,48)	RS1/16SS183J
R 1256	(A,21,46)	RS1/16SS752J
R 1257	(B,8,37)	RS1/16SS221J
R 1258	(A,19,39)	RS1/16SS221J
R 1401	(B,34,28)	RS1/16SS221J
R 1402	(B,34,47)	RS1/16SS104J
R 1405	(B,55,35)	RS1/16SS104J
R 1406	(B,39,45)	RS1/16SS472J
R 1480	(A,72,24)	RAB4CQ560J
R 1481	(A,72,28)	RAB4CQ560J
R 1482	(A,72,32)	RAB4CQ560J
R 1483	(A,72,35)	RAB4CQ560J
R 1484	(A,72,39)	RAB4CQ560J
R 1485	(A,55,22)	RAB4CQ560J
R 1486	(A,55,28)	RAB4CQ560J
R 1487	(A,56,37)	RAB4CQ560J
R 1488	(A,55,40)	RAB4CQ560J
R 1489	(A,54,30)	RS1/16SS560J
R 1490	(A,72,21)	RS1/16SS560J
R 1501	(B,48,21)	RS1/16SS122J
R 1503	(B,46,21)	RS1/16SS105J
R 1504	(A,50,17)	RS1/16SS121J
R 1505	(B,45,15)	RS1/16SS101J
R 1506	(B,45,14)	RS1/16SS101J
R 1507	(B,43,17)	RS1/16SS101J
R 1508	(B,42,18)	RS1/16SS221J
R 1509	(A,20,34)	RS1/16SS102J
R 1510	(A,11,29)	RS1/16SS102J
R 1512	(A,55,32)	RS1/16SS470J
R 1513	(A,23,38)	RS1/16SS103J
R 1514	(A,24,40)	RS1/16SS183J
R 1516	(A,24,36)	RS1/16SS104J
R 1517	(B,57,22)	RS1/16SS103J
R 1518	(B,33,31)	RS1/16SS103J
R 1519	(A,24,43)	RS1/16SS102J
R 1522	(A,21,37)	RS1/16SS104J
R 1523	(A,22,37)	RS1/16SS221J
R 1524	(B,29,33)	RS1/16SS472J
R 1525	(A,24,44)	RS1/16SS103J
R 1526	(A,22,40)	RS1/16SS103J
R 1527	(A,35,49)	RS1/16SS682J
R 1528	(B,19,34)	RS1/16SS103J
R 1529	(B,35,21)	RS1/16SS103J
R 1530	(B,17,34)	RS1/16SS103J
R 1531	(B,33,30)	RS1/16SS103J
R 1532	(A,24,42)	RS1/16SS101J
R 1533	(A,29,47)	RS1/16SS104J
R 1534	(B,29,48)	RS1/16SS221J
R 1535	(A,22,44)	RS1/16SS104J
R 1536	(B,32,48)	RS1/16SS104J

Circuit Symbol and No.			Part No.
R 1537	(A,24,46)		RS1/16SS104J
R 1538	(A,55,35)		RS1/16SS104J
R 1539	(B,33,48)		RS1/16SS104J
R 1540	(A,26,46)		RS1/16SS221J
R 1541	(A,26,45)		RS1/16SS221J
R 1542	(B,26,34)		RS1/16SS103J
R 1546	(A,33,49)		RS1/16SS682J
R 1601	(A,32,17)		RS1/16SS123J
R 1602	(A,32,18)		RS1/16SS123J
R 1603	(B,31,21)		RS1/16SS1002D
R 1604	(A,23,21)		RS1/16SS105J
R 1605	(A,22,23)		RS1/16SS105J
R 1670	(B,40,21)		RS1/16SS1002D
R 1671	(B,42,19)		RS1/16SS2402D
R 1672	(A,39,18)		RS1/16SS2000D
R 1674	(A,36,17)		RS1/16SS3002D
R 1801	(B,41,8)		RS1/16SS104J
R 1802	(B,43,8)		RS1/16SS104J
R 1803	(B,37,13)		RS1/16SS821J
R 1804	(B,39,14)		RS1/16SS821J
R 1982	(A,10,62)		RS1/16SS822J
R 1983	(B,40,20)		RS1/16SS1000D
R 1987	(B,43,21)		RS1/16SS0R0J

CAPACITORS

C 1001	(B,34,10)		CKSRYB105K10
C 1002	(B,12,17)		CKSSYB104K16
C 1003	(B,15,19)		CKSSYB104K16
C 1004	(B,15,17)	4.7 uF	CCG1201
C 1005	(B,40,11)		CKSRYB105K16
C 1010	(B,60,23)		CKSQYB225K10
C 1011	(B,64,22)		CKSRYB105K10
C 1015	(A,25,7)		CKSSYB102K50
C 1016	(B,64,15)		CKSSYB102K50
C 1018	(B,14,21)		CKSSYB104K10
C 1040	(B,51,7)		CCSRCH821J50
C 1041	(B,19,11)		CCSRCH271J50
C 1101	(B,14,53)	10 uF	CCG1192
C 1104	(B,7,57)		CKSSYB104K10
C 1105	(B,18,54)		CKSSYB104K10
C 1106	(B,8,66)		CKSSYB103K16
C 1107	(B,25,53)		CKSSYB103K16
C 1108	(A,19,57)		CKSSYB103K16
C 1109	(A,7,57)		CKSRYB224K16
C 1110	(A,17,58)		CKSSYB103K16
C 1111	(A,9,66)		CKSRYB224K16
C 1112	(B,17,52)	22 uF	DCH1256
C 1113	(B,8,58)	22 uF	DCH1256
C 1210	(B,77,34)		CKSSYB104K16
C 1251	(B,12,41)		CEVW101M16
C 1252	(B,7,41)	4.7 uF	CCG1222
C 1253	(B,7,39)		CKSSYB104K16
C 1254	(A,6,38)		CKSSYB104K16
C 1255	(A,18,37)		CKSSYB104K16
C 1401	(B,34,27)		CKSSYB104K16
C 1403	(B,39,40)		CKSSYB104K10
C 1404	(B,40,40)	4.7 uF	CCG1201
C 1408	(B,57,27)		CKSSYB104K10
C 1409	(B,58,29)	4.7 uF	CCG1201

Circuit Symbol and No.			Part No.
C 1410	(B,33,29)		CKSSYB104K16
C 1480	(A,71,19)		CKSSYB104K10
C 1481	(A,72,22)		CKSSYB104K10
C 1482	(A,72,26)		CKSSYB104K10
C 1484	(A,72,30)		CKSSYB104K10
C 1485	(A,72,41)		CKSSYB104K10
C 1487	(A,57,29)		CKSSYB104K10
C 1488	(A,57,25)		CKSSYB104K10
C 1489	(A,64,17)	10 uF	CCG1192
C 1490	(A,66,18)		CKSSYB102K50
C 1501	(B,61,20)	10 uF	CCG1192
C 1502	(B,54,20)	10 uF	CCG1192
C 1503	(A,54,33)		CKSSYB104K10
C 1504	(A,53,24)		CKSSYB104K10
C 1505	(A,53,27)		CKSSYB104K10
C 1506	(B,52,35)		CKSSYB104K10
C 1507	(A,53,36)		CKSSYB104K10
C 1508	(A,53,39)		CKSSYB104K10
C 1509	(A,53,42)		CKSSYB104K10
C 1510	(B,51,18)		CCSSCH100D50
C 1511	(A,48,18)		CKSSYB104K10
C 1512	(B,45,18)		CCSSCH100D50
C 1513	(A,48,48)		CKSSYB104K10
C 1514	(B,45,21)		CKSSYB104K10
C 1515	(A,45,18)		CKSSYB104K10
C 1516	(A,43,48)		CKSSYB104K10
C 1517	(A,42,48)		CKSSYB104K10
C 1518	(A,38,48)		CKSSYB104K10
C 1519	(A,34,47)		CKSSYB104K10
C 1520	(A,27,47)		CKSSYB104K10
C 1521	(A,24,34)		CKSSYB104K10
C 1522	(A,25,38)		CKSSYB104K10
C 1523	(A,20,46)		CKSSYB224K6R3
C 1524	(A,20,48)		CKSSYB473K16
C 1526	(A,24,37)		CKSSYB103K16
C 1528	(B,30,48)		CCSSCH471J50
C 1601	(A,32,19)		CKSSYB103K16
C 1602	(A,34,17)		CCSSCH101J50
C 1603	(A,33,18)		CCSSCH101J50
C 1604	(A,30,17)		CCSSCH680J50
C 1605	(A,30,18)		CCSSCH680J50
C 1606	(A,35,19)		CKSSYB104K10
C 1607	(A,20,24)	10 uF	CCG1192
C 1608	(A,28,18)	4.7 uF	CCG1201
C 1609	(A,26,22)		CKSSYB104K10
C 1612	(A,24,24)		CKSSYB104K10
C 1613	(A,24,25)		CKSSYB104K10
C 1614	(A,22,24)		CKSSYB104K10
C 1615	(A,23,26)		CKSSYB104K10
C 1616	(A,24,27)		CKSSYB104K10
C 1617	(B,27,28)		CKSSYB104K10
C 1618	(A,22,29)		CCSSCH101J50
C 1619	(A,23,30)		CKSSYB562K25
C 1620	(B,27,30)		CKSSYB224K6R3
C 1621	(A,22,31)		CKSSYB224K6R3
C 1622	(A,24,31)		CKSSYB333K16
C 1623	(A,27,20)		CKSRYB105K10
C 1624	(A,24,32)		CKSSYB104K10
C 1625	(A,24,29)		CKSSYB104K10
C 1671	(A,41,18)		CKSSYB104K10

Circuit Symbol and No.		Part No.
C 1673	(A,37,19)	CKSSYB104K10
C 1674	(B,42,20)	CKSSYB104K10
C 1676	(B,38,21)	CKSRYB105K10
C 1801	(B,42,10) 4.7 uF	CCG1201
C 1802	(B,46,10) 4.7 uF	CCG1201
C 1803	(B,42,12)	CCSRCH182J50
C 1804	(B,45,12)	CCSRCH182J50
C 1805	(B,34,13)	CKSSYB104K10
C 1806	(B,32,13) 10 uF	CCG1192
C 1809	(B,39,16)	CKSSYB104K10
C 1953	(B,60,17)	CKSRYB105K10
C 1954	(B,54,17)	CKSRYB105K10
C 1955	(B,77,40)	CKSSYB104K16

D

Unit Number : CWN6420(A)
: CWN6421(B)
: CWN6423(C)
Unit Name : IF Unit

MISCELLANEOUS

IC 101	(A,165,19) Remote Receiver Unit(C)	RS-470
IC 151	(A,15,99) GPS	GRF3I-0336S
IC 152	(B,14,108) IC	BA10358F
IC 153	(B,25,94) IC	BU33TA2WNVX
IC 187	(A,28,88) IC	TC7SH08FUS1
IC 191	(A,31,88) IC	TC7SH08FUS1
IC 195	(A,33,88) IC	TC7SH08FUS1
IC 221	(A,168,91) IC	TC7SET04FUS1
IC 223	(A,164,91) L-MOS And Gate	TC7SET08FUS1
IC 251	(A,119,103) Logic IC	TC7WH126FK
IC 252	(A,110,108) IC	TPD1018F
IC 301	(A,54,79) L-MOS And Gate(B)	TC7SET08FUS1
IC 303	(A,48,83) IC(B)	TC7SH08FUS1
IC 381	(A,152,77) IC	BD9008F
IC 382	(A,161,94) IC	BD82001FVJ
Q 151	(B,25,105) Transistor	KTA1664
Q 201	(A,85,96) Chip Transistor	DTC114EUA
Q 202	(A,82,96) Transistor	2SA1587
Q 204	(A,88,87) Digital Transistor	DTC143EUA
Q 205	(A,82,105) Transistor	2SD1760F5
Q 261	(B,50,97) Chip Transistor	HN1C03FU
Q 262	(B,44,98) Chip Transistor	HN1C03FU
Q 263	(A,63,90) Transistor(A)	2SA1576A
Q 264	(B,43,92) Chip Digital TransistorD	TA124EUA
D 202	(A,89,94) Diode	RB551V-30
D 203	(A,88,91) Diode	RKZ6.8KG(B2)
D 204	(A,86,113) Diode	RKZ11KG(B2)
D 233	(A,159,113) Diode	DZ2S180C
D 234	(A,159,112) Diode	DZ2S180C
D 235	(A,165,113) Diode	DZ2S180C
D 236	(B,164,112) Diode	RSB12JS2
D 237	(A,162,101) Diode	1SR154-400
D 266	(A,67,96) Diode	KDS160
D 271	(B,36,105) Diode	DZ2S180C
D 272	(B,39,123) Diode	DZ2S180C
D 301	(A,44,83) Diode(B)	KDS160
D 381	(A,159,71) Diode	RB055LA-40

Circuit Symbol and No.		Part No.
L 151	(B,20,98) Inductor	CTF1736
L 152	(A,22,97) Inductor	CTF1736
L 153	(A,20,98) Inductor	CTF1736
L 157	(A,22,112) Inductor	LCYC1R0K2125
L 158	(A,20,108) Inductor	CTF1736
L 211	(A,27,81) Inductor	CTF1708
L 212	(A,29,81) Inductor	CTF1708
L 213	(A,32,81) Inductor	CTF1708
L 234	(B,164,109) Choke Coil 90 ohm	CTH1319
L 381	(A,160,81) Coil	CTH1475
X 151	(B,17,96) TCXO 16.367 667 MHz	CWX3728
F 151	(A,13,107) Filter	CTF1706
F 231	(A,167,111) EMI Filter	CCG1067
F 232	(A,163,111) EMI Filter	CCG1067
F 233	(A,160,110) EMI Filter	CCG1060
F 261	(A,56,102) EMI Filter	CCG1082
F 262	(B,37,103) EMI Filter	CCG1082
⚠ P201	(B,76,103) Fuse 1 A	CEK1254
P 241	(B,149,125) Poly Switch	FSMD075-24R
P 261	(B,49,126) Poly Switch	FSMD075-24R
P 262	(B,39,126) Poly Switch	FSMD075-24R
P 263	(B,44,128) Poly Switch	FSMD075-24R
VA261	(B,34,103) Varistor	AVR-M1608C270KT2AB
VA262	(B,32,103) Varistor	AVR-M1608C270KT2AB
VA263	(A,28,111) Varistor	AVR-M1608C270KT2AB
VA264	(A,28,114) Varistor	AVR-M1608C270KT2AB
CN101	(B,110,9) Connector	CKS6299
CN103	(B,151,8) Connector	CKS5732
CN201	(A,70,121) Connector	CKS4822
CN231	(A,163,123) Connector	CKS5867
CN251	(A,119,128) Connector	CKS6155
CN261	(A,44,126) Connector	CKS6262
CN291	(A,42,9) Connector	CKS6261
CN301	(A,42,93) Connector(B)	AKM1274
JA151	(A,16,125) Connector	CKS5702
JA241	(A,140,124) Connector	CKS4124

RESISTORS

R 102	(B,106,18)	RS1/16SS182J
R 103	(B,104,17)	RS1/16SS221J
R 104	(B,119,20)	RS1/16SS0R0J
R 106	(B,117,16)	RS1/16SS0R0J
R 107	(B,138,16)	RS1/16SS0R0J
R 108	(B,136,14)	RS1/16SS0R0J
R 112	(B,119,16)	RS1/16SS0R0J
R 115	(B,102,15)	RS1/16SS331J
R 116	(A,162,18) (C)	RS1/16SS470J
R 117	(B,145,83)	RS1/16SS0R0J
R 118	(B,142,64)	RS1/16SS0R0J
R 119	(B,120,26)	RS1/16SS0R0J
R 120	(B,124,46)	RS1/16SS0R0J
R 121	(B,159,93)	RS1/16SS0R0J
R 122	(A,145,11)	RS1/10SR0R0J
R 123	(A,145,16)	RS1/16SS0R0J
R 124	(A,143,16)	RS1/16SS0R0J
R 131	(A,55,74)	RS1/10SR0R0J
R 141	(A,134,10)	RS1/10SR0R0J
R 142	(A,56,22)	RS1/10SR0R0J
R 150	(A,105,12)	RS1/10SR0R0J

Circuit Symbol and No.		Part No.
R 151	(A,20,94)	RS1/16SS151J
R 152	(A,17,104)	RS1/16SS2R7J
R 153	(A,18,94)	RS1/16SS0R0J
R 154	(A,16,94)	RS1/16SS0R0J
R 155	(A,14,94)	RS1/16SS0R0J
R 156	(A,13,94)	RS1/16SS101J
R 157	(A,12,94)	RS1/16SS101J
R 158	(A,14,102)	RS1/16SS0R0J
R 159	(A,11,94)	RS1/16SS101J
R 160	(A,13,110)	RS1/16SS0R0J
R 161	(B,13,99)	RS1/16SS472J
R 162	(B,13,97)	RS1/16SS203J
R 165	(A,26,107)	RS1/10SR10R0D
R 166	(A,24,107)	RS1/16SS1501D
R 167	(A,24,108)	RS1/16SS2402D
R 168	(A,22,108)	RS1/16SS3302D
R 170	(B,14,103)	RS1/16SS4702D
R 171	(B,10,110)	RS1/16SS4702D
R 172	(B,18,104)	RS1/16SS432J
R 173	(A,19,110)	RS1/16SS0R0J
R 174	(B,10,106)	RS1/16SS1002D
R 175	(B,10,107)	RS1/16SS2202D
R 176	(B,10,108)	RS1/16SS3302D
R 177	(B,16,113)	RS1/16SS103J
R 178	(B,15,114)	RS1/16SS102J
R 179	(B,22,104)	RS1/16SS102J
R 180	(B,25,96)	RS1/16SS103J
R 183	(B,27,96)	RS1/16SS0R0J
R 184	(B,31,100)	RS1/10SR0R0J
R 185	(A,14,111)	RS1/16SS0R0J
R 186	(A,15,111)	RS1/16SS0R0J
R 187	(A,29,83)	RS1/16SS0R0J
R 190	(A,28,90)	RS1/16SS104J
R 191	(A,32,83)	RS1/16SS0R0J
R 194	(A,31,90)	RS1/16SS104J
R 195	(A,35,83)	RS1/16SS0R0J
R 198	(A,33,90)	RS1/16SS104J
R 199	(B,22,98)	RS1/16SS0R0J
R 202	(A,82,99)	RS1/16SS103J
R 203	(A,84,99)	RS1/16SS512J
R 207	(A,84,93)	RS1/4SA681J
R 211	(A,27,84)	RS1/16SS101J
R 212	(A,30,84)	RS1/16SS101J
R 213	(A,33,84)	RS1/16SS101J
R 214	(A,17,96)	RS1/16SS101J
R 215	(A,16,95)	RS1/16SS101J
R 216	(A,14,95)	RS1/16SS101J
R 222	(A,167,88)	RS1/16SS0R0J
R 223	(A,168,93)	RS1/16SS0R0J
R 226	(A,165,88)	RS1/16SS0R0J
R 231	(A,167,108)	RS1/10SR0R0J
R 232	(A,163,108)	RS1/10SR0R0J
R 233	(A,165,111)	RS1/10SR0R0J
R 241	(B,150,120)	RS1/16SS102J
R 242	(B,148,120)	RS1/16SS102J
R 246	(A,118,107)	RS1/16SS0R0J
R 249	(A,122,107)	RS1/16SS0R0J
R 251	(A,118,99)	RS1/16SS221J
R 252	(A,120,100)	RS1/10SR105J
R 254	(A,116,117)	RS1/8SQ102J

Circuit Symbol and No.		Part No.
R 255	(A,118,117)	RS1/8SQ102J
R 256	(A,120,117)	RS1/8SQ102J
R 257	(A,122,117)	RS1/8SQ102J
R 258	(A,115,103)	RS1/16SS0R0J
R 259	(A,110,120)	RS1/8SQ0R0J
R 261	(A,49,98)	RS1/10SR390J
R 262	(A,47,98)	RS1/10SR390J
R 263	(A,54,98)	RS1/10SR390J
R 264	(A,52,98)	RS1/10SR390J
R 265	(B,46,99)	RS1/10SR223J
R 266	(B,41,99)	RS1/10SR223J
R 267	(B,53,99)	RS1/10SR223J
R 268	(B,48,99)	RS1/10SR223J
R 275	(A,59,93) (A)	RS1/16SS103J
R 276	(A,61,104)	RS1/16SS102J
R 277	(A,59,104)	RS1/16SS102J
R 278	(A,68,105)	RS1/16SS102J
R 279	(A,63,98)	RS1/16SS153J
R 280	(A,61,90) (A)	RS1/16SS103J
R 281	(A,62,92) (A)	RS1/10SR0R0J
R 282	(A,64,87) (A)	RS1/16SS102J
R 283	(A,64,88) (A)	RS1/16SS103J
R 284	(A,65,97)	RS1/16SS0R0J
R 285	(B,50,93)	RS1/10SR472J
R 286	(B,51,93)	RS1/10SR472J
R 287	(B,43,95)	RS1/10SR472J
R 288	(B,44,95)	RS1/10SR472J
R 289	(A,62,87) (B,C)	RS1/16SS104J
R 301	(A,42,85) (B)	RS1/16SS102J
R 302	(A,40,84) (B)	RS1/16SS0R0J
R 305	(A,42,84) (B)	RS1/16SS104J
R 308	(A,55,81) (B)	RS1/16SS0R0J
R 310	(A,50,85) (B)	RS1/16SS0R0J
R 385	(A,150,81)	RS1/10SR471J
R 386	(A,151,83)	RS1/10SR6202D
R 387	(A,153,82)	RS1/10SR4701D
R 389	(A,153,81)	RS1/10SR1202D
R 390	(A,155,82)	RS1/16SS183J
R 391	(A,147,78)	RS1/16SS513J
R 393	(A,152,61)	RS1/8SQ0R0J
R 394	(A,148,79)	RS1/16SS0R0J
R 396	(A,164,97)	RS1/4SA151J
R 397	(A,166,97)	RS1/4SA151J
R 398	(A,168,97)	RS1/4SA151J
R 401	(B,59,18) (A)	RS1/10SR0R0J
R 402	(B,62,18) (B)	RS1/10SR0R0J
R 404	(B,68,18) (C)	RS1/10SR0R0J

CAPACITORS

C 102	(A,162,22) (C)	CKSRYB104K50
C 131	(A,48,18)	CKSRYB103K50
C 151	(B,17,98)	CKSSYB103K16
C 152	(B,20,97)	CKSSYB102K50
C 153	(A,22,100)	CKSSYB104K10
C 154	(A,19,100)	CCSSCH101J50
C 156	(A,22,98) 10 uF	CCG1244
C 157	(A,19,98)	CKSSYB104K10
C 158	(A,19,101)	CCSSCH470J50
C 159	(A,18,104)	CKSSYB105K6R3
C 160	(A,16,104)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 161	(A,15,104)	CCSSCH470J50
C 162	(A,14,105)	CCSSCH101J50
C 163	(A,11,102)	CCSSCH470J50
C 164	(B,13,101)	CCSSCH470J50
C 167	(A,15,114)	CCSSCH101J50
C 168	(A,24,109)	CKSSYB104K10
C 169	(B,20,105)	CKSSYB103K16
C 170	(A,23,113)	CCSSCH101J50
C 171	(B,17,104)	CCSSCH101J50
C 172	(A,19,112)	CKSSYB102K50
C 173	(A,20,112)	CKSSYB103K16
C 174	(B,18,107)	CKSSYB104K10
C 175	(A,20,109)	CKSSYB104K10
C 176	(B,28,94)	CKSRYB105K10
C 177	(B,23,95)	CKSRYB105K10
C 187	(A,29,84)	CKSSYB104K16
C 191	(A,31,84)	CKSSYB104K16
C 195	(A,34,84)	CKSSYB104K16
C 203	(A,88,112)	CKSSYB103K16
C 205	(A,80,112)	CKSSYB103K16
C 206	(A,81,116)	CEVW101M16
C 221	(A,160,89)	CKSRYB105K10
C 222	(A,166,91)	CKSSYB104K10
C 223	(A,161,98)	CKSRYB103K50
C 224	(A,155,106)	CEVW101M16
C 225	(A,165,89)	CKSSYB104K10
C 241	(B,148,121)	CKSSYB102K50
C 242	(B,150,121)	CKSSYB102K50
C 251	(A,117,103)	CKSRYB104K16
C 254	(A,116,111)	CKSRYB103K50
C 255	(A,116,115)	CKSRYB103K50
C 256	(A,105,108)	CKSSYB103K25
C 257	(A,106,108)	CKSRYB102K50
C 258	(A,111,103)	CKSRYB104K50
C 261	(A,49,94) 10 uF	DCH1165
C 262	(A,47,94) 10 uF	DCH1165
C 263	(A,54,94) 10 uF	DCH1165
C 264	(A,52,94) 10 uF	DCH1165
C 271	(A,62,102)	CKSRYB103K50
C 273	(A,65,99)	CKSRYB102K50
C 274	(A,62,88) (A)	CKSSYB104K10
C 275	(B,53,128)	CKSRYB103K50
C 276	(B,37,129)	CKSRYB103K50
C 301	(A,56,79) (B)	CKSRYB104K16
C 303	(A,52,84) (B)	CKSRYB104K16
C 382	(A,166,70) 220 uF/6.3 V	CCH1688
C 383	(A,154,82)	CKSSYB153K16
C 384	(A,154,72) 4.7 uF	CCG1222
C 385	(A,155,80)	CCSSCH220J50
C 386	(A,154,74)	CKSRYB105K16
C 387	(A,153,67) 100 uF/16 V	CCH1565
C 388	(A,146,67) 100 uF/16 V	CCH1565

E

Unit Number : EXX2001
Unit Name : PCB Unit(Service)

MISCELLANEOUS

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch	CSN1067
S 102	Switch	CSN1068
CN101	Connector	CKS4997

RESISTORS

R 101		RS1/16S221J
R 102		RS1/16S221J
R 103		RS1/16S0R0J

CAPACITORS

C 101		CEVW220M16
C 102		CKSRYB104K16

F

Unit Number : CXX4252(A)
: CXX4253(B)
: CXX4254(C)
Unit Name : CC Monitor Unit(Service)

MISCELLANEOUS

IC 3200	(A,72,126) IC	OZ527IRN
IC 3300	(A,55,21) IC	NJU6062V
IC 3360	(A,14,25) IC	AK4388VT
IC 4001	(A,47,95) IC	TT4421
IC 4203	(A,20,60) IC	S-80944CNMC-G9E
IC 4204	(B,63,42) IC	LTC3412AEFE
IC 4205	(B,42,43) IC	LTC3412AEFE
IC 4206	(A,20,63) IC	S-80929CNMC-G8Z
IC 4207	(A,21,43) IC	TC7SH08FUS1
IC 4208	(B,22,128) IC	NJM2878F3-15
IC 4209	(A,20,104) IC	NJM2878F3-25
IC 4211	(A,19,72) IC	NJM2878F3-18
IC 4212	(A,26,44) IC	TC7SH08FUS1
IC 4216	(B,42,52) IC	S-80830CLMC-B6P
IC 4217	(A,24,55) IC	S-80835CLMC-B6U
IC 4219	(A,40,131) PM Switch	BD6522F
IC 4281	(B,67,49) IC	S-80844CLMC-B65
IC 4361	(A,28,137) IC	NJM2888F33
IC 4401	(A,71,95) IC	H5DU5162ETR-E3C
IC 4402	(A,71,67) IC	H5DU5162ETR-E3C
IC 4403	(A,46,77) Flash ROM Unit(Service)	CXX4262
IC 4404	(B,71,95) IC	H5DU5162ETR-E3C
IC 4405	(B,71,67) IC	H5DU5162ETR-E3C
IC 4406	(A,36,70) SRAM	CY62147EV30LL45BVA
IC 4407	(A,29,66) IC	TC7PA53FU
IC 4501	(B,41,122) IC	PEN005A
IC 4602	(A,45,143) IC	TC7SH86FUS1
IC 4621	(B,50,61) IC	PE9019A
IC 4654	(B,30,81) IC	WM1616LGEFL
IC 4701	(B,25,52) IC	341S2162
IC 4901	(A,25,119) IC	TC90192XBG
IC 5402	(A,30,22) IC(A,B)	NJM13403V
IC 5451	(A,39,44) IC	NJM2746RB1
IC 5513	(A,28,81) V PRO SYS LSI	AK8859VN
IC 5514	(A,41,25) IC	NJM2125F
Q 3360	(B,12,27) Chip Transistor	DTC114EUA
Q 4206	(A,42,140) Chip Transistor	DTC114EUA

Circuit Symbol and No.		Part No.
Q 4207	(B,58,79) Chip Transistor	DTC114EUA
Q 4209	(A,44,137) Chip Transistor	2SB1689
Q 4210	(B,60,72) Transistor	2SA1576A
Q 4211	(B,56,73) Transistor	2SC4081
Q 4212	(B,60,94) Chip Transistor	DTC114EUA
Q 4214	(B,60,100) Transistor	2SA1576A
Q 4216	(B,60,90) Chip Transistor	DTC114EUA
Q 4217	(B,56,95) Transistor	2SA1576A
Q 4218	(B,53,82) Transistor	2SA1576A
Q 4701	(B,25,58) Chip Transistor	DTC114TUA
Q 4903	(A,32,109) Transistor	2SC4617
D 3201	(A,65,123) Diode	RB160M-40
D 3300	(B,61,29) Diode	RKZ5.6KG(B2)
D 3301	(B,61,30) Diode	RKZ5.6KG(B2)
D 3302	(B,61,32) Diode	RKZ5.6KG(B2)
D 3303	(B,61,34) Diode	RKZ5.6KG(B2)
D 4201	(B,35,46) Diode	RB521G-30
D 4202	(B,64,36) Diode	RB521G-30
D 4361	(A,21,133) Diode	RB551V-30
D 4601	(A,55,114) Diode	RB520G-30
L 3200	(A,68,118) Choke Coil 10 uH	CTH1435
L 3300	(A,59,28) Ferrite Bead	CTF1528
L 3301	(A,64,28) Ferrite Bead	CTF1528
L 3302	(A,59,30) Ferrite Bead	CTF1528
L 3303	(A,57,32) Ferrite Bead	CTF1528
L 3360	(A,13,33) Inductor	LCTAW2R7J2520
L 3361	(B,11,24) Inductor	CTF1792
L 4002	(B,56,99) Inductor	CTF1736
L 4005	(B,43,87) Inductor	CTF1736
L 4006	(B,52,104) Inductor	CTF1736
L 4007	(B,42,88) Inductor	CTF1736
L 4010	(B,36,91) Inductor	CTF1736
L 4011	(B,47,102) Inductor	CTF1736
L 4012	(B,47,103) Inductor	CTF1736
L 4013	(B,47,104) Inductor	CTF1736
L 4014	(B,56,91) Inductor	CTF1736
L 4015	(B,50,82) Inductor	CTF1736
L 4016	(B,45,99) Inductor	CTF1736
L 4018	(B,41,89) Inductor	CTF1736
L 4202	(B,22,91) Choke Coil 90 ohm	CTH1319
L 4209	(A,10,69) Inductor	CTF1739
L 4210	(A,13,98) Inductor(A)	CTF1739
L 4213	(A,12,89) Inductor	CTF1739
L 4215	(A,16,63) Inductor	CTF1739
L 4224	(B,56,42) Choke Coil 1.2 uH	CTH1495
L 4225	(B,48,43) Choke Coil 1.2 uH	CTH1495
L 4246	(A,19,51) Inductor	CTF1739
L 4380	(B,24,66) Chip EMI Filter	DTF1106
L 4410	(A,53,75) Inductor	CTF1736
L 4414	(A,26,69) Inductor	CTF1736
L 4415	(A,28,64) Inductor	CTF1736
L 4501	(A,47,121) Inductor	CTF1736
L 4502	(A,42,123) Inductor	CTF1736
L 4651	(B,45,82) Inductor	CTF1736
L 4781	(B,39,78) Inductor	CTF1736
L 4782	(B,32,89) Inductor	CTF1736
L 4784	(B,60,67) Inductor	CTF1736
L 4785	(A,47,137) Inductor	CTF1736
L 4786	(B,39,65) Inductor	CTF1736
L 4788	(B,21,57) Inductor	CTF1736

Circuit Symbol and No.		Part No.
L 4903	(B,27,129) Inductor	CTF1736
L 4904	(B,21,104) Inductor	CTF1736
L 4905	(B,19,126) Inductor	CTF1736
L 4931	(A,36,75) Inductor	CTF1736
L 4933	(A,18,79) Inductor	CTF1736
L 4934	(B,25,104) Inductor	CTF1736
L 4936	(A,19,79) Inductor	CTF1736
L 5600	(A,22,130) Chip Beads	VTL1133
L 5601	(A,23,128) Chip Beads	VTL1133
L 5602	(A,23,130) Chip Beads	VTL1133
L 5603	(A,24,128) Chip Beads	VTL1133
L 5604	(A,24,130) Chip Beads	VTL1133
L 5605	(A,25,128) Chip Beads	VTL1133
L 5606	(A,25,130) Chip Beads	VTL1133
L 5607	(A,26,128) Chip Beads	VTL1133
L 5608	(A,26,130) Chip Beads	VTL1133
L 5609	(A,27,128) Chip Beads	VTL1133
L 5610	(A,27,130) Chip Beads	VTL1133
L 5611	(A,28,128) Chip Beads	VTL1133
L 5612	(A,28,130) Chip Beads	VTL1133
L 5613	(A,29,128) Chip Beads	VTL1133
L 5614	(A,29,130) Chip Beads	VTL1133
L 5615	(A,30,128) Chip Beads	VTL1133
L 5616	(A,30,130) Chip Beads	VTL1133
L 5617	(A,31,128) Chip Beads	VTL1133
L 5618	(A,34,126) Chip Beads	VTL1133
L 5619	(A,34,127) Chip Beads	VTL1133
L 5620	(A,33,128) Chip Beads	VTL1133
L 5632	(B,33,134) Inductor	CTF1635
TH3201	(A,78,33) Thermistor	CCX1084
X 4001	(A,34,92) Resonator 12.000 MHz	CSS1708
X 4002	(A,36,98) Resonator 32.768 kHz	CSS1777
X 4652	(B,42,81) Crystal Oscillator 24.576 MHz	ASS7102
X 4901	(A,28,109) Resonator 42.000 000 MHz	CSS1779
X 4902	(A,29,89) Resonator 24.576 MHz	CSS1699
F 4001	(B,55,100) Chip EMI Filter	VTL1171
F 4003	(B,51,103) Chip EMI Filter	VTL1171
F 4005	(B,35,92) Chip EMI Filter	VTL1171
F 4201	(A,13,51) EMI Filter	CCG1162
F 4202	(A,13,61) EMI Filter	CCG1162
F 4204	(A,20,67) EMI Filter	CCG1162
F 4409	(A,28,69) Chip EMI Filter	DTL1106
F 4651	(B,45,81) Chip EMI Filter	DTL1106
F 4901	(B,18,124) Chip EMI Filter	DTL1106
F 5005	(A,9,45) Chip EMI Filter	DTF1106
⚠ P4201	(B,49,39) Fuse 1.75 A	CEK1283
⚠ P4202	(B,52,44) Fuse 1.5 A	CEK1282
VA3300	(A,61,27) Varistor	AVR-M1608C120MT6AB
VA3301	(A,66,30) Varistor	AVR-M1608C120MT6AB
VA3302	(A,60,29) Varistor	AVR-M1608C120MT6AB
VA3303	(A,59,32) Varistor	AVR-M1608C120MT6AB
CN3200	(B,55,142) Connector	CKS5659
CN3300	(B,69,30) Connector	CKS6327
CN3302	(B,77,19) Connector	CKS6286
CN3360	(B,18,23) Connector	CKS6117
CN5605	(B,38,142) Connector	CKS6278
CN5607	(B,11,59) Connector	CKS6118
CN5608	(B,11,93) Connector	CKS5732
JA4712	(B,64,123) Connector	CKS6341
SN4201	(A,38,114) Sensor	S-58LM20A-N4

RESISTORS

Circuit Symbol and No.		Part No.
R 3200	(A,72,119)	RS1/16SS102J
R 3201	(B,10,40)	RS1/16SS183J
R 3202	(B,10,39)	RS1/16SS0R0J
R 3204	(A,68,130)	RS1/16SS472J
R 3205	(A,67,131)	RS1/16SS1001D
R 3206	(A,67,134)	RS1/16SS1004D
R 3207	(A,68,133)	RS1/16SS6802D
R 3209	(A,78,131)	RS1/16SS470J
R 3210	(A,78,129)	RS1/16SS473J
R 3211	(A,69,131)	RS1/16SS3002D
R 3213	(A,78,128)	RS1/16SS103J
R 3214	(A,68,135)	RS1/10SR0R0J
R 3216	(A,59,119)	RS1/8SQ0R0J
R 3217	(A,78,132)	RS1/16SS470J
R 3218	(A,71,131)	RS1/10SR0R0J
R 3219	(A,72,131)	RS1/10SR0R0J
R 3220	(A,77,122)	RS1/16SS333J
R 3221	(A,74,132)	RS1/10SR0R0J
R 3222	(A,75,133)	RS1/10SR0R0J
R 3325	(A,53,16)	RS1/10SR471J
R 3330	(A,54,15)	RS1/10SR101J
R 3335	(A,56,15)	RS1/10SR301J
R 3336	(A,55,27)	RS1/16SS0R0J
R 3337	(A,54,27)	RS1/16SS0R0J
R 3338	(A,56,27)	RS1/16SS471J
R 3339	(A,11,61)	RS1/10SR0R0J
R 3343	(A,14,49)	RS1/16SS0R0J
R 3344	(A,54,29)	RS1/16SS472J
R 3345	(A,55,29)	RS1/16SS472J
R 3360	(A,22,35)	RS1/16SS221J
R 3361	(A,22,36)	RS1/16SS221J
R 3362	(A,21,34)	RS1/16SS223J
R 3363	(A,21,37)	RS1/16SS223J
R 3364	(A,15,19)	RS1/16SS103J
R 3365	(A,17,19)	RS1/16SS103J
R 3366	(B,15,18)	RS1/16SS470J
R 3367	(A,16,19)	RS1/16SS103J
R 3368	(B,15,17)	RS1/16SS470J
R 3369	(B,14,19)	RS1/16SS470J
R 3371	(A,13,19)	RS1/16SS470J
R 3372	(A,21,19)	RS1/16SS473J
R 3373	(A,17,40)	RS1/16SS470J
R 3374	(A,17,39)	RS1/16SS103J
R 3375	(A,16,40)	RS1/16SS470J
R 3376	(B,9,24)	RS1/16SS470J
R 3377	(B,12,19)	RS1/16SS0R0J
R 3378	(B,10,26)	RS1/16SS0R0J
R 3380	(B,14,21)	RS1/16SS223J
R 3383	(B,14,27)	RS1/16SS0R0J
R 3386	(B,15,25)	RS1/16SS222J
R 4000	(A,56,109)	RS1/16SS0R0J
R 4001	(B,58,96)	RS1/16SS222J
R 4002	(B,58,97)	RS1/16SS222J
R 4004	(B,59,108)	RS1/16SS103J
R 4005	(A,63,43)	RS1/16SS103J
R 4006	(B,58,99)	RS1/16SS182J
R 4007	(B,58,100)	RS1/16SS103J
R 4008	(B,61,108)	RS1/16SS103J
R 4009	(B,60,108)	RS1/16SS103J
R 4010	(B,50,85)	RS1/16SS0R0J
R 4013	(A,32,96)	RS1/16SS103J
R 4014	(B,47,101)	RS1/16SS0R0J
R 4016	(B,48,104)	RS1/16SS6041F
R 4017	(A,37,93)	RS1/16SS105J
R 4018	(B,48,103)	RS1/16SS0R0J
R 4020	(A,37,98)	RS1/16SS106J
R 4021	(A,33,96)	RS1/16SS103J
R 4022	(A,37,96)	RS1/16SS101J
R 4024	(A,36,94)	RS1/16SS471J
R 4025	(B,43,102)	RS1/16SS103J
R 4026	(A,55,77)	RS1/16SS220J
R 4027	(A,62,101)	RAB4CQ104J
R 4028	(A,58,101)	RAB4CQ104J
R 4029	(A,61,107)	RAB4CQ104J
R 4030	(B,48,101)	RS1/16SS102J
R 4032	(B,49,84)	RS1/16SS0R0J
R 4033	(A,57,81)	RS1/16SS220J
R 4034	(A,63,39)	RS1/16SS103J
R 4035	(A,63,38)	RS1/16SS103J
R 4036	(A,63,41)	RS1/16SS103J
R 4037	(A,63,42)	RS1/16SS103J
R 4038	(A,61,104)	RAB4CQ104J
R 4040	(A,63,37)	RS1/16SS103J
R 4043	(B,33,90)	RS1/16SS222J
R 4044	(B,34,92)	RS1/16SS222J
R 4045	(B,61,84)	RS1/16SS222J
R 4046	(A,63,40)	RS1/16SS103J
R 4048	(A,14,96)	RS1/16SS222J
R 4049	(A,14,101)	RS1/16SS222J
R 4050	(A,33,88)	RS1/16SS104J
R 4051	(A,33,87)	RS1/16SS104J
R 4052	(A,40,108)	RS1/16SS104J
R 4053	(A,31,99)	RS1/16SS104J
R 4054	(A,31,103)	RS1/16SS104J
R 4055	(A,31,87)	RS1/16SS684J
R 4057	(B,35,101)	RS1/16SS821J
R 4058	(B,50,106)	RS1/16SS222J
R 4059	(B,42,96)	RS1/16SS153J
R 4060	(A,33,102)	RS1/16SS222J
R 4061	(B,38,102)	RS1/16SS104J
R 4062	(A,35,103)	RS1/16SS222J
R 4063	(B,52,102)	RS1/16SS222J
R 4064	(A,38,96)	RS1/16SS103J
R 4065	(A,34,103)	RS1/16SS222J
R 4066	(A,52,109)	RS1/16SS0R0J
R 4067	(A,51,109)	RS1/16SS0R0J
R 4068	(B,45,86)	RS1/8SQ0R0J
R 4069	(A,39,77)	RS1/16SS471J
R 4070	(A,31,101)	RS1/16SS102J
R 4071	(A,31,100)	RS1/16SS102J
R 4072	(A,31,102)	RS1/16SS102J
R 4073	(B,49,104)	RS1/16SS272J
R 4101	(B,62,100)	RAB4CQ220J
R 4102	(B,62,91)	RAB4CQ220J
R 4103	(B,62,88)	RAB4CQ220J
R 4104	(B,62,98)	RAB4CQ220J
R 4105	(B,63,75)	RAB4CQ220J

Circuit Symbol and No.		Part No.
R 4106	(B,63,81)	RAB4CQ220J
R 4107	(B,63,78)	RAB4CQ220J
R 4108	(B,63,72)	RAB4CQ220J
R 4109	(B,41,102)	RS1/16SS0R0J
R 4110	(A,47,85)	RAB4CQ220J
R 4111	(A,44,85)	RAB4CQ220J
R 4112	(A,45,82)	RAB4CQ220J
R 4113	(A,42,82)	RAB4CQ220J
R 4114	(B,42,102)	RS1/16SS0R0J
R 4115	(A,44,104)	RS1/16SS560J
R 4116	(A,46,106)	RS1/16SS220J
R 4117	(A,45,104)	RS1/16SS220J
R 4118	(A,45,104)	RS1/16SS220J
R 4119	(A,44,106)	RS1/16SS220J
R 4120	(A,45,106)	RS1/16SS220J
R 4121	(A,39,80)	RS1/16SS0R0J
R 4133	(A,40,81)	RS1/16SS330J
R 4134	(A,39,81)	RS1/16SS330J
R 4135	(A,41,80)	RS1/16SS220J
R 4136	(A,52,80)	RS1/16SS220J
R 4137	(A,51,80)	RS1/16SS470J
R 4138	(A,40,80)	RS1/16SS0R0J
R 4139	(A,54,81)	RAB4CQ470J
R 4140	(A,51,82)	RAB4CQ470J
R 4141	(A,50,85)	RAB4CQ470J
R 4142	(A,48,82)	RAB4CQ470J
R 4143	(A,46,105)	SMD Ferrite Beads CTF1801
R 4144	(A,47,104)	RS1/16SS470J
R 4145	(B,46,106)	RAB4CQ680J
R 4146	(B,43,106)	RAB4CQ680J
R 4147	(A,38,81)	RS1/16SS330J
R 4148	(B,63,86)	RS1/16SS220J
R 4149	(B,63,86)	RS1/16SS220J
R 4150	(B,63,85)	RS1/16SS220J
R 4151	(B,63,84)	RS1/16SS220J
R 4152	(B,42,101)	RS1/16SS473J
R 4153	(B,42,104)	RS1/16SS103J
R 4154	(B,55,89)	RS1/16SS1501D
R 4155	(B,53,89)	RS1/16SS1501D
R 4194	(A,52,105)	RS1/16SS0R0J
R 4196	(B,62,56)	RS1/16SS104J
R 4197	(B,62,62)	RS1/16SS104J
R 4198	(B,45,84)	RS1/16SS104J
R 4199	(A,41,85)	RS1/16SS272J
R 4200	(B,18,78)	RS1/10SR0R0J
R 4201	(A,11,71)	RS1/10SR0R0J
R 4202	(B,16,78)	RS1/10SR0R0J
R 4206	(A,65,44)	RS1/16SS4702D
R 4207	(A,64,44)	RS1/16SS1003D
R 4208	(A,23,48)	RS1/16SS4702D
R 4209	(A,22,49)	RS1/16SS1003D
R 4210	(B,64,37)	RS1/16SS223J
R 4211	(B,36,45)	RS1/16SS223J
R 4212	(B,69,44)	RS1/16SS562J
R 4213	(B,34,42)	RS1/16SS562J
R 4214	(B,54,47)	RS1/4S0R0J
R 4215	(B,44,38)	RS1/10SR0R0J
R 4216	(B,65,46)	RS1/10SR103J
R 4217	(B,37,40)	RS1/10SR103J
R 4218	(B,70,41)	RS1/16SS5102D

Circuit Symbol and No.		Part No.
R 4219	(B,68,42)	RS1/16SS0R0J
R 4220	(B,70,44)	RS1/16SS2402D
R 4221	(B,35,44)	RS1/16SS1003D
R 4222	(B,36,44)	RS1/16SS9101D
R 4223	(B,33,42)	RS1/16SS2003D
R 4224	(B,52,37)	RS1/16SS0R0J
R 4225	(B,46,46)	RS1/16SS0R0J
R 4226	(A,19,56)	RS1/16SS104J
R 4228	(A,19,41)	RS1/16SS103J
R 4229	(B,60,74)	RS1/10SR103J
R 4230	(B,58,74)	RS1/10SR102J
R 4231	(A,54,79)	RS1/16SS220J
R 4233	(A,18,105)	RS1/10SR0R0J
R 4234	(B,24,129)	RS1/10SR0R0J
R 4236	(B,54,79)	RS1/10SR103J
R 4237	(B,52,73)	RS1/10SR103J
R 4238	(B,58,70)	RS1/10SR103J
R 4239	(A,63,73)	RS1/8SQ0R0J
R 4241	(A,42,136)	RS1/10SR103J
R 4242	(B,34,48)	RS1/8SQ0R0J
R 4243	(A,47,131)	RS1/8SQ0R0J
R 4246	(A,45,139)	RS1/10SR331J
R 4247	(B,56,79)	RS1/10SR561J
R 4249	(A,20,69)	RS1/10SR0R0J
R 4250	(B,39,50)	RS1/16SS0R0J
R 4251	(B,22,68)	RS1/16SS0R0J
R 4254	(B,60,98)	RS1/10SR103J
R 4255	(A,12,93)	RS1/16SS101J
R 4256	(A,13,94)	RS1/16SS330J
R 4257	(B,64,52)	RS1/16SS0R0J
R 4259	(B,60,96)	RS1/10SR681J
R 4261	(A,47,139)	RS1/16SS102J
R 4262	(A,40,140)	RS1/16SS0R0J
R 4265	(B,22,101)	RS1/10SR0R0J
R 4266	(A,20,54)	RS1/16SS105J
R 4267	(A,23,43)	RS1/16SS0R0J
R 4268	(B,58,92)	RS1/10SR103J
R 4269	(A,57,64)	RS1/10SR471J
R 4271	(B,58,90)	RS1/10SR101J
R 4275	(A,38,117)	RS1/16SS471J
R 4278	(A,29,73)	RS1/10SR0R0J
R 4281	(B,27,70)	RS1/16SS0R0J
R 4284	(B,22,72)	RS1/16SS103J
R 4285	(A,27,41)	RS1/16SS101J
R 4286	(B,22,73)	RS1/16SS103J
R 4287	(B,62,145) (A)	RS1/16SS0R0J
R 4288	(B,63,145) (B)	RS1/16SS0R0J
R 4290	(B,66,145) (C)	RS1/16SS0R0J
R 4291	(A,9,88)	SMD Ferrite Beads CTF1802
R 4294	(B,45,73)	RS1/10SR102J
R 4296	(A,11,74)	RS1/16SS0R0J
R 4298	(B,31,119)	RS1/16SS0R0J
R 4299	(A,9,90)	SMD Ferrite Beads CTF1802
R 4304	(A,13,96)	SMD Ferrite Beads CTF1802
R 4305	(A,15,74)	RS1/16SS0R0J
R 4307	(B,21,68)	RS1/16SS0R0J
R 4308	(A,9,71)	RS1/16SS0R0J
R 4309	(B,21,66)	RS1/16SS0R0J
R 4310	(B,21,64)	RS1/16SS0R0J
R 4311	(A,9,63)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 4312	(A,9,65)	RS1/16SS0R0J
R 4313	(A,10,52)	RS1/16SS0R0J
R 4315	(A,9,53)	RS1/16SS0R0J
R 4316	(A,9,58)	RS1/16SS0R0J
R 4317	(A,13,95) SMD Ferrite Beads	CTF1802
R 4318	(A,14,46)	RS1/16SS0R0J
R 4319	(A,17,45)	RS1/16SS0R0J
R 4320	(A,11,79) SMD Ferrite Beads	CTF1802
R 4321	(A,10,79) SMD Ferrite Beads	CTF1802
R 4322	(A,9,83) SMD Ferrite Beads	CTF1802
R 4323	(A,9,84) SMD Ferrite Beads	CTF1802
R 4324	(A,11,84) SMD Ferrite Beads	CTF1802
R 4325	(A,9,86) SMD Ferrite Beads	CTF1802
R 4326	(A,12,86) SMD Ferrite Beads	CTF1802
R 4327	(A,12,85) SMD Ferrite Beads	CTF1802
R 4328	(A,13,87) SMD Ferrite Beads	CTF1802
R 4329	(A,9,79) SMD Ferrite Beads	CTF1802
R 4334	(A,12,74)	RS1/16SS0R0J
R 4335	(A,14,74)	RS1/16SS0R0J
R 4341	(B,59,36)	RS1/10SR0R0J
R 4342	(A,79,108)	RS1/10SR0R0J
R 4343	(A,59,108)	RS1/10SR0R0J
R 4344	(A,61,53)	RS1/10SR0R0J
R 4361	(A,23,137)	RS1/10SR0R0J
R 4363	(A,21,135)	RS1/16SS0R0J
R 4365	(A,16,129)	RS1/10SR0R0J
R 4380	(A,25,75)	RS1/10SR0R0J
R 4381	(B,21,89)	RS1/16SS0R0J
R 4383	(B,33,63)	RS1/16SS0R0J
R 4391	(A,24,46)	RS1/16SS0R0J
R 4392	(A,38,111)	RS1/16SS0R0J
R 4393	(A,14,44)	RS1/16SS0R0J
R 4395	(A,20,46)	RS1/16SS0R0J
R 4396	(A,41,142)	RS1/16SS0R0J
R 4397	(B,23,69)	RS1/16SS0R0J
R 4401	(B,80,105)	RAB4CQ220J
R 4402	(B,80,102)	RAB4CQ220J
R 4403	(B,80,99)	RAB4CQ220J
R 4404	(A,78,92)	RS1/16SS471J
R 4405	(B,80,96)	RAB4CQ220J
R 4406	(B,80,58)	RAB4CQ220J
R 4407	(B,80,60)	RAB4CQ220J
R 4408	(B,80,63)	RAB4CQ220J
R 4409	(B,80,66)	RAB4CQ220J
R 4410	(B,80,94)	RS1/16SS220J
R 4411	(B,80,93)	RS1/16SS220J
R 4412	(B,79,73)	RS1/16SS220J
R 4413	(B,79,72)	RS1/16SS220J
R 4414	(A,52,77)	RS1/16SS103J
R 4415	(A,64,70)	RS1/16SS471J
R 4419	(A,52,78)	RS1/16SS473J
R 4420	(B,64,92)	RS1/16SS471J
R 4424	(A,40,77)	RS1/16SS0R0J
R 4431	(B,78,70)	RS1/16SS471J
R 4432	(A,58,92)	RS1/16SS150J
R 4433	(A,58,92)	RS1/16SS150J
R 4434	(A,61,79)	RS1/16SS390J
R 4435	(B,63,83)	RS1/16SS390J
R 4436	(A,64,90)	RS1/16SS560J
R 4437	(A,64,92)	RS1/16SS560J

Circuit Symbol and No.		Part No.
R 4438	(A,63,79)	RS1/16SS560J
R 4439	(A,63,79)	RS1/16SS560J
R 4440	(A,62,98)	RAB4CQ330J
R 4441	(A,62,96)	RAB4CQ330J
R 4442	(A,58,97)	RAB4CQ330J
R 4443	(A,58,94)	RAB4CQ330J
R 4444	(A,59,79)	RAB4CQ330J
R 4446	(A,40,69)	RS1/16SS104J
R 4448	(A,31,66)	RS1/16SS104J
R 4449	(A,41,69)	RS1/16SS104J
R 4450	(B,79,69)	RS1/16SS1501D
R 4451	(B,79,70)	RS1/16SS1501D
R 4452	(B,63,94)	RS1/16SS1501D
R 4453	(B,62,94)	RS1/16SS1501D
R 4454	(A,64,67)	RS1/16SS1501D
R 4455	(A,63,67)	RS1/16SS1501D
R 4456	(A,79,94)	RS1/16SS1501D
R 4457	(A,79,95)	RS1/16SS1501D
R 4501	(B,48,106)	RS1/16SS470J
R 4502	(B,49,106)	RS1/16SS472J
R 4503	(B,43,111)	RAB4CQ563J
R 4504	(B,40,111)	RAB4CQ563J
R 4505	(B,45,112)	RS1/16SS0R0J
R 4506	(A,45,126)	RS1/10SR0R0J
R 4507	(A,47,127)	RS1/10SR0R0J
R 4603	(A,52,123)	RS1/16SS0R0J
R 4604	(A,52,135)	RS1/16SS220J
R 4605	(A,52,131)	RS1/16SS220J
R 4606	(A,52,128)	RS1/16SS220J
R 4607	(A,52,119)	RS1/16SS220J
R 4608	(A,52,116)	RS1/16SS220J
R 4609	(A,54,113)	RS1/16SS152J
R 4610	(A,55,111)	RS1/16SS0R0J
R 4612	(A,49,142)	RS1/16SS104J
R 4613	(A,55,115)	RS1/16SS104J
R 4614	(A,47,142)	RS1/16SS102J
R 4615	(A,56,115)	RS1/16SS0R0J
R 4617	(B,47,51)	RS1/16SS103J
R 4618	(B,62,59)	RS1/16SS104J
R 4619	(B,61,57)	RS1/16SS104J
R 4620	(B,62,60)	RS1/16SS104J
R 4622	(B,60,61)	RS1/16SS101J
R 4623	(B,60,60)	RS1/16SS0R0J
R 4624	(B,60,59)	RS1/16SS101J
R 4625	(B,60,58)	RS1/16SS101J
R 4628	(B,58,52)	RS1/16SS0R0J
R 4631	(B,54,71)	RS1/16SS151J
R 4633	(B,59,52)	RS1/16SS0R0J
R 4634	(B,56,51)	RS1/16SS0R0J
R 4635	(B,60,54)	RS1/16SS0R0J
R 4636	(B,46,51)	RS1/16SS0R0J
R 4637	(B,48,71)	RS1/16SS0R0J
R 4638	(B,46,51)	RS1/16SS0R0J
R 4639	(B,45,51)	RS1/16SS0R0J
R 4640	(A,63,36)	RS1/16SS473J
R 4641	(A,63,33)	RS1/16SS473J
R 4642	(A,63,34)	RS1/16SS473J
R 4643	(A,63,35)	RS1/16SS473J
R 4647	(B,50,51)	RS1/16SS103J
R 4648	(B,51,51)	RS1/16SS103J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 4649	(B,54,51)	RS1/16SS103J	R 4906	(A,24,111)	RS1/16SS151J
R 4652	(A,16,98)	RS1/16SS0R0J	R 4907	(A,24,107)	RS1/16SS151J
R 4661	(B,26,86)	RS1/16SS0R0J	R 4908	(A,25,109)	RS1/16SS151J
R 4667	(B,38,81)	RS1/16SS101J	R 4909	(A,24,109)	RS1/16SS151J
R 4668	(B,21,76)	RS1/10SR0R0J	R 4910	(A,23,109)	RS1/16SS151J
R 4669	(B,27,76)	RS1/16SS0R0J	R 4911	(A,23,107)	RS1/16SS151J
R 4670	(B,27,77)	RS1/16SS0R0J	R 4912	(A,22,109)	RS1/16SS151J
R 4671	(B,29,75)	RS1/16SS0R0J	R 4913	(A,22,111)	RS1/16SS151J
R 4677	(B,29,76)	RS1/16SS0R0J	R 4914	(A,23,111)	RS1/16SS151J
R 4678	(B,38,80)	RS1/16SS0R0J	R 4915	(A,21,109)	RS1/16SS151J
R 4679	(B,36,77)	RS1/16SS330J	R 4916	(A,21,111)	RS1/16SS151J
R 4680	(B,36,76)	RS1/16SS330J	R 4917	(A,21,107)	RS1/16SS151J
R 4681	(B,36,76)	RS1/16SS0R0J	R 4918	(A,20,109)	RS1/16SS151J
R 4682	(B,34,76)	RS1/16SS0R0J	R 4919	(A,20,107)	RS1/16SS151J
R 4683	(B,26,88)	RS1/16SS1000D	R 4920	(A,20,111)	RS1/16SS151J
R 4684	(B,26,87)	RS1/16SS1000D	R 4921	(B,32,110)	RS1/16SS152J
R 4685	(B,32,72)	RS1/16SS0R0J	R 4922	(A,36,119)	RS1/16SS0R0J
R 4686	(B,33,72)	RS1/16SS0R0J	R 4923	(A,36,118)	RS1/16SS0R0J
R 4687	(B,35,72)	RS1/16SS0R0J	R 4924	(A,21,81)	RS1/16SS561J
R 4688	(B,36,72)	RS1/16SS0R0J	R 4925	(A,36,120)	RS1/16SS0R0J
R 4702	(B,23,59)	RS1/16SS0R0J	R 4926	(A,28,111)	RS1/16SS274J
R 4703	(B,26,48)	RS1/16SS0R0J	R 4928	(A,16,112)	RS1/16SS0R0J
R 4704	(B,25,48)	RS1/16SS0R0J	R 4929	(A,16,113)	RS1/16SS0R0J
R 4707	(B,26,56)	RS1/16SS473J	R 4930	(A,15,114)	RS1/16SS0R0J
R 4708	(B,23,48)	RS1/16SS104J	R 4932	(A,17,106)	RS1/16SS223J
R 4709	(B,22,55)	RS1/16SS103J	R 4933	(B,22,114)	RS1/16SS104J
R 4710	(B,22,58)	RS1/16SS223J	R 4937	(A,18,77)	RS1/10SR0R0J
R 4771	(A,52,136)	RS1/16SS103J	R 4951	(B,33,112)	RS1/16SS821J
R 4772	(A,52,132)	RS1/16SS103J	R 4955	(A,34,115)	RS1/16SS0R0J
R 4773	(A,52,129)	RS1/16SS103J	R 4956	(A,35,115)	RS1/16SS0R0J
R 4774	(A,52,122)	RS1/16SS103J	R 4957	(B,27,115)	RS1/16SS0R0J
R 4775	(A,52,118)	RS1/16SS103J	R 4958	(A,34,114)	RS1/16SS0R0J
R 4776	(A,52,115)	RS1/16SS103J	R 4960	(A,32,111)	RS1/16SS152J
R 4777	(A,54,111)	RS1/16SS330J	R 4961	(A,30,110)	RS1/16SS1001D
R 4778	(A,56,112)	RS1/16SS330J	R 4962	(A,31,109)	RS1/16SS1201F
R 4781	(A,42,144)	RS1/16SS221J	R 4963	(B,31,112)	RS1/10SR0R0J
R 4801	(A,32,83)	RS1/16SS470J	R 4966	(A,22,84)	RS1/16SS222J
R 4802	(A,32,84)	RS1/16SS470J	R 4994	(A,32,85)	RS1/16SS470J
R 4803	(A,28,76)	RS1/16SS470J	R 5453	(A,35,39)	RS1/16SS153J
R 4804	(A,28,77)	RS1/16SS470J	R 5454	(A,41,39)	RS1/16SS153J
R 4805	(A,29,76)	RS1/16SS470J	R 5455	(A,37,39)	RS1/10SR473J
R 4806	(A,27,77)	RS1/16SS470J	R 5456	(A,39,39)	RS1/10SR473J
R 4807	(A,32,78)	RS1/16SS470J	R 5457	(A,35,42)	RS1/10SR103J
R 4808	(A,32,79)	RS1/16SS470J	R 5458	(A,43,42)	RS1/10SR103J
R 4809	(A,33,80)	RS1/16SS470J	R 5600	(B,47,139)	RS1/16SS470J
R 4810	(A,32,81)	RS1/16SS470J	R 5601	(B,46,139)	RS1/16SS271J
R 4811	(A,32,82)	RS1/16SS470J	R 5602	(B,46,137)	RS1/16SS271J
R 4812	(A,24,84)	RS1/16SS6801D	R 5603	(B,45,139)	RS1/16SS271J
R 4813	(A,29,86)	RS1/16SS0R0J	R 5604	(B,45,137)	RS1/16SS271J
R 4814	(A,26,77)	RS1/16SS0R0J	R 5605	(B,44,139)	RS1/16SS271J
R 4815	(A,33,81)	RS1/16SS470J	R 5606	(B,43,137)	RS1/16SS271J
R 4816	(A,23,80)	RS1/16SS103J	R 5607	(B,43,139)	RS1/16SS271J
R 4817	(A,25,87)	RS1/16SS470J	R 5608	(B,42,137)	RS1/16SS271J
R 4818	(A,26,88)	RS1/16SS300J	R 5609	(B,42,139)	RS1/16SS271J
R 4819	(A,25,77)	RS1/16SS0R0J	R 5610	(B,41,137)	RS1/16SS271J
R 4821	(A,23,78)	RS1/16SS0R0J	R 5611	(B,41,139)	RS1/16SS271J
R 4901	(A,19,110)	RS1/16SS151J	R 5612	(B,40,137)	RS1/16SS271J
R 4902	(A,18,110)	RS1/16SS151J	R 5613	(B,39,139)	RS1/16SS271J
R 4904	(A,25,107)	RS1/16SS151J	R 5614	(B,39,137)	RS1/16SS271J
R 4905	(A,25,111)	RS1/16SS151J	R 5615	(B,38,139)	RS1/16SS271J

Circuit Symbol and No.		Part No.
R 5616	(B,38,137)	RS1/16SS271J
R 5617	(B,37,139)	RS1/16SS271J
R 5618	(B,37,137)	RS1/16SS271J
R 5619	(A,34,141)	RS1/16SS0R0J
R 5620	(B,35,139)	RS1/16SS271J
R 5621	(B,35,137)	RS1/16SS271J
R 5622	(B,34,138)	RS1/16SS271J
R 5623	(B,33,139)	RS1/16SS271J
R 5624	(A,33,142)	RS1/16SS0R0J
R 5625	(A,34,142)	RS1/16SS0R0J
R 5626	(A,34,123)	RS1/16SS0R0J
R 5627	(A,34,125)	RS1/16SS0R0J
R 5629	(B,33,137)	RS1/16SS271J
R 5738	(A,32,128) Chip Beads	VTL1133
R 5778	(A,35,23) (A,B)	RS1/10SR333J
R 5779	(A,33,26) (A,B)	RS1/10SR683J
R 5780	(A,35,27) (A,B)	RS1/10SR154J
R 5781	(A,35,30) (A,B)	RS1/10SR0R0J
R 5783	(A,38,25)	RS1/10SR393J
R 5784	(A,41,20)	RS1/10SR393J
R 5790	(A,29,13) (A,B)	RS1/10SR683J
R 5792	(A,28,16) (A,B)	RS1/10SR153J
R 5794	(A,33,15) (A,B)	RS1/10SR683J
R 5799	(A,36,16) (A,B)	RS1/10SR473J
R 5800	(A,36,17) (A,B)	RS1/10SR101J
R 5801	(A,33,13) (A,B)	RS1/10SR153J
R 5819	(A,28,97)	RS1/16SS0R0J
R 5820	(A,29,99)	RS1/16SS0R0J
R 5821	(A,28,101)	RS1/16SS0R0J
R 5822	(A,28,99)	RS1/16SS0R0J
R 5823	(A,27,97)	RS1/16SS0R0J
R 5830	(A,29,101)	RS1/16SS0R0J
R 5831	(A,27,101)	RS1/16SS0R0J
R 5832	(A,26,95)	RS1/16SS0R0J
R 5833	(A,26,97)	RS1/16SS0R0J
R 5834	(A,25,95)	RS1/16SS0R0J
R 5835	(A,24,95)	RS1/16SS0R0J
R 5862	(B,11,21)	RS1/16SS0R0J
R 5870	(A,27,26) (A,B)	RS1/16SS103J
R 5871	(A,26,26) (A,B)	RS1/16SS103J
R 5872	(A,27,28) (A,B)	RS1/16SS103J
R 5873	(A,29,27) (A,B)	RS1/16SS103J

CAPACITORS

C 3200	(A,76,121)	CKSRYB105K16
C 3201	(B,10,38)	CKSSYB104K10
C 3202	(B,11,39)	CKSSYB104K10
C 3203	(A,66,130)	CKSRYB224K16
C 3204	(A,73,120)	CKSRYB105K16
C 3205	(A,75,118)	CKSYB105K35
C 3206	(A,78,128)	CCSSCH151J50
C 3207	(A,65,126) 10 uF	CCG1236
C 3209	(A,67,133)	CKSSYB561K50
C 3210	(A,65,125)	CKSRYB103K50
C 3211	(A,63,114)	CKSRYB104K50
C 3212	(A,61,114) 10 uF	CCG1236
C 3309	(A,51,24)	CKSRYB104K16
C 3310	(A,56,26)	CCSSCH101J50
C 3312	(A,62,27)	CCSRCH102J50
C 3313	(A,66,28)	CCSRCH102J50
C 3314	(A,62,29)	CCSRCH102J50
C 3315	(A,60,32)	CCSRCH102J50
C 3360	(A,24,34)	CKSSYB222K50
C 3361	(A,24,37)	CKSSYB222K50
C 3362	(A,18,34)	CKSQYB106K6R3
C 3363	(A,18,36)	CKSQYB106K6R3
C 3364	(A,16,31)	CKSQYB106K6R3
C 3365	(A,17,31)	CKSSYB102K50
C 3366	(A,13,30)	CKSQYB106K6R3
C 3367	(A,14,29)	CKSSYB102K50
C 3368	(B,15,23)	CKSQYB106K6R3
C 3369	(B,13,23)	CKSQYB106K6R3
C 3370	(A,19,25)	CKSSYB104K10
C 3371	(A,18,26)	CKSSYB104K10
C 3372	(B,21,29)	CKSSYB104K10
C 3373	(B,16,29)	CKSSYB104K10
C 3375	(B,14,26)	CKSSYB105K6R3
C 4001	(A,38,99)	CCSSCH101J50
C 4002	(B,54,98)	CKSQYB106K6R3
C 4003	(B,53,87)	CKSSYB102K50
C 4004	(B,53,88)	CKSRYB104K16
C 4005	(B,56,97)	CKSSYB104K10
C 4007	(B,51,84)	CKSSYB104K10
C 4008	(B,54,91)	CKSSYB104K10
C 4009	(B,48,84)	CKSSYB104K10
C 4010	(B,54,93)	CKSSYB102K50
C 4011	(B,54,94)	CKSSYB102K50
C 4012	(B,54,94)	CKSSYB102K50
C 4013	(B,54,95)	CKSSYB102K50
C 4014	(B,54,96)	CKSSYB102K50
C 4015	(B,54,97)	CKSSYB102K50
C 4016	(B,51,92)	CKSSYB102K50
C 4017	(B,51,93)	CKSSYB102K50
C 4018	(B,51,94)	CKSSYB104K10
C 4019	(B,51,94)	CKSSYB102K50
C 4020	(B,51,95)	CKSSYB102K50
C 4021	(B,51,96)	CKSSYB104K10
C 4022	(B,51,98)	CKSSYB104K10
C 4023	(B,50,93)	CKSSYB104K10
C 4026	(B,50,96)	CKSSYB104K10
C 4027	(B,51,97)	CKSSYB104K10
C 4028	(B,51,98)	CKSSYB104K10
C 4029	(B,56,82)	CKSSYB103K16
C 4030	(B,55,82)	CKSSYB103K16
C 4031	(B,49,90)	CKSSYB102K50
C 4032	(B,50,98)	CKSSYB104K10
C 4033	(B,49,99)	CKSSYB104K10
C 4034	(B,49,91)	CKSSYB104K10
C 4035	(B,49,90)	CKSSYB102K50
C 4036	(B,49,98)	CKSSYB104K10
C 4037	(B,49,91)	CKSSYB104K10
C 4038	(B,48,93)	CKSSYB104K10
C 4039	(B,48,98)	CKSSYB104K10
C 4040	(B,56,82)	CKSSYB103K16
C 4041	(B,48,93)	CKSSYB104K10
C 4042	(B,48,100)	CKSSYB104K10
C 4043	(B,47,93)	CKSSYB104K10
C 4044	(B,48,98)	CKSSYB104K10
C 4045	(B,47,91)	CKSSYB104K10

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 4046	(B,47,98)	CKSSYB104K10	C 4213	(B,64,38)	CKSSYB104K10
C 4047	(B,46,91)	CKSSYB104K10	C 4214	(B,37,45)	CKSSYB104K10
C 4048	(B,46,98)	CKSSYB104K10	C 4215	(A,17,59)	CKSSYB104K10
C 4049	(B,45,91)	CKSSYB104K10	C 4216	(B,68,44)	CCSSCH101J50
C 4050	(B,45,98)	CKSSYB104K10	C 4217	(B,35,42)	CCSSCH101J50
C 4051	(B,45,91)	CKSSYB104K10	C 4218	(B,69,45)	CCSSCH102J50
C 4052	(B,47,100)	CKSSYB104K10	C 4219	(B,35,40)	CKSSYB472K50
C 4053	(B,45,90)	CKSSYB104K10	C 4222	(B,70,42)	CCSSCH470J50
C 4054	(B,43,92)	CKSSYB104K10	C 4223	(B,35,43)	CCSSCH470J50
C 4055	(B,46,93)	CKSSYB104K10	C 4224	(A,22,60)	CKSSYB392K50
C 4056	(B,45,93)	CKSSYB104K10	C 4227	(B,62,38) 10 uF	DCH1201
C 4057	(B,43,94)	CKSSYB104K10	C 4228	(B,43,46) 10 uF	DCH1201
C 4059	(B,43,95)	CKSSYB104K10	C 4229	(A,18,62)	CKSSYB104K10
C 4060	(B,45,96)	CKSSYB104K10	C 4230	(B,61,46) 10 uF	DCH1201
C 4061	(B,44,97)	CKSSYB104K10	C 4231	(B,45,39) 10 uF	DCH1201
C 4062	(B,44,98)	CKSSYB104K10	C 4232	(B,61,49) 47 uF	CCG1233
C 4063	(B,43,91)	CKSSYB104K10	C 4233	(B,40,38) 47 uF	CCG1233
C 4064	(B,43,93)	CKSSYB104K10	C 4236	(B,54,38) 10 uF	CCG1234
C 4065	(B,43,95)	CKSSYB104K10	C 4237	(B,44,48) 10 uF	CCG1234
C 4066	(B,42,94)	CKSSYB104K10	C 4238	(B,53,38) 10 uF	CCG1234
C 4069	(B,40,96)	CKSSYB104K10	C 4239	(B,46,48) 10 uF	CCG1234
C 4070	(B,40,94)	CKSSYB104K10	C 4240	(A,23,64)	CKSSYB392K50
C 4071	(B,50,88)	CKSQYB106K6R3	C 4241	(B,57,38) 100 uF	CCG1232
C 4072	(B,51,101)	CKSQYB106K6R3	C 4242	(B,48,47) 100 uF	CCG1232
C 4073	(B,41,93)	CKSSYB104K10	C 4243	(A,19,57)	CKSSYB102K50
C 4074	(B,45,89)	CKSRYB105K10	C 4244	(B,61,68)	CKSSYB104K10
C 4075	(B,44,87)	CKSSYB104K10	C 4245	(B,54,73)	CKSRYB474K16
C 4076	(B,42,99)	CKSSYB104K10	C 4246	(A,20,45)	CKSSYB104K10
C 4077	(B,43,101)	CKSSYB104K10	C 4247	(A,24,44)	CKSSYB104K10
C 4078	(B,52,103)	CKSSYB104K10	C 4248	(B,23,129)	CKSRYB105K10
C 4079	(B,40,95)	CKSSYB104K10	C 4249	(A,18,102)	CKSRYB105K10
C 4080	(B,42,96)	CKSSYB104K10	C 4251	(A,22,101)	CKSRYB105K10
C 4081	(B,43,99)	CKSSYB104K10	C 4252	(B,20,128)	CKSRYB105K10
C 4082	(B,43,103)	CKSSYB104K10	C 4255	(A,47,138)	CKSSYB104K10
C 4083	(B,41,90)	CKSRYB105K10	C 4256	(B,51,82)	CKSSYB104K10
C 4084	(B,40,92)	CKSRYB105K10	C 4257	(A,20,70)	CKSRYB105K10
C 4086	(B,37,94)	CKSQYB106K6R3	C 4259	(A,19,74)	CKSRYB105K10
C 4087	(B,42,97)	CKSRYB105K10	C 4260	(B,60,103)	CKSSYB104K10
C 4088	(B,37,91)	CKSSYB104K10	C 4261	(B,39,52)	CKSSYB103K16
C 4089	(B,45,101)	CKSRYB105K10	C 4265	(B,58,95)	CKSSYB104K10
C 4090	(B,44,103)	CKSRYB105K10	C 4266	(B,50,47) 100 uF	CCG1232
C 4091	(B,45,103)	CKSRYB105K10	C 4267	(A,55,39) 100 uF	CCG1232
C 4092	(A,34,89)	CCSSCH120J50	C 4269	(A,22,53)	CKSSYB103K16
C 4093	(A,35,100)	CCSSCH220J50	C 4270	(B,64,49)	CKSSYB103K16
C 4094	(A,34,96)	CCSSCH220J50	C 4271	(A,45,129)	CKSSYB104K10
C 4095	(A,34,94)	CCSSCH120J50	C 4272	(A,36,133)	CKSSYB104K10
C 4096	(B,55,91)	CKSRYB105K10	C 4273	(A,38,112)	CKSSYB104K10
C 4097	(B,51,83)	CKSRYB105K10	C 4278	(A,39,117)	CKSSYB104K10
C 4098	(B,57,82)	CKSSYB103K16	C 4361	(A,32,137)	CKSQYB106K6R3
C 4103	(B,47,88) 47 uF	CCG1251	C 4362	(A,28,135)	CKSSYB104K10
C 4104	(B,49,101)	CKSSYB104K10	C 4363	(A,28,139)	CKSSYB104K10
C 4201	(A,12,53)	CKSSYB104K10	C 4364	(A,25,137)	CKSQYB105K16
C 4202	(A,12,59)	CKSSYB104K10	C 4365	(B,12,128)	CEVW101M16
C 4204	(A,20,65)	CKSSYB104K10	C 4380	(B,26,67)	CKSRYB104K16
C 4205	(A,15,53) 10 uF	DCH1201	C 4401	(A,63,105)	CKSSYB103K16
C 4206	(A,15,58) 10 uF	DCH1201	C 4402	(A,63,104)	CKSSYB103K16
C 4208	(A,23,66) 10 uF	DCH1201	C 4403	(A,64,101)	CKSSYB103K16
C 4209	(A,15,55) 10 uF	DCH1201	C 4404	(A,64,97)	CKSSYB103K16
C 4210	(A,15,56) 10 uF	DCH1201	C 4405	(A,64,94)	CKSSYB103K16
C 4212	(A,25,66) 10 uF	DCH1201	C 4406	(A,64,85)	CKSSYB103K16

Circuit Symbol and No.		Part No.
C 4407	(A,79,82)	CKSQYB106K6R3
C 4408	(B,71,55)	CKSRYB105K10
C 4409	(A,78,102)	CKSSYB103K16
C 4410	(A,78,97)	CKSSYB103K16
C 4411	(A,74,81)	CKSSYB104K10
C 4412	(A,78,94)	CKSSYB103K16
C 4413	(B,64,107)	CKSRYB105K10
C 4414	(A,79,57)	CKSSYB103K16
C 4415	(A,79,58)	CKSSYB103K16
C 4416	(A,79,62)	CKSSYB103K16
C 4417	(A,78,65)	CKSSYB103K16
C 4418	(A,78,69)	CKSSYB103K16
C 4419	(A,78,78)	CKSSYB103K16
C 4420	(A,76,54)	CKSQYB106K6R3
C 4421	(A,72,55)	CKSRYB105K10
C 4422	(A,64,61)	CKSSYB103K16
C 4423	(A,64,65)	CKSSYB103K16
C 4424	(A,71,54)	CKSSYB104K10
C 4425	(A,64,69)	CKSSYB103K16
C 4426	(A,75,82)	CKSRYB105K10
C 4427	(B,78,106)	CKSSYB103K16
C 4428	(B,78,103)	CKSSYB103K16
C 4429	(B,78,100)	CKSSYB103K16
C 4430	(B,78,97)	CKSSYB103K16
C 4431	(B,78,94)	CKSSYB103K16
C 4432	(B,78,85)	CKSSYB103K16
C 4433	(B,69,107)	CKSQYB106K6R3
C 4435	(B,64,102)	CKSSYB103K16
C 4436	(B,64,98)	CKSSYB103K16
C 4437	(A,51,76)	CKSSYB104K10
C 4438	(B,63,105)	CKSSYB104K10
C 4439	(B,64,94)	CKSSYB103K16
C 4441	(A,52,76)	CKSRYB105K10
C 4442	(B,64,56)	CKSSYB103K16
C 4443	(B,64,58)	CKSSYB103K16
C 4444	(B,64,62)	CKSSYB103K16
C 4445	(B,64,66)	CKSSYB103K16
C 4446	(B,64,69)	CKSSYB103K16
C 4447	(B,65,79)	CKSSYB103K16
C 4448	(B,67,54)	CKSQYB106K6R3
C 4450	(B,78,60)	CKSSYB103K16
C 4451	(B,78,65)	CKSSYB103K16
C 4452	(B,72,54)	CKSSYB104K10
C 4453	(B,78,69)	CKSSYB103K16
C 4455	(A,28,65)	CKSSYB104K10
C 4456	(A,27,70)	CKSSYB104K10
C 4457	(A,30,70)	CKSQYB106K6R3
C 4458	(A,32,70)	CKSSYB104K10
C 4459	(A,40,70)	CKSSYB104K10
C 4511	(A,43,124)	CKSSYB105K6R3
C 4512	(A,46,122)	CKSRYB105K10
C 4513	(A,41,124)	CKSSYB104K10
C 4514	(A,42,123)	CKSSYB104K10
C 4515	(A,40,124)	CKSSYB104K10
C 4516	(A,42,121)	CKSSYB104K10
C 4517	(A,41,119)	CKSSYB104K10
C 4518	(A,44,121)	CKSSYB104K10
C 4519	(A,43,121)	CKSSYB104K10
C 4520	(A,39,122)	CKSSYB104K10
C 4521	(A,40,121)	CKSSYB104K10

Circuit Symbol and No.			Part No.
C 4522	(A,39,124)		CKSRYB105K10
C 4607	(A,55,113)		CKSSYB104K10
C 4608	(A,57,111)		CKSSYB104K10
C 4609	(A,50,126)		CKSRYB104K50
C 4613	(B,41,59)		CKSSYB473K16
C 4614	(A,43,142)		CKSSYB104K10
C 4621	(B,60,57)		CKSSYB473K16
C 4622	(B,58,53)		CKSSYB473K16
C 4623	(B,49,51)		CKSSYB473K16
C 4624	(B,41,54)		CKSSYB473K16
C 4625	(B,49,70)		CKSSYB473K16
C 4626	(B,56,70)		CKSSYB473K16
C 4651	(B,44,82)		CKSSYB104K10
C 4653	(B,31,87)	4.7 uF	CCG1201
C 4661	(B,32,76)	4.7 uF	CCG1201
C 4662	(B,36,79)	4.7 uF	CCG1201
C 4665	(B,37,82)	4.7 uF	CCG1201
C 4666	(B,24,78)	4.7 uF	CCG1201
C 4667	(B,28,87)	4.7 uF	CCG1201
C 4668	(B,29,74)		CKSRYB105K10
C 4670	(B,25,83)	4.7 uF	CCG1201
C 4671	(B,24,80)	4.7 uF	CCG1201
C 4701	(B,27,56)		CKSSYB104K10
C 4781	(B,37,78)	10 uF	CCG1234
C 4784	(B,60,69)		CKSRYB105K10
C 4785	(A,50,134)		CKSRYB105K10
C 4786	(B,40,64)		CKSRYB105K10
C 4803	(B,29,123)		CKSSYB103K16
C 4804	(B,26,123)		CKSSYB103K16
C 4805	(B,25,123)		CKSSYB103K16
C 4806	(B,23,123)		CKSSYB103K16
C 4807	(B,23,126)		CKSSYB103K16
C 4808	(B,21,123)		CKSSYB103K16
C 4809	(B,29,123)		CKSSYB103K16
C 4810	(B,27,121)		CKSSYB103K16
C 4811	(B,29,122)		CKSSYB103K16
C 4812	(B,28,123)		CKSSYB103K16
C 4813	(B,28,121)		CKSSYB103K16
C 4814	(B,27,121)		CKSSYB103K16
C 4815	(B,29,121)		CKSSYB103K16
C 4816	(B,27,119)		CKSSYB103K16
C 4817	(B,27,119)		CKSSYB103K16
C 4818	(B,28,119)		CKSSYB103K16
C 4819	(B,29,119)		CKSSYB103K16
C 4820	(B,30,121)		CKSSYB103K16
C 4821	(B,29,119)		CKSSYB103K16
C 4822	(B,30,118)		CKSSYB104K10
C 4823	(B,29,115)		CKSSYB104K10
C 4824	(B,28,117)		CKSSYB104K10
C 4825	(B,29,117)		CKSSYB104K10
C 4826	(B,28,115)		CKSSYB104K10
C 4827	(B,27,117)		CKSSYB104K10
C 4828	(B,28,114)		CKSSYB104K10
C 4829	(A,34,122)		CKSSYB104K10
C 4830	(A,36,121)		CKSSYB104K10
C 4831	(A,34,121)		CKSSYB104K10
C 4832	(A,34,120)		CKSSYB104K10
C 4833	(A,34,118)		CKSSYB104K10
C 4834	(A,34,119)		CKSSYB104K10
C 4835	(A,34,116)		CKSSYB104K10

Circuit Symbol and No.		Part No.
C 4836	(A,34,117)	CKSSYB104K10
C 4837	(B,28,113)	CKSSYB103K16
C 4838	(B,26,123)	CKSSYB103K16
C 4839	(B,26,122)	CKSSYB103K16
C 4840	(B,25,123)	CKSSYB103K16
C 4841	(B,25,122)	CKSSYB103K16
C 4842	(B,23,122)	CKSSYB103K16
C 4843	(B,23,122)	CKSSYB103K16
C 4844	(B,22,122)	CKSSYB103K16
C 4845	(B,21,122)	CKSSYB103K16
C 4846	(B,22,120)	CKSSYB103K16
C 4847	(B,23,120)	CKSSYB103K16
C 4848	(B,21,120)	CKSSYB103K16
C 4849	(B,20,120)	CKSSYB103K16
C 4850	(B,20,119)	CKSSYB103K16
C 4851	(B,20,118)	CKSSYB103K16
C 4852	(B,21,118)	CKSSYB103K16
C 4853	(B,21,119)	CKSSYB103K16
C 4854	(B,22,119)	CKSSYB103K16
C 4855	(B,23,119)	CKSSYB103K16
C 4856	(B,20,116)	CKSSYB103K16
C 4857	(B,21,114)	CKSSYB103K16
C 4858	(B,21,116)	CKSSYB103K16
C 4859	(B,22,116)	CKSSYB103K16
C 4860	(B,22,114)	CKSSYB103K16
C 4861	(B,23,116)	CKSSYB103K16
C 4862	(B,23,117)	CKSSYB103K16
C 4863	(B,23,116)	CKSSYB103K16
C 4864	(B,24,117)	CKSSYB103K16
C 4865	(B,24,116)	CKSSYB103K16
C 4866	(B,25,117)	CKSSYB103K16
C 4867	(B,26,118)	CKSSYB103K16
C 4868	(B,25,119)	CKSSYB103K16
C 4869	(B,25,115)	CKSSYB103K16
C 4870	(B,23,114)	CKSSYB103K16
C 4871	(B,24,114)	CKSSYB103K16
C 4872	(B,25,114)	CKSSYB103K16
C 4901	(B,29,124)	CKSSYB103K16
C 4902	(B,26,124)	CKSSYB103K16
C 4903	(B,25,124)	CKSSYB103K16
C 4904	(B,23,124)	CKSSYB103K16
C 4905	(B,22,126)	CKSSYB103K16
C 4906	(B,21,124)	CKSSYB103K16
C 4912	(A,35,117)	CKSSYB104K10
C 4913	(B,30,115)	CKSSYB104K10
C 4914	(B,30,115)	CKSSYB104K10
C 4915	(B,30,113)	CKSSYB104K10
C 4916	(B,30,116)	CKSSYB104K10
C 4917	(B,30,117)	CKSSYB104K10
C 4918	(B,32,113)	CKSSYB474K6R3
C 4920	(A,17,115)	CCSSCH101J50
C 4921	(A,34,77)	CKSQYB106K6R3
C 4922	(A,16,83)	CKSQYB106K6R3
C 4924	(A,18,82)	CKSQYB106K6R3
C 4925	(A,22,82)	CKSSYB333K16
C 4926	(A,24,81)	CKSSYB104K10
C 4928	(A,24,83)	CKSSYB104K10
C 4929	(A,24,82)	CKSSYB104K10
C 4931	(A,24,85)	CKSSYB104K10
C 4932	(A,29,87)	CCSSCH7R0D50

Circuit Symbol and No.		Part No.
C 4933	(A,26,86)	CKSSYB333K16
C 4938	(A,30,85)	CKSSYB104K10
C 4939	(A,28,87)	CCSSCH7R0D50
C 4943	(A,20,78)	CKSQYB106K6R3
C 4944	(A,22,78)	CKSQYB106K6R3
C 4963	(B,29,108)	CKSQYB106K6R3
C 4964	(B,30,110)	CKSSYB103K16
C 4982	(B,30,128) 47 uF	CCG1251
C 4983	(B,29,125)	CKSSYB103K16
C 4985	(B,27,112)	CKSSYB103K16
C 4986	(B,25,111)	CKSQYB106K6R3
C 4987	(B,19,120)	CKSQYB106K6R3
C 4988	(A,31,111)	CKSSYB103K16
C 4989	(A,34,111)	CCSSCH4R0C50
C 4990	(A,30,108)	CCSSCH100D50
C 4991	(A,26,109)	CCSSCH100D50
C 4993	(B,29,126)	CKSRYB105K10
C 5129	(A,11,46)	CKSRYB103K50
C 5130	(A,13,38)	CKSRYB104K16
C 5451	(A,34,35) 4.7 uF	CCG1201
C 5452	(A,40,35) 4.7 uF	CCG1201
C 5453	(A,33,44)	CCSRCH391J50
C 5454	(A,44,43)	CCSRCH391J50
C 5455	(A,40,42)	CCSRCH221J50
C 5456	(A,37,42)	CCSRCH221J50
C 5460	(A,42,47)	CKSRYB104K16
C 5471	(A,34,47) 4.7 uF	CCG1201
C 5472	(A,44,46) 4.7 uF	CCG1201
C 5642	(B,29,133) 10 uF	DCH1201
C 5643	(B,29,135) 10 uF	DCH1201
C 5644	(B,29,137) 10 uF	DCH1201
C 5666	(A,35,25) (A,B)	CCSRCH471J50
C 5667	(A,33,28) (A,B)	CCSRCH680J50
C 5668	(A,31,27)	CKSRYB104K16
C 5672	(A,41,22)	CKSRYB105K10
C 5673	(A,33,17) (A,B)	CCSRCH471J50
C 5674	(A,35,14) (A,B)	CCSRCH821J50
C 5678	(A,27,14) (A,B)	CKSRYB473K50
C 5679	(A,29,16) (A,B)	CKSRYB473K50
C 5684	(A,36,31) (A,B)	CKSRYB105K10
C 5685	(A,35,20) (A,B)	CKSRYB105K10
C 5686	(A,32,12) (A,B)	CKSRYB104K16
C 5697	(A,30,77)	CKSSYB104K10
C 5698	(A,39,28)	CKSRYB104K16
C 5699	(A,28,26) (A,B)	CCSSCH221J50
C 5700	(A,26,24) 10 uF(A,B)	DCH1201
C 5701	(A,24,24) 10 uF(A,B)	DCH1201
C 5702	(A,29,26) (A,B)	CCSSCH221J50

G

Unit Number : CWN6418
Unit Name : LCD-IF Unit

MISCELLANEOUS

IC 5101	(A,70,23)	IC	R1290K103A
IC 5102	(A,57,24)	IC	BA4558RFVM
Q 5101	(A,71,35)	Transistor	2SA1577
D 5101	(A,78,22)	Diode	RB548W
D 5102	(A,74,32)	Diode	RB548W

Circuit Symbol and No.		Part No.
D 5103	(A,76,32) Diode	RB548W
D 5104	(A,59,12) Diode	RB160M-30
D 5105	(A,62,30) Diode	RB160M-30
L 5101	(A,43,35) Inductor	CTF1635
L 5102	(A,19,35) Chip Inductor	DTL1096
L 5103	(A,48,41) Chip Inductor	DTL1096
L 5104	(A,20,39) Chip Ferrite Bead	BTX1042
L 5105	(A,68,30) Choke Coil 22 uH	CTH1426
L 5106	(A,56,35) Inductor	LCTAW101J2520
CN5101	(A,8,25) Connector	CKS5698
CN5102	(A,10,8) Connector	CKS5561
CN5103	(A,125,19) Connector	CKS5561
CN5104	(A,32,25) Connector	CKS5722

RESISTORS

R 5101	(A,41,30)	RS1/16SS0R0J
R 5102	(A,41,33)	RS1/16SS0R0J
R 5103	(A,40,30)	RS1/16SS0R0J
R 5104	(A,39,33)	RS1/16SS0R0J
R 5105	(A,38,30)	RS1/16SS0R0J
R 5106	(A,38,33)	RS1/16SS0R0J
R 5107	(A,37,30)	RS1/16SS0R0J
R 5108	(A,36,33)	RS1/16SS0R0J
R 5109	(A,36,30)	RS1/16SS0R0J
R 5110	(A,35,33)	RS1/16SS0R0J
R 5111	(A,34,30)	RS1/16SS0R0J
R 5112	(A,34,33)	RS1/16SS0R0J
R 5113	(A,33,30)	RS1/16SS0R0J
R 5114	(A,32,33)	RS1/16SS0R0J
R 5115	(A,32,30)	RS1/16SS0R0J
R 5116	(A,31,33)	RS1/16SS0R0J
R 5117	(A,30,31)	RS1/16SS0R0J
R 5118	(A,29,31)	RS1/16SS0R0J
R 5119	(A,28,33)	RS1/16SS473J
R 5120	(A,15,15)	RS1/16SS0R0J
R 5121	(A,13,15)	RS1/16SS0R0J
R 5122	(A,14,28)	RS1/16SS473J
R 5123	(A,22,31)	RS1/16SS473J
R 5124	(A,23,31)	RS1/16SS473J
R 5125	(A,48,34)	RS1/10SR4R7J
R 5126	(A,48,31)	RS1/10SR56R0D
R 5127	(A,46,32)	RS1/10SR1800D
R 5128	(A,46,30)	RS1/10SR2R2J
R 5129	(A,45,32)	RS1/10SR47R0D
R 5130	(A,45,30)	RS1/10SR0R0J
R 5131	(A,43,32)	RS1/10SR39R0D
R 5132	(A,43,30)	RS1/10SR4R7J
R 5133	(A,53,30)	RS1/10SR1000D
R 5134	(A,53,27)	RS1/10SR8R2J
R 5135	(A,52,27)	RS1/10SR1300D
R 5136	(A,51,27)	RS1/10SR0R0J
R 5137	(A,52,24)	RS1/10SR1000D
R 5138	(A,51,24)	RS1/10SR8R2J
R 5139	(A,52,22)	RS1/10SR39R0D
R 5140	(A,51,22)	RS1/10SR4R7J
R 5141	(A,52,19)	RS1/10SR47R0D
R 5142	(A,51,19)	RS1/10SR0R0J
R 5143	(A,52,16)	RS1/10SR1800D
R 5144	(A,51,16)	RS1/10SR2R2J
R 5145	(A,52,13)	RS1/10SR33R0D

Circuit Symbol and No.		Part No.
R 5146	(A,51,13)	RS1/10SR2R4J
R 5147	(A,71,32)	RS1/16SS103J
R 5149	(A,75,24)	RS1/10SR9102D
R 5150	(A,75,23)	RS1/10SR1802D
R 5151	(A,72,16)	RS1/16SS203J
R 5152	(A,74,15)	RS1/16SS104J
R 5153	(A,61,14)	RS1/16SS103J
R 5156	(A,73,21)	RS1/16SS1802D
R 5157	(A,73,19)	RS1/16SS2202D
R 5158	(A,77,26)	RS1/10SR1003D
R 5159	(A,74,26)	RS1/10SR9101D
R 5161	(A,72,19)	RS1/16SS472J
R 5162	(A,62,22)	RS1/10SR0R0J
R 5163	(A,64,20)	RS1/10SR1203D
R 5164	(A,66,20)	RS1/10SR3001D
R 5165	(A,66,17)	RS1/10SR1502D
R 5166	(A,64,19)	RS1/10SR472J
R 5171	(A,58,20)	RS1/16SS223J
R 5172	(A,56,20)	RS1/10SR4702D
R 5173	(A,56,18)	RS1/10SR3902D
R 5174	(A,55,21)	RS1/16SS100J
R 5175	(A,65,31)	RS1/10SR2R2J
R 5176	(A,79,28)	RS1/10SR0R0J
R 5178	(A,57,41)	RS1/16SS0R0J

CAPACITORS

C 5102	(A,48,29)	CKSSYB103K25
C 5104	(A,50,32)	CKSSYB103K25
C 5106	(A,51,33)	CKSSYB103K25
C 5108	(A,52,30)	CKSSYB103K25
C 5109	(A,54,25)	CKSSYB102K50
C 5110	(A,54,24)	CKSSYB104K16
C 5111	(A,54,23)	CKSSYB102K50
C 5112	(A,54,22)	CKSSYB104K16
C 5114	(A,54,20)	CKSSYB103K25
C 5116	(A,54,19)	CKSSYB103K25
C 5118	(A,54,16)	CKSSYB103K25
C 5120	(A,54,14)	CKSSYB103K25
C 5121	(A,27,30)	CKSSYB102K50
C 5123	(A,27,32)	CKSSYB104K16
C 5126	(A,38,38) 10 uF	CCG1236
C 5127	(A,61,23)	CKSSYB102K50
C 5130	(A,25,31)	CKSSYB102K50
C 5131	(A,25,32)	CKSSYB104K10
C 5132	(A,25,34) 10 uF	CCG1234
C 5135	(A,20,29)	CKSSYB104K16
C 5136	(A,47,38) 4.7 uF	CCG1201
C 5138	(A,49,38)	CKSQYB225K16
C 5140	(A,17,30)	CKSRYB104K50
C 5141	(A,20,37)	CKSQYB334K50
C 5143	(A,16,28)	CKSSYB104K16
C 5144	(A,67,34)	CKSQYB475K6R3
C 5145	(A,64,23)	CKSSYB102K50
C 5146	(A,75,29)	CKSQYB105K25
C 5148	(A,78,20)	CKSRYB104K50
C 5149	(A,75,35)	CKSRYB104K50
C 5150	(A,77,35)	CKSRYB104K50
C 5151	(A,75,38)	CKSYB475K16
C 5152	(A,64,21)	CKSSYB105K6R3

Circuit Symbol and No.			Part No.
C 5153	(A,71,13)		CKSRYB104K50
C 5154	(A,73,13)		CKSRYB123K50
C 5155	(A,75,17)		CKSRYB105K16
C 5156	(A,84,13)		CCSQCH101J50
C 5157	(A,77,27)		CKSRYB561K50
C 5158	(A,83,15)		CKSRYB683K50
C 5159	(A,62,25)		CKSYB475K16
C 5161	(A,69,18)		CKSRYB682K50
C 5162	(A,66,19)		CKSRYB471K50
C 5164	(A,58,19)		CKSSYB104K16
C 5165	(A,56,27)		CKSSYB104K16
C 5166	(A,57,31)	10 uF	CCG1236
C 5169	(A,63,32)		CKSRYB332K50
C 5170	(A,59,34)		CKSSYB102K50
C 5172	(A,77,29)		CKSQYB105K25
C 5173	(A,78,24)		CKSRYB105K16

Miscellaneous Parts List

M 1	Motor Unit(CRG(L/E))	CXC4026
*M 2	Motor(SPINDLE)	EXM2002
	Fan Motor	CXM1441
	Motor Unit(FLAP)	EXA4003