PARTS LIST

✻ New Parts. ⚠indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia **K** : USA **P** : Canada
Y : PX (Far East, Hawaii) **T** : England **E** : Europe
C : China **X** : Australia **M** : Other Areas

TK-8302/8302(U)/8302H/8302H(U)
DISPLAY UNIT (X54-3670-20)
TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-8302/8302(U)/8302H/8302H(U)					
1	1B	✻	A02-4073-21	PLASTIC CABINET	
2	3A		A62-1171-03	PANEL ASSY	
4	2B		B09-0732-03	CAP (D-SUB)	
5	3A		B10-2794-03	FRONT GLASS	
6	3A		B43-1629-04	BADGE	
7	2D	✻	B62-2150-10	INSTRUCTION MANUAL	M2,M,HM
7	2D	✻	B62-2167-10	INSTRUCTION MANUAL	HK2,K,HK
7	2D	✻	B62-2167-10	INSTRUCTION MANUAL	HUK
8	2B		E04-0167-15	RF COAXIAL RECEPTACLE (M)	
9	2A	✻	E23-1344-04	GROUND TERMINAL (AF AMP)	
10	1C		E30-7523-55	DC CORD ASSY ACCESSORY	
11	2B		E30-7684-05	DC CORD	
12	2A		E37-1461-05	FLAT CABLE (30P PANEL)	
14	1C		F52-0023-05	FUSE (BLADE TYPE)10A ACCESSORY	M2,M,K
14	1C		F52-0024-05	FUSE (BLADE TYPE)15A ACCESSORY	HK2,HM,HK
14	1C		F52-0024-05	FUSE (BLADE TYPE)15A ACCESSORY	HUK
16	2B		G53-1643-04	PACKING (DC CORD)	
17	2B		G53-1662-04	PACKING (RECEPTACLE)	
18	1B		G53-1819-21	PACKING (CHASSIS)	
19	3A		G53-1820-03	PACKING (PANEL)	
21	1C,1D		H12-3178-05	PACKING FIXTURE	
22	2D	✻	H52-2310-12	ITEM CARTON CASE	
24	3D		J19-1584-15	HOLDER (MIC HANGER)	HK2,K,HK
24	3D		J19-1584-15	HOLDER (MIC HANGER)	HUK
25	3B		J19-5528-03	HOLDER (SPEAKER)	
26	1C		J29-0726-03	BRACKET ACCESSORY	
28	3A		K29-9448-01	KEY TOP	
A	1A,1B		N35-2604-43	BINDING HEAD MACHINE SCREW	
B	1A,2A,2B		N67-3008-48	PAN HEAD SEMS SCREW	
C	3A,3B		N80-2008-48	PAN HEAD TAPTITE SCREW	
D	2A,2B		N87-2608-48	BRAZIER HEAD TAPTITE SCREW	
30	3D		N99-2039-05	SCREW SET ACCESSORY	
32	3A		T07-0785-05	SPEAKER	
33	2C		T91-0624-65	MICROPHONE (KMC-30) ACCESSORY	HK2,HK
34	2C		T91-0639-55	MICROPHONE (KMC-35) ACCESSORY	K,HUK
DISPLAY UNIT (X54-3670-20)					
D1-5			B30-2282-05	LED (Y)	
D22	3A		B30-2321-05	LED (BLUE LED)	
D23	3A		B30-2151-05	LED (RED/GREEN)	
C1			CK73HB1E103K	CHIP C 0.010UF K	
C8			CC73HCH1H101J	CHIP C 100PF J	
C9			CK73HB1H102K	CHIP C 1000PF K	
C10			CK73HB1E103K	CHIP C 0.010UF K	
C16			CK73HB1E103K	CHIP C 0.010UF K	
C27			CC73HCH1H101J	CHIP C 100PF J	
C29-36			CK73HB1H102K	CHIP C 1000PF K	
C38,39			CC73HCH1H101J	CHIP C 100PF J	
C40			CK73HB1H102K	CHIP C 1000PF K	

Ref. No.	Address	New parts	Parts No.	Description	Destination
C41,42			CC73HCH1H101J	CHIP C 100PF J	
C43-46			CK73HB1H471K	CHIP C 470PF K	
C47			CK73HB1H102K	CHIP C 1000PF K	
CN1			E40-6851-05	FLAT CABLE CONNECTOR	
CN2			E23-1262-05	TERMINAL	
J1	3A		E58-0535-05	MODULAR JACK	
101	3A	✻	J31-0565-15	COLLAR	
L1			L92-0138-05	CHIP FERRITE	
CP1			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
R1			RK73HB1J101J	CHIP R 100 J 1/16W	
R2			RK73FB2B100J	CHIP R 10 J 1/8W	
R3-8			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R10,11			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R12			RK73HB1J122J	CHIP R 1.2K J 1/16W	
R21			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R22			RK73HB1J820J	CHIP R 82 J 1/16W	
R23			RK73HB1J121J	CHIP R 120 J 1/16W	
R26,27			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R28,29			RK73HB1J103J	CHIP R 10K J 1/16W	
R34			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R35			RK73HB1J223J	CHIP R 22K J 1/16W	
R36			RK73HB1J822J	CHIP R 8.2K J 1/16W	
R37,38			RK73HB1J100J	CHIP R 10 J 1/16W	
R39			RK73HB1J150J	CHIP R 15 J 1/16W	
R40			RK73HB1J100J	CHIP R 10 J 1/16W	
R41			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R42			RK73HB1J102J	CHIP R 1.0K J 1/16W	
D20			DA221	DIODE	
D33			02DZ6.2F-Y	ZENER DIODE	
D37	3A		HDSP-521A	LED	
IC1			TCA62746AFNAG	MOS-IC	
Q1,2			RT1N441U	TRANSISTOR	
Q3			KRA225S	DIGITAL TRANSISTOR	
Q4			KRC102S-P	DIGITAL TRANSISTOR	
Q5,6			2SC3928A	TRANSISTOR	
Q7,8			RT1P141U	TRANSISTOR	
Q9			2SC3928A	TRANSISTOR	
TX-RX UNIT (X57-7680-XX) -13: K -14: HK -15: HK2 -17: HUK -22: M -23: M2 -24: HM					
C2			CC73HCH1H020B	CHIP C 2.0PF B	
C4			CC73HCH1H101J	CHIP C 100PF J	
C5			CK73HB1H471K	CHIP C 470PF K	
C7			CC73HCH1H101J	CHIP C 100PF J	
C8			CC73GCH1H101J	CHIP C 100PF J	
C10			CK73HB1A104K	CHIP C 0.10UF K	
C11			CC73HCH1H101J	CHIP C 100PF J	
C14			CC73HCH1H101J	CHIP C 100PF J	
C15			CC73HCH1H080B	CHIP C 8.0PF B	
C16			CK73HB0J105K	CHIP C 1.0UF K	
C17,18			CK73HB1A104K	CHIP C 0.10UF K	
C19,20			CK73HB1E103K	CHIP C 0.010UF K	
C22			CK73FB0J106K	CHIP C 10UF K	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C23			CK73HB1A104K	CHIP C	0.10UF	K	
C24			CK73FB0J106K	CHIP C	10UF	K	
C26			CK73HB1C103K	CHIP C	0.010UF	K	
C27			CK73HB1A104K	CHIP C	0.10UF	K	
C28			CC73HCH1H3R5B	CHIP C	3.5PF	B	
C29			C92-0863-05	CHIP TNTL	0.047UF	35WV	
C32			CK73HB1H471K	CHIP C	470PF	K	
C33			CC73HCH1H020B	CHIP C	2.0PF	B	
C34			CC73HCH1H101J	CHIP C	100PF	J	
C35			CC73HCH1H3R5B	CHIP C	3.5PF	B	
C36			CK73GB1H102K	CHIP C	1000PF	K	
C37			CK73HB1H471K	CHIP C	470PF	K	
C41			CC73HCH1H330J	CHIP C	33PF	J	
C43			CS77CA1V0R1M	CHIP TNTL	0.1UF	35WV	
C45			C92-0588-05	CHIP TNTL	1.5UF	16WV	
C46			CK73HB1H471K	CHIP C	470PF	K	
C48			C93-0787-05	CERAMIC	0.1UF	50WV	
C49			C92-0863-05	CHIP TNTL	0.047UF	35WV	
C52			CK73HB1H471K	CHIP C	470PF	K	
C54			CC73HCH1H470J	CHIP C	47PF	J	
C56			CC73HCH1H470J	CHIP C	47PF	J	
C57,58			CK73HB1H471K	CHIP C	470PF	K	
C59			CK73FB0J106K	CHIP C	10UF	K	
C61			CC73HCH1H110J	CHIP C	11PF	J	M,HM,K
C61			CC73HCH1H110J	CHIP C	11PF	J	HK,HUK
C61			CC73HCH1H120J	CHIP C	12PF	J	M2,HK2
C62			CC73HCH1H150J	CHIP C	15PF	J	
C63			CC73HCH1H101J	CHIP C	100PF	J	
C64			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C65,66			CC73HCH1H101J	CHIP C	100PF	J	
C67,68			CK73GB1H471K	CHIP C	470PF	K	
C69			CC73HCH1H040B	CHIP C	4.0PF	B	M,HM,K
C69			CC73HCH1H040B	CHIP C	4.0PF	B	HK,HUK
C69			CC73HCH1H050B	CHIP C	5.0PF	B	M2,HK2
C70			CC73HCH1H020B	CHIP C	2.0PF	B	M,HM,K
C70			CC73HCH1H020B	CHIP C	2.0PF	B	HK,HUK
C70			CC73HCH1H2R5B	CHIP C	2.5PF	B	M2,HK2
C71,72			CK73GB1H471K	CHIP C	470PF	K	
C73			CC73HCH1H060B	CHIP C	6.0PF	B	
C74			CC73HCH1H080B	CHIP C	8.0PF	B	
C75			CC73HCH1H040B	CHIP C	4.0PF	B	M,HM,K
C75			CC73HCH1H040B	CHIP C	4.0PF	B	HK,HUK
C75			CC73HCH1H050B	CHIP C	5.0PF	B	M2,HK2
C76			CC73HCH1H060B	CHIP C	6.0PF	B	
C77			CK73HB1H471K	CHIP C	470PF	K	
C78			CC73HCH1H0R3B	CHIP C	0.3PF	B	
C79			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C80			CS77BB21C100M	CHIP TNTL	10UF	16WV	
C81-83			CK73HB1H471K	CHIP C	470PF	K	
C84			CC73HCH1H040B	CHIP C	4.0PF	B	M,HM,K
C84			CC73HCH1H040B	CHIP C	4.0PF	B	HK,HUK
C84			CC73HCH1H060B	CHIP C	6.0PF	B	M2,HK2
C85			CC73HCH1H020B	CHIP C	2.0PF	B	
C86			CC73GCH1H020B	CHIP C	2.0PF	B	
C87-89			CK73HB1H471K	CHIP C	470PF	K	
C90			CC73GCH1H020B	CHIP C	2.0PF	B	M,HM,K
C90			CC73GCH1H020B	CHIP C	2.0PF	B	HK,HUK
C90			CC73GCH1H2R5B	CHIP C	2.5PF	B	M2,HK2
C91			CK73HB1H471K	CHIP C	470PF	K	
C92			CK73HB1C103K	CHIP C	0.010UF	K	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C94			CK73HB1H471K	CHIP C	470PF	K	
C95			CK73HB1A104K	CHIP C	0.10UF	K	
C98			CK73GB1H471K	CHIP C	470PF	K	
C99			CK73HB1H471K	CHIP C	470PF	K	
C100			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C102			CC73HCH1H050B	CHIP C	5.0PF	B	
C300			CC73GCH1H060B	CHIP C	6.0PF	B	M,HM,K
C300			CC73GCH1H060B	CHIP C	6.0PF	B	HK,HUK
C300			CC73GCH1H150J	CHIP C	15PF	J	M2,HK2
C301			CC73HCH1H060B	CHIP C	6.0PF	B	
C302			CC73HCH1H110J	CHIP C	11PF	J	
C303			CC73HCH1H240J	CHIP C	24PF	J	M,HM,K
C303			CC73HCH1H240J	CHIP C	24PF	J	HK,HUK
C303			CC73HCH1H330J	CHIP C	33PF	J	M2,HK2
C305			CK73HB1H471K	CHIP C	470PF	K	
C307			CK73HB1H102K	CHIP C	1000PF	K	
C313			CK73HB1H471K	CHIP C	470PF	K	
C314			CC73HCH1H110J	CHIP C	11PF	J	M,HM,K
C314			CC73HCH1H110J	CHIP C	11PF	J	HK,HUK
C314			CC73HCH1H120J	CHIP C	12PF	J	M2,HK2
C315			CK73HB1C223K	CHIP C	0.022UF	K	
C316			CC73HCH1H1R5B	CHIP C	1.5PF	B	
C320			CK73GB1H471K	CHIP C	470PF	K	
C322			CK73GB1H271K	CHIP C	270PF	K	
C333			CK73HB1H471K	CHIP C	470PF	K	
C336			CK73GB1H221K	CHIP C	220PF	K	
C338			CC73GCH1H220J	CHIP C	22PF	J	
C339			CK73GB1H102K	CHIP C	1000PF	K	
C340,341			CC73GCH1H101J	CHIP C	100PF	J	
C342			CK73HB1A104K	CHIP C	0.10UF	K	M2,HK2
C342			CK73HB1A154K	CHIP C	0.15UF	K	HM,HK,HUK
C342			CK73HB1A683K	CHIP C	0.068UF	K	M,K
C344			CK73GB1H471K	CHIP C	470PF	K	
C348			CC73GCH1H470J	CHIP C	47PF	J	
C350			CC73GCH1H220J	CHIP C	22PF	J	
C351			C93-0553-05	CHIP C	3.0PF	C	HM,HK,HUK
C351			C93-0554-05	CHIP C	4.0PF	C	M2,HK2
C351			C93-0555-05	CHIP C	5.0PF	C	M,K
C353			C93-0552-05	CHIP C	2.0PF	C	M2,HK2
C354			CK73HB1A104K	CHIP C	0.10UF	K	
C355			CK73GB1H471K	CHIP C	470PF	K	
C360			CK73GB1H471K	CHIP C	470PF	K	
C361,362			CK73GB1H103K	CHIP C	0.010UF	K	
C363			CC73GCH1H040B	CHIP C	4.0PF	B	M2,HK2
C363			CC73GCH1H3R5B	CHIP C	3.5PF	B	M,HM,K
C363			CC73GCH1H3R5B	CHIP C	3.5PF	B	HK,HUK
C364			C93-0550-05	CHIP C	1.0PF	C	M,HM,K
C364			C93-0550-05	CHIP C	1.0PF	C	HK,HUK
C364			C93-0551-05	CHIP C	1.5PF	C	M2
C364			C93-0553-05	CHIP C	3.0PF	C	HK2
C365,366			C93-0603-05	CHIP C	1000PF	K	
C367			CC73GCH1H070B	CHIP C	7.0PF	B	M2,HK2
C367			CC73GCH1H100C	CHIP C	10PF	C	HM,HK,HUK
C367			CC73GCH1H110G	CHIP C	11PF	G	M,K
C368			CC73GCH1H240J	CHIP C	24PF	J	M,HM,K
C368			CC73GCH1H240J	CHIP C	24PF	J	HK,HUK
C368			CC73GCH1H270J	CHIP C	27PF	J	M2,HK2
C372			C93-0552-05	CHIP C	2.0PF	C	HK2,HM,HK
C372			C93-0552-05	CHIP C	2.0PF	C	HUK
C372			C93-0553-05	CHIP C	3.0PF	C	M,K

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C372			C93-0554-05	CHIP C	4.0PF	C	M2
C373			C93-0550-05	CHIP C	1.0PF	C	M2,HK2,HM
C373			C93-0550-05	CHIP C	1.0PF	C	HK,HUK
C373			C93-0551-05	CHIP C	1.5PF	C	M,K
C374			CM73F2H040D	CHIP C	4.0PF	D	HM,HK,HUK
C374			CM73F2H050D	CHIP C	5.0PF	D	M,K
C374			CM73F2H070D	CHIP C	7.0PF	D	M2,HK2
C376			CK73GB1H102K	CHIP C	1000PF	K	
C381			C93-0550-05	CHIP C	1.0PF	C	HM,HK,HUK
C381			C93-0551-05	CHIP C	1.5PF	C	M2,HK2,M
C381			C93-0551-05	CHIP C	1.5PF	C	K
C383			C93-0553-05	CHIP C	3.0PF	C	
C384			CK73GB1H102K	CHIP C	1000PF	K	
C391,392			CK73HB1H471K	CHIP C	470PF	K	
C500			CC73HCH1H470J	CHIP C	47PF	J	
C501			CC73HCH1H180J	CHIP C	18PF	J	
C503			CK73HB1H561K	CHIP C	560PF	K	
C504			CK73HB1C103K	CHIP C	0.010UF	K	
C505			CC73HCH1H300J	CHIP C	30PF	J	
C506			CC73HCH1H100B	CHIP C	10PF	B	
C508			CC73HCH1H270J	CHIP C	27PF	J	
C509			CK73HB1C103K	CHIP C	0.010UF	K	
C510-515			CK73HB1A104K	CHIP C	0.10UF	K	
C516			CK73HB1H471K	CHIP C	470PF	K	
C517			CK73HB1E103K	CHIP C	0.010UF	K	
C518			CK73HB1H271K	CHIP C	270PF	K	
C519			CK73FB0J106K	CHIP C	10UF	K	
C520			CK73HB1H271K	CHIP C	270PF	K	
C521,522			CK73HB1A104K	CHIP C	0.10UF	K	
C523			CK73GB1C104K	CHIP C	0.10UF	K	
C524			CK73HB1H102K	CHIP C	1000PF	K	
C525			CK73GB0J475K	CHIP C	4.7UF	K	
C526			CK73HB1H102K	CHIP C	1000PF	K	
C527			CC73HCH1H680J	CHIP C	68PF	J	
C528			CC73GCH1H330J	CHIP C	33PF	J	
C529			CK73HB1E103K	CHIP C	0.010UF	K	
C530			CK73HB1A104K	CHIP C	0.10UF	K	
C531			CK73HB1H471K	CHIP C	470PF	K	
C535			CK73HB1H471K	CHIP C	470PF	K	
C538			CK73HB1E103K	CHIP C	0.010UF	K	
C541			CK73HB1E103K	CHIP C	0.010UF	K	
C543			CC73HCH1H010B	CHIP C	1.0PF	B	
C545			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C545			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C545			CC73HCH1H180J	CHIP C	18PF	J	M2,HK2
C546			CC73HCH1H030B	CHIP C	3.0PF	B	
C550			CK73HB1E103K	CHIP C	0.010UF	K	
C551			CK73GB1A334K	CHIP C	0.33UF	K	
C553			CK73HB1A104K	CHIP C	0.10UF	K	
C554			CC73HCH1H040B	CHIP C	4.0PF	B	
C555			CK73HB1H471K	CHIP C	470PF	K	
C556			CC73HCH1H110J	CHIP C	11PF	J	M,HM,K
C556			CC73HCH1H110J	CHIP C	11PF	J	HK,HUK
C556			CC73HCH1H150G	CHIP C	15PF	G	M2,HK2
C557			CK73HB1E103K	CHIP C	0.010UF	K	
C558			CK73HB1H471K	CHIP C	470PF	K	
C559			CK73GB1H471K	CHIP C	470PF	K	
C560,561			CK73HB1H471K	CHIP C	470PF	K	
C562			CK73HB1E103K	CHIP C	0.010UF	K	
C563-565			CK73HB1H471K	CHIP C	470PF	K	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C569			CK73HB1H471K	CHIP C	470PF	K	
C570			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C570			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C570			CC73HCH1H680J	CHIP C	68PF	J	M2,HK2
C571			CC73HCH1H030B	CHIP C	3.0PF	B	
C572			CC73HCH1H0R5B	CHIP C	0.5PF	B	M,HM,K
C572			CC73HCH1H0R5B	CHIP C	0.5PF	B	HK,HUK
C572			CC73HCH1H010B	CHIP C	1.0PF	B	M2,HK2
C573			CC73HCH1H040B	CHIP C	4.0PF	B	M2,HK2
C573			CC73HCH1H4R5B	CHIP C	4.5PF	B	M,HM,K
C573			CC73HCH1H4R5B	CHIP C	4.5PF	B	HK,HUK
C574			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C574			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C574			CC73HCH1H680J	CHIP C	68PF	J	M2,HK2
C575			CC73HCH1H020B	CHIP C	2.0PF	B	M2,HK2
C575			CC73HCH1H1R5B	CHIP C	1.5PF	B	M,HM,K
C575			CC73HCH1H1R5B	CHIP C	1.5PF	B	HK,HUK
C576			CK73HB1H102K	CHIP C	1000PF	K	
C577			CC73HCH1H010B	CHIP C	1.0PF	B	
C578			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C578			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C578			CC73HCH1H680J	CHIP C	68PF	J	M2,HK2
C581			CC73HCH1H030B	CHIP C	3.0PF	B	M2,HK2
C581			CC73HCH1H2R5B	CHIP C	2.5PF	B	M,HM,K
C581			CC73HCH1H2R5B	CHIP C	2.5PF	B	HK,HUK
C582,583			CK73HB1H471K	CHIP C	470PF	K	
C585			CK73HB1A104K	CHIP C	0.10UF	K	
C586			CK73HB1H471K	CHIP C	470PF	K	
C587			CK73GB1A105K	CHIP C	1.0UF	K	
C588-591			CK73HB1H471K	CHIP C	470PF	K	
C592			CC73GCH1H471J	CHIP C	470PF	J	
C593			CC73HCH1H2R5B	CHIP C	2.5PF	B	
C594			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C594			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C594			CC73HCH1H470J	CHIP C	47PF	J	M2,HK2
C595			CC73HCH1H040B	CHIP C	4.0PF	B	M2,HK2
C595			CC73HCH1H1R5B	CHIP C	1.5PF	B	M,HM,K
C595			CC73HCH1H1R5B	CHIP C	1.5PF	B	HK,HUK
C596			CK73HB1H102K	CHIP C	1000PF	K	
C597			CC73HCH1H020B	CHIP C	2.0PF	B	M,HM,K
C597			CC73HCH1H020B	CHIP C	2.0PF	B	HK,HUK
C597			CC73HCH1H050B	CHIP C	5.0PF	B	M2,HK2
C598			CC73HCH1H150J	CHIP C	15PF	J	M,HM,K
C598			CC73HCH1H150J	CHIP C	15PF	J	HK,HUK
C598			CC73HCH1H470J	CHIP C	47PF	J	M2,HK2
C599			CC73HCH1H040B	CHIP C	4.0PF	B	M,HM,K
C599			CC73HCH1H040B	CHIP C	4.0PF	B	HK,HUK
C599			CC73HCH1H050B	CHIP C	5.0PF	B	M2,HK2
C601			CC73HCH1H200G	CHIP C	20PF	G	M2,HK2
C601			CC73HCH1H300J	CHIP C	30PF	J	M,HM,K
C601			CC73HCH1H300J	CHIP C	30PF	J	HK,HUK
C603			CC73HCH1H040B	CHIP C	4.0PF	B	M,HM,K
C603			CC73HCH1H040B	CHIP C	4.0PF	B	HK,HUK
C603			CC73HCH1H080B	CHIP C	8.0PF	B	M2,HK2
C604			CC73HCH1H030B	CHIP C	3.0PF	B	M,HM,K
C604			CC73HCH1H030B	CHIP C	3.0PF	B	HK,HUK
C604			CC73HCH1H050B	CHIP C	5.0PF	B	M2,HK2
C606			CK73HB1H471K	CHIP C	470PF	K	
C700-709			CK73HB1H471K	CHIP C	470PF	K	
C711			CK73HB1H471K	CHIP C	470PF	K	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C713			CK73HB1H471K	CHIP C	470PF	K	
C715			CK73HB1H471K	CHIP C	470PF	K	
C717			CK73HB1H471K	CHIP C	470PF	K	
C719			CK73HB1H471K	CHIP C	470PF	K	
C721			CK73HB1H471K	CHIP C	470PF	K	
C723			CK73HB1H471K	CHIP C	470PF	K	
C725			CK73HB1H471K	CHIP C	470PF	K	
C727			CK73HB1H471K	CHIP C	470PF	K	
C729			CK73HB1H471K	CHIP C	470PF	K	
C731,732			CK73HB1H471K	CHIP C	470PF	K	
C735			CK73HB1A104K	CHIP C	0.10UF	K	
C736			CK73GB0J475K	CHIP C	4.7UF	K	
C739			CK73GB1C104K	CHIP C	0.10UF	K	
C740			CK73HB1A104K	CHIP C	0.10UF	K	
C743			CK73HB1C333K	CHIP C	0.033UF	K	
C744			CK73HB1H471K	CHIP C	470PF	K	
C745			CK73HB1H271K	CHIP C	270PF	K	
C746			CK73FB0J106K	CHIP C	10UF	K	
C747			CK73HB1A104K	CHIP C	0.10UF	K	
C748			CC73HCH1H680J	CHIP C	68PF	J	
C749,750			CK73HB1A104K	CHIP C	0.10UF	K	
C751			CC73HCH1H820J	CHIP C	82PF	J	
C753			CK73GB0J106K	CHIP C	10UF	K	
C754,755			CK73HB1A104K	CHIP C	0.10UF	K	
C756			CC73HCH1H391J	CHIP C	390PF	J	
C758			CK73HB1H471K	CHIP C	470PF	K	
C760			CK73HB0J105K	CHIP C	1.0UF	K	
C762,763			CK73HB1A104K	CHIP C	0.10UF	K	
C764			CK73HB1E103K	CHIP C	0.010UF	K	
C765			CK73GB0J106K	CHIP C	10UF	K	
C767			CK73GB1C104K	CHIP C	0.10UF	K	
C768			CK73GB1H471K	CHIP C	470PF	K	
C769			CK73HB0J105K	CHIP C	1.0UF	K	
C770			CK73FB0J106K	CHIP C	10UF	K	
C771			CC73HCH1H101J	CHIP C	100PF	J	
C772			CK73HB0J105K	CHIP C	1.0UF	K	
C773			CC73HCH1H101J	CHIP C	100PF	J	
C774			CK73HB0J105K	CHIP C	1.0UF	K	
C775			CC73HCH1H391J	CHIP C	390PF	J	
C777			CK73HB0J105K	CHIP C	1.0UF	K	
C778			CK73HB1E562K	CHIP C	5600PF	K	
C779			CK73HB1E103K	CHIP C	0.010UF	K	
C780			CK73HB1A683K	CHIP C	0.068UF	K	
C784			CK73GB0J106K	CHIP C	10UF	K	
C785			CK73HB1H102K	CHIP C	1000PF	K	
C787			CK73HB1H332K	CHIP C	3300PF	K	
C788			CK73HB1A683K	CHIP C	0.068UF	K	
C790			CK73GB1H102K	CHIP C	1000PF	K	
C792-794			CK73HB1H471K	CHIP C	470PF	K	
C795			CK73GB1H102K	CHIP C	1000PF	K	
C796			CK73HB0J105K	CHIP C	1.0UF	K	
C797			CK73HB1H102K	CHIP C	1000PF	K	
C807			CK73HB1H102K	CHIP C	1000PF	K	
C808			CK73HB1A105K	CHIP C	1.0UF	K	
C809			CK73GB1C104K	CHIP C	0.10UF	K	
C810			CK73GB1H102K	CHIP C	1000PF	K	
C813,814			CK73HB1H102K	CHIP C	1000PF	K	
C816			CK73HB1A104K	CHIP C	0.10UF	K	
C817			CK73HB1E103K	CHIP C	0.010UF	K	
C819			CS77AB21C220M	CHIP TNTL	22UF	16WV	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C820			CK73HB1H102K	CHIP C	1000PF	K	
C821			CK73GB1A105K	CHIP C	1.0UF	K	
C822			CK73HB0J105K	CHIP C	1.0UF	K	
C824			CS77AB21C220M	CHIP TNTL	22UF	16WV	
C825			CK73HB1A104K	CHIP C	0.10UF	K	
C828,829			CK73HB1A104K	CHIP C	0.10UF	K	
C831			CK73HB1A104K	CHIP C	0.10UF	K	
C832			CK73GB1A224K	CHIP C	0.22UF	K	
C833			CK73HB1H102K	CHIP C	1000PF	K	
C835			CK73GB1H102K	CHIP C	1000PF	K	
C837,838			CK73HB1H102K	CHIP C	1000PF	K	
C839			CS77AB21C4R7M	CHIP TNTL	4.7UF	16WV	
C840			CK73GB1H102K	CHIP C	1000PF	K	
C841			CK73GB1A105K	CHIP C	1.0UF	K	
C842			CS77AA1A100M	CHIP TNTL	10UF	10WV	
C843			C92-0873-05	ELECTRO	47UF	16WV	
C844			CK73HB1H102K	CHIP C	1000PF	K	
C845			CK73HB1E103K	CHIP C	0.010UF	K	
C846			CK73GB1H102K	CHIP C	1000PF	K	
C847			CK73HB1H102K	CHIP C	1000PF	K	
C849		✻	C92-0716-05	ELECTRO	220UF	16WV	
C850			CK73GB1H102K	CHIP C	1000PF	K	
C851			CK73GB1A105K	CHIP C	1.0UF	K	
C852			CK73HB1E103K	CHIP C	0.010UF	K	
C853,854			CK73HB1H102K	CHIP C	1000PF	K	
C855			CK73GB1H102K	CHIP C	1000PF	K	
C856			CK73HB1A104K	CHIP C	0.10UF	K	
C857			CC73HCH1H220J	CHIP C	22PF	J	
C858			CK73GB1H221K	CHIP C	220PF	K	
C859			CC73HCH1H470J	CHIP C	47PF	J	
C860			CC73HCH1H101J	CHIP C	100PF	J	
C861			CK73GB1H471K	CHIP C	470PF	K	
C862			CK73HB1H102K	CHIP C	1000PF	K	
C863			CC73HCH1H220J	CHIP C	22PF	J	
C864			CC73GCH1H470J	CHIP C	47PF	J	
C865			CC73HCH1H220J	CHIP C	22PF	J	
C866			CK73GB1H102K	CHIP C	1000PF	K	
C867			CK73GB1H471K	CHIP C	470PF	K	
C868			CK73HB1A334K	CHIP C	0.33UF	K	
C869			CK73GB1H221K	CHIP C	220PF	K	
C870			CK73HB1H102K	CHIP C	1000PF	K	
C871			CC73HCH1H010B	CHIP C	1.0PF	B	M2,HK2
C871			CC73HCH1H020B	CHIP C	2.0PF	B	M,HM,K
C871			CC73HCH1H020B	CHIP C	2.0PF	B	HK,HUK
C874			CK73GB0J105K	CHIP C	1.0UF	K	
C875-877			CK73HB0J105K	CHIP C	1.0UF	K	
C878			CC73HCH1H100D	CHIP C	10PF	D	
C879			CC73HCH1H040B	CHIP C	4.0PF	B	
C880			CK73HB1H102K	CHIP C	1000PF	K	
C881			CK73HB0J105K	CHIP C	1.0UF	K	
C882			CK73GB1A105K	CHIP C	1.0UF	K	
C883			CK73HB1A224K	CHIP C	0.22UF	K	
C884		✻	C92-0716-05	ELECTRO	220UF	16WV	
C885,886			CK73GB1H102K	CHIP C	1000PF	K	
C887			CK73HB1H471K	CHIP C	470PF	K	
C889-891			CK73HB1H471K	CHIP C	470PF	K	
C898			CK73HB1H471K	CHIP C	470PF	K	
C915			CK73HB1H471K	CHIP C	470PF	K	
C917			CC73HCH1H200J	CHIP C	20PF	J	
C918			CC73HCH1H121J	CHIP C	120PF	J	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
C919			CC73HCH1H150J	CHIP C 15PF J	
C920			CK73HB1E103K	CHIP C 0.010UF K	
C921			CK73GB1A105K	CHIP C 1.0UF K	
C922			CK73HB1H102K	CHIP C 1000PF K	
C923			CK73HB1A104K	CHIP C 0.10UF K	
C924,925			CK73HB0J105K	CHIP C 1.0UF K	
C926,927			CK73HB1H102K	CHIP C 1000PF K	
C928			CK73HB1A104K	CHIP C 0.10UF K	
C929			CK73HB1H102K	CHIP C 1000PF K	
C930			CK73HB1A104K	CHIP C 0.10UF K	
C931			CK73HB1H102K	CHIP C 1000PF K	
C932			CK73HB1A104K	CHIP C 0.10UF K	
C933			CK73HB1H471K	CHIP C 470PF K	
C936			CC73HCH1H020B	CHIP C 2.0PF B	
C937			CK73HB1E103K	CHIP C 0.010UF K	
C938			CK73HB1H471K	CHIP C 470PF K	
C939			CK73HB1A104K	CHIP C 0.10UF K	
C940			CK73FB0J106K	CHIP C 10UF K	
C941			CK73HB1H471K	CHIP C 470PF K	
C945			CK73GB1H471K	CHIP C 470PF K	
C947			CK73HB1H471K	CHIP C 470PF K	
C949			CC73HCH1H2R5B	CHIP C 2.5PF B	M2,HK2
C950			CC73HCH1H101J	CHIP C 100PF J	
C952			CC73GCH1H220J	CHIP C 22PF J	
C953			CK73FB1E225K	CHIP C 2.2UF K	
C954,955			CK73HB1H102K	CHIP C 1000PF K	
C956			CK73HB1H471K	CHIP C 470PF K	
C957			CK73EB1E106K	CHIP C 10UF K	
C958			CK73HB0J105K	CHIP C 1.0UF K	
CN702			E40-5932-05	SOCKET FOR PIN ASSY	
CN724			E40-6847-05	FLAT CABLE CONNECTOR	
CN751			E23-1262-05	TERMINAL	
J700	1B		E58-0536-05	SUB SOCKET (D)	
J701	2A		E11-0425-05	3.5D PHONE JACK (3P)	
F700			F53-0327-15	FUSE (4A)	
CD500			L79-1866-05	TUNING COIL	
CF500			L72-0993-05	CERAMIC FILTER	
CF501			L72-0959-05	CERAMIC FILTER	
L2			L41-4791-08	SMALL FIXED INDUCTOR (4.7NH)	
L3			L92-0442-05	CHIP FERRITE	
L4			L92-0443-05	CHIP FERRITE	
L5,6			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
L7			L92-0163-05	BEADS CORE	
L9			L92-0163-05	BEADS CORE	
L11-16			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L17			L92-0443-05	CHIP FERRITE	
L18,19			L41-2278-14	SMALL FIXED INDUCTOR (22NH)	M,HM,K
L18,19			L41-2278-14	SMALL FIXED INDUCTOR (22NH)	HK,HUK
L18,19			L41-2778-14	SMALL FIXED INDUCTOR (27NH)	M2,HK2
L20			L40-2702-86	SMALL FIXED INDUCTOR (27UH)	
L23			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
L24			L92-0443-05	CHIP FERRITE	
L25			L40-3375-71	SMALL FIXED INDUCTOR (33NH)	M2,HK2
L25,26			L40-3375-71	SMALL FIXED INDUCTOR (33NH)	M,HM,K
L25,26			L40-3375-71	SMALL FIXED INDUCTOR (33NH)	HK,HUK
L26			L40-3975-71	SMALL FIXED INDUCTOR (39NH)	M2,HK2
L34			L40-2702-86	SMALL FIXED INDUCTOR (27UH)	
L39			L40-1575-71	SMALL FIXED INDUCTOR (15NH)	
L300			L40-6865-71	SMALL FIXED INDUCTOR (6.8NH)	M2,HK2

Ref. No.	Address	New parts	Parts No.	Description	Destination
L300			L40-8265-71	SMALL FIXED INDUCTOR (8.2NH)	M,HM,K
L300			L40-8265-71	SMALL FIXED INDUCTOR (8.2NH)	HK,HUK
L301			L40-4768-71	SMALL FIXED INDUCTOR (4.7NH)	
L302			L40-8265-92	SMALL FIXED INDUCTOR (8.2NH)	M2,HK2
L302-304			L40-1075-92	SMALL FIXED INDUCTOR (10NH)	M,HM,K
L302-304			L40-1075-92	SMALL FIXED INDUCTOR (10NH)	HK,HUK
L303			L40-2775-92	SMALL FIXED INDUCTOR (27NH)	M2,HK2
L304			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	M2
L304,305			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	HK2
L305			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	M,HM,K
L305			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	HK,HUK
L305			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	M2
L308-310			L92-0179-05	CHIP FERRITE	
L311			L34-1039-05	AIR-CORE COIL	
L312			L34-4902-05	AIR-CORE COIL	
L313			L34-1039-05	AIR-CORE COIL	HM,HK,HUK
L313-315			L34-1039-05	AIR-CORE COIL	M2,HK2,M
L313-315			L34-1039-05	AIR-CORE COIL	K
L314,315			L34-1113-05	AIR-CORE COIL	HM,HK,HUK
L316			L34-4902-05	AIR-CORE COIL	
L501			L40-4781-86	SMALL FIXED INDUCTOR (0.47UH)	
L502			L40-3381-86	SMALL FIXED INDUCTOR (0.33UH)	
L503			L40-5681-86	SMALL FIXED INDUCTOR (0.56UH)	
L504			L40-1875-71	SMALL FIXED INDUCTOR (18NH)	
L505			L41-2785-39	SMALL FIXED INDUCTOR (0.27UH)	M,HM,K
L505			L41-2785-39	SMALL FIXED INDUCTOR (0.27UH)	HK,HUK
L505,506			L41-4785-39	SMALL FIXED INDUCTOR (0.47UH)	M2,HK2
L506			L41-6885-39	SMALL FIXED INDUCTOR (0.68UH)	M,HM,K
L506			L41-6885-39	SMALL FIXED INDUCTOR (0.68UH)	HK,HUK
L507			L40-1875-71	SMALL FIXED INDUCTOR (18NH)	
L511-513			L41-6868-14	SMALL FIXED INDUCTOR (6.8NH)	
L514			L41-2788-45	SMALL FIXED INDUCTOR (270NH)	
L515			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	
L517,518			L41-6868-14	SMALL FIXED INDUCTOR (6.8NH)	
L519			L41-8275-45	SMALL FIXED INDUCTOR (82NH)	
L700			L92-0443-05	CHIP FERRITE	
L702			L92-0443-05	CHIP FERRITE	
L705			L40-1575-71	SMALL FIXED INDUCTOR (15NH)	
L709			L92-0161-05	BEADS CORE	
L710			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
X1			L77-3055-05	TCXO (19.2MHZ)	
XF500			L71-0659-05	MCF (38.85MHZ)	
CP700-702			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP704-706			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
R3			RK73HB1J823J	CHIP R 82K J 1/16W	
R5-7			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R8			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R10			RK73HB1J100J	CHIP R 10 J 1/16W	
R12			RK73HB1J100J	CHIP R 10 J 1/16W	
R15			RK73HB1J473J	CHIP R 47K J 1/16W	
R20			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R21			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R22			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R23			RK73HB1J223J	CHIP R 22K J 1/16W	
R25			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R26			RK73HB1J153J	CHIP R 15K J 1/16W	
R27,28			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R29			RK73HB1J181J	CHIP R 180 J 1/16W	
R30			RK73HB1J000J	CHIP R 0.0 J 1/16W	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description				Destination
R31			RK73HB1J225J	CHIP R	2.2M	J	1/16W	
R32,33			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R34			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R35			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R36			RK73HB1J154J	CHIP R	150K	J	1/16W	M2,HK2
R36			RK73HB1J683J	CHIP R	68K	J	1/16W	M,HM,K
R36			RK73HB1J683J	CHIP R	68K	J	1/16W	HK,HUK
R37			RK73HB1J103J	CHIP R	10K	J	1/16W	
R38			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R39			RK73HB1J473J	CHIP R	47K	J	1/16W	
R40			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R41			RK73HB1J393J	CHIP R	39K	J	1/16W	
R43			RK73HB1J393J	CHIP R	39K	J	1/16W	
R45			RK73HB1J473J	CHIP R	47K	J	1/16W	
R46			RK73HB1J391J	CHIP R	390	J	1/16W	M,HM,K
R46			RK73HB1J391J	CHIP R	390	J	1/16W	HK,HUK
R46,47			RK73HB1J391J	CHIP R	390	J	1/16W	M2,HK2
R47			RK73HB1J681J	CHIP R	680	J	1/16W	M,HM,K
R47			RK73HB1J681J	CHIP R	680	J	1/16W	HK,HUK
R48			RK73GB2A104J	CHIP R	100K	J	1/10W	
R49			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R50			RK73HB1J680J	CHIP R	68	J	1/16W	
R51			RK73HB1J101J	CHIP R	100	J	1/16W	M2,HK2
R51			RK73HB1J151J	CHIP R	150	J	1/16W	M,HM,K
R51			RK73HB1J151J	CHIP R	150	J	1/16W	HK,HUK
R52			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R53			RK73HB1J124J	CHIP R	120K	J	1/16W	
R54			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R55			RK73HB1J101J	CHIP R	100	J	1/16W	
R57			RK73HB1J473J	CHIP R	47K	J	1/16W	M2,HK2
R57			RK73HB1J683J	CHIP R	68K	J	1/16W	M,HM,K
R57			RK73HB1J683J	CHIP R	68K	J	1/16W	HK,HUK
R58			RK73HB1J100J	CHIP R	10	J	1/16W	M2,HK2
R58,59			RK73HB1J101J	CHIP R	100	J	1/16W	M,HM,K
R58,59			RK73HB1J101J	CHIP R	100	J	1/16W	HK,HUK
R59			RK73HB1J101J	CHIP R	100	J	1/16W	M2,HK2
R60			RK73HB1J102J	CHIP R	1.0K	J	1/16W	M,HM,K
R60			RK73HB1J102J	CHIP R	1.0K	J	1/16W	HK,HUK
R60			RK73HB1J391J	CHIP R	390	J	1/16W	M2,HK2
R61			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R62			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R63			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R64			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R65			RK73HB1J103J	CHIP R	10K	J	1/16W	
R68,69			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R73			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R74			RK73HB1J560J	CHIP R	56	J	1/16W	
R75-78			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R81			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R83			RK73FB2B102J	CHIP R	1.0K	J	1/8W	
R303			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R306			RK73HB1J223J	CHIP R	22K	J	1/16W	
R321			RK73GB2A121J	CHIP R	120	J	1/10W	M,HM,K
R321			RK73GB2A121J	CHIP R	120	J	1/10W	HK,HUK
R321			RK73GB2A151J	CHIP R	150	J	1/10W	M2,HK2
R323			RK73GB2A390J	CHIP R	39	J	1/10W	M2,HK2
R323			RK73GB2A560J	CHIP R	56	J	1/10W	M,HM,K
R323			RK73GB2A560J	CHIP R	56	J	1/10W	HK,HUK
R324			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R325			RK73GB2A121J	CHIP R	120	J	1/10W	M,HM,K
R325			RK73GB2A121J	CHIP R	120	J	1/10W	HK,HUK
R325			RK73GB2A151J	CHIP R	150	J	1/10W	M2,HK2
R327			RK73HB1J101J	CHIP R	100	J	1/16W	
R329			RK73GB2A470J	CHIP R	47	J	1/10W	
R330			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R331			RK73HB1J224J	CHIP R	220K	J	1/16W	M2,HK2
R331			RK73HB1J334J	CHIP R	330K	J	1/16W	HM,HK,HUK
R331			RK73HB1J394J	CHIP R	390K	J	1/16W	M,K
R333,334			RK73HB1J103J	CHIP R	10K	J	1/16W	
R336			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R338			RK73HB1J183J	CHIP R	18K	J	1/16W	M2
R338			RK73HB1J223J	CHIP R	22K	J	1/16W	HK2
R338			RK73HB1J333J	CHIP R	33K	J	1/16W	M,HM,K
R338			RK73HB1J333J	CHIP R	33K	J	1/16W	HK,HUK
R341			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R342			RK73HB1J104J	CHIP R	100K	J	1/16W	
R343			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R345			RK73HB1J104J	CHIP R	100K	J	1/16W	
R346			RK73HB1J473J	CHIP R	47K	J	1/16W	
R347			RK73GH2A201D	CHIP R	200	D	1/10W	M2,HK2
R347			RK73GH2A560D	CHIP R	56	D	1/10W	M,HM,K
R347			RK73GH2A560D	CHIP R	56	D	1/10W	HK,HUK
R348			RK73HB1J104J	CHIP R	100K	J	1/16W	
R349			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R352			RK73GH2A201D	CHIP R	200	D	1/10W	
R353			RK73RB2H101J	CHIP R	100	J	1/2W	
R354,355			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R357,358			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R361			RK73GH2A121D	CHIP R	120	D	1/10W	
R367			RK73GH2A181D	CHIP R	180	D	1/10W	
R369,370			RK73HB1J104J	CHIP R	100K	J	1/16W	
R374	2B		R92-1061-05	JUMPER REST			0 OHM	
R375			RK73HB1J104J	CHIP R	100K	J	1/16W	
R376			RK73HB1J103J	CHIP R	10K	J	1/16W	
R381			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R382-384			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R387,388			RK73HB1J104J	CHIP R	100K	J	1/16W	
R500			RK73HB1J122J	CHIP R	1.2K	J	1/16W	
R501			RK73HB1J334J	CHIP R	330K	J	1/16W	
R502			RK73HB1J101J	CHIP R	100	J	1/16W	
R503-508			RK73HB1J103J	CHIP R	10K	J	1/16W	
R509			RK73GB2A100J	CHIP R	10	J	1/10W	
R510			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R511			RK73HB1J394J	CHIP R	390K	J	1/16W	
R512			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R513			RK73HB1J394J	CHIP R	390K	J	1/16W	
R515			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R517			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R519			RK73HB1J392J	CHIP R	3.9K	J	1/16W	
R520			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R522			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R524			RK73HB1J101J	CHIP R	100	J	1/16W	
R525			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R527			RK73HB1J224J	CHIP R	220K	J	1/16W	
R528			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R530			RK73HB1J391J	CHIP R	390	J	1/16W	
R531			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R532			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R533			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R534			RK73HB1J391J	CHIP R	390	J	1/16W	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description				Destination
R537			RK73HB1J104J	CHIP R	100K	J	1/16W	
R539			RK73HB1J470J	CHIP R	47	J	1/16W	
R543,544			RK73HB1J823J	CHIP R	82K	J	1/16W	
R545			RK73HB1J224J	CHIP R	220K	J	1/16W	
R546			RK73HB1J684J	CHIP R	680K	J	1/16W	
R547			RK73HB1J151J	CHIP R	150	J	1/16W	M2,HK2
R547			RK73HB1J391J	CHIP R	390	J	1/16W	M,HM,K
R547			RK73HB1J391J	CHIP R	390	J	1/16W	HK,HUK
R548			RK73HB1J394J	CHIP R	390K	J	1/16W	
R549			RK73HB1J154J	CHIP R	150K	J	1/16W	
R550			RK73HB1J270J	CHIP R	27	J	1/16W	
R553			RK73HB1J000J	CHIP R	0.0	J	1/16W	M2,HK2
R553			RK73HB1J270J	CHIP R	27	J	1/16W	M,HM,K
R553			RK73HB1J270J	CHIP R	27	J	1/16W	HK,HUK
R554			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R560			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R562			RK73HB1J000J	CHIP R	0.0	J	1/16W	M,HM,K
R562			RK73HB1J000J	CHIP R	0.0	J	1/16W	HK,HUK
R562			RK73HB1J270J	CHIP R	27	J	1/16W	M2,HK2
R563			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R564			RK73HB1J223J	CHIP R	22K	J	1/16W	
R565			RK73HB1J221J	CHIP R	220	J	1/16W	
R566			RK73HB1J104J	CHIP R	100K	J	1/16W	
R567			RK73HB1J564J	CHIP R	560K	J	1/16W	
R568			RK73HB1J223J	CHIP R	22K	J	1/16W	
R569			RK73HB1J823J	CHIP R	82K	J	1/16W	
R570			RK73HB1J683J	CHIP R	68K	J	1/16W	
R572			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R573,574			RK73HB1J223J	CHIP R	22K	J	1/16W	
R576			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R577			RK73FB2B000J	CHIP R	0.0	J	1/8W	
R579			RK73HB1J104J	CHIP R	100K	J	1/16W	
R580			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R589			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R590			RK73HB1J823J	CHIP R	82K	J	1/16W	
R591			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R701			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R703			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R704			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R705			RK73HB1J681J	CHIP R	680	J	1/16W	
R708			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R709			RK73HB1J561J	CHIP R	560	J	1/16W	
R710			RK73GB2A124J	CHIP R	120K	J	1/10W	
R711			RK73HB1J821J	CHIP R	820	J	1/16W	
R712			RK73HB1J561J	CHIP R	560	J	1/16W	
R713			RK73HB1J104J	CHIP R	100K	J	1/16W	
R714,715			RK73HB1J223J	CHIP R	22K	J	1/16W	
R716			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R717			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R718			RK73HB1J563J	CHIP R	56K	J	1/16W	
R719			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R720			RK73HB1J101J	CHIP R	100	J	1/16W	
R722			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R723			RK73HB1J334J	CHIP R	330K	J	1/16W	
R724			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R725,726			RK73HH1J473D	CHIP R	47K	D	1/16W	
R727			RK73HB1J473J	CHIP R	47K	J	1/16W	
R728			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R729			RK73HB1J104J	CHIP R	100K	J	1/16W	
R730			RK73HB1J000J	CHIP R	0.0	J	1/16W	

Ref. No.	Address	New parts	Parts No.	Description				Destination
R731			RK73HB1J104J	CHIP R	100K	J	1/16W	
R732			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R733			RK73HB1J103J	CHIP R	10K	J	1/16W	
R734,735			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R736			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R737			RK73HB1J273J	CHIP R	27K	J	1/16W	
R738			RK73HB1J562J	CHIP R	5.6K	J	1/16W	
R739			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R741			RK73HB1J563J	CHIP R	56K	J	1/16W	
R742			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R743			RK73HB1J104J	CHIP R	100K	J	1/16W	
R747			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R748			RK73HB1J104J	CHIP R	100K	J	1/16W	
R749			RK73GB2A000J	CHIP R	0.0	J	1/10W	M2,HK2
R749			RK73GB2A100J	CHIP R	10	J	1/10W	M,HM,K
R749			RK73GB2A100J	CHIP R	10	J	1/10W	HK,HUK
R751			RK73HB1J104J	CHIP R	100K	J	1/16W	
R752			RK73HB1J101J	CHIP R	100	J	1/16W	
R753			RK73GB2A104J	CHIP R	100K	J	1/10W	
R754			RK73HB1J104J	CHIP R	100K	J	1/16W	
R755			RK73HB1J101J	CHIP R	100	J	1/16W	
R756			RK73HB1J104J	CHIP R	100K	J	1/16W	
R758			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R759			RK73HB1J154J	CHIP R	150K	J	1/16W	
R760			RK73HB1J104J	CHIP R	100K	J	1/16W	
R761			RK73HB1J101J	CHIP R	100	J	1/16W	
R762			RK73HB1J104J	CHIP R	100K	J	1/16W	
R763			RK73HB1J101J	CHIP R	100	J	1/16W	
R764			RK73HB1J682J	CHIP R	6.8K	J	1/16W	
R765			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R766			RK73HB1J682J	CHIP R	6.8K	J	1/16W	
R767			RK73HB1J393J	CHIP R	39K	J	1/16W	
R770			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R771			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R773			RK73HB1J123J	CHIP R	12K	J	1/16W	M,HM,K
R773			RK73HB1J123J	CHIP R	12K	J	1/16W	HK,HUK
R773			RK73HB1J562J	CHIP R	5.6K	J	1/16W	M2,HK2
R774			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R775			RK73HB1J154J	CHIP R	150K	J	1/16W	
R776			RK73HB1J103J	CHIP R	10K	J	1/16W	
R778,779			RK73HB1J473J	CHIP R	47K	J	1/16W	
R780			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R781			RK73HB1J104J	CHIP R	100K	J	1/16W	
R782			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R783			RK73HB1J473J	CHIP R	47K	J	1/16W	
R784			RK73HB1J104J	CHIP R	100K	J	1/16W	
R785			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R786			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R787			RK73HB1J153J	CHIP R	15K	J	1/16W	
R789			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R790			RK73HB1J123J	CHIP R	12K	J	1/16W	
R791			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R792			RK73GH2A134D	CHIP R	130K	D	1/10W	
R793			RK73GH2A183D	CHIP R	18K	D	1/10W	
R794-797			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R798			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R799-801			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R802			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R803			RK73HB1J103J	CHIP R	10K	J	1/16W	
R806-808			RK73HB1J000J	CHIP R	0.0	J	1/16W	

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R811			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R812			RK73HB1J473J	CHIP R 47K J 1/16W	
R815			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R817-819			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R820			RK73HB1J473J	CHIP R 47K J 1/16W	
R821			RK73HB1J471J	CHIP R 470 J 1/16W	
R823			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R824			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R825			RK73HB1J473J	CHIP R 47K J 1/16W	
R826			RK73HB1J223J	CHIP R 22K J 1/16W	
R827			RK73HB1J473J	CHIP R 47K J 1/16W	
R829			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R831,832			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R833-835			RK73HB1J103J	CHIP R 10K J 1/16W	
R836			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R837			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R838			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R839			RK73HB1J473J	CHIP R 47K J 1/16W	
R840			RK73HB1J683J	CHIP R 68K J 1/16W	
R841			RK73HB1J473J	CHIP R 47K J 1/16W	
R842			RK73HB1J823J	CHIP R 82K J 1/16W	
R843			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R845			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R846			RK73GB2A221J	CHIP R 220 J 1/10W	
R847			RK73HB1J391J	CHIP R 390 J 1/16W	
R848			RK73GB2A473J	CHIP R 47K J 1/10W	
R849			RK73FB2B000J	CHIP R 0.0 J 1/8W	
R850			RK73GB2A334J	CHIP R 330K J 1/10W	
R851			RK73HB1J474J	CHIP R 470K J 1/16W	
R852			RK73HB1J564J	CHIP R 560K J 1/16W	
R853			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R854			RK73GB2A104J	CHIP R 100K J 1/10W	
R855			RK73HB1J101J	CHIP R 100 J 1/16W	
R856			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R857			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R858			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R859-863			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R867,868			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R869			RK73HB1J104J	CHIP R 100K J 1/16W	
R870,871			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R873-876			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R877			RK73HB1J473J	CHIP R 47K J 1/16W	
R878,879			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R880,881			RK73HB1J104J	CHIP R 100K J 1/16W	
R882			RK73HB1J823J	CHIP R 82K J 1/16W	
R884			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R885			RK73HB1J683J	CHIP R 68K J 1/16W	
R886			RK73HB1J823J	CHIP R 82K J 1/16W	
R887			RK73FB2B000J	CHIP R 0.0 J 1/8W	
R888			RK73GB2A473J	CHIP R 47K J 1/10W	
R889			RK73GB2A221J	CHIP R 220 J 1/10W	
R890			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R891-893			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R894,895			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R896			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R899			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R928,929			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R930			RK73HB1J223J	CHIP R 22K J 1/16W	
R931			RK73HB1J103J	CHIP R 10K J 1/16W	
R932			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R933			RK73GB2A000J	CHIP R 0.0 J 1/10W	M2,M,HM
R933			RK73GB2A000J	CHIP R 0.0 J 1/10W	K,HUK
R934			RK73GB2A000J	CHIP R 0.0 J 1/10W	HK2,HK
R935			RK73HB1J473J	CHIP R 47K J 1/16W	
R938			RK73HB1J473J	CHIP R 47K J 1/16W	
R939,940			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R950			RK73HB1J473J	CHIP R 47K J 1/16W	
R951,952			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R955			RK73HB1J563J	CHIP R 56K J 1/16W	
R956			RK73HB1J561J	CHIP R 560 J 1/16W	
R957			RK73HB1J563J	CHIP R 56K J 1/16W	
R958			RK73HB1J561J	CHIP R 560 J 1/16W	
R959			RK73HB1J184J	CHIP R 180K J 1/16W	
R960			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R961			RK73HB1J184J	CHIP R 180K J 1/16W	
R962			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R963			RK73GH2A101D	CHIP R 100 D 1/10W	M,K
R963			RK73GH2A820D	CHIP R 82 D 1/10W	HM,HK,HUK
R963,964			RK73GH2A101D	CHIP R 100 D 1/10W	M2,HK2
R965			RK73HB1J473J	CHIP R 47K J 1/16W	
R967			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R968			RK73HB1J104J	CHIP R 100K J 1/16W	
R971			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R972			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R973,974			RK73HB1J100J	CHIP R 10 J 1/16W	
R975,976			RK73HB1J471J	CHIP R 470 J 1/16W	
R977,978			RK73HB1J473J	CHIP R 47K J 1/16W	
R979-998			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R999			RK73HB1J473J	CHIP R 47K J 1/16W	
D1			1SS389-F	DIODE	
D4-11			1SV325F	VARIABLE CAPACITANCE DIODE	
D12			1SV278F	VARIABLE CAPACITANCE DIODE	
D300			UDZW5.1(B)	ZENER DIODE	
D301			1SS355	DIODE	
D302,303			L407CDB	DIODE (50V/1W)	
D304,305			L7091CER	DIODE	
D310,311			UDZW3.3(B)	ZENER DIODE	
D312			HSC277	DIODE	
D313,314		✻	HSB88AS-E	DIODE	M2,M,HM
D313,314		✻	HSB88AS-E	DIODE	K,HK,HUK
D313,314			MA3J742	DIODE	HK2
D500,501			MC2858	DIODE	
D505,506			1SV305F	VARIABLE CAPACITANCE DIODE	
D508-510			1SV305F	VARIABLE CAPACITANCE DIODE	
D511			HVC369B	VARIABLE CAPACITANCE DIODE	
D700-710			DA221	DIODE	
D711			MC2858	DIODE	
D712			1SS372F	DIODE	
D715			UDZW18(B)	ZENER DIODE	
D717			Z5W27V	SURGE ABSORBER	
D718			MA2S111-F	DIODE	
D719,720			HVC131	DIODE	
IC1			MB15E03SL-E1	MOS-IC	
IC2			BD7542FVM	MOS-IC	
IC300			HA17358BFEL-E	MOS-IC	
IC301	2B		RA60H40471101	MOS-IC	HK2
IC301	2B		RA60H44521101	MOS-IC	HM,HK,HUK
IC301	2B		S-AU83AH	MOS-IC	M,K
IC301	2B		S-AU83AL	MOS-IC	M2

If a part reference number is listed in a shaded box, that part does not come with the PCB.

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M

PARTS LIST

TX-RX UNIT (X57-7680-XX)


Ref. No.	Address	New parts	Parts No.	Description	Destination
IC500			TA31136FNG	MOS-IC	
IC501			HA17358BFEL-E	MOS-IC	
IC700			NJM2100V-ZB	MOS-IC	
IC701			CD686Q3	MOS-IC	
IC702		*	F364AEDFBKCUB	MICROCONTROLLER IC	
IC703			EX24064ASAS0A	ROM IC	
IC704			TA4809BF	ANALOGUE IC	
IC705	2A		LA4600	BI-POLAR IC	
IC706			XC6221B332NR	MOS-IC	
IC707			TA7805FQ	MOS-IC	
IC708			BD4740G	MOS-IC	
IC709			XC6120N402N1	MOS-IC	
IC710			XC6221B332NR	MOS-IC	
Q3			2SC5108(Y)F	TRANSISTOR	
Q4			MCH3914(7)-H	FET	
Q5			2SJ347F	FET	
Q6			MCH3914(7)-H	FET	
Q7			KRX102U	TRANSISTOR	
Q8			KTC4075E(Y,GR)	TRANSISTOR	
Q9,10			2SC5108(Y)F	TRANSISTOR	
Q11			SSM3J05FU-F	FET	
Q12			2SK1830F	FET	
Q300			RD00HVS1-T113	FET	
Q500			2SC5108(Y)F	TRANSISTOR	
Q501			RT1P441U	TRANSISTOR	
Q502			2SC5108(Y)F	TRANSISTOR	
Q504			3SK318	FET	
Q506			3SK318	FET	
Q507			RT1N441U	TRANSISTOR	
Q510			RT1N441U	TRANSISTOR	
Q511			KTC4075E(Y,GR)	TRANSISTOR	
Q701			2SK1830F	FET	
Q702			2SC4919	TRANSISTOR	
Q703			KTC4075E(Y,GR)	TRANSISTOR	
Q705			SSM3J05FU-F	FET	
Q707		*	RT1N440M-T111	TRANSISTOR	
Q710-712			RT1N441U	TRANSISTOR	
Q713,714			2SB1694	TRANSISTOR	
Q715			SSM3K05FU	FET	
Q717,718			SSM3J05FU-F	FET	
Q719			KTC4075E(Y,GR)	TRANSISTOR	
Q720			2SJ645	FET	
Q721			RT1N441U	TRANSISTOR	
Q722			KTC4075E(Y,GR)	TRANSISTOR	
Q723			SSM3K05FU	FET	
Q724			2SJ645	FET	
Q725			KTC4075E(Y,GR)	TRANSISTOR	
Q728			2SC4116(Y)F	TRANSISTOR	
Q729,730			KTC4075E(Y,GR)	TRANSISTOR	
Q731,732			2SC5108(Y)F	TRANSISTOR	
TH300-302			B57331V2104J	THERMISTOR	
TH501			NCP18WM224J0S	THERMISTOR	

Ref. No.	Address	New parts	Parts No.	Description	Destination

K: TK-8302(U) K HK: TK-8302H K HK2: TK-8302H K2
HUK: TK-8302H(U) K M: TK-8302 M M2: TK-8302 M2 HM: TK-8302H M


If a part reference number is listed in a shaded box, that part does not come with the PCB.

EXPLODED VIEW

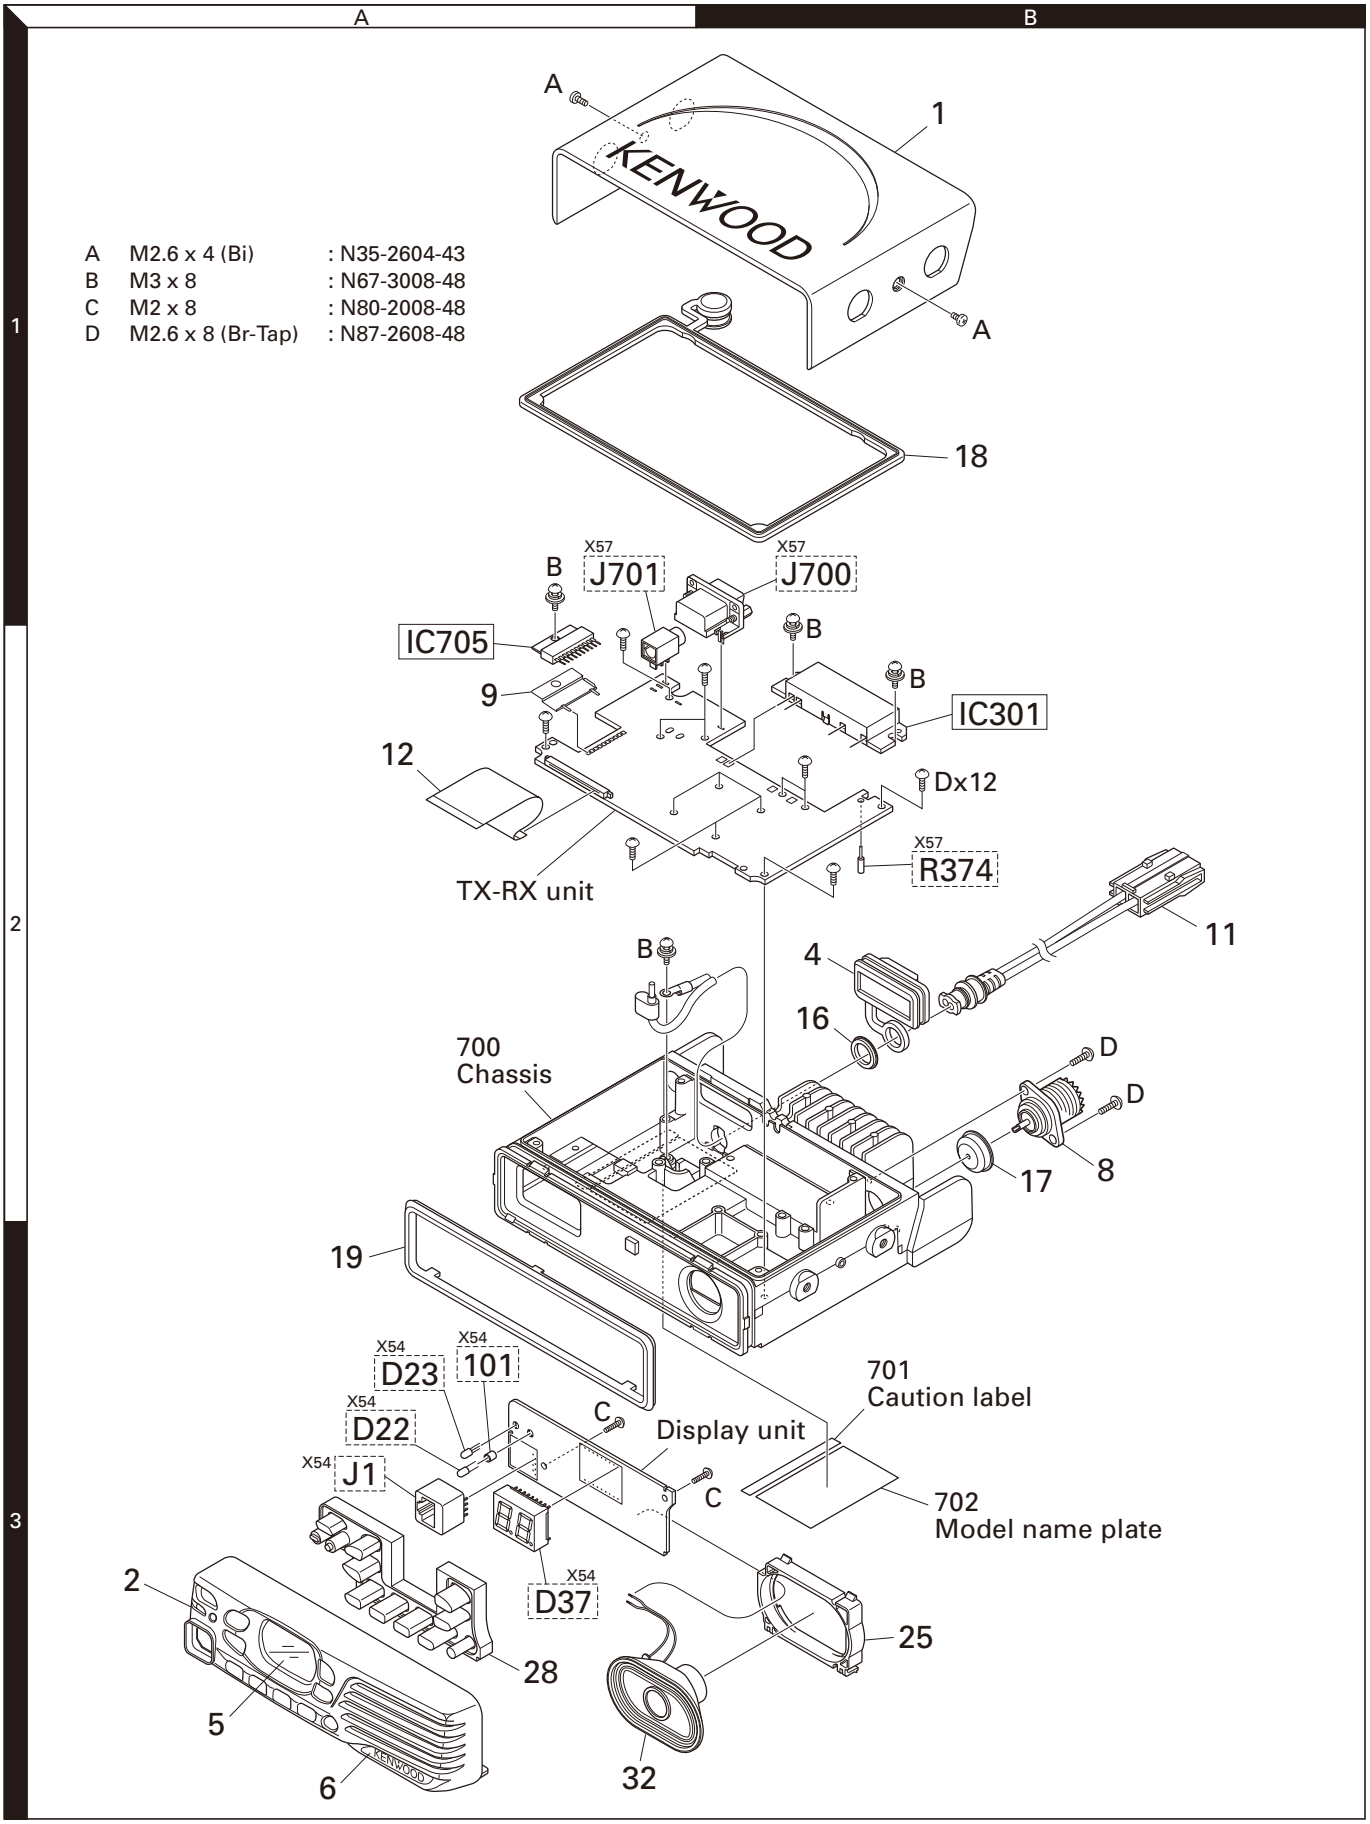

Parts with the exploded numbers larger than 700 are not supplied.
If a part reference number is listed in a box on the exploded view of the PCB, that part does not come with the PCB.
These parts must be ordered separately.

PACKING

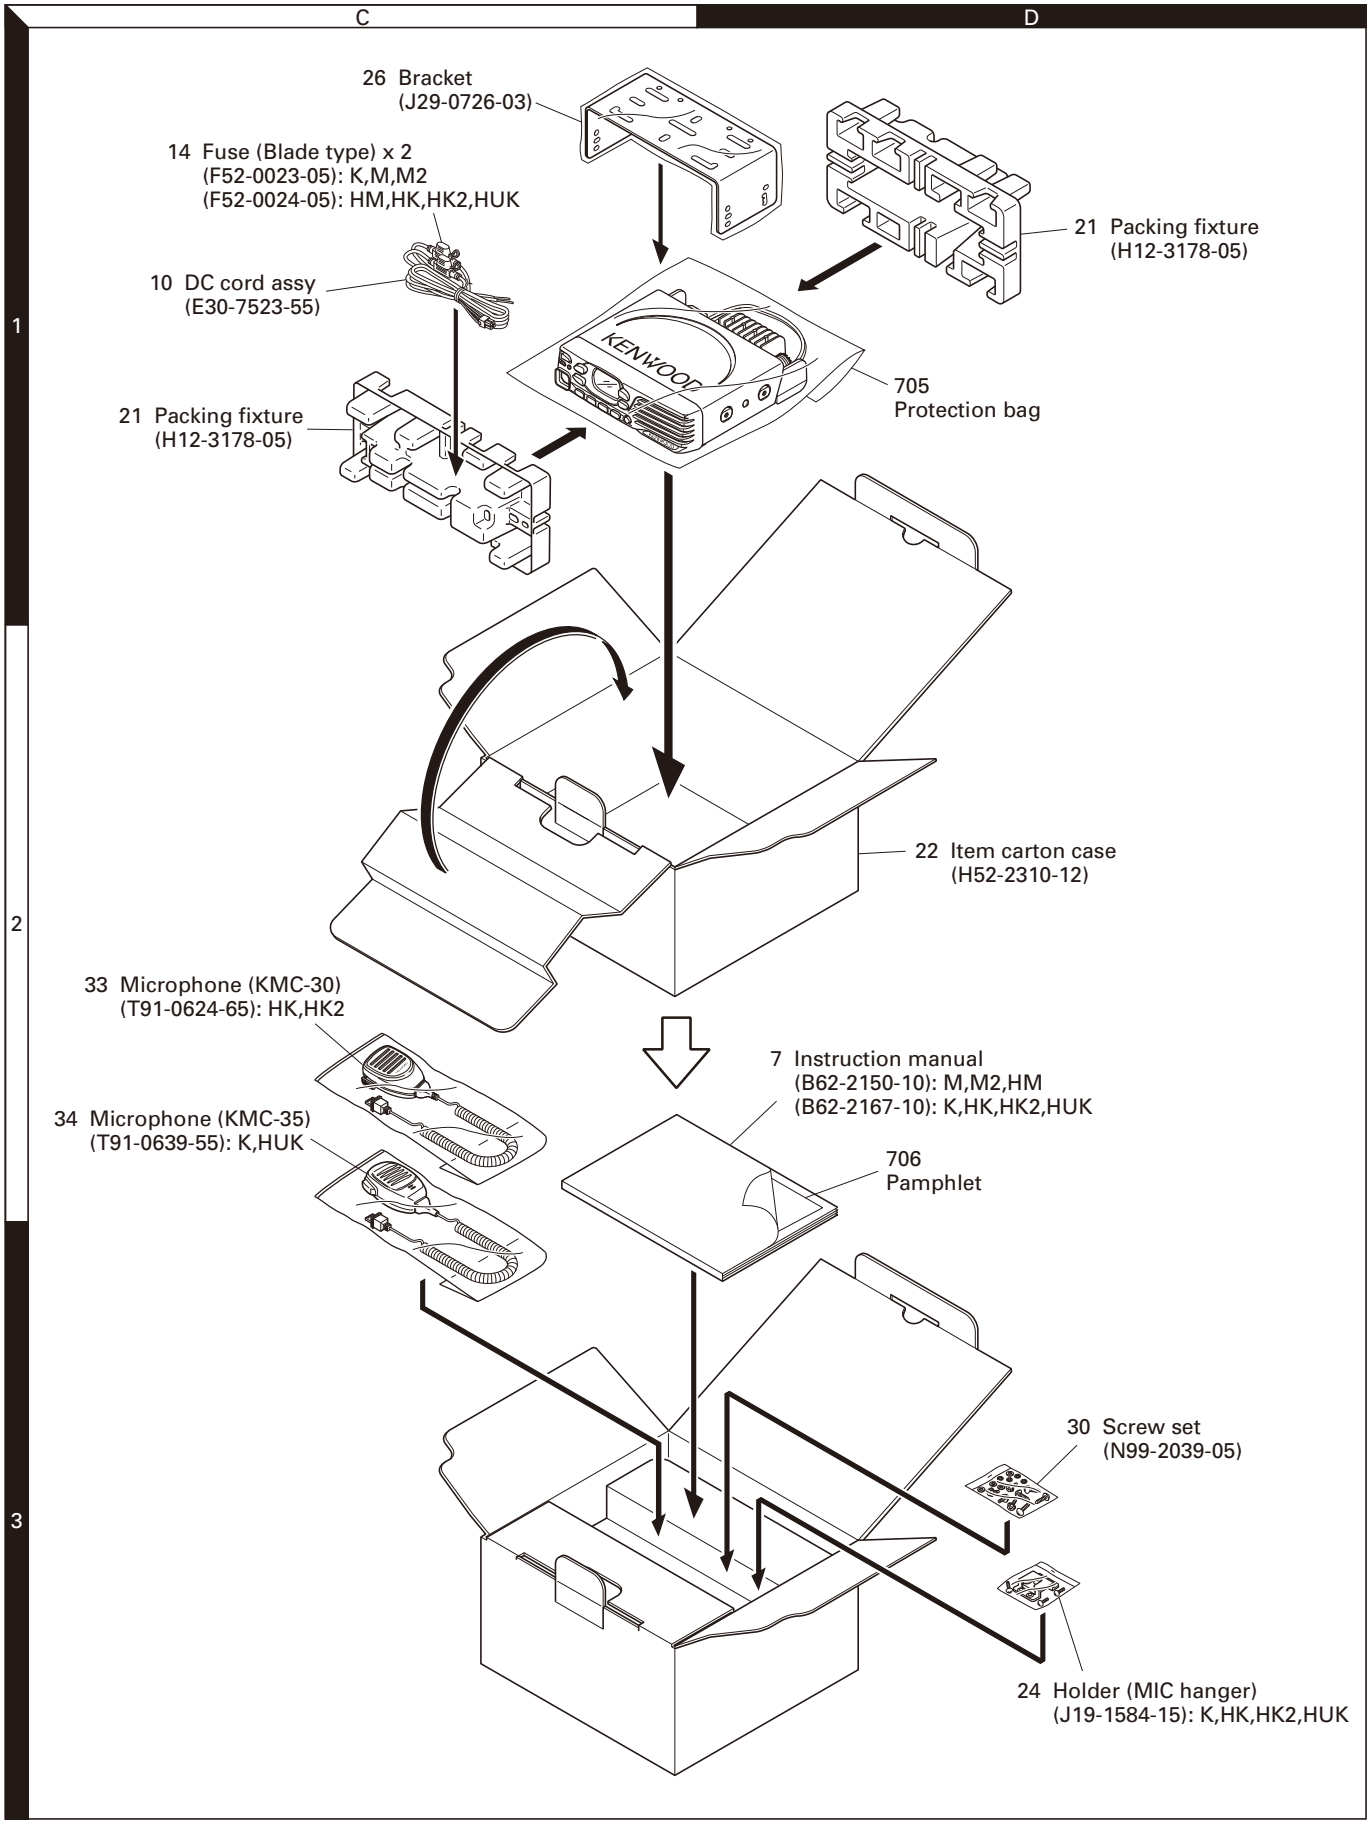

Parts with the exploded numbers larger than 700 are not supplied.