2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

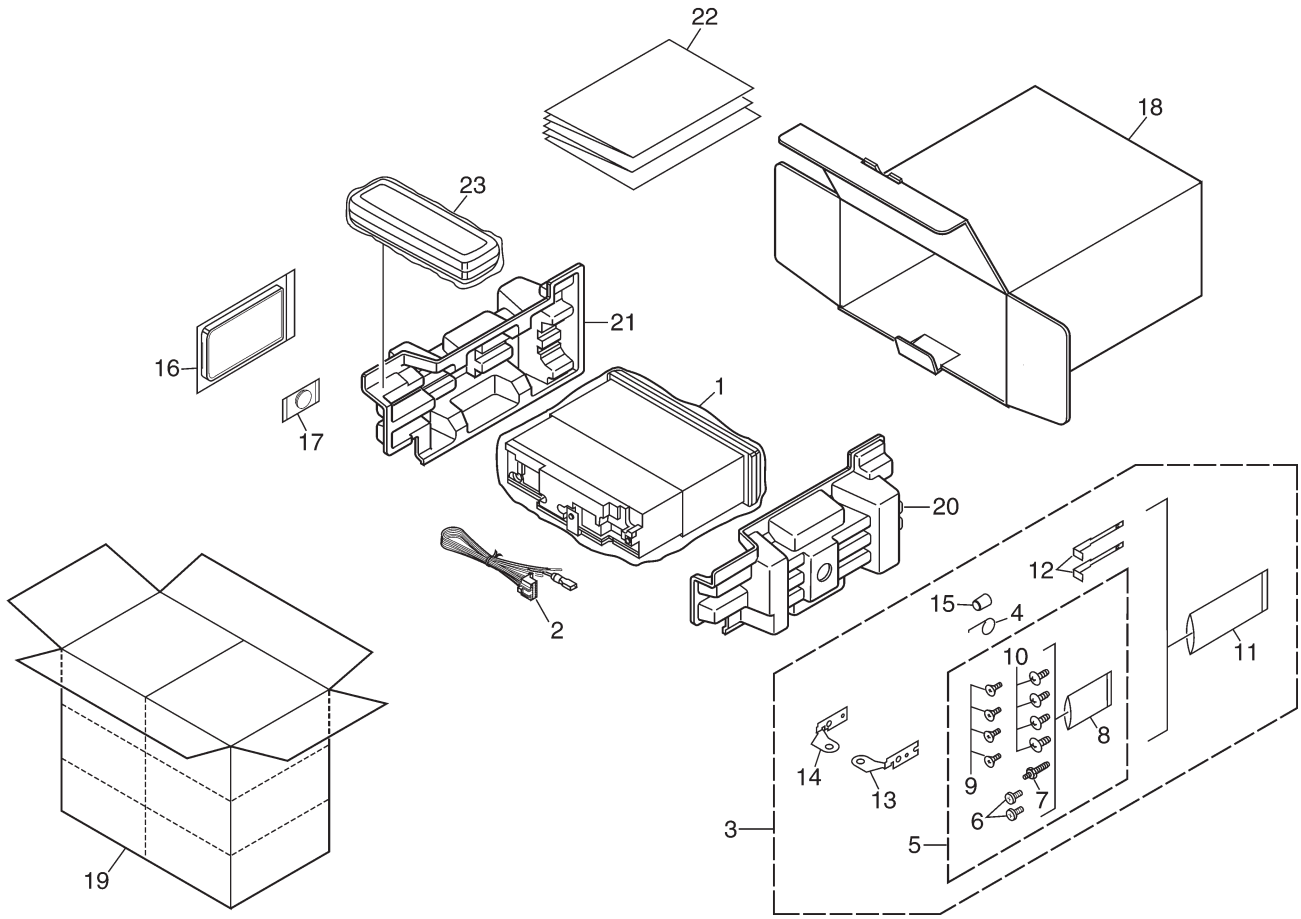

NOTE:

- Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ∇ mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
  (In the case of no amount instructions, apply as you think it appropriate.)

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Polyethylene Bag	See Contrast table(2)
	2	Cord Assy	CDE7154
	3	Accessory Assy	See Contrast table(2)
	4	Spring	CBH1650
	5	Screw Assy	See Contrast table(2)
	6	Fixing Screw	See Contrast table(2)
	7	Screw	CBA1650
*	8	Polyethylene Bag	CEG-127
	9	Screw	CRZ50P090FTC
	10	Screw	TRZ50P080FTC
*	11	Polyethylene Bag	CEG-158
	12	Handle	CNC5395
	13	Holder	See Contrast table(2)
	14	Holder	See Contrast table(2)
	15	Bush	CNV3930
	16	Remote Control Unit	See Contrast table(2)
*	17	Battery	See Contrast table(2)
	18	Carton	See Contrast table(2)
	19	Contain Box	See Contrast table(2)
	20	Protector	CHP2663
	21	Protector	CHP2664
	22-1	Owner's Manual	See Contrast table(2)
	22-2	Owner's Manual	See Contrast table(2)
	22-3	Installation Manual	See Contrast table(2)
*	22-4	Caution Card	See Contrast table(2)
*	22-5	Card	See Contrast table(2)
*	22-6	Caution Card	CRP1207
*	22-7	Warranty Card	See Contrast table(2)
	23	Case Assy	CXB3520

(2) CONTRAST TABLE

DEH-P750MP/XN/UC, DEH-P7500MP/XN/UC and DEH-P7550MP/XN/ES are constructed the same except for the following:

Mark No.	Symbol and Description	Part No. DEH-P750MP/XN/UC	DEH-P7500MP/XN/UC	DEH-P7550MP/XN/ES
1	Polyethylene Bag	CEG1173	CEG1173	CEG-162
3	Accessory Assy	CEA3376	CEA3376	CEA3439
5	Screw Assy	CEA3848	CEA3848	CEA3849
6	Fixing Screw	BPZ20P060FZK	BPZ20P060FZK	Not used
13	Holder	CND1249	CND1249	Not used
14	Holder	CND1250	CND1250	Not used
16	Remote Cotrol Unit	CXC1361	CXC1361	CXC1265
* 17	Battery	Not used	Not used	CEX1065
18	Carton	CHG5089	CHG5088	CHG5087
19	Contain Box	CHL5089	CHL5088	CHL5087
22-1	Owner's Manual	CRD3767	CRD3769	CRD3771
22-2	Owner's Manual	Not used	Not used	CRD3772
22-3	Installation Manual	CRD3768	CRD3770	CRD3773
* 22-4	Caution Card	Not used	Not used	CRP1216
* 22-5	Card	Not used	ARY1048	Not used
* 22-7	Warranty Card	CRY1070	Not used	Not used

● Owner's Manual, Installation Manual

Model	Part No.	Language
DEH-P750MP/XN/UC	CRD3767	English, Spanish
	CRD3768	English, Spanish
DEH-P7500MP/XN/UC	CRD3769	English, Spanish
	CRD3770	English, Spanish
DEH-P7550MP/XN/ES	CRD3771	English, Spanish, Portuguese(B)
	CRD3772	Traditional chinese, Arabic
	CRD3773	English, Spanish, Portuguese(B), Traditional chinese, Arabic

2.2 EXTERIOR(DEH-P750MP/XN/UC,DEH-P7500MP/XN/UC)

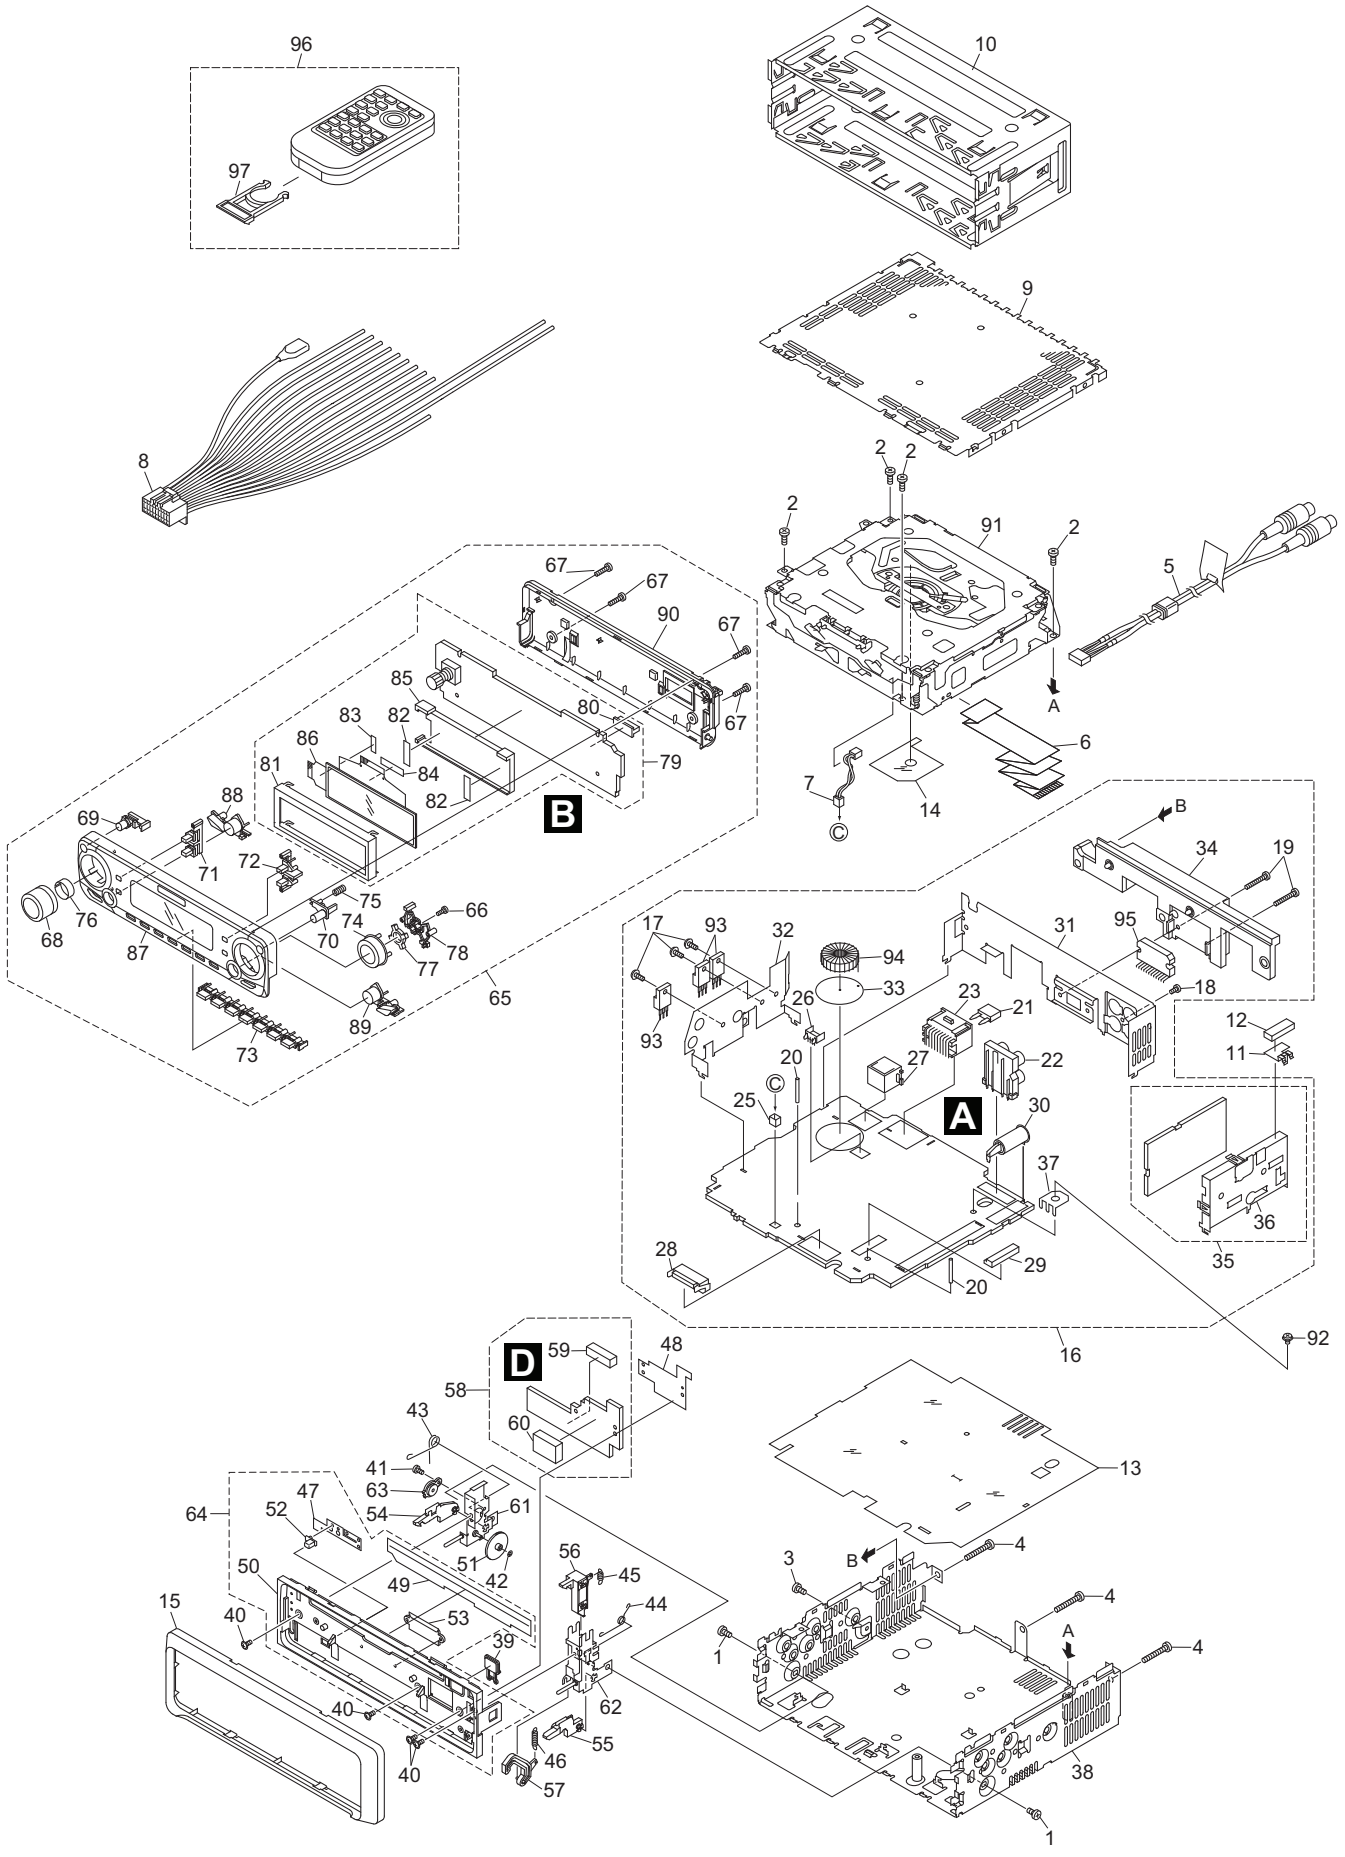

(1) EXTERIOR(DEH-P750MP/XN/UC, DEH-P7500MP/XN/UC) SECTION PARTS LIST

Mark No.	Description	Part No.
1	Screw	BMZ30P040FZK
2	Screw	BSZ26P060FTC
3	Screw	BSZ30P060FTC
4	Screw	BSZ30P200FTC
5	Cord Assy	CDE7129
6	Flat Cable	CDE7149
7	Cord Assy	CDE7150
8	Cord Assy	CDE7154
9	Case	CNB2870
10	Holder	CNC8659
11	Earth Plate	CNC8915
12	Cushion	CNM4870
13	Insulator	CNM7935
14	Insulator	CNM8174
15	Panel	See Contrast table(2)
16	Tuner Amp Unit	See Contrast table(2)
17	Screw	ASZ26P060FTC
18	Screw	BPZ26P080FTC
19	Screw	BSZ26P160FTC
20	Clamper	CEF1035
21	Fuse(10A)	CEK1208
22	Pin Jack(CN361)	CKB1051
23	Plug(CN981)	CKM1376
24	•••••	
25	Plug(CN704)	CKS-783
26	Plug(CN362)	CKS1238
27	Connector(CN101)	CKS3408
28	Plug(CN801)	CKS3537
29	Connector(CN701)	CKS3837
30	Antenna Jack(CN401)	CKX1056
31	Holder	CND1239
32	Holder	CND1352
33	Insulator	CNM8245
34	Heat Sink	CNR1668
35	FM/AM Tuner Unit	CWE1646
36	Holder	CND1054
37	Terminal(CN402)	VNF1084
38	Chassis Unit	CXB9528
39	Button(EJECT)	CAC7752
40	Screw(M2x4.5)	CBA1647
41	Screw(M2x4)	CBA1649
42	Washer	CBF1038
43	Spring	CBH2650
44	Spring	CBH2651
45	Spring	CBH2652
46	Spring	CBH2653
47	Spring	CBL1512
48	Holder	CND1254
49	Cover	CNM6854
50	Panel	CNS7245

Mark No.	Description	Part No.
51	Gear	CNV5997
52	Pin	CNV6486
53	Lighting Conductor	CNV6487
54	Arm	CNV7400
55	Arm	CNV7401
56	Arm	CNV7402
57	Arm	CNV7403
58	Panel Unit	CWM8758
59	Socket(CN1950)	CKS3550
60	Connector(CN1951)	CKS4462
61	Holder Unit	CXB9501
62	Holder Unit	CXB9502
63	Damper Unit	CXB9503
64	Panel Unit(Service)	CXX1691
65	Detach Grille Assy	See Contrast table(2)
66	Screw	BPZ20P060FTC
67	Screw	BPZ20P100FZK
68	Knob	See Contrast table(2)
69	Button(CLK)	CAC7751
70	Button(OPEN)	CAC7728
71	Button(TEXT/SCRL)	CAC7737
72	Button(AUDIO/FUNC)	CAC7738
73	Button(1-6)	CAC7750
74	Button(CROSS)	See Contrast table(2)
75	Spring	CBH2654
76	Spring	CBL1470
77	Cushion	CNM8291
78	Holder	CNV7405
79	Keyboard Unit	CWM8713
80	Connector(CN1901)	CKS4524
81	Holder	CND1354
82	Cushion	CNM6633
83	Spacer	CNM7697
84	Spacer	CNM7698
85	Holder	CNV6910
86	OEL Unit	MXS8045
87	Grille Unit	See Contrast table(2)
88	Button Unit(SRC/EQ)	CXB9924
89	Button Unit(EQ-EX/BAND)	CXB9925
90	Cover	XNS7014
91	CD Mechanism Module(S10MP3)	CXK5662
92	Screw	ISS26P055FTC
93	Transistor(Q742,901,921)	2SD2375
94	Choke Coil(L981)	CTH1280
95	IC(IC301)	PAL007A
96	Remote Control Unit	CXC1361
97	Cover	CZN5357

(2) CONTRAST TABLE

DEH-P750MP/XN/UC and DEH-P7500MP/XN/UC are constructed the same except for the following:

Mark No.	Symbol and Description	Part No. DEH-P750MP/XN/UC	Part No. DEH-P7500MP/XN/UC
15	Panel	CNS6935	CNS6934
16	Tuner Amp Unit	CWM8707	CWM8708
65	Detach Grille Assy	CXB9914	CXB9913
68	Knob	CAA2764	CAA2761
74	Button(CROSS)	CAC7843	CAC7863
87	Grille Unit	CXB9855	CXB9853

2.3 EXTERIOR(DEH-P7550MP/XN/ES)

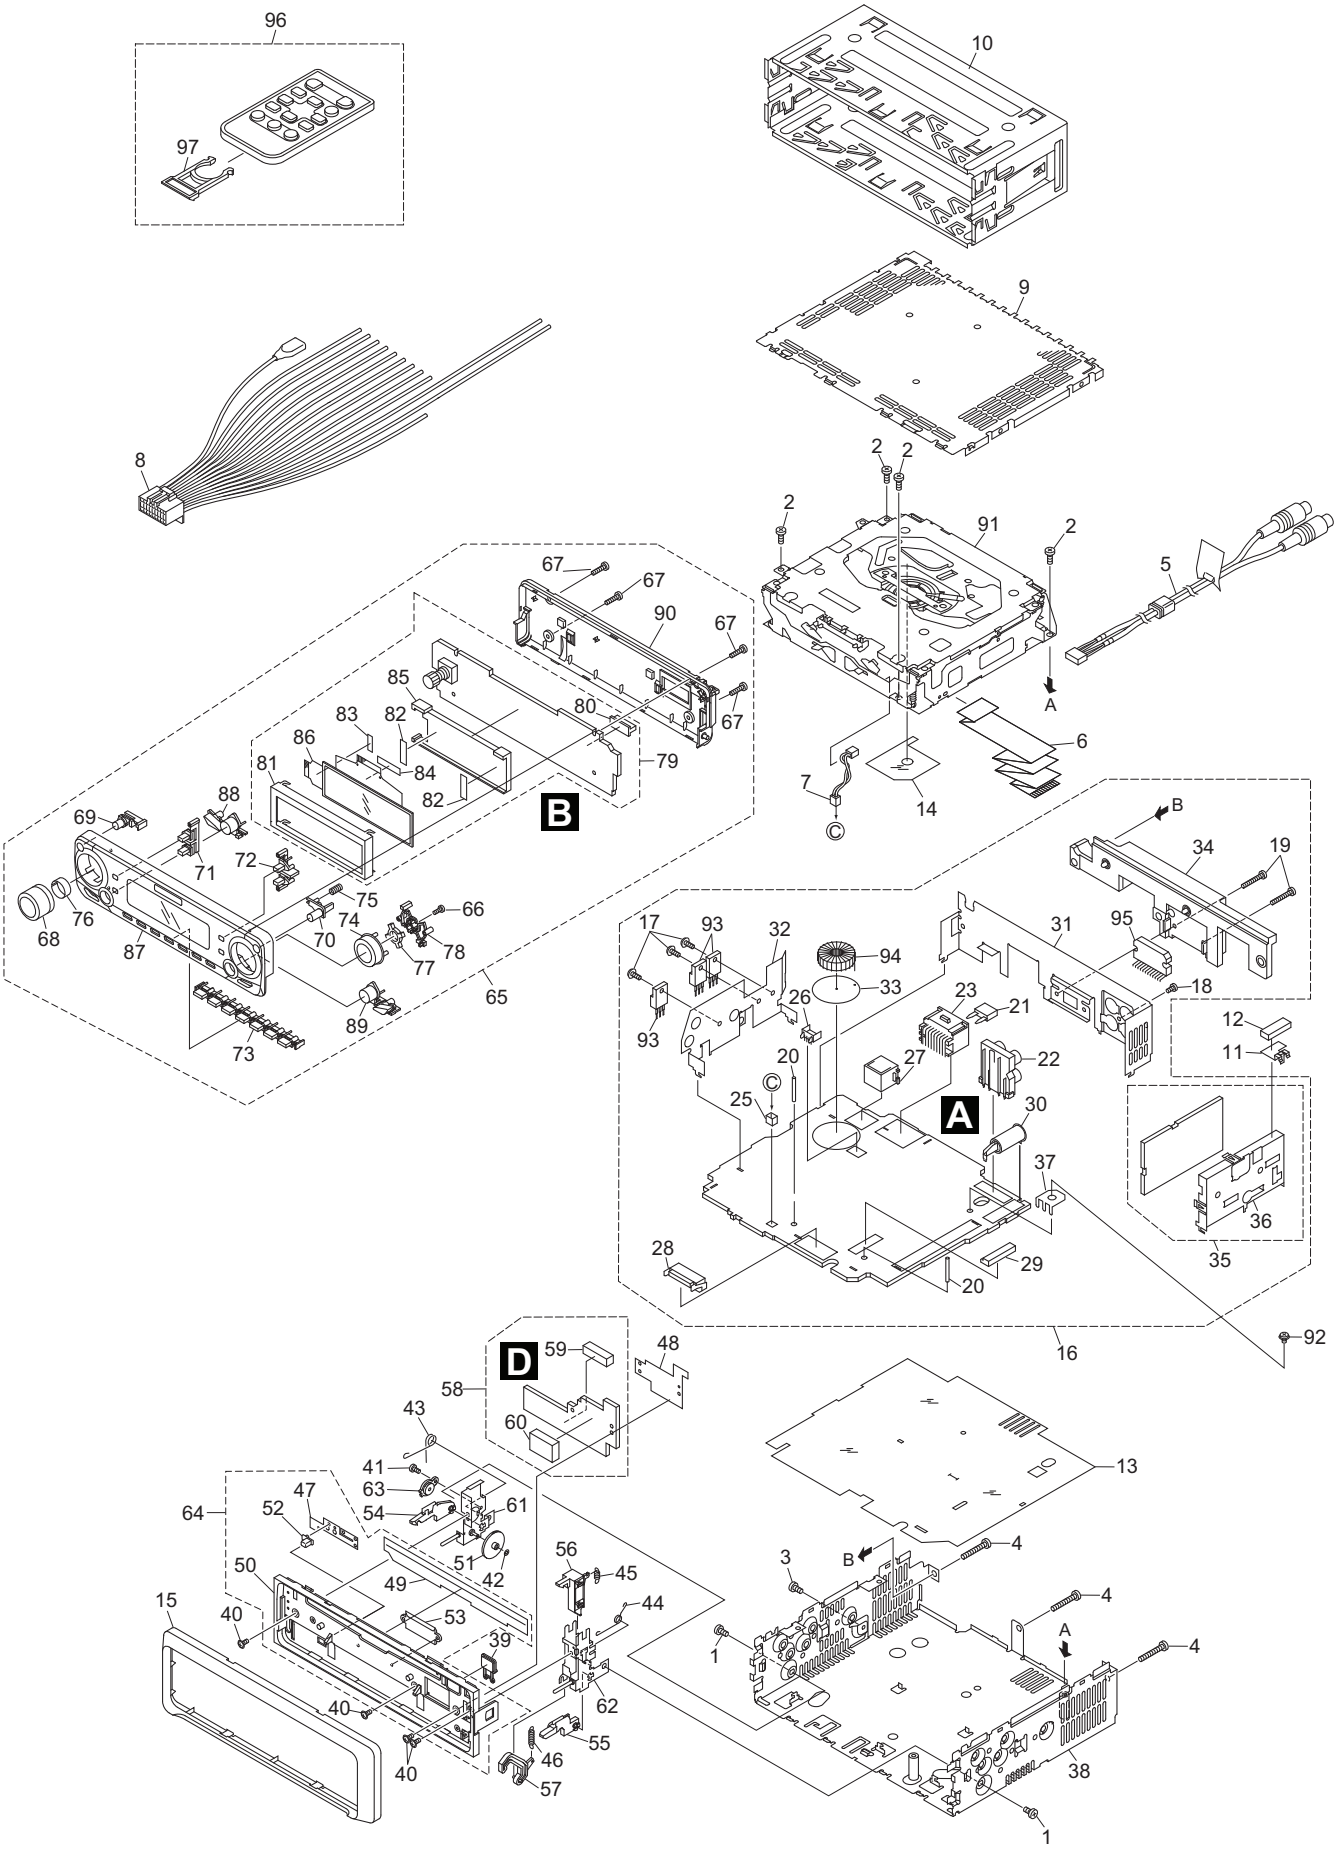

● EXTERIOR(DEH-P7550MP/XN/ES) SECTION PARTS LIST

Mark No.	Description	Part No.
1	Screw	BMZ30P040FZK
2	Screw	BSZ26P060FTC
3	Screw	BSZ30P060FTC
4	Screw	BSZ30P200FTC
5	Cord Assy	CDE7129
6	Flat Cable	CDE7149
7	Cord Assy	CDE7150
8	Cord Assy	CDE7154
9	Case	CNB2870
10	Holder	CNC8659
11	Earth Plate	CNC8915
12	Cushion	CNM4870
13	Insulator	CNM7935
14	Insulator	CNM8174
15	Panel	CNS6935
16	Tuner Amp Unit	CWM8709
17	Screw	ASZ26P060FTC
18	Screw	BPZ26P080FTC
19	Screw	BSZ26P160FTC
20	Clamper	CEF1035
21	Fuse(10A)	CEK1208
22	Pin Jack(CN361)	CKB1051
23	Plug(CN981)	CKM1376
24	•••••	
25	Plug(CN704)	CKS-783
26	Plug(CN362)	CKS1238
27	Connector(CN101)	CKS3408
28	Plug(CN801)	CKS3537
29	Connector(CN701)	CKS3837
30	Antenna Jack(CN401)	CKX1056
31	Holder	CND1239
32	Holder	CND1352
33	Insulator	CNM8245
34	Heat Sink	CNR1668
35	FM/AM Tuner Unit	CWE1646
36	Holder	CND1054
37	Terminal(CN402)	VNF1084
38	Chassis Unit	CXB9528
39	Button(EJECT)	CAC7752
40	Screw(M2x4.5)	CBA1647
41	Screw(M2x4)	CBA1649
42	Washer	CBF1038
43	Spring	CBH2650
44	Spring	CBH2651
45	Spring	CBH2652
46	Spring	CBH2653
47	Spring	CBL1512
48	Holder	CND1254
49	Cover	CNM6854
50	Panel	CNS7245

Mark No.	Description	Part No.
51	Gear	CNV5997
52	Pin	CNV6486
53	Lighting Conductor	CNV6487
54	Arm	CNV7400
55	Arm	CNV7401
56	Arm	CNV7402
57	Arm	CNV7403
58	Panel Unit	CWM8758
59	Socket(CN1950)	CKS3550
60	Connector(CN1951)	CKS4462
61	Holder Unit	CXB9501
62	Holder Unit	CXB9502
63	Damper Unit	CXB9503
64	Panel Unit(Service)	CXX1691
65	Detach Grille Assy	CXB9915
66	Screw	BPZ20P060FTC
67	Screw	BPZ20P100FZK
68	Knob	CAA2764
69	Button(CLK)	CAC7751
70	Button(OPEN)	CAC7728
71	Button(TEXT/SCRL)	CAC7737
72	Button(AUDIO/FUNC)	CAC7738
73	Button(1-6)	CAC7750
74	Button(CROSS)	CAC7843
75	Spring	CBH2654
76	Spring	CBL1470
77	Cushion	CNM8291
78	Holder	CNV7405
79	Keyboard Unit	CWM8713
80	Connector(CN1901)	CKS4524
81	Holder	CND1354
82	Cushion	CNM6633
83	Spacer	CNM7697
84	Spacer	CNM7698
85	Holder	CNV6910
86	OEL Unit	MXS8045
87	Grille Unit	CXB9854
88	Button Unit(SRC/EQ)	CXB9924
89	Button Unit(EQ-EX/BAND)	CXB9925
90	Cover	XNS7014
91	CD Mechanism Module(S10MP3)	CXK5662
92	Screw	ISS26P055FTC
93	Transistor(Q742,901,921)	2SD2375
94	Choke Coil(L981)	CTH1280
95	IC(IC301)	PAL007A
96	Remote Control Unit	CXC1265
97	Cover	CNS7068

2.4 CD MECHANISM MODULE

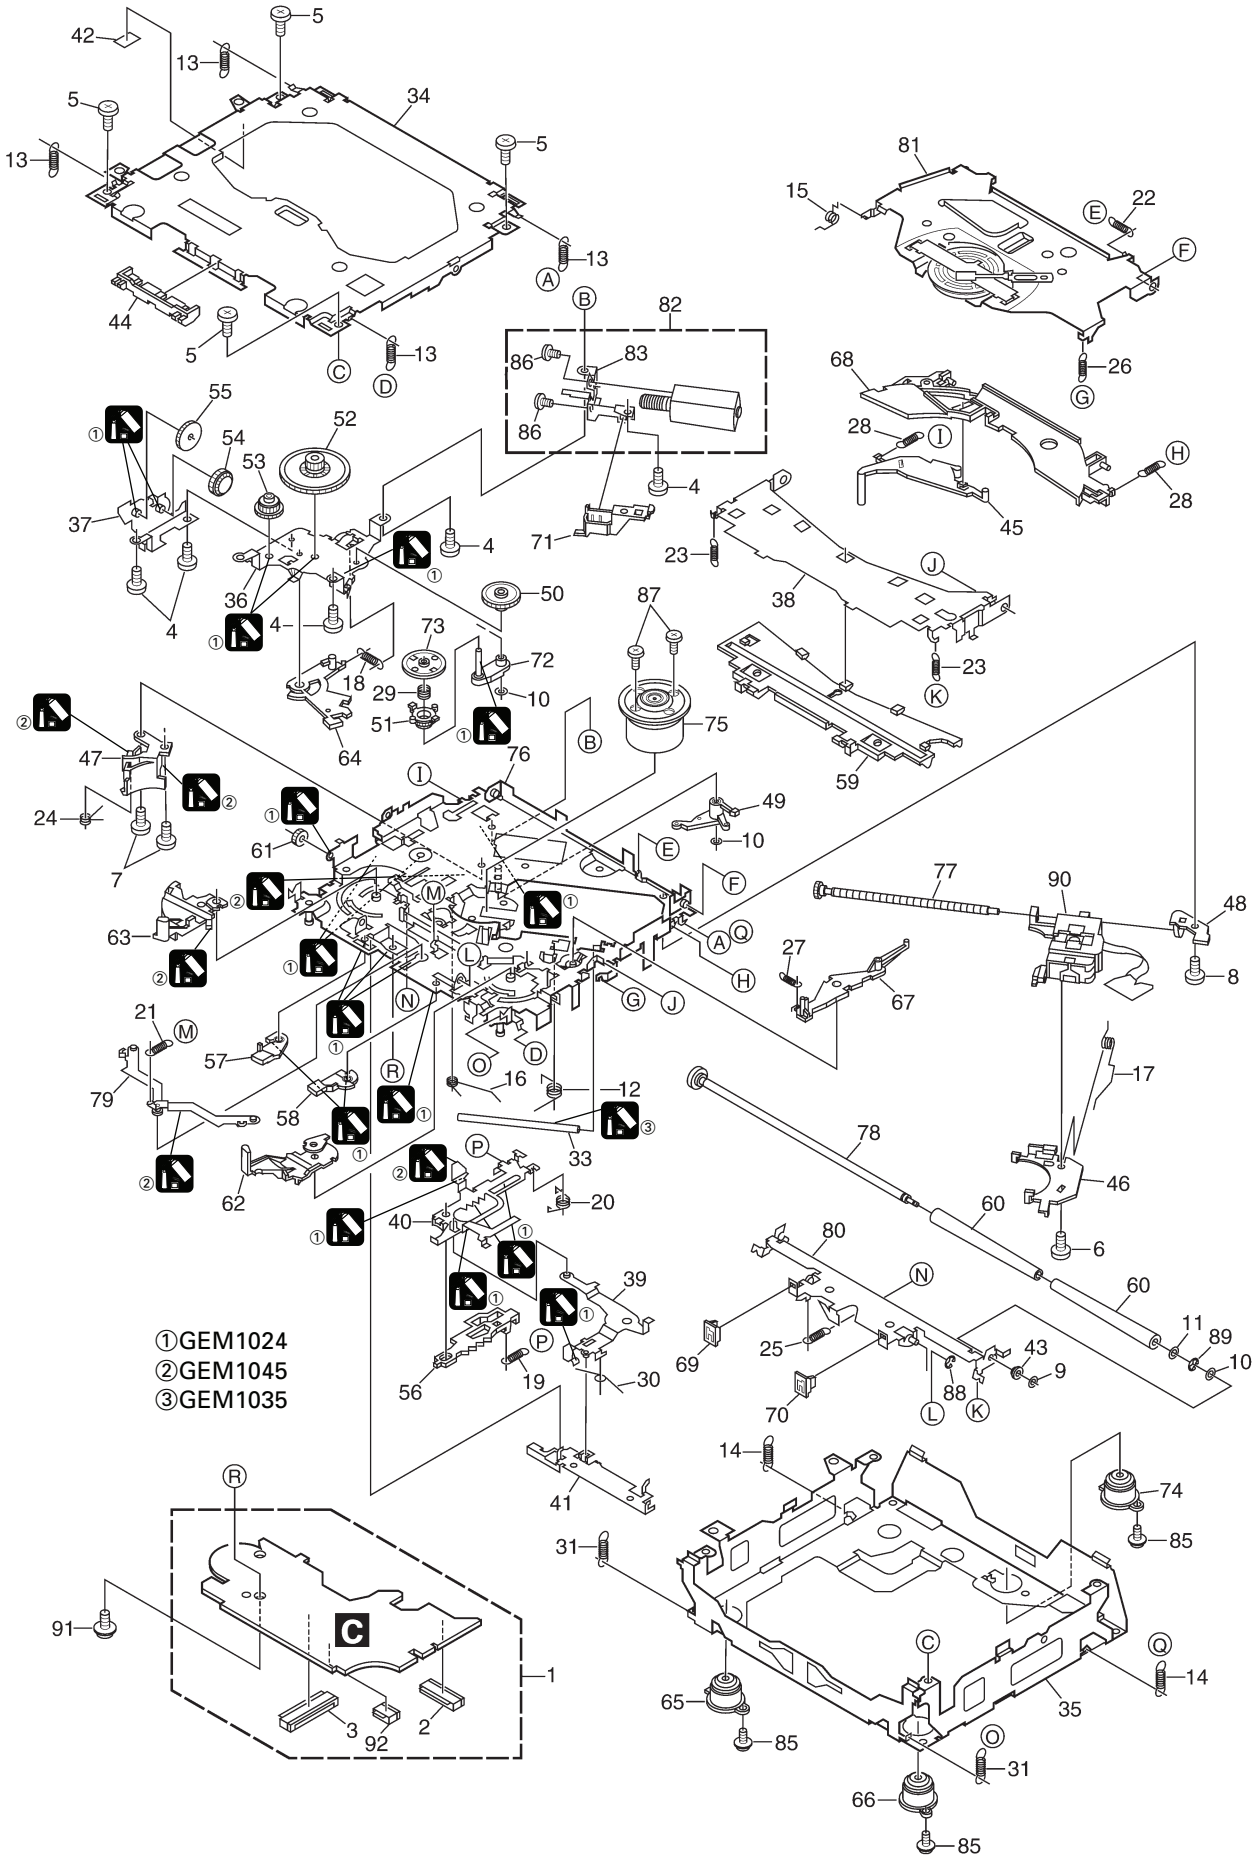

● CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.
1	CD Core Unit(S10MP3)	CWX2792
2	Connector(CN101)	CKS4182
3	Connector(CN901)	CKS4017
4	Screw	BMZ20P035FTC
5	Screw	BSZ20P040FTC
6	Screw(M2x4)	CBA1362
7	Screw(M2x3)	CBA1511
8	Screw(M2x3)	CBA1527
9	Washer	CBF1037
10	Washer	CBF1038
11	Washer	CBF1060
12	Spring	CBH2390
13	Spring	CBH2606
14	Spring	CBH2607
15	Spring	CBH2608
16	Spring	CBH2609
17	Spring	CBH2610
18	Spring	CBH2611
19	Spring	CBH2612
20	Spring	CBH2613
21	Spring	CBH2614
22	Spring	CBH2615
23	Spring	CBH2616
24	Spring	CBH2617
25	Spring	CBH2620
26	Spring	CBH2621
27	Spring	CBH2641
28	Spring	CBH2642
29	Spring	CBH2643
30	Spring	CBH2659
31	Spring	CBH2688
32	•••••	
33	Shaft	CLA3845
34	Frame	CNC9962
35	Frame	CNC9963
36	Bracket	CNC9966
37	Bracket	CNC9967
38	Arm	CNC9968
39	Arm	CNC9973
40	Lever	CNC9983
41	Lever	CNC9984
42	Sheet	CNM8134
43	Collar	CNV6906
44	Guide	CNV6925
45	Arm	CNV7198

Mark No.	Description	Part No.
46	Rack	CNV7199
47	Holder	CNV7201
48	Holder	CNV7202
49	Arm	CNV7203
50	Gear	CNV7207
51	Gear	CNV7208
52	Gear	CNV7209
53	Gear	CNV7210
54	Gear	CNV7211
55	Gear	CNV7212
56	Rack	CNV7214
57	Arm	CNV7215
58	Arm	CNV7216
59	Guide	CNV7217
60	Roller	CNV7218
61	Gear	CNV7219
62	Arm	CNV7221
63	Arm	CNV7220
64	Arm	CNV7222
65	Damper	CNV7313
66	Damper	CNV7314
67	Arm	CNV7341
68	Arm	CNV7342
69	Guide	CNV7360
70	Guide	CNV7361
71	Holder	CNV7437
72	Arm	CNV7444
73	Gear	CNV7595
74	Damper	CNV7618
75	Motor Unit(M1)	CXB6007
76	Chassis Unit	CXB8728
77	Screw Unit	CXB8729
78	Gear Unit	CXB8731
79	Arm Unit	CXB8732
80	Arm Unit	CXB8735
81	Arm Unit	CXB8852
82	Motor Unit(M2)	CXB8933
83	Bracket	CNC9985
84	•••••	
85	Screw(M2x5)	EBA1028
86	Screw	JFZ20P020FTC
87	Screw	JGZ17P022FTC
88	Washer	YE15FTC
89	Washer	YE20FTC
90	Pickup Unit(Service)(P10)	CXX1641
91	Screw	IMS26P030FTC
92	Connector(CN902)	CKS2191

5. ELECTRICAL PARTS LIST

NOTES:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A Unit Number : CWM8707(DEH-P750MP/XN/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

=====Circuit Symbol and No.		===Part Name	Part No.
IC	101	IC	HA12187FP
IC	131	IC	PML009A
IC	171	IC	NJM4558MD
IC	301	IC	PAL007A
IC	341	IC	PA2028A
IC	601	IC	PD5804A
IC	652	IC	BD4835G
IC	801	IC	TC74VHCT125AFT
IC	841	IC	NJM2360M
IC	861	IC	BA033FP
Q	101	Transistor	UMF23N
Q	301	Transistor	DTC124EU
Q	321	Transistor	IMD2A
Q	361	Transistor	HN1C03F
Q	362	Transistor	HN1C03F
Q	363	Transistor	HN1C03F
Q	364	Transistor	IMD2A
Q	501	Transistor	2SC4081
Q	741	Transistor	IMD2A
Q	742	Transistor	2SD2375
Q	743	Transistor	2SD1760F5
Q	801	Transistor	DTC143EU
Q	821	Transistor	IMD2A
Q	822	Transistor	2SD1767
Q	831	Transistor	UMF23N
Q	841	Transistor	IMD2A
Q	842	Transistor	2SD1760F5
Q	901	Transistor	2SD2375
Q	902	Transistor	IMD2A
Q	921	Transistor	2SD2375
Q	922	Transistor	2SB1243
Q	923	Transistor	DTC114EU
Q	931	Transistor	IMX1
Q	941	Transistor	DTC114EU
Q	951	Transistor	2SA1576A
D	171	Diode	DAP202U
D	172	Diode	DAN202U
D	173	Diode Network	DA204U
D	174	Diode Network	DA204U
D	301	Diode	MPG06G-6415G50
D	302	Diode	MPG06G-6415G50
D	322	Diode	RB706F-40
D	342	Diode	1SS396
D	361	Diode	1SS133
D	501	Diode	DAN202U
D	502	Diode	HZS9L(A2)
D	741	Diode	HZS9L(B1)
D	742	Diode	HZS6L(C1)
D	801	Diode Network	DA204U
D	802	Diode	DAN202U

=====Circuit Symbol and No.		===Part Name	Part No.
D	803	Diode	DAP202U
D	804	Diode	DAN202U
D	805	Diode	DAP202U
D	821	Diode	HZS11L(A1)
D	841	Diode	HZS11L(A1)
D	842	Diode	RB411D
D	901	Diode	MPG06G-6415G50
D	902	Diode	HZS6L(B2)
D	921	Diode	HZS9L(B3)
D	931	Diode	HZS7L(C3)
D	932	Diode	HZS7L(A1)
D	941	Diode	MPG06G-6415G50
D	951	Diode	DAN202U
D	981	Diode	MPG06G-6415G50
D	982	Diode	MPG06G-6415G50
ZNR	401	Surge Protector	DSP-201M-A21F
L	101	Inductor	LCTA2R2J2520
L	131	Inductor	LCTA2R2J2520
L	341	Ferri-Inductor	LAU220K
L	401	Inductor	LAU1R0K
L	402	Ferri-Inductor	LAU100K
L	403	Inductor	LAU1R0K
L	404	Inductor	LCTA4R7J2520
L	601	Ferri-Inductor	LAU100K
L	701	Ferri-Inductor	LAU100K
L	801	Inductor	CTF1379
L	831	Ferri-Inductor	LAU100K
L	842	Inductor	CTF1510
L	951	Inductor	CTF1530
L	981	Choke Coil 600µH	CTH1280
X	601	Radiator 10.00MHz	CSS1475
S	801	Switch(DSENSE)	CSN1039
VR	322	Semi-fixed 10kΩ(B)	CCP1229
FU	361	Fuse 3A	CEK1286
FU	362	Fuse 3A	CEK1286
MIC	321	Microphone	CPM1011
SP	601	Buzzer	CPV1062
		FM/AM Tuner Unit	CWE1646
		Fuse 10A	CEK1208

RESISTORS

R	101	RS1/16S562J
R	102	RS1/16S332J
R	103	RS1/16S181J
R	104	RS1/16S181J
R	105	RS1/16S223J
R	106	RS1/16S223J
R	107	RS1/16S102J
R	108	RS1/16S102J
R	109	RS1/16S222J
R	110	RS1/16S101J

=====Circuit Symbol and No.	===Part Name	Part No.
R 111		RS1/16S101J
R 112		RS1/16S103J
R 113		RS1/16S150J
R 114		RS1/16S470J
R 131		RS1/16S102J
R 132		RS1/16S102J
R 133		RS1/16S102J
R 134		RS1/16S102J
R 135		RS1/16S101J
R 136		RS1/16S101J
R 137		RS1/16S101J
R 138		RS1/16S101J
R 139		RS1/16S101J
R 140		RS1/16S101J
R 141		RAB4C102J
R 171		RS1/16S104J
R 172		RS1/16S104J
R 173		RS1/16S563J
R 174		RS1/16S563J
R 175		RS1/16S474J
R 176		RS1/16S474J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 323		RS1/16S560J
R 332		RS1/16S104J
R 334		RS1/16S104J
R 335		RS1/16S222J
R 341		RS1/16S103J
R 342		RS1/16S103J
R 361		RS1/16S820J
R 362		RS1/16S820J
R 363		RS1/16S820J
R 364		RS1/16S820J
R 365		RS1/16S820J
R 366		RS1/16S820J
R 367		RS1/16S223J
R 368		RS1/16S223J
R 369		RS1/16S223J
R 370		RS1/16S223J
R 371		RS1/16S223J
R 372		RS1/16S223J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S471J
R 376		RS1/16S471J
R 377		RS1/16S471J
R 378		RS1/16S471J
R 379		RS1/16S103J
R 380		RS1/16S103J
R 381		RS1/16S103J
R 382		RS1/16S103J
R 383		RS1/16S103J
R 384		RS1/16S103J
R 389		RS1/16S102J
R 401		RS1/16S681J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 405		RS1/16S681J
R 406		RS1/16S681J
R 407		RS1/16S681J
R 501		RS1/16S103J
R 502		RS1/16S473J
R 601		RS1/16S472J
R 602		RS1/16S104J
R 604		RS1/16S473J
R 605		RS1/16S0R0J
R 608		RS1/16S473J
R 609		RS1/16S104J

=====Circuit Symbol and No.	===Part Name	Part No.
R 610		RS1/16S102J
R 613		RS1/16S104J
R 614		RS1/16S104J
R 616		RS1/16S104J
R 617		RS1/16S104J
R 627		RS1/16S681J
R 628		RS1/16S681J
R 629		RS1/16S681J
R 642		RS1/16S104J
R 651		RS1/16S102J
R 652		RS1/16S102J
R 653		RS1/16S183J
R 702		RS1/16S473J
R 703		RS1/16S682J
R 704		RS1/16S682J
R 705		RS1/16S682J
R 706		RS1/16S682J
R 707		RS1/16S221J
R 708		RS1/16S221J
R 709		RS1/16S221J
R 710		RS1/16S221J
R 711		RS1/16S221J
R 712		RS1/16S221J
R 713		RS1/16S0R0J
R 714		RS1/16S0R0J
R 741		RD1/4PU391J
R 742		RD1/4PU221J
R 743		RS1/16S331J
R 798		RS1/16S104J
R 799		RS1/16S102J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S222J
R 805		RS1/16S222J
R 806		RS1/16S472J
R 807		RS1/16S222J
R 808		RS1/16S102J
R 809		RS1/16S473J
R 810		RS1/16S104J
R 811		RS1/16S473J
R 812		RS1/16S563J
R 813		RD1/4PU391J
R 814		RS1/16S102J
R 815		RS1/16S104J
R 816		RS1/16S104J
R 817		RS1/16S102J
R 818		RS1/16S102J
R 819		RS1/16S472J
R 821		RS1/16S221J
R 822		RS1/16S221J
R 823		RS1/16S1R0J
R 831		RS1/16S472J
R 832		RS1/16S102J
R 833		RS1/16S472J
R 841		RS1/16S821J
R 844		RS1/16S1R0J
R 845		RS1/16S391J
R 846		RS1/16S121J
R 847		RD1/4PU152J
R 861		RS1/16S0R0J
R 901		RS1/16S223J
R 902		RS1/16S332J
R 903		RD1/4PU391J
R 904		RS1/16S0R0J
R 921		RD1/4PU221J
R 922		RS1/16S152J
R 923		RD1/4PU152J
R 924		RS1/16S223J
R 925		RS1/16S223J

		=====Circuit Symbol and No.	===Part Name	Part No.			=====Circuit Symbol and No.	===Part Name	Part No.
	R	931		RS1/16S104J		C	342		CEJQ101M16
A	R	932		RS1/16S473J		C	343		CASAQ3R3M16
	R	933		RS1/16S103J		C	345		CKSYB684K25
	R	934		RS1/16S473J		C	346		CEAL100M16
	R	935		RS1/16S472J		C	347		CKSQYB225K10
	R	943		RS1/16S103J		C	348		CEJQ330M25
	R	951		RS1/16S102J		C	349		CEJQ330M25
	R	952		RS1/16S472J		C	350		CEJQ330M25
	R	953		RS1/16S472J		C	351		CEJQ330M25
	R	954		RS1/16S153J		C	353		CKSRYB105K10
	R	955		RS1/16S104J		C	354		CKSRYB105K10
	R	981		RD1/4PU102J		C	355		CKSRYB105K10
	R	982		RD1/4PU102J		C	356		CKSRYB105K10
						C	357		CKSRYB105K10
	CAPACITORS					C	358		CKSRYB105K10
B									
	C	102		CKSRYB104K25		C	361		CEJQ100M50
	C	131		CCSQCH152J50		C	362		CEJQ100M25
	C	132		CCSQCH152J50		C	363		CEJQ100M50
	C	133		CKSRYB105K10		C	364		CEJQ100M25
	C	134		CKSRYB105K10		C	365		CEJQ100M50
	C	137		CEAL1R0M50		C	366		CEJQ100M50
	C	138		CEAL1R0M50		C	367		CKSRYB222K50
	C	139		CKSRYB105K10		C	368		CKSRYB222K50
	C	140		CEAL1R0M50		C	369		CKSRYB222K50
	C	141		CEJQ470M10		C	370		CKSRYB222K50
	C	142		CKSRYB104K25		C	371		CKSRYB222K50
	C	143		CEALNP4R7M16		C	372		CKSRYB222K50
	C	144		CEJQNP4R7M16		C	373		CEJQ220M25
C	C	145		CCSQCH152J50		C	401		CKSRYB103K50
	C	146		CCSQCH152J50		C	402		CKSRYB103K50
	C	147		CEALNP4R7M16		C	403		CEJQ470M10
	C	148		CEJQNP4R7M16		C	404		CKSRYB103K50
	C	149		CEALNP4R7M16		C	405		CEJQ101M10
	C	150		CEJQNP4R7M16		C	408		CCSRCH101J50
	C	151		CEALNP4R7M16		C	601		CEJQ4R7M35
	C	152		CEJQNP4R7M16		C	602		CKSRYB103K50
	C	153		CCSRCH100D50		C	603		CCSRCH180J50
	C	154		CCSRCH100D50		C	605		CCSRCH220J50
	C	155		CCSRCH100D50		C	606		CCSRCH470J50
	C	156		CCSRCH100D50		C	652		CKSRYB105K10
	C	157		CCSRCH100D50		C	702	470µF/10V	CCH1438
D	C	158		CCSRCH100D50		C	741		CKSRYB473K50
	C	159		CKSRYB474K10		C	742		CKSRYB102K50
	C	160		CKSRYB474K10		C	743		CEJQ101M16
	C	161		CEJQ100M50		C	744		CKSRYB473K50
	C	163		CKSRYB104K25		C	745		CEHAR101M10
	C	164		CKSRYB104K25		C	801		CKSRYB473K50
	C	171		CKSRYB103K50		C	821		CKSRYB473K50
	C	173		CKSRYB104K25		C	832		CCSRCH101J50
	C	174		CKSRYB104K25		C	833		CKSRYB473K50
	C	175		CKSRYB104K25		C	834		CKSRYB105K10
	C	176		CKSRYB104K25		C	841		CKSRYB104K25
	C	177		CKSRYB474K10		C	842		CEJQ470M16
	C	178		CKSRYB474K10		C	843		CEJQ101M10
	C	179		CCSRCH101J50		C	844		CKSRYB104K25
E									
	C	180		CCSRCH101J50		C	845		CCSRCH331J50
	C	301		CFTNA224J50		C	846		CKSRYB103K50
	C	302		CFTNA224J50		C	847		CEJQ470M25
	C	305		CFTNA224J50		C	849	4.7µF	CCG1111
	C	306		CFTNA224J50		C	864		CKSRYB474K10
	C	309		CEHAR330M10		C	865		CKSRYB103K50
	C	310	3300µF/16V	CCH1486		C	866		CEJQ220M6R3
	C	311		CKSRYB104K25		C	867		CKSYB475K10
	C	312		CEJQ100M16		C	901	470µF/16V	CCH1331
	C	313		CKSQYB225K10		C	902	470µF/16V	CCH1331
	C	314		CKSQYB225K10		C	903		CKSRYB472K50
	C	333		CEJQ220M25		C	904		CKSRYB103K50
	C	334		CEJQ100M50		C	905		CEHAR470M16
F	C	335		CEJQ100M50		C	921		CEJQ221M10
	C	341		CEAL4R7M35		C	922		CKSRYB103K50

=====Circuit Symbol and No.	===Part Name	Part No.
C 923		CEHAR101M10
C 931		CKSRYB104K25
C 941		CKSQYB105K16

A Unit Number : CWM8708(DEH-P7500MP/XN/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	HA12187FP
IC	131	IC	PML009A
IC	171	IC	NJM4558MD
IC	301	IC	PAL007A
IC	341	IC	PA2028A
IC	601	IC	PD5804A
IC	652	IC	BD4835G
IC	801	IC	TC74VHCT125AFT
IC	841	IC	NJM2360M
IC	861	IC	BA033FP
Q	101	Transistor	UMF23N
Q	301	Transistor	DTC124EU
Q	321	Transistor	IMD2A
Q	361	Transistor	IMH3A
Q	362	Transistor	IMH3A
Q	363	Transistor	IMH3A
Q	364	Transistor	IMD2A
Q	501	Transistor	2SC4081
Q	741	Transistor	IMD2A
Q	742	Transistor	2SD2375
Q	743	Transistor	2SD1760F5
Q	801	Transistor	DTC143EU
Q	821	Transistor	IMD2A
Q	822	Transistor	2SD1767
Q	831	Transistor	UMF23N
Q	841	Transistor	IMD2A
Q	842	Transistor	2SD1760F5
Q	901	Transistor	2SD2375
Q	902	Transistor	IMD2A
Q	921	Transistor	2SD2375
Q	922	Transistor	2SB1243
Q	923	Transistor	DTC114EU
Q	931	Transistor	IMX1
Q	941	Transistor	DTC114EU
Q	951	Transistor	2SA1576A
D	171	Diode	DAP202U
D	172	Diode	DAN202U
D	173	Diode Network	DA204U
D	174	Diode Network	DA204U
D	301	Diode	MPG06G-6415G50
D	302	Diode	MPG06G-6415G50
D	322	Diode	RB706F-40
D	361	Diode	1SS133
D	501	Diode	DAN202U
D	502	Diode	HZS9L(A2)
D	741	Diode	HZS9L(B1)
D	742	Diode	HZS6L(C1)
D	801	Diode Network	DA204U
D	802	Diode	DAN202U
D	803	Diode	DAP202U
D	804	Diode	DAN202U
D	805	Diode	DAP202U
D	821	Diode	HZS11L(A1)
D	841	Diode	HZS11L(A1)
D	842	Diode	RB411D
D	901	Diode	MPG06G-6415G50
D	902	Diode	HZS6L(B2)
D	921	Diode	HZS9L(B3)
D	931	Diode	HZS7L(C3)
D	932	Diode	HZS7L(A1)

=====Circuit Symbol and No.	===Part Name	Part No.
D 941	Diode	MPG06G-6415G50
D 951	Diode	DAN202U
D 981	Diode	MPG06G-6415G50
D 982	Diode	MPG06G-6415G50
ZNR 401	Surge Protector	DSP-201M-A21F
L 101	Inductor	LCTA2R2J2520
L 131	Inductor	LCTA2R2J2520
L 341	Ferri-Inductor	LAU220K
L 401	Inductor	LAU1R0K
L 402	Ferri-Inductor	LAU100K
L 403	Inductor	LAU1R0K
L 404	Inductor	LCTA4R7J2520
L 601	Ferri-Inductor	LAU100K
L 701	Ferri-Inductor	LAU100K
L 801	Inductor	CTF1379
L 831	Ferri-Inductor	LAU100K
L 842	Inductor	CTF1510
L 951	Inductor	CTF1530
L 981	Choke Coil 600µH	CTH1280
X 601	Radiator 10.00MHz	CSS1475
S 801	Switch(DSENS)	CSN1039
VR 322	Semi-fixed 10kΩ(B)	CCP1229
FU 361	Fuse 3A	CEK1286
FU 362	Fuse 3A	CEK1286
MIC 321	Microphone	CPM1011
SP 601	Buzzer	CPV1062
	FM/AM Tuner Unit	CWE1646
	Fuse 10A	CEK1208

RESISTORS

R 101		RS1/16S562J
R 102		RS1/16S332J
R 103		RS1/16S181J
R 104		RS1/16S181J
R 105		RS1/16S223J
R 106		RS1/16S223J
R 107		RS1/16S102J
R 108		RS1/16S102J
R 109		RS1/16S222J
R 110		RS1/16S101J
R 111		RS1/16S101J
R 112		RS1/16S103J
R 113		RS1/16S150J
R 114		RS1/16S470J
R 131		RS1/16S102J
R 132		RS1/16S102J
R 133		RS1/16S102J
R 134		RS1/16S102J
R 135		RS1/16S101J
R 136		RS1/16S101J
R 137		RS1/16S101J
R 138		RS1/16S101J
R 139		RS1/16S101J
R 140		RS1/16S101J
R 141		RAB4C102J
R 171		RS1/16S104J
R 172		RS1/16S104J
R 173		RS1/16S563J
R 174		RS1/16S563J
R 175		RS1/16S474J
R 176		RS1/16S474J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 323		RS1/16S560J
R 332		RS1/16S104J
R 334		RS1/16S104J
R 335		RS1/16S222J
R 341		RS1/16S103J

Circuit Symbol and No.	Part Name	Part No.
R 342		RS1/16S103J
R 343		RS1/16S0R0J
R 361		RS1/16S820J
R 362		RS1/16S820J
R 363		RS1/16S820J
R 364		RS1/16S820J
R 365		RS1/16S820J
R 366		RS1/16S820J
R 367		RS1/16S223J
R 368		RS1/16S223J
R 369		RS1/16S223J
R 370		RS1/16S223J
R 371		RS1/16S223J
R 372		RS1/16S223J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S471J
R 376		RS1/16S471J
R 377		RS1/16S471J
R 378		RS1/16S471J
R 379		RS1/16S0R0J
R 380		RS1/16S0R0J
R 381		RS1/16S0R0J
R 382		RS1/16S0R0J
R 383		RS1/16S0R0J
R 384		RS1/16S0R0J
R 389		RS1/16S102J
R 401		RS1/16S681J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 405		RS1/16S681J
R 406		RS1/16S681J
R 407		RS1/16S681J
R 501		RS1/16S103J
R 502		RS1/16S473J
R 601		RS1/16S472J
R 602		RS1/16S104J
R 604		RS1/16S473J
R 605		RS1/16S0R0J
R 608		RS1/16S473J
R 609		RS1/16S104J
R 610		RS1/16S102J
R 613		RS1/16S104J
R 615		RS1/16S104J
R 616		RS1/16S104J
R 617		RS1/16S104J
R 627		RS1/16S681J
R 628		RS1/16S681J
R 629		RS1/16S681J
R 642		RS1/16S104J
R 651		RS1/16S102J
R 652		RS1/16S102J
R 653		RS1/16S183J
R 702		RS1/16S473J
R 703		RS1/16S682J
R 704		RS1/16S682J
R 705		RS1/16S682J
R 706		RS1/16S682J
R 707		RS1/16S221J
R 708		RS1/16S221J
R 709		RS1/16S221J
R 710		RS1/16S221J
R 711		RS1/16S221J
R 712		RS1/16S221J
R 713		RS1/16S0R0J
R 714		RS1/16S0R0J
R 741		RD1/4PU391J
R 742		RD1/4PU221J
R 743		RS1/16S331J
R 798		RS1/16S104J

Circuit Symbol and No.	Part Name	Part No.
R 799		RS1/16S102J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S222J
R 805		RS1/16S222J
R 806		RS1/16S472J
R 807		RS1/16S222J
R 808		RS1/16S102J
R 809		RS1/16S473J
R 810		RS1/16S104J
R 811		RS1/16S473J
R 812		RS1/16S563J
R 813		RD1/4PU391J
R 814		RS1/16S102J
R 815		RS1/16S104J
R 816		RS1/16S104J
R 817		RS1/16S102J
R 818		RS1/16S102J
R 819		RS1/16S472J
R 821		RS1/16S221J
R 822		RS1/16S221J
R 823		RS1/16S1R0J
R 831		RS1/16S472J
R 832		RS1/16S102J
R 833		RS1/16S472J
R 841		RS1/16S821J
R 844		RS1/16S1R0J
R 845		RS1/16S391J
R 846		RS1/16S121J
R 847		RD1/4PU152J
R 861		RS1/16S0R0J
R 901		RS1/16S223J
R 902		RS1/16S332J
R 903		RD1/4PU391J
R 904		RS1/16S0R0J
R 921		RD1/4PU221J
R 922		RS1/16S152J
R 923		RD1/4PU152J
R 924		RS1/16S223J
R 925		RS1/16S223J
R 931		RS1/16S104J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S472J
R 943		RS1/16S103J
R 951		RS1/16S102J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S153J
R 955		RS1/16S104J
R 981		RD1/4PU102J
R 982		RD1/4PU102J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 102		CKSRYB104K25
C 131		CCSQCH152J50
C 132		CCSQCH152J50
C 133		CKSRYB105K10
C 134		CKSRYB105K10
C 137		CEAL1R0M50
C 138		CEAL1R0M50
C 139		CKSRYB105K10
C 140		CEAL1R0M50
C 141		CEJQ470M10
C 142		CKSRYB104K25
C 143		CEALNP4R7M16
C 144		CEJQNP4R7M16
C 145		CCSQCH152J50
C 146		CCSQCH152J50

=====Circuit Symbol and No.	===Part Name	Part No.
C 147		CEALNP4R7M16
C 148		CEJQNP4R7M16
C 149		CEALNP4R7M16
C 150		CEJQNP4R7M16
C 151		CEALNP4R7M16
C 152		CEJQNP4R7M16
C 153		CCSRCH100D50
C 154		CCSRCH100D50
C 155		CCSRCH100D50
C 156		CCSRCH100D50
C 157		CCSRCH100D50
C 158		CCSRCH100D50
C 159		CKSRYB474K10
C 160		CKSRYB474K10
C 161		CEJQ100M50
C 163		CKSRYB104K25
C 164		CKSRYB104K25
C 171		CKSRYB103K50
C 173		CKSRYB104K25
C 174		CKSRYB104K25
C 175		CKSRYB104K25
C 176		CKSRYB104K25
C 177		CKSRYB474K10
C 178		CKSRYB474K10
C 179		CCSRCH101J50
C 180		CCSRCH101J50
C 301		CFTNA224J50
C 302		CFTNA224J50
C 305		CFTNA224J50
C 306		CFTNA224J50
C 309		CEHAR330M10
C 310	3300µF/16V	CCH1486
C 311		CKSRYB104K25
C 312		CEJQ100M16
C 313		CKSQYB225K10
C 314		CKSQYB225K10
C 333		CEJQ220M25
C 334		CEJQ100M50
C 335		CEJQ100M50
C 341		CEAL4R7M35
C 342		CEJQ101M16
C 343		CASAQ3R3M16
C 345		CKSYB684K25
C 346		CEAL100M16
C 347		CKSQYB225K10
C 348		CEJQ330M25
C 349		CEJQ330M25
C 353		CKSRYB105K10
C 354		CKSRYB105K10
C 355		CKSRYB105K10
C 356		CKSRYB105K10
C 357		CKSRYB105K10
C 358		CKSRYB105K10
C 361		CEJQ100M50
C 362		CEJQ100M25
C 363		CEJQ100M50
C 364		CEJQ100M25
C 365		CEJQ100M50
C 366		CEJQ100M50
C 367		CKSRYB222K50
C 368		CKSRYB222K50
C 369		CKSRYB222K50
C 370		CKSRYB222K50
C 371		CKSRYB222K50
C 372		CKSRYB222K50
C 373		CEJQ220M25
C 401		CKSRYB103K50
C 402		CKSRYB103K50
C 403		CEJQ470M10
C 404		CKSRYB103K50

=====Circuit Symbol and No.	===Part Name	Part No.
C 405		CEJQ101M10
C 408		CCSRCH101J50
C 601		CEJQ4R7M35
C 602		CKSRYB103K50
C 603		CCSRCH180J50
C 605		CCSRCH220J50
C 606		CCSRCH470J50
C 652		CKSRYB105K10
C 702	470µF/10V	CCH1438
C 741		CKSRYB473K50
C 742		CKSRYB102K50
C 743		CEJQ101M16
C 744		CKSRYB473K50
C 745		CEHAR101M10
C 801		CKSRYB473K50
C 821		CKSRYB473K50
C 832		CCSRCH101J50
C 833		CKSRYB473K50
C 834		CKSRYB105K10
C 841		CKSRYB104K25
C 842		CEJQ470M16
C 843		CEJQ101M10
C 844		CKSRYB104K25
C 845		CCSRCH331J50
C 846		CKSRYB103K50
C 847		CEJQ470M25
C 849	4.7µF	CCG1111
C 864		CKSRYB474K10
C 865		CKSRYB103K50
C 866		CEJQ220M6R3
C 867		CKSYB475K10
C 901	470µF/16V	CCH1331
C 902	470µF/16V	CCH1331
C 903		CKSRYB472K50
C 904		CKSRYB103K50
C 905		CEHAR470M16
C 921		CEJQ221M10
C 922		CKSRYB103K50
C 923		CEHAR101M10
C 931		CKSRYB104K25
C 941		CKSQYB105K16

A Unit Number : CWM8709(DEH-P7550MP/XN/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	HA12187FP
IC	131	IC	PML009A
IC	171	IC	NJM4558MD
IC	301	IC	PAL007A
IC	341	IC	PA2028A
IC	601	IC	PD5804A
IC	652	IC	BD4835G
IC	801	IC	TC74VHCT125AFT
IC	841	IC	NJM2360M
IC	861	IC	BA033FP
Q	101	Transistor	UMF23N
Q	301	Transistor	DTC124EU
Q	321	Transistor	IMD2A
Q	361	Transistor	IMH3A
Q	362	Transistor	IMH3A
Q	363	Transistor	IMH3A
Q	364	Transistor	IMD2A
Q	501	Transistor	2SC4081
Q	741	Transistor	IMD2A
Q	742	Transistor	2SD2375
Q	743	Transistor	2SD1760F5
Q	801	Transistor	DTC143EU
Q	821	Transistor	IMD2A
Q	822	Transistor	2SD1767
Q	831	Transistor	UMF23N

Circuit Symbol and No.	Part Name	Part No.
Q 841	Transistor	IMD2A
Q 842	Transistor	2SD1760F5
Q 901	Transistor	2SD2375
Q 902	Transistor	IMD2A
Q 921	Transistor	2SD2375
Q 922	Transistor	2SB1243
Q 923	Transistor	DTC114EU
Q 931	Transistor	IMX1
Q 941	Transistor	DTC114EU
Q 951	Transistor	2SA1576A
D 171	Diode	DAP202U
D 172	Diode	DAN202U
D 173	Diode Network	DA204U
D 174	Diode Network	DA204U
D 301	Diode	MPG06G-6415G50
D 302	Diode	MPG06G-6415G50
D 322	Diode	RB706F-40
D 361	Diode	1SS133
D 501	Diode	DAN202U
D 502	Diode	HZS9L(A2)
D 741	Diode	HZS9L(B1)
D 742	Diode	HZS6L(C1)
D 801	Diode Network	DA204U
D 802	Diode	DAN202U
D 803	Diode	DAP202U
D 804	Diode	DAN202U
D 805	Diode	DAP202U
D 821	Diode	HZS11L(A1)
D 841	Diode	HZS11L(A1)
D 842	Diode	RB411D
D 901	Diode	MPG06G-6415G50
D 902	Diode	HZS6L(B2)
D 921	Diode	HZS9L(B3)
D 931	Diode	HZS7L(C3)
D 932	Diode	HZS7L(A1)
D 941	Diode	MPG06G-6415G50
D 951	Diode	DAN202U
D 981	Diode	MPG06G-6415G50
D 982	Diode	MPG06G-6415G50
ZNR 401	Surge Protector	DSP-201M-A21F
L 101	Inductor	LCTA2R2J2520
L 131	Inductor	LCTA2R2J2520
L 341	Ferri-Inductor	LAU220K
L 401	Inductor	LAU1R0K
L 402	Ferri-Inductor	LAU100K
L 403	Inductor	LAU1R0K
L 404	Inductor	LCTA4R7J2520
L 601	Ferri-Inductor	LAU100K
L 701	Ferri-Inductor	LAU100K
L 801	Inductor	CTF1379
L 831	Ferri-Inductor	LAU100K
L 842	Inductor	CTF1510
L 951	Inductor	CTF1530
L 981	Choke Coil 600µH	CTH1280
X 601	Radiator 10.00MHz	CSS1475
S 801	Switch(DSENS)	CSN1039
VR 322	Semi-fixed 10kΩ(B)	CCP1229
FU 361	Fuse 3A	CEK1286
FU 362	Fuse 3A	CEK1286
MIC 321	Microphone	CPM1011
SP 601	Buzzer	CPV1062
	FM/AM Tuner Unit	CWE1646
	Fuse 10A	CEK1208

RESISTORS

Circuit Symbol and No.	Part Name	Part No.
R 101		RS1/16S562J
R 102		RS1/16S332J
R 103		RS1/16S181J
R 104		RS1/16S181J
R 105		RS1/16S223J
R 106		RS1/16S223J
R 107		RS1/16S102J
R 108		RS1/16S102J
R 109		RS1/16S222J
R 110		RS1/16S101J
R 111		RS1/16S101J
R 112		RS1/16S103J
R 113		RS1/16S150J
R 114		RS1/16S470J
R 131		RS1/16S102J
R 132		RS1/16S102J
R 133		RS1/16S102J
R 134		RS1/16S102J
R 135		RS1/16S101J
R 136		RS1/16S101J
R 137		RS1/16S101J
R 138		RS1/16S101J
R 139		RS1/16S101J
R 140		RS1/16S101J
R 141		RAB4C102J
R 171		RS1/16S104J
R 172		RS1/16S104J
R 173		RS1/16S563J
R 174		RS1/16S563J
R 175		RS1/16S474J
R 176		RS1/16S474J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 323		RS1/16S560J
R 332		RS1/16S104J
R 334		RS1/16S104J
R 335		RS1/16S222J
R 341		RS1/16S103J
R 342		RS1/16S103J
R 343		RS1/16S0R0J
R 361		RS1/16S820J
R 362		RS1/16S820J
R 363		RS1/16S820J
R 364		RS1/16S820J
R 365		RS1/16S820J
R 366		RS1/16S820J
R 367		RS1/16S223J
R 368		RS1/16S223J
R 369		RS1/16S223J
R 370		RS1/16S223J
R 371		RS1/16S223J
R 372		RS1/16S223J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S471J
R 376		RS1/16S471J
R 377		RS1/16S471J
R 378		RS1/16S471J
R 379		RS1/16S0R0J
R 380		RS1/16S0R0J
R 381		RS1/16S0R0J
R 382		RS1/16S0R0J
R 383		RS1/16S0R0J
R 384		RS1/16S0R0J
R 389		RS1/16S102J
R 401		RS1/16S681J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 405		RS1/16S681J
R 406		RS1/16S681J
R 407		RS1/16S681J
R 501		RS1/16S103J
R 502		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 601		RS1/16S472J
R 602		RS1/16S104J
R 604		RS1/16S473J
R 605		RS1/16S0R0J
R 608		RS1/16S473J
R 609		RS1/16S104J
R 610		RS1/16S102J
R 612		RS1/16S104J
R 614		RS1/16S104J
R 616		RS1/16S104J
R 617		RS1/16S104J
R 627		RS1/16S681J
R 628		RS1/16S681J
R 629		RS1/16S681J
R 642		RS1/16S104J
R 651		RS1/16S102J
R 652		RS1/16S102J
R 653		RS1/16S183J
R 702		RS1/16S473J
R 703		RS1/16S682J
R 704		RS1/16S682J
R 705		RS1/16S682J
R 706		RS1/16S682J
R 707		RS1/16S221J
R 708		RS1/16S221J
R 709		RS1/16S221J
R 710		RS1/16S221J
R 711		RS1/16S221J
R 712		RS1/16S221J
R 713		RS1/16S0R0J
R 714		RS1/16S0R0J
R 741		RD1/4PU391J
R 742		RD1/4PU221J
R 743		RS1/16S331J
R 798		RS1/16S104J
R 799		RS1/16S102J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S222J
R 805		RS1/16S222J
R 806		RS1/16S472J
R 807		RS1/16S222J
R 808		RS1/16S102J
R 809		RS1/16S473J
R 810		RS1/16S104J
R 811		RS1/16S473J
R 812		RS1/16S563J
R 813		RD1/4PU391J
R 814		RS1/16S102J
R 815		RS1/16S104J
R 816		RS1/16S104J
R 817		RS1/16S102J
R 818		RS1/16S102J
R 819		RS1/16S472J
R 821		RS1/16S221J
R 822		RS1/16S221J
R 823		RS1/16S1R0J
R 831		RS1/16S472J
R 832		RS1/16S102J
R 833		RS1/16S472J
R 841		RS1/16S821J
R 844		RS1/16S1R0J
R 845		RS1/16S391J
R 846		RS1/16S121J
R 847		RD1/4PU152J
R 861		RS1/16S0R0J
R 901		RS1/16S223J
R 902		RS1/16S332J
R 903		RD1/4PU391J

Circuit Symbol and No.	Part Name	Part No.
R 904		RS1/16S0R0J
R 921		RD1/4PU221J
R 922		RS1/16S152J
R 923		RD1/4PU152J
R 924		RS1/16S223J
R 925		RS1/16S223J
R 931		RS1/16S104J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S472J
R 943		RS1/16S103J
R 951		RS1/16S102J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S153J
R 955		RS1/16S104J
R 981		RD1/4PU102J
R 982		RD1/4PU102J

CAPACITORS

C 102		CKSRYB104K25
C 131		CCSQCH152J50
C 132		CCSQCH152J50
C 133		CKSRYB105K10
C 134		CKSRYB105K10
C 137		CEAL1R0M50
C 138		CEAL1R0M50
C 139		CKSRYB105K10
C 140		CEAL1R0M50
C 141		CEJQ470M10
C 142		CKSRYB104K25
C 143		CEALNP4R7M16
C 144		CEJQNP4R7M16
C 145		CCSQCH152J50
C 146		CCSQCH152J50
C 147		CEALNP4R7M16
C 148		CEJQNP4R7M16
C 149		CEALNP4R7M16
C 150		CEJQNP4R7M16
C 151		CEALNP4R7M16
C 152		CEJQNP4R7M16
C 153		CCSRCH100D50
C 154		CCSRCH100D50
C 155		CCSRCH100D50
C 156		CCSRCH100D50
C 157		CCSRCH100D50
C 158		CCSRCH100D50
C 159		CKSRYB474K10
C 160		CKSRYB474K10
C 161		CEJQ100M50
C 163		CKSRYB104K25
C 164		CKSRYB104K25
C 171		CKSRYB103K50
C 173		CKSRYB104K25
C 174		CKSRYB104K25
C 175		CKSRYB104K25
C 176		CKSRYB104K25
C 177		CKSRYB474K10
C 178		CKSRYB474K10
C 179		CCSRCH101J50
C 180		CCSRCH101J50
C 301		CFTNA224J50
C 302		CFTNA224J50
C 305		CFTNA224J50
C 306		CFTNA224J50
C 309		CEHAR330M10
C 310	3300µF/16V	CCH1486
C 311		CKSRYB104K25
C 312		CEJQ100M16
C 313		CKSQYB225K10

			=====Circuit Symbol and No.===Part Name	Part No.
C	314			CKSQYB225K10
C	333			CEJQ220M25
C	334			CEJQ100M50
C	335			CEJQ100M50
C	341			CEAL4R7M35
C	342			CEJQ101M16
C	343			CASAQ3R3M16
C	345			CKSYB684K25
C	346			CEAL100M16
C	347			CKSQYB225K10
C	348			CEJQ330M25
C	349			CEJQ330M25
C	353			CKSRYB105K10
C	354			CKSRYB105K10
C	355			CKSRYB105K10
C	356			CKSRYB105K10
C	357			CKSRYB105K10
C	358			CKSRYB105K10
C	361			CEJQ100M50
C	362			CEJQ100M25
C	363			CEJQ100M50
C	364			CEJQ100M25
C	365			CEJQ100M50
C	366			CEJQ100M50
C	367			CKSRYB222K50
C	368			CKSRYB222K50
C	369			CKSRYB222K50
C	370			CKSRYB222K50
C	371			CKSRYB222K50
C	372			CKSRYB222K50
C	373			CEJQ220M25
C	401			CKSRYB103K50
C	402			CKSRYB103K50
C	403			CEJQ470M10
C	404			CKSRYB103K50
C	405			CEJQ101M10
C	408			CCSRCH101J50
C	601			CEJQ4R7M35
C	602			CKSRYB103K50
C	603			CCSRCH180J50
C	605			CCSRCH220J50
C	606			CCSRCH470J50
C	652			CKSRYB105K10
C	702	470µF/10V		CCH1438
C	741			CKSRYB473K50
C	742			CKSRYB102K50
C	743			CEJQ101M16
C	744			CKSRYB473K50
C	745			CEHAR101M10
C	801			CKSRYB473K50
C	821			CKSRYB473K50
C	832			CCSRCH101J50
C	833			CKSRYB473K50
C	834			CKSRYB105K10
C	841			CKSRYB104K25
C	842			CEJQ470M16
C	843			CEJQ101M10
C	844			CKSRYB104K25
C	845			CCSRCH331J50
C	846			CKSRYB103K50
C	847			CEJQ470M25
C	849	4.7µF		CCG1111
C	864			CKSRYB474K10
C	865			CKSRYB103K50
C	866			CEJQ220M6R3
C	867			CKSYB475K10
C	901	470µF/16V		CCH1331
C	902	470µF/16V		CCH1331
C	903			CKSRYB472K50
C	904			CKSRYB103K50
C	905			CEHAR470M16
C	921			CEJQ221M10
C	922			CKSRYB103K50
C	923			CEHAR101M10
C	931			CKSRYB104K25
C	941			CKSQYB105K16

B Unit Number : CWM8713
Unit Name : Keyboard Unit

MISCELLANEOUS

IC	1901	HIC	RS-140
IC	1902	IC	S-818A33AUC-BGN
IC	1940	IC	PD5808A
IC	1980	IC	PD6405A
IC	1981	IC	TC7WH32FU
IC	1990	IC	PD8105A
Q	1960	Transistor	2SC4617
Q	1961	Transistor	2SD1664
Q	1980	Transistor	2SC4154-11
Q	1981	Transistor	IMD2A
Q	1982	Transistor	IMD2A
D	1903	LED	CL190UBX
D	1904	LED	CL190UBX
D	1905	LED	CL-195PG-CD
D	1906	LED	CL-195PG-CD
D	1914	LED	CL-195PG-CD
D	1915	LED	CL-195PG-CD
D	1917	LED	CL-195PG-CD
D	1919	LED	CL-195PG-CD
D	1921	LED	CL-195PG-CD
D	1931	LED	CL-195PG-CD
D	1940	Diode	1SS355
D	1980	Diode	DAN202U
D	1982	Diode	UDZ13(B)
L	1901	Inductor	CTF1530
L	1940	Inductor	CTF1530
TH	1960	Thermistor	CCX1037
X	1940	Radiator 10.0MHz	CSS1577
S	1901	Encoder(VOLUME)	CSD1059
S	1902	Push Switch	CSG1112
S	1903	Push Switch	CSG1112
S	1904	Push Switch	CSG1112
S	1905	Push Switch	CSG1112
S	1906	Push Switch	CSG1111
S	1907	Push Switch	CSG1111
S	1908	Switch	CSG1107
S	1909	Switch	CSG1107
S	1910	Switch	CSG1107
S	1911	Switch	CSG1107
S	1912	Switch	CSG1107
S	1913	Switch	CSG1107
S	1914	Push Switch	CSG1111
S	1915	Push Switch	CSG1111
S	1916	Push Switch	CSG1111
S	1917	Push Switch	CSG1112
S	1918	Push Switch	CSG1160
S	1919	Push Switch	CSG1160
S	1920	Push Switch	CSG1112
S	1921	Push Switch	CSG1112
VR	1970	Semi-fixed 15kΩ(B)	CCP1230
VR	1971	Semi-fixed 20kΩ(B)	CCP1231
		OEL Unit	MXS8045

RESISTORS

R	1901		RS1/16S222J
R	1902		RS1/16S222J
R	1903		RS1/16S473J
R	1905		RS1/16S0R0J
R	1911		RS1/16S103J

=====Circuit Symbol and No.	===	Part Name	Part No.
R	1912		RS1/16S822J
R	1913		RS1/16S121J
R	1914		RS1/16S184J
R	1915		RS1/16S2R2J
R	1916		RS1/16S560J
R	1918		RS1/16S181J
R	1920		RS1/16S560J
R	1922		RS1/16S181J
R	1924		RS1/16S560J
R	1926		RS1/16S560J
R	1928		RS1/16S121J
R	1929		RS1/16S121J
R	1930		RS1/16S680J
R	1932		RS1/16S181J
R	1933		RS1/16S181J
R	1940		RS1/16S222J
R	1941		RS1/16S101J
R	1942		RAB4C101J
R	1943		RAB4C101J
R	1944		RAB4C101J
R	1945		RAB4C101J
R	1946		RAB4C101J
R	1947		RAB4C101J
R	1948		RAB4C101J
R	1949		RAB4C101J
R	1950		RAB4C101J
R	1952		RS1/16S101J
R	1953		RS1/16S101J
R	1954		RAB4C473J
R	1955		RS1/16S473J
R	1956		RS1/16S103J
R	1957		RAB4C101J
R	1958		RS1/16S473J
R	1959		RS1/16S154J
R	1960		RS1/16S223J
R	1961		RS1/16S683J
R	1962		RS1/16S392J
R	1963		RS1/16S393J
R	1980		RS1/16S473J
R	1981		RS1/16S473J
R	1982		RS1/16S473J
R	1983		RS1/16S102J
R	1985		RS1/16S0R0J
R	1991		RS1/16S101J
R	1992		RS1/16S101J
R	1993		RS1/16S101J
R	1994		RS1/16S101J
R	1996		RS1/16S332J
R	1997		RS1/16S222J
R	1998		RS1/16S102J
R	1999		RS1/16S102J
R	2000		RAB4C102J

CAPACITORS

C	1906		CKSRYB104K25
C	1907		CKSRYB104K25
C	1908		CKSYF106Z10
C	1909		CSZSR4R7M16
C	1910		CSZSR4R7M10
C	1940		CKSRYB103K50
C	1941		CKSRYB473K50
C	1942		CKSRYB105K10
C	1943		CKSRYB103K50
C	1944		CSZSR4R7M10
C	1972		CKSRYB104K25
C	1973		CKSRYB104K25
C	1974		CKSRYB104K25
C	1975		CKSRYB104K25
C	1976		CKSRYB104K25

=====Circuit Symbol and No.	===	Part Name	Part No.
C	1981		CKSRYB103K50
C	1983		CKSRYB103K50
C	1984		CSZSR4R7M16
C	1990		CKSRYB103K50
C	1991		CKSRYB104K25
C	1992		CKSRYB104K25

D Unit Number : CWM8758
Unit Name : Panel Unit

MISCELLANEOUS

D	1970	LED	CL220PGC
S	1970	Push Switch(EJECT)	CSG1112

RESISTORS

R	1970		RS1/16S101J
R	1971		RS1/16S101J
R	1972		RS1/16S0R0J

CAPACITORS

C	1970		CKSRYB104K16

C Unit Number : CWX2792
Unit Name : CD Core Unit(S10MP3)

MISCELLANEOUS

IC	201	IC	UPD63760GJ
IC	202	IC	MSM51V4265EP-70TS
IC	203	IC	BA033SFP
IC	301	IC	BA5996FM
IC	501	IC	UPD61002GC
IC	502	IC	BA25BC0WFP
IC	701	IC	PE5385A
IC	702	IC	TC74VHCT08AFT
IC	703	IC	S-818A33AUC-BGN
Q	101	Transistor	2SB1132
Q	601	Transistor	DTC323TK
Q	602	Transistor	DTC323TK
Q	603	Transistor	2SB709A
Q	701	Transistor	UN2111
D	101	Diode	1SS355
D	201	Diode	1SR154-400
D	501	Diode	1SR154-400
D	601	Diode	MA152WA
L	201	Inductor	CTF1386
L	202	Inductor	CTF1386
L	204	Inductor	CTF1386
L	205	Inductor	CTF1386
L	206	Inductor	CTF1386
L	207	Inductor	CTF1386
L	208	Inductor	CTF1386
L	209	Inductor	CTF1386
L	211	Inductor	CTF1386
L	212	Inductor	CTF1386
L	501	Inductor	CTF1386
L	502	Inductor	CTF1386
L	503	Inductor	CTF1386
L	701	Inductor	CTF1386
L	702	Inductor	LCYBR22J1608
L	703	Inductor	CTF1386
L	704	Inductor	CTF1386
X	201	Ceramic Resonator 16.934MHz	CSS1603
X	202	Ceramic Resonator 24.57MHz	CSS1615
X	702	Resonator 16.000MHz	CSS1627
S	901	Switch(HOME)	CSN1051
S	902	Switch(CLAMP)	CSN1051

		=====Circuit Symbol and No.===Part Name	Part No.			=====Circuit Symbol and No.===Part Name	Part No.
S	903	Spring Switch(DSCSNS)	CSN1052	R	707		RS1/16SS0R0J
S	904	Switch(12EJ)	CSN1051	R	708		RS1/16SS102J
S	905	Switch(8EJ)	CSN1051	R	709		RS1/16SS102J
				R	710		RS1/16SS102J
		RESISTORS		R	711		RS1/16SS102J
R	101		RS1/10S1R5J	R	712		RS1/16SS102J
R	102		RS1/10S1R5J	R	713		RS1/16SS102J
R	103		RS1/10S1R5J	R	714		RS1/16SS473J
R	104		RS1/10S1R5J	R	715		RAB4CQ221J
R	105		RS1/10S1R5J	R	716		RAB4CQ221J
R	201		RS1/16SS102J	R	717		RAB4CQ221J
R	202		RS1/16SS333J	R	718		RAB4CQ221J
R	203		RS1/16SS333J	R	719		RAB4CQ221J
R	204		RS1/16SS333J	R	720		RS1/16SS471J
R	206		RS1/16SS0R0J	R	721		RS1/16SS471J
R	208		RS1/16SS0R0J	R	722		RAB4CQ221J
R	210		RS1/16SS0R0J	R	723		RS1/16SS102J
R	212		RS1/16SS221J	R	724		RS1/16S473J
R	213		RS1/16SS1002D	R	725		RS1/16SS222J
R	214		RS1/16SS1002D	R	726		RS1/16SS103J
R	215		RS1/16SS6801D	R	727		RS1/16SS473J
R	216		RS1/16SS6801D	R	728		RS1/16SS473J
R	217		RS1/16SS1002D	R	729		RS1/16SS223J
R	218		RS1/16SS1002D	R	730		RS1/16SS473J
R	219		RS1/16SS1002D	R	731		RS1/16SS104J
R	220		RS1/16SS1002D	R	732		RS1/16SS104J
R	221		RS1/16SS103J	R	733		RS1/16SS104J
R	222		RS1/16SS103J	R	737		RAB4CQ473J
R	223		RS1/16SS103J	R	739		RAB4CQ473J
R	224		RS1/16SS103J	R	740		RS1/16SS473J
R	225		RS1/16SS103J	R	741		RS1/16SS104J
R	226		RS1/16SS393J	R	742		RS1/16SS104J
R	227		RS1/16SS103J	R	745		RS1/16SS473J
R	228		RS1/16SS182J	R	747		RS1/16SS104J
R	229		RS1/16SS103J	R	748		RS1/16SS104J
R	231		RS1/16SS0R0J	R	751		RS1/16SS221J
R	232		RS1/16SS182J	R	752		RS1/16SS221J
R	233		RS1/16SS0R0J	R	754		RS1/16SS102J
R	237		RS1/16SS104J	R	755		RS1/16SS102J
R	238		RS1/16SS473J	R	756		RS1/16SS104J
R	240		RS1/16SS0R0J	R	757		RS1/16SS104J
R	241		RS1/16SS221J	R	801		RS1/16SS104J
R	301		RS1/16SS183J	R	802		RS1/16SS473J
R	302		RS1/16SS822J	R	803		RS1/16SS273J
R	303		RS1/16SS0R0J	R	901		RS1/16SS221J
R	304		RS1/16SS183J	R	902		RS1/16SS221J
R	305		RS1/16SS822J	R	903		RS1/16SS221J
R	306		RS1/16SS0R0J	R	904		RS1/16SS221J
R	307		RS1/16SS183J	R	905		RS1/16SS221J
R	308		RS1/16SS822J	R	906		RS1/16SS221J
R	309		RS1/16SS183J			CAPACITORS	
R	310		RS1/16SS822J				
R	311		RS1/16SS0R0J	C	101		CKSSYB104K10
R	501		RS1/16SS221J	C	102		CKSSYB104K10
R	502		RS1/16SS221J	C	103		CEV101M16
				C	104		CEV101M4
R	503		RS1/16SS221J	C	105		CKSSYB104K10
R	504		RAB4CQ223J				
R	505		RAB4CQ223J	C	106		CCSRCH101J50
R	506		RAB4CQ223J	C	108		CKSSYB104K10
R	507		RS1/16SS223J	C	109		CEV100M16
				C	201		CKSSYB471K50
R	508		RS1/16SS223J	C	202		CKSSYB104K10
R	509		RS1/16SS102J				
R	510		RS1/16SS223J	C	203		CKSSYB104K10
R	511		RS1/16SS223J	C	204		CEV220M6R3
R	512		RS1/16SS223J	C	205		CKSSYB103K16
				C	206		CKSSYB103K16
R	601		RS1/16S101J	C	207		CEV221M4
R	602		RS1/16S101J				
R	603		RS1/16S223J				
R	604		RS1/16S223J				
R	605		RS1/16SS103J				

=====Circuit Symbol and No.		===Part Name	Part No.
C	208		CKSSYB104K10
C	209		CKSSYB104K10
C	210		CKSSYB104K10
C	211		CKSSYB104K10
C	216		CKSSYB332K50
C	217		CKSSYB104K10
C	218		CKSSYB223K16
C	219		CKSSYB104K10
C	220		CKSSYB103K16
C	221		CKSSYB104K10
C	222		CCSSCH270J50
C	223		CCSSCJ3R0C50
C	224		CKSSYB104K10
C	225		CKSSYB103K16
C	226		CCSSCH680J50
C	227		CCSSCH470J50
C	228		CKSSYB682K25
C	230		CKSSYB104K10
C	232		CKSSYB104K10
C	233	47µF/6.3V	CCH1436
C	234		CEV221M4
C	235		CKSRYB224K16
C	237		CKSSYB104K10
C	238		CKSSYB104K10
C	239		CCSSCH9R0D50
C	242		CKSSYB104K10
C	243		CKSSYB104K10
C	245		CKSSYB104K10
C	246		CKSSYB104K10
C	301		CKSSYB331K50
C	302		CKSSYB331K50
C	303		CKSSYB472K25
C	304		CKSSYB472K25
C	305		CEV101M16
C	306		CKSRYB224K16
C	501		CKSSYB104K10
C	502		CKSSYB471K50
C	503		CKSSYB104K10
C	504	47µF/6.3V	CCH1436
C	505		CKSRYB224K16
C	506		CKSSYB104K10
C	508		CKSSYB104K10
C	509		CKSSYB104K10
C	510		CKSSYB104K10
C	511		CKSSYB104K10
C	601		CCSRCH102J50
C	602		CCSRCH102J50
C	603	4.7µF/25V	CCH1508
C	604	4.7µF/25V	CCH1508
C	701		CKSSYB104K10
C	702		CKSSYB471K50
C	703		CKSSYB103K16
C	704		CEV1R0M50
C	705		CKSSYB104K10
C	706		CKSSYB471K50
C	707		CKSSYB104K10
C	708		CKSSYB104K10
C	710		CKSSYB104K10
C	711	10µF/10V	CCH1349
C	712		CKSRYB224K16
C	713		CKSSYB104K10
C	714		CKSSYB104K10
C	715		CKSSYB103K16
C	716		CKSSYB103K16
C	717		CCSSCH8R0D50
C	718		CCSSCH8R0D50
C	901		CKSSYB104K10
C	903		CCSRCH101J50

Miscellaneous Parts List

=====Circuit Symbol and No.		===Part Name	Part No.
		Pickup Unit(Service)(P10)	CXX1641
M	1	Motor Unit(SPINDLE)	CXB6007
M	2	Motor Unit(LOADING/CARRIAGE)	CXB8933