



EXPLODED VIEW

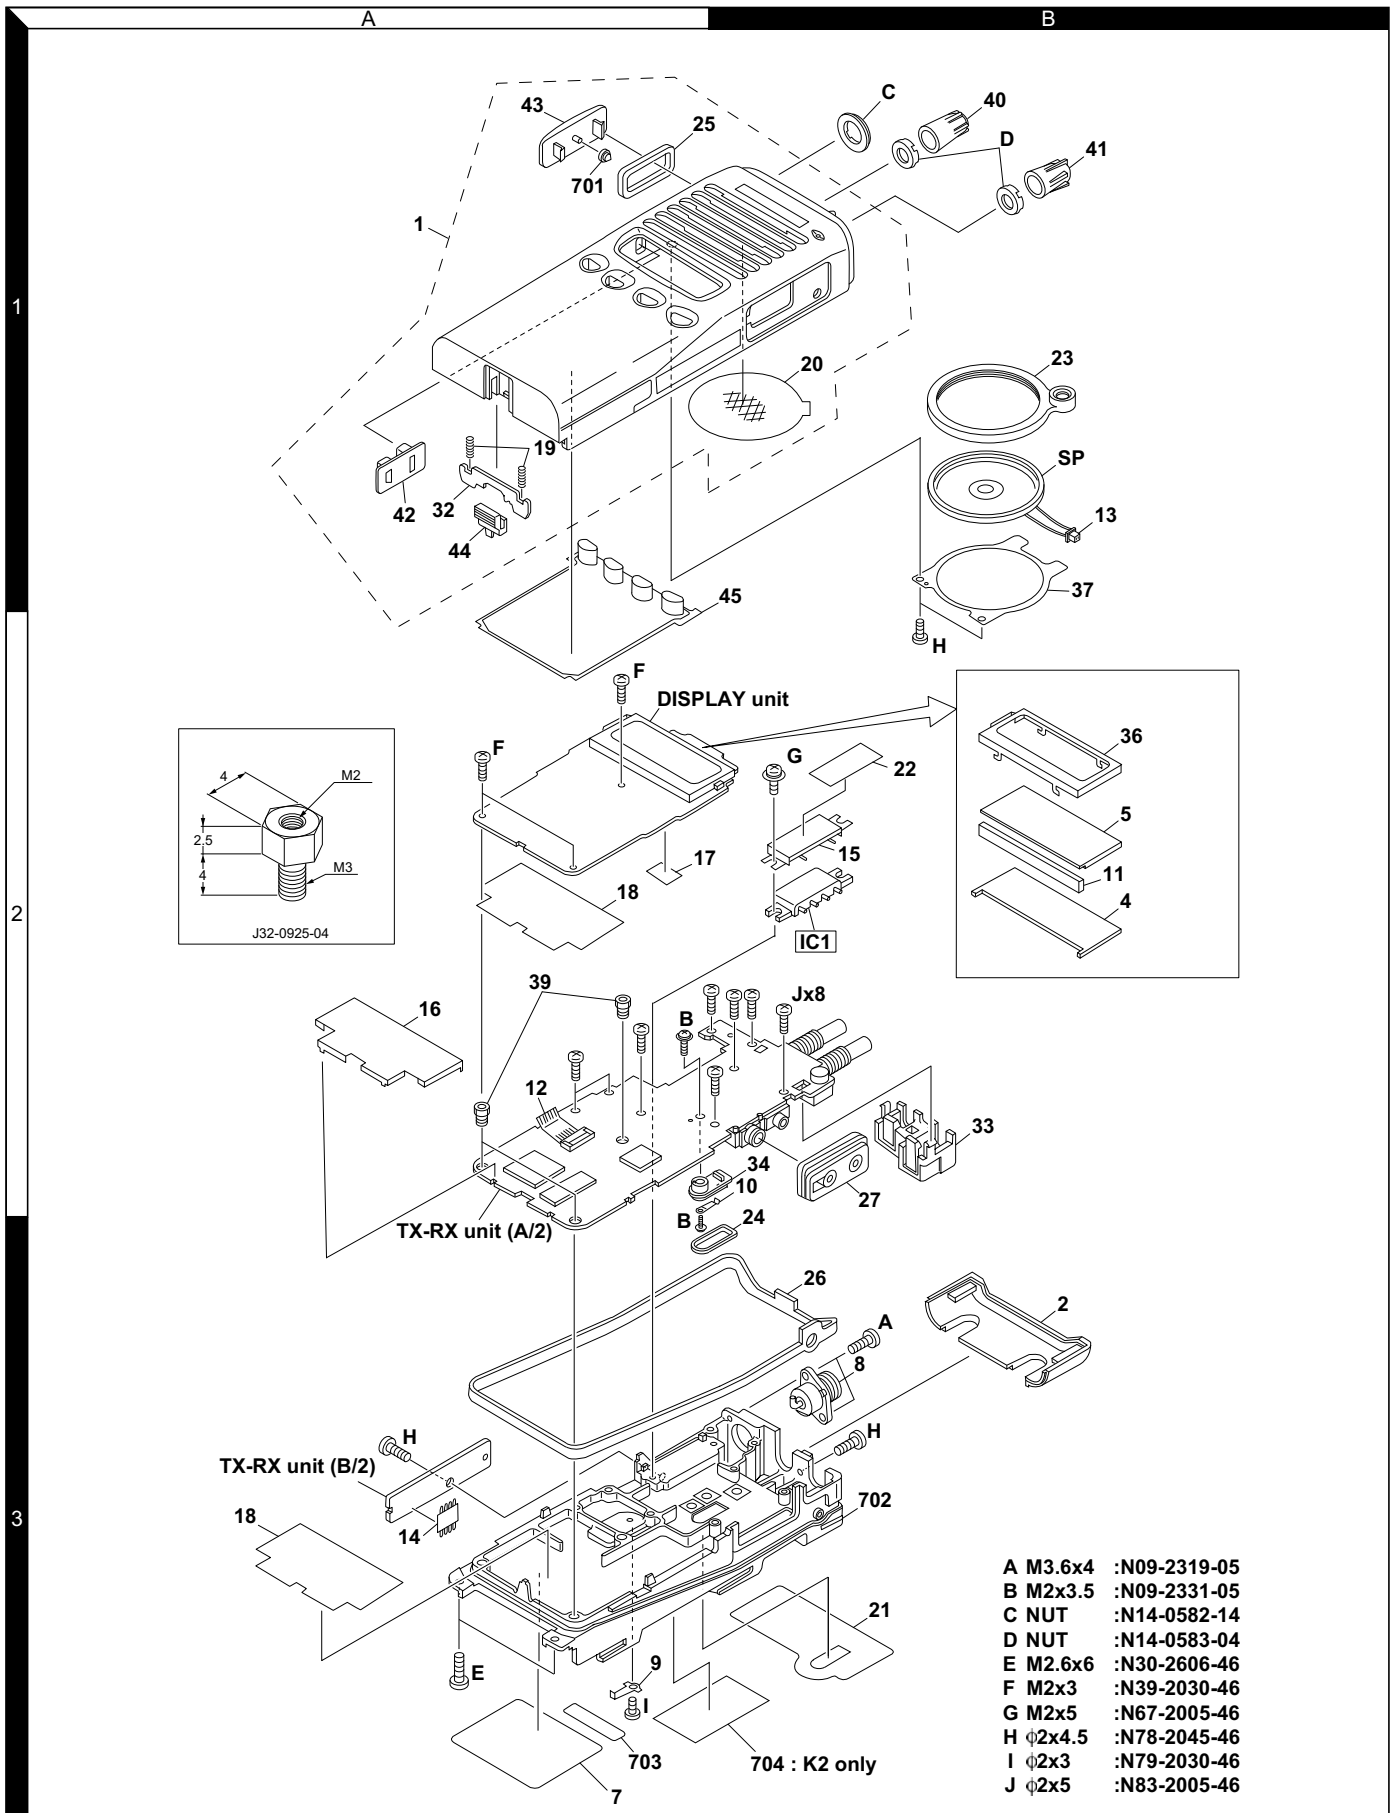

PACKING

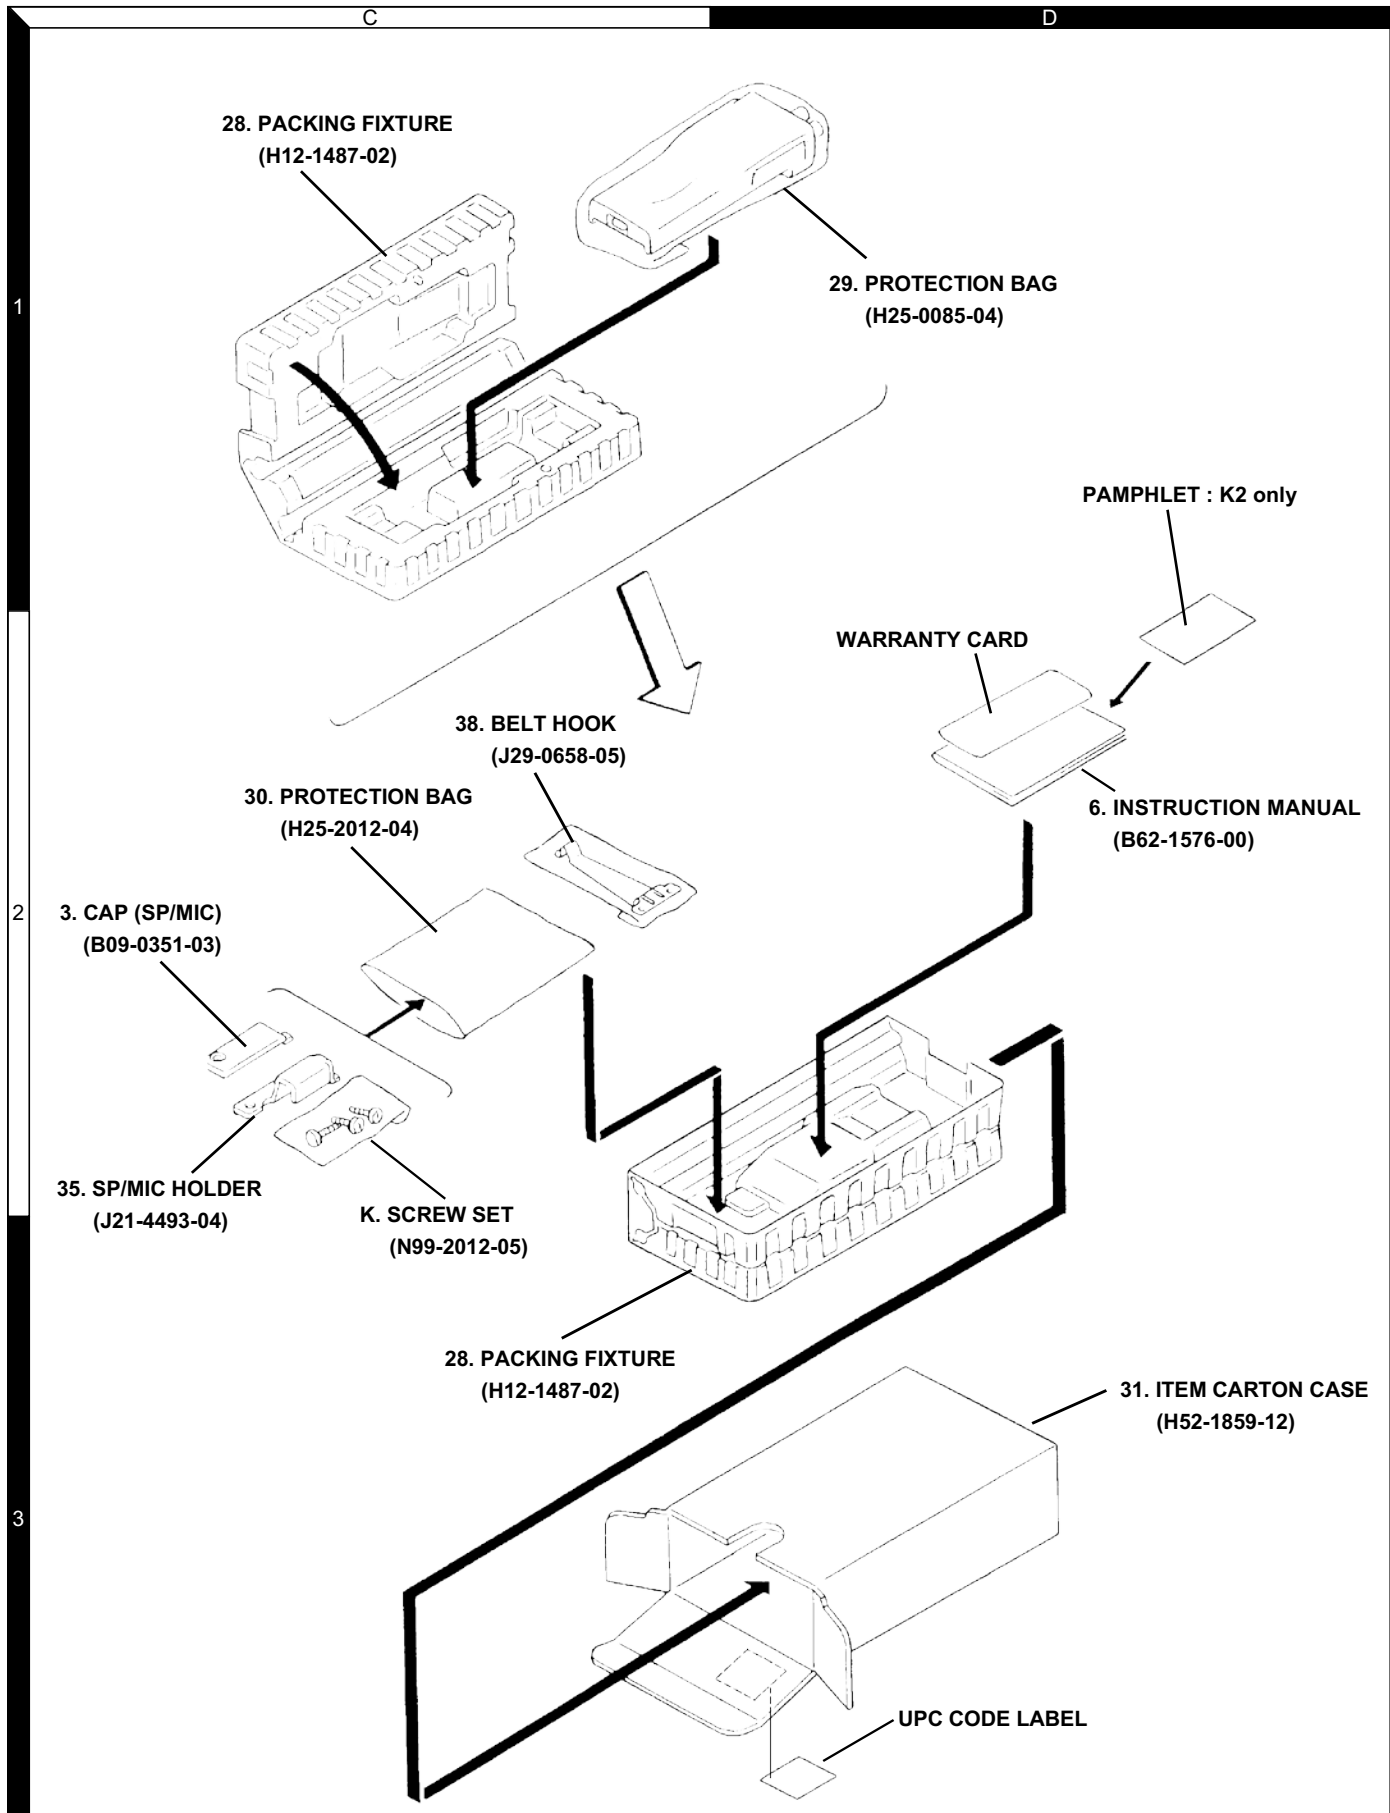

PARTS LIST

* New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.
TK-373G

L: Scandinavia K: USA P: Canada
Y: PX (Far East, Hawaii) T: England E: Europe
Y: AAFES (Europe) X: Australia M: Other Areas

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-373G					
1	1A		A02-3568-33	CABINET ASSY	K
2	3B		A82-0036-02	REAR PANEL	
3	2C		B09-0351-03	CAP(SP/MIC)	
4	2B		B11-1220-03	ILLUMINATION GUIDE	
5	2B	*	B38-0867-05	LCD	
6	2D	*	B62-1576-00	INSTRUCTION MANUAL	
7	2D	*	B72-2026-04	MODEL NAME PLATE	
7	2D	*	B72-2027-04	MODEL NAME PLATE	
8	3B		E04-0413-05	RF COAXIAL RECEPTACLE(SMA)	
9	3A		E23-1183-04	RELAY TERMINAL(BATT-)	
10	2A		E23-1184-04	RELAY TERMINAL(BATT+)	
11	2B		E29-1177-04	INTER CONNECTOR(LCD)	
12	2A		E37-0805-05	FLAT CABLE(TX/RX-DISP)	K2
13	1B		E37-0829-05	SPEAKER CORD	
14	3A		E37-0830-05	FLAT CABLE(PTT)	
15	2B		F10-2302-04	SHIELDING COVER(POWER MODULE)	
16	2A		F10-2304-03	SHIELDING COVER(TX/RX UNIT)	
17	2A		F20-3307-04	INSULATING SHEET(LCD)	
18	2A		F20-3308-04	INSULATING SHEET(DISP/CHASSIS)	
19	1A		G01-0881-04	COIL SPRING(BATT RELEASE)	
20	1B		G10-1232-04	FIBROUS SHEET(SPEAKER)	
21	3B		G13-1744-14	CUSHION(CHASSIS-BATT)	
22	2B		G13-1783-04	CUSHION(POWER MODULE COVER)	
-			G13-1834-04	CUSHION(BATT TERMINAL + -)	
23	1B		G53-0882-03	PACKING(SPEAKER/ECM)	
24	3A		G53-0883-04	PACKING(BATT TERMINAL+)	
25	1A		G53-0891-04	PACKING(PTT KNOB)	
26	3B		G53-1530-02	PACKING	
27	2B		G53-1531-03	PACKING(SP/MIC/JACK)	
28	1C,2C		H12-1487-02	PACKING FIXTURE	
29	1C		H25-0085-04	PROTECTION BAG	
30	2C		H25-2012-04	PROTECTION BAG	
31	3D	*	H52-1859-12	ITEM CARTON CASE	
32	1A		J19-1572-04	HOLDER(BATT RELEASE)	
33	2B		J19-5352-03	HOLDER(VOL/ENC)	
34	2A		J19-5353-14	HOLDER(BATT TERMINAL+)	
35	2C		J21-4493-04	SP/MIC HOLDER	
36	2B		J21-8377-03	HARDWARE FIXTURE(LCD)	
37	1B		J21-8378-04	HARDWARE FIXTURE(SPEAKER)	
38	2C		J29-0658-05	BELT HOOK	
39	2A		J32-0925-04	HEXAGON BOSS	
40	1B		K29-5331-03	KNOB(ENCODER)	
41	1B		K29-5332-03	KNOB(VOLUME)	
42	1A		K29-5333-13	BUTTON KNOB(MONI/LAMP)	
43	1A		K29-5334-13	BUTTON KNOB(PTT)	
44	1A		K29-5337-03	LEVER KNOB(BATTRELEASE)	
45	1A	*	K29-9142-02	KEY TOP(4 KEYS)	K2 K
A	3B		N09-2319-05	BINDING HEAD SCREW(SMA)	

Ref. No.	Address	New parts	Parts No.	Description	Destination			
B	2A		N09-2331-05	SPECIAL SCREW(BATT TERMINAL+)				
C	1B		N14-0582-14	CIRCULAR NUT(SMA)				
D	1B		N14-0583-04	CIRCULAR NUT(VOL/ENC)				
E	3A		N30-2606-46	PAN HEAD MACHINE SCREW				
F	2A		N39-2030-46	PAN HEAD MACHINE SCREW				
G	2B		N67-2005-46	PAN HEAD SEMS SCREW(POWER MODULE)				
H	1B,3A,3B		N78-2045-46	PAN HEAD TAPTITE SCREW				
I	3A		N79-2030-46	PAN HEAD TAPTITE SCREW				
J	2A,2B		N83-2005-46	PAN HEAD TAPTITE SCREW				
K	2C		N99-2012-05	SCREW SET				
VR2	-		R31-0628-15	VARIABLE RESISTOR				
SP	1B		T07-0326-05	SPEAKER				
S1	-		W02-1969-15	ENCODER				
DISPLAY UNIT (X54-3250-11)								
D506			B30-2210-05	LED(TLY)				
D511			B30-2210-05	LED(TLY)				
D515,516			B30-2171-05	LED(D)				
C501-509			CC73GCH1H221J	CHIP C 220PF J				
C513			CK73GB1H102K	CHIP C 1000PF K				
C515,516			CC73GCH1H101J	CHIP C 100PF J				
CN501			E40-6012-05	FLAT CABLE CONNECTOR				
L501,502			L92-0138-05	FERRITE CHIP				
CP501			R90-0748-05	MULTI-COMP 47K X4				
CP502,503			R90-0724-05	MULTI-COMP 1K X4				
R501-510			RK73GB1J102J	CHIP R 1.0K J 1/16W				
R511			R92-1252-05	CHIP R 00HM J 1/16W				
R512			RK73GB1J102J	CHIP R 1.0K J 1/16W				
R513-515			RK73GB1J103J	CHIP R 10K J 1/16W				
R516			RK73GB1J473J	CHIP R 47K J 1/16W				
R517			RK73GB1J103J	CHIP R 10K J 1/16W				
R518			RK73GB1J471J	CHIP R 470 J 1/16W				
R522			RK73GB1J102J	CHIP R 1.0K J 1/16W				
R523			RK73GB1J473J	CHIP R 47K J 1/16W				
R524			RK73GB1J471J	CHIP R 470 J 1/16W				
D501-504			MA2S111	DIODE				
D505			1SS373	DIODE				
D507			MA2S111	DIODE				
IC501			LC75823W	MOS IC				
Q501			2SB1132(Q,R)	TRANSISTOR				
Q502			2SC4617(S)	TRANSISTOR				
TX-RX UNIT (X57-6500-XX) -10:TK-373G K -11:TK-373G K2								
D18						B30-2019-05	LED(RE/GR)	K2 K
C1			CC73HCH1H100C	CHIP C 10PF C				
C3-5			CC73GCH1H010B	CHIP C 1.0PF B				
C4,5			CC73GCH1H010B	CHIP C 1.0PF B				
C6			CK73HB1A104K	CHIP C 0.10UF K				
C8			CC73GCH1H030B	CHIP C 3.0PF B				

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C9			CK73HB1H471K	CHIP C 470PF K		C75			CK73GB1H471K	CHIP C 470PF K	
C10			CC73GCH1H060B	CHIP C 6.0PF B	K2	C76			CK73GB1H102K	CHIP C 1000PF K	
C10			CC73GCH1H080B	CHIP C 8.0PF B	K	C78			CC73GCH1H470J	CHIP C 47PF J	
C11			CC73GCH1H080D	CHIP C 8.0PF D		C81			CC73GCH1H010C	CHIP C 1.0PF C	
C12			CC73GCH1H070D	CHIP C 7.0PF D		C82			CK73GB1H102K	CHIP C 1000PF K	K
C13			CK73GB1H471K	CHIP C 470PF K		C84,85			CK73GB1H471K	CHIP C 470PF K	
C14			CC73GCH1H0R5B	CHIP C 0.5PF B		C86,87			CC73HCH1H100C	CHIP C 10PF C	
C15			CC73GCH1H101J	CHIP C 100PF J		C88			CC73GCH1H040B	CHIP C 4.0PF B	K
C16			CC73GCH1H050B	CHIP C 5.0PF B	K2	C88			CC73GCH1H050B	CHIP C 5.0PF B	K2
C16			CC73GCH1H060B	CHIP C 6.0PF B	K	C89			CC73GCH1H070B	CHIP C 7.0PF B	
C17			CC73GCH1H040B	CHIP C 4.0PF B	K	C90			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C17,18			CC73GCH1H040B	CHIP C 4.0PF B	K2	C94			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C18			CC73GCH1H060B	CHIP C 6.0PF B	K	C95,96			CK73GB1H471K	CHIP C 470PF K	
C20			CC73GCH1H020B	CHIP C 2.0PF B	K2	C98			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C20			CC73GCH1H030B	CHIP C 3.0PF B	K	C99			CK73GB1C104K	CHIP C 0.10UF K	
C22			CC73GCH1H101J	CHIP C 100PF J		C100			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C23			CC73GCH1H020B	CHIP C 2.0PF B	K	C101			CK73GB1H471K	CHIP C 470PF K	
C23			CC73GCH1H050B	CHIP C 5.0PF B	K2	C104			CK73GB1H471K	CHIP C 470PF K	
C24			CC73GCH1H030B	CHIP C 3.0PF B	K	C107,108			CK73GB1C104K	CHIP C 0.10UF K	
C24			CC73GCH1H080B	CHIP C 8.0PF B	K2	C109			C92-0662-05	CHIP-TAN 15UF 6.3WV	
C25			CC73GCH1H040B	CHIP C 4.0PF B	K	C110			CK73GB1H103K	CHIP C 0.010UF K	
C25			CC73GCH1H090B	CHIP C 9.0PF B	K2	C111			CK73GB1H471K	CHIP C 470PF K	
C26			CC73GCH1H1R5B	CHIP C 1.5PF B		C112			CC73GCH1H050B	CHIP C 5.0PF B	
C27			CC73GCH1H0R5B	CHIP C 0.5PF B		C113			CK73GB1H471K	CHIP C 470PF K	
C28			CC73GCH1H060D	CHIP C 6.0PF D		C114			CK73GB1H391K	CHIP C 390PF K	
C29			CC73GCH1H030B	CHIP C 3.0PF B		C115			CK73GB1C104K	CHIP C 0.10UF K	
C30			CC73GCH1H060D	CHIP C 6.0PF D		C118			CK73GB1H471K	CHIP C 470PF K	
C31			C92-0662-05	CHIP-TAN 15UF 6.3WV		C119			CK73FB1A105K	CHIP C 1.0UF K	
C32			CK73HB1A104K	CHIP C 0.10UF K		C120,121			CK73GB1H471K	CHIP C 470PF K	
C33			CC73GCH1H050B	CHIP C 5.0PF B	K2	C122			CK73FB1A105K	CHIP C 1.0UF K	
C33			CC73GCH1H060B	CHIP C 6.0PF B	K	C123			CK73GB1H391K	CHIP C 390PF K	
C35-41			CK73GB1H471K	CHIP C 470PF K		C124			CC73GCH1H390J	CHIP C 39PF J	K
C42,43			CC73GCH1H101J	CHIP C 100PF J		C124			CC73GCH1H560J	CHIP C 56PF J	K2
C44			CC73HCH1H101J	CHIP C 100PF J		C125,126			CK73GB1H103K	CHIP C 0.010UF K	
C45			CK73GB1H471K	CHIP C 470PF K		C127			CC73GCH1H010B	CHIP C 1.0PF B	
C48,49			C92-0001-05	CHIP-C 0.1UF 35WV		C128			CC73GCH1H120J	CHIP C 12PF J	
C51			C92-0697-05	CHIP-TAN 3.3UF 16WV		C130			CK73GB1H471K	CHIP C 470PF K	
C52			CC73GCH1H030B	CHIP C 3.0PF B	K2	C131			CC73GCH1H100D	CHIP C 10PF D	
C52			CC73GCH1H040B	CHIP C 4.0PF B	K	C132			CK73GB1H103K	CHIP C 0.010UF K	
C53			CK73GB1H471K	CHIP C 470PF K		C133			CC73GCH1H820J	CHIP C 82PF J	
C54			CK73FB1C474K	CHIP C 0.47UF K		C134			CK73GB1H471K	CHIP C 470PF K	
C55			CK73GB1H471K	CHIP C 470PF K		C135			CK73GB1C104K	CHIP C 0.10UF K	
C57			CK73FB1C474K	CHIP C 0.47UF K		C136			CC73GCH1H040B	CHIP C 4.0PF B	
C58			CK73GB1H103K	CHIP C 0.010UF K		C137			CK73GB1H471K	CHIP C 470PF K	
C60			CK73GB1H103K	CHIP C 0.010UF K		C138			CK73GB1C104K	CHIP C 0.10UF K	
C62			CC73GCH1H270J	CHIP C 27PF J	K2	C139			CC73GCH1H181J	CHIP C 180PF J	
C62			CC73GCH1H560J	CHIP C 56PF J	K	C140			CK73GB1H103K	CHIP C 0.010UF K	
C63			CC73GCH1H070B	CHIP C 7.0PF B		C141			CK73GB1C104K	CHIP C 0.10UF K	
C64			CC73GCH1H010B	CHIP C 1.0PF B		C142			CK73FB1A105K	CHIP C 1.0UF K	
C68			C92-0565-05	CHIP-TAN 6.8UF 10WV		C143,144			CK73GB1H471K	CHIP C 470PF K	
C70			CK73GB1H103K	CHIP C 0.010UF K		C146,147			CK73GB1C104K	CHIP C 0.10UF K	
C71			CC73GCH1H101J	CHIP C 100PF J		C148			CK73GB1H103K	CHIP C 0.010UF K	
C72			CC73GCH1H180G	CHIP C 18PF G	K2	C150			CK73GB1H102K	CHIP C 1000PF K	
C72			CC73GCH1H330G	CHIP C 33PF G	K	C151-153			CK73GB1H471K	CHIP C 470PF K	
C73			CK73GB1H471K	CHIP C 470PF K		C155			C92-0662-05	CHIP-TAN 15UF 6.3WV	
C74			CK73FB1E104K	CHIP C 0.10UF K		C156,157			CK73GB1H471K	CHIP C 470PF K	

K : TK-373G K
K2 : TK-373G K2

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C158			CK73FB1A105K	CHIP C 1.0UF K		C238			CK73GB1H392K	CHIP C 3900PF K	
C159			CK73GB1H471K	CHIP C 470PF K		C239			CK73GB1C104K	CHIP C 0.10UF K	
C161			CK73GB1H471K	CHIP C 470PF K		C240			CK73GB1H272J	CHIP C 2700PF J	
C162			CK73GB1H103K	CHIP C 0.010UF K		C241			CK73GB1H471K	CHIP C 470PF K	
C163,164			CK73GB1H471K	CHIP C 470PF K		C242			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C165			CK73GB1H103K	CHIP C 0.010UF K		C243			CK73FB1A105K	CHIP C 1.0UF K	
C166			CK73FF1E104Z	CHIP C 0.10UF Z		C244			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C167			CK73GB1H471K	CHIP C 470PF K		C245			CK73GB1H471K	CHIP C 470PF K	
C170,171			CK73GB1H471K	CHIP C 470PF K		C246			CK73FB1A105K	CHIP C 1.0UF K	
C173			C92-0567-05	CHIP-TAN 68UF 6.3WV		C247			CK73GB1E123K	CHIP C 0.012UF K	
C174			CK73GB1H471K	CHIP C 470PF K		C249			CK73GB1H222K	CHIP C 2200PF K	
C176			CC73GCH1H101J	CHIP C 100PF J		C250			CK73GB1C683K	CHIP C 0.068UF K	
C177			CK73GB1C473K	CHIP C 0.047UF K		C253,254			CK73GB1H103K	CHIP C 0.010UF K	
C178			C92-0560-05	CHIP-TAN 10UF 6.3WV		C255			CK73GB1H183K	CHIP C 0.018UF K	
C179			CK73GB1C104K	CHIP C 0.10UF K		C257,258			CK73GB1E153K	CHIP C 0.015UF K	
C180			CK73GB1H103K	CHIP C 0.010UF K		C259			CC73GCH1H121J	CHIP C 120PF J	
C181			CK73GB1C393K	CHIP C 0.039UF K		C260			CK73GB1H183K	CHIP C 0.018UF K	
C182			CK73GB1H102K	CHIP C 1000PF K		C261			CK73GB1E153K	CHIP C 0.015UF K	
C183,184			CK73GB1C104K	CHIP C 0.10UF K		C262			CK73GB1H102K	CHIP C 1000PF K	
C185			CC73GCH1H180J	CHIP C 18PF J		C263			CK73GB1C104K	CHIP C 0.10UF K	
C186,187			CK73GB1C104K	CHIP C 0.10UF K		C265,266			CK73GB1C104K	CHIP C 0.10UF K	
C189			CK73GB1H103K	CHIP C 0.010UF K		C268			CK73GB1H102K	CHIP C 1000PF K	
C190,191			CK73GB1C104K	CHIP C 0.10UF K		C271			CK73GB1H102K	CHIP C 1000PF K	
C192,193			CC73GCH1H300J	CHIP C 30PF J		C272			CK73HB1H471K	CHIP C 470PF K	
C194			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C273-276			CK73GB1H471K	CHIP C 470PF K	
C196			CC73GCH1H101J	CHIP C 100PF J		C277			CC73GCH1H680J	CHIP C 68PF J	
C198,199			CK73GB1H103K	CHIP C 0.010UF K		C278			CK73GB1C104K	CHIP C 0.10UF K	
C200			CK73GB1A224K	CHIP C 0.22UF K		C302			CC73GCH1H010B	CHIP C 1.0PF B	
C201			CK73GB1H103K	CHIP C 0.010UF K		C303			CC73GCH1H030B	CHIP C 3.0PF B	
C202,203			CK73GB1C104K	CHIP C 0.10UF K		C304			CK73GB1H471K	CHIP C 470PF K	
C204			CK73FB1C474K	CHIP C 0.47UF K		C305,306			CC73GCH1H0R5B	CHIP C 0.5PF B	
C205			CK73GB1H103K	CHIP C 0.010UF K		C307			CC73GCH1H220J	CHIP C 22PF J	
C206-208			CK73GB1C104K	CHIP C 0.10UF K		C309			CC73GCH1H100D	CHIP C 10PF D	K2
C209			CK73GB1H332K	CHIP C 3300PF K		C309			CK73GB1H471K	CHIP C 470PF K	K
C210			CK73GB1H102K	CHIP C 1000PF K		C311			CC73GCH1H020B	CHIP C 2.0PF B	K2
C211			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C311			CC73GCH1H030B	CHIP C 3.0PF B	K
C212			CK73GB1H122K	CHIP C 1200PF K		C312			CC73GCH1H010B	CHIP C 1.0PF B	K2
C213			CK73GB1H103K	CHIP C 0.010UF K		C312			CC73GCH1H020B	CHIP C 2.0PF B	K
C215			CK73GB1C104K	CHIP C 0.10UF K		C314			CC73GCH1H020B	CHIP C 2.0PF B	K2
C216			CK73GB1H332K	CHIP C 3300PF K		C314			CC73GCH1H030B	CHIP C 3.0PF B	K
C217			CK73GB1E153K	CHIP C 0.015UF K		C316,317			CK73GB1H471K	CHIP C 470PF K	
C218			CK73FB1H563K	CHIP C 0.056UF K		C325-327			CK73GB1H471K	CHIP C 470PF K	
C219			CK73GB1C104K	CHIP C 0.10UF K		C333			CC73GCH1H330J	CHIP C 33PF J	K2
C221			CK73GB1H471K	CHIP C 470PF K		C333			CC73GCH1H390J	CHIP C 39PF J	K
C222			CK73GB1H103K	CHIP C 0.010UF K		C334			CC73HCH1H040B	CHIP C 4.0PF B	
C223			C92-0560-05	CHIP-TAN 10UF 6.3WV		C335			CC73GCH1H050B	CHIP C 5.0PF B	K2
C224			CK73GB1H122K	CHIP C 1200PF K		C336			CK73FB1A105K	CHIP C 1.0UF K	
C225			CC73GCH1H101J	CHIP C 100PF J		TC1,2			C05-0384-05	CERAMIC TRIMMER CAP(10PF)	
C226,227			CK73GB1H562J	CHIP C 5600PF J		TC301,302			C05-0383-05	CERAMIC TRIMMER CAP(6PF)	
C229			CK73FB1H471K	CHIP C 470PF K		TC303			C05-0384-05	CERAMIC TRIMMER CAP(10PF)	
C230			CK73GB1H562J	CHIP C 5600PF J		CN1			E40-6012-05	FLAT CABLE CONNECTOR	
C231			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		CN3			E40-5662-05	PIN ASSY SOCKET	
C232			CK73GB1H103K	CHIP C 0.010UF K		J1			E11-0457-05	PHONE JACK	
C233			CC73GCH1H151J	CHIP C 150PF J		F1			F53-0130-05	FUSE	
C234,235			CK73GB1H272J	CHIP C 2700PF J		F1			F53-0217-05	FUSE	
C236			CK73GB1C104K	CHIP C 0.10UF K							

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
CD1			L79-1794-05	TUNING COIL		CP20			RK75HA1J472J	CHIP-COM 4.7K J 1/16W	
CF1			L72-0968-05	CERAMIC FILTER		R1			RK73HB1J124J	CHIP R 120K J 1/16W	
CF2			L72-0969-05	CERAMIC FILTER		R2			RK73HB1J683J	CHIP R 68K J 1/16W	
L1			L40-3963-92	SMALL FIXED INDUCTOR(3.9NH)		R3			RK73GB1J392J	CHIP R 3.9K J 1/16W	K
L2			L92-0138-05	FERRITE CHIP		R3			RK73GB1J472J	CHIP R 4.7K J 1/16W	K2
L3			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)		R4			RK73HB1J101J	CHIP R 100 J 1/16W	
L4			L33-0744-05	SMALL FIXED INDUCTOR		R5			RK73GB1J152J	CHIP R 1.5K J 1/16W	
L5-7			L34-4546-05	AIR-CORE COIL	K2	R6			R92-1252-05	CHIP R 00HM J 1/16W	
L5-7			L34-4547-05	AIR-CORE COIL	K	R7			RK73HB1J100J	CHIP R 10 J 1/16W	
L8			L40-1575-92	SMALL FIXED INDUCTOR(15NH)		R8			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L9			L40-1075-92	SMALL FIXED INDUCTOR(10NH/1608)		R9			RK73GB1J332J	CHIP R 3.3K J 1/16W	
L10			L40-1095-34	SMALL FIXED INDUCTOR(1UH)		R10			RK73GB1J331J	CHIP R 330 J 1/16W	
L11			L40-1092-81	SMALL FIXED INDUCTOR		R13			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L12			L40-2702-86	SMALL FIXED INDUCTOR(27UH)	K2	R14			RK73GB1J332J	CHIP R 3.3K J 1/16W	
L12			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)	K	R16			RK73GB1J391J	CHIP R 390 J 1/16W	
L14			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R17			RK73HB1J103J	CHIP R 10K J 1/16W	
L15			L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R18			RK73GB1J683J	CHIP R 68K J 1/16W	
L17			L34-4546-05	AIR-CORE COIL	K2	R19			RK73GB1J332J	CHIP R 3.3K J 1/16W	
L17			L34-4547-05	AIR-CORE COIL	K	R20			RK73GB1J122J	CHIP R 1.2K J 1/16W	
L18-20			L92-0138-05	FERRITE CHIP		R21			RK73GB1J331J	CHIP R 330 J 1/16W	
L21			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R22			RK73HB1J561J	CHIP R 560 J 1/16W	
L22		*	L40-1885-92	SMALL FIXED INDUCTOR(180NH)		R23			RK73HB1J681J	CHIP R 680 J 1/16W	
L23			L92-0138-05	FERRITE CHIP		R24			RK73GB1J682J	CHIP R 6.8K J 1/16W	
L24			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)		R25			RK73GB1J470J	CHIP R 47 J 1/16W	
L25			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R26			RK73GB1J561J	CHIP R 560 J 1/16W	
L26			L33-0744-05	SMALL FIXED INDUCTOR		R27			RK73GB1J390J	CHIP R 39 J 1/16W	
L27			L92-0149-05	FERRITE CHIP		R28,29			RK73GB1J271J	CHIP R 270 J 1/16W	
L30			L40-2702-86	SMALL FIXED INDUCTOR(27UH)		R30			RK73HB1J391J	CHIP R 390 J 1/16W	
L31			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R31			RK73GB1J101J	CHIP R 100 J 1/16W	
L32			L40-1005-85	SMALL FIXED INDUCTOR(10UH)		R33			RK73GB1J101J	CHIP R 100 J 1/16W	
L35			L40-2275-92	SMALL FIXED INDUCTOR(22NH)		R34			RK73GB1J473J	CHIP R 47K J 1/16W	
L36			L40-1085-85	SMALL FIXED INDUCTOR(0.10UH)		R35			RK73GB1J104J	CHIP R 100K J 1/16W	
L37			L40-6885-85	SMALL FIXED INDUCTOR(0.68UH)		R36			RK73GB1J473J	CHIP R 47K J 1/16W	
L38			L92-0138-05	FERRITE CHIP		R37			RK73GB1J392J	CHIP R 3.9K J 1/16W	
L39			L92-0149-05	FERRITE CHIP		R38			RK73GB1J101J	CHIP R 100 J 1/16W	
L40,41			L92-0138-05	FERRITE CHIP		R39			RK73GB1J220J	CHIP R 22 J 1/16W	
L42			L92-0131-05	FERRITE CHIP		R41			RK73GB1J100J	CHIP R 10 J 1/16W	
L43,44			L92-0138-05	FERRITE CHIP		R42			RK73GB1J220J	CHIP R 22 J 1/16W	
L47		*	L40-3363-92	SMALL FIXED INDUCTOR(3.3NH)		R43			RK73GB1J101J	CHIP R 100 J 1/16W	
L302			L34-4546-05	AIR-CORE COIL		R44			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L303			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R45			RK73GB1J562J	CHIP R 5.6K J 1/16W	
L304-306			L34-4546-05	AIR-CORE COIL		R46			RN73GH1J154D	CHIP R 150K D 1/16W	
L307			L40-4785-85	SMALL FIXED INDUCTOR(0.47UH)		R47			RK73GB1J104J	CHIP R 100K J 1/16W	
L308-310			L34-4546-05	AIR-CORE COIL		R48			RK73GB1J334J	CHIP R 330K J 1/16W	
L311			L40-3375-92	SMALL FIXED INDUCTOR(33NH)	K2	R49			RK73GB1J103J	CHIP R 10K J 1/16W	
L312			L40-1575-92	SMALL FIXED INDUCTOR(15NH)	K2	R50			RN73GH1J154D	CHIP R 150K D 1/16W	
L312			L40-2775-92	SMALL FIXED INDUCTOR(27NH)	K	R51			RK73GB1J102J	CHIP R 1.0K J 1/16W	
X1			L77-1833-05	TCXO(16.8MHZ)		R52			RK73GB1J181J	CHIP R 180 J 1/16W	
X2			L78-0479-05	RESONATOR(3.58MHZ)		R53			RK73GB1J472J	CHIP R 4.7K J 1/16W	
X3			L77-1810-05	CRYSTAL RESONATOR(9.8304MHZ)		R54			RN73GH1J154D	CHIP R 150K D 1/16W	
X3			L77-1835-05	CRYSTAL RESONATOR(9.8304MHZ)		R55			RK73GB1J105J	CHIP R 1.0M J 1/16W	
XF1		*	L71-0601-05	CRYSTAL FILTER(49.95MHZ)		R56-58			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
CP1			R90-0724-05	MULTI-COMP 1K X4		R59			RN73GH1J154D	CHIP R 150K D 1/16W	
CP2-9			R90-0741-05	MULTIPLE RESISTOR		R60			R92-1252-05	CHIP R 00HM J 1/16W	
CP10			R90-0724-05	MULTI-COMP 1K X4		R61			RK73GB1J563J	CHIP R 56K J 1/16W	
CP11-18			R90-0741-05	MULTIPLE RESISTOR		R62			RN73GH1J154D	CHIP R 150K D 1/16W	

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R64,65			RK73GB1J104J	CHIP R 100K J 1/16W	K	R133			R92-1252-05	CHIP R 00HM J 1/16W	
R67			RK73GB1J104J	CHIP R 100K J 1/16W		R135			RK73GB1J100J	CHIP R 10 J 1/16W	
R68			RN73GH1J154D	CHIP R 150K D 1/16W		R137			RK73GB1J101J	CHIP R 100 J 1/16W	
R69			RK73GB1J220J	CHIP R 22 J 1/16W		R138			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R70			RK73GB1J104J	CHIP R 100K J 1/16W		R139			RK73GB1J151J	CHIP R 150 J 1/16W	
R71			RK73GB1J124J	CHIP R 120K J 1/16W	K2	R140			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R72			RK73GB1J103J	CHIP R 10K J 1/16W		R142			R92-1368-05	CHIP R 00HM	
R73			RK73GB1J273J	CHIP R 27K J 1/16W		R143			RK73GB1J184J	CHIP R 180K J 1/16W	
R74,75			RK73GB1J223J	CHIP R 22K J 1/16W		R144			R92-1252-05	CHIP R 00HM J 1/16W	
R76			R92-1252-05	CHIP R 00HM J 1/16W		R145			RK73GB1J474J	CHIP R 470K J 1/16W	
R77			RK73GB1J100J	CHIP R 10 J 1/16W	K	R146			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R78,79			RK73GB1J153J	CHIP R 15K J 1/16W		R147			RK73GB1J470J	CHIP R 47 J 1/16W	
R80,81			RK73GB1J223J	CHIP R 22K J 1/16W		R148			RK73GB1J220J	CHIP R 22 J 1/16W	
R82			RK73GB1J102J	CHIP R 1.0K J 1/16W		R149			RK73GB1J104J	CHIP R 100K J 1/16W	
R84			RK73GB1J394J	CHIP R 390K J 1/16W		R150			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R84			RK73GB1J474J	CHIP R 470K J 1/16W	K	R151			RK73GB1J473J	CHIP R 47K J 1/16W	
R85			RK73GB1J102J	CHIP R 1.0K J 1/16W		R152			RK73GB1J823J	CHIP R 82K J 1/16W	
R86			RK73GB1J334J	CHIP R 330K J 1/16W		R153			RK73GB1J104J	CHIP R 100K J 1/16W	
R87			R92-1252-05	CHIP R 00HM J 1/16W		R154			RK73GB1J564J	CHIP R 560K J 1/16W	
R88			RK73GB1J102J	CHIP R 1.0K J 1/16W		R155			RK73GB1J473J	CHIP R 47K J 1/16W	
R89			RK73GB1J821J	CHIP R 820 J 1/16W		R156			RN73GH1J683D	CHIP R 68K D 1/16W	
R90,91			RK73GB1J332J	CHIP R 3.3K J 1/16W		R157			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R92			RK73GB1J100J	CHIP R 10 J 1/16W		R158			R92-1252-05	CHIP R 00HM J 1/16W	
R93			RK73GB1J332J	CHIP R 3.3K J 1/16W		R159			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R94			RK73GB1J121J	CHIP R 120 J 1/16W		R160			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R95			RK73GB1J681J	CHIP R 680 J 1/16W		R161			RK73GB1J563J	CHIP R 56K J 1/16W	
R96			RK73GB1J221J	CHIP R 220 J 1/16W		R162			RN73GH1J333D	CHIP R 33K D 1/16W	
R97			RK73GB1J183J	CHIP R 18K J 1/16W		R163			RN73GH1J274D	CHIP R 270K D 1/16W	
R98			RK73GB1J473J	CHIP R 47K J 1/16W		R164			RK73GB1J184J	CHIP R 180K J 1/16W	
R99			RK73GB1J684J	CHIP R 680K J 1/16W		R165			RK73GB1J473J	CHIP R 47K J 1/16W	
R100			RK73GB1J473J	CHIP R 47K J 1/16W		R166			RK73GB1J103J	CHIP R 10K J 1/16W	
R101			RK73GB1J104J	CHIP R 100K J 1/16W		R167			RK73GB1J564J	CHIP R 560K J 1/16W	
R102,103			RK73GB1J272J	CHIP R 2.7K J 1/16W		R169			RK73GB1J473J	CHIP R 47K J 1/16W	
R104			RK73GB1J472J	CHIP R 4.7K J 1/16W		R170,171			RK73GB1J474J	CHIP R 470K J 1/16W	
R105,106			RK73GB1J272J	CHIP R 2.7K J 1/16W		R172			RK73GB1J473J	CHIP R 47K J 1/16W	
R107			RK73GB1J470J	CHIP R 47 J 1/16W		R173			RK73GB1J104J	CHIP R 100K J 1/16W	
R108			RK73GB1J222J	CHIP R 2.2K J 1/16W		R174			R92-1252-05	CHIP R 00HM J 1/16W	
R109			RK73GB1J102J	CHIP R 1.0K J 1/16W		R175			RK73GB1J103J	CHIP R 10K J 1/16W	
R110,111			RK73GB1J103J	CHIP R 10K J 1/16W		R176			R92-1252-05	CHIP R 00HM J 1/16W	
R112			RK73GB1J102J	CHIP R 1.0K J 1/16W		R177			RK73GB1J473J	CHIP R 47K J 1/16W	
R113			RK73GB1J391J	CHIP R 390 J 1/16W		R178,179			RK73GB1J104J	CHIP R 100K J 1/16W	
R114,115			RK73GB1J103J	CHIP R 10K J 1/16W		R180			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R116,117			RK73GB1J153J	CHIP R 15K J 1/16W		R181			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R118			RK73GB1J473J	CHIP R 47K J 1/16W		R182,183			R92-1252-05	CHIP R 00HM J 1/16W	
R119			R92-1252-05	CHIP R 00HM J 1/16W		R184			RK73GB1J823J	CHIP R 82K J 1/16W	
R120,121			RK73GB1J473J	CHIP R 47K J 1/16W		R185			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R122			RK73GB1J102J	CHIP R 1.0K J 1/16W		R186			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R123			RK73GB1J104J	CHIP R 100K J 1/16W		R198			RK73GB1J393J	CHIP R 39K J 1/16W	
R124			RK73GB1J334J	CHIP R 330K J 1/16W		R199			RK73GB1J103J	CHIP R 10K J 1/16W	
R126			RK73GB1J472J	CHIP R 4.7K J 1/16W		R200			RK73GB1J101J	CHIP R 100 J 1/16W	
R127			RK73GB1J333J	CHIP R 33K J 1/16W		R201			R92-1252-05	CHIP R 00HM J 1/16W	
R128			RK73GB1J102J	CHIP R 1.0K J 1/16W		R202			RK73GB1J474J	CHIP R 470K J 1/16W	
R129			RK73GB1J224J	CHIP R 220K J 1/16W		R203			R92-1252-05	CHIP R 00HM J 1/16W	
R130			R92-1252-05	CHIP R 00HM J 1/16W		R204			RK73GB1J273J	CHIP R 27K J 1/16W	
R131			RK73GB1J101J	CHIP R 100 J 1/16W		R205			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R132			RK73GB1J104J	CHIP R 100K J 1/16W		R206			RK73GB1J471J	CHIP R 470 J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R207			RK73GB1J101J	CHIP R 100 J 1/16W		S402,403			S70-0424-05	TACT SWITCH	
R208			RN73GH1J682D	CHIP R 6.8K D 1/16W		MIC1			T91-0579-05	MIC ELEMENT	
R209			RK73GB1J224J	CHIP R 220K J 1/16W		D1			MA2S111	DIODE	
R210			RK73GB1J474J	CHIP R 470K J 1/16W		D2			MA2S376	VARIABLE CAPACITANCE DIODE	
R211			RK73GB1J103J	CHIP R 10K J 1/16W		D3			HVU131	DIODE	
R212			RN73GH1J683D	CHIP R 68K D 1/16W		D4			MA2S376	VARIABLE CAPACITANCE DIODE	
R213			RN73GH1J682D	CHIP R 6.8K D 1/16W		D5			HSC277	DIODE	
R214			RK73GB1J473J	CHIP R 47K J 1/16W		D6			MA360	VARIABLE CAPACITANCE DIODE	
R215			RK73GB1J184J	CHIP R 180K J 1/16W		D7			HSC277	DIODE	K
R218			R92-1252-05	CHIP R 00HM J 1/16W		D7			HVC131	DIODE	K2
R219			RK73GB1J223J	CHIP R 22K J 1/16W		D8			HZU5ALL	DIODE	
R220,221			RK73GB1J184J	CHIP R 180K J 1/16W		D9			MA2S376	VARIABLE CAPACITANCE DIODE	
R222			RK73GB1J153J	CHIP R 15K J 1/16W		D10			HSC277	DIODE	
R223			RK73GB1J223J	CHIP R 22K J 1/16W		D11			MA2S376	VARIABLE CAPACITANCE DIODE	
R226			R92-1252-05	CHIP R 00HM J 1/16W		D12			MA2S111	DIODE	
R230			RK73GB1J223J	CHIP R 22K J 1/16W		D13,14			DAN235E	DIODE	
R231			RK73GB1J563J	CHIP R 56K J 1/16W		D15			HSC277	DIODE	
R232,233			R92-1252-05	CHIP R 00HM J 1/16W		D17			MA2S111	DIODE	
R234			RK73GB1J564J	CHIP R 560K J 1/16W		D21			1SS373	DIODE	
R235			RK73GB1J474J	CHIP R 470K J 1/16W		D22			1SR154-400	DIODE	
R237			R92-1252-05	CHIP R 00HM J 1/16W		D23			RB706F-40	DIODE	
R239			RK73GB1J153J	CHIP R 15K J 1/16W		D27			MA2S111	DIODE	
R240			RK73GB1J223J	CHIP R 22K J 1/16W		D28,29			RB706F-40	DIODE	
R241			RK73GB1J564J	CHIP R 560K J 1/16W		IC1			M68732H	POWER MODULE	K
R242			R92-1252-05	CHIP R 00HM J 1/16W		IC1			M68732UH	POWER MODULE	K2
R245			RK73GB1J104J	CHIP R 100K J 1/16W		IC3			NJM2904V	MOS IC	
R249			R92-1252-05	CHIP R 00HM J 1/16W		IC4			TA31136FN	MOS IC	
R250			RK73GB1J472J	CHIP R 4.7K J 1/16W		IC5,6			BU4094BCFV	MOS IC	
R252,253			R92-1252-05	CHIP R 00HM J 1/16W		IC7			XC62GR5012PR	MOS IC	
R254			RK73GB1J184J	CHIP R 180K J 1/16W		IC8			PST9140NR	MOS IC	
R255			RK73GB1J474J	CHIP R 470K J 1/16W		IC9			RN5VL45C	MOS IC	
R256			R92-1252-05	CHIP R 00HM J 1/16W		IC10			AT2408N10SI2.5	ROM IC	
R258			R92-1252-05	CHIP R 00HM J 1/16W		IC10			24LC08BT-ISN	ROM IC	
R259			RK73GB1J473J	CHIP R 47K J 1/16W		IC11			TA7368F	MOS IC	
R260,261			R92-1252-05	CHIP R 00HM J 1/16W		IC12			AT29C020-90TI	ROM IC	
R270,271			RK73HB1J103J	CHIP R 10K J 1/16W		IC13			30622M4A-410GP	MPU	
R272			RK73HB1J472J	CHIP R 4.7K J 1/16W		IC14			TC35453F	MOS IC	
R273			RK73HB1J562J	CHIP R 5.6K J 1/16W		IC15,16			TC75W51FU	MOS IC	
R274			R92-1368-05	CHIP R 00HM		IC17			X9C103SI	ANALOG IC	
R275			RK73HB1J221J	CHIP R 220 J 1/16W		IC19			TC75W51FU	MOS IC	
R276-278			RK73GB1J104J	CHIP R 100K J 1/16W		Q1			2SC5010-T1	TRANSISTOR	
R280			RK73GB1J154J	CHIP R 150K J 1/16W		Q2			2SC4226(R24)	TRANSISTOR	
R301			R92-0679-05	CHIP R 00HM		Q3			2SC5010-T1	TRANSISTOR	
R303,304			R92-1252-05	CHIP R 00HM J 1/16W		Q4,5			2SC5108(Y)	TRANSISTOR	
R305			RK73GB1J104J	CHIP R 100K J 1/16W		Q6			2SC4988	TRANSISTOR	
R307			RK73GB1J563J	CHIP R 56K J 1/16W		Q7			2SJ243	FET	
R309			RK73GB1J101J	CHIP R 100 J 1/16W		Q8			RN47A4	TRANSISTOR	
R310			RK73GB1J221J	CHIP R 220 J 1/16W		Q9			DTC144EE	DIGITAL TRANSISTOR	
R314			RK73GB1J104J	CHIP R 100K J 1/16W		Q10			2SK508NV(K52)	FET	
R318			RK73GB1J104J	CHIP R 100K J 1/16W		Q11			2SC4617(S)	TRANSISTOR	
R320,321			R92-1252-05	CHIP R 00HM J 1/16W		Q12			2SC4649(N,P)	TRANSISTOR	
R322			R92-1368-05	CHIP R 00HM		Q13,14			DTA144EE	DIGITAL TRANSISTOR	
R326			RK73GB1J124J	CHIP R 120K J 1/16W		Q15			DTC114EE	DIGITAL TRANSISTOR	
R327			RK73GB1J393J	CHIP R 39K J 1/16W		Q16			DTA114YE	DIGITAL TRANSISTOR	
VR1			R12-7491-05	TRIMMING POT.(68K)		Q17			DTC144EE	DIGITAL TRANSISTOR	
S401			S70-0457-05	TACT SWITCH							

PARTS LIST

TX-RX UNIT (X57-6500-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
Q18			FP210	TRANSISTOR							
Q19			3SK318	FET							
Q20,21			UMG3N	TRANSISTOR							
Q22			2SC4649(N,P)	TRANSISTOR							
Q23			RN47A4	TRANSISTOR							
Q24,25			DTC114EE	DIGITAL TRANSISTOR							
Q26			DTA114EE	DIGITAL TRANSISTOR							
Q27			UPA572T	FET							
Q28			DTA114YE	DIGITAL TRANSISTOR							
Q30			2SK1588	FET							
Q31			2SC4649(N,P)	TRANSISTOR							
Q32			2SA1362(GR)	TRANSISTOR							
Q33,34			DTC144EE	DIGITAL TRANSISTOR							
Q35			UPA672T	FET							
Q36			2SK1824	FET							
Q37			2SA1774(S)	TRANSISTOR							
Q38			2SC4617(S)	TRANSISTOR							
Q39			2SK1824	FET							
Q301			3SK318	FET							