


EXPLODED VIEW (UNIT)

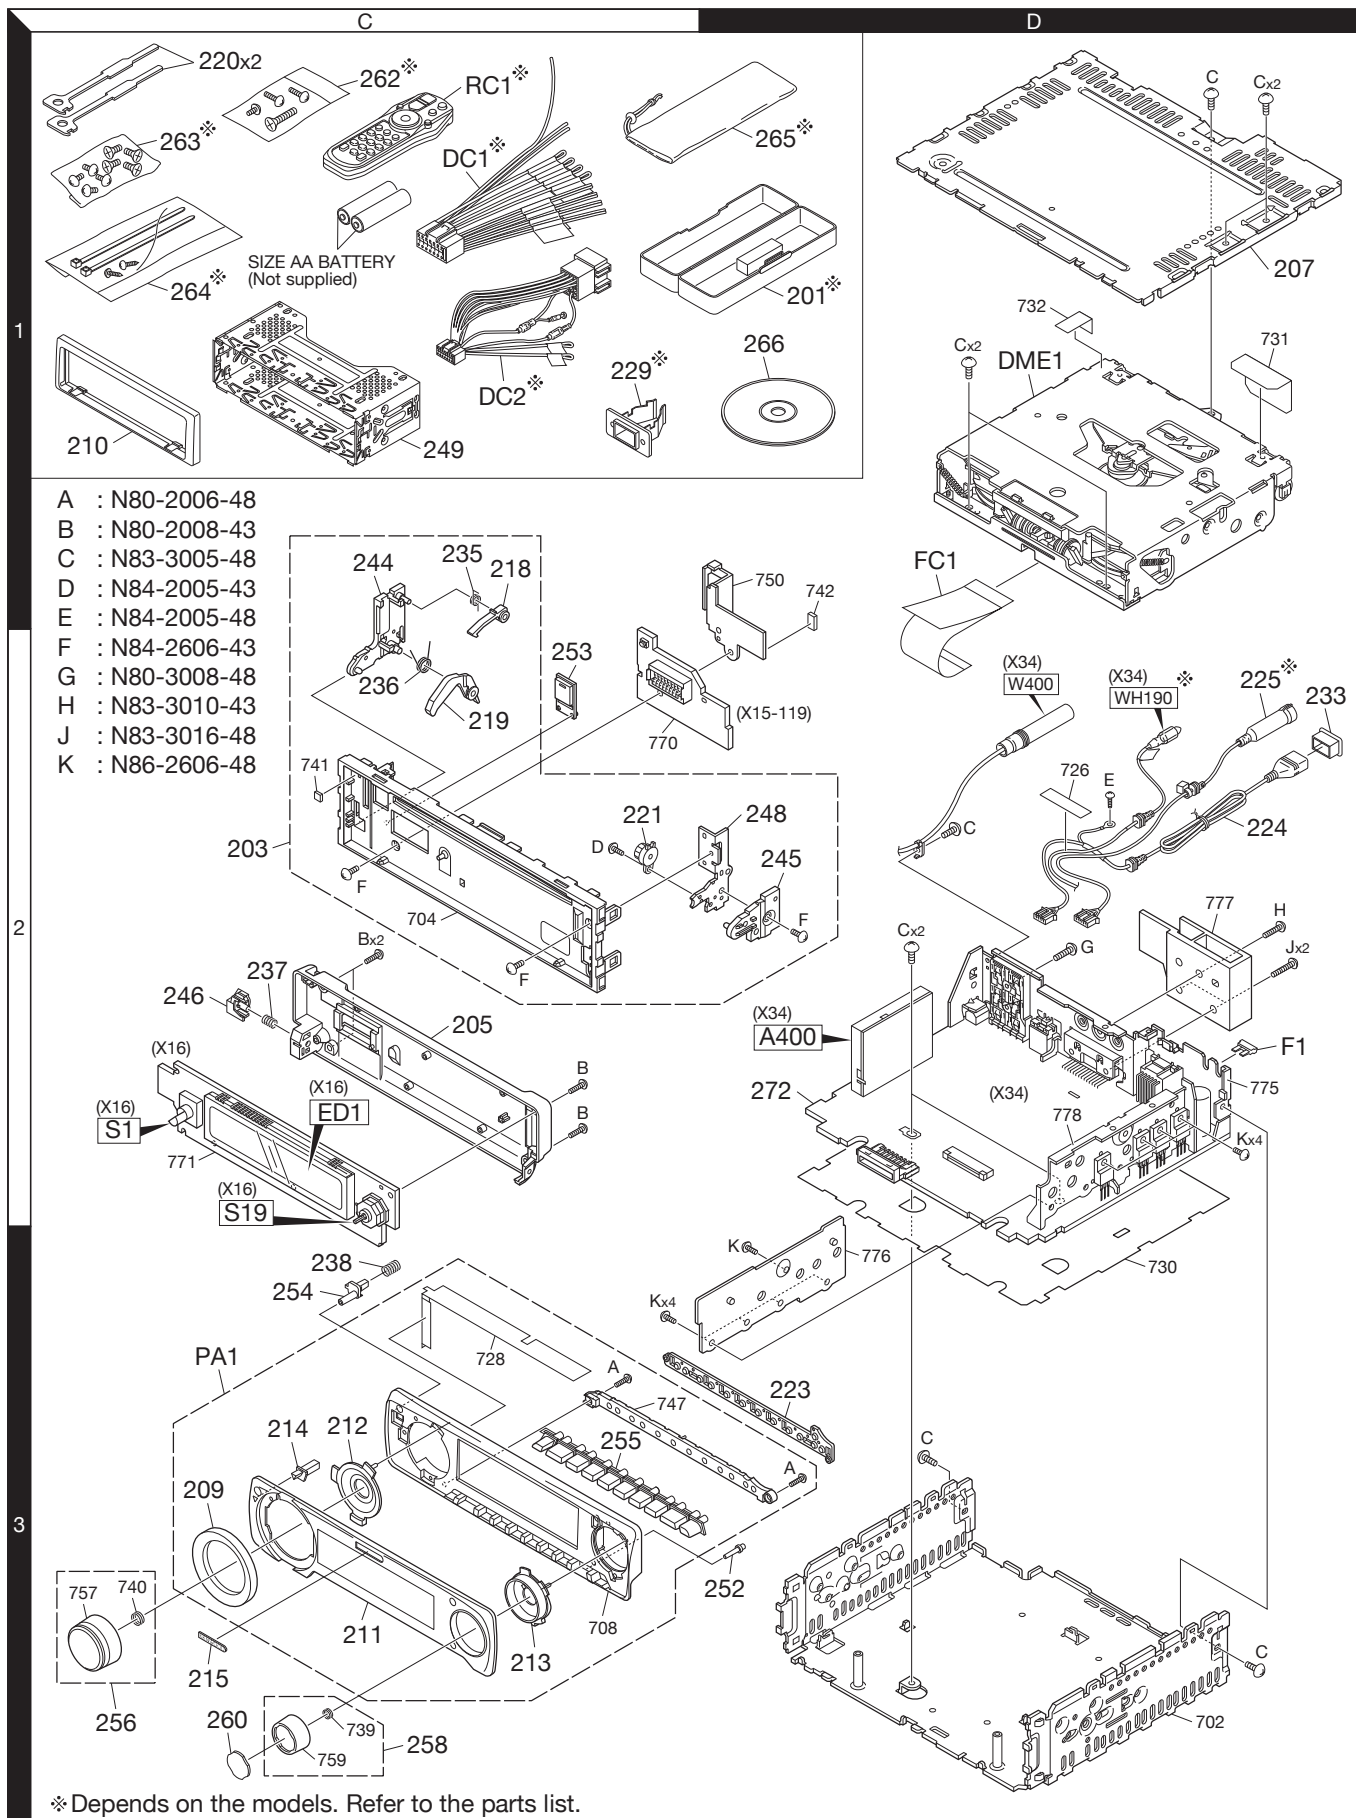

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Ad	New	Parts No.	Description	Destination
KDC-MP638U/W7041U/W7141UY/X692/X7009U					
201	1D		A02-2757-03	PLASTIC CABINET ASSY	M2
203	2C	*	A22-3164-02	SUB PANEL ASSY	
205	2C	*	A46-1865-01	REAR COVER	
207	1D		A52-0897-02	TOP PLATE	
PA1	3C	*	A64-4426-02	PANEL ASSY	K2
PA1	3C		A64-4427-02	PANEL ASSY	K3
PA1	3C	*	A64-4429-02	PANEL ASSY	E3
PA1	3C	*	A64-4430-02	PANEL ASSY	E4
PA1	3C		A64-4432-02	PANEL ASSY	M2
RC1	1C		A70-2085-05	REMOTE CONTROLLER ASSY (RC-547)	K2K3E4
RC1	1C		A70-2085-05	REMOTE CONTROLLER ASSY (RC-547)	M2
-		*	B64-4048-00	INSTRUCTION MANUA (ENG.FRE.SPA)	K2K3
-		*	B64-4049-00	INSTRUCTION MANUAL (ENG.)	E3E4
-		*	B64-4050-00	INSTRUCTION MANUA (FRE.GER.DUT)	E3
-		*	B64-4051-00	INSTRUCTION MANUA (ITA.SPA.POR)	E3
-		*	B64-4052-00	INSTRUCTION MANUAL (RUS.)	E4
-			B64-4053-00	INSTRUCTION MANUAL (ENG.S-CHI.)	M2
-			B64-4054-00	INSTRUCTION MANUAL (ARA.)	M2
209	3C	*	B07-3234-03	ESCUTCHEON	
210	1C	*	B07-3235-03	ESCUTCHEON	K2
210	1C	*	B07-3238-03	ESCUTCHEON	K3E3E4
210	1C	*	B07-3238-03	ESCUTCHEON	M2
211	3C	*	B10-5084-01	FRONT GLASS	K2
211	3C	*	B10-5085-01	FRONT GLASS	K3
211	3C	*	B10-5087-01	FRONT GLASS	E3
211	3C	*	B10-5088-01	FRONT GLASS	E4
211	3C	*	B10-5090-01	FRONT GLASS	M2
212	3C	*	B19-2471-03	LIGHTING BOARD	
213	3C	*	B19-2472-03	LIGHTING BOARD	
214	3C	*	B19-2474-04	LIGHTING BOARD	
215	3C		B43-1518-04	BADGE	
218	1C		D10-4730-03	LEVER	
219	2C		D10-4731-03	LEVER	
220	1C		D10-7012-04	LEVER	
221	2C		D39-0255-05	DAMPER	
223	3D	*	E29-2120-03	CONDUCTIVE RUBBER	
224	2D	*	E30-6821-05	CORD WITH CONNECTOR (USB)	
225	2D	*	E30-6823-05	CORD WITH DIN CONNECTOR (OPEL)	E3
DC1	1C		E30-6428-05	DC CORD	K2K3M2
DC2	1C		E30-6671-05	DC CORD (ISO)	E3E4
FC1	1D	*	E39-0974-05	FLAT CABLE (30PIN 1MM)	
229	1C	*	F19-1475-04	COVER (USB BRACKET)	K2
233	2D		F29-0637-04	INSULATING COVER (USB)	
F1	2D		F52-0023-05	FUSE (MINI BLADE TYPE) 10A	
235	1C		G01-3171-04	TORSION COIL SPRING	
236	2C		G01-3172-04	TORSION COIL SPRING	
237	2C		G01-3173-04	COMPRESSION SPRING	
238	3C		G01-3203-04	COMPRESSION SPRING	
-		*	H54-4326-03	ITEM CARTON CASE	K2
-		*	H54-4327-03	ITEM CARTON CASE	K3
-		*	H54-4330-03	ITEM CARTON CASE	E3

Ref. No.	Ad	New	Parts No.	Description	Destination
-		*	H54-4331-03	ITEM CARTON CASE	E4
-		*	H54-4333-03	ITEM CARTON CASE	M2
244	2C		J19-5203-03	HOLDER	
245	2D		J19-5204-03	HOLDER	
246	2C		J19-5205-03	HOLDER	
248	2D	*	J21-9977-03	MOUNTING HARDWARE	
249	1C		J22-0011-03	MOUNTING HARDWARE ASSY	
252	3D	*	K24-4801-04	PUSH KNOB (RESET)	
253	2C	*	K24-4802-03	PUSH KNOB (EJECT)	
254	3C	*	K24-4803-03	PUSH KNOB (RELEASE)	
255	3C	*	K25-1919-03	PUSH KNOB (PRESET)	
256	3C	*	K28-0282-14	KNOB ASSY (VOL)	K2
256	3C	*	K28-0290-14	KNOB ASSY (VOL)	K3E3E4
256	3C	*	K28-0290-14	KNOB ASSY (VOL)	M2
258	3C	*	K28-0284-04	KNOB ASSY (FM/AM)	
260	3C	*	K28-0287-04	KEY TOP	K2
260	3C	*	K28-0288-04	KEY TOP	K3E3E4
260	3C	*	K28-0288-04	KEY TOP	M2
262	1C	*	N99-1730-35	SCREW SET	K2K3M2
263	1C		N99-1757-15	SCREW SET	K2K3M2
264	1C	*	N99-1790-05	SCREW SET	K2
A	3C		N80-2006-48	PAN HEAD TAPTITE SCREW	
B	2C		N80-2008-43	PAN HEAD TAPTITE SCREW	
C	1D		N83-3005-48	PAN HEAD TAPTITE SCREW	
D	2C		N84-2005-43	PAN HEAD TAPTITE SCREW	
E	2D		N84-2005-48	PAN HEAD TAPTITE SCREW	
F	2C		N84-2606-43	PAN HEAD TAPTITE SCREW	
265	1C		W01-1664-05	CARRYING CASE	K2
265	1C		W01-1710-05	CARRYING CASE	K3E3E4
266	1C	*	W01-1723-05	COMPACT DISC	
272	2D	*	X34-5790-12	ELECTRIC UNIT	K2
272	2D	*	X34-5790-13	ELECTRIC UNIT	K3
272	2D	*	X34-5790-22	ELECTRIC UNIT	M2
272	2D	*	X34-5792-72	ELECTRIC UNIT	E3
272	2D	*	X34-5792-74	ELECTRIC UNIT	E4
DME1	1D		X92-6130-00	CD MECHANISM ASSY (DXM-6E20W)	
DISPLAY UNIT (X15-1190-10)					
D1			B30-1779-05	LED (1608_SR)	
CN1		*	E41-2984-05	PIN ASSY	
J1			E58-1008-05	RECTANGULAR RECEPTACLE	
R1-4			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R5-8			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R9,10			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R11			RK73FB2B331J	CHIP R 330 J 1/8W	
S1			S70-0901-05	TACT SWITCH	
SWITCH UNIT (X16-625x-xx)					
D1			B30-1780-05	LED (1608_PG)	K2
D2			B30-1566-05	LED (1608_RED)	
D6-19		*	B30-1790-05	LED (1608_BLUE)	K2M2
D6-9		*	B30-1790-05	LED (1608_BLUE)	K3E3E4
D10-19			B30-1779-05	LED (1608_SR)	K3E3E4

E3 : KDC-W7041U E4 : KDC-W7141UY (Europe)
K2 : KDC-X692 K3 : KDC-MP638U (North America)
M2 : KDC-X7009U (Other Areas)

△ Indicates safety critical components.

PARTS LIST

SWITCH UNIT (X16-625x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination
D42 D50-59		*	B30-1790-05 B30-1780-05	LED (1608 BLUE) LED (1608_PG)	E3E4
C10 C17 C19 C23 C26,27			CK73GB1A105K CK73GB1H103K CK73GB1H103K CK73GB1H103K CK73GB1H103K	CHIP C 1.0UF K CHIP C 0.010UF K CHIP C 0.010UF K CHIP C 0.010UF K CHIP C 0.010UF K	
C32 C33 C39 C41 C43			CK73GB1A105K CK73GB1H103K CK73GB1C104K CK73FB0J106K CC73GCH1H101J	CHIP C 1.0UF K CHIP C 0.010UF K CHIP C 0.10UF K CHIP C 10UF K CHIP C 100PF J	
C84 C85			CK73GB1H103K CK73FB0J475K	CHIP C 0.010UF K CHIP C 4.7UF K	
J1			E59-0850-05	RECTANGULAR PLUG	
X1			L78-1214-05	RESONATOR (4MHZ)	
CP1,2 CP3 CP8 CP9-14 CP16			RK74HB1J223J RK74GA1J223J RK74GA1J331J RK74HB1J331J RK74HB1J331J	CHIP-COM 22K J 1/16W CHIP-COM 22K J 1/16W CHIP-COM 330 J 1/16W CHIP-COM 330 J 1/16W CHIP-COM 330 J 1/16W	
CP18 CP20 CP21 CP23 CP24			RK74HB1J331J RK74GA1J101J RK74HB1J331J RK74HB1J101J RK74HB1J102J	CHIP-COM 330 J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 330 J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 1.0K J 1/16W	
CP25 CP27 CP28 CP29 CP30			RK74HB1J332J RK74HB1J101J RK74GA1J101J RK74HB1J101J RK74HB1J102J	CHIP-COM 3.3K J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 1.0K J 1/16W	
CP31 CP32 CP36-38 R1 R3-9			RK74HB1J223J RK74GA1J101J RK74GA1J332J RK73FB2B331J RK73EB2E621J	CHIP-COM 22K J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 3.3K J 1/16W CHIP R 330 J 1/8W CHIP R 620 J 1/4W	K2M2
R3,4 R5-9 R10 R13 R18			RK73EB2E621J RK73EB2E821J RK73EB2E911J RK73GB2A222J RK73GB2A473J	CHIP R 620 J 1/4W CHIP R 820 J 1/4W CHIP R 910 J 1/4W CHIP R 2.2K J 1/10W CHIP R 47K J 1/10W	K3E3E4 K3E3E4
R20 R23,24 R34 R36 R37			RK73GB2A332J RK73GB2A472J RK73GB2A101J RK73GB2A101J RK73GB2A473J	CHIP R 3.3K J 1/10W CHIP R 4.7K J 1/10W CHIP R 100 J 1/10W CHIP R 100 J 1/10W CHIP R 47K J 1/10W	
R38 R43,44 R52 R53 R54			RK73GB2A102J RK73PB2H3R9J RK73GB2A223J RK73GB2A102J RK73EB2E333J	CHIP R 1.0K J 1/10W CHIP R 3.9 J 1/2W CHIP R 22K J 1/10W CHIP R 1.0K J 1/10W CHIP R 33K J 1/4W	
R55			RK73GB2A473J	CHIP R 47K J 1/10W	

Ref. No.	Add	New	Parts No.	Description	Destination
R59 R60 R61 R64 R68			RK73GB2A473J RK73FB2B150J RK73GB2A104J RK73GB2A223J RK73GB2A333J	CHIP R 47K J 1/10W CHIP R 15 J 1/8W CHIP R 100K J 1/10W CHIP R 22K J 1/10W CHIP R 33K J 1/10W	
R78 R79 R80 R99 R100			RK73GB2A102J RK73GB2A822J RK73GB2A223J RK73GB2A103J RK73GB2A000J	CHIP R 1.0K J 1/10W CHIP R 8.2K J 1/10W CHIP R 22K J 1/10W CHIP R 10K J 1/10W CHIP R 0.0 J 1/10W	
S19			S70-0947-05	TACT SWITCH	
S1			T99-0456-15	ROTARY ENCODER	
ED1 IC1 IC3 IC4 IC6		*	MN12832N MX231613T19Z8 BR24L04FV-W 703265HYJA501 PIC95603	FLUORESCENT INDICATOR TUBE ROM IC ROM IC MICROCONTROLLER IC ANALOGUE IC	
IC8 IC10 Q1-4 Q2-4 Q2-4		*	74HC2G08DP S-1132B33U5T1G DTC143ZE DTC143ZE DTC143ZE	MOS-IC ANALOGUE IC DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	K2 K3E3E4 M2
Q5 Q6 Q11 Q13 Q15			2SC4081 2SB1689 2SC2713-F 2SB1260 2SC4081	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	E3E4
CD PLAYER UNIT (X32-6130-00)					
C20 C23 C24 C25 C26			CC73GCH1H330J CC73GCH1H151J CK73FB1A225K CK73GB1A105K CK73GB1H153K	CHIP C 33PF J CHIP C 150PF J CHIP C 2.2UF K CHIP C 1.0UF K CHIP C 0.015UF K	
C27 C30-32 C33 C34 C35			CC73GCH1H470J CK73GB1H103K CK73GB1H332K CK73GB1H104K CK73GB1H153K	CHIP C 47PF J CHIP C 0.010UF K CHIP C 3300PF K CHIP C 0.10UF K CHIP C 0.015UF K	
C36 C38 C39 C41 C44			CK73GB1H104K CC73GCH1H680J CK73GB1H104K CK73GB1A105K CK73GB1H104K	CHIP C 0.10UF K CHIP C 68PF J CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 0.10UF K	
C45 C46 C47,48 C49,50 C51			CK73GB1H223K CK73GB1H103K CK73GB1H333K CK73GB1H104K CK73GB1H222K	CHIP C 0.022UF K CHIP C 0.010UF K CHIP C 0.033UF K CHIP C 0.10UF K CHIP C 2200PF K	
C52,53 C54 C58 C60 C61-64			CK73GB1H104K CK73GB1A105K CK73GB1A105K CK73EBOJ226K CK73GB1H104K	CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 1.0UF K CHIP C 22UF K CHIP C 0.10UF K	

PARTS LIST

CD PLAYER UNIT (X32-6130-00)

Ref. No.	Add	New	Parts No.	Description	Destination
C66			CK73FB1C105K	CHIP C 1.0UF K	
C68,69			CK73GB1H104K	CHIP C 0.10UF K	
C71			CK73GB1H104K	CHIP C 0.10UF K	
C72			CK73FB0J106K	CHIP C 10UF K	
C87,88			CK73GB1H332K	CHIP C 3300PF K	
C89-91			CK73GB1H104K	CHIP C 0.10UF K	
C94,95			CK73GB1A105K	CHIP C 1.0UF K	
C96			CK73GB1H103K	CHIP C 0.010UF K	
C97			CK73GB1H104K	CHIP C 0.10UF K	
C101			CK73GB1C224K	CHIP C 0.22UF K	
C102			CK73GB1A474K	CHIP C 0.47UF K	
C103			CK73GB1H153K	CHIP C 0.015UF K	
C104			CK73FB1A225K	CHIP C 2.2UF K	
CN1			E41-2612-05	FLAT CABLE CONNECTOR	
CN2			E41-2630-05	FLAT CABLE CONNECTOR	
X1			L78-1221-05	RESONATOR (16.93MHZ)	
CP7			RK74GB1J103J	CHIP-COM 10K J 1/16W	
R20			RK73GB2A184J	CHIP R 180K J 1/10W	
R27			RK73GB2A912J	CHIP R 9.1K J 1/10W	
R29			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R30			RK73GB2A101J	CHIP R 100 J 1/10W	
R31			RK73GB2A224J	CHIP R 220K J 1/10W	
R32			RK73GB2A181J	CHIP R 180 J 1/10W	
R33			RK73GB2A153J	CHIP R 15K J 1/10W	
R34			RK73GB2A473J	CHIP R 47K J 1/10W	
R35			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R36			RK73GB2A154J	CHIP R 150K J 1/10W	
R37			RK73GB2A334J	CHIP R 330K J 1/10W	
R38			RK73GB2A223J	CHIP R 22K J 1/10W	
R40			RK73GB2A114J	CHIP R 110K J 1/10W	
R41			RK73GB2A473J	CHIP R 47K J 1/10W	
R45			RK73GB2A221J	CHIP R 220 J 1/10W	
R46			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R50			RK73GB2A560J	CHIP R 56 J 1/10W	
R51			RK73EB2E220J	CHIP R 22 J 1/4W	
R52			RK73EB2E100J	CHIP R 10 J 1/4W	
R55			RK73GB2A103J	CHIP R 10K J 1/10W	
R59			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R60,61			RK73GB2A103J	CHIP R 10K J 1/10W	
R82,83			RK73GB2A331J	CHIP R 330 J 1/10W	
R207			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R216,217			RK73GB2A103J	CHIP R 10K J 1/10W	
R221,222			RK73GB2A101J	CHIP R 100 J 1/10W	
R226			RK73GB2A101J	CHIP R 100 J 1/10W	
R228-230			RK73GB2A101J	CHIP R 100 J 1/10W	
R231			RK73GB2A473J	CHIP R 47K J 1/10W	
R232			RK73GB2A104J	CHIP R 100K J 1/10W	
R233			RK73GB2A331J	CHIP R 330 J 1/10W	
R240			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R241			RK73GB2A104J	CHIP R 100K J 1/10W	
R243			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R244			RK73GB2A225J	CHIP R 2.2M J 1/10W	
R246			RK73GB2A104J	CHIP R 100K J 1/10W	

Ref. No.	Add	New	Parts No.	Description	Destination
R247			RK73GB2A101J	CHIP R 100 J 1/10W	
R252			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R257-261			RK73GB2A101J	CHIP R 100 J 1/10W	
R262-264			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R280			RK73GB2A103J	CHIP R 10K J 1/10W	
R281,282			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R284,285			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R287			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R288			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R289			RK73GB2A103J	CHIP R 10K J 1/10W	
S1,2			S68-0863-05	PUSH SWITCH	
S3			S68-0862-05	PUSH SWITCH	
D2			DAP202U	DIODE	
D3,4			DA204U	DIODE	
IC3			BD8222EFV	ANALOGUE IC	
IC4			TC94A70FG-010	MOS-IC	
IC5			S-1132B15U5T1G	ANALOGUE IC	
IC6			S-1132B33U5T1G	ANALOGUE IC	
IC11			XC6218S152MR	MOS-IC	
Q1			2SB0970	TRANSISTOR	
Q13			DTC114YUA	DIGITAL TRANSISTOR	
ELECTRIC UNIT (X34-579x-xx)					
C1			C90-6783-05	ERECTRO 3900 16WV	K3E3E4
C1			C90-6783-05	ERECTRO 3900 16WV	M2
C1			C90-6784-05	ELECTRO 3900UF 16WV	K2
C3			C93-1470-05	CHIP C 1500PF K	E3E4
C10			CD04AY1A221M	ELECTRO 220UF 10WV	
C11			CK73GB1H103K	CHIP C 0.010UF K	
C20			C90-6851-05	ELECTRO 220UF 25WV	
C22			CD04BA1C100M	ELECTRO 10UF 16WV	
C23			CD04BA0J101M	ELECTRO 100UF 6.3WV	
C24			C90-6851-05	ELECTRO 220UF 25WV	
C25			CK73GB0J475K	CHIP C 4.7UF K	
C26			CK73GB1A105K	CHIP C 1.0UF K	
C30			CK73GB1A105K	CHIP C 1.0UF K	K2
C31			CD04AY1H220M	ELECTRO 22UF 50WV	K2
C60			CK73GB1H103K	CHIP C 0.010UF K	
C63			CK73GB1H103K	CHIP C 0.010UF K	
C64			CC73GCH1H101J	CHIP C 100PF J	
C65		*	C93-1457-05	CHIP C 1UF K	
C66,67			C93-0059-05	CERAMIC 1UF K	
C68		*	C93-1457-05	CHIP C 1UF K	
C69			CK73FB1C105K	CHIP C 1.0UF K	
C81			CK73FB0J106K	CHIP C 10UF K	
C82			CK73FB1E474K	CHIP C 0.47UF K	
C83			CK73GB1H102K	CHIP C 1000PF K	
C84			CK73EB1C106K	CHIP C 10UF K	
C85,86			CK73GB1C104K	CHIP C 0.10UF K	
C87			CK73FB1C105K	CHIP C 1.0UF K	E3E4
C88			CK73GB1C104K	CHIP C 0.10UF K	
C122			CK73GB1H103K	CHIP C 0.010UF K	
C140			CK73GB1H104K	CHIP C 0.10UF K	
C141			CK73GB1A105K	CHIP C 1.0UF K	
C142			CD04AS1H3R3M	ELECTRO 3.3UF 50WV	

E3 : KDC-W7041U E4 : KDC-W7141UY (Europe)
K2 : KDC-X692 K3 : KDC-MP638U (North America)
M2 : KDC-X7009U (Other Areas)

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-579x-xx)

Ref. No.	A	N	Parts No.	Description	Desti- nation	Ref. No.	A	N	Parts No.	Description	Desti- nation
	d	e					d	e			
C170			CK73GB1H103K	CHIP C 0.010UF K		C514			CK73GB1H103K	CHIP C 0.010UF K	
C180			CK73GB1A105K	CHIP C 1.0UF K		C515		*	CD04AY2A4R7M	ELECTRO 4.7UF 100WV	
C181			CK73GB1H223K	CHIP C 0.022UF K		C600			CK73GB1H103K	CHIP C 0.010UF K	
C200			CD04BF1C221M	ELECTRO 220UF 16WV		C602			CK73GB1H103K	CHIP C 0.010UF K	
C301			CK73GB1C104K	CHIP C 0.10UF K		C652			CK73GB1H103K	CHIP C 0.010UF K	
C340,341			CC73GCH1H270J	CHIP C 27PF J	E3E4	C700			CK73GB1H103K	CHIP C 0.010UF K	
C343			CK73GB1H103K	CHIP C 0.010UF K	E3E4	C701			CK73GB1C104K	CHIP C 0.10UF K	
C344			CK73GB0J225K	CHIP C 2.2UF K	E3E4	C702			CC73GCH1H220J	CHIP C 22PF J	
C345			CC73GCH1H271J	CHIP C 270PF J	E3E4	C703			CC73GCH1H180J	CHIP C 18PF J	
C350			CD04AS1C470M	ELECTRO 47UF 16WV	K2M2	C704-710			CK73GB1H103K	CHIP C 0.010UF K	
C351			CD04AS1C220M	ELECTRO 22UF 16WV	K2M2	C711,712			CC73GCH1H150J	CHIP C 15PF J	
C352			CD04AS1V100M	ELECTRO 10UF 35WV	K2M2	C713,714			CK73GB1H103K	CHIP C 0.010UF K	
C353			CD04AJ1C101M	ELECTRO 100UF 16WV	K2M2	C715			CK73GB1A105K	CHIP C 1.0UF K	
C371			CD04AS1V100M	ELECTRO 10UF 35WV		C716,717			CK73FBOJ106K	CHIP C 10UF K	
C373			CD04AS1V100M	ELECTRO 10UF 35WV		C750			CK73GB1H103K	CHIP C 0.010UF K	
C375			CD04AS1V100M	ELECTRO 10UF 35WV	K2K3M2	C751			CC73GCH1H050C	CHIP C 5.0PF C	
C377			CD04AS1V100M	ELECTRO 10UF 35WV	K2K3M2	C753			CK73GB1H103K	CHIP C 0.010UF K	
C379			CD04AS1V100M	ELECTRO 10UF 35WV		C754			CC73GCH1H050C	CHIP C 5.0PF C	
C381			CD04AS1V100M	ELECTRO 10UF 35WV		C900,901			CK73GB1H103K	CHIP C 0.010UF K	
C400-403			CK73GB1H103K	CHIP C 0.010UF K		C909			CC73GCH1H101J	CHIP C 100PF J	E3E4
C410,411			CK73GB1A105K	CHIP C 1.0UF K		C964			CK73GB1C104K	CHIP C 0.10UF K	
C412			CD04AS0J470M	ELECTRO 47UF 6.3WV		C965			CK73GB1A105K	CHIP C 1.0UF K	
C420			CK73GB1A105K	CHIP C 1.0UF K		CN190			E41-1702-05	PIN ASSY	E3
C421			CD04AS0J470M	ELECTRO 47UF 6.3WV		CN200		*	E41-1701-05	PIN ASSY	
C422			CK73GB1A105K	CHIP C 1.0UF K		CN300			E41-2630-05	FLAT CABLE CONNECTOR	
C450,451			CK73FB1C105K	CHIP C 1.0UF K		CN362			E40-9747-05	PIN ASSY	
C452			CD04BA1C100M	ELECTRO 10UF 16WV	Δ	J1			E58-1003-05	RECTANGULAR RECEPTACLE	
C461-464			CK73GB1C224K	CHIP C 0.22UF K	K3E3E4	J361			E63-0953-05	PIN JACK	K2K3M2
C461-464			CK73GB1C224K	CHIP C 0.22UF K	M2	J361			E63-0954-05	PIN JACK	E3E4
C465-468			C90-6768-05	ELECTRO 0.22UF 16WV	K2	J410			E11-0625-05	PHONE JACK (LGY6502-0900)	
C475			CK73FB1C105K	CHIP C 1.0UF K	K3E3E4	J420			E56-0855-05	CYLINDRICAL RECEPTACLE	
C475			CK73FB1C105K	CHIP C 1.0UF K	M2	W400			E30-6803-05	CORD WITH PLUG (FM/AM ANT)	
C476			C90-6765-05	ELECTRO 1UF 16WV	K2	WH190		*	E30-6822-05	WIRING HARNESS (REMO)	K2K3E4
C478,479			CD04AS1H2R2M	ELECTRO 2.2UF 50WV	K2	WH190		*	E30-6822-05	WIRING HARNESS (REMO)	M2
C480-483			CK73GB1A105K	CHIP C 1.0UF K	K3E3E4	Δ L1		*	L33-2436-05	CHOKE COIL ASSY	
C482,483			CK73GB1A105K	CHIP C 1.0UF K	M2	L60		*	L33-2464-05	SMALL FIXED INDUCTOR	
C484,485			CD04AS1H2R2M	ELECTRO 2.2UF 50WV	K2	L80			L33-2297-05	SMALL FIXED INDUCTOR	
C486,487			CK73GB1A474K	CHIP C 0.47UF K		L515			L92-0639-05	CHIP FERRITE	
C488			CK73GB1A105K	CHIP C 1.0UF K	K2	X340			L77-2002-05	CRYSTAL RESONATOR	E3E4
C488-490			CK73GB1A105K	CHIP C 1.0UF K	M2	X501			L78-0872-05	RESONATOR (12MHZ)	
C488-490			CK73GB1A105K	CHIP C 1.0UF K	K3E3E4	X502			L77-2921-05	CRYSTAL RESONATOR (32.768KHZ)	
C491			CD04AS1H2R2M	ELECTRO 2.2UF 50WV	M2	X700			L77-2921-05	CRYSTAL RESONATOR (32.768KHZ)	
C492-495			CK73GB1A105K	CHIP C 1.0UF K		X701			L77-2964-05	CRYSTAL RESONATOR (9.00MHZ)	
C496			CK73GB1H103K	CHIP C 0.010UF K		X750			L77-2921-05	CRYSTAL RESONATOR (32.768KHZ)	
C497			CD04AS1V100M	ELECTRO 10UF 35WV	K3E3E4	C	2D		N83-3005-48	PAN HEAD TAPTITE SCREW	E3
C498			CD04AS1C470M	ELECTRO 47UF 16WV		G	2D		N80-3008-48	PAN HEAD TAPTITE SCREW	
C500			CC73GCH1H220J	CHIP C 22PF J		H	2D		N83-3010-43	PAN HEAD TAPTITE SCREW	
C501			CC73GCH1H180J	CHIP C 18PF J		J	2D		N83-3016-48	PAN HEAD TAPTITE SCREW	
C502			CK73GB1C104K	CHIP C 0.10UF K		K	3D		N86-2606-48	BINDING HEAD TAPTITE SCREW	
C503-506			CK73GB1H103K	CHIP C 0.010UF K		CP190			RK74HB1J101J	CHIP-COM 100 J 1/16W	E3
C508,509			CK73GB1H103K	CHIP C 0.010UF K		CP420			RK74GA1J101J	CHIP-COM 100 J 1/16W	
C510			CK73GB1H102K	CHIP C 1000PF K		CP421			RK74HB1J101J	CHIP-COM 100 J 1/16W	
C511			CK73GB1H103K	CHIP C 0.010UF K		CP501			RK74HB1J101J	CHIP-COM 100 J 1/16W	
C513			CK73GB0J225K	CHIP C 2.2UF K		CP503			RK74GA1J101J	CHIP-COM 100 J 1/16W	

E3 : KDC-W7041U E4 : KDC-W7141UY (Europe)
K2 : KDC-X692 K3 : KDC-MP638U (North America)
46 M2 : KDC-X7009U (Other Areas)

Δ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-579x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
CP504			RK74GA1J472J	CHIP-COM 4.7K J 1/16W		R214-216			RK73GB2A101J	CHIP R 100 J 1/10W	
CP506			RK74GA1J101J	CHIP-COM 100 J 1/16W		R300			RK73GB2A223J	CHIP R 22K J 1/10W	
R10			RK73GH2A432D	CHIP R 4.3K D 1/10W		R340-342			RK73GB2A222J	CHIP R 2.2K J 1/10W	E3E4
R11			RK73GH2A243D	CHIP R 24K D 1/10W		R343			RK73GB2A102J	CHIP R 1.0K J 1/10W	E3E4
R12			RK73FB2B221J	CHIP R 220 J 1/8W		R344			RK73GB2A223J	CHIP R 22K J 1/10W	E3E4
R20			RK73FB2B153J	CHIP R 15K J 1/8W		R345			RK73GB2A222J	CHIP R 2.2K J 1/10W	E3E4
R21			RK73GB2A223J	CHIP R 22K J 1/10W		R350			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	K2M2
R22			RK73GB2A272J	CHIP R 2.7K J 1/10W		R351			RK73GB2A332J	CHIP R 3.3K J 1/10W	K2M2
R30			RK73FB2B152J	CHIP R 1.5K J 1/8W		R352			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	K2M2
R40			RK73FB2B471J	CHIP R 470 J 1/8W		R353			RK73GB2A221J	CHIP R 220 J 1/10W	K2M2
R41			RK73GB2A223J	CHIP R 22K J 1/10W		R354-356			RK73GB2A102J	CHIP R 1.0K J 1/10W	K2M2
R46			RK73FB2B102J	CHIP R 1.0K J 1/8W		R357			RK73GB2A513J	CHIP R 51K J 1/10W	K2M2
R47			RK73GB2A223J	CHIP R 22K J 1/10W		R358			RK73GB2A472J	CHIP R 4.7K J 1/10W	K2M2
R50			RK73FB2B152J	CHIP R 1.5K J 1/8W		R359			RK73FB2B102J	CHIP R 1.0K J 1/8W	K2M2
R60			RK73GB2A203J	CHIP R 20K J 1/10W		R360			RK73GB2A473J	CHIP R 47K J 1/10W	K2M2
R61			RK73PB2H1R0J	CHIP R 1.0 J 1/2W		R361			RK73PB2H220J	CHIP R 22 J 1/2W	K2M2
R65			RK73GB2A103J	CHIP R 10K J 1/10W		R362			RK73GB2A222J	CHIP R 2.2K J 1/10W	K2M2
R66			RK73GH2A103D	CHIP R 10K D 1/10W		R370			RK73FB2B181J	CHIP R 180 J 1/8W	
R67	*		RK73GH2A514D	CHIP R 510K D 1/10W		R371			RK73GB2A331J	CHIP R 330 J 1/10W	
R72			RK73GH2A912D	CHIP R 9.1K D 1/10W		R372,373			RK73GB2A223J	CHIP R 22K J 1/10W	
R73			RK73EB2E361J	CHIP R 360 J 1/4W		R374			RK73FB2B181J	CHIP R 180 J 1/8W	
R80			RK73GH2A104D	CHIP R 100K D 1/10W		R375			RK73GB2A331J	CHIP R 330 J 1/10W	
R81			RK73GH2A473D	CHIP R 47K D 1/10W		R376			RK73FB2B181J	CHIP R 180 J 1/8W	K2K3M2
R82			RK73GB2A103J	CHIP R 10K J 1/10W		R377			RK73GB2A331J	CHIP R 330 J 1/10W	K2K3M2
R83			RK73GH2A333D	CHIP R 33K D 1/10W		R378,379			RK73GB2A223J	CHIP R 22K J 1/10W	K2K3M2
R84			RK73GH2A163D	CHIP R 16K D 1/10W		R380			RK73FB2B181J	CHIP R 180 J 1/8W	K2K3M2
R120,121			RK73GB2A103J	CHIP R 10K J 1/10W		R381			RK73GB2A331J	CHIP R 330 J 1/10W	K2K3M2
R126			RK73GB2A183J	CHIP R 18K J 1/10W		R382			RK73FB2B181J	CHIP R 180 J 1/8W	
R127			RK73FB2B203J	CHIP R 20K J 1/8W		R383			RK73GB2A331J	CHIP R 330 J 1/10W	
R128			RK73GB2A104J	CHIP R 100K J 1/10W		R384,385			RK73GB2A223J	CHIP R 22K J 1/10W	
R129			RK73EB2E473J	CHIP R 47K J 1/4W		R386			RK73FB2B181J	CHIP R 180 J 1/8W	
R130			RK73EB2E102J	CHIP R 1.0K J 1/4W		R387			RK73GB2A331J	CHIP R 330 J 1/10W	
R131			RK73GB2A473J	CHIP R 47K J 1/10W		R401			RK73GB2A223J	CHIP R 22K J 1/10W	
R132			RK73FB2B683J	CHIP R 68K J 1/8W		R402			RK73FB2B821J	CHIP R 820 J 1/8W	
R133,134			RK73EB2E102J	CHIP R 1.0K J 1/4W		R403,404			RK73GB2A471J	CHIP R 470 J 1/10W	
R140-142			RK73PB2H561J	CHIP R 560 J 1/2W		R410,411			RK73GB2A123J	CHIP R 12K J 1/10W	
R143			RK73GB2A223J	CHIP R 22K J 1/10W		R412,413			RK73EB2E100J	CHIP R 10 J 1/4W	
R144			RK73PB2H561J	CHIP R 560 J 1/2W		R414			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R145			RK73FB2B472J	CHIP R 4.7K J 1/8W		R415			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R146			RK73GB2A000J	CHIP R 0.0 J 1/10W	E3E4	R420-424			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R150			RK73GB2A223J	CHIP R 22K J 1/10W	K2K3M2	R425			RK73EB2E101J	CHIP R 100 J 1/4W	
R151,152			RK73PB2H221J	CHIP R 220 J 1/2W	K2K3M2	R426			RK73EB2E100J	CHIP R 10 J 1/4W	
R153			RK73FB2B472J	CHIP R 4.7K J 1/8W		R427			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R170			RK73GB2A473J	CHIP R 47K J 1/10W		R428			RK73EB2E100J	CHIP R 10 J 1/4W	
R171			RK73GB2A104J	CHIP R 100K J 1/10W		R429			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R172			RK73EB2E103J	CHIP R 10K J 1/4W		R430			RK73EB2E101J	CHIP R 100 J 1/4W	
R180			RK73GB2A104J	CHIP R 100K J 1/10W		R431			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R181			RK73EB2E103J	CHIP R 10K J 1/4W		R432			RK73GB2A104J	CHIP R 100K J 1/10W	
R190			RK73EB2E102J	CHIP R 1.0K J 1/4W		R433,434			RK73GB2A473J	CHIP R 47K J 1/10W	
R191-193			RK73EB2E471J	CHIP R 470 J 1/4W	E3	R435			RK73GB2A101J	CHIP R 100 J 1/10W	
R194			RK73GB2A222J	CHIP R 2.2K J 1/10W		R440			RK73GB2A473J	CHIP R 47K J 1/10W	
R195			RK73GB2A473J	CHIP R 47K J 1/10W		R441			RK73GB2A101J	CHIP R 100 J 1/10W	
R200			RK73GB2A101J	CHIP R 100 J 1/10W		R442			RK73GB2A104J	CHIP R 100K J 1/10W	
R210			RK73GB2A473J	CHIP R 47K J 1/10W		R450			RK73GB2A133J	CHIP R 13K J 1/10W	
R211			RK73GB2A104J	CHIP R 100K J 1/10W		R451			RK73GB2A473J	CHIP R 47K J 1/10W	

E3 : KDC-W7041U E4 : KDC-W7141UY (Europe)
K2 : KDC-X692 K3 : KDC-MP638U (North America)
M2 : KDC-X7009U (Other Areas)

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-579x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination
R452			RK73GB2A331J	CHIP R 330 J 1/10W	
R453			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R456			RK73GB2A100J	CHIP R 10 J 1/10W	
R469			RK73GB2A473J	CHIP R 47K J 1/10W	
R482,483			RK73GB2A103J	CHIP R 10K J 1/10W	
R490			RK73EB2E2R2J	CHIP R 2.2 J 1/4W	
R500,501			RK73GB2A103J	CHIP R 10K J 1/10W	
R502			RK73GB2A104J	CHIP R 100K J 1/10W	
R503			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R505			RK73GB2A473J	CHIP R 47K J 1/10W	
R506			RK73GB2A104J	CHIP R 100K J 1/10W	
R507			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R508,509			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R511			RK73GB2A101J	CHIP R 100 J 1/10W	
R512-514			RK73GB2A473J	CHIP R 47K J 1/10W	
R515,516			RK73GB2A471J	CHIP R 470 J 1/10W	
R517,518			RK73GB2A104J	CHIP R 100K J 1/10W	
R519,520			RK73GB2A473J	CHIP R 47K J 1/10W	
R522,523			RK73GB2A473J	CHIP R 47K J 1/10W	
R525			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R526			RK73EB2E333J	CHIP R 33K J 1/4W	
R527			RK73GB2A333J	CHIP R 33K J 1/10W	
R528-530			RK73GB2A223J	CHIP R 22K J 1/10W	K2
R529			RK73GB2A223J	CHIP R 22K J 1/10W	E3E4
R529,530			RK73GB2A223J	CHIP R 22K J 1/10W	K3M2
R530			RK73GB2A473J	CHIP R 47K J 1/10W	E4
R532			RK73GB2A473J	CHIP R 47K J 1/10W	
R533			RK73GB2A223J	CHIP R 22K J 1/10W	
R534			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R540			RK73GB2A223J	CHIP R 22K J 1/10W	E3E4
R540			RK73GB2A473J	CHIP R 47K J 1/10W	M2
R542			RK73GB2A104J	CHIP R 100K J 1/10W	
R543			RK73GB2A223J	CHIP R 22K J 1/10W	
R544			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R600-602			RK73GB2A101J	CHIP R 100 J 1/10W	
R603,604			RK73GB2A223J	CHIP R 22K J 1/10W	
R605			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R606,607			RK73GB2A223J	CHIP R 22K J 1/10W	
R650			RK73GB2A471J	CHIP R 470 J 1/10W	
R651			RK73GB2A104J	CHIP R 100K J 1/10W	
R653			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R700			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R701			RK73FB2B2R2J	CHIP R 2.2 J 1/8W	
R702			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R704			RK73GB2A223J	CHIP R 22K J 1/10W	
R705			RK73GB2A101J	CHIP R 100 J 1/10W	
R706			RK73GB2A223J	CHIP R 22K J 1/10W	
R707			RK73GB2A104J	CHIP R 100K J 1/10W	
R708			RK73GB2A101J	CHIP R 100 J 1/10W	
R709,710			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R711			RK73GB2A223J	CHIP R 22K J 1/10W	
R713			RK73GB2A101J	CHIP R 100 J 1/10W	
R714			RK73GB2A223J	CHIP R 22K J 1/10W	
R715			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R716			RK73GB2A101J	CHIP R 100 J 1/10W	

Ref. No.	Add	New	Parts No.	Description	Destination
R719			RK73GB2A101J	CHIP R 100 J 1/10W	
R720			RK73GB2A223J	CHIP R 22K J 1/10W	
R721,722			RK73GB2A101J	CHIP R 100 J 1/10W	
R723			RK73GB2A223J	CHIP R 22K J 1/10W	
R724			RK73GB2A101J	CHIP R 100 J 1/10W	
R725			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R726			RK73GB2A101J	CHIP R 100 J 1/10W	
R727			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R728			RK73GB2A153J	CHIP R 15K J 1/10W	
R729			RK73GB2A330J	CHIP R 33 J 1/10W	
R730			RK73GB2A153J	CHIP R 15K J 1/10W	
R731			RK73GB2A330J	CHIP R 33 J 1/10W	
R732			RK73GB2A153J	CHIP R 15K J 1/10W	
R733			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R734-737			RK73GB2A101J	CHIP R 100 J 1/10W	
R738			RK73GB2A223J	CHIP R 22K J 1/10W	
R739			RK73GB2A101J	CHIP R 100 J 1/10W	
R741			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R743			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R744-746			RK73GB2A101J	CHIP R 100 J 1/10W	
R747			RK73GB2A223J	CHIP R 22K J 1/10W	
R750			RK73GB2A333J	CHIP R 33K J 1/10W	
R751			RK73GB2A515J	CHIP R 5.1M J 1/10W	
R757			RK73GH2A104D	CHIP R 100K D 1/10W	
R758-760			RK73GB2A473J	CHIP R 47K J 1/10W	
R761			RK73GB2A101J	CHIP R 100 J 1/10W	
R763			RK73GB2A223J	CHIP R 22K J 1/10W	
R767			RK73GB2A223J	CHIP R 22K J 1/10W	
R769			RK73GB2A473J	CHIP R 47K J 1/10W	
R901			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R903			RK73GB2A100J	CHIP R 10 J 1/10W	
R908			RK73GB2A100J	CHIP R 10 J 1/10W	
R963			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R990			RK73GB2A1R5J	CHIP R 1.5 J 1/10W	
R999			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
W350			R92-2053-05	CHIP R 0 OHM J 1/8W	K3E3E4
W401			R92-2053-05	CHIP R 0 OHM J 1/8W	
S650			S74-0809-05	MICRO SWITCH	
D1			S2V60-5009F46	DIODE	
D20		*	D1FJ4	DIODE	
D21			UDZW5.6 (B)	ZENER DIODE	
D30			UDZW8.2 (B)	ZENER DIODE	
D50			UDZW12 (B)	ZENER DIODE	
D61-63		*	D1FJ4	DIODE	
D70		*	UDZW15 (B)	ZENER DIODE	
D80			EC31QS04AG	DIODE	
D121,122			UDZW6.8 (B)	ZENER DIODE	
D123			UDZW6.2 (B)	ZENER DIODE	
D140			DAP202U	DIODE	
D141,142			1SR154-400	DIODE	
D150,151			1SR154-400	DIODE	
D170			UDZW4.7 (B)	ZENER DIODE	
D190			UDZW6.2 (B)	ZENER DIODE	K2K3E4

PARTS LIST

ELECTRIC UNIT (X34-579x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
D190			UDZW6.2 (B)	ZENER DIODE	M2	Q71			2SC4081	TRANSISTOR	
D190-193			UDZW6.2 (B)	ZENER DIODE	E3	Q80			DTC144EUA	DIGITAL TRANSISTOR	
D200,201			AVRL1613R3FTA	VARISTOR		Q120			2SC4081	TRANSISTOR	
D350			1SR154-400	DIODE	K2M2	Q122,123			2SC4081	TRANSISTOR	
D351			DAP202U	DIODE	K2M2	Q140			DTC114YUA	DIGITAL TRANSISTOR	
D352			UDZW12 (B)	ZENER DIODE	K2M2	Q141			DTA114EUA	DIGITAL TRANSISTOR	
D353			UDZW5.6 (B)	ZENER DIODE	K2M2	Q142			2SA1576A	TRANSISTOR	
D370			DAP202U	DIODE		Q143			2SB1188(Q,R)	TRANSISTOR	
D373			DAP202U	DIODE		Q150			2SB1188(Q,R)	TRANSISTOR	K2K3M2
D410-412			UDZW6.8 (B)	ZENER DIODE		Q151			DTC114YUA	DIGITAL TRANSISTOR	K2K3M2
D420-422			UDZW6.8 (B)	ZENER DIODE		Q180			DTC144EUA	DIGITAL TRANSISTOR	
D423			UDZW6.2 (B)	ZENER DIODE		Q350			2SB1443	TRANSISTOR	K2M2
D428			UDZW6.2 (B)	ZENER DIODE		Q351,352			2SC4081	TRANSISTOR	K2M2
D451			DAP202U	DIODE		Q353			DTA124EUA	DIGITAL TRANSISTOR	K2M2
D454			1SR154-400	DIODE		Q354			DTC124EUA	DIGITAL TRANSISTOR	K2M2
D458			1SR154-400	DIODE		Q370			DTC143TUA	DIGITAL TRANSISTOR	
D484-486			DAP202U	DIODE		Q371			DTA124EUA	DIGITAL TRANSISTOR	
IC10			M5237ML-CF0J	ANALOGUE IC		Q372			DTC143TUA	DIGITAL TRANSISTOR	E3E4
IC20			R1114N331B-TR	ANALOGUE IC (3.3V LF)		Q372-376			DTC143TUA	DIGITAL TRANSISTOR	K2K3M2
IC60		*	LT3489	ANALOGUE IC		Q375,376			DTC143TUA	DIGITAL TRANSISTOR	E3E4
IC80			LT3684EMSE	ANALOGUE IC		Q377			DTA124EUA	DIGITAL TRANSISTOR	
IC300			STMP2151STR	MOS-IC		Q400			2SA1577	TRANSISTOR	
IC340			E-TDA7478AD	ANALOGUE IC	E3E4	Q401			DTC124EUA	DIGITAL TRANSISTOR	
IC350			NJM4565V-ZB	ANALOGUE IC	K2M2	Q500			2SB1260	TRANSISTOR	
IC450			TB2923HQ	ANALOGUE IC		Q501			2SC2713-F	TRANSISTOR	
IC480			E-TDA7415CB	ANALOGUE IC		Q650			DTA114YUA	DIGITAL TRANSISTOR	
IC500		*	30624MGPB77GP	MICROCONTROLLER IC		Q702			DTC114YUA	DIGITAL TRANSISTOR	
IC510			XC6120N362N1	MOS-IC		Q703			2SA1577	TRANSISTOR	
IC520			BR24L04FV-W	ROM IC		Q704,705			DTC114YUA	DIGITAL TRANSISTOR	
IC530			74HC2G02DP	MOS-IC		TH450			PRF18BE471QS2	POSITIVE RESISTOR	
IC600			74AHCT08PW	MOS-IC		A400			X86-4030-11	FRONT-END UNIT	K2K3M2
IC602			74LVC08APW	MOS-IC		A400			X86-4032-70	FRONT-END UNIT	E3E4
IC700		*	92CD28AFG6VV1	MICROCONTROLLER IC		CD MECHANISM ASSY (X92-6130-00) (DXM-6E20W)					
IC751			BR24L04FV-W	ROM IC		1	2B		A10-5328-31	CHASSIS	
IC752			341S2094	MICROPROCESSOR IC		2	1B		A10-5329-11	CHASSIS	
Q10			KTA1046-P	TRANSISTOR		5	2B		D10-4910-13	ARM ASSY	
Q11			DTA124EUA	DIGITAL TRANSISTOR		8	2A		D10-4911-23	LEVER ASSY	
Q12			DTC124EUA	DIGITAL TRANSISTOR		10	2A		D10-4906-33	ARM	
Q13			DTA124EUA	DIGITAL TRANSISTOR		11	2A		D10-4907-33	ARM	
Q14			DTC124EUA	DIGITAL TRANSISTOR		12	3A		D10-4908-03	ARM	
Q20			KTA1046-P	TRANSISTOR		13	3A		D10-4909-03	ARM	
Q21			2SC4081	TRANSISTOR		14	3B		D10-4915-03	ARM	
Q22			2SA1577	TRANSISTOR		15	2A		D10-4916-23	SLIDER	
Q23			DTC124EUA	DIGITAL TRANSISTOR		16	3B		D10-4914-22	SLIDER	
Q30			KTA1046-P	TRANSISTOR		17	2B		D10-4588-13	SLIDER	
Q31			2SC4081	TRANSISTOR		18	2B		D10-4917-04	ARM	
Q40			2SA1577	TRANSISTOR		19	2B		D10-4596-24	ARM	
Q41			DTC114YUA	DIGITAL TRANSISTOR		22	2A		D13-2151-04	GEAR	
Q45			2SB1689	TRANSISTOR		23	2B		D13-2152-04	GEAR	
Q46			DTC114YUA	DIGITAL TRANSISTOR		24	3B		D13-2153-04	GEAR	
Q50			2SB1184	TRANSISTOR		25	3B		D13-2154-04	GEAR	
Q51			2SC4081	TRANSISTOR		26	3B		D13-2155-04	WORM	
Q52			DTA124EUA	DIGITAL TRANSISTOR		27	2B		D13-2156-14	GEAR	
Q53			DTC124EUA	DIGITAL TRANSISTOR		28	3B		D13-2157-04	GEAR	
Q70			KTA1046-P	TRANSISTOR							

E3 : KDC-W7041U E4 : KDC-W7141UY (Europe)
K2 : KDC-X692 K3 : KDC-MP638U (North America)
M2 : KDC-X7009U (Other Areas)

△ Indicates safety critical components.

