

This exploded view diagram illustrates the assembly of the Sony RMT-CA700 car stereo unit. The components are labeled as follows:

- Top Panel Components:** RC1 (Remote Control), DC1 and DC2 (Cables), 351 (Antenna), 352 x2 (Screws), 353 (Trim), 354 (Trim), 501, 502, 503 (Faceplate).
- Front Panel Components:** 203 (Front Panel), 251 (Screw), 252 (Trim), 253 (Screw), 254 (Screw), 255 (Screw), 256 (Screw), 257 (Screw), 258 (Screw), 259 (Screw), 260 (Screw), 261 (Screw), 262 (Screw), 263 (Screw), 264 (Screw), 265 (Screw), 266 (Screw), 267 (Screw), 268 (Screw), 269 (Screw), 270 (Screw), 271 (Screw), 272 (Screw), 273 (Screw), 274 (Screw), 275 (Screw), 276 (Screw), 277 (Screw), 278 (Screw), 279 (Screw), 280 (Screw), 281 (Screw), 282 (Screw), 283 (Screw), 284 (Screw), 285 (Screw), 286 (Screw), 287 (Screw), 288 (Screw), 289 (Screw), 290 (Screw), 291 (Screw), 292 (Screw), 293 (Screw), 294 (Screw), 295 (Screw), 296 (Screw), 297 (Screw), 298 (Screw), 299 (Screw), 300 (Screw).
- Internal Components:** DME1 (Main Unit), FC1 (Front Cover), 701 (Main Unit), 702 (Front Cover), 703 (Front Cover), 704 (Front Cover), 705 (Front Cover), 706 (Front Cover), 707 (Front Cover), 708 (Front Cover), 709 (Front Cover), 710 (Front Cover), 711 (Front Cover), 712 (Front Cover), 713 (Front Cover), 714 (Front Cover), 715 (Front Cover), 716 (Front Cover), 717 (Front Cover), 718 (Front Cover), 719 (Front Cover), 720 (Front Cover), 721 (Front Cover), 722 (Front Cover), 723 (Front Cover), 724 (Front Cover), 725 (Front Cover), 726 (Front Cover), 727 (Front Cover), 728 (Front Cover), 729 (Front Cover), 730 (Front Cover), 731 (Front Cover), 732 (Front Cover), 733 (Front Cover), 734 (Front Cover), 735 (Front Cover), 736 (Front Cover), 737 (Front Cover), 738 (Front Cover), 739 (Front Cover), 740 (Front Cover), 741 (Front Cover), 742 (Front Cover), 743 (Front Cover), 744 (Front Cover), 745 (Front Cover), 746 (Front Cover), 747 (Front Cover), 748 (Front Cover), 749 (Front Cover), 750 (Front Cover), 751 (Front Cover), 752 (Front Cover), 753 (Front Cover), 754 (Front Cover), 755 (Front Cover), 756 (Front Cover), 757 (Front Cover), 758 (Front Cover), 759 (Front Cover), 760 (Front Cover), 761 (Front Cover), 762 (Front Cover), 763 (Front Cover), 764 (Front Cover), 765 (Front Cover), 766 (Front Cover), 767 (Front Cover), 768 (Front Cover), 769 (Front Cover), 770 (Front Cover), 771 (Front Cover), 772 (Front Cover), 773 (Front Cover), 774 (Front Cover), 775 (Front Cover), 776 (Front Cover), 777 (Front Cover), 778 (Front Cover), 779 (Front Cover), 780 (Front Cover), 781 (Front Cover), 782 (Front Cover), 783 (Front Cover), 784 (Front Cover), 785 (Front Cover), 786 (Front Cover), 787 (Front Cover), 788 (Front Cover), 789 (Front Cover), 790 (Front Cover), 791 (Front Cover), 792 (Front Cover), 793 (Front Cover), 794 (Front Cover), 795 (Front Cover), 796 (Front Cover), 797 (Front Cover), 798 (Front Cover), 799 (Front Cover), 800 (Front Cover).
- Other Components:** 200 (Front Panel), 201 (Front Panel), 202 (Front Panel), 203 (Front Panel), 204 (Front Panel), 205 (Front Panel), 206 (Front Panel), 207 (Front Panel), 208 (Front Panel), 209 (Front Panel), 210 (Front Panel), 211 (Front Panel), 212 (Front Panel), 213 (Front Panel), 214 (Front Panel), 215 (Front Panel), 216 (Front Panel), 217 (Front Panel), 218 (Front Panel), 219 (Front Panel), 220 (Front Panel), 221 (Front Panel), 222 (Front Panel), 223 (Front Panel), 224 (Front Panel), 225 (Front Panel), 226 (Front Panel), 227 (Front Panel), 228 (Front Panel), 229 (Front Panel), 230 (Front Panel), 231 (Front Panel), 232 (Front Panel), 233 (Front Panel), 234 (Front Panel), 235 (Front Panel), 236 (Front Panel), 237 (Front Panel), 238 (Front Panel), 239 (Front Panel), 240 (Front Panel), 241 (Front Panel), 242 (Front Panel), 243 (Front Panel), 244 (Front Panel), 245 (Front Panel), 246 (Front Panel), 247 (Front Panel), 248 (Front Panel), 249 (Front Panel), 250 (Front Panel), 251 (Front Panel), 252 (Front Panel), 253 (Front Panel), 254 (Front Panel), 255 (Front Panel), 256 (Front Panel), 257 (Front Panel), 258 (Front Panel), 259 (Front Panel), 260 (Front Panel), 261 (Front Panel), 262 (Front Panel), 263 (Front Panel), 264 (Front Panel), 265 (Front Panel), 266 (Front Panel), 267 (Front Panel), 268 (Front Panel), 269 (Front Panel), 270 (Front Panel), 271 (Front Panel), 272 (Front Panel), 273 (Front Panel), 274 (Front Panel), 275 (Front Panel), 276 (Front Panel), 277 (Front Panel), 278 (Front Panel), 279 (Front Panel), 280 (Front Panel), 281 (Front Panel), 282 (Front Panel), 283 (Front Panel), 284 (Front Panel), 285 (Front Panel), 286 (Front Panel), 287 (Front Panel), 288 (Front Panel), 289 (Front Panel), 290 (Front Panel), 291 (Front Panel), 292 (Front Panel), 293 (Front Panel), 294 (Front Panel), 295 (Front Panel), 296 (Front Panel), 297 (Front Panel), 298 (Front Panel), 299 (Front Panel), 300 (Front Panel).

No. MA596

created date:2015-03-05

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	QAM1329-001	DC CORD		1	A,E,F,J,M,R,V,W,X,Y
△	DC2	QAM1345-003	DC CORD		1	B,C,D,G,H,I,K,L,N,O, P,S,T,U
△	DC2	QAM1378-001	DC CORD		1	Q
	DME1	FC2-2A00NXN	CD MECHANISM(Made at JEIN)		1	
	DME1 or	X92-6820-01	CD MECHANISM(Made at JKEM)		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	WJT0335-001A-E	E-CARD WIRE		1	
	LCD1	B3H-0006-00	LCD		1	
	PA1	A6D-0019-00	PANEL		1	A,B,C,D,E,F,G,H,I,J, K,L,N,O,P,R,S,T,U,V, W,X,Y
	PA1	A6D-0019-01	PANEL		1	M
	PA1	A6D-0019-03	PANEL		1	Q
	RC1	RM-RK52M	REMOTE CONTROL UNI T		1	A,E,F,M,Q,R,V,W,X,Y
	A	GE40377-002A	SCREW		2	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,Q,R,S,T, U,V,W
	H	QYSDSG3008ZA	TAP SCREW	M3 x 8mm	1	X,Y
	203	A2C-0003-00	SUB PANEL		1	A,B,C,D,G,H,I,K,L,N, O,P,R,S,T,U
	203	A2C-0003-01	SUB PANEL		1	E,F,J,M,V,W
	203	A2C-0003-02	SUB PANEL		1	Q
	203	A2C-0003-10	SUB PANEL		1	X,Y
	251	F0G-0011-00	COVER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	251	F0G-0011-01	COVER		1	Q
	252	B1A-0013-00	FRONT GLASS		1	A
	252	B1A-0013-06	FRONT GLASS		1	B,C,D
	252	B1A-0013-04	FRONT GLASS		1	E,F
	252	B1A-0013-07	FRONT GLASS		1	G,H,I
	252	B1A-0013-08	FRONT GLASS		1	J
	252	B1A-0015-03	FRONT GLASS		1	K,L
	252	B1A-0013-03	FRONT GLASS		1	M
	252	B1A-0013-09	FRONT GLASS		1	N
	252	B1A-0015-02	FRONT GLASS		1	O,P
	252	B1A-0013-02	FRONT GLASS		1	Q
	252	B1A-0013-0F	FRONT GLASS		1	R
	252	B1A-0013-0J	FRONT GLASS		1	S,T,U
	252	B1A-0013-0H	FRONT GLASS		1	V,W
	252	B1A-0013-01	FRONT GLASS		1	X
	252	B1A-0013-0G	FRONT GLASS		1	Y
	253	K2F-0012-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	253	K2F-0012-01	PUSH KNOB		1	Q
	254	K2F-0014-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,X
	254	K2F-0014-03	PUSH KNOB		1	Q
	254	K2F-0014-01	PUSH KNOB		1	R,S,T,U,V,W,Y
	255	GE35609-001A	LOCK LEVER		1	
	256	K2E-0008-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	256	K2E-0008-01	PUSH KNOB		1	Q
	257	GE40514-004A	TORSION SPRING		1	
	258	K2F-0013-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	258	K2F-0013-01	PUSH KNOB		1	Q
	259	GE35611-001A	RELEASE LEVER		1	
	260	K2E-0007-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	260	K2E-0007-01	PUSH KNOB		1	Q
	261	GE30999-014A	COMP.SPRING		1	
	262	K2E-0009-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,N,O,P,R,S,T,U,V, W,X,Y
	262	K2E-0009-01	PUSH KNOB		1	M
	262	K2E-0009-02	PUSH KNOB		1	Q
	263	GE40630-003A	BLIND		1	
	264	GE30999-012A	COMP.SPRING		1	


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	265	K2K-0102-00	KNOB		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	265	K2K-0102-05	KNOB		1	Q
	266	GE40127-006A	KNOB SPRING		1	
	267	B1K-0015-00	LIGHTING BOARD		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	267	B1K-0015-01	LIGHTING BOARD		1	Q
	268	E2K-0010-00	CONDUCT RUBBER		1	
	269	A4G-0009-00	REAR COVER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	269	A4G-0009-01	REAR COVER		1	Q
	273	E2K-0013-00	CONDUCT RUBBER		1	
	351	GE20362-002A	MOUNTING SLEEVE		1	
	352	GE40685-001A	HOOK		2	
	353	GE20363-001A	TRIM PLATE		1	A,B,C,D,E,F,G,H,I,J, K,L,N,O,P,Q,R,S,T,U, V,W,X,Y
	353	GE20363-002A	TRIM PLATE		1	M
	354	GE40521-001A	CARRYING CASE		1	E,F,J,M,N,Q,V,W
	501	B5A-0105-00	INST BOOK	ENG FRE SPA	1	A,R
	501	B5A-0107-00	INST BOOK	ENG FRE	1	B,C,G,H,O,S,T
	501	B5A-0107-05	INST BOOK	RUS UKR	1	D,I,N,P,U
	501	B5A-0106-00	INST BOOK	ENG	1	E,M,V
	501	B5A-0107-06	INST BOOK	ENG FRE RUS PER TUR ARA	1	J
	501	B5A-0107-10	INST BOOK	ENG FRE	1	K,L
	501	B5A-0109-00	INST BOOK	POR(LATIN AMERICA)	1	Q
	501	B5A-0190-00	INST.MANUAL	ENG FRE SPA	1	X,Y
	502	B5A-0107-02	INST BOOK	GER	1	B,C,D,G,H,I,O,P,S,T, U
	502	B5A-0106-02	INST BOOK	CHI(TAIWAN)	1	E,F,V,W
	502	B5A-0107-11	INST BOOK	SPA ITA POR(EUROPE) DUT GRE	1	K
	502	B5A-0106-01	INST BOOK	RUS PER THA ARA	1	M
	503	B5A-0107-01	INST BOOK	SPA ITA POR(EUROPE) DUT GRE	1	B,G,O,S
	503	B5A-0107-03	INST BOOK	DUT SWE FIN	1	C,H,T
	503	B5A-0107-04	INST BOOK	POL HUN CZE ROM BUL	1	D,I,P,U
	503	B5A-0106-01	INST BOOK	RUS PER THA ARA	1	E,V
	503	B5A-0106-03	INST BOOK	KOR	1	F,W
	503	B5A-0107-12	INST BOOK	GER	1	K,L
	503	B5A-0107-13	INST BOOK	DAN SWE FIN	1	L
	503	B5A-0106-02	INST BOOK	CHI(TAIWAN)	1	M

Block No.MBMM

Grease

- ★ JVS-1003
- W01-2067-08



MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-003A	LOWER CHASSIS		1	
	3	LV3A174-002A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-002A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

EXPLODED VIEW (CD MECHANISM: X92-6820-01)


Block No.MCMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease

★ JVS-1003

● W01-2067-08

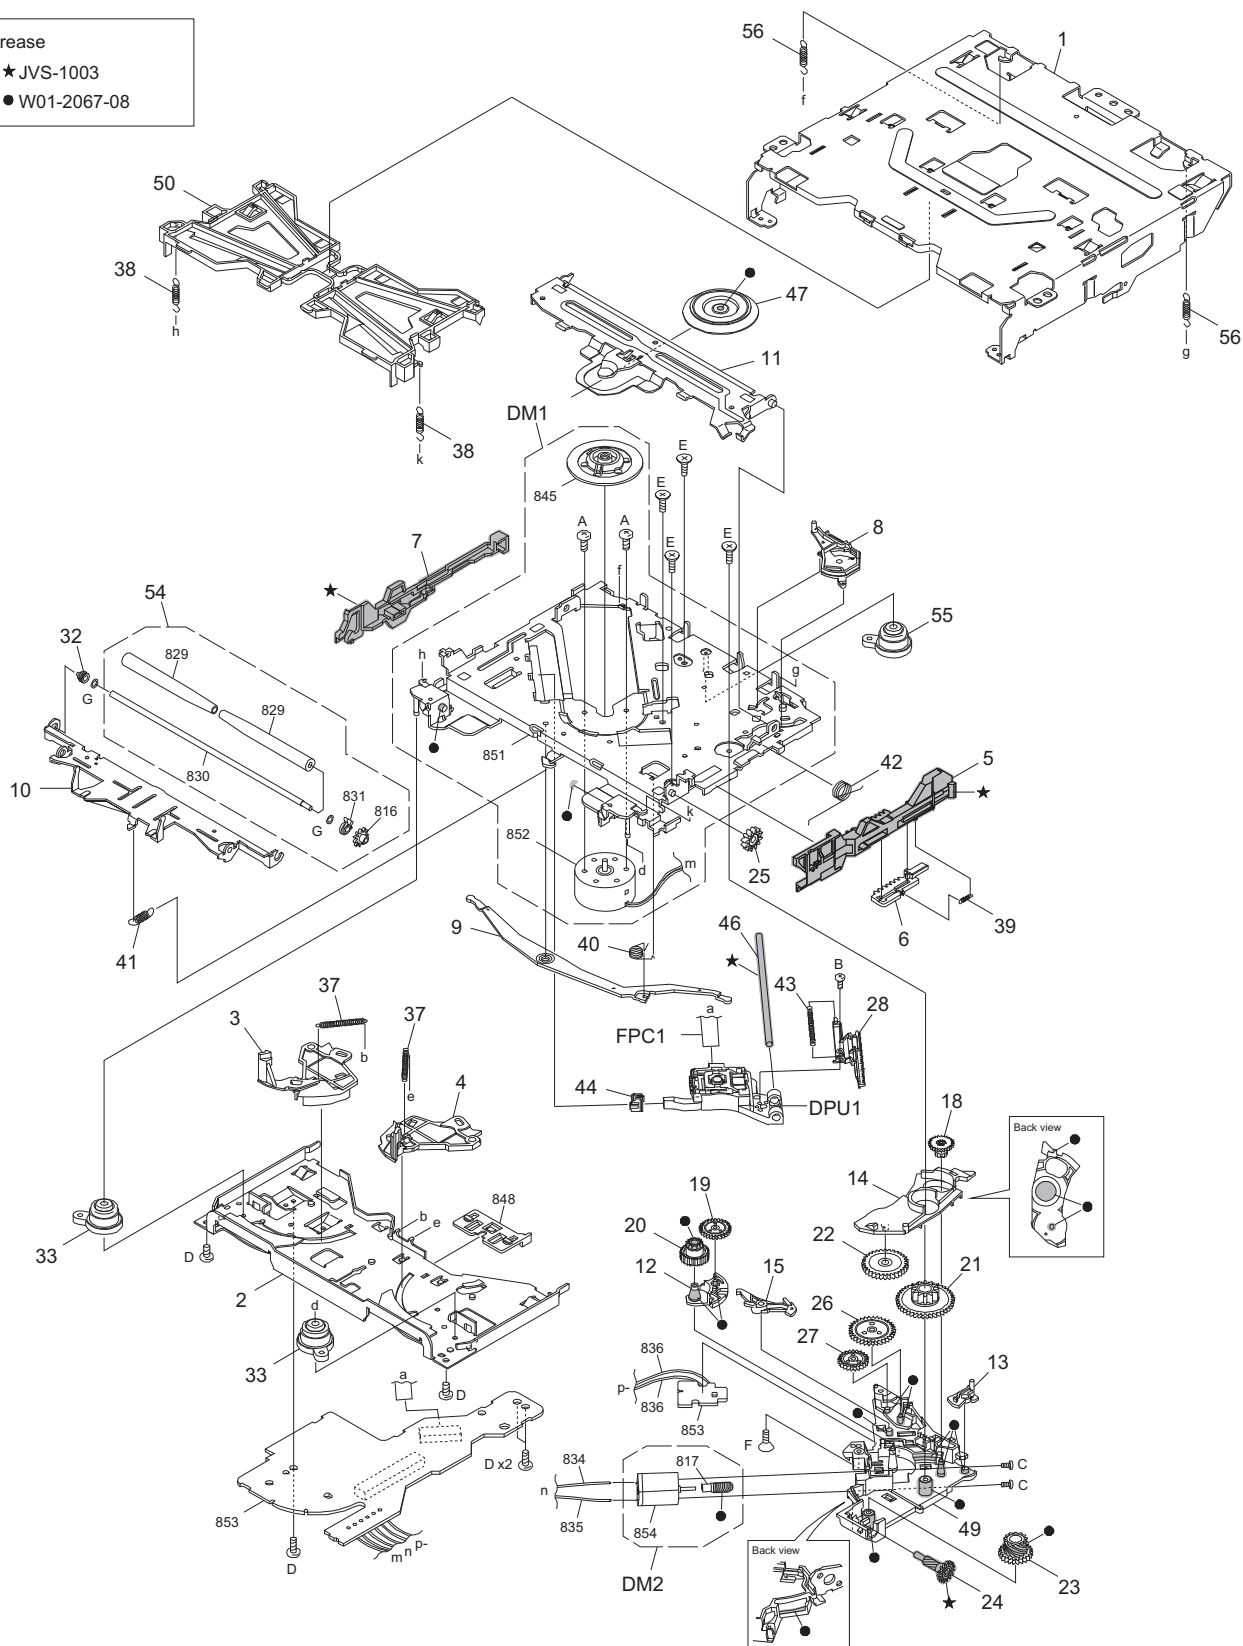

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: X92-6820-01) <MCMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	DPU1	QAL1521-001	PICK UP		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	FPC1	QAL1465-001	FPC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	A	LV45568-001A	MINI SCREW		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D	N09-6108-15	TAPTITE SCREW		5	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	E	N09-6738-15	TAPTITE SCREW		4	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	F	N09-6921-05	TAPTITE SCREW		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	G	N19-2356-04	FLAT WASHER		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	1	A10-5625-21	OUTER CHASSIS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	2	A10-5626-01	LOWER CHASSIS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	3	D10-7174-03	DISC ARM L		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	4	D10-7175-03	DISC ARM R		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	5	D10-7177-02	SLIDER R		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	6	D10-7178-03	TRIGGER SLIDER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	7	D10-7179-02	SLIDER L		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	8	D10-7180-03	TRIGGER ARM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	9	D10-7181-13	JOINT LEVER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	10	D10-7182-12	ROLLER LEVER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	11	D10-7183-02	CLAMP ARM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	12	D10-7184-03	TRANSFER ARM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	13	D10-7185-04	SL LOCK CAM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	14	D10-7186-03	SL LOCK ARM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	15	D10-7187-13	PICK LOCK ARM		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	18	D13-3104-04	HELICAL GEAR 1		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	19	D13-3105-04	TRANSFER GEAR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	20	D13-3106-04	LOAD GEAR H		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
21		D13-3107-04	DRIVE GEAR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
22		D13-3108-04	JOINT GEAR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
23		D13-3109-04	WORM GEAR 2		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
24		D13-3110-04	HELICAL GEAR 2		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
25		D13-3111-04	LOAD GEAR V		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
26		D13-3112-04	PICK GEAR 1		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
27		D13-3113-04	PICK GEAR 2		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
28		D13-3114-03	RACK GEAR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
32		D23-0974-14	R.RETAINER L		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
33		D39-0403-05	DAMPER F		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
37		G01-4810-04	DISC ARM SPRING		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
38		G01-4829-04	FLOAT SPRING(F)		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
39		G01-4813-04	TRIGGER SPRING		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
40		G01-4814-04	LOAD SPRING		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
41		G01-4815-04	ROLLER SPRING		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
42		G01-4816-04	CLAMP SPRING		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
43		G01-4817-04	PICK SPRING		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
44		LV36813-501A	SUB GUIDE CAP		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
46		LV44555-001A	MAIN SHAFT		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
47		J11-0692-03	CLAMPER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
49		J19-7360-21	GEAR HOLDER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
50		J90-1209-21	DISC GUIDE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
54		CM-FC2-R	ROLLER ASSY		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
55		D39-0404-05	DAMPER R		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
56		G01-4812-04	FLOAT SPRING(R)		2	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-033x-xx) <01>						
	IC161	TDA7718C	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC301	JCV8034	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC411	MF1337S3959-X	IC		1	R,S,T,U,V,W,X,Y
	IC540	MN6627553APA	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC601	TEF6657HN-X	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC701	R5S726A0D216FP	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC821	W3F-0003-00	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC831	BU4228F-W	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC841	BR24T02FJ-W-X	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC851	BU1CTD3WG-W	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC861	MP9942GJ	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC891	NCP380HSNAJAA-X	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	IC901	LV5685PV-H	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC941	BU33TD3WG-W	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q260	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q271	LSAR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	R,S,T,U,Y
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	R,S,T,U,Y
	Q360	LSCR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q540	2SA2188/E/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D100	RSB6.8SM-X	BP Z DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D101	RSB6.8SM-X	BP Z DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D270	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D271	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D273	DA2J101	DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D360	DZ2J068M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D370	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D390	MBRX130	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D391	MBR0530-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D400	RB521SM-30-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D401	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D861	DB22306	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D902	SK34A-L-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D903	SK34A-L-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	D990	1N5401-BPC04	SI DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C251	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C261	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C321	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	R,S,T,U,Y
	C331	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	R,S,T,U,Y
	C360	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C368	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	R,S,T,U,V,W,X,Y
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C561	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
△	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C608	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C820	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C830	CK73GGB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C840	CK73GGB1C473K	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C850	CK73GGB1C474K	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C851	CK73GGB1C474K	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C861	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C862	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C863	CK73GGB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C864	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C867	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C868	QE20850-157Z	E CAPACITOR	150uF	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C869	CK73GGB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C870	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C916	CK73GGB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	C941	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K,L,X,Y
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C990	QE20981-228	E CAPACITOR	2200uF	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1000	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1010	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1011	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1012	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1013	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1014	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1015	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1016	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1017	CK73GGB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1022	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1023	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1028	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1033	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1034	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1035	CK73GGB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1320	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1605	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1900	CK73GGB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R170	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	R,S,T,U,Y
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	R,S,T,U,Y
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	R,S,T,U,Y
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	R,S,T,U,Y
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	R,S,T,U,Y
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	R,S,T,U,Y
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R365	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R381	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	E,F,M,V,W
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R403	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	R,S,T,U,V,W,Y
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	R,S,T,U,V,W,Y
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,X,Y
	R421	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R718	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	V,W,X,Y A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R732	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	O,P
	R732	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R733	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,X
	R733	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	O,P
	R733	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R734	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	B,C,D,G,H,I,J,K,L,O, P,S,T,U
	R734	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	E,F,M,V,W
	R734	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	N
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,R,X,Y
	R735	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,G,H,I,J,K,L,O, P,S,T,U
	R735	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	E,F,M,V,W
	R735	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	N
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R745	RK73EB2E222J	MG RESISTOR	2.2kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R748	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R754	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R820	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R830	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R850	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R862	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R864	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R868	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R892	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1007	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1017	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1029	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1036	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1045	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1047	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1049	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	V,W,X,Y A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1091	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1300	NRZ0084-0R0X	MG RESISTOR	0Ω	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1600	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1715	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1717	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1861	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L540	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L574	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L601	NQLM93K-4R7X	INDUCTOR	4.7uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W K,L,X,Y
	L601 L602	LK73G0BE4R7K NQLM93K-R47X	M.CHIP INDUCTOR INDUCTOR	0.47uH K	1 1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W K,L,X,Y
	L602 L603	LK73G0BER47K NQLM93K-R10X	M.CHIP INDUCTOR INDUCTOR	0.1uH K	1 1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L604	NQLM93K-1R0X	INDUCTOR	1uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L604 L605	LK73G0BE1R0K NQLM93K-R22X	M.CHIP INDUCTOR INDUCTOR	0.22uH K	1 1	K,L,X,Y A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L605 L606	LK73G0BER22K NQLM93K-R12X	M.CHIP INDUCTOR INDUCTOR	0.12uH K	1 1	K,L,X,Y A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L606 L607	LK73G0BER12K NQLM93K-R15X	M.CHIP INDUCTOR INDUCTOR	0.15uH K	1 1	K,L,X,Y A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L607 L700	LK73G0BER15K NQR0713-001X	M.CHIP INDUCTOR FERRITE BEADS		1 1	K,L,X,Y A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L701	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L709	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L710	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L777	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L778	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L820	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L821	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L822	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L823	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L824	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L825	LB73G0CA-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L826	NQR0403-003X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L827	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L990	QQR1927-001	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN990	QNZ0607-001	CAR CONNECTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	J321	QNN0874-001	PIN JACK		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,V,W,X
	J321	QNN0868-001	PIN JACK		1	R,S,T,U,Y
	J600	QNB0356-001	ANT TERMINAL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S830	QSW0648-001Z	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	VA600	F0K-0014-00	SURGE ABSORBER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	X540	NAX1224-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	X600	QAX0969-001Z	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	X701	NAX1251-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MAIN PWB ASSY (XJ1-0463-20) <04>

	IC161	TDA7718C	ANALOG IC	1	Q
△	IC301	JCV8034	IC	1	Q
△	IC540	MN6627553APA	IC	1	Q
△	IC601	TEF6657HN-X	IC	1	Q
△	IC701	R5S726A0D216FP	IC	1	Q
△	IC821	W3F-0003-00	IC	1	Q
	IC831	BU4228F-W	IC	1	Q
	IC841	BR24T02FJ-W-X	IC	1	Q
	IC851	BU1CTD3WG-W	IC	1	Q
	IC861	MP9942GJ	ANALOG IC	1	Q
	IC891	NCP380HSNAJAA-X	IC	1	Q
△	IC901	LV5685PV-H	ANALOG IC	1	Q
	IC941	BU33TD3WG-W	IC	1	Q
	Q250	LTC043TEB-X	DIGI TRANSISTOR	1	Q
	Q260	LTC043TEB-X	DIGI TRANSISTOR	1	Q
	Q270	LTA024EEB-X	DIGI TRANSISTOR	1	Q
	Q271	LSAR523UBFS8	TRANSISTOR	1	Q
	Q272	LTC024EEB-X	DIGI TRANSISTOR	1	Q
	Q273	LTA024EEB-X	DIGI TRANSISTOR	1	Q
	Q360	LSCR523UBFS8	TRANSISTOR	1	Q
	Q540	2SA2188/E/-X	TRANSISTOR	1	Q
	Q701	LTA014YEB-X	DIGI TRANSISTOR	1	Q
	D100	RSB6.8SM-X	BP Z DIODE	1	Q
	D101	RSB6.8SM-X	BP Z DIODE	1	Q
	D270	BAW56-TP-X	SI DIODE	1	Q
	D271	BAW56-TP-X	SI DIODE	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D273	DA2J101	DIODE		1	Q
	D360	DZ2J068M	ZENER DIODE		1	Q
	D390	MBRX130	SCHOTTKY DIODE		1	Q
	D391	MBR0530-X	SB DIODE		1	Q
	D400	RB521SM-30-X	SB DIODE		1	Q
	D401	DZ2J051M	ZENER DIODE		1	Q
	D861	DB22306	SCHOTTKY DIODE		1	Q
	D902	SK34A-L-X	SB DIODE		1	Q
	D903	SK34A-L-X	SB DIODE		1	Q
△	D990	1N5401-BPC04	SI DIODE		1	Q
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	Q
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	Q
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	Q
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C251	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C261	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	Q
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	Q
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	Q
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C360	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C368	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	Q
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	Q
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	Q
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	Q
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	Q
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	Q
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	Q
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	Q
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C561	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	Q
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	Q
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	Q
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	Q
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	Q
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	Q
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	Q
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	Q
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	Q
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
△	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	Q
	C608	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	1	Q
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	Q
△	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	Q
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	Q
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	Q
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C618	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C624	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C722	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C723	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C724	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	Q
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	Q
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	Q
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	Q
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C861	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C862	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C864	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C867	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C868	QE20850-157Z	E CAPACITOR	150uF	1	Q
	C869	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C870	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	Q
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	Q
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	Q
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	Q
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C941	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C990	QE20981-228	E CAPACITOR	2200uF	1	Q
	C1000	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1022	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1023	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1028	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1033	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1034	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1035	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1320	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1605	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	Q
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R170	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	Q
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	Q
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	Q
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R365	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	Q
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	Q
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R403	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	Q
	R421	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	Q
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	Q
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	Q
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	Q
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	Q
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	Q
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	Q
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	Q
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	Q
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	Q
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	Q
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	Q
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	Q
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R718	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	Q
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	Q
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R733	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R734	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R735	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R745	RK73EB2E222J	MG RESISTOR	2.2kΩ 1/4W J	1	Q
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R748	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	Q
	R754	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R820	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R830	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	Q
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R850	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	Q
	R862	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	Q
	R864	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	Q
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	Q
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	Q
	R868	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	Q
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	Q
	R892	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	Q
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	Q
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	Q
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	Q
	R1007	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	Q
	R1017	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1029	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1036	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1045	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	R1047	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1049	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1091	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1300	NRZ0084-0R0X	MG RESISTOR	0Ω	1	Q
	R1600	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1715	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1717	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1861	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	Q
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	Q
	L540	NQR0713-001X	FERRITE BEADS		1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L574	NQR0713-001X	FERRITE BEADS		1	Q
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	Q
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	Q
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	Q
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	Q
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	Q
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	Q
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	Q
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	Q
	L700	NQR0713-001X	FERRITE BEADS		1	Q
	L701	LB73G0BK-006	CHIP FERRITE		1	Q
	L709	NQR0713-001X	FERRITE BEADS		1	Q
	L710	NQR0713-001X	FERRITE BEADS		1	Q
	L777	NQR0713-001X	FERRITE BEADS		1	Q
	L778	NQR0713-001X	FERRITE BEADS		1	Q
	L820	NQR0713-001X	FERRITE BEADS		1	Q
	L821	NQR0713-001X	FERRITE BEADS		1	Q
	L822	NQR0713-001X	FERRITE BEADS		1	Q
	L823	NQR0713-001X	FERRITE BEADS		1	Q
	L824	NQR0713-001X	FERRITE BEADS		1	Q
	L825	LB73G0CA-002	CHIP FERRITE		1	Q
	L826	NQR0403-003X	FERRITE BEADS		1	Q
	L827	LB73G0BK-006	CHIP FERRITE		1	Q
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	Q
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	Q
	L990	QQR1927-001	CHOKE COIL		1	Q
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	Q
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	Q
	CN990	QNZ0607-001	CAR CONNECTOR		1	Q
	J321	QNN0874-001	PIN JACK		1	Q
	J600	QNB0356-001	ANT TERMINAL		1	Q
	S830	QSW0648-001Z	TACT SWITCH		1	Q
	VA600	F0K-0014-00	SURGE ABSORBER		1	Q
	X540	NAX1224-001X	CRYSTAL		1	Q
	X600	QAX0969-001Z	CRYSTAL		1	Q
	X701	NAX1251-001X	CRYSTAL		1	Q
SWITCH PWB ASSY (XJ6-024x-xx) <02>						
	IC1	BU97520AKV-M	MOS IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	IC90	SIR8630B6T	IR DETECT UNIT		1	A,E,F,J,M,N,R,V,W,X, Y
	Q1	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q50	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	Q51	2SC4097P/R/	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K, L,M,O,P,R,S,T,U,V,W, X,Y
	Q53	2SC4097P/R/	TRANSISTOR		1	J,N,O,P
	D1	DZ2J056M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D2	MBRX130	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D20	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D20	QSMR-C13SBCMN	LED		1	G,H,I
	D20	SML-311WT/JK/X	LED		1	M
	D22	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D22	QSMR-C13SBCMN	LED		1	G,H,I
	D22	SML-311WT/JK/X	LED		1	M
	D24	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D24	QSMR-C13SBCMN	LED		1	G,H,I
	D24	SML-311WT/JK/X	LED		1	M
	D25	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D25	QSMR-C13SBCMN	LED		1	G,H,I
	D25	SML-311WT/JK/X	LED		1	M
	D26	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D26	QSMR-C13SBCMN	LED		1	G,H,I
	D26	SML-311WT/JK/X	LED		1	M
	D27	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D27	QSMR-C13SBCMN	LED		1	G,H,I
	D27	SML-311WT/JK/X	LED		1	M
	D28	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D28	QSMR-C13SBCMN	LED		1	G,H,I
	D28	SML-311WT/JK/X	LED		1	M
	D29	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						R,S,T,U,V,W,X,Y
	D29	QSMR-C13SBCMN	LED		1	G,H,I
	D29	SML-311WT/JK/X	LED		1	M
	D30	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D30	QSMR-C13SBCMN	LED		1	G,H,I
	D30	SML-311WT/JK/X	LED		1	M
	D31	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D31	QSMR-C13SBCMN	LED		1	G,H,I
	D31	SML-311WT/JK/X	LED		1	M
	D33	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D33	QSMR-C13SBCMN	LED		1	G,H,I
	D33	SML-311WT/JK/X	LED		1	M
	D34	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D34	QSMR-C13SBCMN	LED		1	G,H,I
	D34	SML-311WT/JK/X	LED		1	M
	D35	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D35	QSMR-C13SBCMN	LED		1	G,H,I
	D35	SML-311WT/JK/X	LED		1	M
	D36	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D36	QSMR-C13SBCMN	LED		1	G,H,I
	D36	SML-311WT/JK/X	LED		1	M
	D37	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D37	QSMR-C13SBCMN	LED		1	G,H,I
	D37	SML-311WT/JK/X	LED		1	M
	D38	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D38	QSMR-C13SBCMN	LED		1	G,H,I
	D38	SML-311WT/JK/X	LED		1	M
	D39	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D39	QSMR-C13SBCMN	LED		1	G,H,I
	D39	SML-311WT/JK/X	LED		1	M
	D40	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D40	QSMR-C13SBCMN	LED		1	G,H,I
	D40	SML-311WT/JK/X	LED		1	M
	D41	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,
						R,S,T,U,V,W,X,Y
	D41	QSMR-C13SBCMN	LED		1	G,H,I
	D41	SML-311WT/JK/X	LED		1	M
	D49	LUWJNSH.PC//0	LED		1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	D50	SML-D12P8WT	LED		1	J,N,O,P
	D52	SML-D12P8WT	LED		1	J,N,O,P
	D54	SML-D12P8WT	LED		1	J,N,O,P
	D55	SML-D12P8WT	LED		1	J,N,O,P
	D56	SML-D12P8WT	LED		1	J,N,O,P
	D57	SML-D12P8WT	LED		1	J,N,O,P
	D58	SML-D12P8WT	LED		1	J,N,O,P
	D59	SML-D12P8WT	LED		1	J,N,O,P
	D60	SML-D12P8WT	LED		1	J,N,O,P
	D61	SML-D12P8WT	LED		1	J,N,O,P
	D63	SML-D12P8WT	LED		1	J,N,O,P
	D64	SML-D12P8WT	LED		1	J,N,O,P
	D65	SML-D12P8WT	LED		1	J,N,O,P
	D66	SML-D12P8WT	LED		1	J,N,O,P
	D67	SML-D12P8WT	LED		1	J,N,O,P
	D68	SML-D12P8WT	LED		1	J,N,O,P
	D69	SML-D12P8WT	LED		1	J,N,O,P
	D70	SML-D12P8WT	LED		1	J,N,O,P
	D71	SML-D12P8WT	LED		1	J,N,O,P
	D80	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	D81	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	C3	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J,
						K,L,M,N,O,P,R,S,T,U,
						V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,E,F,J,M,N,R,V,W,X, Y
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R18	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	J,N,O,P
	R19	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R19	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R20	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R20	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R21	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R21	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R22	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R22	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R23	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R23	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R24	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R24	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R25	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R25	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R26	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R26	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R27	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R27	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R28	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R28	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R29	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R29	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R30	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O, P,R,S,T,U,V,W,X,Y
	R30	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R31	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	J,N,O,P
	R32	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	J,N,O,P
	R33	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R34	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R35	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	J,N,O,P
	R36	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R37	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	J,N,O,P
	R38	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R39	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R40	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R41	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	J,N,O,P
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R51	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R53	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	O,P
	R55	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R91	RK73GB2A623J	MG RESISTOR	62kΩ 1/10W J	1	B,C,D,G,H,I,K,L,O,P, S,T,U
	R1000	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,E,F,J,M,N,R,V,W,X, Y
	R1009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J,N
	R1010	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J,N,O,P
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN1	QGZ2006K1-20X	CONNECTOR	(1-20)	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	FL80	NQR0704-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	J60	QNS0279-001	3.5 JACK		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	J80	QNZ1076-001	USB CONNECTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W
	J80	E5J-0069-00	USB TERMINAL		1	X,Y
	S20	T9K-0007-00	ROTARY ENCODER		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

SWITCH PWB ASSY (XJ6-0363-20) <05>

IC1	BU97520AKV-M	MOS IC	1	Q
IC90	SIR8630B6T	IR DETECT UNIT	1	Q
Q1	LSCR523EBFS8	TRANSISTOR	1	Q
Q50	LSCR523EBFS8	TRANSISTOR	1	Q
Q51	2SC4097P/R/	TRANSISTOR	1	Q
D1	DZ2J056M	ZENER DIODE	1	Q
D2	MBRX130	SCHOTTKY DIODE	1	Q
D20	SML-D12V8WT	LED	1	Q
D22	SML-D12V8WT	LED	1	Q
D24	SML-D12V8WT	LED	1	Q
D25	SML-D12V8WT	LED	1	Q
D26	SML-D12V8WT	LED	1	Q
D27	SML-D12V8WT	LED	1	Q
D28	SML-D12V8WT	LED	1	Q
D29	SML-D12V8WT	LED	1	Q
D30	SML-D12V8WT	LED	1	Q
D31	SML-D12V8WT	LED	1	Q
D33	SML-D12V8WT	LED	1	Q
D34	SML-D12V8WT	LED	1	Q
D35	SML-D12V8WT	LED	1	Q
D36	SML-D12V8WT	LED	1	Q
D37	SML-D12V8WT	LED	1	Q
D38	SML-D12V8WT	LED	1	Q
D39	SML-D12V8WT	LED	1	Q
D40	SML-D12V8WT	LED	1	Q
D41	SML-D12V8WT	LED	1	Q
D49	LUWJNSH.PC//0	LED	1	Q
D80	DZ2J051M	ZENER DIODE	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D81	DZ2J051M	ZENER DIODE		1	Q
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C3	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	Q
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	Q
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	Q
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	Q
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	Q
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	Q
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	Q
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R19	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R20	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R21	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R22	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R23	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R24	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R25	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R26	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R27	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R28	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R29	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R30	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	Q
	R51	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	Q
	R55	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	Q
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	Q
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	Q
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	Q
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	Q
	R1000	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	CN1	QGZ2006K1-20X	CONNECTOR	(1-20)	1	Q
	FL80	NQR0704-001X	CHOKE COIL		1	Q
	J60	QNS0279-001	3.5 JACK		1	Q
	J80	QNZ1076-001	USB CONNECTOR		1	Q
	S20	T9K-0007-00	ROTARY ENCODER		1	Q

CD MECHA PWB ASSY (LVA20106-01A) <03>

	IC1	BD8266EFV-M-X	IC		1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
	CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	

	CN2	QGF0522F6-15W	FFC/FPC CONNE	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0313-001X	DETECT SWITCH		1	

CD MECHA PWB ASSY (X32-6680-00) <06>

	IC1	BD8266EFV-M-X	IC		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C54	CK73GB1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN2	E41-3488-05	F.C.CONNECTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S1	S6J-0001-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S2	S6J-0001-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S3	S6J-0002-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y