
052-7076-10 MBM29F016A-90PFTN 16M bit Memory


Terminal Description

pin 1: NU : - : Not in use.
pin 2: NU : - : Not in use.
pin 3: A 19 : IN : Address input.
pin 4: A 18 : IN : Address input.
pin 5: A 17 : IN : Address input.
pin 6: A 16 : IN : Address input.
pin 7: A 15 : IN : Address input.
pin 8: A 14 : IN : Address input.
pin 9: A 13 : IN : Address input.
pin 10: A 12 : IN : Address input.
pin 11: CE_ : IN : Chip enable signal input. Negative logic.
pin 12: VCC : - : Positive supply voltage.
pin 13: NU : - : Not in use.
pin 14: RESET_ : IN : Reset signal input. Negative logic.
pin 15: A 11 : IN : Address input.
pin 16: A 10 : IN : Address input.
pin 17: A 9 : IN : Address input.
pin 18: A 8 : IN : Address input.
pin 19: A 7 : IN : Address input.
pin 20: A 6 : IN : Address input.
pin 21: A 5 : IN : Address input.
pin 22: A 4 : IN : Address input.
pin 23: NU : - : Not in use.
pin 24: NU : - : Not in use.
pin 25: NU : - : Not in use.
pin 26: NU : - : Not in use.
pin 27: A 3 : IN : Address input.
pin 28: A 2 : IN : Address input.
pin 29: A 1 : IN : Address input.
pin 30: A 0 : IN : Address input.
pin 31: DQ 0 : I/O : Data input / output.
pin 32: DQ 1 : I/O : Data input / output.
pin 33: DQ 2 : I/O : Data input / output.
pin 34: DQ 3 : I/O : Data input / output.
pin 35: VSS : - : Negative supply voltage.
pin 36: VSS : - : Negative supply voltage.
pin 37: VCC : - : Positive supply voltage.
pin 38: DQ 4 : I/O : Data input / output.
pin 39: DQ 5 : I/O : Data input / output.
pin 40: DQ 6 : I/O : Data input / output.
pin 41: DQ 7 : I/O : Data input / output.
pin 42: RY/BY_ : O : Ready / Busy_
pin 43: OE_ : IN : Output enable signal input. Negative logic.
pin 44: WE_ : IN : Wright enable signal input terminal. Negative logic.
pin 45: NU : - : Not in use.
pin 46: A 20 : IN : Address input.
pin 47: NU : - : Not in use.
pin 48: NU : - : Not in use.

051-3056-90 BA2904FV Dual Operational Amplifier



051-5410-38 BU4820G-TR
Precision Voltage Down Detector 2.0V



Terminal description

pin 1: OUTPUT : N channel open drain output.
This terminal will output L, if the voltage of VDD becomes lower than the setting voltage.
pin 2: VDD : Positive supply voltage.
pin 3: GND : Ground.
pin 4: NC : Not in use.
pin 5: NC : Not in use.

EXPLODED VIEW / PARTS LIST

Main section

* Exploded view : Page 12 and 13


NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-555-600 DCP-556-800	DCP ASSY(for PE2697BA) DCP ASSY(for PE2697KA/B)	1
1-1	370-6195-00	ESCUTCHEON(F)	1
1-2	373-1086-00	DIAL-CVR(R)	1
1-3	373-1087-00	DIAL-CVR(L)	1
1-4	371-5838-00	FACE PLATE(R)	1
1-5	371-5837-00	FACE PANEL(L)	1
1-6	335-7405-00	REAR-CVR	1
1-7	380-5651-00	KNOB	1
1-8	345-5858-00	RUBBER RING	1
1-9	335-7674-00	ILLUMI PLATE(R)	1
1-10	335-7675-00	ILLUMI PLATE(L)	1
1-11	382-7587-00	BUTTON(M)	1
1-12	382-7583-00	BUTTON(ADJ)	1
1-13	382-7584-00	BUTTON(S)	1
1-14	382-7585-00	BUTTON(EJ)	1
1-15	382-7586-00	BUTTON(ISR)	1
1-16	335-7678-00	IR FILTER	1
1-17	335-7679-00	LENS	1
1-18	335-7676-00	ILLUMI PART(S)	1
1-19	335-7677-00	ILLUMI PART(MS)	1
1-20	373-1084-00 373-1084-02	DIAL-CVR(LO)(for PE2697BA) DIAL-CVR(LO)(for PE2697KA/B)	1
1-21	373-1085-00 373-1085-02	DIAL-CVR(UP)(for PE2697BA) DIAL-CVR(UP)(for PE2697KA/B)	1
1-22	347-7553-10	DOUBLE FACE	2
1-23	347-7554-10	CUSHION	1
1-24	816-3005-50	FLAT WIRE	1
1-25	382-7588-00	BUTTON(SND)	1
1-26	371-5839-00	ALUMI RING	1
1-27	716-0872-62	SCREW(M1.7x8)	4
1-28	380-5652-00	INNER KNOB	1
1-29	347-7572-10	COVER FILM	2
1-30	378-0553-00	BADGE	1


NO.	PART NO.	DESCRIPTION	Q'TY
1-31	382-7384-00	RELEASE BUTTON	1
1-32	347-7200-00	DOUBLE FACE	1
1-33	716-0872-51	SCREW(M1.7x6)	2
1-34	347-7570-10	BLACK FILM	2
1-35	013-9713-00	TOUCH PANEL	1
1-36	347-7561-10	BLACK FILM	1
1-37	331-3947-00	LCD-CVR	1
1-38	379-0466-00	LCD(INDICATOR)	1
1-39	347-7559-10	LCD-FILM	1
1-40	335-7412-00	LCD ILLUMI	1
1-41	347-7560-10	REFLECTOR	1
1-42	335-7411-00	LCD HOLDER	1
1-43	347-7563-10	PROTECT SHEET	1
1-44	347-7564-00	LCD FILM	1
1-45	347-7562-10	PROTECT SHEET	1
1-46	----------	LCD PWB	1
1-47	074-1239-80	OUTLET SOCKET	2
1-48	074-1189-00	OUTLET SOCKET	1
1-49	331-3948-00	VOL-HOLDER	1
1-50	016-9900-96	VR W/SHAFT	1
1-51	076-0647-00	PLUG	2
1-52	----------	SW PWB	1
1-53	074-1158-54	OUTLET SOCKET	1
1-54	347-7939-00	DOUBLE FACE	2
1-55	347-7940-00	DOUBLE FACE	2
1-56	347-7941-00	DOUBLE FACE	3
1-57	347-7942-00	DOUBLE FACE	1
1-58	347-7943-00	DOUBLE FACE	4
1-59	347-7944-00	DOUBLE FACE	1
1-60	347-7945-00	DOUBLE FACE	1
1-61	347-7946-00	DOUBLE FACE	1
1-62	347-7960-00	DOUBLE FACE	1
1-63	347-7948-00	SHADE	1
1-64	347-7949-00	SHADE	1
1-65	347-7961-00	REFLECTOR	1
1-66	347-7951-00	CUSHION	2
1-67	347-8013-00	SHADE	2
1-68	347-8012-00	SHADE	2
2	347-7584-10	INSULATOR	2
3	347-7571-10	COVER FILM	1
4	013-7206-50	DETECTOR SWITCH	1
5	880-2091C	TUNER PACK	1
6	347-7587-10	PROTECT SHEET	1
7	013-7106-00	DETECTOR SWITCH	1
8	013-6103-00	TACT SWITCH	1
9	074-1194-00	OUTLET SOCKET	1
10	074-1214-00	OUTLET SOCKET	1
11	076-0312-02	PLUG	1
12	076-0368-16	PLUG	1
13	076-0438-02	PLUG	1
14	347-7586-10	INSULATOR	1

NO.	PART NO.	DESCRIPTION	Q'TY
15	----------	MAIN PWB	1
16	331-3378-00	SW-HOLDER	1
17	305-0336-00	SIDE-CVR(L)	1
18	305-0337-00	SIDE-CVR(R)	1
19	307-0708-00	REAR-CVR	1
20	331-3954-00	IC-HOLDER	1
21	313-1924-00	HEAT SINK	1
22	076-6003-18	PLUG	1
23	092-2215-50	ANT-RECEPT	1
24	714-3005-8B	MACHINE SCREW(M3x5)	4
25	714-3006-8B	MACHINE SCREW(M3x6)	7
26	731-3006-8A	TAPTIGHT(M3x6)	8
27	076-3008-90	PLUG	1
28	304-0483-00	LOWER-CVR	1
29	303-0490-00	UPPER-CVR	1
30	331-3949-00	MECH-BRKT(F)	1
31	331-3950-00	MECH-BRKT(R)	1
32	313-1923-00	HEAT SINK	1
33	331-3953-00	FAN HOLDER	1
34	331-3955-00	SHIELD CASE(F)	1
35	286-6800-00 286-6810-00 286-6811-00	SETPLATE(for PE2697BA) SETPLATE(for PE2697KA) SETPLATE(for PE2697KB)	1
36	347-7578-10	INSULATOR	1
37	347-7579-10	INSULATOR	1
38	020-3051-00	DC-MOTOR	1
39	331-4073-00	STOPPER	1
40	347-7582-10	CUSHION	1
41	347-6215-00	SPACER-FILM	2
42	347-6536-00	PROTECT SHEET	1
43	780-2612-50	SCREW(M2.6x12)	2
44	347-7017-00	DOUBLE FACE	1
45	714-2603-8A	MACHINE SCREW(M2.6x3)	7
46	074-0898-16	OUTLET SOCKET	1
47	716-0717-60	STEEL SCREW(M2.3x3)	2
48	780-2005-50	SCREW(M2x5)	2
49	816-2626-50	FLAT WIRE	1
50	929-5005-80	CD-CHANG-MODULE	1
51	345-5582-00	GASKET(for PE2697BA)	1
52	347-7580-10	SHADE	1
53	347-7581-10	CUSHION	2
54	074-3008-90	OUTLET SOCKET	1
55	----------	DC-DC PWB	1
56	347-7590-10	DOUBLE FACE	2
57	----------	VIDEO PWB	1
58	331-3951-00	SHIELD CASE(LO)	1
59	331-3952-00	SHIELD CASE(UP)	1
60	347-7588-10	SPACER	1
61	347-7589-10	SPACER	1
62	345-8701-00	CUSHION	1
63	347-7583-10	INSULATOR	1

Main section


* Parts list : Page 10 and 11

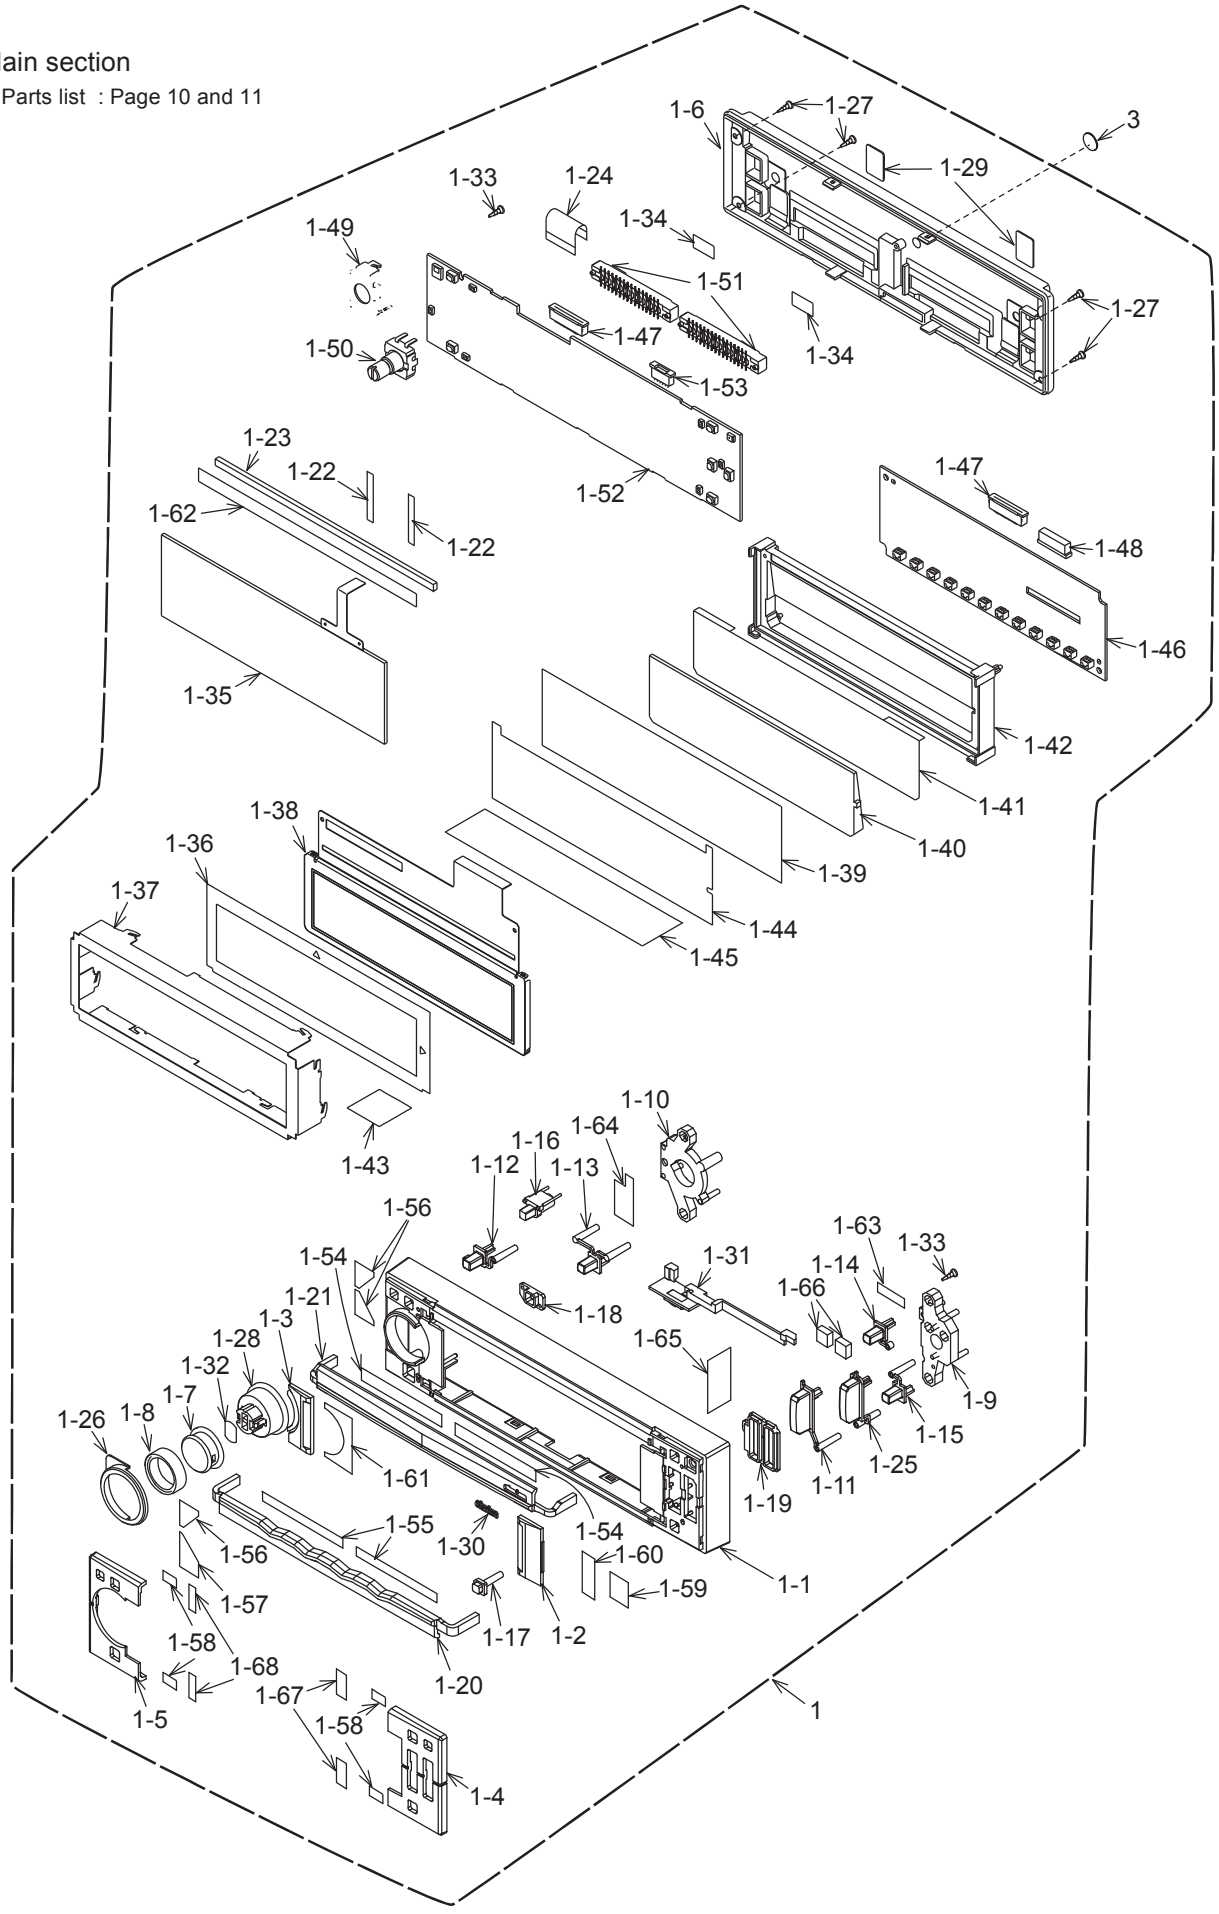

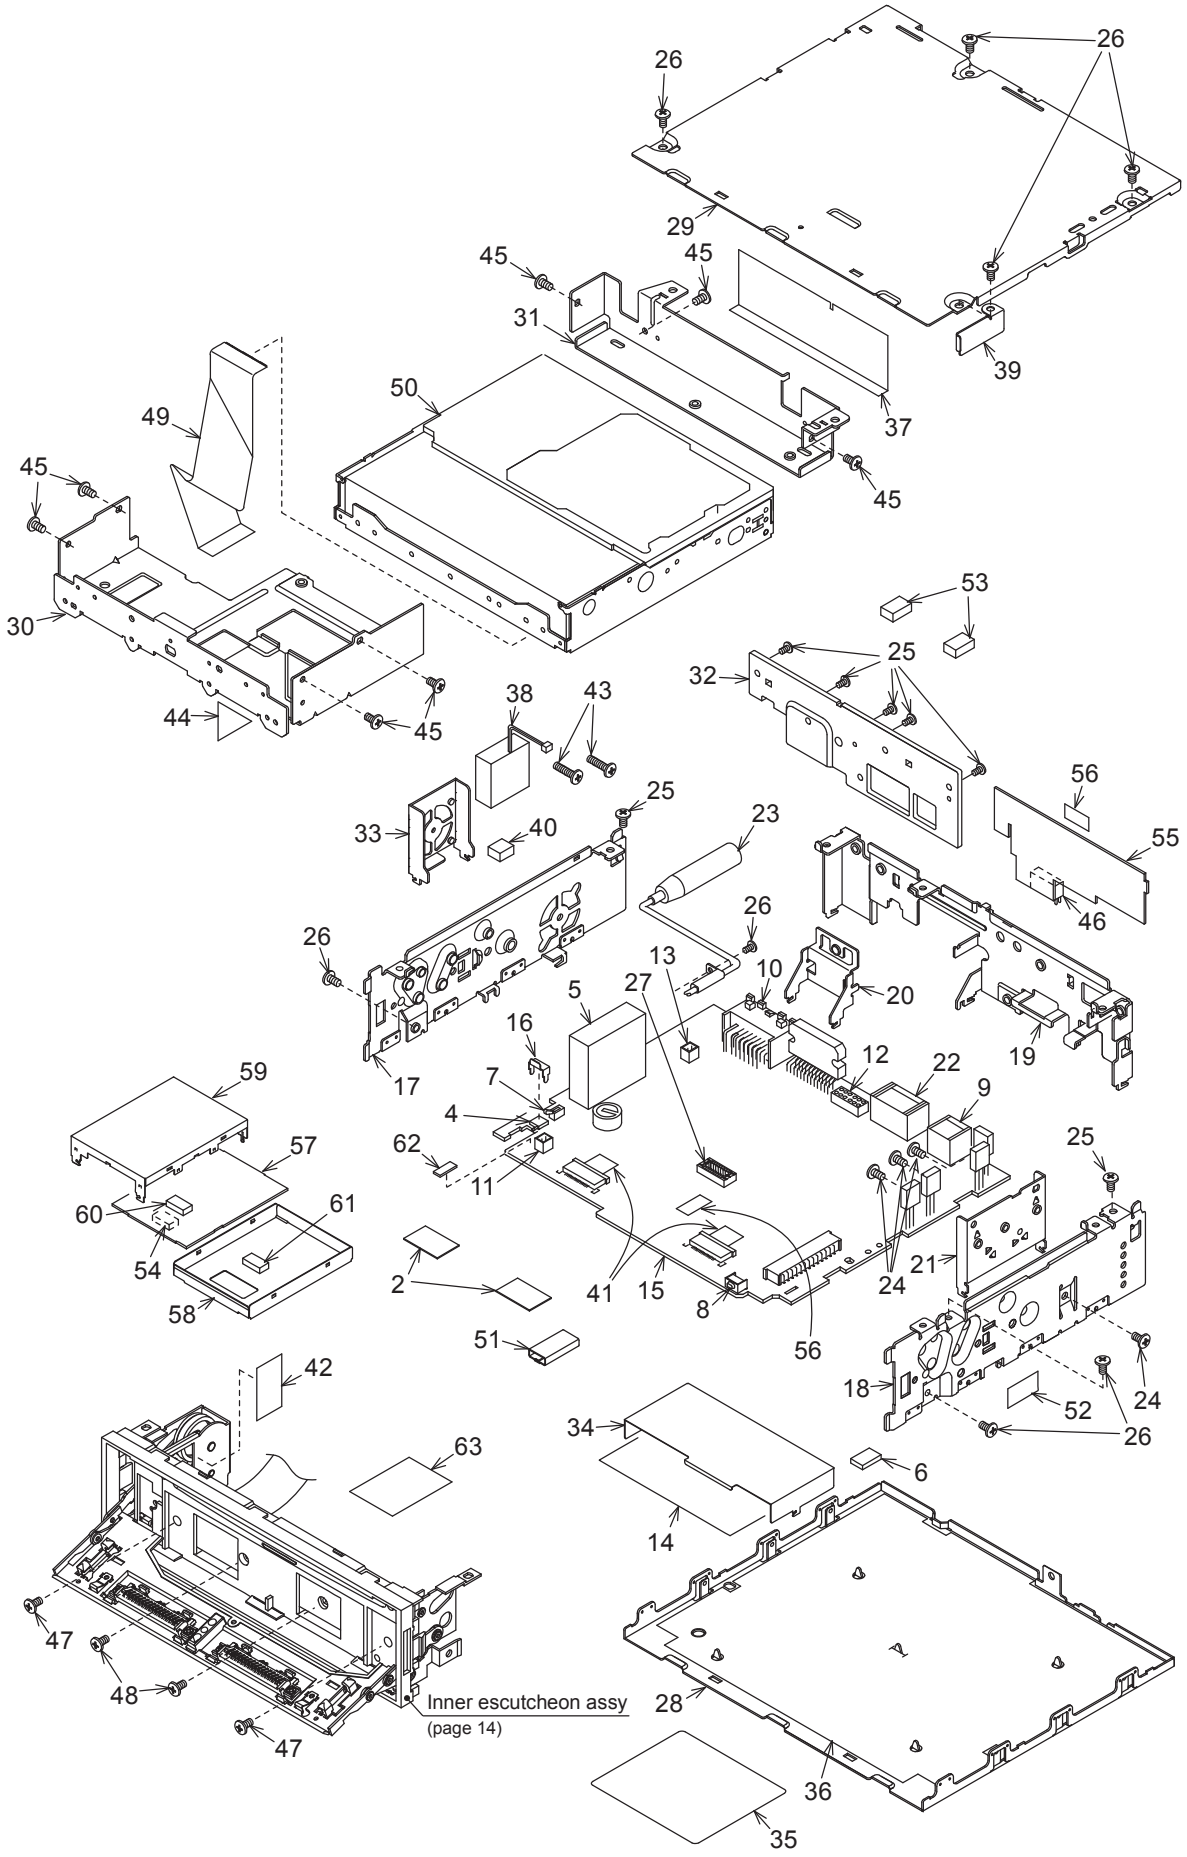

DXZ865MP
DXZ866MP

Inner escutcheon ass'y section

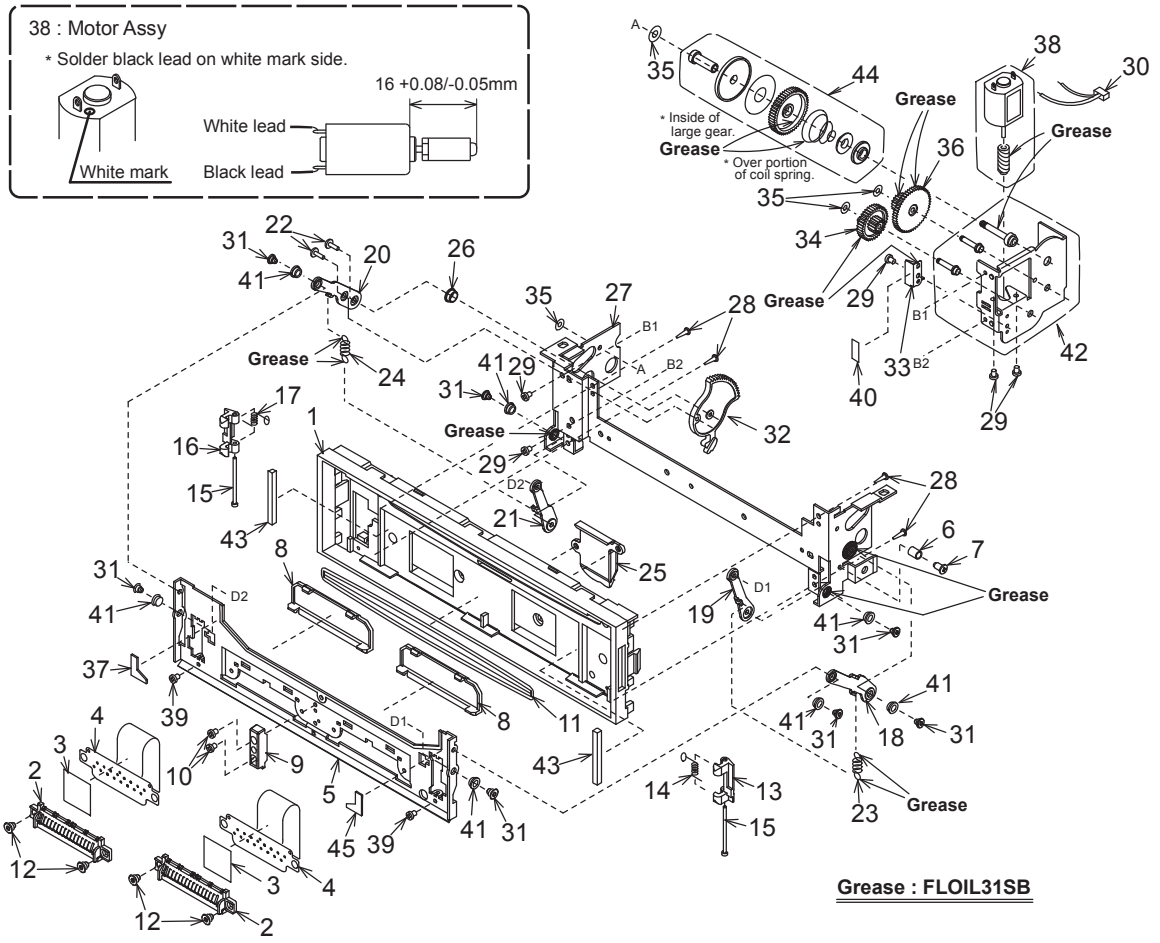

NO.	PART NO.	DESCRIPTION	Q'TY
1	370-6146-00	ESCUTCHEON(I)	1
2	074-1278-01	OUTLET SOKET	2
3	347-7598-00	INSULATER	2
4	039-2683-00	FPC	2
5	331-3941-00	DCP HOLDER	1
6	341-1818-00	ROLLER(STOPPER)	1
7	716-1872-50	SCREW	1
8	335-6499-00	CN-CVR	2
9	335-7397-00	STOPER	1
10	716-1694-50	SCREW(M1.7x3)	2
11	346-0114-01	LEATHER SHEET	1
12	716-3444-50	SCREW	4
13	335-7398-00	HOOK(R)	1
14	750-6786-00	SPRING(R)	1
15	341-1814-00	SHAFT	2
16	335-7399-00	HOOK(L)	1
17	750-6787-00	SPRING(L)	1
18	331-3942-00	LEVER-UP(R)	1
19	331-3938-00	LEVER-LO(R)	1
20	331-3939-00	LEVER-UP(L)	1
21	331-3940-00	LEVER-LO(L)	1
22	716-1758-50	PAD SCREW(M2x5)	2
23	750-3304-20	SPRING(GEAR)	1

NO.	PART NO.	DESCRIPTION	Q'TY
24	750-3303-20	SPRING(ARM)	1
25	335-7400-00	ILLUMI PLATE	1
26	341-1740-00	ROLLER(ARM)	1
27	309-0808-00	FRONT PLATE	1
28	716-0872-50	PAD SCREW(M1.7x5)	4
29	716-1468-70	SPECIAL SCREW(M2x2.5)	5
30	854-4380-01	EXTENSION LEAD	1
31	716-3555-00	SCREW	7
32	613-0719-00	ARM GEAR	1
33	750-3432-00	SPRING(MOTO)	1
34	613-0733-00	HUS-GEAR	1
35	746-0768-20	WASHER	4
36	613-0717-00	INPUT GEAR	1
37	345-5559-10	CUSHION	1
38	634-0024-00	MOTOR ASSY	1
39	738-1722-1H	PRECISION SCREW	2
40	347-6275-00	FILM	1
41	341-1817-00	ROLLER	7
42	946-0079-01	GEAR-BOX ASSY	1
43	345-5560-10	CUSHION	2
44	947-0513-02	T-LIM-GEAR-ASSY	1
45	345-5558-10	CUSHION	1

CD mechanism section


* Exploded view : Page 16

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1
2	SMA-183-100	POW-MOTOR-ASSY	1
3	620-1596-23	CLAMPER LINK	1
4	966-1743-21	DRIVE-PLT-ASSY	1
5	966-1722-20	SH-RACK-ASSY	1
6	969-0071-30	PICKUP-ASSY	1
7	345-5476-20	CUSHION RUBBER	1
8	620-1753-20	ID-LOCK PLATE	1
9	620-1026-21	SPRING PLATE	1
10	620-1598-22	UPPER CHASSIS	1
11	620-1766-20	LOWER CHASSIS-W	1
12	621-1742-20	UPPER GUIDE	1
13	621-1743-20	SHIFT LEVER	1
14	621-1744-20	RACK	1
15	621-1745-20	LOCK ARM L	1
16	621-1746-20	LOCK ARM R	1
17	621-1747-20	GEAR COVER	1
18	621-0608-21	SECOND GEAR	1
19	621-0609-20	BASE GEAR	1
20	621-0610-20	IDLE GEAR A	1
21	621-0611-20	IDLE GEAR B	1
22	621-0612-21	ROLLER GEAR A	1
23	621-1748-20	POWER GEAR A	1
24	621-1749-20	POWER GEAR B	1
25	621-1750-20	POWER GEAR C	1
26	621-1751-20	POWER GEAR D	1
27	621-0620-20	THREAD GEAR A	1
28	621-0621-20	THREAD GEAR B	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-0623-23	LS-HOLDER	1
31	621-0624-22	GUIDE RAIL	1
32	621-0711-20	LOADING ROLLER	2
33	621-1729-20	SH-BASE	1
34	621-0718-21	ROLLER GUIDE	1
35	621-0719-20	ROLLER GEAR	1
36	621-0720-20	ROLLER GEAR C	1
37	621-0721-20	ROLLER GEAR D	1
38	621-1719-20	IDLE CASE	1
39	621-1754-20	GEAR BASE	1
40	622-1571-21	ROLLER SHAFT	1
41	624-0020-00	LEAD SCREW	1
42	629-0086-20	DAMPER F	2
43	629-0087-20	DAMPER R	1
44	714-2003-8B	MACHIN SCREW(M2x3)	2
45	716-1507-01	SCREW(M2x3)	1
46	716-1670-01	SCREW(M2x4)	6
47	716-1733-01	SCREW(M1.7x2.3)	2
48	716-3551-00	SCREW(M1.4x2.5)	2

NO.	PART NO.	DESCRIPTION	Q'TY
49	716-3469-01	SCREW(phi1.7x4)	2
50	716-3473-01	SCREW(M2x3)	1
51	750-6797-20	ROLLER SPRING L	1
52	750-6798-20	ROLLER SPRING R	1
53	750-3467-21	SHIFT SPRING	1
54	750-3468-20	RACK SPRING	1
55	750-3469-20	CLAMPER SPRING	1
56	750-3470-20	ID-LOCK SPRING	1
57	750-3472-21	DR-SPRING F	2
58	750-3473-20	DR-SPRING RA	1
59	750-3474-20	DR-SPRING RB	1
60	750-3475-21	DR-SPRING C	1
61	803-4906-60	VINYL-COAT-WIRE(ORG)	1
62	816-2590-00	LEAD(GRN)	1
63	816-2591-00	LEAD(YEL)	1
64	816-2592-00	LEAD(BLU)	1
65	816-2593-00	LEAD(PUR)	1
66	816-2624-50	FLAT WIRE	1
67	----------	SENSOR PWB	1
68	----------	CD PWB	1
69	780-2025-00	SCREW(M2.0x2.5)	3
70	781-1730-00	SCREW(M1.7x3.0)	1
71	620-1023-23	CLAMPER PLATE	1
72	620-1752-20	SENSOR ARM	1
73	621-0728-20	STOPPER LINK	1
74	621-1752-20	DISC STOPPER	1
75	621-1753-20	CLAMPER RING	1
76	750-3471-20	SENSOR SPRING	1

CD mechanism section

* Parts list : Page 15

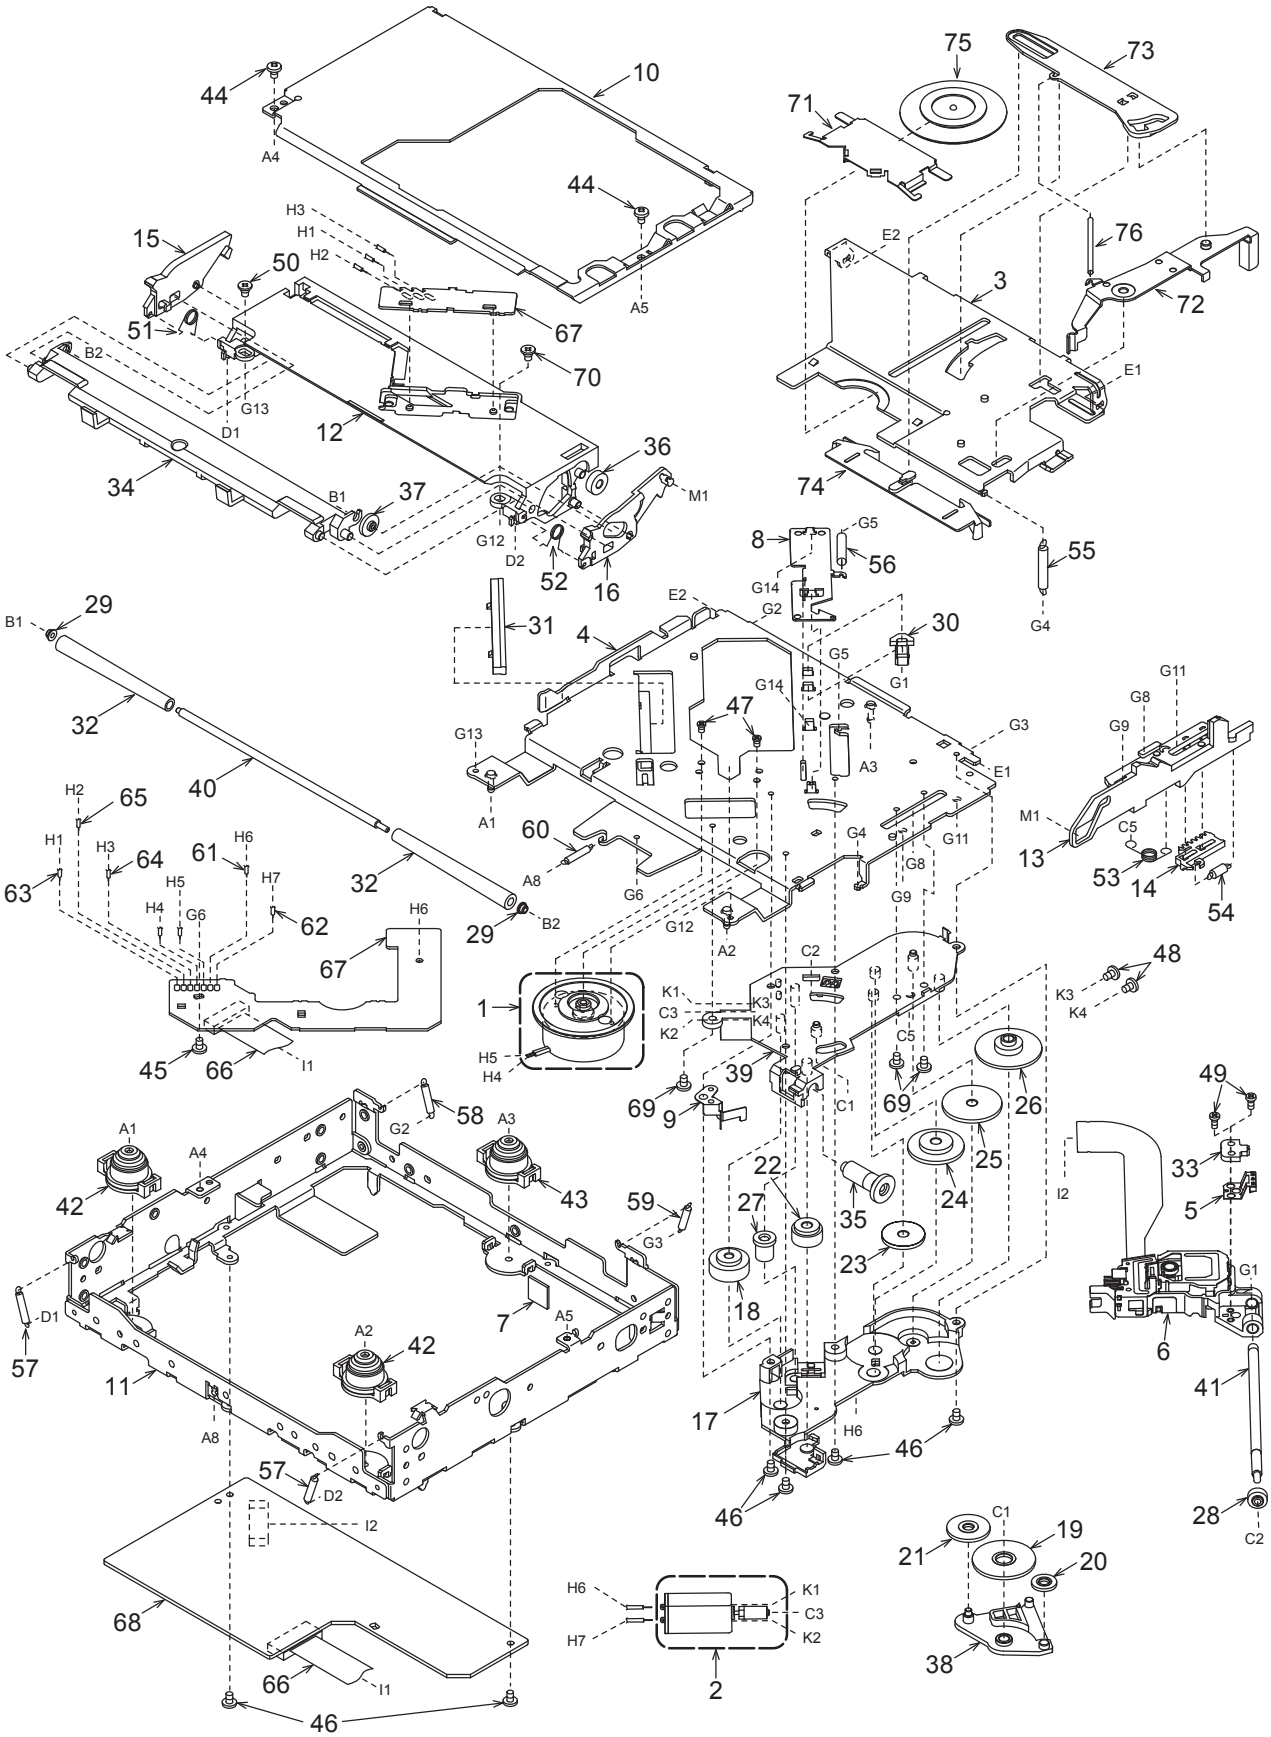

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT1	092-2215-50	ANT-RECEPT
BL1	880-2091C	TUNER PACK
C2	166-2201-50	22pF CH
C3	042-1631-50	10V 100uF
C4	168-1032-55	0.01uF K
C5	168-2232-55	0.022uF K
C6	166-1011-50	100pF CH
C7	168-1022-55	1000pF K
C8	187-4763-15	6.3V 47uF
C9	168-1042-78	16V 0.1uF
C10	168-1042-78	16V 0.1uF
C11	166-1511-50	150pF CH
C12	166-1011-50	100pF CH
C13	166-1011-50	100pF CH
C14	168-1022-55	1000pF K
C15	043-0552-90	6.3V 47uF M
C101	042-1545-00	16V 2200uF
C102	172-1041-15	0.1uF
C103	042-0654-50	6.3V 22uF
C104	178-4742-78	0.47uF
C105	042-0654-50	6.3V 22uF
C106	042-0654-50	6.3V 22uF
C107	042-0654-50	6.3V 22uF
C108	042-0654-50	6.3V 22uF
C109	042-0654-50	6.3V 22uF
C110	163-2253-65	50V 2.2uF
C112	168-1032-55	0.01uF K
C113	168-1032-55	0.01uF K
C115	178-4742-78	0.47uF
C116	178-4742-78	0.47uF
C119	163-1053-65	50V 1uF
C120	163-1063-35	16V 10uF
C121	166-4711-50	470pF CH
C122	166-4711-50	470pF CH
C123	166-4711-50	470pF CH
C124	166-4711-50	470pF CH
C125	168-1042-78	16V 0.1uF
C126	166-4711-50	470pF CH
C127	166-4711-50	470pF CH
C128	166-4711-50	470pF CH
C129	166-4711-50	470pF CH
C130	168-1032-55	0.01uF K
C133	168-1032-55	0.01uF K
C134	178-4742-78	0.47uF
C201	043-0542-00	25V 4.7uF
C202	043-0542-00	25V 4.7uF
C203	042-1563-71	16V 100uF
C204	042-0560-63	16V 22uF
C205	168-4732-78	0.047uF K
C206	168-1042-78	16V 0.1uF
C207	043-0542-00	25V 4.7uF
C208	043-0542-00	25V 4.7uF
C209	043-0542-00	25V 4.7uF
C211	168-1042-78	16V 0.1uF
C212	042-0643-51	16V 100uF
C213	042-0643-55	35V 4.7uF
C214	042-0643-50	35V 22uF
C215	042-0560-58	16V 10uF
C216	163-1073-35	16V 100uF
C217	166-3311-50	330pF CH
C218	168-2222-55	2200pF K
C219	163-1073-35	16V 100uF
C220	163-2263-55	35V 22uF
C221	163-2263-55	35V 22uF
C222	042-0560-84	16V 470uF
C223	168-2232-55	0.022uF K
C224	172-4731-15	0.047uF
C225	042-0560-84	16V 470uF
C226	168-2232-55	0.022uF K
C227	172-4731-15	0.047uF
C228	163-2263-55	35V 22uF
C229	166-1011-50	100pF CH
C230	042-1631-50	10V 100uF
C231	168-1822-55	1800pF K
C232	166-1011-50	100pF CH
C241	163-1063-35	16V 10uF
C242	163-1063-35	16V 10uF
C244	042-1334-82	16V 100uF
C245	168-1042-78	16V 0.1uF
C247	042-1563-71	16V 100uF
C301	168-1032-55	0.01uF K
C302	043-0540-00	6.3V 10uF
C303	168-1032-55	0.01uF K
C304	166-1011-50	100pF CH
C305	166-1011-50	100pF CH
C306	163-1063-35	16V 10uF
C307	163-1063-35	16V 10uF
C308	163-1063-35	16V 10uF
C309	163-1063-35	16V 10uF
C310	178-1052-78	1uF
C311	168-1022-55	1000pF K
C312	168-1022-55	1000pF K
C313	168-1022-55	1000pF K
C314	043-0540-01	10V 2.2uF
C315	166-1011-50	100pF CH
C316	166-1011-50	100pF CH
C317	166-1011-50	100pF CH
C320	168-1042-78	16V 0.1uF
C321	166-1011-50	100pF CH
C322	042-0654-52	16V 10uF
C323	168-1042-78	16V 0.1uF
C324	168-1042-78	16V 0.1uF
C325	043-0552-90	6.3V 47uF M
C326	042-1505-80	25V 1uF
C327	168-4732-78	0.047uF K
C329	043-0540-00	6.3V 10uF
C330	168-4732-78	0.047uF K
C331	043-0552-90	6.3V 47uF M
C332	163-2273-25	10V 220uF
C333	168-1042-78	16V 0.1uF
C334	166-1007-50	10pF CH
C335	168-4732-78	0.047uF K
C336	168-2232-55	0.022uF K
C340	166-4711-50	470pF CH
C341	168-2232-55	0.022uF K
C342	168-2232-55	0.022uF K
C343	166-1007-50	10pF CH
C344	043-0540-02	16V 1uF
C345	166-4701-50	47pF CH
C346	168-2232-55	0.022uF K
C347	166-4711-50	470pF CH
C350	043-0540-00	6.3V 10uF
C351	166-4711-50	470pF CH
C355	168-1042-78	16V 0.1uF
C356	168-1022-55	1000pF K
C357	166-1811-50	180pF CH
C358	043-0551-90	6.3V 4.7uF M
C359	043-0551-90	6.3V 4.7uF M
C360	166-2201-50	22pF CH
C361	042-0654-52	16V 10uF
C362	043-0551-90	6.3V 4.7uF M
C363	168-1032-55	0.01uF K
C364	168-3332-78	0.033uF K
C365	168-1042-78	16V 0.1uF
C366	166-1011-50	100pF CH
C367	168-1032-55	0.01uF K
C368	168-1042-78	16V 0.1uF
C369	043-0551-90	6.3V 4.7uF M
C370	042-0654-52	16V 10uF
C372	042-0654-52	16V 10uF
C373	168-1042-78	16V 0.1uF
C374	043-0552-90	6.3V 47uF M
C375	166-1011-50	100pF CH
C376	168-1042-78	16V 0.1uF
C382	168-3322-55	3300pF K
C383	168-3322-55	3300pF K
C384	168-3322-55	3300pF K
C385	168-3322-55	3300pF K
C386	168-3322-55	3300pF K
C387	168-3322-55	3300pF K
C401	166-5611-50	560pF CH
C402	166-5611-50	560pF CH
C406	168-1042-78	16V 0.1uF
C410	163-2273-25	10V 220uF
C412	168-1042-78	16V 0.1uF
C414	168-1042-78	16V 0.1uF
C415	168-1042-78	16V 0.1uF
C416	168-1032-55	0.01uF K
C501	042-0654-52	16V 10uF
C502	042-0654-52	16V 10uF
C503	042-0654-52	16V 10uF
C504	042-0654-52	16V 10uF
C505	042-0654-52	16V 10uF
C506	042-0654-52	16V 10uF
C507	042-0654-52	16V 10uF
C509	166-2711-50	270pF
C510	166-2711-50	270pF
C511	043-0264-51	2200pF
C512	043-0264-52	1000pF
C513	166-5601-50	56pF CH
C514	166-5601-50	56pF CH
C515	043-0264-51	2200pF
C516	042-0654-52	16V 10uF
C517	042-0654-52	16V 10uF
C518	166-2711-50	270pF
C519	166-5601-50	56pF CH
C520	166-2711-50	270pF
C521	166-5601-50	56pF CH
C522	043-0264-51	2200pF
C523	043-0264-51	2200pF
C524	043-0264-51	2200pF
C525	043-0264-51	2200pF
C530	042-0654-52	16V 10uF
C531	042-0654-52	16V 10uF
C532	043-0264-51	2200pF
C533	043-0264-51	2200pF
C534	166-2711-50	270pF
C535	166-2711-50	270pF
C536	043-0264-52	1000pF
C537	166-2711-50	270pF
C538	166-2711-50	270pF
C539	043-0264-52	1000pF
C540	043-0264-52	1000pF
C543	042-0654-52	16V 10uF
C544	168-1042-78	16V 0.1uF
C545	168-1042-78	16V 0.1uF
C600	043-0552-90	6.3V 47uF M
C601	168-1042-78	16V 0.1uF
C602	168-1042-78	16V 0.1uF
C603	042-0654-52	16V 10uF
C604	168-1032-55	0.01uF K
C605	166-2201-50	22pF CH
C606	168-1042-78	16V 0.1uF
C607	043-0551-90	6.3V 4.7uF M
C608	163-3363-45	25V 33uF
C609	042-0654-52	16V 10uF
C610	178-1052-78	1uF
C611	168-2232-55	0.022uF K
C612	168-1032-55	0.01uF K
C613	168-1032-55	0.01uF K
C614	168-1022-55	1000pF K
C615	178-1052-78	1uF
C616	163-4763-15	6.3V 47uF

REF No.	PART No.	DESCRIPTION
C617	168-1032-55	0.01uF K
C618	168-1042-78	16V 0.1uF
C620	178-1052-78	1uF
C621	166-2701-50	27pF CH
C622	168-1042-78	16V 0.1uF
C623	168-1042-78	16V 0.1uF
C624	043-0540-00	6.3V 10uF
C625	168-1032-55	0.01uF K
C628	043-0540-00	6.3V 10uF
C629	042-1596-00	5.5V 0.33F
C630	168-1042-78	16V 0.1uF
C631	168-1042-78	16V 0.1uF
C632	168-1042-78	16V 0.1uF
C633	166-2201-50	22pF CH
C634	166-2201-50	22pF CH
C635	166-2201-50	22pF CH
C636	166-2201-50	22pF CH
C637	166-2201-50	22pF CH
C638	166-2201-50	22pF CH
C639	166-2201-50	22pF CH
C640	166-2201-50	22pF CH
C641	166-2201-50	22pF CH
C642	166-2201-50	22pF CH
C643	166-2201-50	22pF CH
C644	166-2201-50	22pF CH
C645	166-2201-50	22pF CH
C646	166-2201-50	22pF CH
C647	168-1032-55	0.01uF K
C648	043-0551-90	6.3V 4.7uF M
C649	168-1022-55	1000pF K
C650	168-1032-55	0.01uF K
C651	168-1042-78	16V 0.1uF
C652	043-0552-90	6.3V 47uF M
C802	187-2273-15	6.3V 220uF
C803	042-1631-50	10V 100uF
CCT101	050-0140-52	1/32W 100 ohm x4J
CCT102	050-0140-52	1/32W 100 ohm x4J
CCT103	050-0140-52	1/32W 100 ohm x4J
CCT104	050-0140-52	1/32W 100 ohm x4J
D1	001-1310-00	KDS160-RTK
D101	001-0592-61	1N5404
D102	001-0466-91	S5688G
D103	001-1310-00	KDS160-RTK
D104	001-1310-00	KDS160-RTK
D130	001-1310-00	KDS160-RTK
D201	001-1310-00	KDS160-RTK
D202	001-0504-45	HZS9B1L
D203	001-0504-47	HZS9B3L
D204	001-0422-39	MTZJ39
D205	001-0608-90	D1FS4
D206	001-1310-00	KDS160-RTK
D209	001-0504-45	HZS9B1L
D210	001-1310-00	KDS160-RTK
D211	001-1310-00	KDS160-RTK
D212	001-1310-00	KDS160-RTK
D213	001-1310-00	KDS160-RTK
D214	001-1310-00	KDS160-RTK
D215	001-0504-39	HZS7 B2L
D218	001-0466-91	S5688G
D219	001-1310-00	KDS160-RTK
D220	001-1310-00	KDS160-RTK
D221	001-1310-00	KDS160-RTK
D222	001-1310-00	KDS160-RTK
D401	001-0584-16	MA8039
D601	001-7048-91	RFR1112H-22 RED
D602	001-1310-00	KDS160-RTK
D603	001-2601-90	MA728-TX
D604	001-0529-26	MA8047-M
D607	001-1310-00	KDS160-RTK
D608	001-0529-29	MA8051-M
IC1	051-1905-91	AN77L05M
IC101	051-2056-00	TB2913HQ
IC202	051-3335-90	AN77L04M

REF No.	PART No.	DESCRIPTION
IC203	051-1905-93	AN77L06M
IC204	051-1014-08	TA7291F
IC205	051-3913-90	NJM2368E
IC301	051-6706-10	SAF7730H/N116F
IC401	051-6707-90	AK4355VF
IC503	051-3026-90	NJM4580V
IC504	051-3026-90	NJM4580V
IC505	051-3026-90	NJM4580V
IC601	052-3401-10	uPD703274YGJ-501UENA
IC602	051-9402-68	BR93L56F-W
IC603	051-5410-38	BU4820G-TR
IC604	051-3406-90	NJM2078M
IC605	051-5440-08	S-80931CNMC-G81
IC606	051-6600-58	HA12187FP
J101	074-1214-00	16P
J102	076-6003-18	18P
J201	076-0312-02	2P
J202	076-0368-16	16P
J602	074-1198-68	18P
J603	074-1198-68	18P
J604	076-3008-90	40P
J606	074-1194-00	13P CeNET
J802	074-1138-70	20P
L1	010-2003-04	30uH
L2	010-2279-50	4.7uH
L3	010-2279-50	4.7uH
L101	010-8038-00	Choke coil 130uH
L102	010-3103-64	1.5k ohm/100MHz
L103	010-3103-64	1.5k ohm/100MHz
L104	010-3103-64	1.5k ohm/100MHz
L105	010-3103-64	1.5k ohm/100MHz
L106	010-3103-64	1.5k ohm/100MHz
L107	010-3103-64	1.5k ohm/100MHz
L206	010-3406-74	NLV25 100uH J
L207	010-3406-74	NLV25 100uH J
L208	010-3406-74	NLV25 100uH J
L209	010-3057-90	100uH
L210	010-3057-90	100uH
L211	010-3057-90	100uH
L303	010-3105-62	1k ohm/100MHz
L305	010-3105-62	1k ohm/100MHz
L306	010-3105-62	1k ohm/100MHz
L308	010-3103-64	1.5k ohm/100MHz
L310	010-3103-64	1.5k ohm/100MHz
L312	010-3103-64	1.5k ohm/100MHz
L313	010-3103-64	1.5k ohm/100MHz
L332	010-3103-64	1.5k ohm/100MHz
L373	010-3103-64	1.5k ohm/100MHz
L377	010-3103-64	1.5k ohm/100MHz
L381	010-3103-64	1.5k ohm/100MHz
L401	010-3103-64	1.5k ohm/100MHz
L402	010-3103-64	1.5k ohm/100MHz
L403	010-3103-64	1.5k ohm/100MHz
L404	010-3103-64	1.5k ohm/100MHz
L405	010-3103-64	1.5k ohm/100MHz
L406	010-3103-64	1.5k ohm/100MHz
L407	010-3103-64	1.5k ohm/100MHz
L408	010-3103-64	1.5k ohm/100MHz
L409	010-3103-64	1.5k ohm/100MHz
L410	010-3103-64	1.5k ohm/100MHz
L411	010-3103-64	1.5k ohm/100MHz
L415	010-3103-64	1.5k ohm/100MHz
L416	010-3103-64	1.5k ohm/100MHz
L417	010-3103-64	1.5k ohm/100MHz
L418	010-3103-64	1.5k ohm/100MHz
L422	010-3406-68	NLV25 33uH J
L425	010-3103-64	1.5k ohm/100MHz
L428	010-3103-64	1.5k ohm/100MHz
L429	010-3103-64	1.5k ohm/100MHz
L601	010-6009-80	47uH J
L603	010-2279-50	4.7uH
L802	010-6009-69	5.6uH J

REF No.	PART No.	DESCRIPTION
P602	076-0438-02	2P
Q2	125-3007-90	KTA1298
Q3	125-2199-96	KRC106S
Q4	125-2199-96	KRC106S
Q5	125-3004-90	KTA1504S
Q101	125-4012-90	KTD1304
Q102	125-4012-90	KTD1304
Q103	125-4012-90	KTD1304
Q104	125-4012-90	KTD1304
Q105	125-4012-90	KTD1304
Q106	125-4012-90	KTD1304
Q108	125-2199-93	KRC103S
Q109	125-0199-96	KRA106S
Q110	125-2199-96	KRC106S
Q201	125-4015-90	KTC2026
Q202	198-0302-50	2SK302 Y,GR
Q203	192-2873-00	2SC2873
Q204	125-2199-93	KRC103S
Q205	125-2199-93	KRC103S
Q206	193-1863-50	2CD1863 Q,R
Q208	125-4015-90	KTC2026
Q209	125-2199-93	KRC103S
Q210	125-3007-90	KTA1298
Q211	125-2199-96	KRC106S
Q212	125-2199-96	KRC106S
Q213	125-2199-96	KRC106S
Q214	125-3004-90	KTA1504S
Q215	125-2199-96	KRC106S
Q216	125-4014-90	KSD2020D
Q217	125-2199-93	KRC103S
Q218	125-0199-92	KRA102S
Q219	125-3007-90	KTA1298
Q220	131-1260-00	2SB1260
Q221	125-3007-90	KTA1298
Q222	125-3004-90	KTA1504S
Q223	125-2199-93	KRC103S
Q224	101-0941-00	2SB941
Q225	125-3004-90	KTA1504S
Q226	125-4010-90	KTC3875S
Q227	125-4015-90	KTC2026
Q228	125-2199-93	KRC103S
Q229	131-1260-00	2SB1260
Q230	125-3004-90	KTA1504S
Q231	125-3004-90	KTA1504S
Q232	125-3004-90	KTA1504S
Q233	125-3004-90	KTA1504S
Q234	125-4010-90	KTC3875S
Q235	125-0199-93	KRA103S
Q236	125-2199-93	KRC103S
Q237	125-2199-93	KRC103S
Q301	125-7005-90	PHK04P02T
Q601	125-4010-90	KTC3875S
Q602	125-3004-90	KTA1504S
Q603	125-2199-93	KRC103S
Q604	125-4010-90	KTC3875S
Q605	125-4010-90	KTC3875S
Q606	125-3004-90	KTA1504S
Q607	125-2199-93	KRC103S
Q608	125-4010-90	KTC3875S
Q609	125-3007-90	KTA1298
Q610	125-2199-93	KRC103S
Q612	125-3007-90	KTA1298
Q613	125-2199-93	KRC103S
Q690	125-2199-92	KRC102S
Q801	125-2199-96	KRC106S
R3	119-1041-15	1/10W 100k ohm
R4	119-0000-05	1/10W 0 ohm JW
R5	119-0000-05	1/10W 0 ohm JW
R6	119-1031-15	1/10W 10k ohm
R7	119-1031-15	1/10W 10k ohm
R8	119-1031-15	1/10W 10k ohm
R9	119-1021-15	1/10W 1k ohm
R10	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R11	119-1031-15	1/10W 10k ohm
R101	119-1031-15	1/10W 10k ohm
R102	119-4731-15	1/10W 47k ohm
R103	119-1021-15	1/10W 1k ohm
R106	119-0000-05	1/10W 0 ohm JW
R107	119-0000-05	1/10W 0 ohm JW
R108	119-4721-15	1/10W 4.7k ohm
R109	119-8221-15	1/10W 8.2k ohm
R110	119-1021-15	1/10W 1k ohm
R111	119-1021-15	1/10W 1k ohm
R112	119-1021-15	1/10W 1k ohm
R113	119-3311-15	1/10W 330 ohm
R114	119-3311-15	1/10W 330 ohm
R115	119-3311-15	1/10W 330 ohm
R116	119-3311-15	1/10W 330 ohm
R117	119-3311-15	1/10W 330 ohm
R118	119-3311-15	1/10W 330 ohm
R119	119-2231-15	1/10W 22k ohm
R120	119-2231-15	1/10W 22k ohm
R121	119-4711-15	1/10W 470 ohm
R122	119-4711-15	1/10W 470 ohm
R123	119-4711-15	1/10W 470 ohm
R124	119-4711-15	1/10W 470 ohm
R125	119-2231-15	1/10W 22k ohm
R126	119-2231-15	1/10W 22k ohm
R127	119-2231-15	1/10W 22k ohm
R128	119-2231-15	1/10W 22k ohm
R135	032-0140-50	1/10W 10k ohm F
R203	119-6841-15	1/10W 680k ohm
R204	119-3311-15	1/10W 330 ohm
R205	119-2731-15	1/10W 27k ohm
R206	119-6841-15	1/10W 680k ohm
R207	119-1841-15	1/10W 180k ohm
R208	119-1001-15	1/10W 10 ohm
R209	119-1021-15	1/10W 1k ohm
R210	119-3921-15	1/10W 3.9k ohm
R211	119-0000-05	1/10W 0 ohm JW
R212	119-0000-05	1/10W 0 ohm JW
R213	119-1521-15	1/10W 1.5k ohm
R214	032-0140-54	1/10W 22k ohm F
R215	032-0140-55	1/10W 4.7k ohm F
R216	032-0140-55	1/10W 4.7k ohm F
R219	119-1031-15	1/10W 10k ohm
R220	119-1031-15	1/10W 10k ohm
R221	119-3921-15	1/10W 3.9k ohm
R222	119-1031-15	1/10W 10k ohm
R223	119-1031-15	1/10W 10k ohm
R224	116-1591-15	1/4W 1.5 ohm
R225	116-1591-15	1/4W 1.5 ohm
R226	119-1801-15	1/10W 18 ohm
R227	119-3321-15	1/10W 3.3k ohm
R228	119-3321-15	1/10W 3.3k ohm
R229	116-1591-15	1/4W 1.5 ohm
R230	119-2231-15	1/10W 22k ohm
R231	116-1591-15	1/4W 1.5 ohm
R232	116-1221-15	1/4W 1.2k ohm
R238	119-1031-15	1/10W 10k ohm
R241	116-4711-15	1/4W 470 ohm
R242	116-4711-15	1/4W 470 ohm
R243	119-2231-15	1/10W 22k ohm
R244	116-4711-15	1/4W 470 ohm
R245	119-1031-15	1/10W 10k ohm
R246	119-1031-15	1/10W 10k ohm
R247	119-1011-15	1/10W 100 ohm
R248	119-1031-15	1/10W 10k ohm
R249	116-1221-15	1/4W 1.2k ohm
R250	119-1031-15	1/10W 10k ohm
R251	116-1221-15	1/4W 1.2k ohm
R252	116-1521-15	1/4W 1.5k ohm
R254	116-4711-15	1/4W 470 ohm
R258	119-1031-15	1/10W 10k ohm
R259	119-4731-15	1/10W 47k ohm
R260	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R261	119-1031-15	1/10W 10k ohm
R262	119-1031-15	1/10W 10k ohm
R263	119-1021-15	1/10W 1k ohm
R264	119-1031-15	1/10W 10k ohm
R265	119-1021-15	1/10W 1k ohm
R266	119-1031-15	1/10W 10k ohm
R267	119-4731-15	1/10W 47k ohm
R301	119-0000-05	1/10W 0 ohm JW
R302	119-1031-15	1/10W 10k ohm
R303	119-1011-15	1/10W 100 ohm
R304	119-1031-15	1/10W 10k ohm
R306	119-3331-15	1/10W 33k ohm
R307	119-1831-15	1/10W 18k ohm
R309	119-0000-05	1/10W 0 ohm JW
R310	119-1831-15	1/10W 18k ohm
R311	119-1831-15	1/10W 18k ohm
R313	119-3331-15	1/10W 33k ohm
R314	119-4721-15	1/10W 4.7k ohm
R315	119-1011-15	1/10W 100 ohm
R316	119-4721-15	1/10W 4.7k ohm
R317	119-1011-15	1/10W 100 ohm
R318	119-0000-05	1/10W 0 ohm JW
R320	119-1011-15	1/10W 100 ohm
R322	119-1001-15	1/10W 10 ohm
R323	119-3331-15	1/10W 33k ohm
R324	119-4721-15	1/10W 4.7k ohm
R325	119-1831-15	1/10W 18k ohm
R326	119-0000-05	1/10W 0 ohm JW
R327	119-3331-15	1/10W 33k ohm
R328	119-1011-15	1/10W 100 ohm
R329	119-0000-05	1/10W 0 ohm JW
R330	119-0000-05	1/10W 0 ohm JW
R331	119-1831-15	1/10W 18k ohm
R334	119-1031-15	1/10W 10k ohm
R335	119-1031-15	1/10W 10k ohm
R336	119-1011-15	1/10W 100 ohm
R337	119-1041-15	1/10W 100k ohm
R338	119-1021-15	1/10W 1k ohm
R339	119-0000-05	1/10W 0 ohm JW
R340	119-1031-15	1/10W 10k ohm
R341	119-1041-15	1/10W 100k ohm
R342	119-1831-15	1/10W 18k ohm
R343	119-1031-15	1/10W 10k ohm
R344	119-1031-15	1/10W 10k ohm
R345	119-1031-15	1/10W 10k ohm
R346	119-1031-15	1/10W 10k ohm
R347	119-0000-05	1/10W 0 ohm JW
R349	119-0000-05	1/10W 0 ohm JW
R350	119-0000-05	1/10W 0 ohm JW
R351	119-0000-05	1/10W 0 ohm JW
R353	119-0000-05	1/10W 0 ohm JW
R354	119-0000-05	1/10W 0 ohm JW
R355	119-1021-15	1/10W 1k ohm
R357	119-0000-05	1/10W 0 ohm JW
R359	119-0000-05	1/10W 0 ohm JW
R361	119-1021-15	1/10W 1k ohm
R362	119-0000-05	1/10W 0 ohm JW
R364	119-7501-15	1/10W 75 ohm
R366	119-0000-05	1/10W 0 ohm JW
R371	119-0000-05	1/10W 0 ohm JW
R372	119-0000-05	1/10W 0 ohm JW
R374	119-0000-05	1/10W 0 ohm JW
R375	119-0000-05	1/10W 0 ohm JW
R376	119-0000-05	1/10W 0 ohm JW
R378	119-0000-05	1/10W 0 ohm JW
R379	119-0000-05	1/10W 0 ohm JW
R380	119-0000-05	1/10W 0 ohm JW
R401	119-5611-15	1/10W 560 ohm
R402	119-4711-15	1/10W 470 ohm
R403	119-5611-15	1/10W 560 ohm
R404	119-0000-05	1/10W 0 ohm JW
R405	119-0000-05	1/10W 0 ohm JW
R406	119-3311-15	1/10W 330 ohm

REF No.	PART No.	DESCRIPTION
R407	119-0000-05	1/10W 0 ohm JW
R409	119-5611-15	1/10W 560 ohm
R411	119-5611-15	1/10W 560 ohm
R412	119-4711-15	1/10W 470 ohm
R501	032-0140-07	1/10W 11k ohm F
R502	032-0140-54	1/10W 22k ohm F
R503	032-0140-54	1/10W 22k ohm F
R504	032-0140-07	1/10W 11k ohm F
R506	032-0140-07	1/10W 11k ohm F
R507	032-0140-07	1/10W 11k ohm F
R508	032-0140-22	1/10W 68k ohm F
R509	032-0140-54	1/10W 22k ohm F
R510	032-0140-07	1/10W 11k ohm F
R511	032-0140-07	1/10W 11k ohm F
R513	032-0140-79	1/10W 2.7k ohm F
R514	032-0140-55	1/10W 4.7k ohm F
R515	032-0140-79	1/10W 2.7k ohm F
R516	032-0140-79	1/10W 2.7k ohm F
R517	032-0140-55	1/10W 4.7k ohm F
R518	032-0140-55	1/10W 4.7k ohm F
R519	032-0140-54	1/10W 22k ohm F
R520	032-0140-79	1/10W 2.7k ohm F
R521	032-0140-54	1/10W 22k ohm F
R522	032-0140-79	1/10W 2.7k ohm F
R524	032-0140-22	1/10W 68k ohm F
R525	032-0140-07	1/10W 11k ohm F
R526	032-0140-07	1/10W 11k ohm F
R527	032-0140-07	1/10W 11k ohm F
R528	032-0140-54	1/10W 22k ohm F
R529	032-0140-22	1/10W 68k ohm F
R530	032-0140-07	1/10W 11k ohm F
R533	032-0140-79	1/10W 2.7k ohm F
R534	032-0140-79	1/10W 2.7k ohm F
R536	032-0140-55	1/10W 4.7k ohm F
R537	032-0140-54	1/10W 22k ohm F
R539	032-0140-54	1/10W 22k ohm F
R544	032-0140-07	1/10W 11k ohm F
R545	032-0140-79	1/10W 2.7k ohm F
R546	032-0140-22	1/10W 68k ohm F
R556	032-0140-07	1/10W 11k ohm F
R601	119-1041-15	1/10W 100k ohm
R602	119-1031-15	1/10W 10k ohm
R603	119-0000-05	1/10W 0 ohm JW
R604	119-0000-05	1/10W 0 ohm JW
R605	119-0000-05	1/10W 0 ohm JW
R606	119-1031-15	1/10W 10k ohm
R607	119-1031-15	1/10W 10k ohm
R608	119-1031-15	1/10W 10k ohm
R609	119-0000-05	1/10W 0 ohm JW
R610	119-1031-15	1/10W 10k ohm
R611	032-0140-16	1/10W 180k ohm F
R612	119-1031-15	1/10W 10k ohm
R613	119-1031-15	1/10W 10k ohm
R614	119-4741-15	1/10W 470k ohm
R615	119-1051-15	1/10W 1M ohm
R616	119-4731-15	1/10W 47k ohm
R617	119-1031-15	1/10W 10k ohm
R618	119-1031-15	1/10W 10k ohm
R619	119-1031-15	1/10W 10k ohm
R620	119-1031-15	1/10W 10k ohm
R621	116-6801-15	1/4W 68 ohm
R622	119-1041-15	1/10W 100k ohm
R623	119-1041-15	1/10W 100k ohm
R624	119-4721-15	1/10W 4.7k ohm
R625	032-0140-03	1/10W 220k ohmF
R626	032-0140-66	1/10W 220 ohm F
R627	119-1031-15	1/10W 10k ohm
R628	119-1031-15	1/10W 10k ohm
R629	119-1031-15	1/10W 10k ohm
R630	119-4711-15	1/10W 470 ohm
R631	119-4731-15	1/10W 47k ohm
R632	119-4721-15	1/10W 4.7k ohm
R633	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R634	032-0140-56	1/10W 12k ohm F
R635	032-0140-03	1/10W 220k ohmF
R636	032-0140-67	1/10W 3.3k ohm F
R637	119-1531-15	1/10W 15k ohm
R638	119-3321-15	1/10W 3.3k ohm
R639	119-0000-05	1/10W 0 ohm JW
R640	119-1041-15	1/10W 100k ohm
R641	119-0000-05	1/10W 0 ohm JW
R642	119-1021-15	1/10W 1k ohm
R643	119-1041-15	1/10W 100k ohm
R644	032-0140-52	1/10W 33k ohm F
R645	119-1811-15	1/10W 180 ohm
R646	119-1031-15	1/10W 10k ohm
R647	119-0000-05	1/10W 0 ohm JW
R648	119-1031-15	1/10W 10k ohm
R649	119-1031-15	1/10W 10k ohm
R650	119-0000-05	1/10W 0 ohm JW
R651	119-0000-05	1/10W 0 ohm JW
R652	119-0000-05	1/10W 0 ohm JW
R653	119-0000-05	1/10W 0 ohm JW
R654	119-0000-05	1/10W 0 ohm JW
R655	119-0000-05	1/10W 0 ohm JW
R656	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R657	119-0000-05	1/10W 0 ohm JW
R658	119-1031-15	1/10W 10k ohm
R659	119-1031-15	1/10W 10k ohm
R660	119-0000-05	1/10W 0 ohm JW
R661	119-2231-15	1/10W 22k ohm
R662	119-1031-15	1/10W 10k ohm (for PE2697KA/KB)
R663	119-1031-15	1/10W 10k ohm (for PE2697BA)
R665	119-1031-15	1/10W 10k ohm
R667	119-0000-05	1/10W 0 ohm JW
R670	119-1031-15	1/10W 10k ohm
R675	119-1031-15	1/10W 10k ohm
R676	119-1021-15	1/10W 1k ohm
R677	119-1031-15	1/10W 10k ohm
R678	119-1231-15	1/10W 12k ohm
R679	119-1011-15	1/10W 100 ohm
R680	119-1011-15	1/10W 100 ohm
R681	119-1011-15	1/10W 100 ohm
R682	119-1011-15	1/10W 100 ohm
R683	119-0000-05	1/10W 0 ohm JW
R684	119-4731-15	1/10W 47k ohm
R685	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R686	119-0000-05	1/10W 0 ohm JW
R687	119-0000-05	1/10W 0 ohm JW
R688	119-0000-05	1/10W 0 ohm JW
R689	119-0000-05	1/10W 0 ohm JW
R690	116-1221-15	1/4W 1.2k ohm
R691	119-0000-05	1/10W 0 ohm JW
R692	119-0000-05	1/10W 0 ohm JW
R693	119-1041-15	1/10W 100k ohm
R694	119-0000-05	1/10W 0 ohm JW
R695	119-0000-05	1/10W 0 ohm JW
S601	013-6103-00	TSHB-2V
S602	013-7106-00	TKR00120670MM
S603	013-7206-50	SPPB530701
SUP1	060-8057-90	CSA20-141N-T
T202	007-1175-90	OUTPUT TRANS
TH601	002-0315-00	TN10-3U153JT
X301	061-3537-90	41.6MHz
X601	061-1056-00	32.768kHz
X602	060-1541-90	3.14MHz
X603	060-0100-51	BUZZER
PWB	039-2825-00	PWB(WITHOUT COMPONENTS)

Video PWB(B2) section

REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF
C902	043-0540-00	6.3V 10uF
C903	166-4701-50	47pF CH
C910	168-1042-78	16V 0.1uF
C911	168-1042-78	16V 0.1uF
C912	043-0540-00	6.3V 10uF
C913	043-0552-90	6.3V 47uF M
C914	168-1042-78	16V 0.1uF
C915	168-1042-78	16V 0.1uF
C916	168-1042-78	16V 0.1uF
C917	168-1042-78	16V 0.1uF
C920	168-1042-78	16V 0.1uF
C921	043-0540-00	6.3V 10uF
C922	166-1201-50	12pF CH
C923	168-1042-78	16V 0.1uF
C924	166-1201-50	12pF CH
C925	168-1042-78	16V 0.1uF
C926	168-1042-78	16V 0.1uF
CCT901	050-0140-63	1/32W 47k ohm x4J
CCT902	050-0140-63	1/32W 47k ohm x4J
CCT903	050-0140-58	1/32W 470 ohm x4J
CCT904	050-0140-58	1/32W 470 ohm x4J
CCT907	050-0140-58	1/32W 470 ohm x4J

REF No.	PART No.	DESCRIPTION
CCT908	050-0140-58	1/32W 470 ohm x4J
CCT909	050-0140-58	1/32W 470 ohm x4J
CCT910	050-0140-58	1/32W 470 ohm x4J
CCT911	050-0140-58	1/32W 470 ohm x4J
CCT912	050-0140-58	1/32W 470 ohm x4J
CCT913	050-0140-58	1/32W 470 ohm x4J
CCT914	050-0140-58	1/32W 470 ohm x4J
CCT915	050-0140-58	1/32W 470 ohm x4J
CCT916	050-0140-58	1/32W 470 ohm x4J
CCT917	050-0140-58	1/32W 470 ohm x4J
CCT918	050-0140-58	1/32W 470 ohm x4J
CCT919	050-0140-58	1/32W 470 ohm x4J
CCT920	050-0140-58	1/32W 470 ohm x4J
CCT921	050-0140-58	1/32W 470 ohm x4J
CCT922	050-0140-58	1/32W 470 ohm x4J
CCT923	050-0140-58	1/32W 470 ohm x4J
CCT924	010-3042-54	600 ohm x4/100MHz
CCT925	010-3042-54	600 ohm x4/100MHz
CCT926	010-3042-54	600 ohm x4/100MHz
CCT927	010-3042-54	600 ohm x4/100MHz
CCT928	010-3042-54	600 ohm x4/100MHz
CCT929	010-3042-54	600 ohm x4/100MHz
CCT930	010-3042-54	600 ohm x4/100MHz

REF No.	PART No.	DESCRIPTION
CCT931	010-3042-54	600 ohm x4/100MHz
IC903	051-6437-00	YGV608F
IC904	052-7076-10	MBM29F016A-90PFTN
IC905	051-7285-08	CD74HC4050PWR
IC906	051-7285-08	CD74HC4050PWR
IC907	051-7287-90	CD74HC4049PWR
J900	074-3008-90	40P
L901	010-3103-64	1.5k ohm/100MHz
L902	010-3103-64	1.5k ohm/100MHz
L903	010-3103-64	1.5k ohm/100MHz
L910	010-3103-64	1.5k ohm/100MHz
L911	010-2279-50	4.7uH
L912	010-2279-50	4.7uH
R900	119-4711-15	1/10W 470 ohm
R901	119-1511-15	1/10W 150 ohm
R910	119-4711-15	1/10W 470 ohm
R911	119-1051-15	1/10W 1M ohm
X901	061-3544-90	NX5032GA 12MHz
PWB	039-2680-00	PWB(WITHOUT COMPONENTS)

DC-DC PWB(B3) section

REF No.	PART No.	DESCRIPTION
C210	042-0560-84	16V 470uF
C231	043-0510-51	25V 10uF
C232	043-0510-51	25V 10uF
C233	168-1042-78	16V 0.1uF
C234	168-1032-55	0.01uF K
C235	168-2232-55	0.022uF K
C236	166-1511-50	150pF CH
C237	168-1022-55	1000pF K
C238	168-1042-78	16V 0.1uF
C239	168-4732-78	0.047uF K
C240	168-1042-78	16V 0.1uF
C243	168-1022-55	1000pF K
C246	042-0560-63	16V 22uF
C248	042-1697-00	10V 680uF
C260	172-3341-11	0.33uF
C261	042-0671-02	10V 22uF
D204	001-0529-45	MA8082-H
D205	001-0608-90	D1FS4
D207	001-0507-90	DAP202K

REF No.	PART No.	DESCRIPTION
D208	001-0608-90	D1FS4
D217	001-0627-90	U1BC44
FIL201	060-3116-55	CKD510JB1H102ST
FIL202	060-3115-52	CKD310JB1C474ST
FIL203	060-3115-52	CKD310JB1C474ST
IC201	051-3921-90	MD1423N
IC206	051-3351-90	BA033CC0FP-E2
L201	010-2275-50	33uH
L203	010-3109-65	2k ohm/100MHz
L204	010-3041-90	10uH
L205	010-3108-53	330 ohm/100MHz
P201	074-0898-16	16P
Q204	125-2199-93	KRC103S
Q205	125-2199-93	KRC103S
Q206	125-3004-90	KTA1504S
Q207	125-3010-90	KTA1666-RTF
R211	119-5631-15	1/10W 56k ohm
R212	119-1031-15	1/10W 10k ohm
R213	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R214	119-2221-15	1/10W 2.2k ohm
R215	119-1031-15	1/10W 10k ohm
R216	119-1031-15	1/10W 10k ohm
R217	119-1041-15	1/10W 100k ohm
R218	119-1051-15	1/10W 1M ohm
R232	119-3301-15	1/10W 33 ohm
R233	032-0164-50	0.1ohm F
R236	032-0164-50	0.1ohm F
R237	119-1001-15	1/10W 10 ohm
R239	032-0140-53	1/10W 2.2k ohm F
R245	032-0140-85	1/10W 2.4k ohm F
R246	119-1031-15	1/10W 10k ohm
R247	119-1011-15	1/10W 100 ohm
T201	007-1176-00	TRANS YE2371E006-02
PWB	039-2682-00	PWB(WITHOUT COMPONENTS)

Switch PWB(B4) section

REF No.	PART No.	DESCRIPTION
C700	043-0540-00	6.3V 10uF
C701	043-0541-00	6.3V 22uF
C702	043-0541-00	6.3V 22uF
C703	043-0540-00	6.3V 10uF
C704	168-1032-55	0.01uF K
C705	168-1042-78	16V 0.1uF
C706	168-1042-78	16V 0.1uF
C707	168-1022-55	1000pF K
C708	168-1032-55	0.01uF K
C709	168-1032-55	0.01uF K
C710	168-1022-55	1000pF K
C711	168-1022-55	1000pF K
C712	168-1022-55	1000pF K
C713	168-1042-78	16V 0.1uF
C714	043-0540-01	10V 2.2uF
C715	043-0542-00	25V 4.7uF
C716	043-0542-00	25V 4.7uF
C717	043-0542-00	25V 4.7uF
C718	043-0542-00	25V 4.7uF
C719	043-0541-00	6.3V 22uF
C720	043-0541-00	6.3V 22uF
C721	043-0542-00	25V 4.7uF
C722	168-1032-55	0.01uF K
D700	001-1310-00	KDS160-RTK
D701	001-1310-00	KDS160-RTK
D702	001-0367-91	1SS226
D703	001-0367-91	1SS226
D704	001-0367-91	1SS226
D705	001-0367-91	1SS226
D706	001-7040-94	NSCB100A
D707	001-7040-94	NSCB100A
D708	001-7040-94	NSCB100A
D709	001-7040-94	NSCB100A
D710	001-7040-94	NSCB100A
D711	001-7040-94	NSCB100A
D716	001-0529-30	MA8051-H
D717	001-0529-30	MA8051-H
D718	001-0529-30	MA8051-H
D719	001-0529-30	MA8051-H

REF No.	PART No.	DESCRIPTION
D720	001-0529-30	MA8051-H
D721	001-0529-30	MA8051-H
D722	001-0529-30	MA8051-H
D723	001-0529-30	MA8051-H
D724	001-0529-30	MA8051-H
D725	001-0529-30	MA8051-H
D726	001-0529-30	MA8051-H
D727	001-0529-30	MA8051-H
D728	001-0529-30	MA8051-H
D729	001-0529-30	MA8051-H
D730	001-0529-30	MA8051-H
D731	001-0529-41	MA8075-M
D732	001-0529-41	MA8075-M
D733	001-0529-41	MA8075-M
D734	001-0529-41	MA8075-M
IC701	052-7066-10	M30102M2-597FP
IR700	060-4017-90	IR RECEIVER
J701	074-1158-54	SOCKET
J702	076-0647-00	16P
J703	076-0647-00	16P
J704	074-1239-80	30P
L701	010-2275-50	33uH
L702	010-2275-50	33uH
L703	010-2275-57	10UH
Q700	060-4011-80	CPT-182S-C
Q701	125-2199-95	KRC105S-RTK
Q702	125-2199-95	KRC105S-RTK
Q703	125-0199-95	KRA105S-RTK
Q704	125-0199-95	KRA105S-RTK
Q705	125-4010-90	KTC3875S
Q706	125-2199-93	KRC103S
Q707	125-3007-90	KTA1298
R700	119-1011-15	1/10W 100 ohm
R701	119-3921-15	1/10W 3.9k ohm
R702	119-1041-15	1/10W 100k ohm
R703	119-6811-15	1/10W 680 ohm
R704	119-1051-15	1/10W 1M ohm
R705	119-4731-15	1/10W 47k ohm
R706	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R707	119-4731-15	1/10W 47k ohm
R708	119-2211-15	1/10W 220 ohm
R709	119-1041-15	1/10W 100k ohm
R710	119-4731-15	1/10W 47k ohm
R711	119-3321-15	1/10W 3.3k ohm
R712	119-1021-15	1/10W 1k ohm
R713	119-1021-15	1/10W 1k ohm
R714	119-1021-15	1/10W 1k ohm
R715	119-1021-15	1/10W 1k ohm
R716	119-4721-15	1/10W 4.7k ohm
R717	119-4721-15	1/10W 4.7k ohm
R718	119-2711-15	1/10W 270 ohm
R719	119-2711-15	1/10W 270 ohm
R720	119-2711-15	1/10W 270 ohm
R721	119-2711-15	1/10W 270 ohm
R722	119-2711-15	1/10W 270 ohm
R723	119-1031-15	1/10W 10k ohm
R724	119-1521-15	1/10W 1.5k ohm
R725	119-1011-15	1/10W 100 ohm
R726	119-1011-15	1/10W 100 ohm
R727	119-1011-15	1/10W 100 ohm
R728	119-1011-15	1/10W 100 ohm
R729	119-2711-15	1/10W 270 ohm
R731	119-1531-15	1/10W 15k ohm
R732	119-4721-15	1/10W 4.7k ohm
S701	013-6302-53	SKQMBBE010
S702	013-6302-53	SKQMBBE010
S703	013-6302-53	SKQMBBE010
S704	013-6302-53	SKQMBBE010
S705	013-6302-53	SKQMBBE010
S706	013-6302-53	SKQMBBE010
VR700	016-9900-96	VR EC11E15244
VR701	012-6009-56	10k ohm B VR
X701	060-1531-90	CSTCR4M91G53-RO
PWB	039-2826-00	PWB(WITHOUT COMPONENTS)

LCD PWB(B5) section

REF No.	PART No.	DESCRIPTION
C800	168-1042-78	16V 0.1uF
C801	168-1042-78	16V 0.1uF
C802	168-1042-78	16V 0.1uF
C803	168-1042-78	16V 0.1uF
C804	168-1042-78	16V 0.1uF
C805	168-1042-78	16V 0.1uF
C806	043-0542-00	25V 4.7uF
C807	168-1042-78	16V 0.1uF
C812	166-4701-50	47pF CH
C813	043-0542-00	25V 4.7uF
C814	168-1042-78	16V 0.1uF
C815	043-0552-90	6.3V 47uF M
C817	043-0541-00	6.3V 22uF
C818	043-0542-00	25V 4.7uF
C819	043-0542-00	25V 4.7uF
C820	043-0542-00	25V 4.7uF
C822	043-0540-01	10V 2.2uF
C824	043-0540-01	10V 2.2uF
C825	043-0541-00	6.3V 22uF
C826	168-1042-78	16V 0.1uF
CCT802	010-3042-54	600 ohm x4/100MHz
CCT803	010-3042-54	600 ohm x4/100MHz
CCT804	010-3042-54	600 ohm x4/100MHz
CCT805	010-3042-54	600 ohm x4/100MHz
CCT806	010-3042-54	600 ohm x4/100MHz
CCT807	010-3042-54	600 ohm x4/100MHz
CCT808	010-3042-54	600 ohm x4/100MHz
CCT820	050-0140-70	1/32W 10 ohm x4J
CCT821	050-0140-70	1/32W 10 ohm x4J
CCT822	050-0140-70	1/32W 10 ohm x4J

REF No.	PART No.	DESCRIPTION
CCT823	050-0140-70	1/32W 10 ohm x4J
CCT824	050-0140-70	1/32W 10 ohm x4J
CCT825	050-0140-70	1/32W 10 ohm x4J
D800	001-7078-90	NSCW505T
D801	001-7078-90	NSCW505T
D802	001-7078-90	NSCW505T
D803	001-7078-90	NSCW505T
D804	001-7078-90	NSCW505T
D805	001-7078-90	NSCW505T
D806	001-7078-90	NSCW505T
D807	001-7078-90	NSCW505T
D808	001-7078-90	NSCW505T
D809	001-7078-90	NSCW505T
D810	001-7078-90	NSCW505T
D811	001-7078-90	NSCW505T
D812	001-0584-14	MA8033
IC800	051-6080-00	LZ9FD51A
IC801	051-3019-90	NJM2060V
IC802	051-7107-90	TC4S81F-TE85L,F
IC803	125-9023-90	TPCF8402TE85L,F
IC804	051-7510-08	SN74LV4053APWR
IC807	051-3056-90	BA2904FV-E2
J800	074-1239-80	30P
J801	074-1189-00	50P
L800	010-3103-64	1.5k ohm/100MHz
L801	010-2198-56	2.2uH
Q800	125-4010-90	KTC3875S
Q801	125-4010-90	KTC3875S
R800	119-3901-15	1/10W 39 ohm
R801	119-3901-15	1/10W 39 ohm

REF No.	PART No.	DESCRIPTION
R802	119-3901-15	1/10W 39 ohm
R803	119-3901-15	1/10W 39 ohm
R804	119-3901-15	1/10W 39 ohm
R805	119-3901-15	1/10W 39 ohm
R806	119-3901-15	1/10W 39 ohm
R807	119-3901-15	1/10W 39 ohm
R808	119-3901-15	1/10W 39 ohm
R809	119-3901-15	1/10W 39 ohm
R810	119-3901-15	1/10W 39 ohm
R811	119-3901-15	1/10W 39 ohm
R812	119-1811-15	1/10W 180 ohm
R813	119-1041-15	1/10W 100k ohm
R815	119-3321-15	1/10W 3.3k ohm
R817	032-0140-50	1/10W 10k ohm F
R821	119-1001-15	1/10W 10 ohm
R822	119-1001-15	1/10W 10 ohm
R823	032-0140-50	1/10W 10k ohm F
R841	119-1001-15	1/10W 10 ohm
R842	119-1001-15	1/10W 10 ohm
R851	119-3301-15	1/10W 33 ohm
R852	119-3301-15	1/10W 33 ohm
R853	119-3301-15	1/10W 33 ohm
R854	119-3301-15	1/10W 33 ohm
R855	119-3301-15	1/10W 33 ohm
R856	119-3301-15	1/10W 33 ohm
R857	119-3301-15	1/10W 33 ohm
R858	119-3301-15	1/10W 33 ohm
R859	119-3301-15	1/10W 33 ohm
R860	119-3301-15	1/10W 33 ohm
R861	119-3301-15	1/10W 33 ohm

REF No.	PART No.	DESCRIPTION
R862	119-3301-15	1/10W 33 ohm
R863	119-3301-15	1/10W 33 ohm
R864	119-3301-15	1/10W 33 ohm
R865	119-1041-15	1/10W 100k ohm
R866	119-6821-15	1/10W 6.8k ohm
R869	119-6821-15	1/10W 6.8k ohm
R870	119-9121-15	1/10W 9.1k ohm
R874	032-0140-55	1/10W 4.7k ohm F

REF No.	PART No.	DESCRIPTION
R875	032-0140-89	1/10W 47k ohm F
R876	032-0140-89	1/10W 47k ohm F
R877	032-0140-79	1/10W 2.7k ohm F
R878	032-0140-51	1/10W 15k ohm F
R879	032-0140-52	1/10W 33k ohm F
R880	032-0140-52	1/10W 33k ohm F
R881	032-0140-51	1/10W 15k ohm F
R882	032-0140-51	1/10W 15k ohm F

REF No.	PART No.	DESCRIPTION
R883	119-3931-15	1/10W 39k ohm
R884	032-0140-50	1/10W 10k ohm F
R885	119-3931-15	1/10W 39k ohm
R886	119-1021-15	1/10W 1k ohm
R887	119-4791-15	1/10W 4.7 ohm
R888	119-4791-15	1/10W 4.7 ohm
PWB	039-2679-00	PWB(WITHOUT COMPONENTS)

CD PWB(B6) section

REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF
C4	168-1042-78	16V 0.1uF
C5	046-1032-78	0.01uF
C9	046-4722-58	4700pF
C10	045-1011-50	100pF
C13	168-1042-78	16V 0.1uF
C16	168-1042-78	16V 0.1uF
C17	046-1032-78	0.01uF
C18	178-1052-78	1uF
C19	046-1032-78	0.01uF
C20	168-1042-78	16V 0.1uF
C21	042-0595-53	4V220uF
C22	168-1042-78	16V 0.1uF
C23	168-1042-78	16V 0.1uF
C24	046-1032-78	0.01uF
C25	045-8097-50	8pF
C26	045-8097-50	8pF
C27	042-0416-52	10V10uF TAN
C28	046-1032-78	0.01uF
C29	168-1042-78	16V 0.1uF
C30	045-1201-50	12pF
C31	168-1042-78	16V 0.1uF
C32	046-1032-78	0.01uF
C33	046-1032-78	0.01uF
C34	046-1032-78	0.01uF
C35	046-1022-58	1000pF
C102	163-1073-35	16V100uF
C103	046-4722-58	4700pF
C104	046-1032-78	0.01uF
C105	168-1042-78	16V 0.1uF
C106	168-1042-78	16V 0.1uF
C107	042-0416-52	10V10uF TAN
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	168-1042-78	16V 0.1uF
C112	168-4732-78	0.047uF
C113	168-4732-78	0.047uF
C114	168-1042-78	16V 0.1uF
C115	045-4701-50	47pF
C116	046-4712-58	470pF
C117	046-4712-58	470pF
C118	168-1042-78	16V 0.1uF
C119	168-1042-78	16V 0.1uF
C120	046-1532-78	0.015uF
C121	046-6822-58	6800pF
C122	168-1042-78	16V 0.1uF
C123	046-1032-78	0.01uF
C126	046-3332-78	0.033uF
C127	046-4722-58	4700pF
C130	168-1042-78	16V 0.1uF
C131	046-1522-58	1500pF
C132	168-1042-78	16V 0.1uF
C133	046-1532-78	0.015uF

REF No.	PART No.	DESCRIPTION
C134	168-1042-78	16V 0.1uF
C135	045-6801-50	50V 68pF
C136	178-1052-78	1uF
C138	168-1042-78	16V 0.1uF
C139	168-1042-78	16V 0.1uF
C140	046-6812-58	680pF
C142	178-1052-78	1uF
C144	042-0560-85	6.3V 100uF
C145	168-1042-78	16V 0.1uF
C146	168-1042-78	16V 0.1uF
C147	178-1052-78	1uF
C148	042-0595-53	4V220uF
C149	163-1073-35	16V100uF
C150	168-1042-78	16V 0.1uF
C151	178-1052-78	1uF
C200	178-1052-78	1uF
CCT1	050-0145-54	1/16W 47k ohm x4
CCT2	050-0145-58	2.2k ohm x 4
CCT3	050-0140-63	1/32W 47k ohm x4J
CCT101	050-0140-68	1/32W 3.3k ohm x4J
D1	001-2610-90	RB480KTL
D2	001-2610-90	RB480KTL
D3	001-2610-90	RB480KTL
D4	001-2610-90	RB480KTL
D5	001-2610-90	RB480KTL
D6	001-2610-90	RB480KTL
D101	001-0367-91	1SS226
IC1	051-7518-18	SN74LVC139APWR
IC2	051-3315-90	TPS76316DBVR
IC3	051-7239-38	SN74AHCT08PWR
IC5	051-5441-08	BD4828G-TR
IC6	051-6700-00	TMS320DA140
IC10	052-5055-34	MBM29DL800BA-90PFTN
IC11	051-6919-08	NJU6391PE
IC12	051-7221-58	SN74AHC1G04HDCKR
IC13	051-7280-38	TC7SU04FU-TE85L
IC14	051-7280-38	TC7SU04FU-TE85L
IC101	051-6069-08	FAN8047G3
IC102	051-6399-00	TC94A15F
J1	074-1138-65	15P
J2	074-1138-60	10P
J3	074-1237-70	20P
Q1	131-1188-50	2SB1188PQR
Q2	125-2004-92	RN1402
Q101	131-1188-50	2SB1188PQR
Q102	131-1188-50	2SB1188PQR
R1	033-4721-15	1/10W 4.7k ohm
R2	033-1041-15	1/10W 100k ohm
R3	033-1041-15	1/10W 100k ohm
R4	033-1031-15	1/10W 10k ohm
R5	033-2231-15	1/10W 22k ohm
R6	033-3911-15	1/10W 390 ohm

REF No.	PART No.	DESCRIPTION
R7	033-4731-15	1/10W 47k ohm
R8	033-1051-15	1/10W 1M ohm
R9	033-3311-15	1/10W 330 ohm
R12	033-4731-15	1/10W 47k ohm
R13	033-1041-15	1/10W 100k ohm
R14	033-4721-15	1/10W 4.7k ohm
R15	033-4721-15	1/10W 4.7k ohm
R16	033-1021-15	1/10W 1k ohm
R17	033-1021-15	1/10W 1k ohm
R19	033-4731-15	1/10W 47k ohm
R20	033-4731-15	1/10W 47k ohm
R23	033-2211-15	1/10W 220 ohm
R24	033-4731-15	1/10W 47k ohm
R28	033-6841-15	1/10W 680k ohm
R29	033-6841-15	1/10W 680k ohm
R30	033-1041-15	1/10W 100k ohm
R31	033-1031-15	1/10W 10k ohm
R32	033-1031-15	1/10W 10k ohm
R33	033-1031-15	1/10W 10k ohm
R34	033-6831-15	1/10W 68k ohm
R35	033-6831-15	1/10W 68k ohm
R36	033-3311-15	1/10W 330 ohm
R43	033-4731-15	1/10W 47k ohm
R44	033-4731-15	1/10W 47k ohm
R45	033-4731-15	1/10W 47k ohm
R101	033-1231-15	1/10W 12k ohm
R102	033-3321-15	1/10W 3.3k ohm
R103	033-3331-15	1/10W 33k ohm
R104	033-4731-15	1/10W 47k ohm
R105	033-4731-15	1/10W 47k ohm
R106	033-2211-15	1/10W 220 ohm
R107	033-2211-15	1/10W 220 ohm
R108	033-1021-15	1/10W 1k ohm
R109	033-1021-15	1/10W 1k ohm
R110	033-4731-15	1/10W 47k ohm
R115	033-0000-05	1/10W 0 ohm
R116	033-5621-15	1/10W 5.6k ohm
R117	033-4731-15	1/10W 47k ohm
R118	033-3341-15	1/10W 330k ohm
R119	033-2231-15	1/10W 22k ohm
R120	033-2231-15	1/10W 22k ohm
R121	117-1001-15	1/10W 10 ohm
R122	033-2211-15	1/10W 220 ohm
R123	117-6811-15	1/10W 680 ohm
R124	032-0162-50	1/10W 0.51 ohm
R126	033-1021-15	1/10W 1k ohm
R127	033-1021-15	1/10W 1k ohm
R130	033-1051-15	1/10W 1M ohm
TM101	073-0768-90	TERMINAL
X1	061-3534-90	16.92MHz
PWB	039-2429-21	PWB(WITHOUT COMPONENTS)

Sensor PWB(B7) section

REF No.	PART No.	DESCRIPTION
D11	001-7058-90	AN1105W-RR
D12	001-7058-90	AN1105W-RR
J4	074-1138-60	10P

REF No.	PART No.	DESCRIPTION
Q11	060-4015-90	PS1192H
Q12	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING

REF No.	PART No.	DESCRIPTION
S2	013-7413-50	LIMIT
PWB	039-2675-00	PWB(WITHOUT COMPONENTS)

DXZ865MP
DXZ866MP