

2. EXPLODED VIEWS AND PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.

● The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part.


Therefore, when replacing, be sure to use parts of identical designation.

● Screws adjacent to ∇ mark on product are used for disassembly.


● For the applying amount of lubricants or glue, follow the instructions in this manual.

(In the case of no amount instructions, apply as you think it appropriate.)

2.1 EXTERIOR SECTION

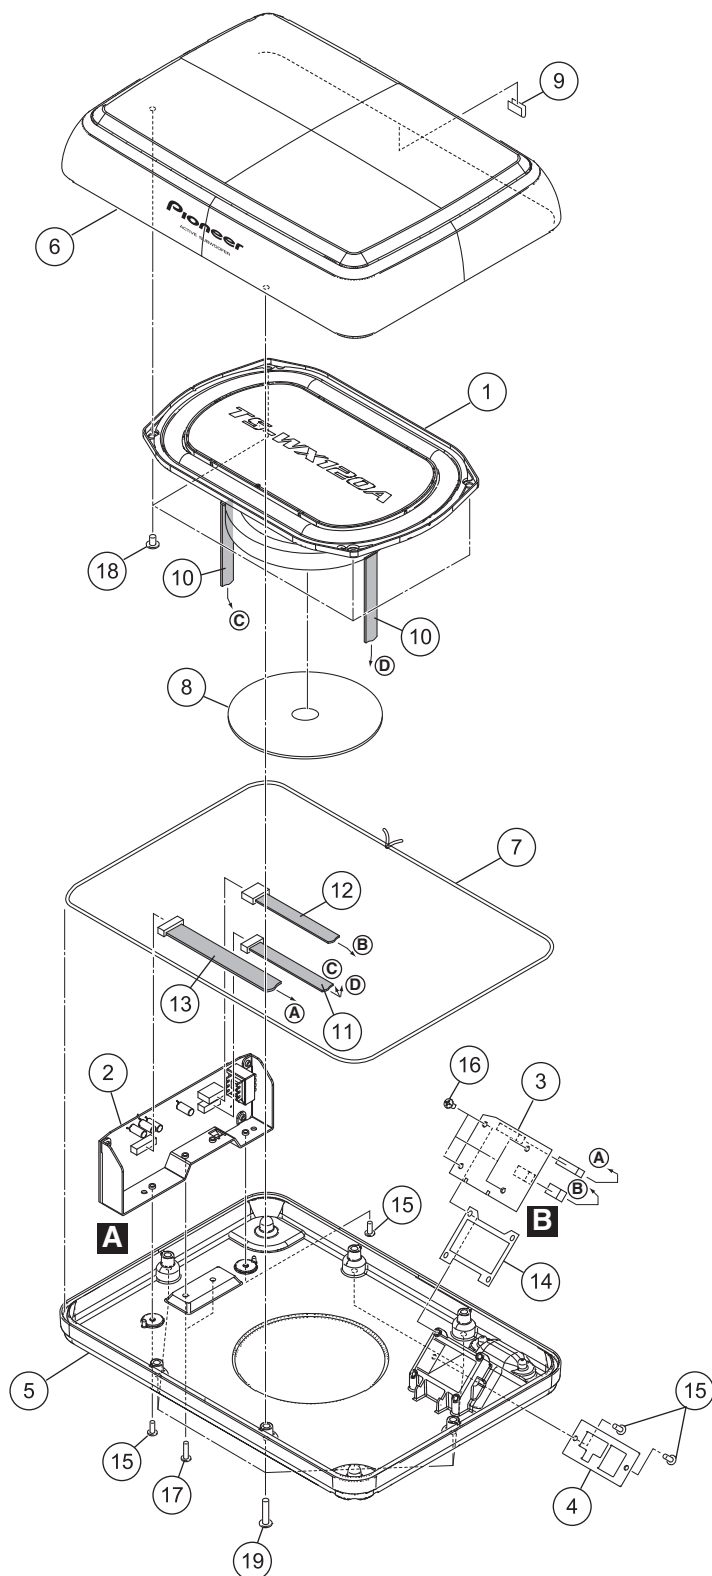

• Wiring Diagram

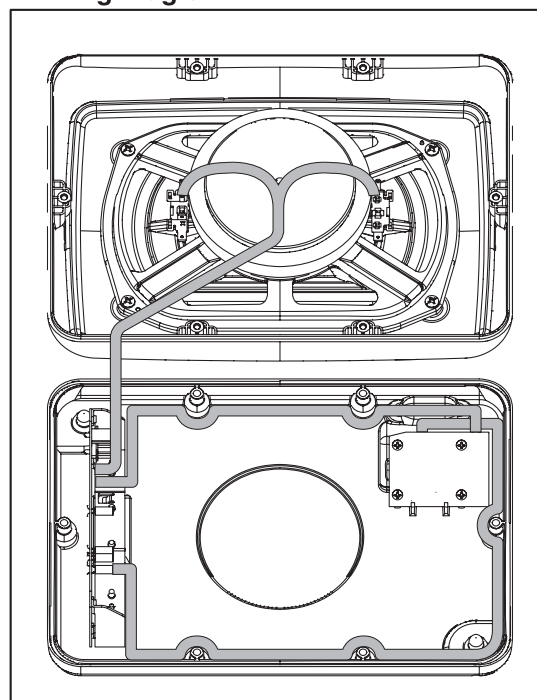

● Component Parts


Mark	No.	Description	Part No.	Remarks
	1	Speaker	231-358CAZ/XMD	x1
	2	AMP Unit	TWK1028	x1
	3	IO Unit	TWS1051	x1
	4	Panel	TAN1192	x1
	5	Cabinet	TLM1900	x1
	6	Cabinet Assy	TXL1364	x1
	7	Packing	TEB1565	x1
	8	Cushion	TED2861	x1
	9	Packing	TED1849	x1
	10	Cushion	TED2680	x2

Mark	No.	Description	Part No.	Remarks
	11	Packing	TED2681	x1
	12	Cushion	TED2682	x1
	13	Cushion	TED2683	x1
	14	Cushion	TED2685	x1
	15	Screw	BMZ30P060FTB	x4
	16	Screw	BMZ30P080FTB	x4
	17	Screw	BMZ30P120FTB	x2
	18	Screw	BPZ40P080FTB	x4
	19	Screw	BPZ40P180FTB	x6

2.2 REMOTE CONTROL UNIT

● Component Parts

Mark	No.	Description	Part No.	Remarks
	1	Remote Control Unit	TXC1292	x1
NSP	2	SWITCH Unit	TWS1048	x1
	3	Knob	TAA1021	x2
	4	Switch Knob	TAA1022	x1
	5	Cabinet	TLM1891	x1
	6	Bracket	TNA1764	x1
	7	Grille Assy	TXK1816	x1
NSP	8	Wire Clip	TEX1013	x1
	9	Screw	BPZ26P070FTC	x2
	10	Screw	BPZ26P100FTB	x3

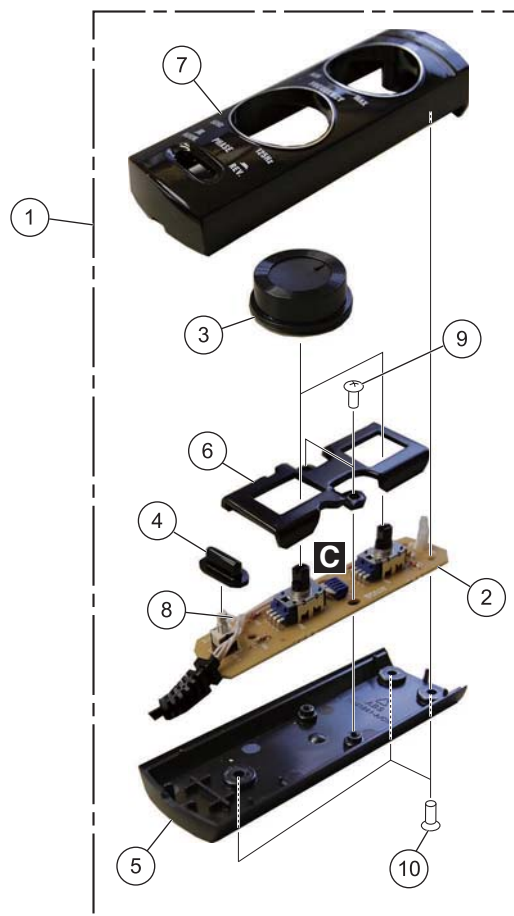

2.3 ACCESSORY PARTS LIST

Mark	No.	Description	Part No.	Remarks
A	1	Fitting	TNA2189	x2
	2	Installation Kit	TEA2418	x1
	2-1	Screw	OMZ50P100FTB	x2
	2-2	Screw	BNC50P180FTB	x2
	2-3	Cushion	TED1850	x1
	2-4	Fitting	TNA1708	x1
	2-5	Screw	BMZ30P080FTB	x2
B	3	C-Cord Assy	TXH1812	x1
	4	C-Cord Assy	TXH1800	x1
		Operating Instructions	TRD1443	x1
NSP		Warranty	QRY3001	x1


● PARTS INCLUDED

1 ① TNA2189 

2


2-1 ② (M5 mm × 10 mm) OMZ50P100FTB 

2-2 ③ (φ 5 mm × 18 mm) BNC50P180FTB 


2-3 ⑦ TED1850 

2-4 ⑧ TNA1708 

2-5 ⑨ (M3 mm × 8 mm) BMZ30P080FTB 

3 ④ 5 m TXH1812 

4 ⑤ 0.4 m TXH1800 

⑥ 6 m TXC1292 

2.4 PACKING PARTS LIST

Mark	No.	Description	Part No.	Remarks
		Cushion Paper	TEE1184	x1
		Cushion Paper	TEE1185	x1
		Packing Case	THF5740	x1
		Master Carton	THG5196	x1

5. PCB PARTS LIST

- NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
- The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- When ordering resistors, first convert resistance values into code form as shown in the following examples.
- Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).
- 560 Ω

→

56 × 10¹

→

561

.....

RD1/4PU

5

6

1

J

47 kΩ

→

47 × 10³

→

473

.....

RD1/4PU

4

7

3

J

0.5 Ω

→

R50

.....

RN2H

R

5

0

K

1 Ω

→

1R0

.....

RS1P

1

R

0

K
- Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).
- 5.62 kΩ

→

562 × 10¹

→

5621

.....

RN1/4PC

5

6

2

1

F

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
LIST OF ASSEMBLIES							
	1..AMP UNIT		TWK1028		C130		CFTNA333J50
	1..IO UNIT		TWS1051		C126		CFTNA474J50
					C149,C150,C601		CKSQYB104K50
					C101-C104		CKSQYB334K50
					C603		CKSQYB821K50
	1..REMOTE CONTROL UNIT		TXC1292		C301-C303		CKSRYB102K50
NSP	2..SWITCH UNIT		TWS1048		C605,C609		CKSRYB103K50
					C109,C110,C116,C122,C132,C138		CKSRYB104K50
					C136		CKSRYB332K50
					C113,C114		CKSRYB473K50
					C148 (4700/16 V)		TCH1307
				RESISTORS			
					All Resistors		RS1/16S***J
				OTHERS			
					CN101 CONNECTOR		TKS1133
					CN102 CORD		TDC2986
					CN601 CONNECTOR		TKS1123
					TH601 POSISTOR		TCX1012
NSP					BRACKET		TNA2187
					SCREW		BMZ30P060FTB
				B IO UNIT			
				OTHERS			
					CN201 CORD		TDC2984
					CN202 CORD		TDC2983
					CN203 CONNECTOR		TKS1096
					CN204 CONNECTOR		TKS1149