

TK-3160

PARTS LIST

* New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia K: USA P: Canada
Y: PX (Far East, Hawaii) T: England E: Europe
Y: AAFES (Europe) X: Australia M: Other Areas

TK-3160 (Y50-579X-XX)
TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-3160						42	1B		T07-0369-05	SPEAKER	
1	1B	*	A02-3826-33	CABINET ASSY	K M	TX-RX UNIT (X57-673X-XX) 0-10 :K, M					
2	2B	*	A10-4068-01	CHASSIS		D802			B30-2156-05	LED(RED)	
3	3A	*	A82-0054-02	REAR PANEL		D803			B30-2157-05	LED(YELLOW)	
4	3A	*	B01-0694-03	ESCUTCHEON		C1			CK73GB1H472K	CHIP C	4700PF K
5	2D	*	B09-0676-03	CAP		C2			CK73GB1H471K	CHIP C	470PF K
6	1C	*	B62-1716-00	INSTRUCTION MANUAL		C3			CK73GB1H103K	CHIP C	0.010UF K
6	1C	*	B62-1747-00	INSTRUCTION MANUAL		C4			CK73GB0J225K	CHIP C	2.2UF K
7	3B	*	B72-2178-04	MODEL NAME PLATE		C5			CK73GB1H471K	CHIP C	470PF K
8	3A	*	E04-0446-05	RF COAXIAL RECEPTACLE(SMA)		C6			CK73GB1H103K	CHIP C	0.010UF K
9	3B	*	E37-1085-05	FLAT CABLE		C7			CK73GB1H471K	CHIP C	470PF K
10	2A	*	E37-1101-05	SPEAKER WIRE(RED)		C8			CC73GCH1H100D	CHIP C	10PF D
11	2A	*	E37-1102-05	SPEAKER WIRE(BLACK)		C9			CK73GB1H103K	CHIP C	0.010UF K
12	3A	*	E72-0416-13	BATT TERMINAL BLOCK		C10			CC73GCH1H100D	CHIP C	10PF D
13		*	G10-1315-04	FIBROUS SHEET(CABINET)		C11-13			CC73GCH1H101J	CHIP C	100PF J
14	2B	*	G11-4090-04	SHEET(FINAL FET)		C14			C92-0713-05	CHIP-TAN	10UF 6.3WV
15	3B	*	G11-4254-04	SHEET(PTT)		C15			CK73GB1H102K	CHIP C	1000PF K
16	3A	*	G11-4287-04	SHEET(TERMINALBLOCK)		C16			CC73GCH1H470J	CHIP C	47PF J
17	3A	*	G11-4289-04	SHEET(CHASSIS)		C18,19			CK73GB1C104K	CHIP C	0.10UF K
18	2B	*	G13-2001-04	CUSHION(CHASSIS)		C22			CK73GB1C104K	CHIP C	0.10UF K
19	2B	*	G13-2014-04	CUSHION(CHASSISBOTTOM)		C24			C92-0713-05	CHIP-TAN	10UF 6.3WV
20	2B	*	G13-2017-04	CUSHION		C25			CK73GB1H471K	CHIP C	470PF K
21	2B	*	G13-2018-04	CUSHION		C27			CK73GB1H103K	CHIP C	0.010UF K
22	3A	*	G13-2019-04	CUSHION		C28			CC73GCH1H560J	CHIP C	56PF J
23	2B	*	G13-2020-04	CUSHION		C29			CK73GB1H471K	CHIP C	470PF K
24	3A	*	G53-1579-02	PACKING		C30			CC73GCH1H220J	CHIP C	22PF J
25	2B	*	G53-1580-03	PACKING(CHASSIS)		C31			CC73GCH1H560J	CHIP C	56PF J
26	1B	*	G53-1581-02	PACKING(SPEAKER)		C32			C92-0002-05	CHIP-TAN	0.22UF 35WV
27	3B	*	G53-1582-03	PACKING(BATT TERMINAL BLOCK)		C33			CC73GCH1H470J	CHIP C	47PF J
28	3C	*	H12-3150-02	PACKING FIXTURE		C34			CK73GB1H471K	CHIP C	470PF K
29		*	H25-2345-04	PROTECTION BAG		C35			CC73GCH1H680J	CHIP C	68PF J
30	1D	*	H52-2000-02	ITEM CARTON CASE		C36			C92-0585-05	CHIP-TAN	4.7UF 16WV
31	2A	*	J19-5454-03	HOLDER		C37			CK73GB1H103K	CHIP C	0.010UF K
32	2D	*	J21-8464-04	HARDWARE FIXTURE	ACCESSORY	C38,39			C92-0002-05	CHIP-TAN	0.22UF 35WV
33	2C	*	J29-0701-05	HOOK	ACCESSORY	C40			CK73GB1H183K	CHIP C	0.018UF K
34	3A	*	J30-1275-04	SPACER(CH KNOB)		C41,42			CK73GB1A105K	CHIP C	1.0UF K
35	3A	*	J30-1281-04	SPACER(CH KNOB)		C43,44			CC73HCH1H101J	CHIP C	100PF J
36		*	J30-1283-04	SPACER		C45			CC73HCH1H020B	CHIP C	2.0PF B
37	1A	*	K29-9278-13	KNOB(VOLUME)		C46			CC73HCH1H270J	CHIP C	27PF J
38	1B	*	K29-9279-03	KNOB(PTT)		C47			CK73GB1H471K	CHIP C	470PF K
39	3A	*	K29-9280-13	KNOB(CH SELECTOR)		C48			CC73HCH1H110J	CHIP C	11PF J
A	3A		N14-0583-04	CIRCULAR NUT(CH)		C49			CC73HCH1H330J	CHIP C	33PF J
B	3A	*	N14-0805-04	CIRCULAR NUT(VOLUME)		C50			CC73HCH1H050C	CHIP C	5.0PF C
C	3A		N30-2604-46	PAN HEAD MACHINE SCREW		C51			CC73HCH1H150J	CHIP C	12PF J
D	3B		N30-2612-46	PAN HEAD MACHINE SCREW		C52			CC73GCH1H050C	CHIP C	5.0PF C
E	3A,3B		N30-3006-45	PAN HEAD MACHINE SCREW		C53			CC73HCH1H020B	CHIP C	2.0PF B
F	2D		N35-3004-45	BINDING HEAD MACHINE SCREW		C54			CC73HCH1H050C	CHIP C	5.0PF C
G	3A,3B	*	N78-2040-46	PAN HEAD TAPTITE SCREW		C55,56			CC73HCH1H010B	CHIP C	1.0PF B
H	2A,2B		N83-2005-46	PAN HEAD TAPTITE SCREW		C57			CC73GCH1H030C	CHIP C	3.0PF C
40	2A	*	R31-0650-05	VARIABLE RESISTOR		C58			CC73HCH1H050B	CHIP C	5.0PF B
41	2A		S60-0420-05	ROTARY SWITCH		C59			CC73GCH1H050C	CHIP C	5.0PF C
						C60			CC73HCH1H040B	CHIP C	4.0PF B
						C61			CK73HB1H471K	CHIP C	470PF K
						C62			CC73HCH1H070B	CHIP C	7.0PF B

PARTS LIST

TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C63			CC73GCH1H100D	CHIP C 10PF D		C360			CC73GCH1H3R5B	CHIP C 3.5PF B	
C64			CC73HCH1H050B	CHIP C 5.0PF B		C361			CC73GCH1H2R5B	CHIP C 2.5PF B	
C65			CC73HCH1H101J	CHIP C 100PF J		C363			CC73GCH1H4R5B	CHIP C 4.5PF B	
C66			CC73HCH1H100B	CHIP C 10PF B		C364			CC73GCH1H020B	CHIP C 2.0PF B	
C67			CK73HB1H471K	CHIP C 470PF K		C368			CC73GCH1H150J	CHIP C 15PF J	
C68			CK73GB1H471K	CHIP C 470PF K		C371			CC73GCH1H010B	CHIP C 1.0PF B	
C69			CC73HCH1H050B	CHIP C 5.0PF B		C372			CK73GB1H471K	CHIP C 470PF K	
C70			CK73HB1H471K	CHIP C 470PF K		C401			CK73GB1H182K	CHIP C 1800PF K	
C71			CC73GCH1H0R5B	CHIP C 0.5PF B		C402,403			CC73GCH1H331J	CHIP C 330PF J	
C72			CC73HCH1H0R5B	CHIP C 0.5PF B		C405			CC73GCH1H390J	CHIP C 39PF J	
C73			CK73GB1H471K	CHIP C 470PF K		C406			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C74			CC73HCH1H100D	CHIP C 10PF D		C407			CK73GB1H103K	CHIP C 0.010UF K	
C75,76			CK73HB1H471K	CHIP C 470PF K		C408			CK73GB1C104K	CHIP C 0.10UF K	
C77			C92-0713-05	CHIP-TAN 10UF 6.3WV		C409			CC73GCH1H680J	CHIP C 68PF J	
C78			CK73HB1H471K	CHIP C 470PF K		C410			CK73GB1H471K	CHIP C 470PF K	
C80			CC73HCH1H070D	CHIP C 7.0PF D		C411-413			CK73GB1C104K	CHIP C 0.10UF K	
C82			CC73HCH1H330J	CHIP C 33PF J		C414			CC73GCH1H100D	CHIP C 10PF D	
C83-85			CK73HB1H471K	CHIP C 470PF K		C415			CK73GB1H471K	CHIP C 470PF K	
C86			CC73HCH1H070D	CHIP C 7.0PF D		C416,417			CK73GB1H103K	CHIP C 0.010UF K	
C92			CK73GB1H471K	CHIP C 470PF K		C418			CK73GB1H471K	CHIP C 470PF K	
C94,95			CK73HB1A104K	CHIP C 0.10UF K		C419			CC73GCH1H010B	CHIP C 1.0PF B	
C201,202			CK73GB1H471K	CHIP C 470PF K		C420			CK73GB1C104K	CHIP C 0.10UF K	
C205			CK73GB1A224K	CHIP C 0.22UF K		C421			CC73GCH1H080B	CHIP C 8.0PF B	
C223			CK73GB1H471K	CHIP C 470PF K		C422			CK73GB1H103K	CHIP C 0.010UF K	
C224			CC73GCH1H070D	CHIP C 7.0PF D		C424			CK73GB1H103K	CHIP C 0.010UF K	
C226			CK73GB1H471K	CHIP C 470PF K		C425			CC73GCH1H060D	CHIP C 6.0PF D	
C233			CK73GB1H471K	CHIP C 470PF K		C426			CC73GCH1H020B	CHIP C 2.0PF B	
C241			CK73GB1H471K	CHIP C 470PF K		C427			CC73GCH1H100D	CHIP C 10PF D	
C242			CC73GCH1H060D	CHIP C 6.0PF D		C428			CK73GB1H471K	CHIP C 470PF K	
C243			CK73GB1C104K	CHIP C 0.10UF K		C429			CC73GCH1H120J	CHIP C 12PF J	
C249			CC73GCH1H130J	CHIP C 13PF J		C430			CK73GB1H471K	CHIP C 470PF K	
C255			CK73GB1H471K	CHIP C 470PF K		C431			CK73GB1H103K	CHIP C 0.010UF K	
C258			CK73GB1C104K	CHIP C 0.10UF K		C432			CK73GB1H471K	CHIP C 470PF K	
C280			CC73GCH1H330J	CHIP C 33PF J		C434			CC73GCH1H050B	CHIP C 5.0PF B	
C282			CC73GCH1H330G	CHIP C 33PF G		C435			CK73GB1H471K	CHIP C 470PF K	
C283			CC73GCH1H100D	CHIP C 10PF D		C439			CK73GB1H471K	CHIP C 470PF K	
C284			CC73GCH1H200J	CHIP C 20PF J		C445			CC73GCH1H4R5B	CHIP C 4.5PF B	
C286			C92-0565-05	CHIP-TAN 6.8UF 10WV		C447			CC73GCH1H470J	CHIP C 47PF J	
C288			CK73GB1A105K	CHIP C 1.0UF K		C448			CC73GCH1H030B	CHIP C 3.0PF B	
C290-293			CK73GB1H471K	CHIP C 470PF K		C456			CK73HB1H471K	CHIP C 470PF K	
C294			CC73GCH1H101J	CHIP C 100PF J		C464			CC73GCH1H020B	CHIP C 2.0PF B	
C295			CC73GCH1H270J	CHIP C 27PF J		C465			CC73GCH1H010B	CHIP C 1.0PF B	
C296			CK73GB1H471K	CHIP C 470PF K		C466			CC73GCH1H470J	CHIP C 47PF J	
C297			CK73GB1H103K	CHIP C 0.010UF K		C467			CK73HB1H471K	CHIP C 470PF K	
C298			CK73GB1C104K	CHIP C 0.10UF K		C468,469			CC73GCH1H030B	CHIP C 3.0PF B	
C299			CK73GB1A105K	CHIP C 1.0UF K		C470			CK73HB1H471K	CHIP C 470PF K	
C300			CC73GCH1H180J	CHIP C 18PF J		C471			CC73GCH1H470J	CHIP C 47PF J	
C301			CK73GB1H103K	CHIP C 0.010UF K		C472			C92-0714-05	CHIP-TAN 4.7UF 6.3WV	
C308			CC73GCH1H270J	CHIP C 27PF J		C473			CC73HCH1H060B	CHIP C 6.0PF B	
C309			CK73GB1H471K	CHIP C 470PF K		C474,475			CK73GB1H471K	CHIP C 470PF K	
C317			CC73GCH1H010B	CHIP C 1.0PF B		C478,479			CK73HB1H471K	CHIP C 470PF K	
C326			CK73GB1H471K	CHIP C 470PF K		C481,482			CK73GB1H471K	CHIP C 470PF K	
C349			CC73GCH1H070B	CHIP C 7.0PF B		C483			CC73GCH1H4R5B	CHIP C 4.5PF B	
C351			CC73GCH1H270J	CHIP C 27PF J		C484			CC73GCH1H470J	CHIP C 47PF J	
C352			CK73GB1H471K	CHIP C 470PF K		C485			CC73GCH1H030B	CHIP C 3.0PF B	
C353			CC73GCH1H040B	CHIP C 4.0PF B		C487			CK73GB1H471K	CHIP C 470PF K	
C355			CC73GCH1H050B	CHIP C 5.0PF B		C488			CC73GCH1H030B	CHIP C 3.0PF B	
C356			CC73GCH1H101J	CHIP C 100PF J		C489			CC73GCH1H470J	CHIP C 47PF J	
C358			CC73GCH1H030B	CHIP C 3.0PF B		C491			CC73GCH1H060B	CHIP C 6.0PF B	
C359			CC73GCH1H1R5B	CHIP C 1.5PF B		C492			CC73GCH1H030B	CHIP C 3.0PF B	

PARTS LIST

TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C493			CK73GB1H471K	CHIP C 470PF K		C675,676			C92-0804-05	CHIP-TAN 1.5UF 16WV	
C494			CK73GB1H103K	CHIP C 0.010UF K		C677			CK73GB1H332K	CHIP C 3300PF K	
C495			CC73GCH1H010C	CHIP C 1.0PF C		C678			CK73FB1C474K	CHIP C 0.47UF K	
C501			CK73GB1H471K	CHIP C 470PF K		C679			CC73GCH1H101J	CHIP C 100PF J	
C504			CK73HB1H471K	CHIP C 470PF K		C680			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C506,507			CK73GB1A105K	CHIP C 1.0UF K		C681			CK73GB1C273K	CHIP C 0.027UF K	
C508			CK73GB1H471K	CHIP C 470PF K		C684			CK73GB1C104K	CHIP C 0.10UF K	
C601			CK73GB1A224K	CHIP C 0.22UF K		C686			CK73GB1C473K	CHIP C 0.047UF K	
C605		*	C92-0632-05	CHIP-TAN 6.8UF 6.3WV		C687			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C607			CK73GB1H103K	CHIP C 0.010UF K		C688			CC73GCH1H221J	CHIP C 220PF J	
C608			CK73GB1H392K	CHIP C 3900PF K		C689			CK73GB1C223K	CHIP C 0.022UF K	
C609			CK73GB1H103K	CHIP C 0.010UF K		C690			CK73GB1H102K	CHIP C 1000PF K	
C610			C92-0714-05	CHIP-TAN 4.7UF 6.3WV		C691			C92-0665-05	CHIP-TAN 100UF 6.3WV	
C611			CK73GB1A105K	CHIP C 1.0UF K		C692			CC73GCH1H221J	CHIP C 220PF J	
C613-615			CK73GB1C104K	CHIP C 0.10UF K		C693			CK73GB1H471K	CHIP C 470PF K	
C616			CK73GB1H332K	CHIP C 3300PF K		C695			CK73GB1H471K	CHIP C 470PF K	
C618			CK73GB1C104K	CHIP C 0.10UF K		C696			CK73GB1A224K	CHIP C 0.22UF K	
C619			CK73GB1H392K	CHIP C 3900PF K		C801			CK73GB1A105K	CHIP C 1.0UF K	
C621,622			C92-0714-05	CHIP-TAN 4.7UF 6.3WV		C802			CK73GB1H103K	CHIP C 0.010UF K	
C624			CK73GB1C104K	CHIP C 0.10UF K		C803,804			CK73GB1A105K	CHIP C 1.0UF K	
C625			CC73GCH1H680J	CHIP C 68PF J		C805			CK73GB1H471K	CHIP C 470PF K	
C627			CK73GB1E123K	CHIP C 0.012UF K		C807			CK73GB1H471K	CHIP C 470PF K	
C628			CK73GB1H222K	CHIP C 2200PF K		C809			CK73GB1A105K	CHIP C 1.0UF K	
C629			CK73GB1C104K	CHIP C 0.10UF K		C811			CK73GB1C104K	CHIP C 0.10UF K	
C630			CC73GCH1H101J	CHIP C 100PF J		C812			CK73GB1H103K	CHIP C 0.010UF K	
C631			CK73GB1E123K	CHIP C 0.012UF K		C814			CK73GB1H103K	CHIP C 0.010UF K	
C632			CK73GB1C104K	CHIP C 0.10UF K		C816,817			CK73GB1H471K	CHIP C 470PF K	
C633			CC73GCH1H020B	CHIP C 2.0PF B		C818			CK73GB1H103K	CHIP C 0.010UF K	
C634			CK73GB1H102K	CHIP C 1000PF K		C819			CK73GB1H471K	CHIP C 470PF K	
C635			CK73GB1C104K	CHIP C 0.10UF K		C820,821			CK73GB1A105K	CHIP C 1.0UF K	
C636			CK73GB1C683K	CHIP C 0.068UF K		C822			CK73GB1H471K	CHIP C 470PF K	
C637			CC73GCH1H101J	CHIP C 100PF J		C823			CK73GB1H103K	CHIP C 0.010UF K	
C638			CK73GB1H471K	CHIP C 470PF K		C825			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C639			CC73GCH1H470J	CHIP C 47PF J		C828			CK73GB1H471K	CHIP C 470PF K	
C640			CC73GCH1H101J	CHIP C 100PF J		C830			CK73GB1C104K	CHIP C 0.10UF K	
C641,642			CK73GB1C104K	CHIP C 0.10UF K		C833			CK73GB1A105K	CHIP C 1.0UF K	
C643			CC73GCH1H680J	CHIP C 68PF J		C834			CK73GB1C104K	CHIP C 0.10UF K	
C645			CK73GB0J225K	CHIP C 2.2UF K		C835,836			CK73GB1A105K	CHIP C 1.0UF K	
C646			CK73GB1H821K	CHIP C 820PF K		C837			CK73GB1H471K	CHIP C 470PF K	
C647			CK73GB1H471K	CHIP C 470PF K		C840			CK73GB1H471K	CHIP C 470PF K	
C648,649			CK73GB1C104K	CHIP C 0.10UF K		C841			CK73GB1H103K	CHIP C 0.010UF K	
C650			C92-0713-05	CHIP-TAN 10UF 6.3WV		C842			CC73GCH1H150J	CHIP C 15PF J	
C652			CK73GB1H471K	CHIP C 470PF K		C843			CC73GCH1H030C	CHIP C 3.0PF C	
C653			CK73GB1A224K	CHIP C 0.22UF K		C845			CC73GCH1H150J	CHIP C 15PF J	
C654			CK73GB1H103K	CHIP C 0.010UF K		C846			CK73GB1H103K	CHIP C 0.010UF K	
C655			CK73GB1C223K	CHIP C 0.022UF K		C847			C92-0712-05	CHIP-TAN 22UF 6.3WV	
C656			CK73GB1C104K	CHIP C 0.10UF K		C849			CK73GB1H471K	CHIP C 470PF K	
C657			CC73GCH1H470J	CHIP C 47PF J		C850			CK73GB1H103K	CHIP C 0.010UF K	
C658			CK73GB1C104K	CHIP C 0.10UF K		C852,853			CK73GB1H471K	CHIP C 470PF K	
C659			CK73GB1H103K	CHIP C 0.010UF K		C854			CK73GB1H103K	CHIP C 0.010UF K	
C660			CK73GB1A105K	CHIP C 1.0UF K		TC1,2			C05-0384-05	CERAMIC TRIMMERCAP(10PF)	
C662,663			CK73GB1C104K	CHIP C 0.10UF K		CN801			E40-5932-05	PIN ASSY SOCKET	
C664			CK73GB1H102K	CHIP C 1000PF K		J601			E11-0457-05	PHONE JACK	
C665			CK73GB1H471K	CHIP C 470PF K		F801			F53-0190-05	FUSE	
C667			CK73GB1H471K	CHIP C 470PF K				*	J99-0374-04	ADHESIVE TAPE	
C668			CK73GB1H103K	CHIP C 0.010UF K		CD401			L79-1582-05	TUNING COIL	
C669			CK73GB1H471K	CHIP C 470PF K		CF401		*	L72-1008-05	CERAMIC FILTER	
C671			CK73GB1C104K	CHIP C 0.10UF K							
C672,673			CK73GB1H392K	CHIP C 3900PF K							
C674			CC73GCH1H221J	CHIP C 220PF J							

PARTS LIST

TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L1			L40-4795-85	SMALL FIXED INDUCTOR(4.7UH)		CP809-818			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
L3			L40-1581-86	SMALL FIXED INDUCTOR(0.15UH)		R1			RK73GB1J223J	CHIP R 22K J 1/16W	
L5			L92-0138-05	FERRITE CHIP		R2			RK73GB1J103J	CHIP R 10K J 1/16W	
L6			L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R3			RK73GB1J124J	CHIP R 120K J 1/16W	
L7			L92-0138-05	FERRITE CHIP		R4			R92-1252-05	CHIP R 00HM J 1/16W	
L8			L40-1885-92	SMALL FIXED INDUCTOR(180NH)		R5			RK73GB1J224J	CHIP R 220K J 1/16W	
L9			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R6			RK73GB1J473J	CHIP R 47K J 1/16W	
L10			L92-0163-05	BEADS CORE		R7			R92-1252-05	CHIP R 00HM J 1/16W	
L11			L40-1885-92	SMALL FIXED INDUCTOR(180NH)		R9			RK73GB1J393J	CHIP R 39K J 1/16W	
L12			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R12			RK73GB1J101J	CHIP R 100 J 1/16W	
L14			L41-1578-14	SMALL FIXED INDUCTOR		R13			R92-1252-05	CHIP R 00HM J 1/16W	
L15			L41-1878-14	SMALL FIXED INDUCTOR		R14			RK73GB1J222J	CHIP R 2.2K J 1/16W	
L16			L40-1275-92	SMALL FIXED INDUCTOR(12NH)		R15			R92-1252-05	CHIP R 00HM J 1/16W	
L17,18			L41-2285-03	SMALL FIXED INDUCTOR		R16			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L19			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R17			RK73GB1J101J	CHIP R 100 J 1/16W	
L20,21			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)		R18			RK73GB1J474J	CHIP R 470K J 1/16W	
L22			L92-0163-05	BEADS CORE		R19			RK73GB1J100J	CHIP R 10 J 1/16W	
L23			L40-2275-92	SMALL FIXED INDUCTOR(22NH)		R20,21			R92-1252-05	CHIP R 00HM J 1/16W	
L25			L40-2275-92	SMALL FIXED INDUCTOR(22NH)		R22			RK73GB1J821J	CHIP R 820 J 1/16W	
L205			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R23,24			RK73GB1J681J	CHIP R 680 J 1/16W	
L207			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R25			RK73GB1J103J	CHIP R 10K J 1/16W	
L208			L92-0138-05	FERRITE CHIP		R26			RK73GB1J223J	CHIP R 22K J 1/16W	
L209			L40-8265-92	SMALL FIXED INDUCTOR(8.2NH)		R27			RK73GB1J103J	CHIP R 10K J 1/16W	
L213			L40-8265-92	SMALL FIXED INDUCTOR(8.2NH)		R28			RK73GB1J393J	CHIP R 39K J 1/16W	
L216			L40-1575-54	SMALL FIXED INDUCTOR(15NH)		R29			RK73GB1J104J	CHIP R 100K J 1/16W	
L217			L92-0149-05	FERRITE CHIP		R30			RK73HB1J333J	CHIP R 33K J 1/16W	
L218			L40-1263-92	SMALL FIXED INDUCTOR(1.2NH)		R31			RK73GB1J560J	CHIP R 56 J 1/16W	
L220			L34-4602-05	AIR-CORE COIL		R32			RK73HB1J153J	CHIP R 15K J 1/16W	
L221			L92-0149-05	FERRITE CHIP		R33			RK73HB1J473J	CHIP R 47K J 1/16W	
L222			L40-2285-54	SMALL FIXED INDUCTOR(220NH)		R34			RK73GB1J473J	CHIP R 47K J 1/16W	
L223			L34-4572-05	AIR-CORE COIL		R35			RK73GB1J220J	CHIP R 22 J 1/16W	
L224-226			L34-4564-05	AIR-CORE COIL		R36			RK73HB1J100J	CHIP R 10 J 1/16W	
L227			L40-1092-81	SMALL FIXED INDUCTOR		R37			RK73HB1J181J	CHIP R 180 J 1/16W	
L401			L92-0138-05	FERRITE CHIP		R38			RK73HB1J100J	CHIP R 10 J 1/16W	
L402			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R39			RK73HB1J151J	CHIP R 150 J 1/16W	
L403			L40-5685-85	SMALL FIXED INDUCTOR(0.56UH)		R40			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L404			L40-2785-92	SMALL FIXED INDUCTOR(270NH)		R41			RK73GB1J154J	CHIP R 150K J 1/16W	
L405			L40-2775-92	SMALL FIXED INDUCTOR(27NH)		R43			RK73HB1J154J	CHIP R 150K J 1/16W	
L407-409			L41-6868-14	SMALL FIXED INDUCTOR		R44			RK73HB1J472J	CHIP R 4.7K J 1/16W	
L410			L92-0138-05	FERRITE CHIP		R46			RK73HB1J101J	CHIP R 100 J 1/16W	
L411			L41-2285-03	SMALL FIXED INDUCTOR		R47			RK73HB1J682J	CHIP R 6.8K J 1/16W	
L413,414			L41-6868-14	SMALL FIXED INDUCTOR		R48			RK73HB1J103J	CHIP R 10K J 1/16W	
L415			L41-4778-03	SMALL FIXED INDUCTOR		R49			RK73GJ1J333D*	CHIP R 33K D 1/16W	
L416			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)		R50			RK73HB1J331J	CHIP R 330 J 1/16W	
L601			L92-0140-05	FERRITE CHIP		R51			RK73GJ1J104D*	CHIP R 100K D 1/16W	
L602			L92-0149-05	FERRITE CHIP		R55			RK73HB1J222J	CHIP R 2.2K J 1/16W	
L801			L92-0149-05	FERRITE CHIP		R56			RK73HB1J470J	CHIP R 47 J 1/16W	
L802			L92-0140-05	FERRITE CHIP		R57			R92-1368-05	CHIP R 00HM	
L803-807			L92-0138-05	FERRITE CHIP		R58			RK73GB1J472J	CHIP R 4.7K J 1/16W	
X1		*	L77-1932-05	TCXO(16.8MHZ)		R202			RK73GB1J472J	CHIP R 4.7K J 1/16W	
X801		*	L77-1933-05	CRYSTAL RESONATOR(7.3728MHZ)		R203			R92-1252-05	CHIP R 00HM J 1/16W	
XF401		*	L71-0617-05	MCF(49.95MHZ)		R204			RK73GB1J153J	CHIP R 15K J 1/16W	
CP1,2			RK75HA1J473J	CHIP-COM 47K J 1/16W		R207			RK73GB1J333J	CHIP R 33K J 1/16W	
CP3,4			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R215			R92-1252-05	CHIP R 00HM J 1/16W	
CP801,802			RK75HA1J473J	CHIP-COM 47K J 1/16W		R222			RK73GB1J331J	CHIP R 330 J 1/16W	
CP803-805			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R224			RK73GB1J220J	CHIP R 22 J 1/16W	
CP806			RK75HA1J473J	CHIP-COM 47K J 1/16W		R229			RK73GB1J331J	CHIP R 330 J 1/16W	
CP807			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R230			RK73GB1J180J	CHIP R 18 J 1/16W	
CP808			RK75HA1J472J	CHIP-COM 4.7K J 1/16W		R231,232			RK73GB1J331J	CHIP R 330 J 1/16W	
						R234			RK73GB1J103J	CHIP R 10K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R235			RK73GB1J101J	CHIP R 100 J 1/16W		R601			R92-1252-05	CHIP R 00HM J 1/16W	
R237			RK73GB1J223J	CHIP R 22K J 1/16W		R602			RK73GB1J184J	CHIP R 180K J 1/16W	
R242			RK73GB1J124J	CHIP R 120K J 1/16W		R603			R92-1252-05	CHIP R 00HM J 1/16W	
R247			RK73GB1J473J	CHIP R 47K J 1/16W		R604			RK73GB1J184J	CHIP R 180K J 1/16W	
R251			R92-1252-05	CHIP R 00HM J 1/16W		R607-609			RK73GB1J103J	CHIP R 10K J 1/16W	
R252			RK73GB1J220J	CHIP R 22 J 1/16W		R610			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R253			R92-1252-05	CHIP R 00HM J 1/16W		R612			RK73GB1J273J	CHIP R 27K J 1/16W	
R255			R92-1252-05	CHIP R 00HM J 1/16W		R613			RK73GB1J824J	CHIP R 820K J 1/16W	
R256,257			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R615			RK73GB1J334J	CHIP R 330K J 1/16W	
R259,260			RK73GB1J473J	CHIP R 47K J 1/16W		R616			R92-1252-05	CHIP R 00HM J 1/16W	
R261			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R617			RK73GB1J473J	CHIP R 47K J 1/16W	
R262			R92-0670-05	CHIP R 00HM		R618		*	RK73GJ1J364D	CHIP R 360K D 1/16W	
R263			RK73GB1J101J	CHIP R 100 J 1/16W		R621			RK73GB1J473J	CHIP R 47K J 1/16W	
R264,265			RK73GH1J154D	CHIP R 150K D 1/16W		R622			RK73GB1J684J	CHIP R 680K J 1/16W	
R267-270			RK73GH1J154D	CHIP R 150K D 1/16W		R623			RK73GB1J274G	CHIP R 270K G 1/16W	
R271			RK73GB1J103J	CHIP R 10K J 1/16W		R624			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R272			RK73GB1J473J	CHIP R 47K J 1/16W		R625			RK73GB1J563J	CHIP R 56K J 1/16W	
R273			R92-1252-05	CHIP R 00HM J 1/16W		R626,627			RK73GB1J184J	CHIP R 180K J 1/16W	
R274			RK73GB1J105J	CHIP R 1.0M J 1/16W		R628			RK73GB1J224J	CHIP R 220K J 1/16W	
R275			RK73GB1J222J	CHIP R 2.2K J 1/16W		R629			RK73GB1J394J	CHIP R 390K J 1/16W	
R276,277			RK73GB1J104J	CHIP R 100K J 1/16W		R630			RK73GB1J684J	CHIP R 680K J 1/16W	
R278			R92-0670-05	CHIP R 00HM		R631			RK73GB1J394J	CHIP R 390K J 1/16W	
R279,280			RK73GB1J271J	CHIP R 270 J 1/16W		R632			RK73GB1J823J	CHIP R 82K J 1/16W	
R281,282			R92-1252-05	CHIP R 00HM J 1/16W		R633			RK73GB1J223J	CHIP R 22K J 1/16W	
R401			RK73GB1J100J	CHIP R 10 J 1/16W		R634			RK73GB1J153J	CHIP R 15K J 1/16W	
R403			RK73GB1J102J	CHIP R 1.0K J 1/16W		R636			RK73GB1J474J	CHIP R 470K J 1/16W	
R404			RK73GB1J334J	CHIP R 330K J 1/16W		R637			RK73GB1J394J	CHIP R 390K J 1/16W	
R406			RK73GB1J332J	CHIP R 3.3K J 1/16W		R639			RK73GB1J393J	CHIP R 39K J 1/16W	
R407			RK73GB1J474J	CHIP R 470K J 1/16W		R640			RK73GB1J184J	CHIP R 180K J 1/16W	
R408			RK73GB1J332J	CHIP R 3.3K J 1/16W		R641,642			RK73GB1J124J	CHIP R 120K J 1/16W	
R409			RK73GB1J392J	CHIP R 3.9K J 1/16W		R643			RK73GB1J184J	CHIP R 180K J 1/16W	
R412			RK73GB1J122J	CHIP R 1.2K J 1/16W		R644,645			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R413			RK73GB1J124J	CHIP R 120K J 1/16W		R646			RK73GB1J223J	CHIP R 22K J 1/16W	
R414			RK73GB1J681J	CHIP R 680 J 1/16W		R647			R92-1252-05	CHIP R 00HM J 1/16W	
R415			RK73GB1J472J	CHIP R 4.7K J 1/16W		R648			RK73GB1J103J	CHIP R 10K J 1/16W	
R416			RK73GB1J101J	CHIP R 100 J 1/16W		R649			RK73GB1J104J	CHIP R 100K J 1/16W	
R417			RK73GB1J470J	CHIP R 47 J 1/16W		R650			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R419			RK73GB1J222J	CHIP R 2.2K J 1/16W		R651			R92-1252-05	CHIP R 00HM J 1/16W	
R420			RK73GB1J151J	CHIP R 150 J 1/16W		R652			RK73GB1J273J	CHIP R 27K J 1/16W	
R422			RK73GB1J104J	CHIP R 100K J 1/16W		R653			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R423			RK73GB1J563J	CHIP R 56K J 1/16W		R654			RK73GB1J103J	CHIP R 10K J 1/16W	
R424			RK73HB1J104J	CHIP R 100K J 1/16W		R655,656			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R425			RK73GB1J563J	CHIP R 56K J 1/16W		R657			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R427			R92-1252-05	CHIP R 00HM J 1/16W		R658			RK73GB1J103J	CHIP R 10K J 1/16W	
R430,431			RK73HB1J105J	CHIP R 1.0M J 1/16W		R660			RK73GB1J154J	CHIP R 150K J 1/16W	
R438			RK73HB1J105J	CHIP R 1.0M J 1/16W		R661			RK73GB1J684J	CHIP R 680K J 1/16W	
R440			RK73HB1J221J	CHIP R 220 J 1/16W		R665			R92-1252-05	CHIP R 00HM J 1/16W	
R441			RK73HB1J101J	CHIP R 100 J 1/16W		R666			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R457			RK73HB1J104J	CHIP R 100K J 1/16W		R667			RK73GB1J104J	CHIP R 100K J 1/16W	
R459			RK73GB1J104J	CHIP R 100K J 1/16W		R668			RK73GB1J473J	CHIP R 47K J 1/16W	
R460			RK73GB1J683J	CHIP R 68K J 1/16W		R669			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R461			R92-1252-05	CHIP R 00HM J 1/16W		R670			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R462,463			RK73GB1J105J	CHIP R 1.0M J 1/16W		R671			RK73GB1J683J	CHIP R 68K J 1/16W	
R464			R92-0670-05	CHIP R 00HM		R672			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R465			RK73GB1J332J	CHIP R 3.3K J 1/16W		R673			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R469			RK73GB1J221J	CHIP R 220 J 1/16W		R674			R92-1252-05	CHIP R 00HM J 1/16W	
R471			RK73GB1J104J	CHIP R 100K J 1/16W		R675			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R474			RK73GB1J103J	CHIP R 10K J 1/16W		R676			RK73GB1J151J	CHIP R 150 J 1/16W	
R475			RK73GB1J473J	CHIP R 47K J 1/16W		R677-679			R92-1252-05	CHIP R 00HM J 1/16W	
R476			RK73GB1J103J	CHIP R 10K J 1/16W		R681			RK73GB1J222J	CHIP R 2.2K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-673X-XX)


Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R682			RK73GB1J100J	CHIP R 10 J 1/16W		D9			1SV325	VARIABLE CAPACITANCE DIODE	
R683			RK73GB1J474J	CHIP R 470K J 1/16W		D10			1SV278	VARIABLE CAPACITANCE DIODE	
R684			RK73GB1J182J	CHIP R 1.8K J 1/16W		D11			HSC277	DIODE	
R686			RK73GB1J471J	CHIP R 470 J 1/16W		D201			HSC277	DIODE	
R687			RK73GB1J102J	CHIP R 1.0K J 1/16W		D203			HZU5CLL	ZENER DIODE	
R688,689			RK73GB1J101J	CHIP R 100 J 1/16W		D204			HVC131	DIODE	
R691			RK73GB1J333J	CHIP R 33K J 1/16W		D206			HVC131	DIODE	
R692			R92-1252-05	CHIP R 00HM J 1/16W		D208			HVC131	DIODE	
R693			RK73GB1J273J	CHIP R 27K J 1/16W		D212			HVC131	DIODE	
R694,695			R92-1252-05	CHIP R 00HM J 1/16W		D401			HSC277	DIODE	
R696			RK73GB1J103J	CHIP R 10K J 1/16W		D402-406			HVC369B	VARIABLE CAPACITANCE DIODE	
R697			R92-1252-05	CHIP R 00HM J 1/16W		D407			RB521S-30	DIODE	
R698			RK73GB1J152J	CHIP R 1.5K J 1/16W		D603-606			RB706F-40	DIODE	
R802			RK73GB1J101J	CHIP R 100 J 1/16W		D801			RB521S-30	DIODE	
R803,804			R92-1252-05	CHIP R 00HM J 1/16W		D805			1SR154-400	DIODE	
R805			RK73GB1J153J	CHIP R 15K J 1/16W		IC1			MB15E03SL	MOS IC	
R807			RK73GB1J103J	CHIP R 10K J 1/16W		IC201			TA75W01FU	MOS IC	
R808			RK73GB1J102J	CHIP R 1.0K J 1/16W		IC401			TA31136FN	MOS IC	
R809			RK73GB1J272J	CHIP R 2.7K J 1/16W		IC601	*		AQUA	MOS IC	
R810			RK73GB1J334J	CHIP R 330K J 1/16W		IC602			TC75S51FE	MOS IC	
R811			RK73GB1J332J	CHIP R 3.3K J 1/16W		IC603			TC75W51FU	MOS IC	
R812			RK73GB1J334J	CHIP R 330K J 1/16W		IC604			TC75S51FE	MOS IC	
R813			RK73GB1J332J	CHIP R 3.3K J 1/16W		IC605			TA7368F	MOS IC	
R814			RK73GB1J153J	CHIP R 15K J 1/16W		IC801			XC6204B502MR	MOS IC	
R815			R92-1252-05	CHIP R 00HM J 1/16W		IC802	*		PST9134NR	MOS IC	
R816			RK73GB1J224J	CHIP R 220K J 1/16W		IC803			XC61CN5002NR	MOS IC	
R817			RK73GB1J272J	CHIP R 2.7K J 1/16W		IC804	*		CAT24WC64JI	ROM IC	
R818			RK73GB1J821J	CHIP R 820 J 1/16W		IC805	*		30622MCA-7G7GP	MPU	
R819			RK73GB1J103J	CHIP R 10K J 1/16W		IC806			TC7W74FU	MOS IC	
R820			RK73GB1J561J	CHIP R 560 J 1/16W		Q1			DTC144EE	DIGITAL TRANSISTOR	
R821			RK73GB1J331J	CHIP R 330 J 1/16W		Q2,3			UMG9N	TRANSISTOR	
R823			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q4			KTC4082	TRANSISTOR	
R824			RK73GB1J183J	CHIP R 18K J 1/16W		Q5,6			2SK508NV(K52)	FET	
R825			RK73GB1J473J	CHIP R 47K J 1/16W		Q7			2SC5108(Y)	TRANSISTOR	
R827			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q8			2SJ347	FET	
R828			RK73GB1J332J	CHIP R 3.3K J 1/16W		Q9			2SC5108(Y)	TRANSISTOR	
R829			RK73GB1J272J	CHIP R 2.7K J 1/16W		Q10			2SC4617(S)	TRANSISTOR	
R830			RK73GB1J821J	CHIP R 820 J 1/16W		Q11			2SC5108(Y)	TRANSISTOR	
R833,834			RK73GB1J474D	CHIP R 470K D 1/16W		Q12			2SJ347	FET	
R835,836			RK73HB1J102J	CHIP R 1.0K J 1/16W		Q205			2SC5108(Y)	TRANSISTOR	
R839,840			RK73GB1J473J	CHIP R 47K J 1/16W		Q206	*		2SK3077	FET	
R841			R92-1252-05	CHIP R 00HM J 1/16W		Q207			2SK2596	FET	
R842			R92-1368-05	CHIP R 00HM		Q208			DTC114EE	DIGITAL TRANSISTOR	
R844			RK73GB1J473J	CHIP R 47K J 1/16W		Q209			2SK879(GR)	FET	
R845			R92-1368-05	CHIP R 00HM		Q210			DTC114EE	DIGITAL TRANSISTOR	
R847,848			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q211			2SK3476	FET	
R849			R92-1252-05	CHIP R 00HM J 1/16W		Q212			2SK1824	FET	
R851			R92-1368-05	CHIP R 00HM		Q213			DTA144EE	DIGITAL TRANSISTOR	
R852			RK73HB1J473J	CHIP R 47K J 1/16W		Q401			DTA144EE	DIGITAL TRANSISTOR	
R854			RK73GB1J680J	CHIP R 68 J 1/16W		Q402			2SC4649(N,P)	TRANSISTOR	
R855-857			RK73HB1J102J	CHIP R 1.0K J 1/16W		Q403,404			3SK318	FET	
R858			R92-1368-05	CHIP R 00HM		Q407,408			2SK1824	FET	
R859			RK73GB1J104J	CHIP R 100K J 1/16W		Q601,602			2SK1824	FET	
VR1			R12-7491-05	TRIMMING POT.(68K)		Q603			DTC144EE	DIGITAL TRANSISTOR	
S802-805			S70-0457-05	TACT SWITCH		Q604			2SA1362(GR)	TRANSISTOR	
MIC60			T91-0543-05	MIC ELEMENT		Q605			2SC4116(Y)	TRANSISTOR	
D3,4			1SV325	VARIABLE CAPACITANCE DIODE		Q606			2SA1586(Y,GR)	TRANSISTOR	
D7			1SV325	VARIABLE CAPACITANCE DIODE		Q607			DTC144EE	DIGITAL TRANSISTOR	
						Q608			2SK1588	FET	
						Q801			UMG3N	TRANSISTOR	

PARTS LIST

TX-RX UNIT (X57-673X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
Q802			UPA672T	FET							
Q803			FP210	TRANSISTOR							
Q804			UMG3N	TRANSISTOR							
Q805			UMG9N	TRANSISTOR							
Q806			KTA1298(Y)	TRANSISTOR							
Q807			UMG3N	TRANSISTOR							
Q808,809			DTA123JE	DIGITAL TRANSISTOR							
Q810			2SK1824	FET							
TH1			B57331V2104J	THERMISTOR							
TH600			B57331V2104J	THERMISTOR							

EXPLODED VIEW

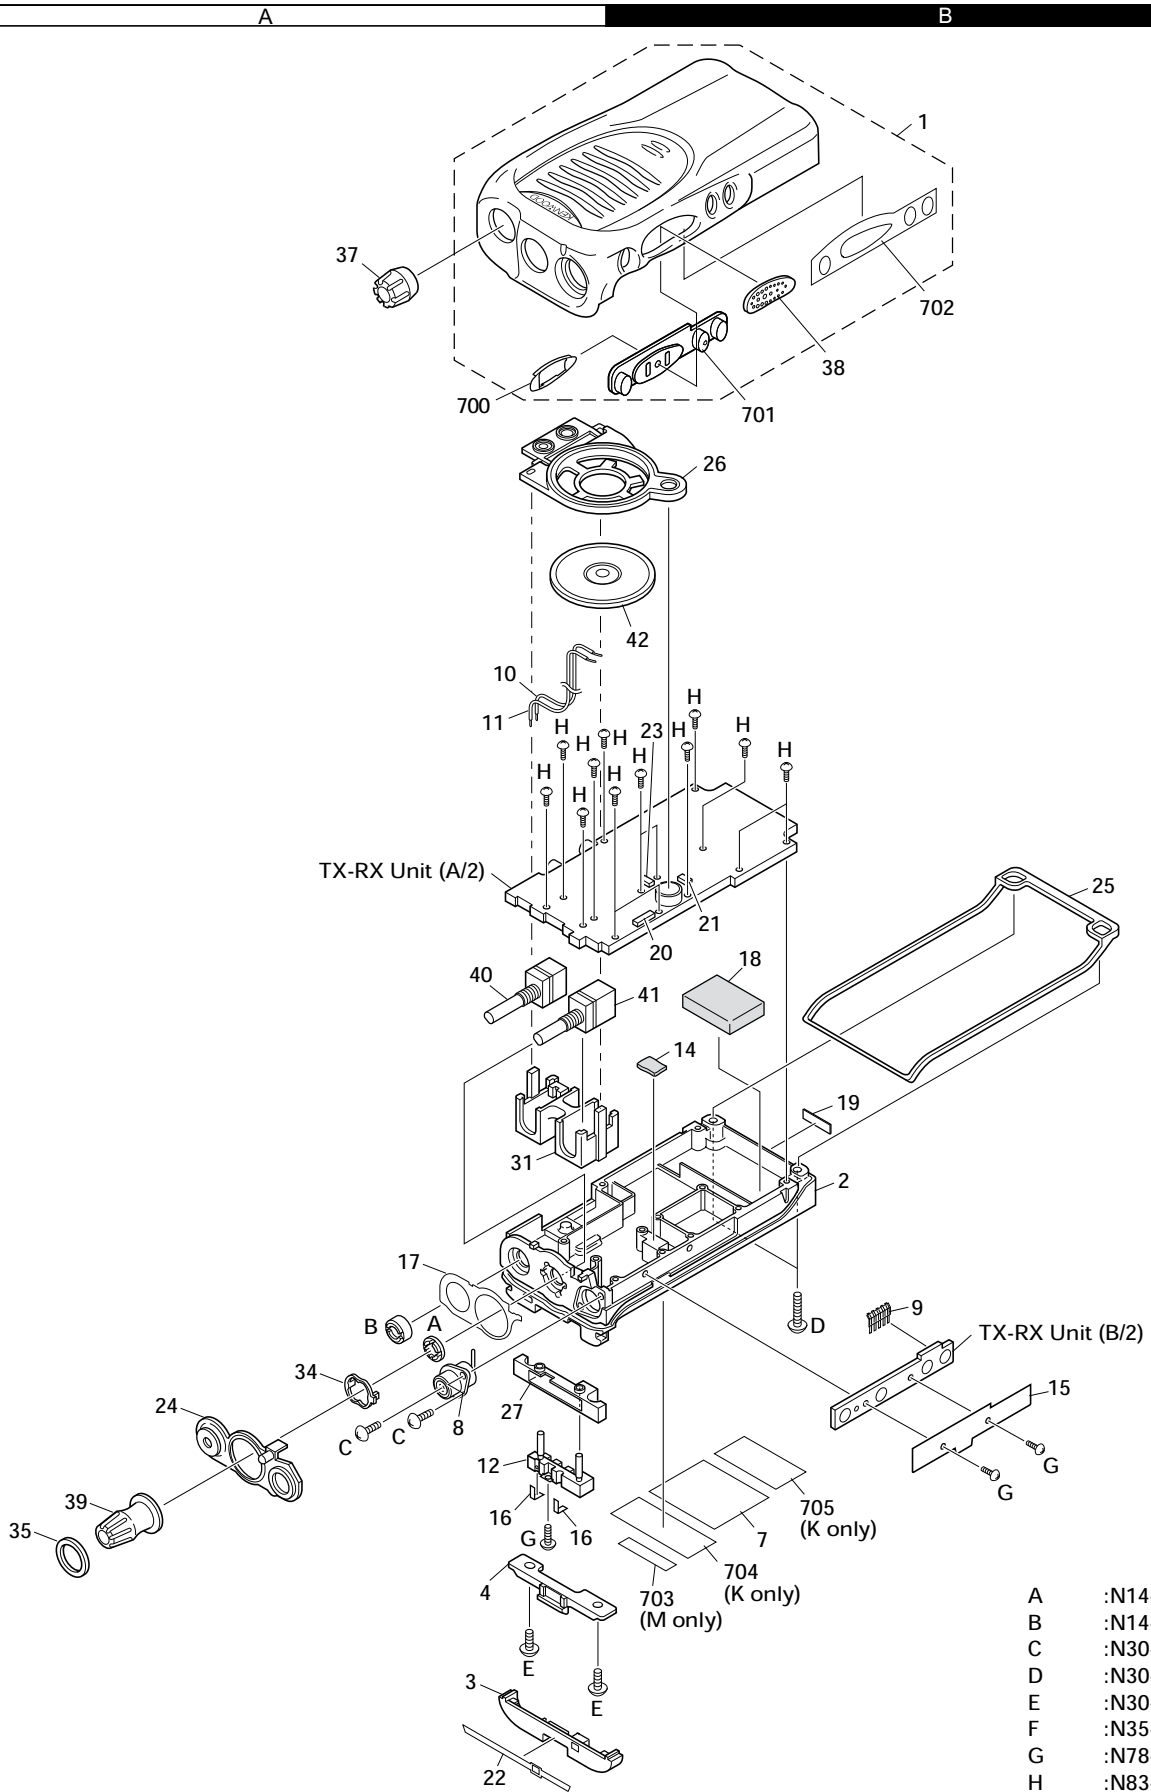

A	:N14-0583-04
B	:N14-0805-04
C	:N30-2604-46
D	:N30-2612-46
E	:N30-3006-45
F	:N35-3004-45
G	:N78-2040-46
H	:N83-2005-46

PACKING

