


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to ▽ mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
- (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

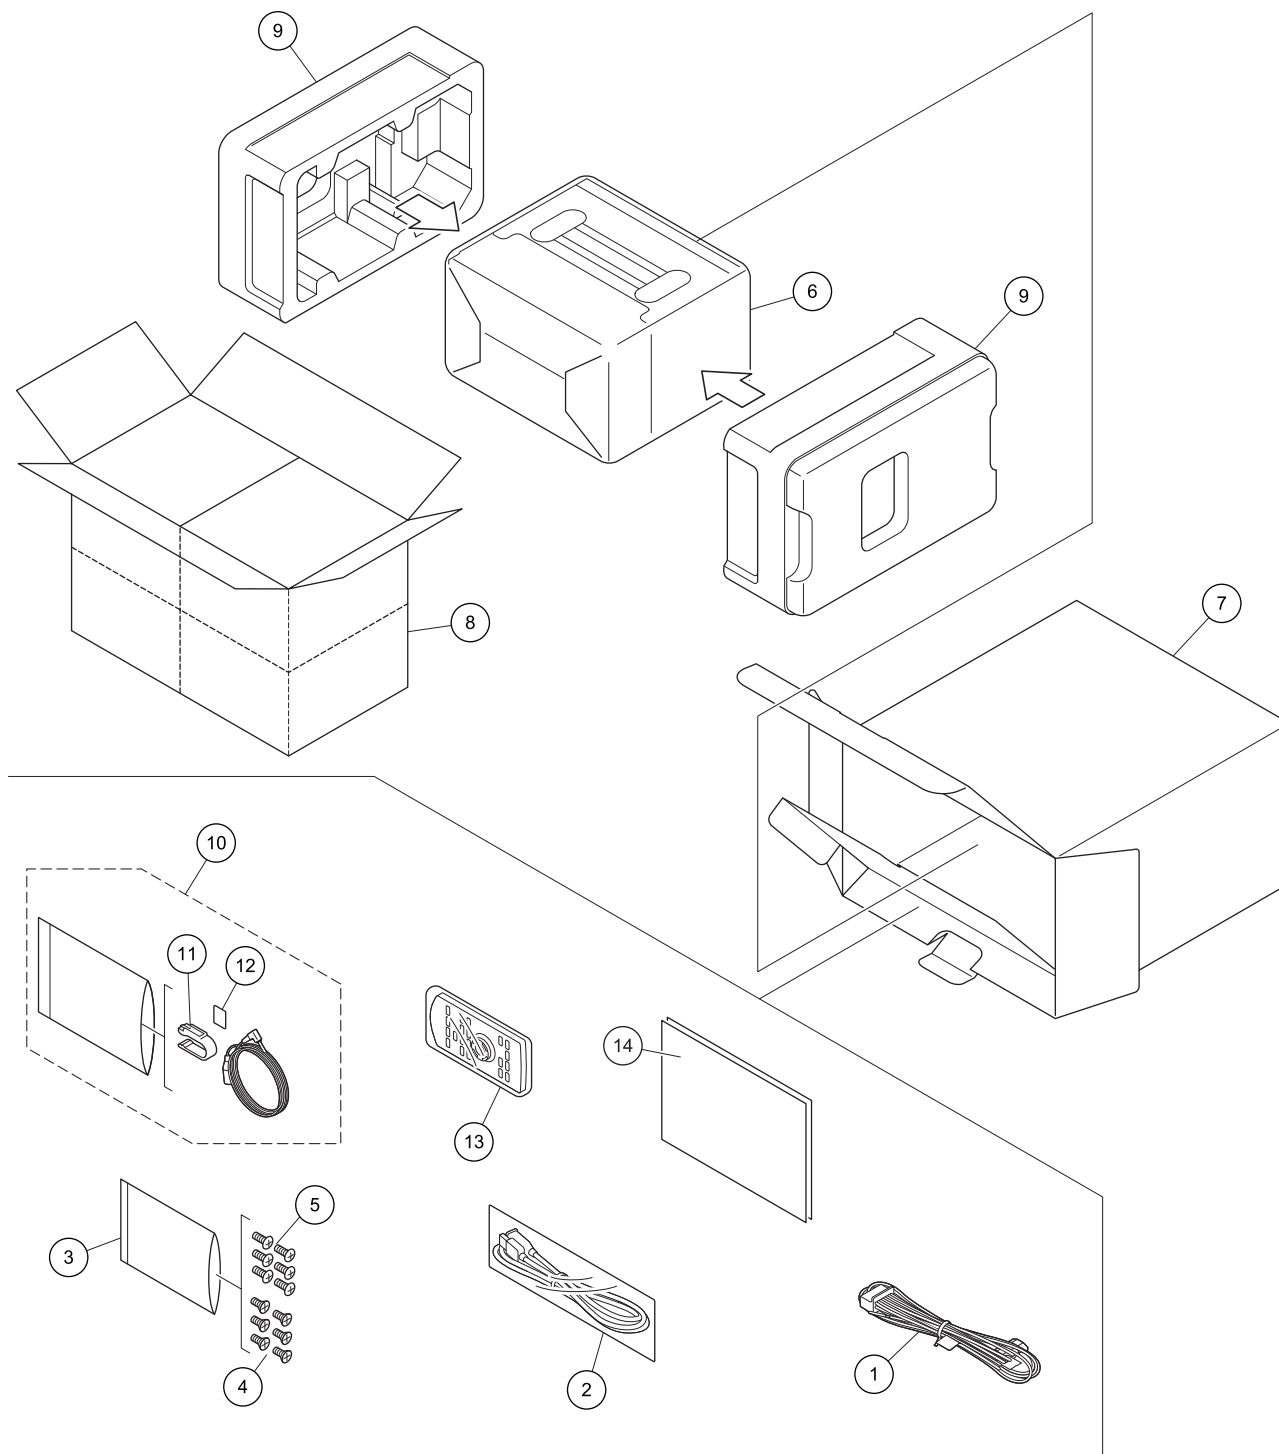

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Cord Assy	CDP1668	9	Protector	CHP4598
2	USB Extended Cable	CDP1587	10	Microphone Assy	CPM1083
3	Polyethylene Bag	CEG1160			
4	Screw	CRZ50P090FTC	11	Holder	CZN7192
5	Screw	TRZ50P080FTC	12	Cushion	CZN7193
			13	Card Remote Control Unit	CXE5116
6	Cover	CEG1359	14-1	Owner's Manual	CRD4758
7	Unit Box	See Contrast table (2)	* 14-2	Warranty Card	QRY3001
8	Contain Box	See Contrast table (2)			

(2) CONTRAST TABLE


AVH-X5600BHS/XNUC and AVH-X4600BT/XNUC are constructed the same except for the following:

Mark	No.	Description	AVH-X5600BHS/XNUC	AVH-X4600BT/XNUC
	7	Unit Box	CHG8409	CHG8413
	8	Contain Box	CHL8409	CHL8413

Owner's Manual,Installation Manual

Part No.	Language
CRD4758	English, French, Spanish(Espanol)

9.2 EXTERIOR (1)

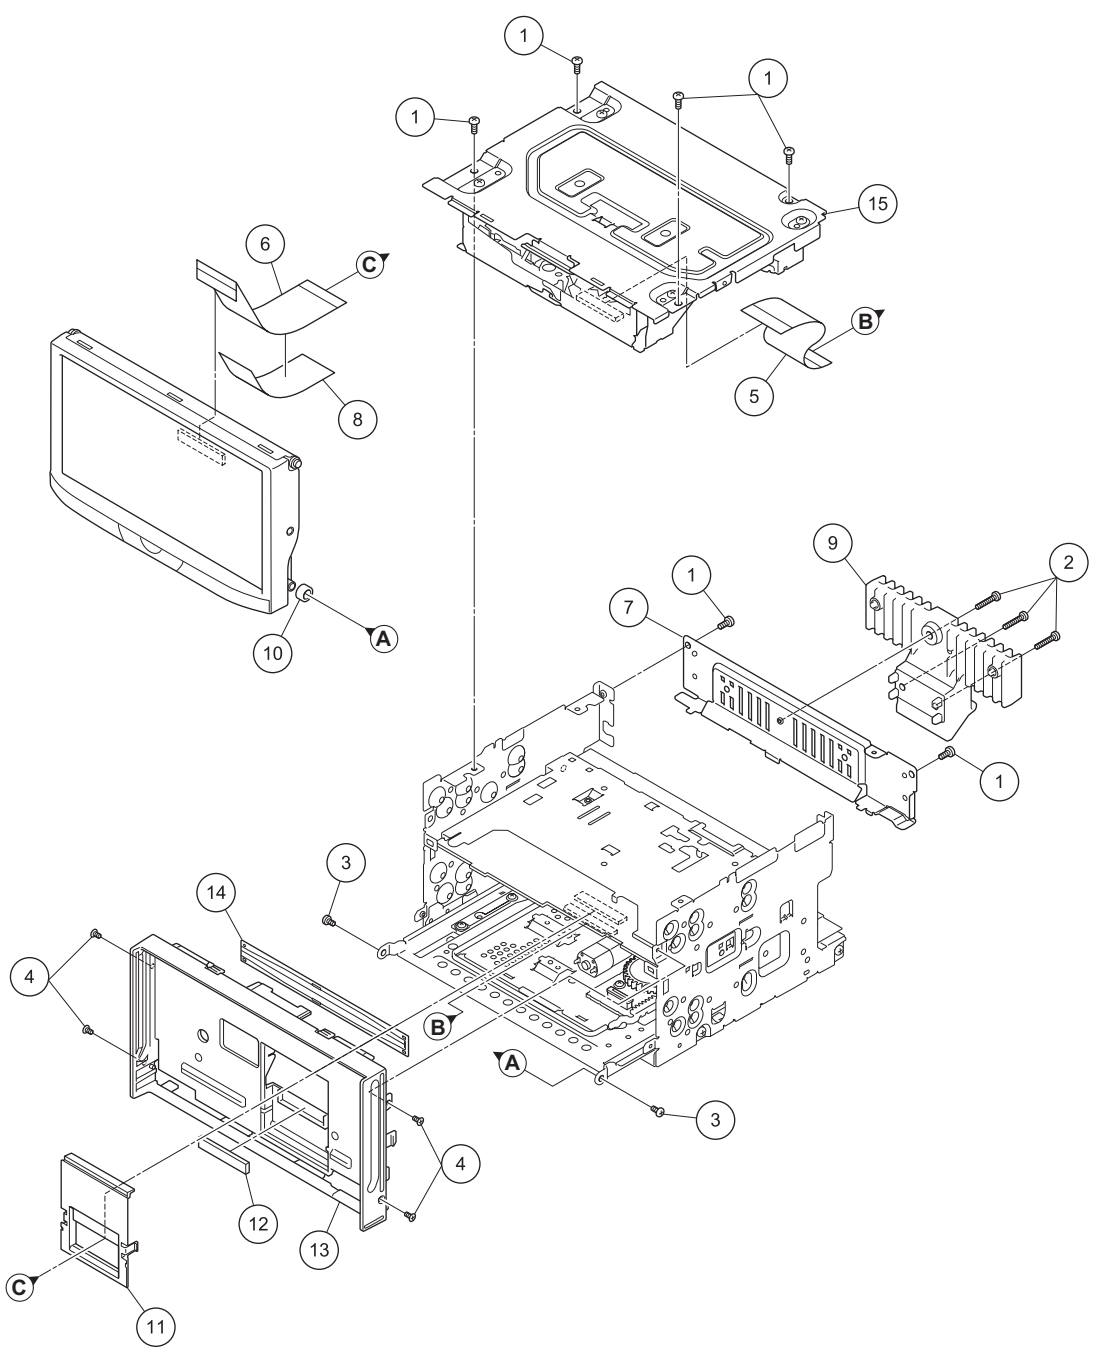


	5		6		7		8	
(1) EXTERIOR (1) SECTION PARTS LIST								
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	
	1	Screw	BSZ26P060FTC		9	Heat Sink	CNR2147	
	2	Screw	BSZ26P120FTC		10	Collar	CNW2038	A
	3	Screw	CBA1735					
	4	Screw (M2 x 3)	CBA1877		11	Cover	CNW2316	
	5	FFC	CDE9765		12	Cushion	CNN3206	
					13	Panel	See Contrast table (2)	
	6	FFC	CDE9769		14	Cover	QNM3029	
	7	Holder	YND5148		15	DVD Mechanism Module (LS2)	CXK8002	
	8	Sheet	CNN4247					

(2) CONTRAST TABLE

AVH-X5600BHS/XNUC and AVH-X4600BT/XNUC are constructed the same except for the following:

Mark	No.	Description	AVH-X5600BHS/XNUC	AVH-X4600BT/XNUC
	13	Panel	CNU2048	CNU2049

9.3 EXTERIOR (2)

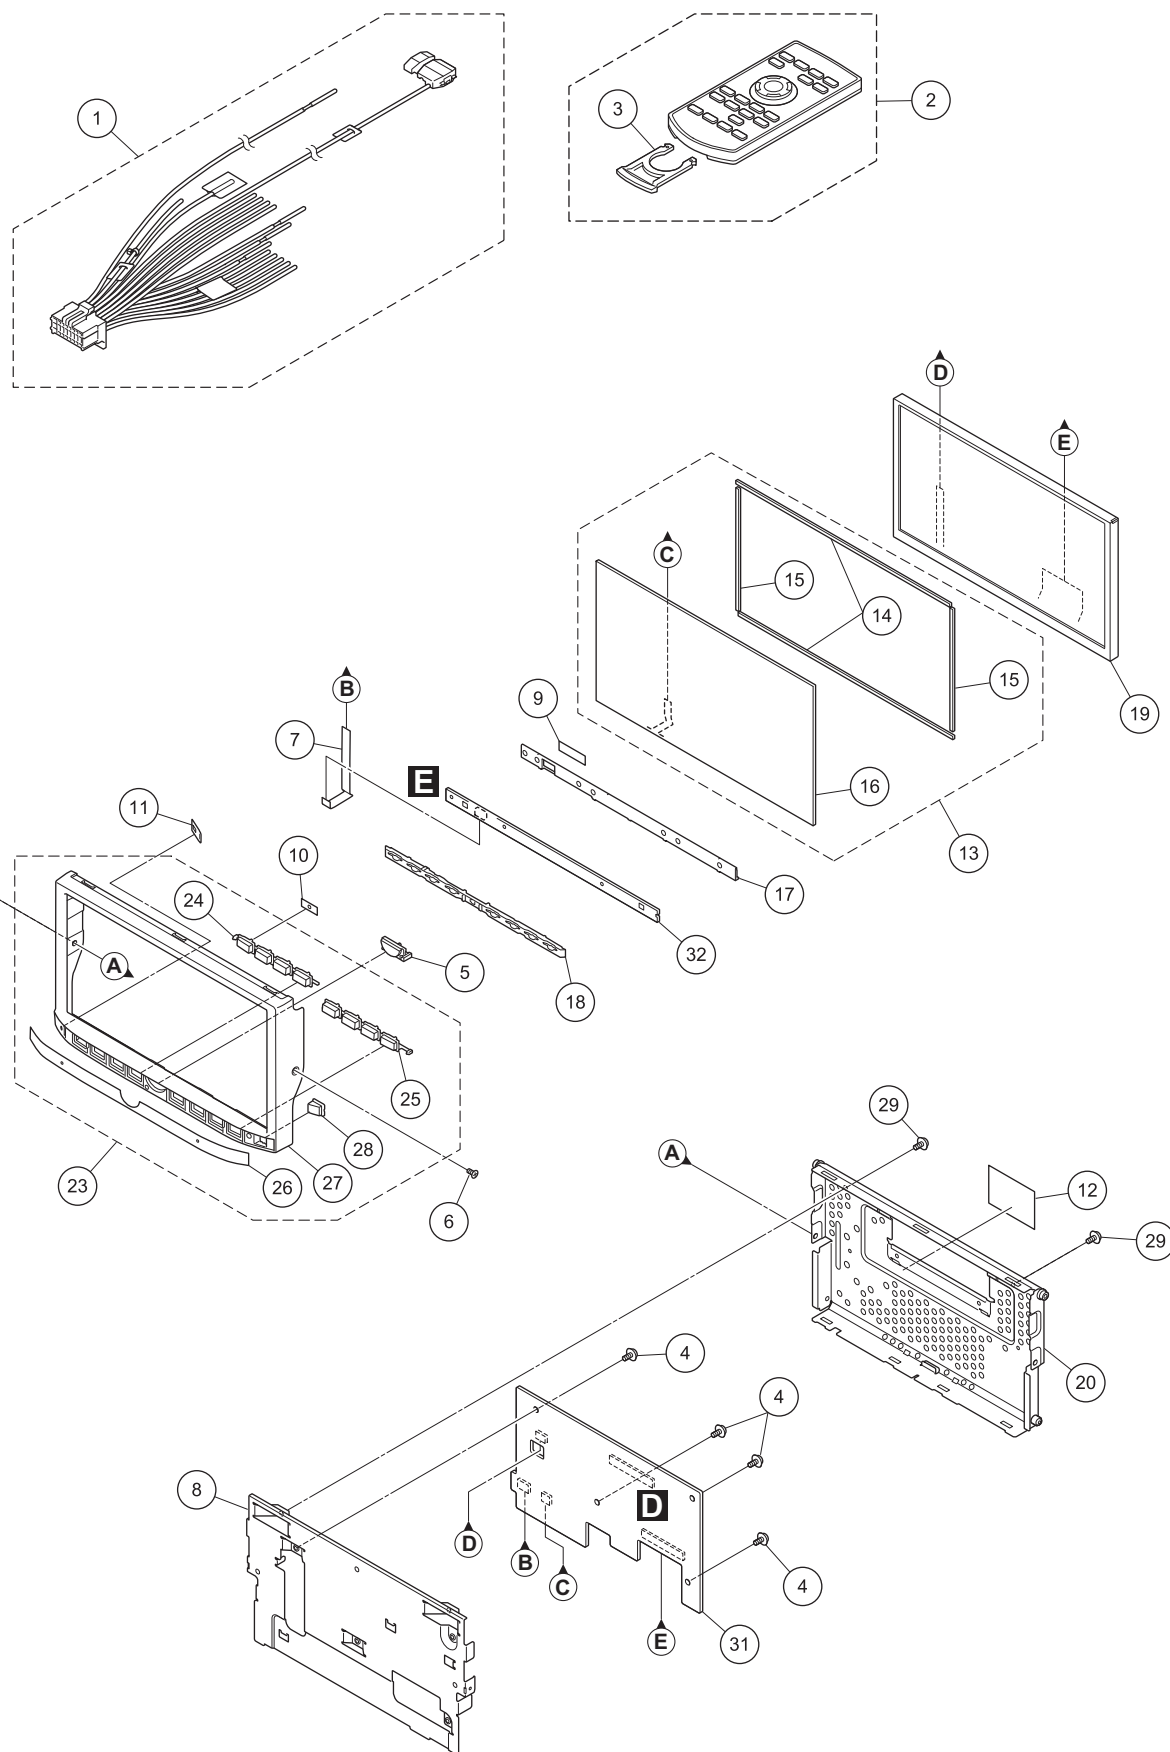

9.4 EXTERIOR (3)

A


B

C

D

E

F

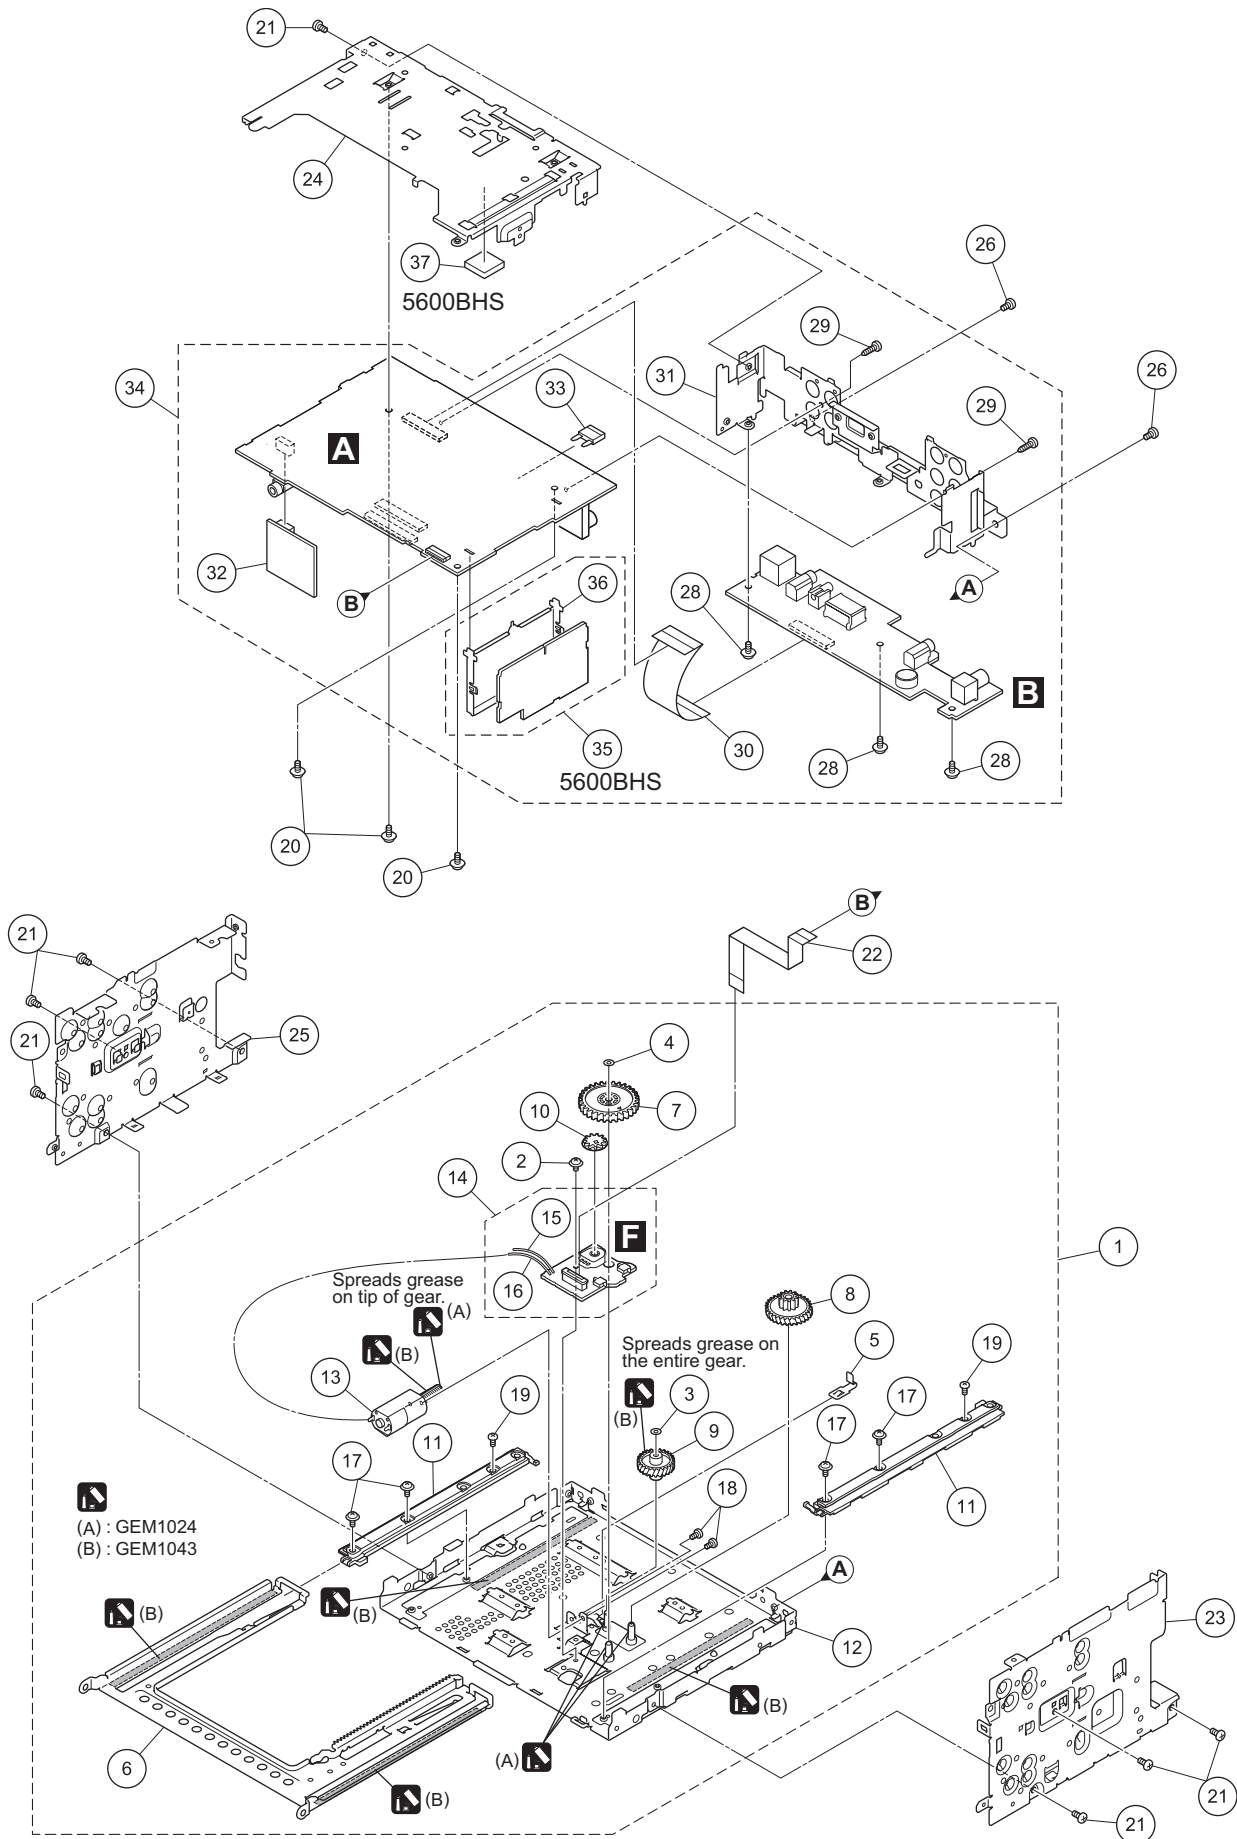

AVH-X5600BHS/XNUC

(1) EXTERIOR (3) SECTION PARTS LIST					
Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Drive Mechanism Unit	CXE3878	20	Screw	ASZ26P050FTC
2	Screw	AMZ26P030FTC	21	Screw	BSZ26P050FTC
3	Washer	CBF1039	22	FFC	CDE9554
4	Washer	CBF1064	23	Bracket	CND6335
5	Spring	EBL1034	24	Holder	CND6530
6	Frame	ENC2001	25	Bracket	CND6636
7	Gear	ENV1630	26	Screw	BSZ26P060FTC
8	Gear	ENV1631	27		
9	Gear	ENV1632	28	Screw	ASZ26P050FTC
10	Gear	ENV1635	29	Screw	BPZ26P080FTC
11	Guide	ENV3001	30	FFC	CDE9766
12	Chassis Unit	EXA4001	31	Holder	See Contrast table (2)
13	Motor Unit	EXA4003	32	BT Module (U1671)	CWX4506
14	PCB Unit (Service)	EXX2001	33	Fuse (10A)	YEK5001
* 15	Cord (Green)	CDC1056	34	Service Unit (Mother I/F)	See Contrast table (2)
* 16	Cord (White)	CDC1057	35	WWR Core TUN Unit (U401)	See Contrast table (2)
17	Screw	IMS26P060FTC	36	Holder	See Contrast table (2)
18	Screw	JFZ20P025FTC	37	Sheet	See Contrast table (2)
19	Screw	EBA2002			

(2) CONTRAST TABLE

AVH-X5600BHS/XNUC and AVH-X4600BT/XNUC are constructed the same except for the following:

Mark	No.	Description	AVH-X5600BHS/XNUC	AVH-X4600BT/XNUC
	31	Holder	CND6554	CND6531
	34	Service Unit (Mother I/F)	CXX6029	CXX6030
	35	WWR Core TUN Unit (U401)	CWE2364	Not used
	36	Holder	CND6449	Not used
	37	Sheet	CNN4314	Not used

9.5 DVD MECHANISM MODULE (1)

A


B

C

D

E

F

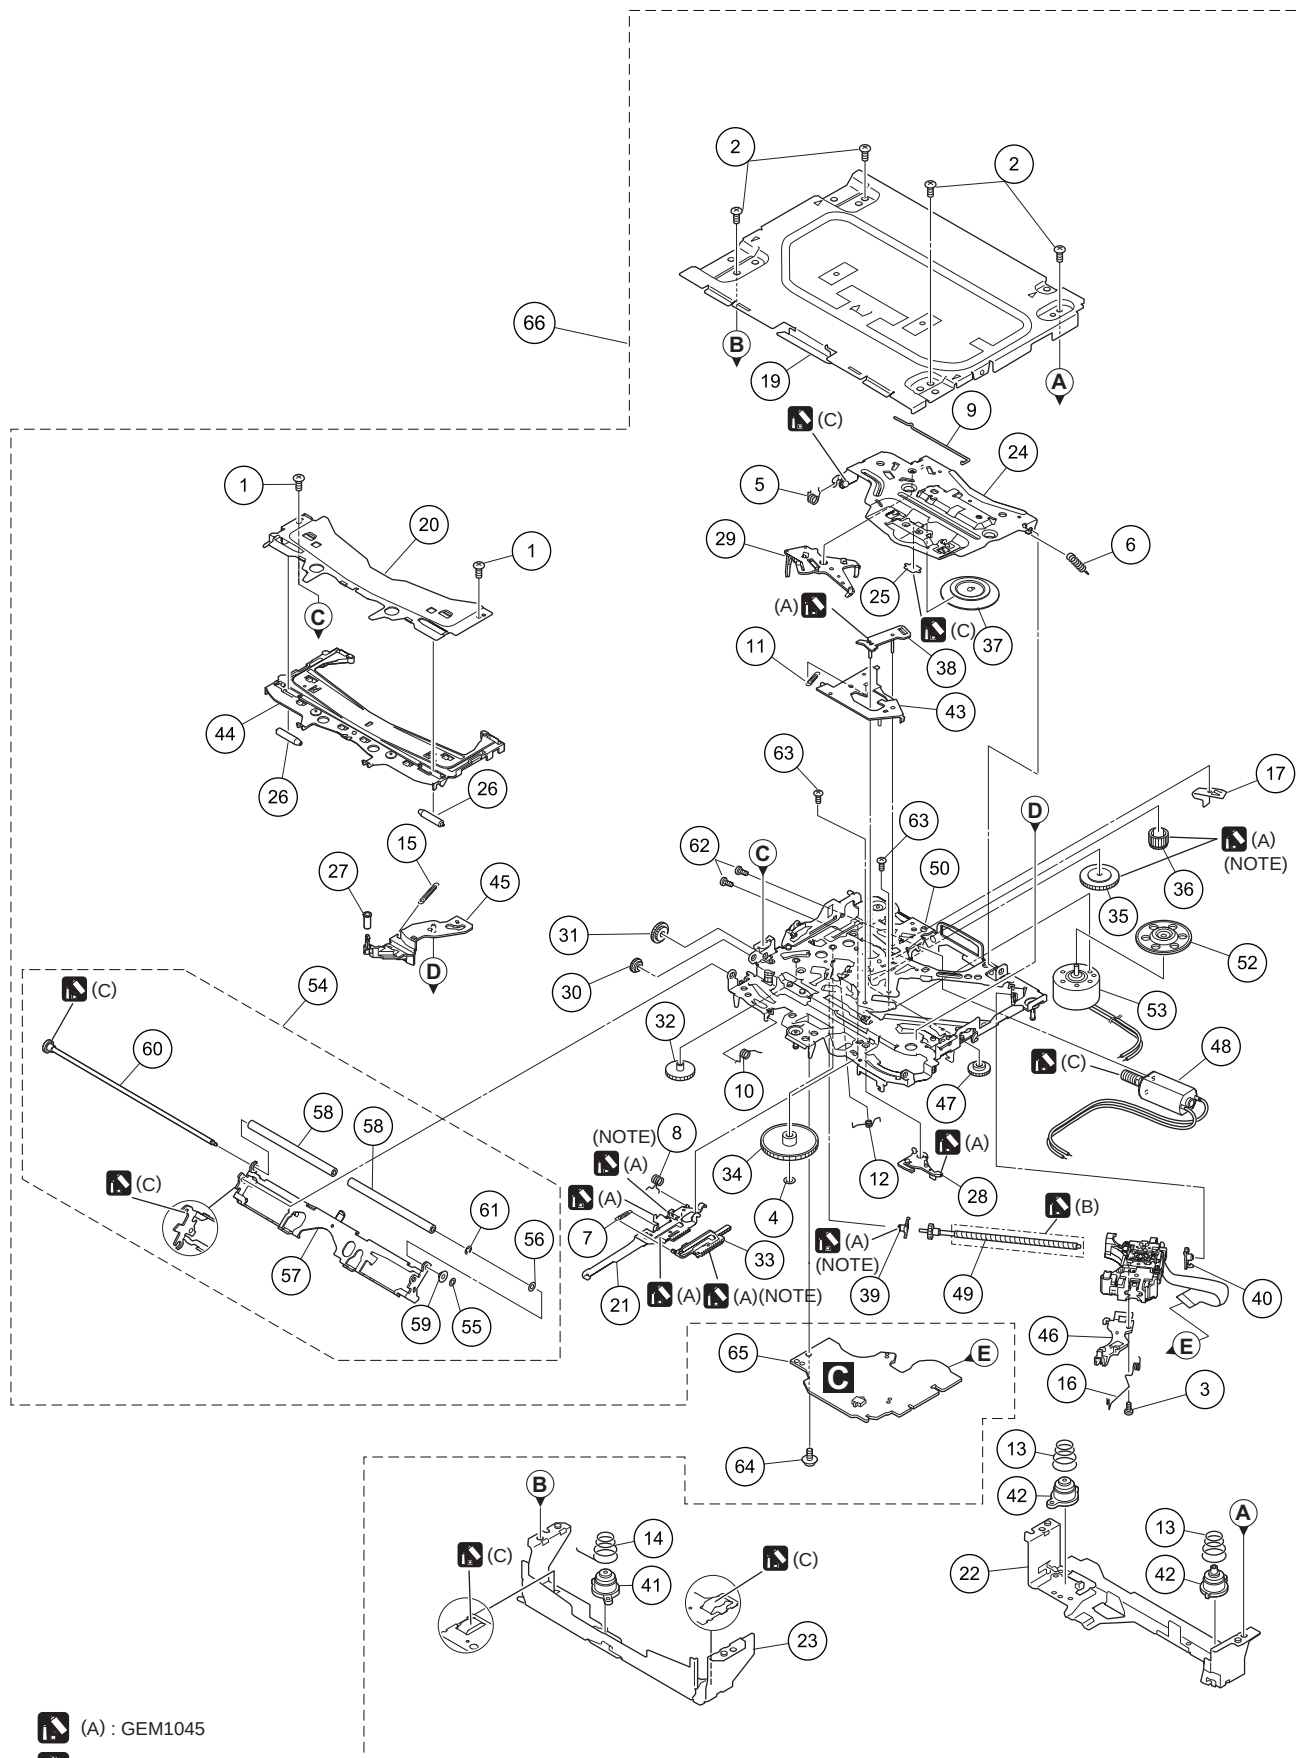

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVH-X5600BHS/XNUC		(A,56,55) IC(B)	PDB117A8
B:AVH-X4600BT/XNUC		IC 751 (A,132,67) IC	BD11600NUX
Unit Number : CXX6029(A)		IC 1001 (B,89,68) IC	BH7673G
Unit Number : CXX6030(B)		IC 1002 (B,86,68) IC	BH7673G
Unit Name : Service Unit(Mother I/F)		IC 1003 (B,80,68) IC	BH7673G
Unit Number : YWX5032		IC 1004 (B,77,68) IC	BH7673G
Unit Name : DVD Core Unit		IC 1051 (B,82,41) LSI(A)	ML86V7675TBZA3A
Unit Number : CXX6054		(B,82,41) LSI(B)	ML86V7675TBZ03A
Unit Name : Service Unit(Monitor)		IC 1101 (B,123,41) RAM IC	M12L128168A-5TG2N
Unit Number : CXX6058		IC 1151 (B,104,49) IC	WM8761BGED
Unit Name : Service Unit(Keyboard)		IC 1202 (B,105,40) IC	337S3959
Unit Number : EXX2001		IC 1251 (B,146,54) Flash ROM Unit(Service)	CXX5989
Unit Name : PCB Unit(Service)		IC 1301 (B,96,22) Serial Flash Memory	MX25L8006EM2I-12G
		IC 1302 (A,107,42) IC	R5S72690RW266FP
		IC 1671 (A,150,18) IC	WM8761BGED
		IC 1721 (A,126,100) IC	NJM4565V
		IC 1731 (A,123,112) IC	NJM4565V
		IC 1732 (A,129,108) IC	TC7W66FK
		IC 1741 (B,119,79) IC(A)	TC7SH126FU
		IC 1751 (B,63,69) IC(A)	MC74VHC1GT08DFG
		IC 1801 (B,60,83) Regulator IC	NJW4181U3-33B
		IC 1821 (A,91,101) IC	NJM2387ADL3
Service Unit(Mother I/F)		IC 1901 (B,33,53) IC	NJM2886DL3-05
Consists of		IC 1911 (B,26,31) IC(A)	NJM2886DL3-33
Mother PCB		IC 1921 (B,25,49) Regulator IC(A)	S-1172B12-E6
Interface PCB		IC 1951 (B,158,68) IC	AN33012UA
		IC 2011 (B,116,15) Regulator IC	BD001A5WEFJ
AB		IC 2031 (B,78,24) Regulator IC	NJM2878F3-15
Unit Number : CXX6029(A)		IC 2061 (B,163,11) Regulator IC	NJM2856DL3-18
Unit Number : CXX6030(B)		IC 2101 (B,164,96) Regulator IC	BD9876EFJ
Unit Name : Service Unit(Mother I/F)		IC 2161 (B,165,108) IC	AN33014UA
		IC 3661 (A,94,44) EEPROM	BR24C21FJ
		Q 301 (B,93,101) Transistor	LSCR523UB
MISCELLANEOUS		Q 311 (B,90,104) Transistor	RN4987
IC 101 (B,132,74) IC	AK4223VQ	Q 321 (B,88,106) Chip Transistor	RN1903
IC 251 (B,119,96) IC	PML020A	Q 601 (A,71,48) Transistor	LSCR523UB
IC 341 (A,97,121) IC	PA2032A	Q 751 (B,65,18) Chip Transistor	HN1C01FU
IC 501 (A,40,78) IC	TDA7706	Q 752 (B,61,18) Chip Transistor	RN4982
IC 601 (A,56,55) IC(A)	PDB115A8	Q 831 (B,65,77) Transistor	LTC014EEB
		Q 841 (B,67,73) Transistor	LTC014EEB

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 854 (A,53,98) Chip Transistor HN1A01FU
 Q 871 (A,56,78) Chip Transistor HN1C01FU
 Q 1001 (B,82,58) Transistor LSCR523UB

D 3641 (B,77,37) Diode DZ2S180C
 D 3642 (B,62,37) Diode DZ2S180C
 D 3643 (B,77,41) Diode DZ2S180C
 D 3666 (A,100,36) Diode DZ2S068C
 D 3667 (A,100,38) Diode DZ2S068C

A Q 1002 (B,85,58) Transistor LSCR523UB
 Q 1003 (B,88,58) Transistor LSCR523UB
 Q 1004 (B,78,58) Transistor LSCR523UB
 Q 1201 (B,110,32) Transistor LSAR523UB
 Q 1631 (A,36,113) Chip Transistor HN1C03FU

D 3668 (A,111,37) Diode DZ2S068C
 D 3669 (A,107,38) Diode DZ2S068C
 D 3670 (A,107,37) Diode DZ2S068C
 D 3671 (A,109,37) Diode DZ2S068C
 D 3672 (B,104,33) Diode DZ2S068C

Q 1632 (A,43,113) Chip Transistor HN1C03FU
 Q 1633 (A,30,113) Chip Transistor HN1C03FU
 Q 1662 (B,128,14) Transistor RN4984
 Q 1701 (A,135,105) Transistor UMF23N
 Q 1721 (A,136,97) Transistor LSCR523UB

D 3673 (B,106,31) Diode DZ2S068C
 L 501 (A,46,91) Chip Coil LCTAWR15J2520
 L 502 (A,43,90) Chip Coil LCTAWR27J2520
 L 503 (A,40,90) Inductor CTF1786

B Q 1731 (A,120,105) Chip Transistor RN4982
 Q 1851 (A,98,87) Transistor LSCR523UB
 Q 1852 (A,102,79) Chip Transistor HN1B04FU
 Q 1853 (A,100,75) Chip Transistor RN4982
 Q 1856 (A,99,82) Chip Transistor RN1907

L 504 (A,38,89) SMD Ferrite Beads CTF1806
 L 505 (A,34,95) Inductor CTF1389
 L 506 (A,43,88) Inductor CTF1794
 L 507 (A,32,89) Inductor LCYC220K1608
 L 508 (A,32,85) Inductor LCYB68NJ1005

Q 1951 (A,163,70) Power MOS FET RSD140P06
 Q 1952 (A,153,67) Power MOS FET RSD140P06
 Q 2131 (B,39,15) Transistor 2SD1760F5
 Q 2132 (B,37,20) Transistor LTC014EEB
 D 301 (B,84,105) Diode DA2J101

L 509 (A,29,79) Chip Coil LCTAW470J2520
 L 510 (A,31,75) Inductor CTF1786
 L 511 (A,35,70) Inductor(B) CTF1786
 L 512 (A,50,83) Inductor CTF1786
 L 513 (A,51,83) Inductor CTF1786
 L 514 (A,44,68) Inductor CTF1786

C D 302 (B,90,99) Diode DZ2J082M0
 D 312 (B,90,101) Diode DA2J101
 D 501 (A,46,95) Diode RN731VN
 D 502 (A,46,88) Diode RN731VN
 D 601 (B,61,49) Diode RB501VM-40

L 517 (A,50,71) Inductor CTF1786
 L 518 (A,35,68) Inductor(A) CTF1786
 L 519 (A,33,93) Inductor LCYB10NJ1608
 L 801 (A,63,92) Choke Coil 600 uH CTH1221
 L 1001 (B,87,62) Inductor CTF1545

D 602 (B,63,49) Diode DB2J31400
 D 801 (B,64,122) Diode 1SR154-400
 D 802 (B,60,122) Diode 1SR154-400
 D 821 (A,48,101) Diode DAN202UM
 D 831 (B,63,76) Diode DZ2J056M0

L 1002 (B,80,62) Inductor CTF1545
 L 1003 (B,76,62) Inductor CTF1545
 L 1004 (B,83,62) Inductor CTF1545
 L 1005 (B,96,68) Chip Coil LCTAW100J2520
 L 1051 (B,77,34) Inductor CTF1740

D 841 (B,70,76) Diode DA2J101
 D 853 (A,51,102) Diode DAN202UM
 D 871 (B,63,103) Diode UDZV6R2(B)
 D 873 (B,67,101) Diode UDZV7R5(B)
 D 1601 (A,153,108) Diode PESD0402-140

L 1101 (B,135,43) Inductor CTF1786
 L 1107 (B,119,50) Inductor CTF1645
 L 1151 (B,106,55) Inductor CTF1786
 L 1251 (B,138,55) Inductor CTF1786
 L 1301 (B,109,44) Inductor CTF1786

D 1602 (A,150,108) Diode PESD0402-140
 D 1622 (B,123,112) Diode DZ2S180C
 D 1623 (B,134,111) Diode DZ2S180C
 D 1624 (B,140,110) Diode DZ2S180C
 D 1661 (B,125,12) Diode DZ2J039M0

L 1302 (B,110,57) Inductor CTF1545
 L 1303 (B,108,21) Chip Beads VTL1129
 L 1304 (B,138,43) Chip Beads VTL1129
 L 1305 (A,127,37) Chip Beads VTL1126
 L 1306 (A,86,34) Chip Beads VTL1127

D 1662 (B,130,22) Diode DZ2S180C
 D 1663 (B,129,11) Diode DZ2S180C
 D 1721 (A,137,101) Diode DZ2J051M0
 D 1781 (B,56,35) Diode DZ2S180C
 D 1782 (B,58,33) Diode DZ2S180C

L 1311 (A,124,29) Chip Beads VTL1127
 L 1312 (A,126,32) Chip Beads VTL1127
 L 1313 (A,124,35) Chip Beads VTL1127
 L 1315 (A,125,41) Chip Beads VTL1127
 L 1316 (A,124,43) Chip Beads VTL1127

D 1801 (B,66,83) Diode 1SR154-400
 D 1851 (A,101,88) Diode DZ2J130M0
 D 1853 (A,99,92) Diode DA2J101
 D 1902 (B,38,42) Diode CRG03
 D 1921 (B,29,42) Diode(A) CRG03

L 1317 (A,125,42) Chip Beads VTL1127
 L 1318 (A,125,46) Chip Beads VTL1127
 L 1319 (A,125,49) Chip Beads VTL1127
 L 1322 (A,125,54) Chip Beads VTL1127
 L 1323 (A,125,58) Chip Beads VTL1127

D 1951 (A,161,63) Diode RB056L-40
 D 1952 (A,153,59) Diode RB056L-40
 D 1953 (A,140,110) Diode RB080L-30
 D 2101 (A,164,94) Diode RB056L-40
 D 2131 (B,42,21) Diode DZ2J062M0

L 1377 (A,86,30) Chip Beads VTL1126
 L 1381 (A,87,54) Chip Beads VTL1126
 L 1383 (A,83,54) Chip Beads VTL1126
 L 1384 (A,85,52) Chip Beads VTL1126
 L 1387 (A,87,46) Chip Beads VTL1126

D 2161 (B,163,102) Diode RB060M-30
 D 2162 (B,154,105) Diode 1SR154-400

AVH-X5600BHS/XNUC

1

2

3

4

5		6	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
L 1390	(A,83,46) Chip Beads	VTL1126	
L 1391	(A,87,45) Chip Beads	VTL1126	
L 1393	(A,83,44) Chip Beads	VTL1126	
L 1394	(A,87,44) Chip Beads	VTL1126	
L 1397	(A,83,43) Chip Beads	VTL1126	
L 1399	(A,87,43) Chip Beads	VTL1126	
L 1401	(A,87,42) Chip Beads	VTL1126	
L 1403	(A,84,41) Chip Beads	VTL1126	
L 1405	(A,87,40) Chip Beads	VTL1126	
L 1407	(A,84,39) Chip Beads	VTL1126	
L 1409	(A,87,38) Chip Beads	VTL1126	
L 1411	(A,87,37) Chip Beads	VTL1126	
L 1413	(A,87,36) Chip Beads	VTL1126	
L 1415	(A,86,35) Chip Beads	VTL1126	
L 1601	(A,151,106) Inductor	CTF1713	
L 1671	(A,160,22) Inductor	CTF1786	
L 1672	(A,143,16) Inductor	CTF1786	
L 1951	(A,164,55) Choke Coil 10 uH	CTH1446	
L 1952	(A,151,54) Inductor	CTH1519	
L 1953	(A,144,102) Choke Coil 10 uH	CTH1486	
L 2101	(A,158,94) Inductor	CTH1524	
L 2161	(A,164,102) Inductor	CTH1524	
L 2162	(B,167,102) Inductor	CTF1793	
X 501	(A,52,75) Resonator 36.48 MHz	CSS1805	
X 601	(A,71,56) Crystal Resonator 12.500 MHz	CSS1839	
X 1051	(B,71,34) Crystal Resonator 32.000 MHz	CSS1818	
X 1301	(A,102,65) Resonator 48.000 MHz	CSS1760	
X 1302	(A,113,65) Crystal Resonator 13.333 3 MHz	CSS1840	
X 1303	(A,86,50) Resonator 16.93 MHz	CSS1794	
P 451	(A,21,96) Surge Absorber	IMSA-6803-01Y900	
P 1623	(B,130,108) Poly Switch	FSMD075-24R	
P 1631	(B,28,109) Poly Switch	FSMD075-24R	
P 1701	(A,121,77) Poly Switch	FSMD075-24R	
⚠ P1902	(B,86,98) Fuse 1.25 A(A)	CEK1382	
⚠ P1951	(A,45,37) Fuse 1 A	CEK1381	
⚠ P2071	(A,145,38) Fuse 1.25 A	CEK1382	
⚠ P2081	(A,23,20) Fuse 0.75 A	CEK1380	
⚠ P2131	(A,43,25) Fuse 2 A	CEK1384	
⚠ P2151	(A,46,25) Fuse 2.5 A	CEK1385	
⚠ P2152	(A,49,27) Fuse 1.5 A	CEK1383	
BZ3631	(A,45,44) Buzzer	CPV1062	
U 401	(A,13,59) WWR C-TUN Unit(A)	CWE2364	
U 1671	(A,161,31) BT Module	CWX4506	
CN751	(A,63,13) Connector	CKS6025	
CN1651	(B,25,12) Connector	CKS6095	
CN1671	(A,161,31) Connector	CKS6346	
CN1701	(A,119,85) Connector	CKS6535	
CN1751	(A,67,27) Connector	CKS6536	
CN3601	(B,119,49) Connector	CKS6605	
CN3661	(A,111,25) Connector	CKS4497	
JA451	(A,14,111) Antenna Jack	YKS5041	
JA801	(A,62,118) Plug	CKM1376	
JA1601	(A,151,121) USB Jack	CKN1091	
JA1621	(A,129,121) RCA Jack	CKB1110	
JA1631	(A,35,120) Pin Jack	XKB7001	
JA1661	(A,138,10) Jack	CKS6437	
JA3621	(A,13,33) RCA Jack	CKB1106	
JA3641	(A,69,19) Jack	CKN1106	
JA3691	(A,131,26) Jack	CKN1040	
JA3701	(A,164,22) Connector(A)	CKS3806	

7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
JA3731	(A,145,28) Jack	CKS6437	
RESISTORS			
R 101	(B,122,71)	RAB4CQ101J	A
R 102	(B,122,74)	RAB4CQ101J	
R 104	(B,125,78)	RS1/16SS75R0D	
R 105	(B,125,81)	RS1/16SS75R0F	
R 108	(B,141,66)	RS1/10SR560J	
R 109	(B,143,74)	RAB4CQ101J	
R 110	(B,143,79)	RAB4CQ101J	
R 112	(B,129,63)	RS1/16SS101J	
R 113	(B,132,64)	RS1/16SS101J	
R 114	(B,134,64)	RS1/16SS101J	
R 115	(B,136,63)	RS1/16SS101J	B
R 116	(B,131,64)	RS1/16SS101J	
R 117	(B,135,64)	RS1/16SS101J	
R 119	(B,144,67)	RS1/10SR560J	
R 120	(B,143,69)	RS1/10SR560J	
R 121	(B,144,71)	RS1/10SR560J	
R 122	(B,125,80)	RS1/16SS470J	
R 202	(B,129,102)	RS1/16SS182J	
R 251	(B,126,105)	RS1/16SS162J	
R 255	(B,124,88)	RS1/16SS473J	
R 256	(A,102,108)	RS1/8SQ272J	
R 257	(A,98,108)	RS1/8SQ272J	C
R 258	(A,100,108)	RS1/8SQ182J	
R 259	(A,96,108)	RS1/8SQ182J	
R 260	(A,104,107)	RS1/8SQ182J	
R 261	(A,92,108)	RS1/8SQ182J	
R 262	(A,105,110)	RS1/8SQ272J	
R 263	(A,94,108)	RS1/8SQ272J	
R 264	(B,102,93)	RS1/16SS0R0J	
R 302	(B,87,104)	RS1/16SS103J	
R 303	(B,95,99)	RS1/16SS104J	
R 304	(B,96,99)	RS1/16SS473J	
R 306	(A,66,43)	RS1/16SS103J	D
R 312	(B,85,100)	RS1/16SS102J	
R 321	(B,85,106)	RS1/16SS683J	
R 322	(B,83,106)	RS1/16SS152J	
R 323	(B,85,103)	RS1/16SS683J	
R 324	(B,88,109)	RS1/16SS101J	
R 332	(A,83,111)	RS1/16SS473J	
R 333	(A,83,110)	RS1/16SS102J	
R 401	(A,19,36) (A)	RAB4CQ0R0J	
R 402	(A,19,50) (A)	RAB4CQ0R0J	
R 403	(A,25,25) (A)	RAB4CQ0R0J	
R 405	(A,25,58) (A)	RS1/16SS0R0J	E
R 406	(A,25,57) (A)	RS1/16SS0R0J	
R 407	(A,25,59) (A)	RS1/16SS0R0J	
R 410	(B,22,41) (A)	RS1/16SS102J	
R 455	(B,35,85) (A)	RS1/10SR0R0J	
R 457	(B,22,96)	RS1/10SR0R0J	
R 501	(A,42,68) (A)	RS1/16SS221J	
R 519	(A,47,86)	RS1/16SS221J	
R 520	(A,31,94)	RS1/16SS105J	
R 521	(A,47,87)	RS1/16SS751J	
R 522	(A,32,87)	RS1/16SS152J	F
R 523	(A,33,85)	RS1/16SS105J	
R 525	(A,29,82)	RS1/16SS471J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 526 (A,31,81)
R 527 (A,31,79)
R 528 (A,28,71)
R 529 (A,26,72)

RS1/16SS330J
RS1/16SS681J
RS1/4SA5R6J
RS1/4SA5R6J

R 665 (B,54,67)
R 666 (A,59,72)
R 667 (A,58,69)
R 668 (B,56,67)
R 669 (A,56,67) (A)

RS1/16SS0R0J
RS1/16SS104J
RS1/16SS103J
RS1/16SS102J
RS1/16SS471J

R 530 (A,26,75)
R 531 (A,41,68) (A)
R 532 (A,40,66) (A)
R 533 (A,40,68) (A)
R 534 (A,39,66) (A)

RS1/4SA5R6J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 672 (A,56,70) (A)
R 673 (A,56,73)
R 677 (A,51,68)
R 678 (A,51,67)
R 681 (A,44,44)

RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS221J

R 535 (A,39,68) (A)
R 536 (A,38,66) (A)
R 537 (A,37,68) (A)
R 538 (A,37,66) (A)
R 539 (A,33,73)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS102J

R 682 (B,43,44)
R 683 (A,43,44)
R 684 (B,47,44)
R 685 (B,45,44)
R 686 (B,44,44)

RS1/16SS221J
RS1/16SS221J
RS1/16SS221J
RS1/16SS221J
RS1/16SS221J

R 608 (B,49,37) (B)
R 609 (B,51,36)
R 611 (B,51,45)
R 612 (B,55,50)
R 613 (B,61,40)
R 614 (B,63,40)

RS1/16SS104J
RS1/16SS104J
RS1/16SS103J
RS1/16SS221J
RS1/16SS472J
RS1/16SS471J

R 687 (B,50,53)
R 688 (A,44,56)
R 689 (A,43,61)
R 690 (B,46,62)
R 691 (B,46,60)

RS1/16SS104J
RS1/16SS473J
RS1/16SS473J
RS1/16SS272J
RS1/16SS102J

R 615 (B,64,40)
R 616 (B,62,40)
R 617 (B,55,45)
R 618 (B,55,44)
R 619 (A,59,66)

RS1/16SS472J
RS1/16SS471J
RS1/16SS104J
RS1/16SS104J
RS1/16SS102J

R 692 (B,53,46)
R 698 (B,42,44)
R 699 (A,45,44)
R 700 (B,54,50)
R 701 (A,68,61)

RS1/16SS104J
RS1/16SS473J
RS1/16SS104J
RS1/16SS221J
RS1/16SS473J

R 620 (B,50,45)
R 621 (B,66,61)
R 622 (A,55,42)
R 623 (B,61,44)
R 624 (B,61,45)

RS1/16SS103J
RS1/16SS473J
RS1/16SS101J
RS1/16SS104J
RS1/16SS103J

R 702 (A,66,71) (A)
R 705 (B,48,62)
R 707 (B,50,50)
R 750 (A,134,71)
R 751 (B,59,23)

RS1/16SS0R0J
RS1/16SS822J
RS1/16SS104J
RS1/10SR0R0J
RAB4CQ221J

R 626 (B,58,45)
R 627 (B,62,45)
R 629 (A,69,56)
R 630 (A,69,45)
R 631 (A,70,46)

RS1/16SS0R0J
RS1/16SS473J
RS1/16SS0R0J
RS1/16SS473J
RS1/16SS104J

R 752 (B,58,18)
R 753 (B,58,19)
R 754 (B,68,18)
R 757 (B,64,16)
R 758 (B,66,16)

RS1/16SS471J
RS1/16SS102J
RS1/16SS0R0J
RS1/16SS472J
RS1/16SS472J

R 632 (A,70,50)
R 633 (A,68,50)
R 634 (B,64,45)
R 635 (B,59,42)
R 636 (A,68,52)

RS1/16SS473J
RS1/16SS102J
RS1/16SS473J
RS1/16SS273J
RS1/16SS472J

R 759 (B,61,16)
R 821 (A,45,101)
R 832 (B,65,75)
R 833 (B,59,75)
R 834 (B,55,103)

RS1/16SS102J
RS1/16SS153J
RS1/16SS104J
RS1/16SS103J
RS1/4SA102J

R 637 (A,68,53)
R 638 (A,63,69)
R 642 (B,65,52)
R 644 (A,70,53)
R 645 (B,66,60)

RS1/16SS472J
RS1/16SS102J
RS1/16SS473J
RS1/16SS102J
RS1/16SS102J

R 841 (B,69,75)
R 842 (B,72,79)
R 861 (A,44,63)
R 863 (A,50,98)
R 864 (A,55,97)

RS1/16SS103J
RS1/4SA102J
RS1/16SS473J
RS1/16SS223J
RS1/16SS473J

R 646 (A,68,62)
R 647 (A,68,64)
R 648 (A,68,63)
R 652 (A,73,48)
R 653 (A,68,48)

RS1/16SS121J
RS1/16SS104J
RS1/16SS121J
RS1/16SS473J
RS1/16SS471J

R 865 (A,49,98)
R 866 (A,51,105)
R 867 (A,43,63)
R 868 (B,43,66)
R 873 (B,66,103)

RS1/16SS473J
RS1/16SS103J
RS1/16SS102J
RS1/16SS102J
RS1/16SS103J

R 654 (A,68,49)
R 655 (A,71,51)
R 656 (B,60,51)
R 658 (B,68,59)
R 659 (A,67,66)

RS1/16SS471J
RS1/16SS472J
RS1/16SS681J
RS1/16SS104J
RS1/16SS0R0J

R 874 (B,65,103)
R 875 (B,60,103)
R 878 (B,62,101)
R 879 (B,64,101)
R 880 (B,55,100)

RS1/16SS473J
RS1/16SS392J
RS1/16SS104J
RS1/16SS473J
RS1/4SA102J

R 660 (A,67,67)
R 661 (A,67,68)
R 662 (A,67,69)
R 663 (A,61,69)
R 664 (A,59,69)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS473J
RS1/16SS103J

R 1009 (B,78,64)
R 1010 (B,81,64)
R 1011 (B,90,63)
R 1012 (B,86,64)
R 1013 (B,83,69)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/10SR101J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1051	(B,71,49)	RS1/16SS750J		R 1302	(A,97,22)	RS1/16SS273J	
R 1052	(B,69,40)	RS1/10SR0R0J		R 1303	(B,107,44)	RS1/16SS0R0J	
R 1053	(A,76,40)	RS1/16SS472J		R 1305	(A,106,21)	RS1/16SS121J	
R 1054	(B,92,40)	RS1/16SS473J		R 1306	(A,106,19)	RS1/16SS104J	A
R 1055	(B,71,39)	RS1/16SS101J		R 1307	(B,123,27)	RS1/16SS473J	
R 1056	(B,71,38)	RS1/16SS101J		R 1310	(B,102,32)	RS1/16SS101J	
R 1057	(B,92,39)	RS1/16SS561J		R 1311	(B,120,28)	RS1/16SS472J	
R 1058	(B,74,36)	RS1/16SS105J		R 1312	(B,121,29)	RS1/16SS472J	
R 1059	(B,72,37)	RS1/16SS471J		R 1313	(B,118,28)	RS1/16SS472J	
R 1060	(B,82,30)	RS1/16SS391J		R 1314	(A,124,31)	RS1/16SS472J	
R 1061	(B,83,30)	RS1/16SS391J		R 1315	(B,119,28)	RS1/16SS472J	
R 1062	(B,83,32)	RS1/16SS391J		R 1316	(B,117,28)	RS1/16SS472J	
R 1063	(B,84,30)	RS1/16SS391J		R 1318	(B,110,51)	RS1/16SS104J	
R 1064	(B,85,30)	RS1/16SS391J		R 1319	(A,128,43)	RS1/16SS104J	
R 1065	(B,86,31)	RS1/16SS391J		R 1320	(A,126,52)	RS1/16SS104J	B
R 1066	(B,88,31)	RS1/16SS391J		R 1321	(A,126,56)	RS1/16SS104J	
R 1067	(B,86,32)	RS1/16SS391J		R 1322	(A,128,51)	RS1/16SS473J	
R 1068	(B,88,32)	RS1/16SS221J		R 1323	(A,118,61)	RS1/16SS101J	
R 1069	(B,87,34)	RS1/16SS221J		R 1324	(A,123,57)	RS1/16SS104J	
R 1070	(B,89,34)	RS1/16SS561J		R 1325	(A,100,59)	RS1/16SS2402F	
R 1071	(B,74,33)	RS1/16SS473J		R 1326	(A,103,61)	RS1/16SS681J	
R 1072	(B,81,30)	RS1/16SS101J		R 1327	(B,105,60)	RS1/16SS5601F	
R 1073	(B,77,33)	RS1/16SS101J		R 1328	(A,112,62)	RS1/16SS222J	
R 1074	(B,69,39)	RS1/16SS222J		R 1329	(B,113,57)	RS1/16SS473J	
R 1075	(B,69,37)	RS1/16SS222J		R 1330	(B,114,57)	RS1/16SS473J	
R 1076	(B,72,26)	RS1/10SR0R0J		R 1331	(A,106,64)	RS1/16SS103J	C
R 1077	(B,70,26)	RS1/10SR0R0J		R 1332	(A,106,65)	RS1/16SS101J	
R 1080	(B,73,49)	RS1/16SS0R0J		R 1333	(B,118,58)	RS1/16SS473J	
R 1081	(B,87,54)	RS1/16SS750J		R 1334	(A,114,62)	RS1/16SS473J	
R 1082	(B,84,54)	RS1/16SS750J		R 1335	(B,99,28)	RS1/16SS0R0J	
R 1083	(B,69,26)	RS1/10SR0R0J		R 1337	(A,96,23)	RS1/16SS101J	
R 1084	(B,81,54)	RS1/16SS750J		R 1338	(A,109,64)	RS1/16SS104J	
R 1085	(B,78,55)	RS1/16SS750J		R 1339	(A,98,65)	RS1/16SS273J	
R 1101	(B,128,29)	RAB4CQ221J		R 1340	(A,93,66)	RS1/16SS104J	
R 1102	(B,125,29)	RAB4CQ221J		R 1341	(A,126,46)	RS1/16SS104J	
R 1103	(B,120,33)	RAB4CQ471J		R 1342	(A,89,30)	RS1/16SS104J	D
R 1104	(B,116,33)	RAB4CQ471J		R 1344	(B,119,53)	RS1/16SS150J	
R 1105	(B,113,33)	RAB4CQ471J		R 1345	(B,103,29)	RS1/16SS473J	
R 1106	(B,122,50)	RS1/16SS471J		R 1347	(A,129,46)	RS1/16SS0R0J	
R 1108	(B,130,52)	RAB4CQ221J		R 1348	(A,94,25)	RS1/16SS101J	
R 1109	(B,126,52)	RAB4CQ221J		R 1349	(B,95,16)	RS1/16SS0R0J	
R 1110	(B,115,51)	RAB4CQ471J		R 1350	(A,90,50)	RS1/16SS152J	
R 1111	(B,112,51)	RAB4CQ471J		R 1351	(A,92,60)	RS1/16SS102J	
R 1112	(B,118,51)	RS1/16SS471J		R 1352	(A,90,66)	RAB4CQ473J	
R 1151	(B,98,52)	RS1/16SS821J		R 1353	(B,118,54)	RS1/16SS0R0J	
R 1152	(B,109,52)	RS1/16SS821J		R 1355	(B,115,55)	RS1/16SS0R0J	
R 1201	(B,107,41)	RS1/16SS222J		R 1356	(A,129,47)	RS1/16SS0R0J	E
R 1202	(B,109,37)	RS1/16SS183J		R 1359	(A,128,49)	RS1/16SS0R0J	
R 1203	(B,104,42)	RS1/16SS222J		R 1360	(B,122,56)	RS1/16SS0R0J	
R 1205	(B,108,41)	RS1/16SS101J		R 1365	(A,91,24)	RS1/16SS331J	
R 1206	(B,104,43)	RS1/16SS101J		R 1376	(A,91,27)	RS1/16SS0R0J	
R 1209	(B,109,41)	RS1/16SS221J		R 1378	(A,88,28)	RS1/16SS0R0J	
R 1251	(A,126,50)	RS1/16SS220J		R 1379	(A,87,32)	RS1/16SS0R0J	
R 1252	(A,130,52)	RS1/16SS470J		R 1380	(A,89,54)	RS1/16SS101J	
R 1253	(B,76,30)	RS1/16SS0R0J		R 1381	(A,88,26)	RS1/16SS0R0J	
R 1256	(B,75,30)	RS1/16SS0R0J		R 1382	(A,85,53)	RS1/16SS101J	
R 1257	(A,128,52)	RS1/16SS470J		R 1383	(A,117,61)	RS1/16SS101J	
R 1258	(A,130,49)	RS1/16SS470J		R 1384	(A,120,61)	RS1/16SS102J	
R 1259	(A,129,56)	RS1/16SS470J		R 1385	(A,89,53)	RS1/16SS101J	
R 1260	(B,139,57)	RS1/16SS470J		R 1386	(A,88,46)	RS1/16SS101J	F

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1387 (B,113,55)
 R 1388 (A,84,46)
 R 1389 (A,88,45)
 R 1391 (A,111,62)
 R 1392 (A,84,44)

RS1/16SS472J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS102J
 RS1/16SS101J

R 1677 (A,151,34)
 R 1678 (A,166,24)
 R 1679 (A,165,24)
 R 1680 (B,165,25)
 R 1683 (A,162,24)

RS1/16SS101J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS0R0J

R 1393 (A,88,30)
 R 1395 (A,88,44)
 R 1396 (A,85,43)
 R 1398 (A,89,43)
 R 1400 (A,89,42)

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J

R 1684 (A,146,13)
 R 1685 (A,147,23)
 R 1686 (A,147,35)
 R 1687 (A,147,34)
 R 1690 (A,154,23)

RS1/16SS821J
 RS1/16SS821J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 1402 (A,86,41)
 R 1404 (A,89,40)
 R 1406 (A,86,40)
 R 1408 (A,89,38)
 R 1410 (A,89,37)

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J

R 1692 (A,160,24)
 R 1693 (A,158,24)
 R 1697 (A,159,22)
 R 1701 (A,138,104)
 R 1702 (A,133,104)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS181J
 RS1/10SR222J
 RS1/16SS562J

R 1412 (A,89,36)
 R 1414 (A,87,35)
 R 1416 (A,87,34)
 R 1418 (A,126,39)
 R 1419 (A,97,25)

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS0R0J
 RS1/16SS101J
 RS1/16SS0R0J

R 1703 (A,133,105)
 R 1711 (B,67,71) (A)
 R 1712 (A,124,71) (A)
 R 1714 (B,63,52)
 R 1721 (A,122,98)

RS1/16SS332J
 RS1/16SS0R0J
 RS1/16SS471J
 RS1/16SS102J
 RS1/16SS153J

R 1423 (A,113,23)
 R 1424 (A,123,59)
 R 1425 (A,89,24)
 R 1426 (A,91,26)
 R 1427 (A,85,32)

RS1/16SS222J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 1722 (A,121,99)
 R 1723 (A,121,101)
 R 1724 (A,131,98)
 R 1725 (A,132,98)
 R 1726 (A,132,100)

RS1/16SS153J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS153J

R 1428 (A,130,46)
 R 1429 (A,130,47)
 R 1431 (A,100,61)
 R 1432 (A,98,61)
 R 1433 (A,98,64)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J

R 1727 (A,123,97)
 R 1729 (A,135,94)
 R 1730 (A,134,98)
 R 1731 (A,130,97)
 R 1732 (A,128,112)

RS1/16SS153J
 RS1/16SS102J
 RS1/16SS472J
 RS1/16SS153J
 RS1/16SS153J

R 1434 (A,96,64)
 R 1435 (A,91,63)
 R 1436 (B,92,54)
 R 1621 (B,140,108)
 R 1622 (B,134,106)

RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS750J
 RS1/16SS223J

R 1733 (A,124,107)
 R 1734 (A,125,107)
 R 1735 (A,119,114)
 R 1736 (A,128,113)
 R 1737 (A,118,110)

RS1/16SS273J
 RS1/16SS273J
 RS1/16SS153J
 RS1/16SS473J
 RS1/16SS153J

R 1623 (B,123,110)
 R 1631 (B,45,110)
 R 1632 (A,45,113)
 R 1633 (A,37,109)
 R 1634 (A,34,113)

RS1/16SS223J
 RS1/16SS390J
 RS1/16SS223J
 RS1/16SS472J
 RS1/16SS223J

R 1738 (A,118,114)
 R 1739 (A,118,112)
 R 1740 (A,121,108)
 R 1742 (A,130,110)
 R 1743 (A,130,112)

RS1/16SS153J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS273J
 RS1/16SS273J

R 1635 (A,36,109)
 R 1636 (B,39,110)
 R 1637 (B,43,110)
 R 1638 (A,40,113)
 R 1639 (A,42,109)

RS1/16SS472J
 RS1/16SS390J
 RS1/16SS390J
 RS1/16SS223J
 RS1/16SS472J

R 1744 (A,123,105)
 R 1763 (A,100,72)
 R 1764 (A,109,80)
 R 1781 (B,64,26)
 R 1782 (B,78,26)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 1640 (A,43,109)
 R 1641 (A,32,113)
 R 1642 (B,37,110)
 R 1643 (B,41,110)
 R 1644 (A,38,113)

RS1/16SS472J
 RS1/16SS223J
 RS1/16SS390J
 RS1/16SS390J
 RS1/16SS223J

R 1822 (A,88,96)
 R 1823 (A,90,96)
 R 1824 (A,86,97)
 R 1851 (A,98,84)
 R 1852 (A,103,84)

RS1/16SS823J
 RS1/16SS103J
 RS1/16SS153J
 RS1/16SS681J
 RS1/16SS223J

R 1645 (A,30,111)
 R 1646 (A,29,111)
 R 1647 (A,27,113)
 R 1648 (B,35,110)
 R 1651 (B,33,18)

RS1/16SS472J
 RS1/16SS472J
 RS1/16SS223J
 RS1/16SS390J
 RS1/16SS473J

R 1853 (A,103,83)
 R 1854 (A,102,76)
 R 1857 (A,99,85)
 R 1866 (A,101,83)
 R 1868 (A,97,75)

RS1/16SS274J
 RS1/16SS273J
 RS1/16SS683J
 RS1/16SS100J
 RS1/16SS103J

R 1652 (B,32,18)
 R 1653 (B,23,18)
 R 1663 (B,126,10)
 R 1664 (B,130,13)
 R 1674 (B,155,37)

RS1/16SS473J
 RS1/16SS681J
 RS1/16SS122J
 RS1/16SS152J
 RS1/16SS101J

R 1901 (A,94,75) (A)
 R 1902 (A,93,76) (B)
 R 1903 (B,32,33) (A)
 R 1952 (B,149,66)
 R 1953 (B,150,67)
 R 1954 (B,150,65)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J
 RS1/16SS561J
 RS1/16SS3302D
 RS1/16SS4301D

1

2

3

4

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 1955	(B,150,64)	RS1/16SS3601D		R 3681	(A,91,39)	RS1/16SS103J	
R 1956	(B,150,68)	RS1/16SS123J		R 3682	(A,98,44)	RS1/16SS103J	
R 1957	(B,160,63)	RS1/16SS103J		R 3683	(B,112,29)	RS1/16SS221J	A
R 1959	(B,160,75) 0.011 ohm	CCN1341		R 3684	(B,111,28)	RS1/16SS221J	
R 1960	(B,163,64)	RS1/16SS204J		R 3685	(B,108,38)	RS1/16SS101J	
R 1961	(B,163,63)	RS1/16SS394J		R 3686	(B,114,35)	RS1/16SS101J	
R 1962	(B,154,75) 0.012 ohm	CCN1321		R 3687	(B,114,29)	RS1/16SS470J	
R 1963	(B,158,63)	RS1/16SS224J		R 3701	(B,150,42) (A)	RS1/16SS471J	
R 1964	(B,165,67)	RS1/16SS472J		R 3702	(B,151,40) (A)	RS1/16SS223J	
R 1965	(B,165,64)	RS1/16SS1101D		R 3703	(B,150,44) (A)	RS1/16SS223J	
R 1966	(B,167,64)	RS1/16SS3000D		R 3704	(B,152,39) (A)	RS1/16SS181J	
R 1967	(B,165,66)	RS1/16SS1002D		R 3705	(B,150,47) (A)	RS1/16SS181J	
R 1968	(B,167,66)	RS1/16SS511J		R 3706	(A,152,35) (A)	RS1/10SR822J	
R 2003	(B,145,39)	RS1/10SR0R0J		R 3707	(A,153,37) (A)	RS1/10SR471J	B
R 2011	(B,111,14)	RS1/16SS472J		R 3713	(A,153,34) (A)	RS1/16SS104J	
R 2012	(B,112,13)	RS1/16SS223J		R 3732	(B,136,44)	RS1/10SR102J	
R 2013	(B,112,15)	RS1/16SS473J		CAPACITORS			
R 2022	(B,82,18)	RS1/16SS0R0J		C 101	(B,125,69)	CKSSYB104K10	
R 2024	(B,81,19)	RS1/10SR0R0J		C 102	(B,125,70)	CKSSYB104K10	
R 2031	(B,79,22)	RS1/16SS102J		C 103	(B,125,71)	CKSSYB104K10	
R 2052	(B,154,18)	RS1/16SS0R0J		C 104	(B,125,72)	CKSSYB104K10	
R 2101	(B,170,97)	RS1/16SS3601D		C 105	(B,125,73)	CKSSYB104K10	
R 2102	(B,168,97)	RS1/16SS4702D		C 106	(B,125,74)	CKSSYB104K10	C
R 2103	(B,168,98)	RS1/16SS2202D		C 107	(B,125,75)	CKSSYB104K10	
R 2104	(B,170,98)	RS1/16SS222J		C 108	(B,125,76)	CKSSYB104K10	
R 2105	(B,158,90)	RS1/8SQ0R0J		C 109	(B,126,78)	CKSSYB104K10	
R 2131	(A,40,15)	RS1/16SS473J		C 110	(B,127,81) 10 uF	CCG1192	
R 2132	(B,43,19)	RS1/10SR121J		C 111	(B,126,83)	CKSSYB104K10	
R 2133	(B,39,20)	RS1/16SS220J		C 112	(B,125,83)	CKSSYB104K10	
R 2161	(A,156,110)	RS1/16SS102J		C 113	(B,128,66) 10 uF	CCG1192	
R 2162	(A,156,111)	RS1/16SS102J		C 114	(B,126,67)	CKSSYB104K10	
R 2163	(A,156,108)	RS1/16SS102J		C 115	(B,130,83)	CKSRYB104K16	
R 2164	(B,171,113)	RS1/16SS224J		C 116	(B,130,81) 10 uF	CCG1192	
R 2165	(B,171,110)	RS1/16SS4702D		C 117	(B,133,80)	CKSRYB104K16	D
R 2166	(B,164,115)	RS1/16SS152J		C 118	(B,134,81) 10 uF	CCG1192	
R 2167	(B,165,115)	RS1/16SS3302D		C 119	(B,140,70)	CKSRYB105K10	
R 2168	(B,166,115)	RS1/16SS8201D		C 120	(B,140,71)	CKSRYB105K10	
R 2169	(B,157,110)	RS1/16SS752J		C 121	(B,140,73)	CKSRYB105K10	
R 2170	(A,156,109)	RS1/16SS102J		C 122	(B,140,74)	CKSRYB105K10	
R 2171	(A,158,103) 0.056 ohm	ACN7160		C 123	(B,140,75)	CKSRYB105K10	
R 2172	(B,159,107)	RS1/16SS0R0J		C 124	(B,140,77)	CKSRYB105K10	
R 2173	(B,172,103)	RS1/16SS394J		C 125	(B,140,78)	CKSRYB105K10	
R 2174	(B,171,104)	RS1/16SS204J		C 126	(B,140,79)	CKSRYB105K10	
R 2177	(B,166,113)	RS1/16SS0R0J		C 127	(B,140,81)	CKSRYB105K10	
R 2178	(B,164,113)	RS1/16SS0R0J		C 128	(B,132,66)	CKSRYB105K10	E
R 3621	(B,29,35)	RS1/16SS750J		C 129	(B,129,66)	CKSRYB105K10	
R 3641	(B,81,42)	RS1/16SS223J		C 130	(B,122,77)	CKSSYB104K10	
R 3642	(B,61,40)	RS1/16SS223J		C 131	(B,125,77)	CKSSYB104K10	
R 3643	(B,86,38)	RS1/16SS750J		C 132	(B,133,66)	CKSRYB105K10	
R 3661	(B,101,41)	RAB4CQ750J		C 133	(B,136,65)	CKSRYB105K10	
R 3662	(B,115,33)	RS1/16SS223J		C 134	(B,139,67)	CKSRYB105K10	
R 3663	(B,114,32)	RS1/16SS223J		C 135	(B,141,67)	CKSRYB105K10	
R 3664	(B,115,26)	RS1/16SS562J		C 136	(B,140,69)	CKSRYB105K10	
R 3665	(A,115,43)	RS1/10SR102J		C 137	(B,131,66)	CKSRYB105K10	
R 3666	(A,116,40)	RS1/10SR102J		C 138	(B,135,66)	CKSRYB105K10	
R 3668	(A,121,38)	RS1/10SR471J		C 139	(B,134,83)	CCSSCH102J50	F
R 3669	(A,122,39)	RS1/10SR471J		C 140	(B,124,80)	CKSSYB271K50	
R 3677	(B,113,27)	RS1/16SS272J					
R 3678	(B,113,26)	RS1/16SS272J					
R 3680	(A,91,40)	RS1/16SS103J					

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 201 (B,129,103) CKSSYB332K50
 C 203 (B,126,103) 2.2 uF CCG1218
 C 251 (B,116,107) CCSSCH100D50
 C 252 (B,110,94) CCSSCH101J50
 C 253 (B,113,103) CKSRYB105K10

C 460 (B,33,82) CCSSCH4R0C50
 C 461 (B,29,84) CCSSCH4R0C50
 C 509 (A,43,93) CCSSCH330J50
 C 510 (A,45,93) CCSSCH6R0D50
 C 512 (A,32,96) CKSRYB103K50

C 254 (B,112,106) CCSQCH223J50
 C 255 (B,114,106) CCSQCH223J50
 C 256 (B,116,105) CKSRYB105K10
 C 257 (B,117,105) CKSRYB105K10
 C 258 (B,119,105) (A) CKSRYB105K10

C 513 (A,48,93) CKSSYB103K16
 C 514 (A,40,88) CKSSYB104K10
 C 515 (A,37,87) CKSSYB104K10
 C 517 (A,48,90) CKSSYB103K16
 C 518 (A,46,85) CKSSYB103K16

C 259 (B,120,105) (A) CKSRYB105K10
 C 260 (B,122,105) CKSRYB105K10
 C 261 (B,123,105) CKSRYB105K10
 C 262 (B,127,98) CCSSCH101J50
 C 263 (B,130,99) CKSRYB104K16

C 519 (A,39,87) CKSSYB104K10
 C 520 (A,33,90) CCSSCJ3R0C50
 C 521 (A,39,86) CKSSYB103K16
 C 522 (A,36,87) CKSSYB103K16
 C 523 (A,35,87) 10 uF CCG1192

C 264 (B,127,100) CKSRYB474K10
 C 265 (B,135,98) 10 uF CCG1192
 C 266 (B,126,96) CCSSCH101J50
 C 267 (B,129,95) 10 uF CCG1192
 C 268 (B,119,87) CKSRYB105K10

C 524 (A,33,86) CKSSYB223K16
 C 525 (A,41,90) CKSRYB105K10
 C 527 (A,42,86) CKSSYB103K16
 C 529 (A,38,92) 10 uF CCG1192
 C 530 (A,30,83) 10 uF CCG1192

C 269 (B,113,87) CKSRYB105K10
 C 270 (B,114,87) CKSRYB105K10
 C 271 (B,116,87) CKSRYB105K10
 C 272 (B,117,87) CKSRYB105K10
 C 273 (B,120,87) (A) CKSRYB105K10

C 531 (A,33,83) CCSSCJ3R0C50
 C 538 (A,31,82) CKSSYB104K10
 C 539 (A,29,81) CCSSCH101J50
 C 540 (A,35,85) CKSSYB104K10
 C 541 (A,28,81) CKSSYB103K16

C 274 (B,122,87) (A) CKSRYB105K10
 C 275 (B,117,85) CCSSCH100D50
 C 276 (B,124,87) CKSSYB104K10
 C 277 (B,130,92) 10 uF CCG1192
 C 278 (B,108,100) CCSRCH102J50

C 542 (A,32,79) CCSSCH820J50
 C 543 (A,31,76) CKSSYB104K10
 C 544 (A,30,73) 2.2 uF CCG1218
 C 545 (A,32,77) CCSSCH101J50
 C 547 (A,31,72) CKSSYB104K10

C 279 (B,111,101) CKSRYB105K10
 C 280 (B,108,96) 10 uF CCG1236
 C 281 (B,111,95) CCSSCH101J50
 C 282 (B,105,93) CCSRCH102J50
 C 285 (B,107,92) 10 uF CCG1236

C 548 (A,34,70) CKSSYB104K10
 C 549 (A,33,70) CKSSYB104K10
 C 550 (A,29,75) CKSSYB104K10
 C 553 (A,32,72) CCSSCH220J50
 C 554 (A,34,73) CKSSYB102K50

C 286 (B,103,94) CKSSYB104K16
 C 287 (B,127,96) CCSSCH102J50
 C 289 (B,130,100) CCSSCH102J50
 C 290 (B,124,106) CKSSYB103K16
 C 301 (B,86,102) 10 uF CCG1192

C 555 (A,38,71) CKSSYB104K10
 C 556 (A,48,83) CCSSCH220J50
 C 557 (A,52,85) CKSRYB224K16
 C 558 (A,48,81) CKSSYB224K6R3
 C 559 (A,51,82) CKSRYB105K10

C 305 (A,113,113) CKSRYB104K16
 C 307 (B,74,123) CCSSCH101J50
 C 308 (B,74,122) CCSSCH100D50
 C 311 (A,85,89) 100 uF/16 V(A) CCH2081
 (A,85,89) (B) XCEHVW101M16
 C 321 (B,85,108) 4.7 uF CCG1201

C 560 (A,50,79) CCSSCH100D50
 C 561 (A,52,80) CCSSCH100D50
 C 562 (A,53,80) CKSSYB472K25
 C 563 (A,51,79) CKSSYB472K25
 C 564 (A,52,78) CCSSCH100D50

C 341 (A,95,111) 0.22 uF CCG1313
 C 342 (A,92,111) 0.22 uF CCG1313
 C 343 (A,102,112) 0.22 uF CCG1313
 C 344 (A,99,112) 0.22 uF CCG1313
 C 349 (A,105,112) 1 uF CCG1325

C 565 (A,48,78) CKSSYB104K10
 C 566 (A,52,73) CCSSCH100D50
 C 568 (A,46,71) 2.2 uF CCG1218
 C 569 (A,46,72) CCSRCH220J50
 C 570 (A,46,70) CKSSYB104K10

C 350 (A,89,109) 4.7 uF CCG1291
 C 352 (B,74,121) CKSRYB104K16
 C 353 (A,86,109) 4.7 uF CCG1291
 C 401 (B,20,40) 10 uF(A) CCG1192
 C 402 (B,21,53) 10 uF(A) CCG1192

C 571 (A,43,70) 2.2 uF CCG1218
 C 573 (A,44,71) CKSSYB104K10
 C 574 (A,48,75) CCSSCH220J50
 C 601 (A,62,43) CKSSYB104K10
 C 602 (A,65,43) CKSSYB104K10

C 454 (A,30,96) CCSSCK2R0C50
 C 455 (A,23,96) CCSSCJ3R0C50
 C 456 (B,24,83) CCSSCH5R0C50
 C 458 (B,35,88) CCSSCH5R0C50
 C 459 (B,31,82) CCSSCH4R0C50

C 603 (B,58,44) CKSSYB331K50
 C 604 (A,63,68) CKSSYB104K10
 C 606 (A,71,54) CCSSCH8R0D50
 C 607 (A,68,57) CCSSCH100D50
 C 608 (A,68,60) CKSSYB104K10

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 610	(B,64,56)	CKSSYB104K10		C 1076	(B,71,29) 10 uF	CCG1192	
C 612	(B,65,59)	CKSSYB102K50		C 1078	(B,86,54)	CKSRYB105K10	
C 613	(A,44,54)	CKSSYB104K10		C 1079	(B,89,54)	CKSRYB105K10	A
C 614	(A,57,73)	CKSSYB103K16		C 1080	(B,85,50)	CKSSYB103K16	
C 615	(A,57,74) 0.1 uF	CCG1321		C 1081	(B,85,49)	CKSSYB102K50	
C 619	(A,73,63) 1 uF	DCH1246		C 1082	(B,83,54)	CKSRYB105K10	
C 620	(A,68,59) 1 uF	DCH1246		C 1083	(B,79,55)	CKSRYB105K10	
C 621	(A,57,72)	CCSSCH102J50		C 1085	(B,76,34)	CCSSCH5R0C50	
C 751	(B,49,22)	CKSSYB104K10		C 1086	(B,88,46)	CKSSYB104K10	
C 753	(B,47,19) 10 uF	CCG1192		C 1101	(B,135,38)	CKSSYB104K10	
C 754	(B,52,17) 10 uF	CCG1192		C 1102	(B,131,33)	CKSSYB104K10	
C 756	(A,134,69)	CKSSYB104K10		C 1103	(B,127,33)	CKSSYB104K10	
C 801	(A,76,98)	XCEHAT332M16		C 1104	(B,122,34)	CKSSYB104K10	
C 821	(A,49,104)	CKSRYB104K50		C 1105	(B,110,38)	CKSSYB104K10	B
C 831	(B,63,78)	CKSRYB104K50		C 1106	(B,129,49)	CKSSYB104K10	
C 841	(B,68,76)	CKSRYB105K10		C 1107	(B,125,49)	CKSSYB104K10	
C 861	(A,54,102)	CKSRYB104K50		C 1108	(B,120,49)	CCSSCH470J50	
C 1001	(B,88,61)	CKSSYB104K10		C 1152	(B,98,49) 10 uF	CCG1192	
C 1002	(B,85,61)	CKSSYB104K10		C 1153	(B,104,55)	CKSSYB104K10	
C 1003	(B,81,61)	CKSSYB104K10		C 1154	(B,102,56) 10 uF	CCG1192	
C 1004	(B,77,61)	CKSSYB104K10		C 1155	(B,98,53)	CKSSYB182K50	
C 1005	(B,89,65)	CKSSYB104K10		C 1156	(B,109,54)	CKSSYB182K50	
C 1006	(B,93,67) 10 uF	CCG1192		C 1201	(B,109,38)	CKSSYB104K10	
C 1007	(B,85,65)	CKSSYB104K10		C 1202	(B,109,39)	CKSSYB102K50	
C 1008	(B,80,65)	CKSSYB104K10		C 1251	(B,139,53)	CKSSYB104K10	C
C 1009	(B,76,65)	CKSSYB104K10		C 1301	(A,96,25)	CKSSYB104K10	
C 1010	(B,90,71)	CKSRYB105K10		C 1302	(A,100,25)	CKSSYB104K10	
C 1011	(B,88,71)	CKSRYB105K10		C 1303	(A,103,26)	CKSSYB104K10	
C 1012	(B,86,71)	CKSRYB105K10		C 1304	(A,106,25)	CKSSYB104K10	
C 1013	(B,85,71)	CKSRYB105K10		C 1305	(A,108,24)	CKSSYB104K10	
C 1014	(B,83,72)	CKSRYB105K10		C 1306	(A,110,25)	CKSSYB104K10	
C 1015	(B,81,71)	CKSRYB105K10		C 1307	(A,114,25)	CKSSYB104K10	
C 1016	(B,79,71)	CKSRYB105K10		C 1308	(A,117,25)	CKSSYB104K10	
C 1017	(B,78,71)	CKSRYB105K10		C 1309	(B,109,43)	CCSSCH470J50	
C 1018	(B,76,71)	CKSRYB105K10		C 1310	(A,124,30)	CKSSYB104K10	D
C 1051	(B,82,50)	CKSSYB474K6R3		C 1311	(A,124,32)	CKSSYB104K10	
C 1052	(B,83,50)	CKSSYB474K6R3		C 1312	(A,124,34)	CKSSYB104K10	
C 1053	(B,83,48)	CKSSYB474K6R3		C 1313	(A,125,36)	CKSSYB104K10	
C 1054	(B,79,50)	CKSSYB103K16		C 1314	(A,124,38)	CKSSYB104K10	
C 1055	(B,79,49)	CKSSYB102K50		C 1315	(A,124,40)	CKSSYB104K10	
C 1056	(B,81,50)	CKSSYB103K16		C 1316	(A,124,41)	CKSSYB104K10	
C 1057	(B,72,46) 10 uF	CCG1192		C 1317	(A,125,43)	CKSSYB104K10	
C 1058	(B,74,45)	CKSSYB102K50		C 1318	(A,124,46)	CKSSYB104K10	
C 1059	(B,90,46)	CKSSYB104K10		C 1319	(A,124,49)	CKSSYB104K10	
C 1060	(B,73,45)	CKSSYB103K16		C 1320	(B,122,52)	CKSSYB104K10	
C 1061	(B,90,44)	CKSSYB104K10		C 1321	(B,122,53)	CKSSYB104K10	E
C 1062	(B,70,46)	CKSRYB105K10		C 1322	(A,123,54)	CKSSYB104K10	
C 1063	(B,72,42) 10 uF	CCG1192		C 1323	(A,125,57)	CKSSYB104K10	
C 1064	(B,74,42)	CKSSYB104K10		C 1324	(A,94,60)	CKSSYB104K10	
C 1065	(B,74,40)	CKSSYB104K10		C 1325	(A,96,60)	CKSSYB104K10	
C 1066	(B,90,40)	CKSSYB104K10		C 1326	(A,101,59)	CKSSYB104K10	
C 1067	(B,73,39)	CKSSYB104K10		C 1327	(A,102,60)	CKSSYB104K10	
C 1068	(B,90,38)	CKSSYB104K10		C 1328	(B,105,57)	CKSSYB104K10	
C 1069	(B,89,36)	CKSSYB104K10		C 1329	(B,106,57)	CKSSYB104K10	
C 1070	(B,73,35)	CCSSCH5R0C50		C 1330	(A,105,60)	CKSSYB104K10	
C 1071	(B,68,35)	CCSSCH5R0C50		C 1331	(B,107,57)	CKSSYB104K10	F
C 1072	(B,74,29) 10 uF	CCG1192		C 1332	(A,109,60)	CKSSYB104K10	
C 1073	(B,79,33)	CKSSYB104K10		C 1333	(A,113,60)	CKSSYB104K10	
C 1074	(B,81,33)	CKSSYB104K10		C 1334	(B,111,57)	CKSSYB104K10	
C 1075	(B,74,32)	CKSSYB103K16		C 1335	(A,114,60)	CKSSYB104K10	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 1336 (A,106,63) 1 uF	DCH1246	C 1611 (A,40,110)	CCSRCH270J50
	C 1337 (A,103,63)	CCSSCH100D50	C 1612 (A,27,115)	CCSRCH270J50
	C 1338 (A,102,67)	CCSSCH100D50	C 1621 (B,139,111)	CKSRYB104K50
	C 1339 (A,110,64)	CCSSCH120J50	C 1622 (B,119,110)	CKSRYB104K50
	C 1340 (A,116,65)	CCSSCH120J50	C 1624 (B,131,111)	CKSRYB104K50
■	C 1341 (B,93,22)	CKSSYB104K10	C 1631 (B,45,107) 4.7 uF	CCG1201
	C 1342 (B,92,32)	CKSSYB104K10	C 1632 (B,39,107) 4.7 uF	CCG1201
	C 1343 (B,92,33)	CKSSYB104K10	C 1633 (B,43,107) 4.7 uF	CCG1201
	C 1344 (B,92,37)	CKSSYB104K10	C 1634 (B,37,107) 4.7 uF	CCG1201
	C 1345 (B,92,38)	CKSSYB104K10	C 1635 (B,41,107) 4.7 uF	CCG1201
B	C 1346 (B,92,41)	CKSSYB104K10	C 1636 (B,35,107) 4.7 uF	CCG1201
	C 1347 (B,92,42)	CKSSYB104K10	C 1651 (B,23,20)	CKSSYB104K10
	C 1348 (B,92,45)	CKSSYB104K10	C 1661 (B,126,13)	CKSSYB471K50
	C 1349 (B,92,46)	CKSSYB104K10	C 1671 (A,160,21)	CCSSCH101J50
	C 1350 (B,93,48)	CKSSYB104K10	C 1672 (A,163,36) 10 uF	CCG1192
■	C 1351 (A,84,49)	CCSSCH120J50	C 1673 (A,158,37) 10 uF	CCG1192
	C 1352 (B,93,49)	CKSSYB104K10	C 1676 (A,162,17)	XCEVW221M4
	C 1353 (A,89,50)	CCSSCH120J50	C 1677 (B,155,36)	CKSSYB103K16
	C 1354 (B,93,51)	CKSSYB104K10	C 1678 (B,163,25)	CKSRYB105K10
	C 1355 (B,108,22)	CKSSYB103K16	C 1681 (A,160,36)	CKSRYB104K16
C	C 1356 (B,138,46)	CKSSYB103K16	C 1682 (A,143,19) 10 uF	CCG1192
	C 1357 (B,106,25) 10 uF	CCG1192	C 1683 (A,146,23)	CKSSYB182K50
	C 1358 (B,139,45) 10 uF	CCG1192	C 1685 (A,145,18)	CKSSYB104K10
	C 1360 (A,87,30)	CCSSCH470J50	C 1686 (A,145,12)	CKSSYB182K50
	C 1361 (B,101,34)	CCSSCH560J50	C 1687 (A,143,23) 10 uF	CCG1192
■	C 1362 (A,84,34)	CCSSCH560J50	C 1688 (B,146,6)	CCSSCH101J50
	C 1363 (A,83,35)	CCSSCH560J50	C 1689 (B,146,7)	CKSSYB104K10
	C 1364 (A,82,35)	CCSSCH560J50	C 1701 (B,65,25)	CKSSYB471K50
	C 1365 (A,86,37)	CCSSCH560J50	C 1702 (B,63,25)	CKSSYB104K10
	C 1366 (A,84,37)	CCSSCH560J50	C 1703 (A,83,32)	CKSSYB104K16
D	C 1367 (A,83,38)	CCSSCH560J50	C 1704 (B,78,29)	CKSSYB104K10
	C 1368 (A,81,38)	CCSSCH560J50	C 1721 (A,122,101)	CCSSCH101J50
	C 1369 (A,82,41)	CCSSCH560J50	C 1722 (A,130,93)	CKSRYB105K10
	C 1370 (A,82,40)	CCSSCH560J50	C 1723 (A,134,100)	CKSRYB105K10
	C 1371 (A,80,41)	CCSSCH560J50	C 1724 (A,131,100)	CCSSCH101J50
■	C 1372 (A,80,42)	CCSSCH560J50	C 1725 (A,127,103)	CKSSYB104K10
	C 1373 (A,79,42)	CCSSCH560J50	C 1731 (A,125,104) 2.2 uF	CCG1218
	C 1374 (A,77,42)	CCSSCH560J50	C 1732 (A,124,104) 2.2 uF	CCG1218
	C 1375 (A,81,46)	CCSSCH560J50	C 1733 (A,122,110)	CKSSYB104K10
	C 1376 (A,79,46)	CCSSCH560J50	C 1734 (A,119,112)	CCSSCH101J50
E	C 1377 (A,81,50)	CCSSCH560J50	C 1735 (A,120,109) 2.2 uF	CCG1218
	C 1379 (A,81,52)	CCSSCH560J50	C 1736 (B,120,78) (A)	CKSSYB104K10
	C 1380 (A,81,54)	CCSSCH560J50	C 1737 (A,128,110) 2.2 uF	CCG1218
	C 1382 (A,86,26)	CCSSCH150J50	C 1738 (A,132,112) 2.2 uF	CCG1218
	C 1383 (A,86,33)	CCSSCH6R0D50	C 1739 (A,130,106)	CKSSYB104K10
■	C 1384 (A,110,60) 1 uF	DCH1246	C 1751 (B,62,67) (A)	CKSSYB104K10
	C 1386 (B,139,48)	CCSRCH102J50	C 1801 (A,64,76)	XCEHVW470M16
	C 1387 (B,108,26)	CCSRCH331J50	C 1802 (B,57,85)	CKSSYB104K10
	C 1388 (B,136,48)	CCSRCH331J50	C 1803 (B,63,82)	CKSRYB104K50
	C 1389 (B,110,26)	CCSRCH102J50	C 1804 (A,75,86)	XCEHAT102M16
F	C 1390 (A,90,30)	CCSSCH100D50	C 1821 (A,101,99) 100 uF/16 V(A)	CCH2081
	C 1399 (A,128,39)	CKSRYB224K16	(A,101,99) (B)	XCEHVW101M16
	C 1601 (A,156,105)	CKSRYB104K50	(A,84,102)	CKSRYB105K16
	C 1604 (B,129,22)	CKSRYB104K16	C 1851 (A,98,90)	CKSSYB104K16
	C 1605 (B,128,11)	CKSRYB104K16	C 1855 (A,102,86) 10 uF	CCG1244
■	C 1606 (B,145,10)	CKSRYB104K16	C 1901 (B,35,62) 10 uF	CCG1192
	C 1607 (A,46,112)	CCSRCH270J50	C 1902 (B,32,61)	CKSRYB105K10
	C 1608 (A,36,115)	CCSRCH270J50	C 1906 (B,96,92) (A)	CKSSYB103K16
	C 1609 (A,42,115)	CCSRCH270J50	C 1911 (B,27,38) 2.2 uF(A)	CCG1218
	C 1610 (A,32,111)	CCSRCH270J50	C 1912 (B,24,39) (A)	CKSRYB105K10

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

S 3 (B,25,13) Spring Switch(12EJ) CSN1081
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B) CCP1447
 VR1102 (A,7,60) Semi-fixed 15 kohm(B) CCP1449

R 1508 (B,42,18)
 R 1509 (A,20,34)
 R 1510 (A,11,29)

RS1/16SS221J
 RS1/16SS102J
 RS1/16SS102J

A CN1101 (A,21,63) Connector CKS6331
 CN1952 (A,42,11) Connector CKS6025

R 1512 (A,55,32)
 R 1513 (A,23,38)
 R 1514 (A,24,40)
 R 1516 (A,24,36)
 R 1517 (B,57,22)

RS1/16SS470J
 RS1/16SS103J
 RS1/16SS183J
 RS1/16SS104J
 RS1/16SS103J

RESISTORS

R 1004 (B,12,20) RS1/16SS4702D
 R 1007 (B,12,21) RS1/16SS6801D
 R 1019 (B,34,7) RS1/16SS101J
 R 1025 (B,36,6) RS1/16SS101J
 R 1027 (A,40,18) RS1/16SS101J

R 1518 (B,33,31)
 R 1519 (A,24,43)
 R 1522 (A,21,37)
 R 1523 (A,22,37)
 R 1524 (B,29,33)

RS1/16SS103J
 RS1/16SS102J
 RS1/16SS104J
 RS1/16SS221J
 RS1/16SS472J

B R 1101 (B,15,57) RS1/16SS104J
 R 1102 (B,10,56) RS1/16SS104J
 R 1103 (B,14,61) RS1/16SS4300F
 R 1104 (B,11,59) RS1/16SS5100F
 R 1105 (B,17,54) RS1/16SS4300F

R 1525 (A,24,44)
 R 1526 (A,22,40)
 R 1527 (A,35,49)
 R 1528 (B,19,34)
 R 1529 (B,35,21)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS682J
 RS1/16SS103J
 RS1/16SS103J

R 1106 (B,10,57) RS1/16SS5600F
 R 1109 (B,6,57) RS1/16SS3R3J
 R 1110 (B,16,54) RS1/16SS3R3J
 R 1111 (B,6,63) RS1/10SR3R3J
 R 1112 (B,5,58) RS1/10SR3R3J

R 1530 (B,17,34)
 R 1531 (B,33,30)
 R 1532 (A,24,42)
 R 1534 (B,29,48)
 R 1535 (A,22,44)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS101J
 RS1/16SS221J
 RS1/16SS104J

C R 1113 (B,15,59) RS1/10SR3R9J
 R 1114 (B,19,57) RS1/10SR3R3J
 R 1115 (B,6,61) RS1/10SR2R7J
 R 1116 (B,6,62) RS1/10SR2R7J
 R 1117 (B,17,59) RS1/10SR3R9J

R 1536 (B,32,48)
 R 1537 (A,24,46)
 R 1538 (A,55,35)
 R 1539 (B,33,48)
 R 1540 (A,26,46)

RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS221J

R 1118 (B,16,59) RS1/10SR3R9J
 R 1223 (A,42,50) RS1/16SS561J
 R 1225 (B,29,8) RS1/16SS471J
 R 1251 (A,5,48) RS1/16SS333J
 R 1252 (A,5,47) RS1/16SS473J

R 1541 (A,26,45)
 R 1542 (B,26,34)
 R 1543 (A,32,48)
 R 1544 (A,36,48)
 R 1546 (A,33,49)

RS1/16SS221J
 RS1/16SS103J
 RS1/16SS181J
 RS1/16SS181J
 RS1/16SS682J

R 1253 (A,5,46) RS1/16SS333J
 R 1254 (A,5,45) RS1/16SS473J
 R 1255 (A,21,48) RS1/16SS183J
 D R 1256 (A,21,46) RS1/16SS752J
 R 1257 (B,8,37) RS1/16SS221J

R 1601 (A,32,17)
 R 1602 (A,32,18)
 R 1603 (B,31,21)
 R 1604 (A,23,21)
 R 1605 (A,22,23)

RS1/16SS123J
 RS1/16SS123J
 RS1/16SS1002D
 RS1/16SS105J
 RS1/16SS105J

R 1258 (A,19,39) RS1/16SS221J
 R 1401 (B,34,28) RS1/16SS221J
 R 1402 (B,34,47) RS1/16SS104J
 R 1405 (B,55,35) RS1/16SS104J
 R 1406 (B,39,45) RS1/16SS472J

R 1670 (B,40,21)
 R 1671 (B,42,19)
 R 1672 (A,39,18)
 R 1674 (A,36,17)
 R 1801 (B,41,8)

RS1/16SS1002D
 RS1/16SS2402D
 RS1/16SS2000D
 RS1/16SS3002D
 RS1/16SS104J

R 1480 (A,72,24) RAB4CQ560J
 R 1481 (A,72,28) RAB4CQ560J
 R 1482 (A,72,32) RAB4CQ560J
 R 1483 (A,72,35) RAB4CQ560J
 E R 1484 (A,72,39) RAB4CQ560J

R 1802 (B,43,8)
 R 1803 (B,37,13)
 R 1804 (B,39,14)
 R 1950 (A,44,18)
 R 1951 (A,42,18)

RS1/16SS104J
 RS1/16SS821J
 RS1/16SS821J
 RS1/10SR24R0F
 RS1/10SR24R0F

R 1485 (A,55,22) RAB4CQ560J
 R 1486 (A,55,28) RAB4CQ560J
 R 1487 (A,56,37) RAB4CQ560J
 R 1488 (A,55,40) RAB4CQ560J
 R 1489 (A,54,30) RS1/16SS560J

R 1952 (A,26,50)
 R 1953 (A,26,51)
 R 1954 (A,48,5)
 R 1955 (A,50,5)
 R 1982 (A,10,62)

RS1/16SS105J
 RS1/16SS821J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS822J

R 1490 (A,72,21) RS1/16SS560J
 R 1501 (B,48,21) RS1/16SS122J
 R 1503 (B,46,21) RS1/16SS105J
 R 1504 (A,50,17) RS1/16SS121J
 F R 1505 (B,45,15) RS1/16SS101J

R 1983 (B,40,20)
 R 1987 (B,43,21)

RS1/16SS1000D
 RS1/16SS0R0J

CAPACITORS

R 1506 (B,45,14) RS1/16SS101J
 R 1507 (B,43,17) RS1/16SS101J

C 1001 (B,34,10)
 C 1002 (B,12,17)

CKSRYB105K10
 CKSSYB104K16

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 1003	(B,15,19)		CKSSYB104K16			C 1519	(A,34,47)		CKSSYB104K10		
C 1004	(B,15,17) 4.7 uF		CCG1201			C 1520	(A,27,47)		CKSSYB104K10		
C 1005	(B,40,11)		CKSRYB105K16			C 1521	(A,24,34)		CKSSYB104K10		
C 1010	(B,60,23)		CKSQYB225K10			C 1522	(A,25,38)		CKSSYB104K10		A
C 1011	(B,64,22)		CKSRYB105K10			C 1523	(A,20,46)		CKSSYB224K6R3		
C 1015	(A,25,7)		CKSSYB102K50			C 1524	(A,20,48)		CKSSYB473K16		
C 1016	(B,64,15)		CKSSYB102K50			C 1526	(A,24,37)		CKSSYB103K16		
C 1018	(B,14,21)		CKSSYB104K10			C 1528	(B,30,48)		CCSSCH471J50		
C 1040	(B,51,7)		CCSRCH821J50			C 1601	(A,32,19)		CKSSYB103K16		
C 1041	(B,19,11)		CCSRCH271J50			C 1602	(A,34,17)		CCSSCH101J50		
C 1101	(B,14,53) 10 uF		CCG1192			C 1603	(A,33,18)		CCSSCH101J50		
C 1104	(B,7,57)		CKSSYB104K10			C 1604	(A,30,17)		CCSSCH680J50		
C 1105	(B,18,54)		CKSSYB104K10			C 1605	(A,30,18)		CCSSCH680J50		
C 1106	(B,8,66)		CKSSYB103K16			C 1606	(A,35,19)		CKSSYB104K10		B
C 1107	(B,25,53)		CKSSYB103K16			C 1607	(A,20,24) 10 uF		CCG1192		
C 1108	(A,19,57)		CKSSYB103K16			C 1608	(A,28,18) 4.7 uF		CCG1201		
C 1109	(A,7,57)		CKSRYB224K16			C 1609	(A,26,22)		CKSSYB104K10		
C 1110	(A,17,58)		CKSSYB103K16			C 1612	(A,24,24)		CKSSYB104K10		
C 1111	(A,9,66)		CKSRYB224K16			C 1613	(A,24,25)		CKSSYB104K10		
C 1112	(B,17,52) 22 uF		DCH1256			C 1614	(A,22,24)		CKSSYB104K10		
C 1113	(B,8,58) 22 uF		DCH1256			C 1615	(A,23,26)		CKSSYB104K10		
C 1210	(B,77,34)		CKSSYB104K16			C 1616	(A,24,27)		CKSSYB104K10		
C 1251	(B,12,41)		CEVW101M16			C 1617	(B,27,28)		CKSSYB104K10		
C 1252	(B,7,41) 4.7 uF		CCG1222			C 1618	(A,22,29)		CCSSCH101J50		
C 1253	(B,7,39)		CKSSYB104K16			C 1619	(A,23,30)		CKSSYB562K25		C
C 1254	(A,6,38)		CKSSYB104K16			C 1620	(B,27,30)		CKSSYB224K6R3		
C 1255	(A,18,37)		CKSSYB104K16			C 1621	(A,22,31)		CKSSYB224K6R3		
C 1401	(B,34,27)		CKSSYB104K16			C 1622	(A,24,31)		CKSSYB333K16		
C 1403	(B,39,40)		CKSSYB104K10			C 1623	(A,27,20)		CKSRYB105K10		
C 1404	(B,40,40) 4.7 uF		CCG1201			C 1624	(A,24,32)		CKSSYB104K10		
C 1408	(B,57,27)		CKSSYB104K10			C 1625	(A,24,29)		CKSSYB104K10		
C 1409	(B,58,29) 4.7 uF		CCG1201			C 1671	(A,41,18)		CKSSYB104K10		
C 1410	(B,33,29)		CKSSYB104K16			C 1673	(A,37,19)		CKSSYB104K10		
C 1480	(A,71,19)		CKSSYB104K10			C 1674	(B,42,20)		CKSSYB104K10		
C 1481	(A,72,22)		CKSSYB104K10			C 1676	(B,38,21)		CKSRYB105K10		
C 1482	(A,72,26)		CKSSYB104K10			C 1801	(B,42,10) 4.7 uF		CCG1201		D
C 1484	(A,72,30)		CKSSYB104K10			C 1802	(B,46,10) 4.7 uF		CCG1201		
C 1485	(A,72,41)		CKSSYB104K10			C 1803	(B,42,12)		CCSRCH182J50		
C 1487	(A,57,29)		CKSSYB104K10			C 1804	(B,45,12)		CCSRCH182J50		
C 1488	(A,57,25)		CKSSYB104K10			C 1805	(B,34,13)		CKSSYB104K10		
C 1489	(A,64,17) 10 uF		CCG1192			C 1806	(B,32,13) 10 uF		CCG1192		
C 1490	(A,66,18)		CKSSYB102K50			C 1809	(B,39,16)		CKSSYB104K10		
C 1501	(B,61,20) 10 uF		CCG1192			C 1950	(A,27,51)		CKSSYB104K10		
C 1502	(B,54,20) 10 uF		CCG1192			C 1951	(A,23,54)		CCSSCH100D50		
C 1503	(A,54,33)		CKSSYB104K10			C 1952	(A,24,48)		CCSSCH100D50		
C 1504	(A,53,24)		CKSSYB104K10			C 1953	(B,60,17)		CKSRYB105K10		
C 1505	(A,53,27)		CKSSYB104K10			C 1954	(B,54,17)		CKSRYB105K10		E
C 1506	(B,52,35)		CKSSYB104K10			C 1955	(B,77,40)		CKSSYB104K16		
C 1507	(A,53,36)		CKSSYB104K10								
C 1508	(A,53,39)		CKSSYB104K10								
C 1509	(A,53,42)		CKSSYB104K10								
C 1510	(B,51,18)		CCSSCH100D50								
C 1511	(A,48,18)		CKSSYB104K10								
C 1512	(B,45,18)		CCSSCH100D50								
C 1513	(A,48,48)		CKSSYB104K10								
C 1514	(B,45,21)		CKSSYB104K10								
C 1515	(A,45,18)		CKSSYB104K10								
C 1516	(A,43,48)		CKSSYB104K10								
C 1517	(A,42,48)		CKSSYB104K10								
C 1518	(A,38,48)		CKSSYB104K10								

D

Unit Number : CXX6054
Unit Name : Service Unit(Monitor)

MISCELLANEOUS

IC 5101	(A,25,67) IC	R1290K103A
IC 5102	(A,71,40) Regulator IC	MM3479A33P
IC 5201	(A,110,69) IC	BD81A04EFV-M
IC 5301	(A,114,26) IC	AK4187VN

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	Q 5101	(A,30,61) Transistor	LTC014EEB
	Q 5103	(A,13,28) Transistor	LSAR523UB
	Q 5106	(A,24,76) Transistor	2SA1577
	Q 5401	(A,101,42) Chip Transistor	HN1C01FU
	Q 5402	(A,99,45) Transistor	LSCR523UB
D	D 5101	(A,17,71) Diode	RB162M-40
	D 5103	(A,32,75) Diode	RB548W
	D 5104	(A,34,75) Diode	RB548W
	D 5105	(A,34,67) Diode	RB548W
	D 5132	(A,72,49) Diode	CRG03
L	D 5201	(A,111,56) Diode	RB060M-30
	L 5001	(A,9,46) Inductor	CTF1635
L	L 5002	(A,9,52) Chip Inductor	DTL1096
	L 5003	(A,21,44) Chip Inductor	DTL1096
	L 5004	(A,14,36) Chip Ferrite Bead	BTX1042
L	L 5101	(A,21,73) Choke Coil 22 uH	CTH1426
	L 5102	(A,8,32) Inductor	LCTAW101J2520
L	L 5202	(A,106,58) Inductor	CTH1526
	L 5205	(A,109,62) Chip Beads	VTL1128
	L 5303	(A,112,18) Chip Beads(B)	VTL1134
TH	TH5201	(A,104,15) Thermistor	CCX1058
	CN5001	(A,34,32) Connector	CKS6536
CN	CN5201	(A,127,56) Connector	CKS6523
	CN5301	(A,121,17) Connector	CKS6548
	CN5401	(A,58,69) Connector	CKS6536
	CN5403	(A,140,17) Connector	CKS6604

RESISTORS

R	R 5001	(A,60,18)	RS1/16SS4R7J
	R 5002	(A,62,18)	RS1/16SS56R0D
	R 5003	(A,61,20)	RS1/16SS1800D
	R 5004	(A,60,21)	RS1/16SS2R2J
	R 5005	(A,61,22)	RS1/16SS47R0D
R	R 5006	(A,60,22)	RS1/16SS0R0J
R	R 5007	(A,61,23)	RS1/16SS39R0D
	R 5008	(A,60,24)	RS1/16SS4R7J
	R 5009	(A,61,25)	RS1/16SS1000D
	R 5010	(A,60,26)	RS1/16SS8R2J
R	R 5011	(A,61,27)	RS1/16SS1300D
R	R 5012	(A,60,28)	RS1/16SS0R0J
	R 5013	(A,61,29)	RS1/16SS1000D
	R 5014	(A,60,30)	RS1/16SS8R2J
	R 5015	(A,61,31)	RS1/16SS39R0D
R	R 5016	(A,61,33)	RS1/16SS4R7J
R	R 5017	(A,64,33)	RS1/16SS47R0D
	R 5018	(A,66,33)	RS1/16SS0R0J
	R 5019	(A,67,33)	RS1/16SS1800D
	R 5020	(A,69,33)	RS1/16SS2R2J
R	R 5021	(A,70,32)	RS1/16SS33R0D
R	R 5022	(A,70,30)	RS1/16SS2R4J
	R 5023	(A,38,73)	RS1/16SS0R0J
	R 5024	(B,30,35)	RS1/16SS473J
	R 5026	(B,24,35)	RS1/16SS473J
R	R 5028	(B,25,33)	RS1/16SS473J
R	R 5029	(B,26,35)	RS1/16SS473J
	R 5101	(A,17,60)	RS1/16SS103J
	R 5103	(A,24,61)	RS1/16SS203J
	R 5104	(A,25,60)	RS1/16SS104J
R	R 5106	(A,27,63)	RS1/16SS472J

R 5107	(A,21,70)	RS1/16SS0R0J
R 5108	(A,24,73)	RS1/16SS103J
R 5109	(A,30,63)	RS1/16SS1502D
R 5110	(A,28,64)	RS1/16SS8201D
R 5111	(A,28,63)	RS1/16SS1502D
R 5112	(B,65,79)	RS1/16SS0R0J
R 5113	(A,18,70)	RS1/10SR2R2J
R 5116	(A,21,63)	RS1/16SS3001D
R 5117	(A,21,62)	RS1/16SS1502D
R 5122	(A,9,28)	RS1/16SS472J
R 5124	(A,10,28)	RS1/16SS105J
R 5125	(A,13,30)	RS1/16SS682J
R 5126	(A,14,30)	RS1/16SS0R0J
R 5128	(A,15,35)	RS1/16SS101J
R 5129	(A,15,32)	RS1/16SS0R0J
R 5134	(A,16,62)	RS1/16SS0R0J
R 5135	(A,19,62)	RS1/16SS1203D
R 5136	(A,18,62)	RS1/16SS472J
R 5140	(A,30,67)	RS1/16SS9102D
R 5141	(A,30,66)	RS1/16SS1802D
R 5142	(A,31,69)	RS1/16SS1003D
R 5143	(A,29,69)	RS1/16SS9101D
R 5144	(B,23,68)	RS1/16SS0R0J
R 5202	(A,113,76)	RS1/16SS273J
R 5203	(A,114,76)	RS1/16SS511J
R 5205	(B,108,66)	RS1/16SS1503D
R 5206	(B,108,67)	RS1/16SS1003D
R 5207	(A,97,74)	RS1/16SS101J
R 5212	(B,106,65)	RS1/16SS3603D
R 5213	(B,106,66)	RS1/16SS2402D
R 5219	(A,103,74)	RS1/16SS104J
R 5220	(A,103,73)	RS1/16SS154J
R 5222	(A,74,63)	RS1/10SR0R0J
R 5223	(A,132,71)	RS1/10SR0R0J
R 5225	(A,112,60)	RS1/8SQ2R2J
R 5301	(A,111,17) (A)	RS1/10SR0R0J
R 5302	(B,119,21)	RS1/16SS201J
R 5304	(A,109,27)	RS1/16SS472J
R 5305	(A,109,28)	RS1/16SS472J
R 5306	(A,119,25)	RS1/16SS0R0J
R 5307	(A,118,25)	RS1/16SS621J
R 5308	(A,118,27)	RS1/16SS181J
R 5309	(B,110,27)	RS1/16SS101J
R 5310	(B,117,25)	RS1/16SS0R0J
R 5311	(A,109,29)	RS1/16SS101J
R 5312	(A,119,26)	RS1/16SS620J
R 5318	(B,111,24)	RS1/16SS101J
R 5401	(A,102,45)	RS1/16SS680J
R 5402	(A,103,45)	RS1/16SS560J
R 5405	(A,100,40)	RS1/16SS680J
R 5406	(A,99,40)	RS1/16SS560J
R 5409	(A,97,44)	RS1/16SS680J
R 5410	(A,96,44)	RS1/16SS560J
R 5413	(A,99,42)	RS1/16SS103J
R 5414	(A,101,39)	RS1/16SS103J
R 5415	(A,96,46)	RS1/16SS103J
R 5416	(A,39,60)	RS1/16SS0R0J
R 5417	(A,40,61)	RS1/16SS0R0J
R 5418	(A,41,60)	RS1/16SS0R0J
R 5419	(A,42,61)	RS1/16SS0R0J

5

Circuit Symbol and No.

R 5420	(A,44,61)
R 5421	(A,44,58)
R 5422	(A,43,57)
R 5423	(A,45,58)
R 5424	(A,45,57)
R 5425	(A,47,58)
R 5426	(A,47,56)
R 5427	(A,48,58)
R 5428	(A,48,56)
R 5429	(A,50,58)
R 5430	(A,50,56)
R 5431	(A,51,58)
R 5432	(A,51,56)
R 5433	(A,52,56)
R 5434	(A,53,58)
R 5435	(A,54,56)
R 5436	(A,55,58)
R 5437	(A,55,56)
R 5438	(A,56,58)
R 5439	(A,57,56)
R 5440	(A,59,58)

CAPACITORS

C 5009	(A,63,27)		CKSSYB102K50
C 5010	(A,63,28)		CKSSYB104K16
C 5011	(A,63,29)		CKSSYB102K50
C 5012	(A,63,30)		CKSSYB104K16
C 5021	(A,31,37)		CKSSYB102K50
C 5023	(A,31,39)		CKSSYB104K16
C 5025	(A,15,47)	10 uF	CCG1236
C 5026	(A,8,44)		CKSSYB102K50
C 5029	(A,28,38)		CKSSYB102K50
C 5030	(A,28,39)		CKSSYB104K10
C 5031	(A,9,50)	10 uF	CCG1192
C 5034	(A,22,40)		CKSSYB104K16
C 5035	(A,21,42)	4.7 uF	CCG1201
C 5037	(A,17,43)		CKSQYB225K16
C 5039	(A,20,38)		CKSRYB104K50
C 5040	(A,17,37)		CKSQYB334K50
C 5042	(A,16,33)		CKSSYB104K16
C 5051	(A,39,73)		CKSSYB471K50
C 5101	(A,20,78)	4.7 uF	CCG1201
C 5102	(A,21,67)		CKSSYB102K50
C 5103	(A,20,66)	1 uF	DCH1246
C 5104	(A,21,60)		CKSSYB123K16
C 5105	(A,23,60)		CKSSYB104K10
C 5106	(A,28,60)		CKSRYB105K10
C 5107	(A,24,62)		CKSSYB682K25
C 5108	(A,17,68)		CKSSYB332K50
C 5109	(A,32,63)		CCSSCH101J50
C 5110	(A,35,64)		CKSSYB122K50
C 5111	(A,15,64)	10 uF	CCG1236
C 5112	(A,15,67)	10 uF	CCG1236
C 5113	(A,21,64)		CKSSYB471K50
C 5114	(A,11,28)		CKSSYB104K16
C 5115	(A,8,30)	10 uF	CCG1236
C 5116	(A,69,44)	4.7 uF	CCG1201
C 5117	(A,73,44)	4.7 uF	CCG1201
C 5118	(A,60,63)		CKSSYB104K10

6
Part No.
RS1/16SS270J
RS1/16SS0R0J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J

RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J

RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J

RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J
RS1/16SS270J

RS1/16SS0R0J

7			
<u>Circuit Symbol and No.</u>			
C 5120	(A,33,72)		
C 5121	(A,35,72)		
C 5122	(A,32,67)		
C 5123	(A,35,66)		
C 5124	(A,31,77)		
C 5125	(A,34,77)		
C 5127	(A,28,73)		
C 5128	(A,74,38)		
C 5140	(A,31,70)		
C 5203	(B,110,66)	2.2 uF	
C 5204	(A,115,76)		
C 5205	(A,101,62)	10 uF	
C 5206	(A,114,77)		
C 5208	(A,116,56)	10 uF	
C 5209	(A,104,17)		
C 5211	(A,118,56)	10 uF	
C 5212	(A,122,63)		
C 5213	(A,79,65)		
C 5214	(A,116,74)		
C 5215	(A,114,60)		
C 5301	(A,113,21)	10 uF	
C 5302	(A,108,24)	10 uF	

C 5303	(A,114,23)	CKSSYB104K10
C 5304	(A,110,25)	CKSSYB104K10
C 5305	(B,123,25)	CKSSYB103K16
C 5306	(B,116,25)	CKSSYB103K16
C 5307	(A,117,24)	CKSSYB103K16
C 5308	(B,121,21)	CKSSYB103K16
C 5314	(A,106,23) (B)	CKSSYB104K10
C 5401	(A,68,64)	CKSSYB104K10

E
Unit Number: CXX6058
Unit Name : Service Unit(Keyboard)

MISCELLANEOUS

D 3801	(A,151,6) LED	SMLVN6RGB2UK(B)
D 3802	(A,15,6) LED	SMLVN6RGB2UK(B)
S 3801	(A,24,6) Switch	VSG1020
S 3802	(A,128,6) Switch	VSG1020
S 3803	(A,114,6) Switch	VSG1020
S 3804	(A,99,6) Switch	VSG1020
S 3805	(A,83,6) Switch	VSG1020
S 3806	(A,142,6) Switch	VSG1020
S 3807	(A,67,6) Switch	VSG1020
S 3808	(A,52,6) Switch	VSG1020
S 3809	(A,38,6) Switch	VSG1020
S 3810	(A,9,6) Push Switch	CSG1155
U 3801	(A,159,6) Remote Receiver Unit	RS-470
CN3801	(B,22,6) Connector	CKS6291

RESISTORS

R 3802	(A,153,8)	RS1/16SS470J
R 3803	(A,29,7)	RS1/16SS182J
R 3804	(A,123,8)	RS1/16SS222J
R 3805	(A,109,8)	RS1/16SS472J
R 3806	(A,95,8)	RS1/16SS123J
R 3807	(A,138,8)	RS1/16SS182J

1	2	3	4
<u>Circuit Symbol and No.</u>	<u>Part No.</u>		
R 3808 (A,62,7)	RS1/16SS222J		
R 3809 (A,47,8)	RS1/16SS472J		

A **CAPACITORS**

C 3807 (A,154,8)	CKSSYB104K10
------------------	--------------

F

Unit Number : EXX2001
Unit Name : PCB Unit(Service)

B **MISCELLANEOUS**

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connector	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

C **CAPACITORS**

C 101	CEVW220M16
C 102	CKSRYB104K16

D

E

F