


# EXPLODED VIEW / PARTS LIST


Escutcheon section

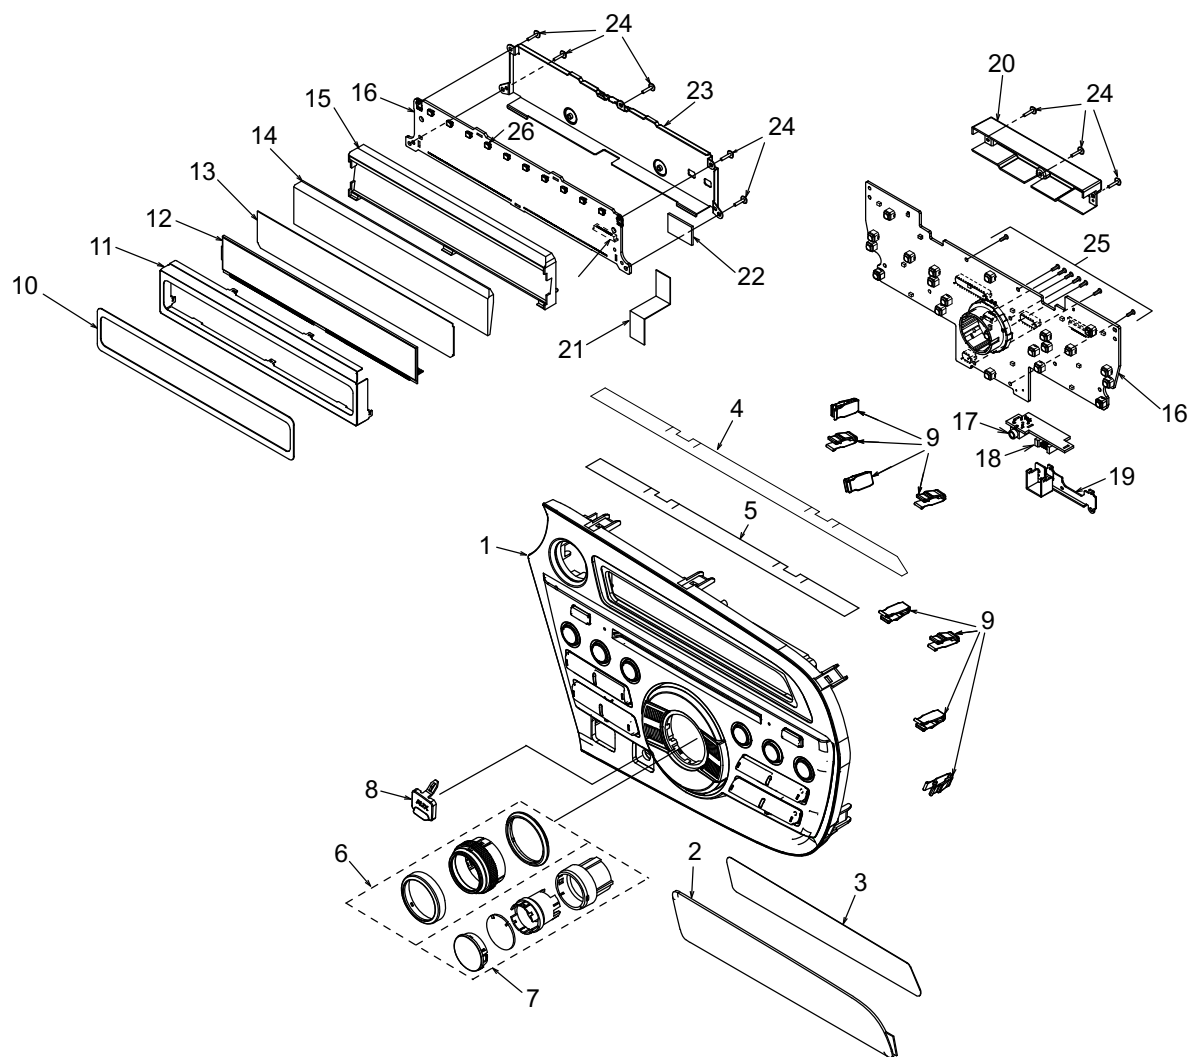

| NO. | PART NO.    | DESCRIPTION     | Q'TY |
|-----|-------------|-----------------|------|
| 1   | 940-8235-15 | ES-ASSY         | 1    |
| 2   | 373-1177-01 | DIAL COVER      | 1    |
| 3   | 347-8523-00 | CLEAR-SHEET     | 1    |
| 4   | 347-8694-10 | CUSHION         | 1    |
| 5   | 347-8638-01 | CUSHION         | 1    |
| 6   | 948-0854-02 | KNOB-ASSY       | 1    |
| 7   | 948-0853-04 | BUTTON-ASSY     | 1    |
| 8   | 335-8460-01 | AUX CAP         | 1    |
| 9   | 335-8461-00 | CLIP            | 8    |
| 10  | 345-6232-00 | CUSHION         | 1    |
| 11  | 331-4696-00 | LCD CVR         | 1    |
| 12  | 379-1414-43 | INDICATOR (LCD) | 1    |
| 13  | 335-7636-20 | COLOR FILTER    | 1    |

| NO. | PART NO.    | DESCRIPTION       | Q'TY |
|-----|-------------|-------------------|------|
| 14  | 335-7601-00 | LCD ILLUMI        | 1    |
| 15  | 335-8464-02 | ILLUMI HOLDER     | 1    |
| 16  | -----       | Switch PWB        | 1    |
| 17  | 075-0306-00 | JACK              | 1    |
| 18  | 076-3011-56 | PLUG (6P)         | 1    |
| 19  | 331-4699-00 | AUX HOLDER        | 1    |
| 20  | 335-8459-00 | AUX COVER         | 1    |
| 21  | 816-3029-57 | FLAT WIRE         | 1    |
| 22  | 345-6233-00 | CUSSION RUBBER    | 1    |
| 23  | 331-4694-11 | LCD PLATE         | 1    |
| 24  | 716-3615-00 | SP SCREW (M2x8)   | 8    |
| 25  | 716-0778-51 | WAVE SCREW (M2x6) | 8    |

## Main section

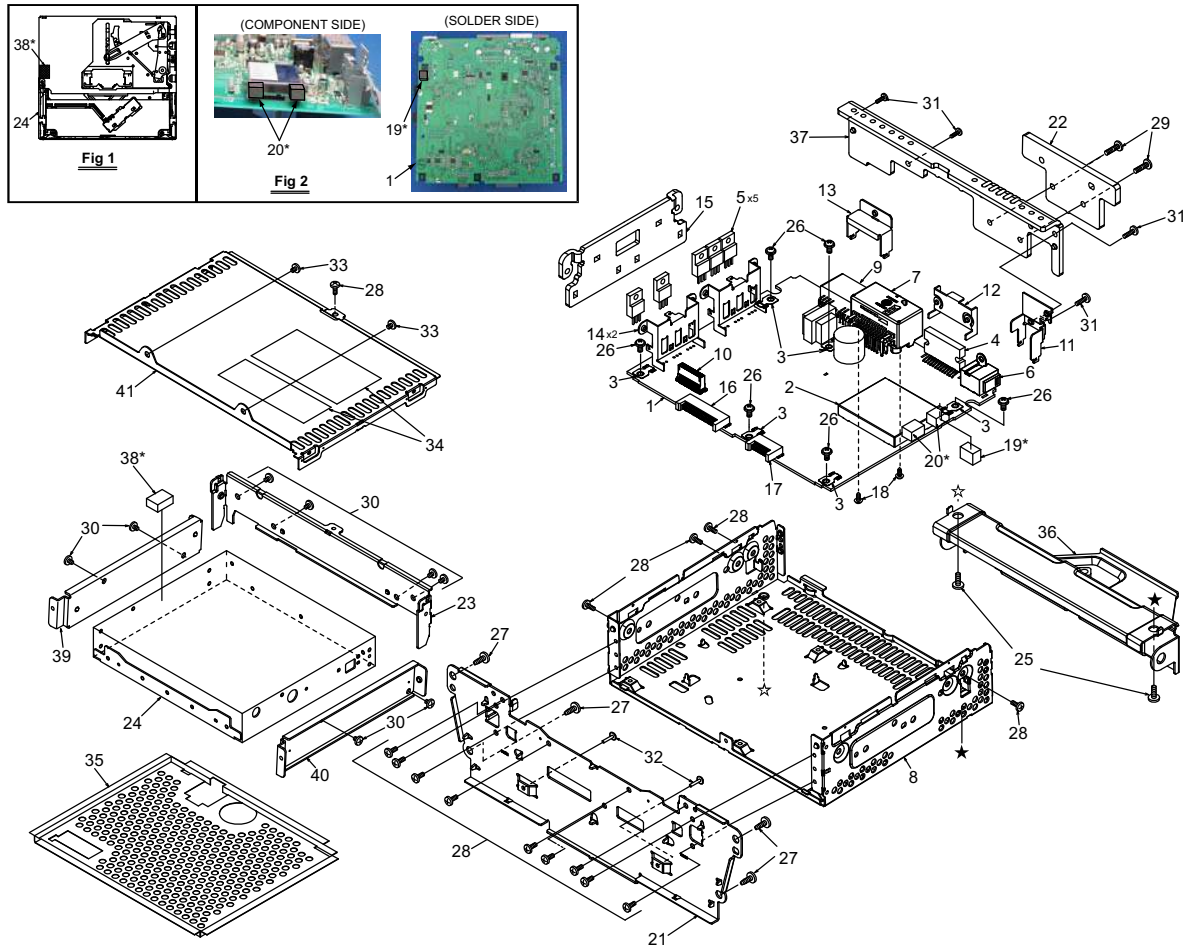

| NO. | PART NO.    | DESCRIPTION          | Q'TY |
|-----|-------------|----------------------|------|
| 1   | -----       | Main PWB             | 1    |
| 2   | 880-2091G   | TUNER PACK           | 1    |
| 3   | 073-0762-90 | TERMINAL             | 6    |
| 4   | 051-2042-00 | IC (TA8275HQ)        | 1    |
| 5   | 103-2394-00 | TRANSISTOR (2SD2394) | 5    |
| 6   | 092-2238-00 | ANT-RECEPT           | 1    |
| 7   | 074-4026-24 | SOCKET (24P)         | 1    |
| 8   | 311-1943-10 | LOWER CASE           | 1    |
| 9   | 074-1168-14 | SOCKET (14P)         | 1    |
| 10  | 076-3028-40 | PLUG (40P)           | 1    |
| 11  | 331-4697-01 | ANT-HOLDER           | 1    |
| 12  | 331-3459-00 | IC HOLDER            | 1    |
| 13  | 331-3769-00 | OUTLET HOLDER        | 1    |
| 14  | 331-4066-00 | TR HOLDER            | 2    |
| 15  | 313-2017-00 | SUB HEAT SINK        | 1    |
| 16  | 076-3011-76 | PLUG (26P)           | 1    |
| 17  | 076-3011-62 | PLUG (12P)           | 1    |
| 18  | 778-3005-00 | TAP SCREW (M3x5)     | 2    |
| 19  | 345-8720-01 | GASKET               | 1    |
| 20  | 345-8581-03 | GASKET               | 2    |
| 21  | 331-4693-01 | ES PLATE             | 1    |

| NO. | PART NO.                   | DESCRIPTION                                    | Q'TY |
|-----|----------------------------|------------------------------------------------|------|
| 22  | 313-2057-00                | HEAT SINK (B)                                  | 1    |
| 23  | 331-4695-01                | MECH BRKT                                      | 1    |
| 24  | 929-5025-80                | DIGITAL MECH                                   | 1    |
| 25  | 714-5008-8B                | MACHINE SCREW (M5x8)                           | 2    |
| 26  | 716-0878-50                | MACHINE SCREW (M2.6x5)                         | 6    |
| 27  | 778-4008-01                | SP SCREW (4x8)                                 | 4    |
| 28  | 714-2606-8B                | MACHINE SCREW (M2.6x6)                         | 14   |
| 29  | 780-2616-01                | MACHINE SCREW (M2.6x16)                        | 2    |
| 30  | 714-2603-8B                | MACHINE SCREW (M2.6x3)                         | 8    |
| 31  | 714-2608-89                | MACHINE SCREW (M2.6x8)                         | 4    |
| 32  | 716-3615-00                | SP SCREW (M2x8)                                | 2    |
| 33  | 780-2603-07                | SP SCREW (M2.6x3)                              | 2    |
| 34  | 286-6685-76<br>286-6685-77 | SETPLATE (PH-3084H-A)<br>SETPLATE (PH-3084H-B) | 1    |
| 35  | 347-8550-01                | MECH CVR                                       | 1    |
| 36  | 300-8211-10                | MTG-BRKT (LO)                                  | 1    |
| 37  | 313-2056-10                | HEAT SINK (A)                                  | 1    |
| 38  | 345-6066-01                | GASKET                                         | 1    |
| 39  | 331-4832-00                | MECH BRKT (L)                                  | 1    |
| 40  | 331-4833-00                | MECH BRKT (L)                                  | 1    |
| 41  | 310-1891-00                | UPPER CASE                                     | 1    |

# ELECTRICAL PARTS LIST

## Main PWB(B1) section

| REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION      |
|---------|-------------|---------------|---------|-------------|---------------|---------|-------------|------------------|
| ANT101  | 092-2238-00 | ANT RECEPT    | C313    | 042-1737-90 | 6.3V 1000uF M | C472    | 168-2222-55 | 2200pF K         |
| BL101   | 880-2091G   | TUNER PACK    | C316    | 166-8096-50 | 8pF D CH      | C473    | 168-2222-55 | 2200pF K         |
| C102    | 168-1032-55 | 0.01uF K      | C317    | 168-1042-78 | 16V 0.1uF K   | C474    | 165-2263-15 | 6.3V 22uF        |
| C103    | 166-1011-50 | 100pF CH      | C319    | 165-1063-35 | 16V 10uF      | C475    | 168-1022-55 | 1000pF K         |
| C104    | 166-2201-50 | 22pF CH       | C320    | 168-1032-55 | 0.01uF K      | C476    | 168-1042-78 | 16V 0.1uF K      |
| C105    | 168-1032-55 | 0.01uF K      | C323    | 168-1032-55 | 0.01uF K      | C477    | 042-1767-90 | 16V 470uF        |
| C106    | 166-1011-50 | 100pF CH      | C371    | 168-1022-55 | 1000pF K      | C478    | 168-1042-78 | 16V 0.1uF K      |
| C107    | 043-0319-51 | 200pF J CH    | C401    | 165-2253-65 | 50V 2.2uF     | C479    | 042-2273-25 | 10V 220uF M      |
| C109    | 168-1022-55 | 1000pF K      | C402    | 165-2253-65 | 50V 2.2uF     | C480    | 168-1042-78 | 16V 0.1uF K      |
| C110    | 165-1073-35 | 16V 100uF     | C403    | 165-2253-65 | 50V 2.2uF     | C481    | 168-1022-55 | 1000pF K         |
| C111    | 168-1022-55 | 1000pF K      | C404    | 165-2253-65 | 50V 2.2uF     | C505    | 165-2263-15 | 6.3V 22uF        |
| C112    | 165-1073-35 | 16V 100uF     | C405    | 165-2253-65 | 50V 2.2uF     | C506    | 165-2263-15 | 6.3V 22uF        |
| C114    | 168-1032-55 | 0.01uF K      | C406    | 165-2253-65 | 50V 2.2uF     | C507    | 165-2263-15 | 6.3V 22uF        |
| C115    | 168-1022-55 | 1000pF K      | C407    | 165-2253-65 | 50V 2.2uF     | C508    | 165-2263-15 | 6.3V 22uF        |
| C117    | 168-1022-55 | 1000pF K      | C408    | 165-2253-65 | 50V 2.2uF     | C509    | 165-2253-65 | 50V 2.2uF        |
| C118    | 168-1022-55 | 1000pF K      | C409    | 165-4753-55 | 35V 4.7uF     | C510    | 165-2253-65 | 50V 2.2uF        |
| C119    | 168-1022-55 | 1000pF K      | C410    | 168-1042-78 | 16V 0.1uF K   | C511    | 165-2253-65 | 50V 2.2uF        |
| C120    | 168-1022-55 | 1000pF K      | C411    | 166-1811-50 | 180pF CH      | C512    | 165-2253-65 | 50V 2.2uF        |
| C121    | 168-1022-55 | 1000pF K      | C412    | 166-1007-50 | 10pF CH       | C513    | 166-5611-50 | 560pF CH         |
| C123    | 165-4763-35 | 16V 47uF      | C413    | 166-1007-50 | 10pF CH       | C514    | 166-5611-50 | 560pF CH         |
| C124    | 168-1032-55 | 0.01uF K      | C414    | 168-1022-55 | 1000pF K      | C515    | 166-5611-50 | 560pF CH         |
| C125    | 165-1063-35 | 16V 10uF      | C415    | 166-1511-50 | 150pF CH      | C516    | 166-5611-50 | 560pF CH         |
| C126    | 168-1042-78 | 16V 0.1uF K   | C416    | 166-1511-50 | 150pF CH      | C517    | 166-5611-50 | 560pF CH         |
| C127    | 165-1073-15 | 6.3V 100uF    | C417    | 166-1511-50 | 150pF CH      | C518    | 166-5611-50 | 560pF CH         |
| C128    | 168-1042-78 | 16V 0.1uF K   | C418    | 166-1511-50 | 150pF CH      | C519    | 166-1011-50 | 100pF CH         |
| C129    | 043-0554-90 | 25V 10uF      | C419    | 166-1511-50 | 150pF CH      | C520    | 166-1011-50 | 100pF CH         |
| C130    | 168-3332-78 | 0.033uF K     | C420    | 166-1511-50 | 150pF CH      | C521    | 166-2201-50 | 22pF CH          |
| C131    | 165-1073-15 | 6.3V 100uF    | C421    | 166-1511-50 | 150pF CH      | C522    | 166-2201-50 | 22pF CH          |
| C132    | 168-1042-78 | 16V 0.1uF K   | C422    | 166-1511-50 | 150pF CH      | C523    | 166-2201-50 | 22pF CH          |
| C133    | 168-1022-55 | 1000pF K      | C423    | 165-4753-55 | 35V 4.7uF     | C524    | 166-2201-50 | 22pF CH          |
| C135    | 043-0554-90 | 25V 10uF      | C424    | 168-1042-78 | 16V 0.1uF K   | C525    | 166-1011-50 | 100pF CH         |
| C137    | 168-1042-78 | 16V 0.1uF K   | C425    | 165-4753-55 | 35V 4.7uF     | C526    | 166-1011-50 | 100pF CH         |
| C138    | 168-1042-78 | 16V 0.1uF K   | C426    | 168-1042-78 | 16V 0.1uF K   | C527    | 166-5611-50 | 560pF CH         |
| C139    | 042-1767-90 | 16V 470uF     | C427    | 168-1022-55 | 1000pF K      | C528    | 166-5611-50 | 560pF CH         |
| C140    | 043-0499-51 | 0.1uF         | C428    | 168-1022-55 | 1000pF K      | C529    | 166-5611-50 | 560pF CH         |
| C141    | 166-1011-50 | 100pF CH      | C429    | 166-1011-50 | 100pF CH      | C530    | 166-5611-50 | 560pF CH         |
| C142    | 168-4742-78 | 0.47uF K      | C430    | 168-1042-78 | 16V 0.1uF K   | C531    | 166-5611-50 | 560pF CH         |
| C201    | 178-1022-78 | 1000pF        | C431    | 168-1042-78 | 16V 0.1uF K   | C532    | 166-5611-50 | 560pF CH         |
| C202    | 178-1022-78 | 1000pF        | C432    | 168-1042-78 | 16V 0.1uF K   | C533    | 168-1042-78 | 16V 0.1uF K      |
| C206    | 168-1032-55 | 0.01uF K      | C433    | 168-5622-55 | 5600pF K      | C534    | 165-1073-35 | 16V 100uF        |
| C209    | 168-1042-78 | 16V 0.1uF K   | C434    | 168-5622-55 | 5600pF K      | C535    | 165-2263-15 | 6.3V 22uF        |
| C213    | 166-1011-50 | 100pF CH      | C435    | 165-4753-55 | 35V 4.7uF     | C538    | 168-5612-55 | 560pF Z          |
| C219    | 168-1042-78 | 16V 0.1uF K   | C436    | 168-1042-78 | 16V 0.1uF K   | C541    | 168-1545-56 | 0.15uF Z         |
| C227    | 165-1073-15 | 6.3V 100uF    | C437    | 168-2232-55 | 0.022uF K     | C542    | 168-1545-56 | 0.15uF Z         |
| C228    | 043-0554-90 | 25V 10uF      | C438    | 165-1073-15 | 6.3V 100uF    | C543    | 168-1545-56 | 0.15uF Z         |
| C229    | 168-1042-78 | 16V 0.1uF K   | C439    | 168-1042-78 | 16V 0.1uF K   | C544    | 168-1545-56 | 0.15uF Z         |
| C231    | 165-1073-15 | 6.3V 100uF    | C440    | 043-0554-90 | 25V 10uF      | C545    | 165-1063-35 | 16V 10uF         |
| C232    | 165-4763-15 | 6.3V 47uF     | C441    | 168-1042-78 | 16V 0.1uF K   | C546    | 043-0499-51 | 0.1uF            |
| C233    | 168-1042-78 | 16V 0.1uF K   | C442    | 168-4732-78 | 0.047uF K     | C548    | 168-2222-55 | 2200pF K         |
| C234    | 165-4763-15 | 6.3V 47uF     | C443    | 043-0504-50 | 10V 4.7uF     | C549    | 168-2222-55 | 2200pF K         |
| C235    | 168-1042-78 | 16V 0.1uF K   | C444    | 165-2263-15 | 6.3V 22uF     | C550    | 168-2222-55 | 2200pF K         |
| C236    | 043-0554-90 | 25V 10uF      | C445    | 168-1042-78 | 16V 0.1uF K   | C551    | 168-2222-55 | 2200pF K         |
| C237    | 043-0554-90 | 25V 10uF      | C446    | 168-1042-78 | 16V 0.1uF K   | C552    | 168-1032-55 | 0.01uF K         |
| C238    | 168-1042-78 | 16V 0.1uF K   | C447    | 168-1022-55 | 1000pF K      | C553    | 172-4741-11 | 0.47uF           |
| C239    | 168-1042-78 | 16V 0.1uF K   | C448    | 165-4763-15 | 6.3V 47uF     | C554    | 168-2222-55 | 2200pF K         |
| C240    | 168-1042-78 | 16V 0.1uF K   | C449    | 168-2232-55 | 0.022uF K     | C555    | 168-2222-55 | 2200pF K         |
| C241    | 042-1767-90 | 16V 470uF     | C450    | 165-1063-35 | 16V 10uF      | C556    | 165-3353-65 | 50V 3.3uF        |
| C242    | 042-1768-90 | 16V 10uF      | C451    | 178-1052-78 | 1uF           | C557    | 168-2222-55 | 2200pF K         |
| C243    | 168-1022-55 | 1000pF K      | C452    | 168-1042-78 | 16V 0.1uF K   | C558    | 168-2222-55 | 2200pF K         |
| C291    | 168-2222-55 | 2200pF K      | C453    | 168-1042-78 | 16V 0.1uF K   | C559    | 168-2222-55 | 2200pF K         |
| C301    | 166-1011-50 | 100pF CH      | C454    | 168-3332-78 | 0.033uF K     | C560    | 168-2222-55 | 2200pF K         |
| C302    | 178-1052-78 | 1uF           | C457    | 168-3322-55 | 3300pF K      | C561    | 168-2222-55 | 2200pF K         |
| C304    | 168-1032-55 | 0.01uF K      | C458    | 168-3322-55 | 3300pF K      | C562    | 168-2222-55 | 2200pF K         |
| C305    | 168-1022-55 | 1000pF K      | C459    | 178-1052-78 | 1uF           | C563    | 043-0499-51 | 0.1uF            |
| C306    | 168-1042-78 | 16V 0.1uF K   | C460    | 168-2222-55 | 2200pF K      | C564    | 189-3383-31 | 16V 3300uF       |
| C307    | 165-4753-55 | 35V 4.7uF     | C461    | 168-2222-55 | 2200pF K      | C1301   | 165-1043-65 | 50V 0.1uF        |
| C308    | 168-1022-55 | 1000pF K      | C463    | 168-1042-78 | 16V 0.1uF K   | C3000   | 168-1042-78 | 16V 0.1uF K      |
| C309    | 168-1022-55 | 1000pF K      | C464    | 168-1042-78 | 16V 0.1uF K   | C3001   | 168-1042-78 | 16V 0.1uF K      |
| C310    | 168-1042-78 | 16V 0.1uF K   | C465    | 168-2232-55 | 0.022uF K     | CCT3000 | 050-0140-54 | 1/32W 1k ohm x4J |
| C311    | 042-1737-90 | 6.3V 1000uF M | C467    | 168-2232-55 | 0.022uF K     | CCT3001 | 050-0140-53 | 1/32W 0 ohm x4J  |
| C312    | 165-4753-55 | 35V 4.7uF     | C468    | 168-4712-55 | 470pF K       | CCT3002 | 050-0140-53 | 1/32W 0 ohm x4J  |

Note) 3084HA : PH-3084H-A , 3084HB : PH-3084H-B

| REF No. | PART No.    | DESCRIPTION        | REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION                    |
|---------|-------------|--------------------|---------|-------------|----------------|---------|-------------|--------------------------------|
| D101    | 001-2403-90 | M1F60              | L412    | 010-3105-62 | 1k ohm/100MHz  | R130    | 119-1011-15 | 1/10W 100 ohm                  |
| D102    | 001-2403-90 | M1F60              | L413    | 010-3105-62 | 1k ohm/100MHz  | R131    | 116-5691-15 | 1/4W 5.6 ohm                   |
| D103    | 001-0516-90 | MA111              | L414    | 010-3105-62 | 1k ohm/100MHz  | R132    | 119-1011-15 | 1/10W 100 ohm                  |
| D104    | 001-0529-47 | MA8091-M           | L415    | 010-2198-51 | 0.22uH         | R134    | 117-2721-15 | 1/8W 2.7k ohm                  |
| D106    | 001-0516-90 | MA111              | L416    | 010-3105-62 | 1k ohm/100MHz  | R135    | 116-0000-05 | 1/4W 0 ohm JW                  |
| D107    | 001-0529-28 | MA8051-L           | L2001   | 010-3406-66 | 22uH J         | R137    | 119-0000-05 | 1/10W 0 ohm JW                 |
| D108    | 001-0529-47 | MA8091-M           | L3002   | 010-3105-62 | 1k ohm/100MHz  | R138    | 119-1031-15 | 1/10W 10k ohm                  |
| D109    | 001-0529-48 | MA8091-H           | L5001   | 010-3105-62 | 1k ohm/100MHz  | R140    | 116-2291-15 | 1/4W 2.2 ohm                   |
| D111    | 001-2403-90 | M1F60              | P2000   | 076-3028-40 | 40P            | R141    | 116-2291-15 | 1/4W 2.2 ohm                   |
| D112    | 001-2403-90 | M1F60              | P3000   | 076-3011-76 | 26P            | R142    | 116-1021-15 | 1/4W 1k ohm                    |
| D113    | 001-2403-90 | M1F60              | P3001   | 076-3011-62 | 12P            | R143    | 116-6811-15 | 1/4W 680 ohm                   |
| D201    | 001-0529-69 | MA8180-M           | Q101    | 192-4081-00 | 2SC4081        | R144    | 119-3321-15 | 1/10W 3.3k ohm                 |
| D202    | 001-0529-32 | MA8056-M           | Q102    | 192-4081-00 | 2SC4081        | R145    | 119-1031-15 | 1/10W 10k ohm                  |
| D203    | 001-0529-32 | MA8056-M           | Q103    | 125-2027-91 | DTC114EUA      | R146    | 119-1031-15 | 1/10W 10k ohm                  |
| D205    | 001-0535-90 | MA729              | Q104    | 190-1736-00 | 2SA1736        | R147    | 119-4791-15 | 1/10W 4.7 ohm                  |
| D209    | 001-0516-90 | MA111              | Q106    | 103-2394-00 | 2SD2394        | R148    | 119-1031-15 | 1/10W 10k ohm                  |
| D210    | 001-0516-90 | MA111              | Q107    | 193-1664-00 | 2SD1664        | R149    | 119-4791-15 | 1/10W 4.7 ohm                  |
| D217    | 001-0535-90 | MA729              | Q108    | 192-4081-00 | 2SC4081        | R150    | 116-1221-15 | 1/4W 1.2k ohm                  |
| D219    | 001-0529-45 | MA8082-H           | Q109    | 125-2027-91 | DTC114EUA      | R151    | 116-1221-15 | 1/4W 1.2k ohm                  |
| D224    | 001-9210-50 | AVR-M1608C270      | Q110    | 191-1197-50 | 2SB1197K Q,R   | R152    | 116-1221-15 | 1/4W 1.2k ohm                  |
|         |             | MTAAD              | Q111    | 192-4081-00 | 2SC4081        | R153    | 116-1221-15 | 1/4W 1.2k ohm                  |
| D301    | 001-0516-90 | MA111              | Q112    | 103-2394-00 | 2SD2394        | R154    | 116-0000-05 | 1/4W 0 ohm JW                  |
| D302    | 001-0504-42 | HZS7 C3L           | Q113    | 125-2027-90 | DTC143EU       | R155    | 116-3011-15 | 1/4W 300 ohm                   |
| D303    | 001-0529-42 | MA8075-H           | Q114    | 190-1736-00 | 2SA1736        | R156    | 116-3011-15 | 1/4W 300 ohm                   |
| D304    | 001-0516-90 | MA111              | Q115    | 125-2027-91 | DTC114EUA      | R157    | 116-3011-15 | 1/4W 300 ohm                   |
| D305    | 001-0529-48 | MA8091-H           | Q116    | 125-0021-92 | DTA124EUA      | R158    | 116-3011-15 | 1/4W 300 ohm                   |
| D501    | 001-2403-90 | M1F60              | Q117    | 193-1664-00 | 2SD1664        | R201    | 116-1211-15 | 1/4W 120 ohm                   |
| D502    | 001-0592-00 | RM4Z               | Q118    | 193-1664-00 | 2SD1664        | R202    | 119-1031-15 | 1/10W 10k ohm                  |
| IC101   | 051-3354-90 | BA33BC0WFP         | Q119    | 125-2027-91 | DTC114EUA      | R203    | 119-3321-15 | 1/10W 3.3k ohm                 |
| IC102   | 051-3218-90 | TA76431F           | Q120    | 125-0021-91 | DTA114EUA      | R204    | 116-6801-15 | 1/4W 68 ohm                    |
| IC103   | 051-3344-90 | BD3930FP-E2        | Q121    | 103-2394-00 | 2SD2394        | R205    | 116-1011-15 | 1/4W 100 ohm                   |
| IC202   | 051-6648-90 | HA12240FP-EL       | Q122    | 103-2394-00 | 2SD2394        | R206    | 116-1011-15 | 1/4W 100 ohm                   |
| IC203   | 051-3408-90 | BA2903FV           | Q123    | 125-2027-91 | DTC114EUA      | R212    | 119-4721-15 | 1/10W 4.7k ohm                 |
| IC205   | 051-3364-90 | NJU7771F15         | Q124    | 125-0021-91 | DTA114EUA      | R213    | 119-4721-15 | 1/10W 4.7k ohm                 |
| IC206   | 051-3364-90 | NJU7771F15         | Q125    | 125-2027-90 | DTC143EU       | R215    | 032-0209-50 | 1/4W 82 ohm D                  |
| IC207   | 051-3354-90 | BA33BC0WFP         | Q201    | 193-1664-00 | 2SD1664        | R217    | 032-0140-72 | 1/10W 470 ohm F                |
| IC301   | 051-5423-38 | BD6329G-TR         | Q210    | 192-4081-00 | 2SC4081        | R223    | 119-5641-15 | 1/10W 560k ohm                 |
| IC302   | 051-9423-90 | BR93L86REV-W E2    | Q211    | 103-2394-00 | 2SD2394        | R225    | 119-1021-15 | 1/10W 1k ohm                   |
| IC303   | 052-3217-71 | UPD70F3340GC-8EA-A | Q212    | 125-2027-91 | DTC114EUA      | R226    | 119-4721-15 | 1/10W 4.7k ohm                 |
|         |             | L9637D             | Q213    | 125-0021-91 | DTA114EUA      | R229    | 119-1031-15 | 1/10W 10k ohm                  |
| IC304   | 051-5811-90 | SAF7730HV/N317F    | Q301    | 125-2027-91 | DTC114EUA      | R230    | 119-1031-15 | 1/10W 10k ohm                  |
| IC401   | -----       | BA4558RFV          | Q302    | 125-0021-91 | DTA114EUA      | R233    | 119-3331-15 | 1/10W 33k ohm                  |
| IC501   | 051-3057-90 | NJM2060V           | Q303    | 192-4081-00 | 2SC4081        | R234    | 116-1021-15 | 1/4W 1k ohm                    |
| IC502   | 051-3019-90 | NJM2060V           | Q304    | 192-4081-00 | 2SC4081        | R239    | 119-1031-15 | 1/10W 10k ohm                  |
| IC503   | 051-3019-90 | NJM2060V           | Q306    | 192-2712-00 | 2SC2712        | R240    | 119-3331-15 | 1/10W 33k ohm                  |
| IC504   | 051-2042-00 | TA8275H            | Q401    | 125-7005-90 | PHK04P02T      | R241    | 119-3321-15 | 1/10W 3.3k ohm                 |
| J202    | 074-1168-14 | 14P                | Q501    | 125-2027-91 | DTC114EUA      | R242    | 119-1031-15 | 1/10W 10k ohm                  |
| J501    | 074-4026-24 | 24P                | Q502    | 125-0021-91 | DTA114EUA      | R243    | 119-3321-15 | 1/10W 3.3k ohm                 |
| L101    | 010-2003-04 | 30uH               | Q509    | 125-2027-91 | DTC114EUA      | R245    | 119-3331-15 | 1/10W 33k ohm                  |
| L102    | 010-4011-20 | 2.5mH +3/-3%       | Q1001   | 190-1052-03 | 2SA1052 C      | R246    | 119-1031-15 | 1/10W 10k ohm                  |
| L103    | 010-3104-50 | 30 ohm/100MHz      | Q1005   | 193-1664-00 | 2SD1664        | R248    | 119-3331-15 | 1/10W 33k ohm                  |
| L104    | 010-3406-66 | 22uH J             | R101    | 119-2221-15 | 1/10W 2.2k ohm | R250    | 119-1031-15 | 1/10W 10k ohm                  |
| L106    | 010-3104-50 | 30 ohm/100MHz      | R102    | 119-1031-15 | 1/10W 10k ohm  | R251    | 116-6811-15 | 1/4W 680 ohm                   |
| L203    | 010-2285-51 | 120 ohm/100MHz     | R104    | 119-1521-15 | 1/10W 1.5k ohm | R271    | 119-4731-15 | 1/10W 47k ohm                  |
| L205    | 010-3104-50 | 30 ohm/100MHz      | R105    | 119-1031-15 | 1/10W 10k ohm  | R272    | 119-4731-15 | 1/10W 47k ohm                  |
| L206    | 010-3104-50 | 30 ohm/100MHz      | R106    | 116-1521-15 | 1/4W 1.5k ohm  | R301    | 119-1031-15 | 1/10W 10k ohm<br>(Used 3084HB) |
| L207    | 010-3105-62 | 1k ohm/100MHz      | R107    | 119-1031-15 | 1/10W 10k ohm  |         |             |                                |
| L211    | 010-3105-62 | 1k ohm/100MHz      | R108    | 116-0000-05 | 1/4W 0 ohm JW  | R302    | 119-1031-15 | 1/10W 10k ohm<br>(Used 3084HA) |
| L212    | 010-3105-62 | 1k ohm/100MHz      | R109    | 116-0000-05 | 1/4W 0 ohm JW  |         |             |                                |
| L301    | 010-3105-62 | 1k ohm/100MHz      | R112    | 119-4731-15 | 1/10W 47k ohm  | R305    | 119-1041-15 | 1/10W 100k ohm                 |
| L302    | 010-3406-66 | 22uH J             | R115    | 119-1041-15 | 1/10W 100k ohm | R309    | 119-3331-15 | 1/10W 33k ohm                  |
| L303    | 010-3406-66 | 22uH J             | R118    | 119-0000-05 | 1/10W 0 ohm JW | R310    | 119-3331-15 | 1/10W 33k ohm                  |
| L401    | 010-3105-62 | 1k ohm/100MHz      | R119    | 117-3921-15 | 1/8W 3.9k ohm  | R311    | 119-3331-15 | 1/10W 33k ohm                  |
| L402    | 010-3105-62 | 1k ohm/100MHz      | R120    | 119-1011-15 | 1/10W 100 ohm  | R312    | 119-3331-15 | 1/10W 33k ohm                  |
| L403    | 010-3105-62 | 1k ohm/100MHz      | R121    | 119-1521-15 | 1/10W 1.5k ohm | R317    | 119-4731-15 | 1/10W 47k ohm                  |
| L404    | 010-3105-62 | 1k ohm/100MHz      | R122    | 119-6821-15 | 1/10W 6.8k ohm | R319    | 119-3331-15 | 1/10W 33k ohm                  |
| L405    | 010-3105-62 | 1k ohm/100MHz      | R123    | 119-6821-15 | 1/10W 6.8k ohm | R321    | 119-2241-15 | 1/10W 220k ohm                 |
| L406    | 010-3105-62 | 1k ohm/100MHz      | R124    | 119-1011-15 | 1/10W 100 ohm  | R322    | 119-3331-15 | 1/10W 33k ohm                  |
| L407    | 010-3105-62 | 1k ohm/100MHz      | R125    | 119-1031-15 | 1/10W 10k ohm  | R323    | 119-1021-15 | 1/10W 1k ohm                   |
| L408    | 010-3105-62 | 1k ohm/100MHz      | R126    | 119-1011-15 | 1/10W 100 ohm  | R324    | 119-3331-15 | 1/10W 33k ohm                  |
| L409    | 010-3105-62 | 1k ohm/100MHz      | R127    | 119-1031-15 | 1/10W 10k ohm  | R325    | 119-3331-15 | 1/10W 33k ohm                  |
| L410    | 010-3105-62 | 1k ohm/100MHz      | R128    | 119-1011-15 | 1/10W 100 ohm  | R326    | 119-3331-15 | 1/10W 33k ohm                  |
| L411    | 010-3105-62 | 1k ohm/100MHz      | R129    | 119-1011-15 | 1/10W 100 ohm  | R327    | 119-3331-15 | 1/10W 33k ohm                  |

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION             |
|---------|-------------|-----------------|---------|-------------|-----------------|---------|-------------|-------------------------|
| R328    | 119-5611-15 | 1/10W 560 ohm   | R422    | 119-0000-05 | 1/10W 0 ohm JW  | R544    | 119-2221-15 | 1/10W 2.2k ohm          |
| R329    | 119-3331-15 | 1/10W 33k ohm   | R423    | 119-5631-15 | 1/10W 56k ohm   | R545    | 119-1041-15 | 1/10W 100k ohm          |
| R330    | 119-1031-15 | 1/10W 10k ohm   | R424    | 119-0000-05 | 1/10W 0 ohm JW  | R546    | 119-3321-15 | 1/10W 3.3k ohm          |
| R331    | 119-3331-15 | 1/10W 33k ohm   | R425    | 119-1001-15 | 1/10W 10 ohm    | R547    | 119-1041-15 | 1/10W 100k ohm          |
| R332    | 119-6831-15 | 1/10W 68k ohm   | R428    | 032-0140-52 | 1/10W 33k ohm F | R548    | 117-0000-05 | 1/8W 0 ohm JW           |
| R333    | 119-6831-15 | 1/10W 68k ohm   | R429    | 032-0140-52 | 1/10W 33k ohm F | R549    | 119-1041-15 | 1/10W 100k ohm          |
| R334    | 119-2241-15 | 1/10W 220k ohm  | R430    | 032-0140-52 | 1/10W 33k ohm F | R550    | 119-1041-15 | 1/10W 100k ohm          |
| R335    | 119-1021-15 | 1/10W 1k ohm    | R431    | 032-0140-52 | 1/10W 33k ohm F | R551    | 116-1031-15 | 1/4W 10k ohm            |
| R336    | 119-4731-15 | 1/10W 47k ohm   | R433    | 119-1031-15 | 1/10W 10k ohm   | R552    | 119-4721-15 | 1/10W 4.7k ohm          |
| R337    | 119-3331-15 | 1/10W 33k ohm   | R434    | 119-1031-15 | 1/10W 10k ohm   | R1001   | 119-1031-15 | 1/10W 10k ohm           |
| R338    | 119-1021-15 | 1/10W 1k ohm    | R435    | 119-1011-15 | 1/10W 100 ohm   | R1002   | 119-1021-15 | 1/10W 1k ohm            |
| R339    | 119-3331-15 | 1/10W 33k ohm   | R436    | 119-1011-15 | 1/10W 100 ohm   | R2000   | 119-1031-15 | 1/10W 10k ohm           |
| R340    | 119-3331-15 | 1/10W 33k ohm   | R437    | 119-0000-05 | 1/10W 0 ohm JW  | R2002   | 119-4731-15 | 1/10W 47k ohm           |
| R341    | 119-3331-15 | 1/10W 33k ohm   | R438    | 119-1011-15 | 1/10W 100 ohm   | R2013   | 119-4731-15 | 1/10W 47k ohm           |
| R342    | 119-4731-15 | 1/10W 47k ohm   | R439    | 119-1011-15 | 1/10W 100 ohm   | R2019   | 119-0000-05 | 1/10W 0 ohm JW          |
| R343    | 119-1011-15 | 1/10W 100 ohm   | R440    | 119-1011-15 | 1/10W 100 ohm   | R2020   | 119-0000-05 | 1/10W 0 ohm JW          |
| R344    | 119-1011-15 | 1/10W 100 ohm   | R441    | 119-1021-15 | 1/10W 1k ohm    | R2021   | 119-0000-05 | 1/10W 0 ohm JW          |
| R345    | 119-3331-15 | 1/10W 33k ohm   | R442    | 119-1021-15 | 1/10W 1k ohm    | R2022   | 119-0000-05 | 1/10W 0 ohm JW          |
| R346    | 119-1031-15 | 1/10W 10k ohm   | R443    | 119-0000-05 | 1/10W 0 ohm JW  | R2023   | 119-0000-05 | 1/10W 0 ohm JW          |
| R347    | 119-1031-15 | 1/10W 10k ohm   | R444    | 119-1031-15 | 1/10W 10k ohm   | R2024   | 119-0000-05 | 1/10W 0 ohm JW          |
| R349    | 119-1011-15 | 1/10W 100 ohm   | R445    | 119-0000-05 | 1/10W 0 ohm JW  | R2025   | 119-0000-05 | 1/10W 0 ohm JW          |
| R350    | 119-1011-15 | 1/10W 100 ohm   | R446    | 119-1031-15 | 1/10W 10k ohm   | R2026   | 119-0000-05 | 1/10W 0 ohm JW          |
| R356    | 119-1031-15 | 1/10W 10k ohm   | R447    | 119-0000-05 | 1/10W 0 ohm JW  | R2027   | 119-0000-05 | 1/10W 0 ohm JW          |
| R357    | 119-1031-15 | 1/10W 10k ohm   | R448    | 119-1001-15 | 1/10W 10 ohm    | R2028   | 119-0000-05 | 1/10W 0 ohm JW          |
| R359    | 119-4731-15 | 1/10W 47k ohm   | R450    | 119-1011-15 | 1/10W 100 ohm   | R2034   | 119-0000-05 | 1/10W 0 ohm JW          |
| R360    | 119-4731-15 | 1/10W 47k ohm   | R451    | 119-0000-05 | 1/10W 0 ohm JW  | R2039   | 119-0000-05 | 1/10W 0 ohm JW          |
| R361    | 119-4731-15 | 1/10W 47k ohm   | R471    | 119-2201-15 | 1/10W 22 ohm    | R2042   | 119-0000-05 | 1/10W 0 ohm JW          |
| R362    | 119-4731-15 | 1/10W 47k ohm   | R501    | 119-1021-15 | 1/10W 1k ohm    | R2047   | 119-0000-05 | 1/10W 0 ohm JW          |
| R363    | 119-1031-15 | 1/10W 10k ohm   | R502    | 119-1021-15 | 1/10W 1k ohm    | R2050   | 119-0000-05 | 1/10W 0 ohm JW          |
| R364    | 119-1031-15 | 1/10W 10k ohm   | R503    | 119-1021-15 | 1/10W 1k ohm    | R2051   | 119-0000-05 | 1/10W 0 ohm JW          |
| R366    | 119-1031-15 | 1/10W 10k ohm   | R504    | 119-1021-15 | 1/10W 1k ohm    | R2052   | 119-0000-05 | 1/10W 0 ohm JW          |
| R367    | 119-3321-15 | 1/10W 3.3k ohm  | R505    | 119-4731-15 | 1/10W 47k ohm   | R2053   | 119-0000-05 | 1/10W 0 ohm JW          |
| R370    | 119-1041-15 | 1/10W 100k ohm  | R506    | 119-4731-15 | 1/10W 47k ohm   | R2054   | 119-0000-05 | 1/10W 0 ohm JW          |
| R372    | 119-1041-15 | 1/10W 100k ohm  | R507    | 119-4731-15 | 1/10W 47k ohm   | R2055   | 119-0000-05 | 1/10W 0 ohm JW          |
| R378    | 119-0000-05 | 1/10W 0 ohm JW  | R508    | 119-4731-15 | 1/10W 47k ohm   | R2056   | 119-0000-05 | 1/10W 0 ohm JW          |
| R379    | 119-0000-05 | 1/10W 0 ohm JW  | R509    | 119-0000-05 | 1/10W 0 ohm JW  | R3001   | 119-3331-15 | 1/10W 33k ohm           |
| R380    | 119-3331-15 | 1/10W 33k ohm   | R510    | 119-0000-05 | 1/10W 0 ohm JW  | R3002   | 119-3331-15 | 1/10W 33k ohm           |
| R381    | 119-4721-15 | 1/10W 4.7k ohm  | R511    | 119-0000-05 | 1/10W 0 ohm JW  | R3003   | 119-1021-15 | 1/10W 1k ohm            |
| R382    | 119-3331-15 | 1/10W 33k ohm   | R512    | 119-0000-05 | 1/10W 0 ohm JW  | R3020   | 119-0000-05 | 1/10W 0 ohm JW          |
| R383    | 119-3331-15 | 1/10W 33k ohm   | R513    | 119-6821-15 | 1/10W 6.8k ohm  | R3021   | 119-0000-05 | 1/10W 0 ohm JW          |
| R384    | 116-0000-05 | 1/4W 0 ohm JW   | R514    | 119-6821-15 | 1/10W 6.8k ohm  | R3022   | 119-0000-05 | 1/10W 0 ohm JW          |
| R386    | 119-3331-15 | 1/10W 33k ohm   | R515    | 119-6821-15 | 1/10W 6.8k ohm  | R3023   | 119-0000-05 | 1/10W 0 ohm JW          |
| R387    | 119-1031-15 | 1/10W 10k ohm   | R516    | 119-6821-15 | 1/10W 6.8k ohm  | R3024   | 119-0000-05 | 1/10W 0 ohm JW          |
| R399    | 119-4721-15 | 1/10W 4.7k ohm  | R517    | 119-6821-15 | 1/10W 6.8k ohm  | R4001   | 119-0000-05 | 1/10W 0 ohm JW          |
| R401    | 032-0140-52 | 1/10W 33k ohm F | R518    | 119-6821-15 | 1/10W 6.8k ohm  | R4002   | 119-0000-05 | 1/10W 0 ohm JW          |
| R402    | 032-0140-52 | 1/10W 33k ohm F | R519    | 119-1031-15 | 1/10W 10k ohm   | R4005   | 119-3931-15 | 1/10W 39k ohm           |
| R403    | 119-3331-15 | 1/10W 33k ohm   | R522    | 119-1031-15 | 1/10W 10k ohm   | R4006   | 119-3931-15 | 1/10W 39k ohm           |
| R404    | 119-3331-15 | 1/10W 33k ohm   | R523    | 119-1531-15 | 1/10W 15k ohm   | SUP101  | 060-0122-91 | DSP-141N-S00B           |
| R405    | 032-0140-52 | 1/10W 33k ohm F | R524    | 119-1531-15 | 1/10W 15k ohm   | T501    | 009-0670-80 | 180uH                   |
| R406    | 032-0140-52 | 1/10W 33k ohm F | R525    | 119-1031-15 | 1/10W 10k ohm   | TC301   | 004-1583-52 | 20pF RED                |
| R407    | 032-0140-52 | 1/10W 33k ohm F | R526    | 119-1031-15 | 1/10W 10k ohm   | TH101   | 002-0318-21 | THERMISTOR              |
| R408    | 032-0140-52 | 1/10W 33k ohm F | R529    | 119-0000-05 | 1/10W 0 ohm JW  | TM101   | 073-0762-90 | TERMINAL                |
| R409    | 119-1031-15 | 1/10W 10k ohm   | R530    | 119-0000-05 | 1/10W 0 ohm JW  | TM102   | 073-0762-90 | TERMINAL                |
| R410    | 119-1031-15 | 1/10W 10k ohm   | R531    | 119-0000-05 | 1/10W 0 ohm JW  | TM103   | 073-0762-90 | TERMINAL                |
| R411    | 119-1031-15 | 1/10W 10k ohm   | R532    | 119-0000-05 | 1/10W 0 ohm JW  | TM201   | 073-0762-90 | TERMINAL                |
| R412    | 119-1031-15 | 1/10W 10k ohm   | R533    | 119-1531-15 | 1/10W 15k ohm   | TM202   | 073-0762-90 | TERMINAL                |
| R413    | 119-1031-15 | 1/10W 10k ohm   | R534    | 119-1531-15 | 1/10W 15k ohm   | TM501   | 073-0762-90 | TERMINAL                |
| R414    | 119-1021-15 | 1/10W 1k ohm    | R535    | 119-6821-15 | 1/10W 6.8k ohm  | X301    | 061-3560-90 | 3.145728MHz AT-41CD2    |
| R416    | 119-0000-05 | 1/10W 0 ohm JW  | R536    | 119-6821-15 | 1/10W 6.8k ohm  | X401    | 061-3537-90 | 41.6MHz                 |
| R417    | 119-1031-15 | 1/10W 10k ohm   | R537    | 119-4731-15 | 1/10W 47k ohm   | PWB     | 039-3346-00 | PWB(WITHOUT COMPONENTS) |
| R418    | 119-1031-15 | 1/10W 10k ohm   | R538    | 119-4731-15 | 1/10W 47k ohm   |         |             |                         |
| R419    | 119-5631-15 | 1/10W 56k ohm   | R541    | 119-2221-15 | 1/10W 2.2k ohm  |         |             |                         |
| R420    | 119-5631-15 | 1/10W 56k ohm   | R542    | 119-2221-15 | 1/10W 2.2k ohm  |         |             |                         |
| R421    | 119-5631-15 | 1/10W 56k ohm   | R543    | 119-2221-15 | 1/10W 2.2k ohm  |         |             |                         |

## Switch PWB(B2) section

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION      | REF No. | PART No.    | DESCRIPTION             |
|---------|-------------|-----------------|---------|-------------|------------------|---------|-------------|-------------------------|
| C600    | 166-1011-50 | 100pF CH        | D673    | 001-9210-50 | AVR-M1608C270M   | R642    | 119-0000-05 | 1/10W 0 ohm JW          |
| C601    | 168-1042-78 | 16V 0.1uF K     |         |             | TAAD             | R643    | 119-0000-05 | 1/10W 0 ohm JW          |
| C602    | 166-2201-50 | 22pF CH         | D700    | 001-7110-92 | NESB064EE5TKML   | R644    | 119-0000-05 | 1/10W 0 ohm JW          |
| C603    | 166-1011-50 | 100pF CH        |         |             | P4LP7            | R645    | 119-0000-05 | 1/10W 0 ohm JW          |
| C604    | 166-2201-50 | 22pF CH         | D701    | 001-7110-92 | NESB064EE5TKML   | R646    | 119-0000-05 | 1/10W 0 ohm JW          |
| C606    | 166-1011-50 | 100pF CH        |         |             | P4LP7            | R647    | 119-8211-15 | 1/10W 820 ohm           |
| C608    | 168-1042-78 | 16V 0.1uF K     | D702    | 001-7110-92 | NESB064EE5TKML   | R648    | 119-8211-15 | 1/10W 820 ohm           |
| C609    | 168-1022-55 | 1000pF K        |         |             | P4LP7            | R649    | 119-8211-15 | 1/10W 820 ohm           |
| C630    | 166-2201-50 | 22pF CH         | D703    | 001-7110-92 | NESB064EE5TKML   | R650    | 119-8211-15 | 1/10W 820 ohm           |
| C650    | 166-1007-50 | 10pF CH         |         |             | P4LP7            | R651    | 119-0000-05 | 1/10W 0 ohm JW          |
| C651    | 166-1007-50 | 10pF CH         | D704    | 001-7110-92 | NESB064EE5TKML   | R652    | 119-0000-05 | 1/10W 0 ohm JW          |
| C660    | 168-1042-78 | 16V 0.1uF K     |         |             | P4LP7            | R660    | 116-1521-15 | 1/4W 1.5k ohm           |
| C700    | 168-1022-55 | 1000pF K        | D705    | 001-7110-92 | NESB064EE5TKML   | R670    | 119-0000-05 | 1/10W 0 ohm JW          |
| C701    | 168-1022-55 | 1000pF K        |         |             | P4LP7            | R692    | 119-0000-05 | 1/10W 0 ohm JW          |
| C702    | 168-4732-78 | 0.047uF K       | D706    | 001-7110-92 | NESB064EE5TKML   | R700    | 119-2211-15 | 1/10W 220 ohm           |
| C703    | 168-4732-78 | 0.047uF K       |         |             | P4LP7            | R701    | 119-2211-15 | 1/10W 220 ohm           |
| C704    | 168-4732-78 | 0.047uF K       | D707    | 001-7110-92 | NESB064EE5TKML   | R702    | 119-2211-15 | 1/10W 220 ohm           |
| C705    | 168-4732-78 | 0.047uF K       |         |             | P4LP7            | R703    | 119-2211-15 | 1/10W 220 ohm           |
| C706    | 168-4732-78 | 0.047uF K       | D708    | 001-7110-92 | NESB064EE5TKML   | R704    | 119-2211-15 | 1/10W 220 ohm           |
| C709    | 168-4732-78 | 0.047uF K       |         |             | P4LP7            | R705    | 119-2211-15 | 1/10W 220 ohm           |
| D600    | 001-7111-95 | NHSB046A        | D709    | 001-7110-92 | NESB064EE5TKML   | R706    | 119-0000-05 | 1/10W 0 ohm JW          |
| D601    | 001-7111-95 | NHSB046A        |         |             | P4LP7            | R707    | 119-0000-05 | 1/10W 0 ohm JW          |
| D604    | 001-7111-95 | NHSB046A        | IC103   | 051-7239-08 | TC74VHCT08AFT-EL | R708    | 119-0000-05 | 1/10W 0 ohm JW          |
| D605    | 001-7111-95 | NHSB046A        |         |             |                  | R709    | 119-4721-15 | 1/10W 4.7k ohm          |
| D608    | 001-7111-95 | NHSB046A        | IC700   | 051-6047-00 | LC75804W         | R710    | 119-2731-15 | 1/10W 27k ohm           |
| D609    | 001-7111-95 | NHSB046A        | IC701   | 051-6047-00 | LC75804W         | R711    | 119-2731-15 | 1/10W 27k ohm           |
| D612    | 001-2630-90 | 1SS420-TPL3,F   | J600    | 074-2229-26 | SOCKET (26P)     | R712    | 119-0000-05 | 1/10W 0 ohm JW          |
| D613    | 001-2630-90 | 1SS420-TPL3,F   | J602    | 074-3014-56 | SOCKET (6P)      | R713    | 119-0000-05 | 1/10W 0 ohm JW          |
| D614    | 001-2630-90 | 1SS420-TPL3,F   | J604    | 076-6000-56 | SOCKET (6P)      | R714    | 119-0000-05 | 1/10W 0 ohm JW          |
| D615    | 001-2630-90 | 1SS420-TPL3,F   | J605    | 074-3014-76 | SOCKET (26P)     | R715    | 119-0000-05 | 1/10W 0 ohm JW          |
| D616    | 001-2630-90 | 1SS420-TPL3,F   | J606    | 074-3014-62 | SOCKET (12P)     | R716    | 119-0000-05 | 1/10W 0 ohm JW          |
| D617    | 001-7111-96 | NHSB046A        | J608    | 075-0306-00 | JACK             | R717    | 119-0000-05 | 1/10W 0 ohm JW          |
| D618    | 001-7111-96 | NHSB046A        | J700    | 074-2229-26 | SOCKET (26P)     | R718    | 119-0000-05 | 1/10W 0 ohm JW          |
| D621    | 001-7111-96 | NHSB046A        | L701    | 010-3105-62 | 1k ohm/100MHz    | R719    | 119-0000-05 | 1/10W 0 ohm JW          |
| D622    | 001-7111-96 | NHSB046A        | LCD700  | 379-1414-43 | INDICATOR (LCD)  | R720    | 119-0000-05 | 1/10W 0 ohm JW          |
| D625    | 001-2630-90 | 1SS420-TPL3,F   | P601    | 076-3011-56 | PLUG (6P)        | R721    | 119-0000-05 | 1/10W 0 ohm JW          |
| D626    | 001-2630-90 | 1SS420-TPL3,F   | Q600    | 192-4081-00 | 2SC4081          | R723    | 116-1011-15 | 1/4W 100 ohm            |
| D627    | 001-2630-90 | 1SS420-TPL3,F   | Q601    | 192-4081-00 | 2SC4081          | R724    | 116-1011-15 | 1/4W 100 ohm            |
| D628    | 001-2630-90 | 1SS420-TPL3,F   | R600    | 119-1011-15 | 1/10W 100 ohm    | R725    | 116-1011-15 | 1/4W 100 ohm            |
| D629    | 001-2630-90 | 1SS420-TPL3,F   | R601    | 119-1011-15 | 1/10W 100 ohm    | R726    | 116-1011-15 | 1/4W 100 ohm            |
| D630    | 001-7111-95 | NHSB046A        | R602    | 119-1011-15 | 1/10W 100 ohm    | R727    | 116-1011-15 | 1/4W 100 ohm            |
| D631    | 001-7111-95 | NHSB046A        | R603    | 119-1011-15 | 1/10W 100 ohm    | S600    | 013-6201-53 | SKPMAPE010              |
| D634    | 001-2630-90 | 1SS420-TPL3,F   | R604    | 119-1011-15 | 1/10W 100 ohm    | S601    | 013-6201-53 | SKPMAPE010              |
| D635    | 001-2630-90 | 1SS420-TPL3,F   | R605    | 119-1011-15 | 1/10W 100 ohm    | S602    | 013-6201-53 | SKPMAPE010              |
| D636    | 001-2630-90 | 1SS420-TPL3,F   | R606    | 119-1011-15 | 1/10W 100 ohm    | S603    | 013-6201-53 | SKPMAPE010              |
| D637    | 001-2630-90 | 1SS420-TPL3,F   | R607    | 119-1011-15 | 1/10W 100 ohm    | S604    | 013-6201-53 | SKPMAPE010              |
| D638    | 001-2630-90 | 1SS420-TPL3,F   | R608    | 119-1011-15 | 1/10W 100 ohm    | S605    | 013-6201-53 | SKPMAPE010              |
| D639    | 001-7063-95 | RBR1102W D,E    | R609    | 116-6811-15 | 1/4W 680 ohm     | S606    | 013-6201-53 | SKPMAPE010              |
| D640    | 001-7103-91 | CL-191S-MG-D-T  | R610    | 119-2211-15 | 1/10W 220 ohm    | S607    | 013-6201-53 | SKPMAPE010              |
| D641    | 001-0529-36 | MA8062-H        | R611    | 116-6811-15 | 1/4W 680 ohm     | S608    | 013-6201-53 | SKPMAPE010              |
| D642    | 001-2630-90 | 1SS420-TPL3,F   | R612    | 119-2211-15 | 1/10W 220 ohm    | S609    | 013-6206-50 | SKPMAPE010              |
| D643    | 001-2630-90 | 1SS420-TPL3,F   | R613    | 116-1021-15 | 1/4W 1k ohm      | S610    | 013-6206-50 | SKPMAPE010              |
| D644    | 001-2630-90 | 1SS420-TPL3,F   | R614    | 119-2211-15 | 1/10W 220 ohm    | S611    | 013-6206-50 | SKPMAPE010              |
| D645    | 001-2630-90 | 1SS420-TPL3,F   | R615    | 116-6811-15 | 1/4W 680 ohm     | S612    | 013-6201-53 | SKPMAPE010              |
| D646    | 001-2630-90 | 1SS420-TPL3,F   | R616    | 119-2211-15 | 1/10W 220 ohm    | S613    | 013-6201-53 | SKPMAPE010              |
| D651    | 001-9210-50 | AVR-M1608C270M  | R617    | 116-6811-15 | 1/4W 680 ohm     | S614    | 013-6206-50 | SKPMAPE010              |
|         |             | TAAD            | R619    | 116-1021-15 | 1/4W 1k ohm      | S615    | 013-6206-50 | SKPMAPE010              |
| D652    | 001-9210-50 | AVR-M1608C270M  | R621    | 119-2221-15 | 1/10W 2.2k ohm   | S616    | 013-6206-50 | SKPMAPE010              |
|         |             | TAAD            | R622    | 119-3321-15 | 1/10W 3.3k ohm   | S617    | 013-6201-53 | SKPMAPE010              |
| D653    | 001-9210-50 | AVR-M1608C270M  | R623    | 119-1811-15 | 1/10W 180 ohm    | S618    | 013-6206-50 | SKPMAPE010              |
|         |             | TAAD            | R624    | 119-1031-15 | 1/10W 10k ohm    | S619    | 013-6206-50 | SKPMAPE010              |
| D654    | 001-9210-50 | AVR-M1608C270M  | R625    | 119-1031-15 | 1/10W 10k ohm    | S620    | 013-6207-50 | SKPMAPE010              |
|         |             | TAAD            | R626    | 119-1031-15 | 1/10W 10k ohm    | S650    | 016-7004-00 | ROTARY SWITCH           |
| D655    | 001-9210-50 | AVR-M1608C270M  | R627    | 116-1021-15 | 1/4W 1k ohm      | TM602   | 073-0786-90 | TERMINAL                |
|         |             | TAAD            | R628    | 119-1031-15 | 1/10W 10k ohm    | TM603   | 073-0786-90 | TERMINAL                |
| D660    | 001-7111-97 | NHSB046A (BLUE) | R631    | 119-0000-05 | 1/10W 0 ohm JW   | PWB     | 039-3347-00 | PWB(WITHOUT COMPONENTS) |
| D670    | 001-9210-50 | AVR-M1608C270M  | R632    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |
|         |             | TAAD            | R633    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |
| D671    | 001-9210-50 | AVR-M1608C270M  | R634    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |
|         |             | TAAD            | R639    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |
| D672    | 001-9210-50 | AVR-M1608C270M  | R640    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |
|         |             | TAAD            | R641    | 119-0000-05 | 1/10W 0 ohm JW   |         |             |                         |

# CONNECTIONS

