

EXPLODED VIEW

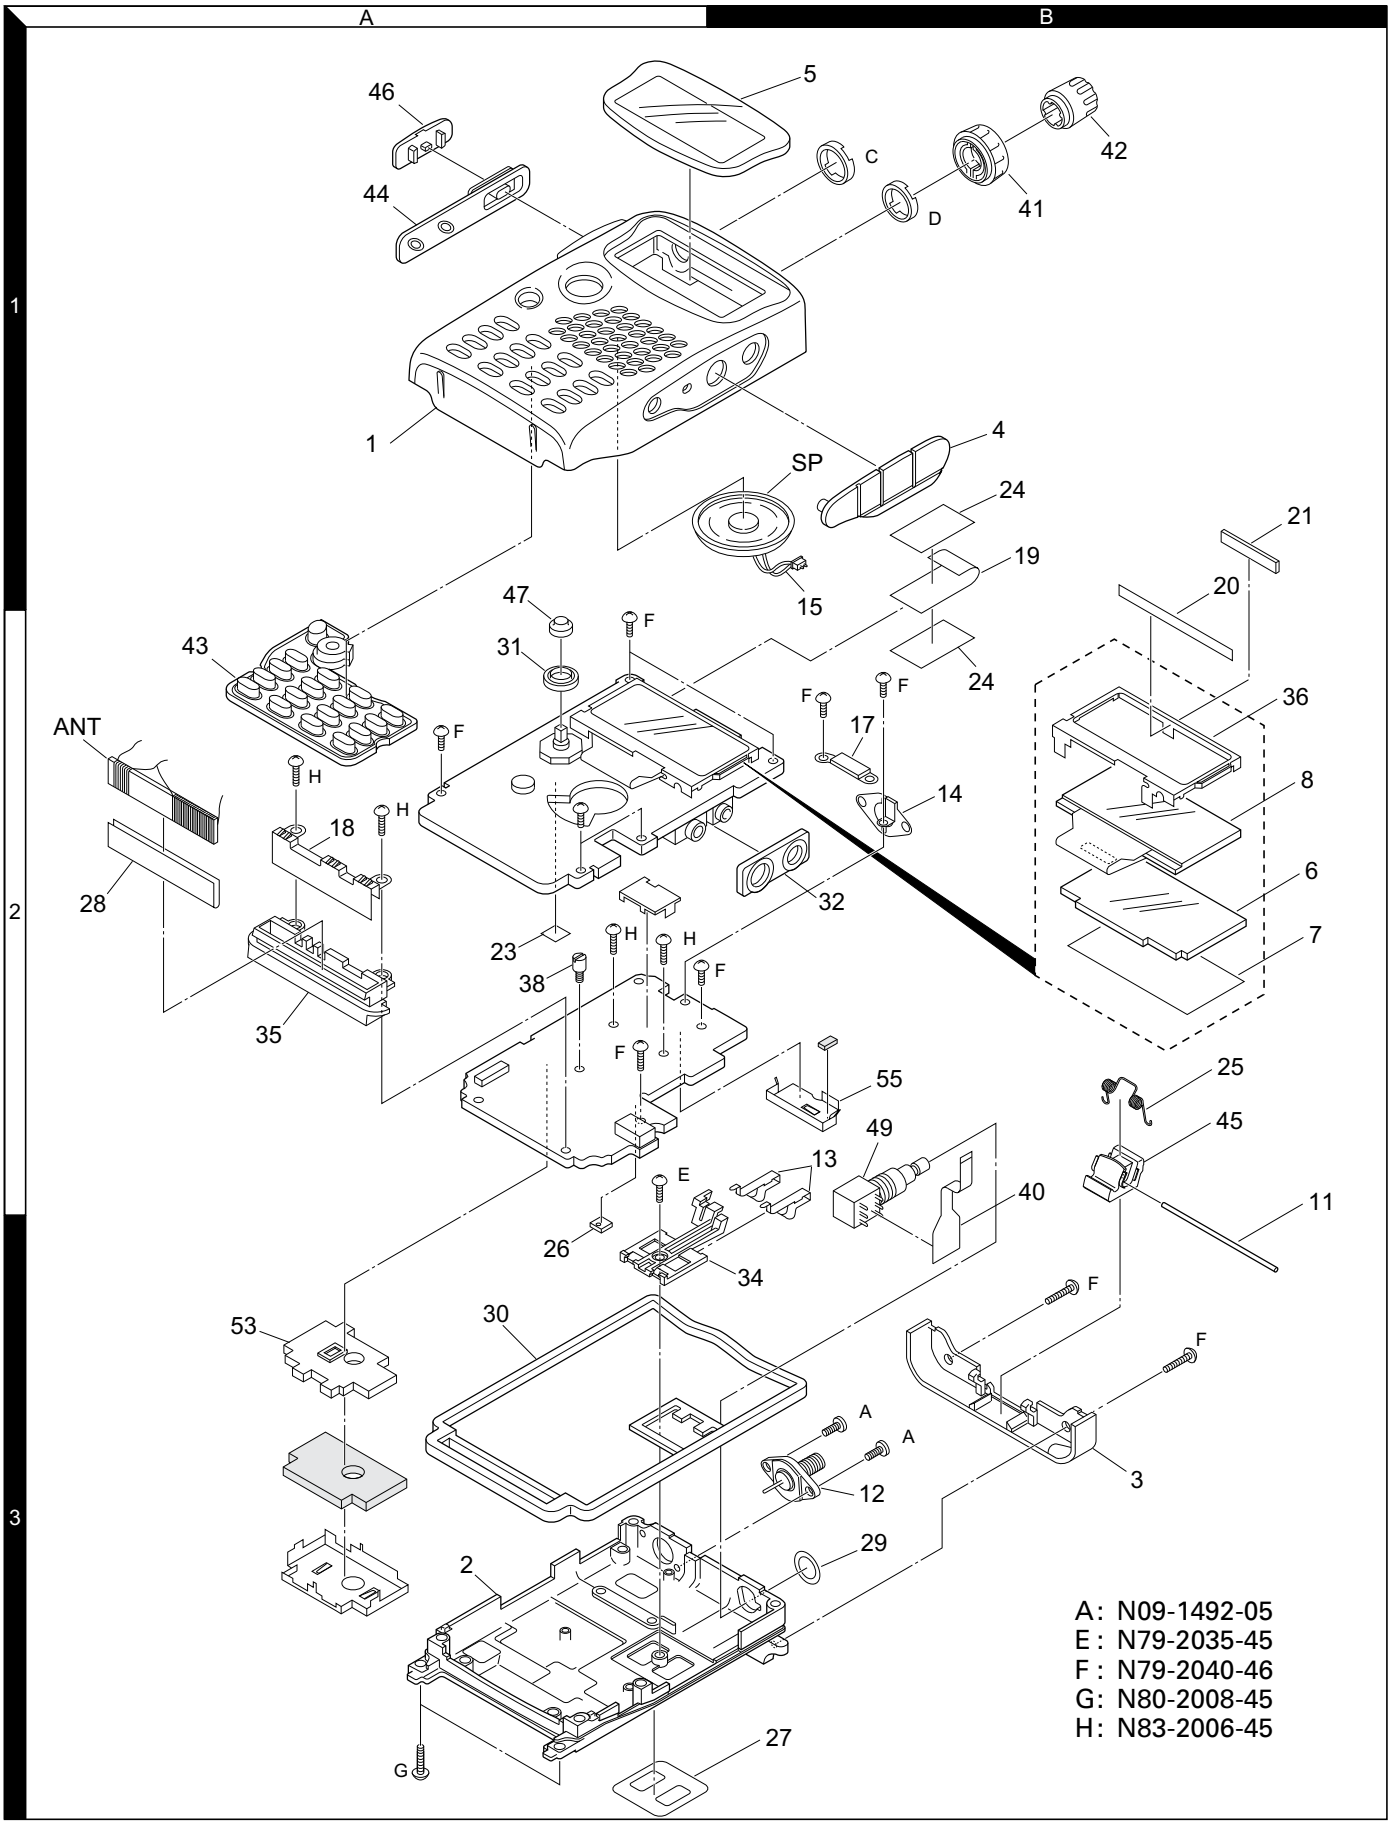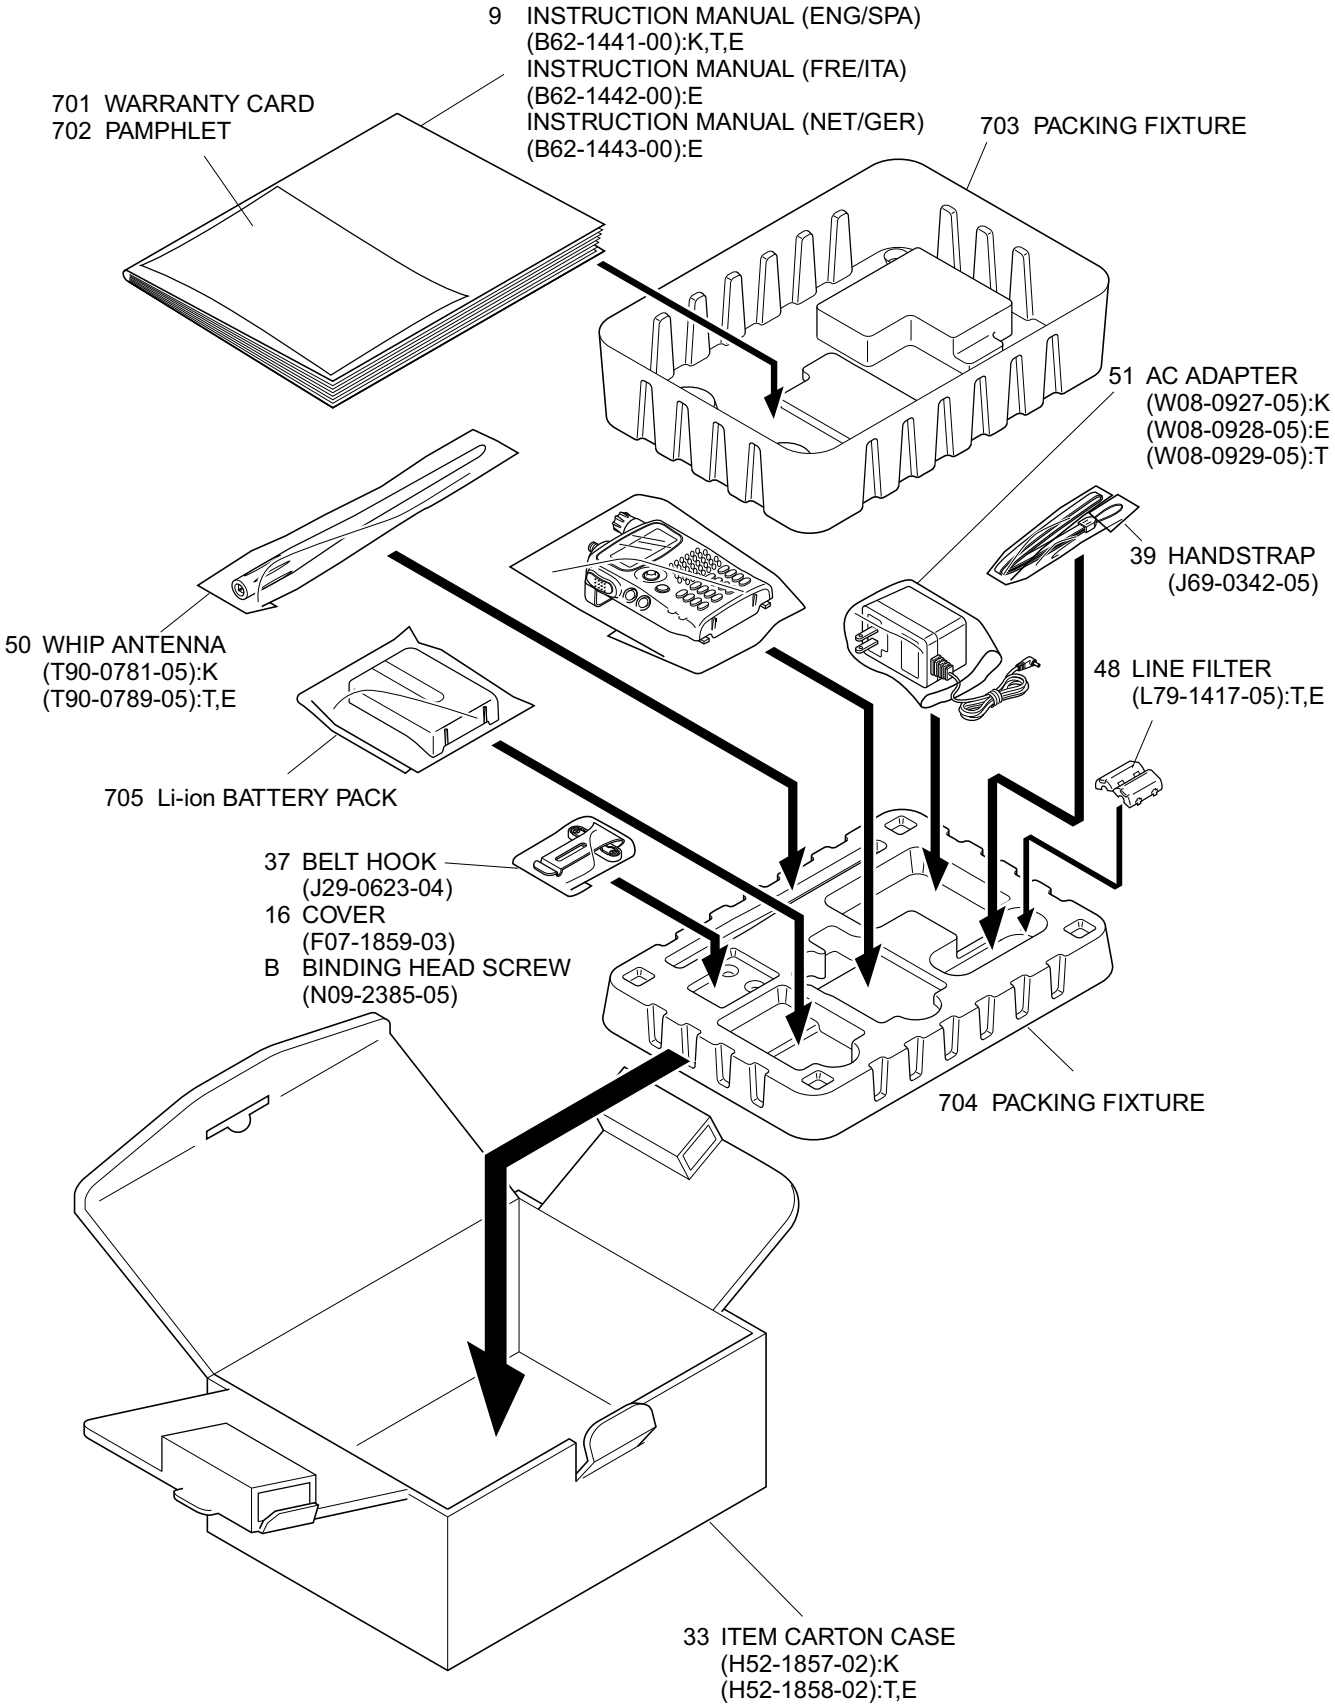

Parts with exploded numbers larger than 700 are not suppied.

PACKING


9 INSTRUCTION MANUAL (ENG/SPA)
(B62-1441-00):K,T,E
INSTRUCTION MANUAL (FRE/ITA)
(B62-1442-00):E
INSTRUCTION MANUAL (NET/GER)
(B62-1443-00):E
701 WARRANTY CARD
702 PAMPHLET
703 PACKING FIXTURE
51 AC ADAPTER
(W08-0927-05):K
(W08-0928-05):E
(W08-0929-05):T
39 HANDSTRAP
(J69-0342-05)
50 WHIP ANTENNA
(T90-0781-05):K
(T90-0789-05):T,E
48 LINE FILTER
(L79-1417-05):T,E
705 Li-ion BATTERY PACK
37 BELT HOOK
(J29-0623-04)
16 COVER
(F07-1859-03)
B BINDING HEAD SCREW
(N09-2385-05)
704 PACKING FIXTURE
33 ITEM CARTON CASE
(H52-1857-02):K
(H52-1858-02):T,E

PARTS LIST

* New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia **K**: USA **P**: Canada
Y: PX (Far East, Hawaii) **T**: England **E**: Europe
Y: AAFES (Europe) **X**: Australia **M**: Other Areas

TH-F6A/F7E

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
TH-F6A/F7E					
1	1A	*	A02-3727-03	CABINET ASSY	
2	3A	*	A10-4050-01	CHASSIS	
3	3B	*	A82-0046-02	REAR PANEL	
4	1B	*	B09-0615-23	CAP (MIC/SP/DC)	
5	1A	*	B10-2685-13	FRONT GLASS	T,E
5	1A	*	B10-2723-13	FRONT GLASS	K
6	2B	*	B11-1280-04	ILLUMINATION GUIDE (LCD)	
7	2B	*	B11-1281-04	FILTER (LCD)	
8	2B	*	B38-0852-15	LCD ASSY	
9	-	*	B62-1441-00	INSTRUCTION MANUAL(ENG/SPA)	
9	-	*	B62-1442-00	INSTRUCTION MANUAL(FRE/ITA)	E
9	-	*	B62-1443-00	INSTRUCTION MANUAL(NET/GER)	E
10	-	*	B72-2054-14	MODEL NAME PLATE	K
10	-	*	B72-2055-04	MODEL NAME PLATE	T,E
11	2B	*	D21-0856-04	SHAFT (RELEASE)	
12	3B		E04-0407-15	RF COAXIAL RECEPTACLE(SMA)	
13	2B	*	E23-1177-04	RELAY TERMINAL (BATTERY)	
14	2B	*	E23-1180-04	GROUND TERMINAL(SMA)	
15	1B		E37-0695-05	LEAD WIRE WITH CONNECTOR(SP)	
16	-	*	F07-1859-03	COVER (HOOK)	
17	2B	*	F10-2411-04	SHIELDING COVER(ANTENNA)	
18	2A	*	F10-2437-04	SHIELDING PLATE(BAR-ANTENNA)	
19	1B	*	F12-0464-14	SHIELDIBG SHEET(LCD)	
20	1B	*	F15-1002-04	SHADOW PLATE (LCD)	
21	1B	*	F15-1004-04	SHADOW PLATE (TX-RX)	
23	2A	*	F20-3325-04	INSULATING SHEET	
24	1B,2B	*	F20-3336-04	INSULATING SHEET	
25	2B	*	G01-4532-04	COIL SPRING (RELEASE)	
26	3A	*	G11-4060-04	RUBBER SHEET	
27	3A	*	G13-1858-14	CUSHION (CHASSIS)	
28	2A	*	G13-1860-04	CUSHION (BAR-ANTENNA)	
29	3B	*	G53-1529-04	PACKING (VOL/ENC)	
30	3A	*	G53-1532-02	PACKING (CASE)	
31	2A	*	G53-1533-03	PACKING (MOLTI-F)	
32	2B	*	G53-1534-13	PACKING (SP/MIC)	
33	-	*	H52-1857-02	ITEM CARTON CASE	K
33	-	*	H52-1858-02	ITEM CARTON CASE	T,E
34	3A	*	J19-5428-03	HOLDER (TERMINAL)	
35	2A	*	J19-5429-13	HOLDER (BER-ANTENNA)	
36	2B	*	J21-8419-03	HARDWARE FIXTURE(LCD)	
37	-		J29-0623-04	BELT HOOK	
38	2A	*	J32-0927-04	CYLINDRICAL BOSS	
39	-		J69-0342-05	HANDSTRAP	
40	2B	*	J82-0076-05	FPC (VOL/ENC)	
41	1B	*	K29-5150-03	KNOB (VOL)	
42	1B	*	K29-5159-03	KNOB (ENC)	
43	2A	*	K29-9107-12	KEY TOP	
44	1A	*	K29-9108-13	KNOB (PTT/MONI)	
45	2B	*	K29-9109-03	LEVER KNOB (RELEASE)	
46	1A	*	K29-9110-03	KNOB (PTT)	
47	1A	*	K29-9111-03	KNOB (MULTI-F)	
48	-		L79-1417-05	LINE FILTER	T,E
A	3B		N09-1492-05	PAN HEAD SCREW (SMA)	
B	-	*	N09-2385-05	BINDING HEAD SCREW (HOOK)	
C	1B		N14-0573-04	CIRCULAR NUT (SMA)	
D	1B	*	N14-0593-04	CIRCULAR NUT (VOL/ENC)	
E	2A		N79-2035-45	PAN HEAD TAPTITE SCREW	
F	2A,2B	*	N79-2040-46	PAN HEAD TAPTITE SCREW	
G	3A		N80-2008-45	PAN HEAD TAPTITE SCREW	
H	2A		N83-2006-45	PAN HEAD TAPTITE SCREW	
49	2B		R39-0602-05	VARIABLE RESISTOR	
SP	1B		T07-0266-05	SPEAKER	
50	-	*	T90-0781-05	WHIP ANTENNA	K
50	-	*	T90-0789-05	WHIP ANTENNA	T,E
ANT	2A	*	T90-0787-05	ANTENNA (Bar antenna)	
51	-	*	W08-0927-05	AC ADAPTER	K
51	-	*	W08-0928-05	AC ADAPTER	E
51	-	*	W08-0929-05	AC ADAPTER	T
53	3A		X57-6362-01	VCO UNIT	
TX-RX UNIT (X57-6360-00) 0-11:K, 2-71:T,E					
D712,713			B30-2131-05	LED	
D714-717			B30-2210-05	LED(TLY)	
D720-725			B30-2157-05	LED(YELLOW)	
C1			CK73HB1H471K	CHIP C 470PF K	
C2			CK73HB1H102K	CHIP C 1000PF K	
C3,4			CC73HCH1H101J	CHIP C 100PF J	
C5			CK73HB1H102K	CHIP C 1000PF K	
C6			CK73HB1C103K	CHIP C 0.010UF K	
C7			CK73HB1A104K	CHIP C 0.10UF K	
C8			CK73HB1H471K	CHIP C 470PF K	
C9,10			CK73HB1C103K	CHIP C 0.010UF K	
C11			CK73HB1H471K	CHIP C 470PF K	
C12			CC73HCH1H680J	CHIP C 68PF J	
C13			CK73HB1A104K	CHIP C 0.10UF K	
C14			CC73HCH1H120J	CHIP C 12PF J	
C15,16			CK73HB1A104K	CHIP C 0.10UF K	
C17,18			CK73HB1H471K	CHIP C 470PF K	
C19			CK73GB0J105K	CHIP C 1.0UF K	
C20			CK73HB1C103K	CHIP C 0.010UF K	
C21			CC73HCH1H102J	CHIP C 1000PF J	
C22			CK73HB1H471K	CHIP C 470PF K	
C23			CK73HB1H102K	CHIP C 1000PF K	
C24			CC73HCH1H101J	CHIP C 100PF J	
C25			CC73HCH1H680J	CHIP C 68PF J	
C26-28			CC73HCH1H220J	CHIP C 22PF J	
C29,30			CK73HB1A104K	CHIP C 0.10UF K	
C31,32			CK73HB1H471K	CHIP C 470PF K	
C33			CK73HB1H102K	CHIP C 1000PF K	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C34			CC73HCH1H101J	CHIP C	100PF	J	
C36			C92-0518-05	CHIP-TAN	0.22UF	20WV	
C37			CK73HB1H471K	CHIP C	470PF	K	
C40			CK73HB1C103K	CHIP C	0.010UF	K	
C41			C92-0766-05	CHIP-TAN	4.7UF	6.3WV	
C42			CK73HB1C103K	CHIP C	0.010UF	K	
C43			C92-0555-05	CHIP-TAN	0.047UF	35WV	
C44			CK73HB1H471K	CHIP C	470PF	K	
C45			C92-0542-05	CHIP-TAN	0.10UF	20WV	
C46			CK73HB1C103K	CHIP C	0.010UF	K	
C47,48			CK73HB1H471K	CHIP C	470PF	K	
C49			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C50			CC73HCH1H010B	CHIP C	1.0PF	B	
C51			CK73HB1H471K	CHIP C	470PF	K	
C52			C92-0772-05	CHIP-TAN	10UF	6.3WV	
C53			CK73HB1H471K	CHIP C	470PF	K	
C54			CK73HB1A104K	CHIP C	0.10UF	K	
C55-57			CK73HB1H471K	CHIP C	470PF	K	
C58,59			CK73HB1A104K	CHIP C	0.10UF	K	
C60-62			CK73HB1H471K	CHIP C	470PF	K	
C64			CK73HB1C103K	CHIP C	0.010UF	K	
C65			CC73HCH1H060B	CHIP C	6.0PF	B	
C66			CC73HCH1H150J	CHIP C	15PF	J	
C67			CC73HCH1H060B	CHIP C	6.0PF	B	
C68,69			CK73HB1H471K	CHIP C	470PF	K	
C70			CK73HB1C103K	CHIP C	0.010UF	K	
C71			CC73HCH1H070B	CHIP C	7.0PF	B	
C72			CK73HB1H471K	CHIP C	470PF	K	
C75		*	CC73HCH1H100C	CHIP C	10PF	C	
C76,77			CK73HB1H471K	CHIP C	470PF	K	
C78			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C79,80			CK73HB1H471K	CHIP C	470PF	K	
C82			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C83			CC73HCH1H220J	CHIP C	22PF	J	
C84,85			CK73HB1C103K	CHIP C	0.010UF	K	
C86,87			CK73HB1H471K	CHIP C	470PF	K	
C88			CK73HB1A104K	CHIP C	0.10UF	K	
C89			CK73HB1H471K	CHIP C	470PF	K	
C90,91		*	CC73HCH1H100C	CHIP C	10PF	C	
C94			CC73HCH1H080B	CHIP C	8.0PF	B	
C95			CC73HCH1H030C	CHIP C	3.0PF	C	
C97			CC73HCH1H080B	CHIP C	8.0PF	B	
C102,103			CK73HB1C103K	CHIP C	0.010UF	K	
C104			CK73HB1H471K	CHIP C	470PF	K	
C105			CK73HB1H102K	CHIP C	1000PF	K	
C106			CK73HB1H471K	CHIP C	470PF	K	
C107			CC73HCH1H050C	CHIP C	5.0PF	C	
C108		*	CC73HCH1H100C	CHIP C	10PF	C	
C109,110			CK73HB1H471K	CHIP C	470PF	K	
C112			CK73HB1H102K	CHIP C	1000PF	K	
C113			CK73HB1H471K	CHIP C	470PF	K	
C114,115			CC73HCH1H101J	CHIP C	100PF	J	
C116			CC73HCH1H050C	CHIP C	5.0PF	C	
C117			CC73HCH1H101J	CHIP C	100PF	J	
C119			CK73HB1C103K	CHIP C	0.010UF	K	
C121			CC73HCH1H060B	CHIP C	6.0PF	B	

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C123			CC73HCH1H101J	CHIP C	100PF	J	
C126			CK73FB1C105K	CHIP C	1.0UF	K	
C127			CK73HB1C103K	CHIP C	0.010UF	K	
C129			CK73HB1C103K	CHIP C	0.010UF	K	
C130			CK73HB1H332K	CHIP C	3300PF	K	
C133,134			CK73HB1C103K	CHIP C	0.010UF	K	
C135			CK73HB1A104K	CHIP C	0.10UF	K	
C137			CK73HB1H152K	CHIP C	1500PF	K	
C138			CK73HB1A104K	CHIP C	0.10UF	K	
C139			CC73HCH1H101J	CHIP C	100PF	J	
C140			CK73HB1H821K	CHIP C	820PF	K	
C141			CK73HB1C103K	CHIP C	0.010UF	K	
C143			CK73HB1C103K	CHIP C	0.010UF	K	
C145			CK73HB1H102K	CHIP C	1000PF	K	
C147			C92-0772-05	CHIP-TAN	10UF	6.3WV	
C149			CK73GB1A474K	CHIP C	0.47UF	K	
C150			CK73HB1A104K	CHIP C	0.10UF	K	
C151			CK73HB1H102K	CHIP C	1000PF	K	
C152			CK73HB1A104K	CHIP C	0.10UF	K	
C154			CK73HB1H102K	CHIP C	1000PF	K	
C155			C92-0772-05	CHIP-TAN	10UF	6.3WV	
C156,157			CK73HB1H102K	CHIP C	1000PF	K	
C158-160			CK73HB1A104K	CHIP C	0.10UF	K	
C161			CK73HB1H102K	CHIP C	1000PF	K	
C162			CK73HB1A104K	CHIP C	0.10UF	K	
C163,164			CC73HCH1H101J	CHIP C	100PF	J	
C165			CK73HB1A104K	CHIP C	0.10UF	K	
C166			CC73HCH1H330J	CHIP C	33PF	J	
C167			CC73HCH1H070B	CHIP C	7.0PF	B	
C168			CK73HB1A104K	CHIP C	0.10UF	K	
C169			C92-0772-05	CHIP-TAN	10UF	6.3WV	
C170-173			CK73HB1A104K	CHIP C	0.10UF	K	
C174			CK73HB1H102K	CHIP C	1000PF	K	
C175			CK73HB1A104K	CHIP C	0.10UF	K	
C177			C92-0772-05	CHIP ELECTR	470UF	10WV	
C178			CK73HB1H102K	CHIP C	1000PF	K	
C179			CK73HB1A104K	CHIP C	0.10UF	K	
C180			CC73HCH1H030C	CHIP C	3.0PF	C	
C181			CK73HB1C103K	CHIP C	0.010UF	K	
C182			CC73HCH1H120J	CHIP C	12PF	J	
C183,184			CK73HB1C103K	CHIP C	0.010UF	K	
C186			CC73HCH1H270J	CHIP C	27PF	J	
C188			CC73HCH1H050C	CHIP C	5.0PF	C	
C189		*	CC73HCH1H100C	CHIP C	10PF	C	
C190			CC73HCH1H120J	CHIP C	12PF	C	
C191			CK73HB1A104K	CHIP C	0.10UF	K	
C192			CK73HB1C103K	CHIP C	0.010UF	K	
C193			CC73HCH1H060B	CHIP C	6.0PF	B	
C195			CK73HB1H471K	CHIP C	470PF	K	
C196			CC73HCH1H220J	CHIP C	22PF	J	
C199			CC73HCH1H121J	CHIP C	120PF	J	
C200			CK73HB1H102K	CHIP C	1000PF	K	
C202			CK73HB1C103K	CHIP C	0.010UF	K	
C203			CC73HCH1H330J	CHIP C	33PF	J	
C205,206			CK73HB1C103K	CHIP C	0.010UF	K	
C208			CK73HB1C103K	CHIP C	0.010UF	K	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
C209			CC73HCH1H101J	CHIP C 100PF J	
C210			CC73HCH1H330J	CHIP C 33PF J	
C211			CK73HB1C103K	CHIP C 0.010UF K	
C212,213			CC73HCH1H101J	CHIP C 100PF J	
C214			CK73HB1H102K	CHIP C 1000PF K	
C215			CK73HB1C103K	CHIP C 0.010UF K	
C217		*	CC73HCH1H100C	CHIP C 10PF C	
C218			CC73HCH1H470J	CHIP C 47PF J	
C219			CK73HB1H471K	CHIP C 470PF K	
C220,221			CK73HB1A104K	CHIP C 0.10UF K	
C222			CK73HB1H471K	CHIP C 470PF K	
C223			CK73HB1H102K	CHIP C 1000PF K	
C224			CC73HCH1H470J	CHIP C 47PF J	
C225,226			CK73HB1H471K	CHIP C 470PF K	
C227			CK73HB1H561K	CHIP C 560PF K	
C228			C92-0003-05	CHIP-TAN 0.47UF 25WV	
C229			C92-0766-05	CHIP-TAN 4.7UF 6.3WV	
C230			C92-0555-05	CHIP-TAN 0.047UF 35WV	
C231,232			CK73HB1H471K	CHIP C 470PF K	
C233			CK73HB1A104K	CHIP C 0.10UF K	
C234			CK73HB1H561K	CHIP C 560PF K	
C235			C92-0772-05	CHIP-TAN 10UF 6.3WV	
C236			CK73HB1H471K	CHIP C 470PF K	
C237			CK73HB1A104K	CHIP C 0.10UF K	
C238			CK73HB1C103K	CHIP C 0.010UF K	
C239			CK73HB1H561K	CHIP C 560PF K	
C240,241			CC73HCH1H010B	CHIP C 1.0PF B	
C242			CC73HCH1E181J	CHIP C 180PF J	
C245			CK73HB1H102K	CHIP C 1000PF K	
C246			CC73HCH1H070B	CHIP C 7.0PF B	
C247		*	CC73HCH1H100C	CHIP C 10PF C	
C248			CC73HCH1H120J	CHIP C 12PF J	
C249			CK73HB1H471K	CHIP C 470PF K	
C251			CK73HB1H471K	CHIP C 470PF K	
C252			CC73HCH1H070B	CHIP C 7.0PF B	
C253			CK73HB1H561K	CHIP C 560PF K	
C254			CC73HCH1H0R5B	CHIP C 0.5PF B	
C255			CK73HB1H471K	CHIP C 470PF K	
C256			CK73HB1C103K	CHIP C 0.010UF K	
C259			CC73HCH1H0R5B	CHIP C 0.5PF B	
C260		*	CC73HCH1H100C	CHIP C 10PF C	
C261			CK73HB1H471K	CHIP C 470PF K	
C263		*	CC73HCH1H100C	CHIP C 10PF C	
C264			CC73HCH1H220J	CHIP C 22PF J	
C265			CK73HB1H471K	CHIP C 470PF K	
C266			CK73HB1A104K	CHIP C 0.10UF K	
C269			CC73HCH1H120J	CHIP C 12PF J	
C270			CC73HCH1H020B	CHIP C 2.0PF B	
C271			CC73HCH1H120J	CHIP C 12PF J	
C272		*	CC73HCH1H100C	CHIP C 10PF C	
C274			CC73HCH1H101J	CHIP C 100PF J	
C277			CK73HB1H561K	CHIP C 560PF K	
C278			CC73HCH1H0R5B	CHIP C 0.5PF B	
C280			CK73FB1C105K	CHIP C 1.0UF K	
C281			CK73HB1C103K	CHIP C 0.010UF K	
C282			CC73HCH1H150J	CHIP C 15PF J	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
C283			CK73HB1H471K	CHIP C 470PF K	
C284			CC73HCH1H090D	CHIP C 9.0PF D	
C285			CC73HCH1H820J	CHIP C 82PF J	
C286			CK73HB1A104K	CHIP C 0.10UF K	
C287			CK73HB1A104K	CHIP C 0.10UF K	
C288			CK73HB1A104K	CHIP C 0.10UF K	
C289			CC73HCH1H330J	CHIP C 33PF J	
C290,291			CC73HCH1E181J	CHIP C 180PF J	
C292			CK73HB1A104K	CHIP C 0.10UF K	
C293			CK73HB1H102K	CHIP C 1000PF K	
C295			CK73HB1C103K	CHIP C 0.010UF K	
C296			CC73HCH1H150J	CHIP C 15PF J	
C297			CC73HCH1H560J	CHIP C 56PF J	
C298,299			CK73HB1H102K	CHIP C 1000PF K	
C301			C92-0772-05	CHIP-TAN 10UF 6.3WV	
C302			CK73HB1H471K	CHIP C 470PF K	
C303			CC73HCH1H080B	CHIP C 8.0PF B	
C305			CK73HB1H102K	CHIP C 1000PF K	
C306			CC73HCH1H150J	CHIP C 15PF J	
C307			CK73HB1C103K	CHIP C 0.010UF K	
C308			CK73HB1H471K	CHIP C 470PF K	
C309			CK73HB1C103K	CHIP C 0.010UF K	
C310-314			CK73HB1H471K	CHIP C 470PF K	
C315			CC73HCH1H220J	CHIP C 22PF J	
C317-322			CK73HB1H471K	CHIP C 470PF K	
C323			C92-0772-05	CHIP-TAN 10UF 6.3WV	
C324-328			CK73HB1H471K	CHIP C 470PF K	
C331,332			CK73HB1H471K	CHIP C 470PF K	
C333			CC73HCH1H330J	CHIP C 33PF J	
C334,335			CK73HB1H471K	CHIP C 470PF K	
C336			CK73HB1H102K	CHIP C 1000PF K	
C337			CC73HCH1H470J	CHIP C 47PF J	
C338			CC73HCH1H270J	CHIP C 27PF J	
C339			CK73GB1H471K	CHIP C 470PF K	
C340			CK73HB1A104K	CHIP C 0.10UF K	
C341			CC73HCH1H070B	CHIP C 7.0PF B	
C343			CC73HCH1H120J	CHIP C 12PF J	
C344			CC73HCH1H150J	CHIP C 15PF J	
C345-347			CK73HB1H471K	CHIP C 470PF K	
C348,349			CC73GCH1H680J	CHIP C 68PF J	
C350			CC73GCH1H270J	CHIP C 27PF J	
C351			CC73GCH1H220J	CHIP C 22PF J	K
C351			CC73GCH1H270J	CHIP C 27PF J	T,E
C352			CK73HB1H471K	CHIP C 470PF K	
C353			CK73FB1C105K	CHIP C 1.0UF K	
C354			CC73GCH1H330J	CHIP C 33PF J	K
C354			CC73GCH1H360J	CHIP C 36PF J	T,E
C356			CC73GCH1H270J	CHIP C 27PF J	K
C356			CC73GCH1H330J	CHIP C 33PF J	T,E
C357			CC73GCH1H120J	CHIP C 12PF J	
C358			CC73HCH1H101J	CHIP C 100PF J	
C360,361			CK73HB1H471K	CHIP C 470PF K	
C362			CK73HB1C103K	CHIP C 0.010UF K	
C363			CC73GCH1H130J	CHIP C 13PF J	
C368			CK73HB1H471K	CHIP C 470PF K	
C373			CC73GCH1H220J	CHIP C 22PF J	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C376			CC73HCH1H050C	CHIP C	5.0PF	C	K
C377			CK73HB1A104K	CHIP C	0.10UF	K	
C378			CK73HB1H471K	CHIP C	470PF	K	
C381			CC73HCH1H101J	CHIP C	100PF	J	
C382			CC73GCH1H200J	CHIP C	20PF	J	K
C387,388			CK73HB1H102K	CHIP C	1000PF	K	
C389			CC73HCH1H080B	CHIP C	8.0PF	B	
C390			CK73HB1A104K	CHIP C	0.10UF	K	
C392			CC73HCH1H150J	CHIP C	15PF	B	K
C395			CK73HB1H102K	CHIP C	1000PF	K	
C396			CK73HB1H471K	CHIP C	470PF	K	
C407			CC73GCH1H100C	CHIP C	10PF	C	
C408			CC73HCH1H050C	CHIP C	5.0PF	C	K
C408			CC73HCH1H070B	CHIP C	7.0PF	B	T,E
C409			CC73GCH1H150J	CHIP C	15PF	J	K
C409			CC73GCH1H220J	CHIP C	22PF	J	T,E
C410			CC73GCH1H010B	CHIP C	1.0PF	B	K
C410			CC73GCH1H020B	CHIP C	2.0PF	B	T,E
C411			CK73HB1H471K	CHIP C	470PF	K	
C412			CC73HCH1H020B	CHIP C	2.0PF	B	
C413			CC73HCH1H050C	CHIP C	5.0PF	C	
C414			CC73GCH1H080D	CHIP C	8.0PF	D	
C415			CC73HCH1H010B	CHIP C	1.0PF	B	
C416			CC73GCH1H110J	CHIP C	11PF	J	
C417			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C418			CC73GCH1H040B	CHIP C	4.0PF	B	
C419			CC73GCH1H220J	CHIP C	22PF	J	
C420			CC73HCH1H101J	CHIP C	100PF	J	
C421		*	CC73HCH1H100C	CHIP C	10PF	C	
C428			CC73HCH1H050C	CHIP C	5.0PF	C	K
C428			CC73HCH1H070B	CHIP C	7.0PF	B	T,E
C429			CC73GCH1H180J	CHIP C	18PF	J	
C430			CC73GCH1H070B	CHIP C	7.0PF	B	
C436			CC73HCH1H090D	CHIP C	9.0PF	D	
C437			CC73HCH1H220J	CHIP C	22PF	J	
C438			CC73HCH1H050C	CHIP C	5.0PF	C	
C439			CC73HCH1H040C	CHIP C	4.0PF	C	
C440			CC73HCH1H060B	CHIP C	6.0PF	B	
C441			CC73HCH1H120J	CHIP C	12PF	J	
C442			CK73HB1A104K	CHIP C	0.10UF	K	
C443			CK73HB1H471K	CHIP C	470PF	K	
C444			CK73HB1C103K	CHIP C	0.010UF	K	
C445			CC73HCH1H101J	CHIP C	100PF	J	
C446			CK73HB1A104K	CHIP C	0.10UF	K	
C447		*	CC73HCH1H1R5B	CHIP C	1.5PF	B	
C448			CK73HB1C103K	CHIP C	0.010UF	K	
C449			CK73HB1H471K	CHIP C	470PF	K	
C450			CK73HB1C103K	CHIP C	0.010UF	K	
C451			CK73HB1A104K	CHIP C	0.10UF	K	
C453			CK73HB1C103K	CHIP C	0.010UF	K	
C454,455			CK73HB1A104K	CHIP C	0.10UF	K	
C457			CK73HB1C223K	CHIP C	0.022UF	K	
C458			CK73HB1A104K	CHIP C	0.10UF	K	
C460			CK73HB1H471K	CHIP C	470PF	K	
C461,462			CK73HB1A104K	CHIP C	0.10UF	K	

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C463-474			CK73HB1C103K	CHIP C	0.010UF	K	
C475			CK73HB1H471K	CHIP C	470PF	K	
C476,477			CK73HB1C103K	CHIP C	0.010UF	K	
C484			CC73GCH1H020B	CHIP C	2.0PF	B	K
C484			CC73GCH1H030C	CHIP C	3.0PF	C	T,E
C485			CC73HCH1H470J	CHIP C	47PF	J	
C488			CC73HCH1H030C	CHIP C	3.0PF	C	
C489			CC73HCH1H101J	CHIP C	100PF	J	
C490			CC73HCH1H470J	CHIP C	47PF	J	
C491			CC73HCH1H101J	CHIP C	100PF	J	
C492			CC73HCH1H101J	CHIP C	100PF	J	
C494			CK73HB1H471K	CHIP C	470PF	K	
C495			CC73HCH1H150J	CHIP C	15PF	J	T,E
C497			CC73HCH1H040C	CHIP C	4.0PF	C	
C498			CC73HCH1H030C	CHIP C	3.0PF	C	T,E
C498			CC73HCH1H150J	CHIP C	15PF	J	K
C499			CC73HCH1H050B	CHIP C	5.0PF	C	K
C499		*	CC73HCH1H130J	CHIP C	13PF	J	T,E
C500			CC73HCH1H080B	CHIP C	8.0PF	B	K
C500			CC73HCH1H040C	CHIP C	4.0PF	C	T,E
C501			CC73HCH1H040C	CHIP C	4.0PF	C	
C502			CC73HCH1H050C	CHIP C	5.0PF	C	K
C502			CC73HCH1H150J	CHIP C	15PF	J	T,E
C503			CC73HCH1H101J	CHIP C	100PF	J	
C504			CC73HCH1H070B	CHIP C	7.0PF	B	T,E
C504			CC73HCH1H120J	CHIP C	12PF	J	K
C505			CK73HB1H471K	CHIP C	470PF	K	
C506			CC73HCH1H060B	CHIP C	6.0PF	B	K
C506			CC73HCH1H180J	CHIP C	18PF	J	T,E
C507			CC73HCH1H080B	CHIP C	8.0PF	B	K
C507			CC73HCH1H220J	CHIP C	22PF	J	T,E
C508-510			CK73HB1H471K	CHIP C	470PF	K	
C511			CC73HCH1H050C	CHIP C	5.0PF	C	K
C511		*	CC73HCH1H100C	CHIP C	10PF	C	T,E
C512,513			CK73HB1H102K	CHIP C	1000PF	K	
C515,516			CK73HB1H102K	CHIP C	1000PF	K	
C517			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C518			CC73HCH1H010B	CHIP C	1.0PF	B	
C519-522			CK73HB1H102K	CHIP C	1000PF	K	
C523			CC73GCH1H101J	CHIP C	100PF	J	
C524			CK73HB1H561K	CHIP C	560PF	K	
C525			CK73HB1H102K	CHIP C	1000PF	K	
C527			CC73HCH1H030C	CHIP C	3.0PF	C	
C528			CK73HB1H102K	CHIP C	1000PF	K	
C529			CC73HCH1H101J	CHIP C	100PF	J	
C531			CC73HCH1H101J	CHIP C	100PF	J	
C532			CC73HCH1H560J	CHIP C	56PF	J	
C533			CC73HCH1H330J	CHIP C	33PF	J	
C534			CC73HCH1H220J	CHIP C	22PF	J	
C535			CC73HCH1H330J	CHIP C	33PF	J	
C536			CK73HB1H102K	CHIP C	1000PF	K	
C537			CC73HCH1H560J	CHIP C	56PF	J	
C538			CK73HB1H102K	CHIP C	1000PF	K	
C539			CC73HCH1H470J	CHIP C	47PF	J	
C543			CK73HB1H102K	CHIP C	1000PF	K	
C544,545			CC73HCH1H680J	CHIP C	68PF	J	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
C546-548			CK73HB1E472K	CHIP C 4700PF K	
C549			CK73HB1H102K	CHIP C 1000PF K	
C551			CC73HCH1H560J	CHIP C 56PF J	
C552			CC73HCH1H121J	CHIP C 120PF J	
C553			CC73HCH1H560J	CHIP C 56PF J	
C554			CC73HCH1H270J	CHIP C 27PF J	
C555			CK73HB1E472K	CHIP C 4700PF K	
C556			CK73HB1H102K	CHIP C 1000PF K	
C557			CK73HB1E472K	CHIP C 4700PF K	
C558,559			CK73HB1C103K	CHIP C 0.010UF K	
C560			CC73HCH1H050C	CHIP C 5.0PF C	
C561-563			CK73HB1H471K	CHIP C 470PF K	
C565			CC73HCH1H680J	CHIP C 68PF J	K
C567			CC73HCH1H101J	CHIP C 100PF J	
C568-570			CK73HB1H471K	CHIP C 470PF K	
C571			CC73HCH1H030C	CHIP C 3.0PF C	K
C571			CC73HCH1H050C	CHIP C 5.0PF C	T,E
C575,576			CK73HB1H102K	CHIP C 1000PF K	
C577			CC73HCH1H220J	CHIP C 22PF J	
C578			CC73HCH1H150J	CHIP C 15PF J	K
C579			CC73HCH1H220J	CHIP C 22PF J	
C580			CC73GCH1H180J	CHIP C 18PF J	K
C582			CK73HB1H102K	CHIP C 1000PF K	
C584			CC73GCH1H470J	CHIP C 47PF J	K
C585			CC73GCH1H150J	CHIP C 15PF J	K
C587			CK73GB1H102K	CHIP C 1000PF K	
C588			CK73HB1H102K	CHIP C 1000PF K	
C589			CC73GCH1H470J	CHIP C 47PF J	K
C592			CC73HCH1H040C	CHIP C 4.7PF C	
C596			CC73HCH1H121J	CHIP C 120PF J	
C597			CK73HB1A104K	CHIP C 0.10UF K	
C611			CK73HB1E472K	CHIP C 4700PF K	
C616			CK73HB1A104K	CHIP C 0.10UF K	
C618			CC73HCH1H390J	CHIP C 39PF J	
C619			CC73HCH1H180J	CHIP C 18PF J	
C620			CC73HCH1H220J	CHIP C 22PF J	
C621			CC73HCH1H150J	CHIP C 15PF J	
C624		*	CC73HCH1H100C	CHIP C 10PF C	
C625			CC73HCH1H471K	CHIP C 470PF K	
C626			CC73HCH1H121J	CHIP C 120PF J	
C627			CK73GB1H102K	CHIP C 1000PF K	
C628			CK73HB1A104K	CHIP C 0.10UF K	
C630			CC73HCH1H470J	CHIP C 47PF J	
C631			CK73HB1H102K	CHIP C 1000PF K	
C632			C92-0772-05	CHIP-TAN 10UF 6.3WV	
C634,635			CK73HB1H102K	CHIP C 1000PF K	
C636			CC73HCH1H030C	CHIP C 3.0PF C	
C637,638			CC73HCH1H040C	CHIP C 4.0PF C	
C640-643			CK73HB1H471K	CHIP C 470PF K	
C644			CC73HCH1H010B	CHIP C 1.0PF B	
C645		*	CC73HCH1H100C	CHIP C 10PF C	
C646			CK73HB1H471K	CHIP C 470PF K	
C647			CK73HB1C103K	CHIP C 0.010UF K	
C648		*	CC73HCH1H100C	CHIP C 10PF C	
C652			CK73HB1H471K	CHIP C 470PF K	K
C653			CK73HB1H471K	CHIP C 470PF K	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
C654			CC73GCH1H150J	CHIP C 15PF J	
C655			CK73HB1H471K	CHIP C 470PF K	
C656,657			CK73HB1A104K	CHIP C 0.10UF K	
C658			CC73HCH1H020B	CHIP C 2.0PF B	
C659			CC73HCH1H090D	CHIP C 9.0PF D	
C660			CC73GCH1H180J	CHIP C 18PF J	K
C661,662			CK73HB1H471K	CHIP C 470PF K	K
C663			CK73HB1C103K	CHIP C 0.010UF K	
C664			CK73HB1H471K	CHIP C 470PF K	
C665,666			CK73HB1A104K	CHIP C 0.10UF K	
C667			CK73HB1H471K	CHIP C 470PF K	
C668-670			CK73HB1C103K	CHIP C 0.010UF K	
C672			CK73GB1H102K	CHIP C 1000PF K	
C673,674			CK73HB1H102K	CHIP C 1000UF K	
C675			CK73GB1H471K	CHIP C 470PF K	
C676			CK73GB1H102K	CHIP C 1000PF K	
C677			CK73HB1H102K	CHIP C 1000PF K	
C678,679			CK73HB1H471K	CHIP C 470PF K	K
C680,681			CK73GB1H102K	CHIP C 1000PF K	
C701			CK73GB1A224K	CHIP C 0.22UF K	
C702,703			CK73HB1A104K	CHIP C 0.10UF K	
C704			CK73HB1H392K	CHIP C 3900PF K	
C705			CK73GB0J105K	CHIP C 1.0UF K	
C706			C92-0772-05	CHIP-TAN 10UF 6.3WV	
C707			C92-0656-05	CHIP-TAN 2.2UF 6.3WV	
C709			C92-0656-05	CHIP-TAN 2.2UF 6.3WV	
C710			CK73HB1H471K	CHIP C 470PF K	
C711			CC73HCH1H151J	CHIP C 150PF J	
C712			CK73HB1H471K	CHIP C 470PF K	
C713			CK73FB0J475K	CHIP C 4.7UF K	
C714			CK73HB1A104K	CHIP C 0.10UF K	
C715			CK73HB1C103K	CHIP C 0.010UF K	
C716			CK73HB1H182K	CHIP C 1800PF K	
C717			CK73HB1C822K	CHIP C 8200PF K	
C718			CK73HB1H332K	CHIP C 3300PF K	
C719			CK73HB1A473K	CHIP C 0.047UF K	
C720,721			CK73GB0J105K	CHIP C 1.0UF K	
C722			CK73HB1H681K	CHIP C 680PF K	
C723			C92-0766-05	CHIP-TAN 4.7UF 6.3WV	
C724			CC73HCH1H470J	CHIP C 47PF J	
C725			CK73HB1H471K	CHIP C 470PF K	
C726			CC73GCH1H221J	CHIP C 220PF J	
C727			CC73HCH1H060B	CHIP C 6.0PF B	
C728			CC73HCH1H220J	CHIP C 22PF J	
C729			CC73HCH1H180J	CHIP C 18PF J	
C730			CK73HB1H102K	CHIP C 1000PF K	
C732			CK73HB1C103K	CHIP C 0.010UF K	
C733			CK73HB1E472K	CHIP C 4700PF K	
C734			CK73HB1H471K	CHIP C 470PF K	
C735			C92-0628-05	CHIP-TAN 10UF 10WV	
C737			CK73GB0J105K	CHIP C 1.0UF K	
C738			CK73HB1C103K	CHIP C 0.010UF K	
C739			CK73HB1H332K	CHIP C 3300PF K	
C740			CK73HB1A104K	CHIP C 0.10UF K	
C741			CK73HB1H471K	CHIP C 470PF K	
C742			CC73HCH1H101J	CHIP C 100PF J	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C743			C92-0628-05	CHIP-TAN	10UF	10WV	
C744,745			CK73HB1H471K	CHIP C	470PF	K	
C746			CK73GB0J105K	CHIP C	1.0UF	K	
C747			CK73HB1H471K	CHIP C	470PF	K	
C748		*	C92-0786-05	CHIP-TAN	100UF	6.3WV	
C749,750			CK73HB1H471K	CHIP C	470PF	K	
C751			CK73GB0J105K	CHIP C	1.0UF	K	
C752			CK73HB1H471K	CHIP C	470PF	K	
C753			CK73GB0J105K	CHIP C	1.0UF	K	
C754-758			CK73HB1H471K	CHIP C	470PF	K	
C759			CK73HB1A104K	CHIP C	0.10UF	K	
C760			CK73HB1H471K	CHIP C	470PF	K	
C761			CK73GB0J105K	CHIP C	1.0UF	K	
C762			CK73HB1A104K	CHIP C	0.10UF	K	
C763			CK73HB1H471K	CHIP C	470PF	K	
C764			CK73HB1C103K	CHIP C	0.010UF	K	
C765			CK73HB1H471K	CHIP C	470PF	K	
C766		*	C92-0786-05	CHIP-TAN	100UF	6.3WV	
C767			CK73HB1H471K	CHIP C	470PF	K	
C768			CK73HB1A104K	CHIP C	0.10UF	K	
C769			CK73HB1H471K	CHIP C	470PF	K	
C770			CC73HCH1H470J	CHIP C	47PF	J	
C771			CK73HB1A333K	CHIP C	0.033UF	K	
C772			C92-0656-05	CHIP-TAN	2.2UF	6.3WV	
C773			CC73HCH1H121J	CHIP C	120PF	J	
C774			CK73HB1C103K	CHIP C	0.010UF	K	
C775			CK73HB1H222K	CHIP C	2200PF	K	
C776			CK73HB1C123K	CHIP C	0.012UF	K	
C777			CK73HB1A473K	CHIP C	0.047UF	K	
C778			CK73HB1A104K	CHIP C	0.10UF	K	
C780			CK73HB1A104K	CHIP C	0.10UF	K	
C781			CK73GB0J105K	CHIP C	1.0UF	K	
C782			CK73HB1H332K	CHIP C	3300PF	K	
C783,784		*	C92-0786-05	CHIP-TAN	100UF	6.3WV	
C787			CK73GB0J105K	CHIP C	1.0UF	K	
C788			CK73HB1A104K	CHIP C	0.10UF	K	
C789			CK73HB1E682K	CHIP C	6800PF	K	
C791			CK73GB0J105K	CHIP C	1.0UF	K	
C792,793			CK73HB1A333K	CHIP C	0.033UF	K	
C794			CK73GB1A224K	CHIP C	0.22UF	K	
C795			CK73HB1A104K	CHIP C	0.10UF	K	
C796			CK73GB0J105K	CHIP C	1.0UF	K	
C797			CK73HB1C223K	CHIP C	0.022UF	K	
C798,799			CK73HB1H102K	CHIP C	1000PF	K	
C800-802			CK73HB1H471K	CHIP C	470PF	K	
C803			CK73HB1H102K	CHIP C	1000PF	K	
C804			CK73HB1H471K	CHIP C	470PF	K	
C805,806			CK73FB0J475K	CHIP C	4.7UF	K	
C807			CK73HB1H471K	CHIP C	470PF	K	
C808			CK73FB0J475K	CHIP C	4.7UF	K	
C809			CK73GB1A474K	CHIP C	0.47UF	K	
C810			CK73GB0J105K	CHIP C	1.0UF	K	
C811-819			CK73HB1A104K	CHIP C	0.10UF	K	
C820			C92-0628-05	CHIP-TAN	10UF	10WV	
C822			CK73HB1A473K	CHIP C	0.047UF	K	
C823,824			CK73FB0J475K	CHIP C	4.7UF	K	

Ref. No.	Adrress	New parts	Parts No.	Description			Destination
C825,826			CK73HB1H471K	CHIP C	470PF	K	
C827,828			CK73HB1C103K	CHIP C	0.010UF	K	
C829			CK73HB1H471K	CHIP C	470PF	K	
C831			CC73HCH1H470J	CHIP C	47PF	J	
C832,833			CK73HB1H471K	CHIP C	470PF	K	
C834			CK73HB1C103K	CHIP C	0.010UF	K	
C835			CK73HB1H471K	CHIP C	470PF	K	
C836			CK73GB0J105K	CHIP C	1.0UF	K	
C837,838			CK73HB1A104K	CHIP C	0.10UF	K	
C839			CK73GB0J105K	CHIP C	1.0UF	K	
C841-843			CK73HB1A104K	CHIP C	0.10UF	K	
C844,845			CK73FB0J475K	CHIP C	4.7UF	K	
C846			CC73HCH1H101J	CHIP C	100PF	J	
C847			CK73GB0J105K	CHIP C	1.0UF	K	
C848			C92-0628-05	CHIP-TAN	10UF	10WV	
C849			C92-0792-05	CHIP-TAN			
C852			CK73HB1A104K	CHIP C	0.10UF	K	
C853			C92-0656-05	CHIP-TAN	2.2UF	6.3WV	
C870			CK73HB1H471K	CHIP C	470PF	K	
C871			CK73GB0J105K	CHIP C	1.0UF	K	
C872			CK73HB1E682K	CHIP C	6800PF	K	
C873			CK73HB1C223K	CHIP C	0.022UF	K	
C874			CC73HCH1H680J	CHIP C	68PF	J	
C875			CK73HB1H221K	CHIP C	220PF	K	
C876			C92-0772-05	CHIP-TAN	10UF	6.3WV	
C878			CK73FB0J475K	CHIP C	4.7UF	K	
C879			CK73GB1A474K	CHIP C	0.47UF	K	
C880			C92-0772-05	CHIP-ELECTR	470UF	10WV	
C881			CK73GB1C104K	CHIP C	0.1UF	K	
C882			CK73HB1H471K	CHIP C	470PF	K	
C883			CK73HB1A104K	CHIP C	0.1UF	K	
C884			CK73HB1H102K	CHIP C	0.1UF	K	
C885			C92-0792-05	CHIP-TAN	330UF	25WV	
			E23-1059-04	TERMINAL			
CN7		*	E40-6171-05	PIN ASSY			
CN8		*	E40-6215-05	PIN ASSY			
CN9		*	E40-6216-05	PIN ASSY SOCKET			
CN713			E40-5972-05	FLAT CABLE CONNECTOR			
CN714			E40-5915-05	FLAT CABLE CONNECTOR			
CN715			E40-5929-05	PIN ASSY			
CN716		*	E40-6172-05	PIN ASSY SOCKET			
J1			E03-0190-05	DC JACK			
J701			E11-0457-05	PHONE JACK (2.5D/3.5D)			
54	-	*	F01-1019-14	RADIATION PLATE			
55	2B	*	F10-2423-04	SHIELDING PLATE			
56	-	*	F10-2426-04	SHIELDING COVER			
F1			F53-0190-05	FUSE			
F2			F53-0246-05	FUSE			
F3			F53-0245-05	FUSE			
CD1			L79-1474-05	TUNING COIL			
CF1		*	L72-0991-05	CERAMIC FILTER			
CF2			L72-0957-05	CERAMIC FILTER			
CF3		*	L72-0990-05	CERAMIC FILTER			
CF4		*	L72-0989-05	CERAMIC FILTER			
CF5			L72-0957-05	CERAMIC FILTER			

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
L1,2			L40-1091-86	SMALL FIXED INDUCTOR(1.0U)	
L3			L92-0149-05	FERRITE CHIP	
L5		*	L41-1278-14	SMALL FIXED INDUCTOR	
L6		*	L41-3978-14	SMALL FIXED INDUCTOR	
L7		*	L41-2778-14	SMALL FIXED INDUCTOR	
L8		*	L41-1878-14	SMALL FIXED INDUCTOR	
L9,10			L40-2291-37	SMALL FIXED INDUCTOR(2.200UH)	
L13			L40-1275-71	SMALL FIXED INDUCTOR(12NH)	
L18		*	L34-4659-05	COIL	
L19		*	L34-4660-05	COIL	
L21,22			L40-5681-86	SMALL FIXED INDUCTOR(0.56U)	
L23		*	L40-4788-76	SMALL FIXED INDUCTOR(0.47UH)	
L26			L40-6881-37	SMALL FIXED INDUCTOR(0.680UH)	
L27		*	L41-5678-14	SMALL FIXED INDUCTOR	
L28			L40-2291-37	SMALL FIXED INDUCTOR(2.200UH)	
L29		*	L41-2778-14	SMALL FIXED INDUCTOR	
L30		*	L41-5678-14	SMALL FIXED INDUCTOR	
L31			L40-2291-37	SMALL FIXED INDUCTOR(2.200UH)	
L32		*	L41-1578-14	SMALL FIXED INDUCTOR	
L34			L40-5668-71	SMALL FIXED INDUCTOR(5.6NH)	
L35			L40-2275-71	SMALL FIXED INDUCTOR(22NH)	
L36			L40-5681-86	SMALL FIXED INDUCTOR(0.56U)	
L38			L40-4781-86	SMALL FIXED INDUCTOR(0.47U)	
L42			L34-1230-05	AIR-CORE COIL	
L44			L40-1275-71	SMALL FIXED INDUCTOR(12NH)	
L45			L34-4577-05	AIR-CORE COIL	
L46			L34-4566-05	AIR-CORE COIL	
L48			L34-1230-05	AIR-CORE COIL	
L49			L40-3975-92	SMALL FIXED INDUCTOR	
L50			L40-4775-76	SMALL FIXED INDUCTOR	
L56			L34-4577-05	AIR-CORE COIL	K
L58			L34-4575-05	AIR-CORE COIL	T,E
L58			L34-4577-05	AIR-CORE COIL	K
L59			L40-1005-85	SMALL FIXED INDUCTOR(220U)	
L60			L34-4573-05	AIR-CORE COIL	K
L61			L40-1085-54	SMALL FIXED INDUCTOR(100NH)	
L63			L34-4572-05	AIR-CORE COIL	
L65			L34-4572-05	AIR-CORE COIL	
L67			L34-4572-05	AIR-CORE COIL	
L68,69		*	L34-4576-05	AIR-CORE COIL	
L75		*	L34-4576-05	AIR-CORE COIL	
L77			L34-4574-05	AIR-CORE COIL	
L78			L34-4572-05	AIR-CORE COIL	
L79		*	L34-4689-05	AIR-CORE COIL	
L80		*	L41-8268-14	SMALL FIXED INDUCTOR	
L81		*	L41-1278-14	SMALL FIXED INDUCTOR	
L89		*	L41-1575-01	SMALL FIXED INDUCTOR	T,E
L90		*	L41-1075-01	SMALL FIXED INDUCTOR	K
L90		*	L41-1875-01	SMALL FIXED INDUCTOR	T,E
L91		*	L41-2775-01	SMALL FIXED INDUCTOR	T,E
L91		*	L41-3975-01	SMALL FIXED INDUCTOR	K
L92			L79-1525-05	FILTER MODULE	T,E
L92			L79-1526-05	FILTER MODULE	K
L93		*	L41-2775-01	SMALL FIXED INDUCTOR	T,E
L93		*	L41-3975-01	SMALL FIXED INDUCTOR	K
L94,95		*	L41-1875-01	SMALL FIXED INDUCTOR	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
L96		*	L41-1575-01	SMALL FIXED INDUCTOR	T,E
L96		*	L41-2275-01	SMALL FIXED INDUCTOR	K
L97		*	L41-1085-03	SMALL FIXED INDUCTOR	T,E
L97		*	L41-8275-03	SMALL FIXED INDUCTOR	K
L98		*	L41-5675-03	SMALL FIXED INDUCTOR	
L99		*	L41-1575-01	SMALL FIXED INDUCTOR	
L101		*	L41-4775-03	SMALL FIXED INDUCTOR	
L102		*	L41-8278-14	SMALL FIXED INDUCTOR	
L104,105		*	L41-1085-14	SMALL FIXED INDUCTOR	
L106		*	L41-2775-03	SMALL FIXED INDUCTOR	
L108			L92-0161-05	BEADS CORE	
L109		*	L41-6875-03	SMALL FIXED INDUCTOR	
L110		*	L41-1085-03	SMALL FIXED INDUCTOR	
L111,112			L40-1885-92	SMALL FIXED INDUCTOR(180NH)	
L115		*	L41-1285-03	SMALL FIXED INDUCTOR	
L116,117		*	L41-1085-03	SMALL FIXED INDUCTOR	
L121		*	L40-3975-92	SMALL FIXED INDUCTOR	
L123		*	L40-3975-71	SMALL FIXED INDUCTOR(39NH)	
L124			L40-2285-54	SMALL FIXED INDUCTOR(220NH)	K
L125			L34-1230-05	AIR-CORE COIL	K
L126			L34-4573-05	AIR-CORE COIL	K
L128			L40-1098-76	SMALL FIXED INDUCTOR(1UH)	
L131		*	L41-8275-03	SMALL FIXED INDUCTOR	
L132		*	L41-1278-14	SMALL FIXED INDUCTOR	
L133		*	L34-4690-05	AIR-CORE COIL	
L134		*	L41-1885-03	SMALL FIXED INDUCTOR	
L138		*	L41-5675-01	SMALL FIXED INDUCTOR	
L141			L40-1275-71	SMALL FIXED INDUCTOR(12NH)	
L142			L40-6865-71	SMALL FIXED INDUCTOR(18NH)	
L146			L40-2285-54	SMALL FIXED INDUCTOR(220NH)	
L151-154			L92-0161-05	BEADS CORE	
L157		*	L34-4576-05	AIR-CORE COIL	K
L159			L40-1075-71	SMALL FIXED INDUCTOR(10NH)	K
L160			L40-1875-71	SMALL FIXED INDUCTOR(18NH)	
L161		*	L41-4775-03	SMALL FIXED INDUCTOR	
L162		*	L41-1085-03	SMALL FIXED INDUCTOR	
L163		*	L41-4775-03	SMALL FIXED INDUCTOR	
L164		*	L41-2775-03	SMALL FIXED INDUCTOR	
L165		*	L41-1875-03	SMALL FIXED INDUCTOR	
L167		*	L41-3378-14	SMALL FIXED INDUCTOR	
L168,169			L40-3391-86	SMALL FIXED INDUCTOR(3.3U)	
L172		*	L41-8275-03	SMALL FIXED INDUCTOR	
L173		*	L41-1285-03	SMALL FIXED INDUCTOR	
L176		*	L92-0163-05	BEADS CORE	
L177		*	L41-2761-01	SMALL FIXED INDUCTOR	
L179			L40-6881-37	SMALL FIXED INDUCTOR(0.680UH)	
L180			L40-4768-71	SMALL FIXED INDUCTOR(4.7NH)	
L181			L40-1875-71	SMALL FIXED INDUCTOR(18NH)	
L182			L40-2285-92	SMALL FIXED INDUCTOR(220NH)	
L183			L40-2781-37	SMALL FIXED INDUCTOR(0.270UH)	
L184			L40-3381-37	SMALL FIXED INDUCTOR(0.330UH)	
L185			L40-1075-71	SMALL FIXED INDUCTOR(10NH)	
L186			L40-1091-37	SMALL FIXED INDUCTOR(1.000UH)	
L187			L40-4768-71	SMALL FIXED INDUCTOR(4.7NH)	
L188		*	L41-1875-03	SMALL FIXED INDUCTOR	K
L190			L40-2775-71	SMALL FIXED INDUCTOR(27NH)	K

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
L191			L40-1091-37	SMALL FIXED INDUCTOR(1.000UH)	
L192			L40-2285-54	SMALL FIXED INDUCTOR(220NH)	
L193			L40-1068-71	SMALL FIXED INDUCTOR(1.0NH)	
L194		*	L40-4775-71	SMALL FIXED INDUCTOR(47NH)	
L195			L40-1895-85	SMALL FIXED INDUCTOR(220NH)	
L196			L40-8275-57	SMALL FIXED INDUCTOR	
L197			L40-3375-71	SMALL FIXED INDUCTOR	
L198			L92-0161-05	BEADS CORE	
L199			L40-1091-86	SMALL FIXED INDUCTOR	
L200			L92-0161-05	BEADS CORE	
L203			L92-0138-05	FERRITE CHIP	
L702			L92-0131-05	FERRITE CHIP	
L703			L92-0140-05	FERRITE CHIP	
L704,705		*	L92-0163-05	BEADS CORE	
L706			L40-3301-37	SMALL FIXED INDUCTOR	
L707,708			L92-0163-05	BEADS CORE	
X1		*	L77-1859-05	TCXO (19.8MHZ)	
X2		*	L78-0496-05	RESONATOR (453KHZ)	
X3		*	L77-1856-05	CRYSTAL RESONATOR(19.05MHZ)	
X701			L78-0462-05	RESONATOR (9.8304M)	
XF1		*	L71-0597-05	MCF (57.6MHZ)	
XF2		*	L71-0589-05	MCF (59.85MHZ)	
CP2		*	RK75HA1J392J	CHIP-COM 3.9K J 1/16W	
CP7		*	RK75HA1J103J	CHIP-COM 10K J 1/16W	
CP9		*	RK75HA1J392J	CHIP-COM 3.9K J 1/16W	
CP12		*	RK75HA1J392J	CHIP-COM 3.9K J 1/16W	
CP13		*	RK75HA1J473J	CHIP-COM 47K J 1/16W	
CP21		*	RK75HA1J473J	CHIP-COM 47K J 1/16W	
CP22		*	RK75HA1J392J	CHIP-COM 3.9K J 1/16W	
CP701-712			R90-0741-05	MULTIPLE RESISTOR	
CP713		*	RK75HA1J392J	CHIP-COM 3.9K J 1/16W	
R1			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R2			R92-1255-05	CHIP R 15 1/2W	
R4			RK73HB1J101J	CHIP R 100 J 1/16W	
R5			RK73FB2A122J	CHIP R 1.2K J 1/10W	
R6			RK73HB1J104J	CHIP R 100K J 1/16W	
R7			RK73HB1J393J	CHIP R 39K J 1/16W	
R8			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R9			RK73HB1J124J	CHIP R 120K J 1/16W	
R10			RK73HB1J474J	CHIP R 470K J 1/16W	
R11			RK73HB1J180J	CHIP R 18 J 1/16W	
R12			RK73HB1J122J	CHIP R 1.2K J 1/16W	
R13			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R14			R92-1368-05	CHIP R 0 OHM	
R15			RK73HB1J151J	CHIP R 150 J 1/16W	
R16			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R17			RK73HB1J473J	CHIP R 47K J 1/16W	
R18			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R19			R92-2559-05	CHIP R 12 1/2W	
R20			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R21			RK73HB1J104J	CHIP R 100K J 1/16W	
R22			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R23			RK73HB1J223J	CHIP R 22K J 1/16W	
R24			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R26,27			RK73HB1J102J	CHIP R 1.0K J 1/16W	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R28			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R29			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R30,31			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R32			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R33			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R34,35			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R37			RK73HB1J223J	CHIP R 22K J 1/16W	
R39			RK73HB1J221J	CHIP R 220 J 1/16W	
R40			RK73HB1J101J	CHIP R 100 J 1/16W	
R41,42			RK73HB1J121J	CHIP R 120 J 1/16W	
R43			RK73HB1J470J	CHIP R 47 J 1/16W	
R44			RK73HB1J121J	CHIP R 120 J 1/16W	
R45			RK73HB1J223J	CHIP R 22K J 1/16W	
R46			RK73HB1J221J	CHIP R 220 J 1/16W	
R48			RK73HB1J474J	CHIP R 470K J 1/16W	
R51			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R55			RK73HB1J103J	CHIP R 10K J 1/16W	
R56,57			RK73HB1J104J	CHIP R 100K J 1/16W	
R58			RK73HB1J470J	CHIP R 47 J 1/16W	
R59			RK73HB1J471J	CHIP R 470 J 1/16W	
R60			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R61,62			RK73HB1J104J	CHIP R 100K J 1/16W	
R64			RK73HB1J470J	CHIP R 47 J 1/16W	
R67			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R68			RK73HB1J474J	CHIP R 470K J 1/16W	
R69			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R70			RK73HB1J474J	CHIP R 470K J 1/16W	
R71			RK73HB1J470J	CHIP R 47 J 1/16W	
R72			RK73HB1J474J	CHIP R 470K J 1/16W	
R73			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R74			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R75			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R76			RK73HB1J822J	CHIP R 8.2K	
R77			RK73HB1J223J	CHIP R 22K J 1/16W	
R79			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R80			RK73HB1J271J	CHIP R 270 J 1/16W	
R81			RK73HB1J154J	CHIP R 150K J 1/16W	
R82			RK73HB1J471J	CHIP R 470 J 1/16W	
R86			RK73HB1J223J	CHIP R 22K J 1/16W	
R87			RK73HB1J183J	CHIP R 18K J 1/16W	
R88			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R89			RK73HB1J683J	CHIP R 68K J 1/16W	
R90			RK73HB1J331J	CHIP R 330 J 1/16W	
R92			RK73HB1J153J	CHIP R 15K J 1/16W	
R93			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R94			RK73HB1J474J	CHIP R 470K J 1/16W	
R95			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R96			RK73HB1J104J	CHIP R 100K J 1/16W	
R97,98			RK73HB1J153J	CHIP R 15K J 1/16W	
R102			RK73HB1J101J	CHIP R 100 J 1/16W	
R103			RK73HB1J224J	CHIP R 220K J 1/16W	
R105			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R106			RK73HB1J470J	CHIP R 47 J 1/16W	
R107			RK73HB1J101J	CHIP R 100 J 1/16W	
R109			RK73HB1J561J	CHIP R 560 J 1/16W	
R110			RK73HB1J472J	CHIP R 4.7K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R112			RK73HB1J473J	CHIP R 47K J 1/16W	
R113			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R114			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R115			RK73HB1J104J	CHIP R 100K J 1/16W	
R116			RK73HB1J471J	CHIP R 470 J 1/16W	
R119			RK73HB1J331J	CHIP R 330 J 1/16W	
R122			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R124			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R125			RK73HB1J224J	CHIP R 220K J 1/16W	
R126			RK73HB1J331J	CHIP R 330 J 1/16W	
R128			RK73HB1J104J	CHIP R 100K J 1/16W	
R129			RK73HB1J470J	CHIP R 47 J 1/16W	
R130			RK73HB1J101J	CHIP R 100 J 1/16W	
R131			RK73HB1J123J	CHIP R 12K J 1/16W	
R134,135			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R136,137			RK73HB1J333J	CHIP R 33K J 1/16W	
R138			RK73HB1J681J	CHIP R 680 J 1/16W	
R139			RK73HB1J151J	CHIP R 150 J 1/16W	
R140			RK73HB1J121J	CHIP R 120 J 1/16W	
R141			R92-1368-05	CHIP R 0 OHM	
R142			RK73HB1J103J	CHIP R 10K J 1/16W	
R143			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R144			RK73HB1J124J	CHIP R 120K J 1/16W	
R145			RK73HB1J180J	CHIP R 18 J 1/16W	
R146			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R147-149			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R151			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R152			RK73HB1J104J	CHIP R 100K J 1/16W	
R153			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R154			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R156			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R157			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R158			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R159			RK73HB1J271J	CHIP R 270 J 1/16W	
R160			RK73HB1J121J	CHIP R 120 J 1/16W	
R162			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R163			RK73HB1J101J	CHIP R 100 J 1/16W	
R164			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R165			R92-1368-05	CHIP R 0 OHM	
R166			RK73HB1J563J	CHIP R 56K J 1/16W	
R167			RK73HB1J101J	CHIP R 100 J 1/16W	
R168			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R170			RK73HB1J473J	CHIP R 47K J 1/16W	
R172			RK73HB1J100J	CHIP R 10 J 1/16W	
R177			RK73HB1J183J	CHIP R 18K J 1/16W	
R178			RK73HB1J221J	CHIP R 220 J 1/16W	
R179			RK73HB1J101J	CHIP R 100 J 1/16W	
R181			RK73HB1J223J	CHIP R 22K J 1/16W	
R182			RK73HB1J221J	CHIP R 220 J 1/16W	
R183			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R184			RK73HB1J561J	CHIP R 560 J 1/16W	
R185			RK73HB1J273J	CHIP R 27K J 1/16W	
R186			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R188			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R189			R92-1368-05	CHIP R 0 OHM	
R190			RK73HB1J474J	CHIP R 470K J 1/16W	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R191,192			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R193			RK73HB1J101J	CHIP R 100 J 1/16W	
R194			RK73HB1J334J	CHIP R 330K J 1/16W	
R195			RK73HB1J181J	CHIP R 180 J 1/16W	
R196			RK73HB1J334J	CHIP R 330K J 1/16W	
R197			RK73HB1J470J	CHIP R 47 J 1/16W	
R198			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R199			RK73HB1J181J	CHIP R 180 J 1/16W	
R200			RK73HB1J184J	CHIP R 180K J 1/16W	
R201			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R202			RK73HB1J224J	CHIP R 220K J 1/16W	
R203			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R204		*	R92-3512-05	CARBON RESISTOR0.1 1/2W	
R206		*	R92-3512-05	CARBON RESISTOR0.1 1/2W	
R207			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R208			RK73HB1J473J	CHIP R 47K J 1/16W	
R209			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R210			RK73HB1J473J	CHIP R 47K J 1/16W	
R211			RK73HB1J104J	CHIP R 100K J 1/16W	
R212			RK73HB1J273J	CHIP R 27K J 1/16W	
R213			RK73HB1J101J	CHIP R 100 J 1/16W	
R214			RK73HB1J474J	CHIP R 470K J 1/16W	
R220			RK73HB1J224J	CHIP R 220K J 1/16W	
R221			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R222			RK73HB1J100J	CHIP R 10 J 1/16W	
R224			RK73HB1J470J	CHIP R 47 J 1/16W	
R225			RK73HB1J223J	CHIP R 22K J 1/16W	
R226			RK73HB1J473J	CHIP R 47K J 1/16W	
R227			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R228			RK73HB1J470J	CHIP R 47 J 1/16W	
R229			RK73HB1J473J	CHIP R 47K J 1/16W	
R232			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R233			RK73HB1J101J	CHIP R 100 J 1/16W	K
R234			RK73HB1J473J	CHIP R 47K J 1/16W	
R236			RK73HB1J680J	CHIP R 68 J 1/16W	
R237			RK73HB1J390J	CHIP R 39 J 1/16W	
R239,240			RK73HB1J560J	CHIP R 56 J 1/16W	
R242			RK73HB1J560J	CHIP R 56 J 1/16W	
R243,244			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R245			RK73HB1J473J	CHIP R 47K J 1/16W	
R246			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R248			RK73HB1J471J	CHIP R 470 J 1/16W	
R249			RK73HB1J100J	CHIP R 10 J 1/16W	
R251			RK73HB1J154J	CHIP R 150K J 1/16W	
R252-256			RK73HB1J104J	CHIP R 100K J 1/16W	
R257			RK73HB1J392J	CHIP R 3.9K J 1/16W	
R264			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R267			RK73HB1J470J	CHIP R 47 J 1/16W	
R269			RK73HB1J104J	CHIP R 100K J 1/16W	
R270			R92-1368-05	CHIP R 0 OHM	
R271			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R272			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R273			RK73HB1J101J	CHIP R 100 J 1/16W	
R274			RK73HB1J470J	CHIP R 47 J 1/16W	
R275			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R278			RK73HB1J104J	CHIP R 100K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R279			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R280			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R281			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R282			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R284			RK73HB1J100J	CHIP R 10 J 1/16W	
R285			RK73HB1J103J	CHIP R 10K J 1/16W	
R286			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R287			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R288			R92-1368-05	CHIP R 0 OHM	
R291			R92-1368-05	CHIP R 0 OHM	
R292			RK73HB1J470J	CHIP R 47 J 1/16W	
R293			RK73HB1J104J	CHIP R 100K J 1/16W	
R294			RK73HB1J104J	CHIP R 100K J 1/16W	
R297			RK73HB1J223J	CHIP R 22K J 1/16W	
R298			RK73HB1J273J	CHIP R 27K J 1/16W	
R299			R92-1368-05	CHIP R 0 OHM	
R300-303			RK73HB1J392J	CHIP R 3.9K J 1/16W	
R304			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R305,306			RK73HB1J101J	CHIP R 100 J 1/16W	
R307,308			RK73HB1J473J	CHIP R 47K J 1/16W	
R309			RK73HB1J392J	CHIP R 3.9K J 1/16W	
R310-312			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R313,314			RK73HB1J101J	CHIP R 100 J 1/16W	
R315			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R317			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R318,319			RK73HB1J473J	CHIP R 47K J 1/16W	
R320			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R321			RK73HB1J474J	CHIP R 470K J 1/16W	
R322			RK73HB1J100J	CHIP R 10 J 1/16W	
R324			RK73HB1J103J	CHIP R 10K J 1/16W	
R326			RK73HB1J221J	CHIP R 220 J 1/16W	
R327			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R329			RK73HB1J220J	CHIP R 22 J 1/16W	
R331			RK73HB1J101J	CHIP R 100 J 1/16W	
R332			RK73HB1J223J	CHIP R 22K J 1/16W	
R333			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R334			RK73HB1J101J	CHIP R 100 J 1/16W	
R336			RK73HB1J470J	CHIP R 47 J 1/16W	
R337			RK73HB1J104J	CHIP R 100K J 1/16W	
R339			RK73HB1J104J	CHIP R 100K J 1/16W	
R340			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R341			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R343			RK73HB1J470J	CHIP R 470 J 1/16W	
R347-350			RK73HB1J473J	CHIP R 47K J 1/16W	
R351			RK73HB1J103J	CHIP R 10K J 1/16W	
R352			RK73HB1J473J	CHIP R 47K J 1/16W	
R353			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R354			RK73HB1J104J	CHIP R 100K J 1/16W	
R356			RK73HB1J104J	CHIP R 100K J 1/16W	
R357			RK73HB1J223J	CHIP R 22K J 1/16W	
R359			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R360			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R361			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R365			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R366			R92-1368-05	CHIP R 0 OHM	
R373,374			R92-1368-05	CHIP R 0 OHM	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R375			RK73HB1J473J	CHIP R 47K J 1/16W	
R376,377			RK73HB1J103J	CHIP R 10K J 1/16W	
R378			RK73HB1J333J	CHIP R 33K J 1/16W	
R379			RK73HB1J103J	CHIP R 10K J 1/16W	
R381			RK73HB1J470J	CHIP R 47 J 1/16W	
R382			RK73HB1J103J	CHIP R 10K J 1/16W	
R384			RK73HB1J103J	CHIP R 10K J 1/16W	
R387			R92-1368-05	CHIP R 0 OHM	
R390			RK73HB1J153J	CHIP R 15K J 1/16W	
R391			R92-1368-05	CHIP R 0 OHM	
R392			RK73HB1J123J	CHIP R 12K J 1/16W	
R394			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R396			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R397			RK73HB1J151J	CHIP R 150 J 1/16W	
R398			RK73HB1J103J	CHIP R 10K J 1/16W	
R399			RK73HB1J101J	CHIP R 100 J 1/16W	
R400			R92-1368-05	CHIP R 0 OHM	
R401			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R402			RK73HB1J333J	CHIP R 33K J 1/16W	
R403			RK73HB1J151J	CHIP R 150 J 1/16W	
R404			RK73HB1J103J	CHIP R 10K J 1/16W	
R406			R92-1252-05	CHIP R 0 OHM	T,E
R407			RK73HB1J102J	CHIP R 1K J 1/16W	
R408			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R409			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R410			R92-1368-05	CHIP R 0 OHM	
R411			RK73HB1J104J	CHIP R 100K J 1/16W	
R412,413			RK73HB1J181J	CHIP R 180 J 1/16W	K
R414			RK73HB1J684J	CHIP R 680K J 1/16W	
R415			RK73HB1J102J	CHIP R 1.0K J	
R416			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R417			RK73HB1J104J	CHIP R 100K J 1/16W	
R418			RK73HB1J103J	CHIP R 10K J 1/16W	
R420,421			RK73HB1J474J	CHIP R 470K J 1/16W	
R422,423			RK73HB1J103J	CHIP R 10K J 1/16W	
R425			R92-1252-05	CHIP R 0 OHM	
R426			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R427			R92-1368-05	CHIP R 0 OHM	
R701			R92-1252-05	CHIP R 0 OHM	
R702			RK73HB1J824J	CHIP R 820K J 1/16W	
R703			RK73HB1J224J	CHIP R 220K J 1/16W	
R704			RK73HB1J561J	CHIP R 560 J 1/16W	
R705			RK73HB1J101J	CHIP R 100 J 1/16W	
R706,707			RK73HB1J473J	CHIP R 47K J 1/16W	
R708			RK73HB1J393J	CHIP R 39K J 1/16W	
R709			RK73HB1J273J	CHIP R 27K J 1/16W	
R710			RK73HB1J103J	CHIP R 10K J 1/16W	
R711			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R712			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R713			RK73HB1J391J	CHIP R 390 J 1/16W	
R714			RK73HB1J474J	CHIP R 470K J 1/16W	
R715			RK73HB1J103J	CHIP R 10K J 1/16W	
R716			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R717			RK73HB1J103J	CHIP R 10K J 1/16W	
R718,719			RK73HB1J104J	CHIP R 100K J 1/16W	
R720			RK73HB1J824J	CHIP R 820K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R721			RK73HB1J183J	CHIP R 18K J 1/16W	
R722			R92-1368-05	CHIP R 0 OHM	
R723			RK73HB1J824J	CHIP R 820K J 1/16W	
R724			RK73HB1J823J	CHIP R 82K J 1/16W	
R725			RK73HB1J103J	CHIP R 10K J 1/16W	
R726			RK73HB1J100J	CHIP R 10 J 1/16W	
R728,729			RK73HB1J103J	CHIP R 10K J 1/16W	
R730			RK73HB1J471J	CHIP R 470 J 1/16W	
R731			RK73HB1J104J	CHIP R 100K J 1/16W	
R732			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R733			RK73HB1J101J	CHIP R 100 J 1/16W	
R734			RK73HB1J121J	CHIP R 120 J 1/16W	
R735			RK73HB1J151J	CHIP R 150 J 1/16W	
R736			RK73HB1J121J	CHIP R 120 J 1/16W	
R737			RK73HB1J151J	CHIP R 150 J 1/16W	
R738			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R739			RK73HB1J104J	CHIP R 100K J 1/16W	
R740			RK73GB1J473J	CHIP R 47K J 1/16W	
R741			RK73HB1J104J	CHIP R 100K J 1/16W	
R742			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R743			R92-1368-05	CHIP R 0 OHM	
R744			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R745			R92-1368-05	CHIP R 0 OHM	
R746			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R747			RK73HB1J564J	CHIP R 560K J 1/16W	
R749			RK73HB1J103J	CHIP R 10K J 1/16W	
R750			RK73HB1J103J	CHIP R 10K J 1/16W	
R751			RK73HB1J103J	CHIP R 10K J 1/16W	
R752			RK73HB1J223J	CHIP R 22K J 1/16W	
R753			R92-1252-05	CHIP R 0 OHM	
R754			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R755,756			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R757			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R758			RK73GB1J221J	CHIP R 220 J 1/16W	
R759			RK73HB1J101J	CHIP R 100 J 1/16W	
R760			RK73GB1J560J	CHIP R 56 J 1/16W	
R761			RK73HB1J100J	CHIP R 10 J 1/16W	
R763			RK73HB1J563J	CHIP R 56K J 1/16W	
R764			RK73HB1J184J	CHIP R 180K J 1/16W	
R765			RK73HB1J821J	CHIP R 820 J 1/16W	
R766			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R767			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R768			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R769			RK73HB1J224J	CHIP R 220K J 1/16W	
R770			RK73HB1J221J	CHIP R 220 J 1/16W	
R771			RK73HB1J471J	CHIP R 470 J 1/16W	
R772			RK73HB1J561J	CHIP R 560 J 1/16W	
R773			RK73HB1J473J	CHIP R 47K J 1/16W	
R774			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R775			RK73HB1J474J	CHIP R 470K J 1/16W	
R776			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R777			RK73HB1J334J	CHIP R 330K J 1/16W	
R778			R92-1368-05	CHIP R 0 OHM	
R779,780			RK73HB1J153J	CHIP R 15K J 1/16W	
R781			RK73HB1J334J	CHIP R 330K J 1/16W	
R782			RK73HB1J104J	CHIP R 100K J 1/16W	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R783			R92-1368-05	CHIP R 0 OHM	
R784,785			RK73HB1J184J	CHIP R 180K J 1/16W	
R786			RK73HB1J473J	CHIP R 47K J 1/16W	
R787,788			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R789			RK73HB1J103J	CHIP R 10K J 1/16W	
R790			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R793,794			R92-1368-05	CHIP R 0 OHM	
R796			R92-1368-05	CHIP R 0 OHM	
R797			RK73HB1J101J	CHIP R 100 J 1/16W	
R798			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R799			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R800			RK73HB1J104J	CHIP R 100K J 1/16W	
R801			RK73HB1J103J	CHIP R 10K J 1/16W	
R802			R92-1368-05	CHIP R 0 OHM	
R803			RK73HB1J154J	CHIP R 150K J 1/16W	
R804,805			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R806			RK73HB1J154J	CHIP R 150K J 1/16W	
R807			RK73HB1J273J	CHIP R 27K J 1/16W	
R808			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R809			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R810			RK73HB1J681J	CHIP R 680 J 1/16W	
R811			RK73HB1J470J	CHIP R 47 J 1/16W	
R812			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R813			RK73HB1J104J	CHIP R 100K J 1/16W	
R814,815			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R816,817			RK73HB1J103J	CHIP R 10K J 1/16W	
R818			RK73HB1J101J	CHIP R 100 J 1/16W	
R819			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R820			RK73HB1J123J	CHIP R 12K J 1/16W	
R821			RK73HB1J101J	CHIP R 100 J 1/16W	
R824			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R825			RK73HB1J223J	CHIP R 22K J 1/16W	
R826			RK73HB1J104J	CHIP R 100K J 1/16W	
R827,828			RK73HB1J823J	CHIP R 82K J 1/16W	
R829			RK73HB1J104J	CHIP R 100K J 1/16W	
R830			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R831			RK73HB1J103J	CHIP R 10K J 1/16W	
R832,833			R92-1368-05	CHIP R 0 OHM	
R834			RK73HB1J473J	CHIP R 47K J 1/16W	
R835			RK73HB1J100J	CHIP R 10 J 1/16W	
R837			RK73HB1J104J	CHIP R 100K J 1/16W	
R839,840			RK73HB1J104J	CHIP R 100K J 1/16W	
R841			RK73HB1J273J	CHIP R 27K J 1/16W	
R842			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R843			RK73HB1J104J	CHIP R 100K J 1/16W	
R844,845			RK73HB1J392J	CHIP R 3.9K J 1/16W	
R846			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R848			RK73HB1J824J	CHIP R 820K J 1/16W	
R849			R92-1368-05	CHIP R 0 OHM	
R852			R92-1368-05	CHIP R 0 OHM	
R853			RK73HB1J224J	CHIP R 220K J 1/16W	
R854			RK73HB1J104J	CHIP R 100K J 1/16W	
R855			RK73HB1J334J	CHIP R 330K J 1/16W	
R856			RK73HB1J104J	CHIP R 100K J 1/16W	
R857			RK73HB1J334J	CHIP R 330K J 1/16W	
R858,859			RK73HB1J152J	CHIP R 1.5K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
R860,861			RK73HB1J103J	CHIP R 10K J 1/16W	
R862			RK73HB1J184J	CHIP R 180K J 1/16W	
R863			RK73HB1J103J	CHIP R 10K J 1/16W	
R864			RK73HB1J333J	CHIP R 33K J 1/16W	
R865			R92-1368-05	CHIP R 0 OHM	
R866			R92-1252-05	CHIP R 0 OHM	
R867			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R868			RK73HB1J820J	CHIP R 82 J 1/16W	
R869			RK73HB1J823J	CHIP R 82K J 1/16W	
R870			RK73HB1J822J	CHIP R 8.2K J 1/16W	
R871			RK73HB1J474J	CHIP R 470K J 1/16W	
R872			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R875			R92-1368-05	CHIP R 0 OHM	
R876			RK73HB1J223J	CHIP R 22K J 1/16W	
R877			R92-1368-05	CHIP R 0 OHM	
R878			RK73HB1J101J	CHIP R 100 J 1/16W	
R879			RK73HB1J104J	CHIP R 100K J 1/16W	
R880			RK73HB1J101J	CHIP R 100 J 1/16W	
VR701			R12-7494-05	TRIMMING POT.(220K)	
S701-703		*	S70-0483-05	TACT SWITCH	
S704			S70-0477-05	TACT SWITCH	
MIC701			T91-0580-05	MIC ELEMENT	
D1		*	HZU2ALL	ZENER DIODE	
D2			RB051L-40	DIODE	
D4		*	HZU2ALL	ZENER DIODE	
D5			1SS361	DIODE	
D6			RB051L-40	DIODE	
D7			DA221	DIODE	
D8,9			MA2S111	DIODE	
D10-12			HVC375B	VARIABLE CAPACITANCE DIODE	
D16			HVC375B	VARIABLE CAPACITANCE DIODE	
D18			HVC131	DIODE	
D20		*	KV1566J	VARIABLE CAPACITANCE DIODE	
D21			HVC131	DIODE	
D24		*	KV1566J	VARIABLE CAPACITANCE DIODE	
D25			DAN235E	DIODE	
D28			HVC375B	VARIABLE CAPACITANCE DIODE	
D29		*	HVC376B	VARIABLE CAPACITANCE DIODE	
D32		*	HVU187	DIODE	
D33			MA2S111	DIODE	
D34			MA2S304	VARIABLE CAPACITANCE DIODE	
D35		*	1SV305	VARIABLE CAPACITANCE DIODE	
D36			MA2S304	VARIABLE CAPACITANCE DIODE	
D37		*	1SV305	VARIABLE CAPACITANCE DIODE	
D38			MA2S111	DIODE	
D40			HVC131	DIODE	
D41			1SS360	DIODE	
D44			MA2S728	DIODE	
D45			015AZ3.9	ZENER DIODE	
D49			HVC131	DIODE	
D51			HVC131	DIODE	
D52			XB15A709	DIODE	
D53			HVU131	DIODE	
D54			HVC131	DIODE	
D57			HSC277	DIODE	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
D58			1SS388	DIODE	
D59			RB717F	DIODE	
D60		*	KV1566J	VARIABLE CAPACITANCE DIODE	
D62			HVU131	DIODE	
D63			1SS385	DIODE	
D65			HSC277	DIODE	
D67,68			HSC277	DIODE	
D69			RB717F	DIODE	
D70			HVU131	DIODE	
D71			HSC277	DIODE	
D72		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D73			HVU131	DIODE	
D74			HSC277	DIODE	
D75-77		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D78			HSC277	DIODE	
D80			HSC277	DIODE	
D81		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D82		*	MA2S111	DIODE	
D83		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D85			XB15A709	DIODE	K
D87-90		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D91			HSC277	DIODE	
D93,94			HSC277	DIODE	
D95-97		*	KV1811K	VARIABLE CAPACITANCE DIODE	
D99-103			HSC277	DIODE	
D104			MA2S111	DIODE	
D106			HVC375B	VARIABLE CAPACITANCE DIODE	
D107-110			HVC131	DIODE	
D112,113			HVC131	DIODE	
D114			HVU131	DIODE	
D115,116			HSC277	DIODE	
D117,118			MA2S111	DIODE	
D119,120			HVC131	DIODE	K
D121			MA2S111	DIODE	
D122			02DZ15(X,Y)	ZENER DIODE	
D123			MAZS0360H	ZENER DIODE	
D124,125			HSC277	DIODE	
D126			02DZ15(X,Y)	ZENER DIODE	
D702-704			MA2S111	DIODE	K
D702			MA2S111	DIODE	T,E
D704			MA2S111	DIODE	T,E
D705			RB706F-40	DIODE	
D706			MA2S111	DIODE	
D707,708			DA227	DIODE	
D709			RB706F-40	DIODE	
D710,711			DA221	DIODE	
D718			DAN222	DIODE	
D719			MA2S111	DIODE	
D726		*	MAZS0360H	ZENER DIODE	
D727			1SS388	DIODE	
D730,731			1SS388	DIODE	
D732			MA2S111	DIODE	
IC1		*	LM3420-8.4	MOS IC	
IC2		*	LMX2326TMX	MOS IC	
IC3			UPB1509GV	BI-POLAR IC	
IC4			TA4101F	IC	

PARTS LIST

TX-RX UNIT (X57-6360-00)

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
IC5		*	TK10931V	ANALOG IC	
IC6		*	LMX2326TMX	MOS IC	
IC7			TA31136FN	MOS IC	
IC8,9			LMC7101BIM5	MOS IC	
IC10		*	UPC2746TB	BI-POLAR IC	
IC11			BU2099FV	MOS IC	
IC701			TA75W558FU	MOS IC	
IC702			NJM2107F	MOS IC	
IC703			TC7S66FU	MOS IC	
IC704			AT25128N10SI27	ROM IC	
IC705		*	78F4216AJYUBK	MPU	K
IC705		*	78F4216AJYVBK	MPU	T,E
IC706			M62364FP	MOS IC	
IC707			TA7368F	MOS IC	
IC708		*	XC6202P402PR	MOS IC	
IC709			PST9130NR	MOS IC	
IC710			RN5VL35A	MOS IC	
IC711			TA75W01FU	MOS IC	
IC712			TC4W53FU	MOS IC	
IC713		*	LM2681	MOS IC	
IC714			TA75W01FU	MOS IC	
IC715		*	TK11930M	MOS IC	
IC717			TC75S51F	MOS IC	
IC718			LMC7101BIM5	MOS IC	
IC719,720			NJM2107F	MOS IC	
Q1			2SD1760	TRANSISTOR	
Q2			DTC123JE	DIGITAL TRANSISTOR	
Q3			DTA143ZE	DIGITAL TRANSISTOR	
Q4			HN1K02FU	FET	
Q5			2SK1830	FET	
Q6			2SK1824	FET	
Q7			2SC4617(S)	TRANSISTOR	
Q8			2SK1830	FET	
Q9		*	MT6C03AE	TRANSISTOR	
Q10			UPA573T	FET	
Q11-13			2SC5009	TRANSISTOR	
Q14			SSM3J05FU	FET	
Q15			UPA573T	FET	
Q17			2SJ243	FET	
Q19			2SC5108(Y)	TRANSISTOR	
Q21			2SC5009	TRANSISTOR	
Q22			UPA672T	FET	
Q23			UMX2N	TRANSISTOR	
Q24		*	2SC4915	TRANSISTOR	
Q25			2SC4617(R)	TRANSISTOR	
Q26,27		*	2SC4915	TRANSISTOR	
Q28		*	MT6C03AE	TRANSISTOR	
Q29			UPA672T	FET	
Q30			2SJ347	FET	
Q31			2SC4617(S)	TRANSISTOR	
Q32			2SK1830	FET	
Q34		*	MT6C03AE	TRANSISTOR	
Q35		*	HN1J02FU	FET	
Q37			2SC5108(Y)	TRANSISTOR	
Q40,41			2SC5009	TRANSISTOR	
Q43			2SC5108(Y)	TRANSISTOR	
Q44		*	2SC4915	TRANSISTOR	
Q45		*	MT6C04AE	TRANSISTOR	
Q46			3SK320	FET	

Ref. No.	Adrress	New parts	Parts No.	Description	Destination
Q47			DTA114YE	DIGITAL TRANSISTOR	
Q48			2SK1824	FET	
Q49			2SK1830	FET	
Q50			2SC4617(R)	TRANSISTOR	
Q51			2SK1830	FET	
Q52			2SK1824	FET	
Q53		*	UMA6N	TRANSISTOR	
Q54		*	2SK2973	FET	
Q55			2SK3476	FET	
Q56		*	2SK2973	FET	
Q57			2SK3476	FET	K
Q58			2SC4617(R)	TRANSISTOR	
Q59			3SK320	FET	
Q62-64			3SK320	FET	
Q65			2SK3019	FET	
Q66			2SJ243	FET	
Q68		*	RN47A5	TRANSISTOR	
Q69			DTC144EE	DIGITAL TRANSISTOR	
Q70			2SJ243	FET	
Q71			2SC4226(R24)	TRANSISTOR	
Q72			2SC5192	TRANSISTOR	
Q73			2SC4617(R)	TRANSISTOR	
Q74			2SK1824	FET	
Q76		*	2SC4725	TRANSISTOR	
Q92			DTA143ZE	DIGITAL TRANSISTOR	
Q93		*	MT6C03AE	TRANSISTOR	
Q94			DTC144EE	DIGITAL TRANSISTOR	
Q95,96			2SK1830	FET	
Q97			2SC5009	TRANSISTOR	
Q98			2SK1830	FET	
Q99			UMA6N	TRANSISTOR	K
Q100			2SJ347	FET	
Q701			2SC4617(R)	TRANSISTOR	
Q702			2SJ347	FET	
Q703			2SC4081	TRANSISTOR	
Q704			2SJ347	FET	
Q705			2SK1830	FET	
Q706			2SK1588	FET	
Q707			2SJ347	FET	
Q708			2SK1830	FET	
Q709			2SC4617(R)	TRANSISTOR	
Q710			2SB1184(Q,R)	TRANSISTOR	
Q712			DTB113ZK	DIGITAL TRANSISTOR	
Q713			UMA10N	TRANSISTOR	
Q714		*	RN47A5	TRANSISTOR	
Q715			UMA10N	TRANSISTOR	
Q716			DTA143ZE	DIGITAL TRANSISTOR	
Q719,720			2SC4617(R)	TRANSISTOR	
Q721			2SJ347	FET	
Q722			2SK1830	FET	
Q723			DTC114EE	DIGITAL TRANSISTOR	
Q725			2SB1184(Q,R)	TRANSISTOR	
Q726			2SC4919	TRANSISTOR	
Q727		*	RN47A5	TRANSISTOR	
Q728			UMX2N	TRANSISTOR	
Q729			2SK1830	FET	
TH1		*	ERTJ0EV104H	THERMISTOR	
TH2			157-471-65001	THERMISTOR	
TH701			157-503-65001	THERMISTOR	