
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 PACKING

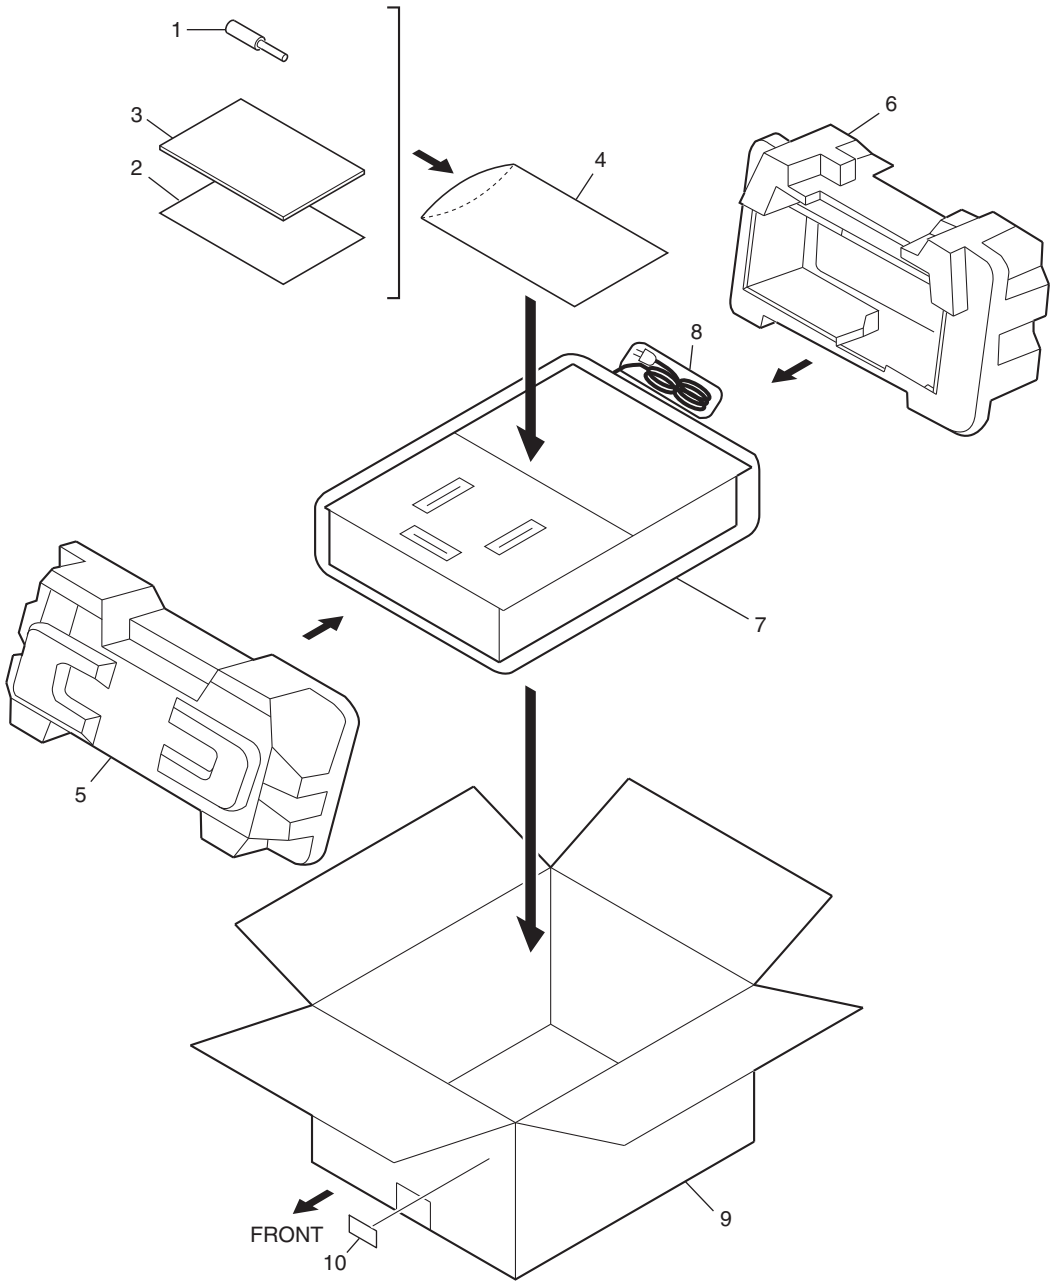

PACKING


Mark	No.	Description	Part No.
	1	Hexagon Screwdriver	DEX1018
NSP	2	Warranty Card	See Contrast table(2)
	3	Operating Instructions	See Contrast table(2)
NSP	4	Polyethylene Bag (0.03 x 230 x 340)	Z21-038
NSP	5	Pad (A)	DHA1586
	6	Pad (B)	DHA1587
	7	Sheet	RHX1006
	8	Polyethylene Bag	VHL1051
	9	Packing Case	See Contrast table(2)
NSP	10	Label	VRW1629

(2) CONTRAST TABLE

DJM-707/ KUCXJ, DJM-707/ WYXJ, DJM-707/ TLTXJ and DJM-707/NKXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-707 KUCXJ	DJM-707 WYXJ	DJM-707 TLTXJ	DJM-707 NKXJ
NSP	2	Warranty Card	ARY7043	Not used	Not used	Not used
	3	Operating Instructions (English)	DRB1353	Not used	Not used	Not used
	3	Operating Instructions (English/ French/ German/ Italian/ Duch/ Spanish)	Not used	DRB1354	Not used	Not used
	3	Operating Instructions (English/ Spanish/ Chinese)	Not used	Not used	DRB1355	Not used
	3	Operating Instructions (Korea)	Not used	Not used	Not used	DRB1356
	9	Packing Case	DHG2445	DHG2444	DHG2446	DHG2448

2.2 EXTERIOR SECTION

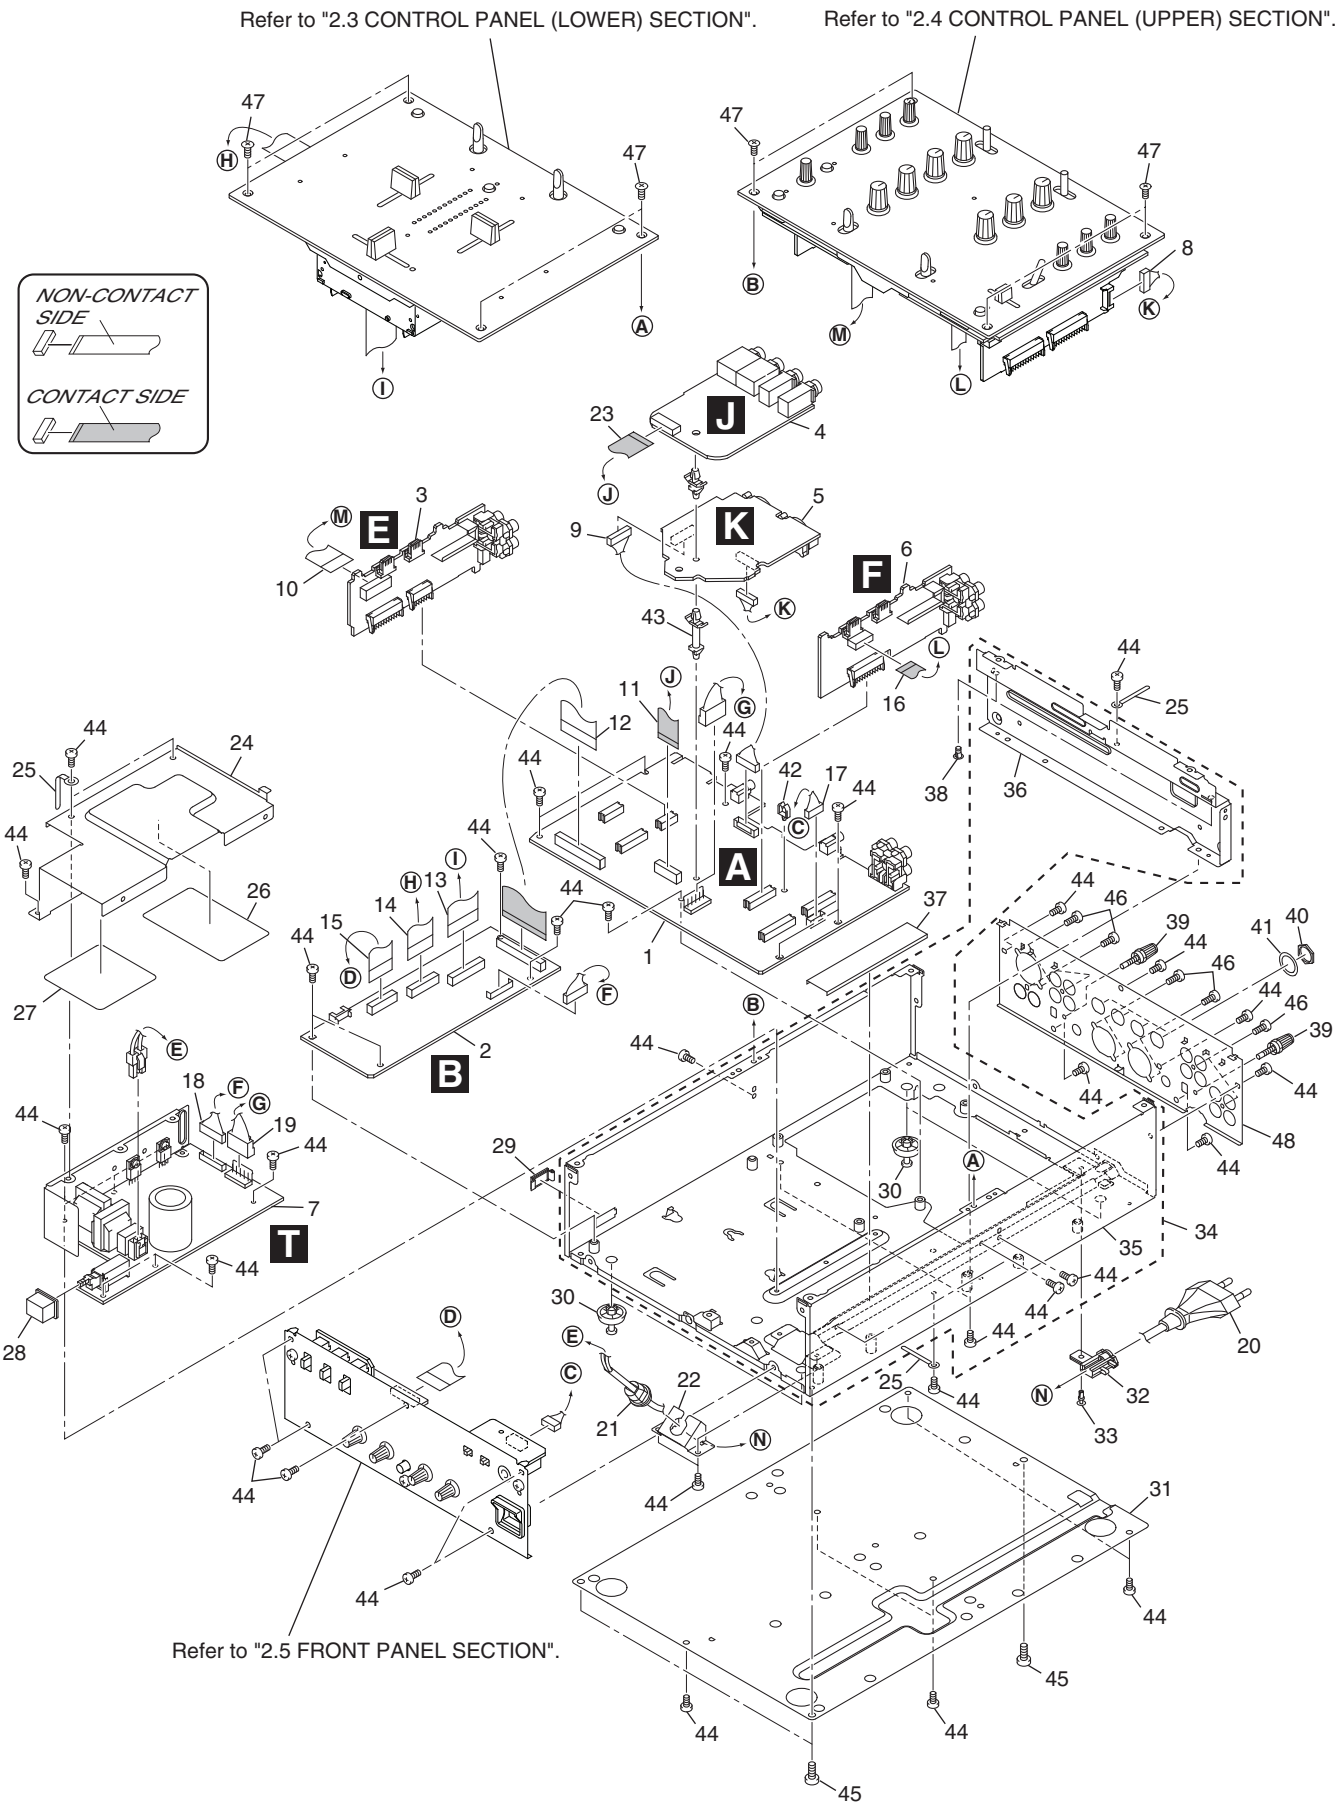

EXTERIOR SECTION Parts List


Mark	No.	Description	Part No.
	1	MAIN Assy	DWX2338
	2	CONT Assy	DWX2335
	3	C1BF Assy	DWS1338
	4	SDRT Assy	DWX2321
	5	XLR Assy	DWX2322
	6	C2BF Assy	DWS1339
⚠	7	SW POWER SUPPLY	DWR1377
	8	Connector Assy (8P)	DKP3660
	9	Connector Assy (9P)	DKP3662
	10	Flexible Cable (17P)	DDD1234
	11	Flexible Cable (15P)	DDD1243
	12	Flexible Cable (33P)	DDD1247
	13	Flexible Cable (23P)	DDD1239
	14	Flexible Cable (19P)	DDD1238
	15	Flexible Cable (17P)	DDD1246
	16	Flexible Cable (11P)	DDD1245
	17	Connector Assy (6P)	DKP3661
	18	Connector Assy	PF08EE-D17
	19	Connector Assy (5P)	DKP3659
⚠	20	AC Power Cord	See Contrast table(2)
	21	Strain Relief	See Contrast table(2)
	22	Cord Stopper Stay	DNH2576
	23	Locking Card Spacer	PNW2917
NSP	24	Shield Case	DNH2572
NSP	25	Cord Stopper	ZCB-069Z
	26	Shield Sheet B	DEC2570
	27	Shield Sheet C	DEC2584
	28	Power Knob	DAC2133
	29	Blind Cap	DNK4218
	30	Foot	REC-434
NSP	31	Bottom Plate	DNH2570
	32	Cord Cover	DNK4197
	33	Rivet	RBM-003
	34	Chassis (7) Assy	DXB1816
NSP	35	Chassis (7)	DNA1297
NSP	36	Partition Plate	DNH2573
	37	Shield Sheet A	DEC2569
	38	Card Spacer	DNK2769
	39	Terminal Screw	AKE-031
	40	Nut	NKX2FUC
	41	Washer	DBE1010
	42	Mini Clamp	DEC2588
NSP	43	PC Support	VEC1584
	44	Screw	BBZ30P060FZK
	45	Screw	BBZ40P120FMC
	46	Screw	BPZ30P080FMC
	47	Screw	CMZ30P100FZK
NSP	48	Rear Panel	See Contrast table(2)

(2) CONTRAST TABLE

DJM-707/ KUCXJ, DJM-707/ WYXJ, DJM-707/ TLTXJ and DJM-707/NKXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-707 KUCXJ	DJM-707 WYXJ	DJM-707 TLTXJ	DJM-707 NKXJ
⚠	20	AC Power Cord	VDG1075	VDG1077	VDG1077	VDG1096
⚠	21	Strain Relief	CM-22C	CM-22B	CM-22B	CM-22C
NSP	48	Rear Panel	DNC1662	DNC1661	DNC1663	DNC1665

2.3 CONTROL PANEL (LOWER) SECTION

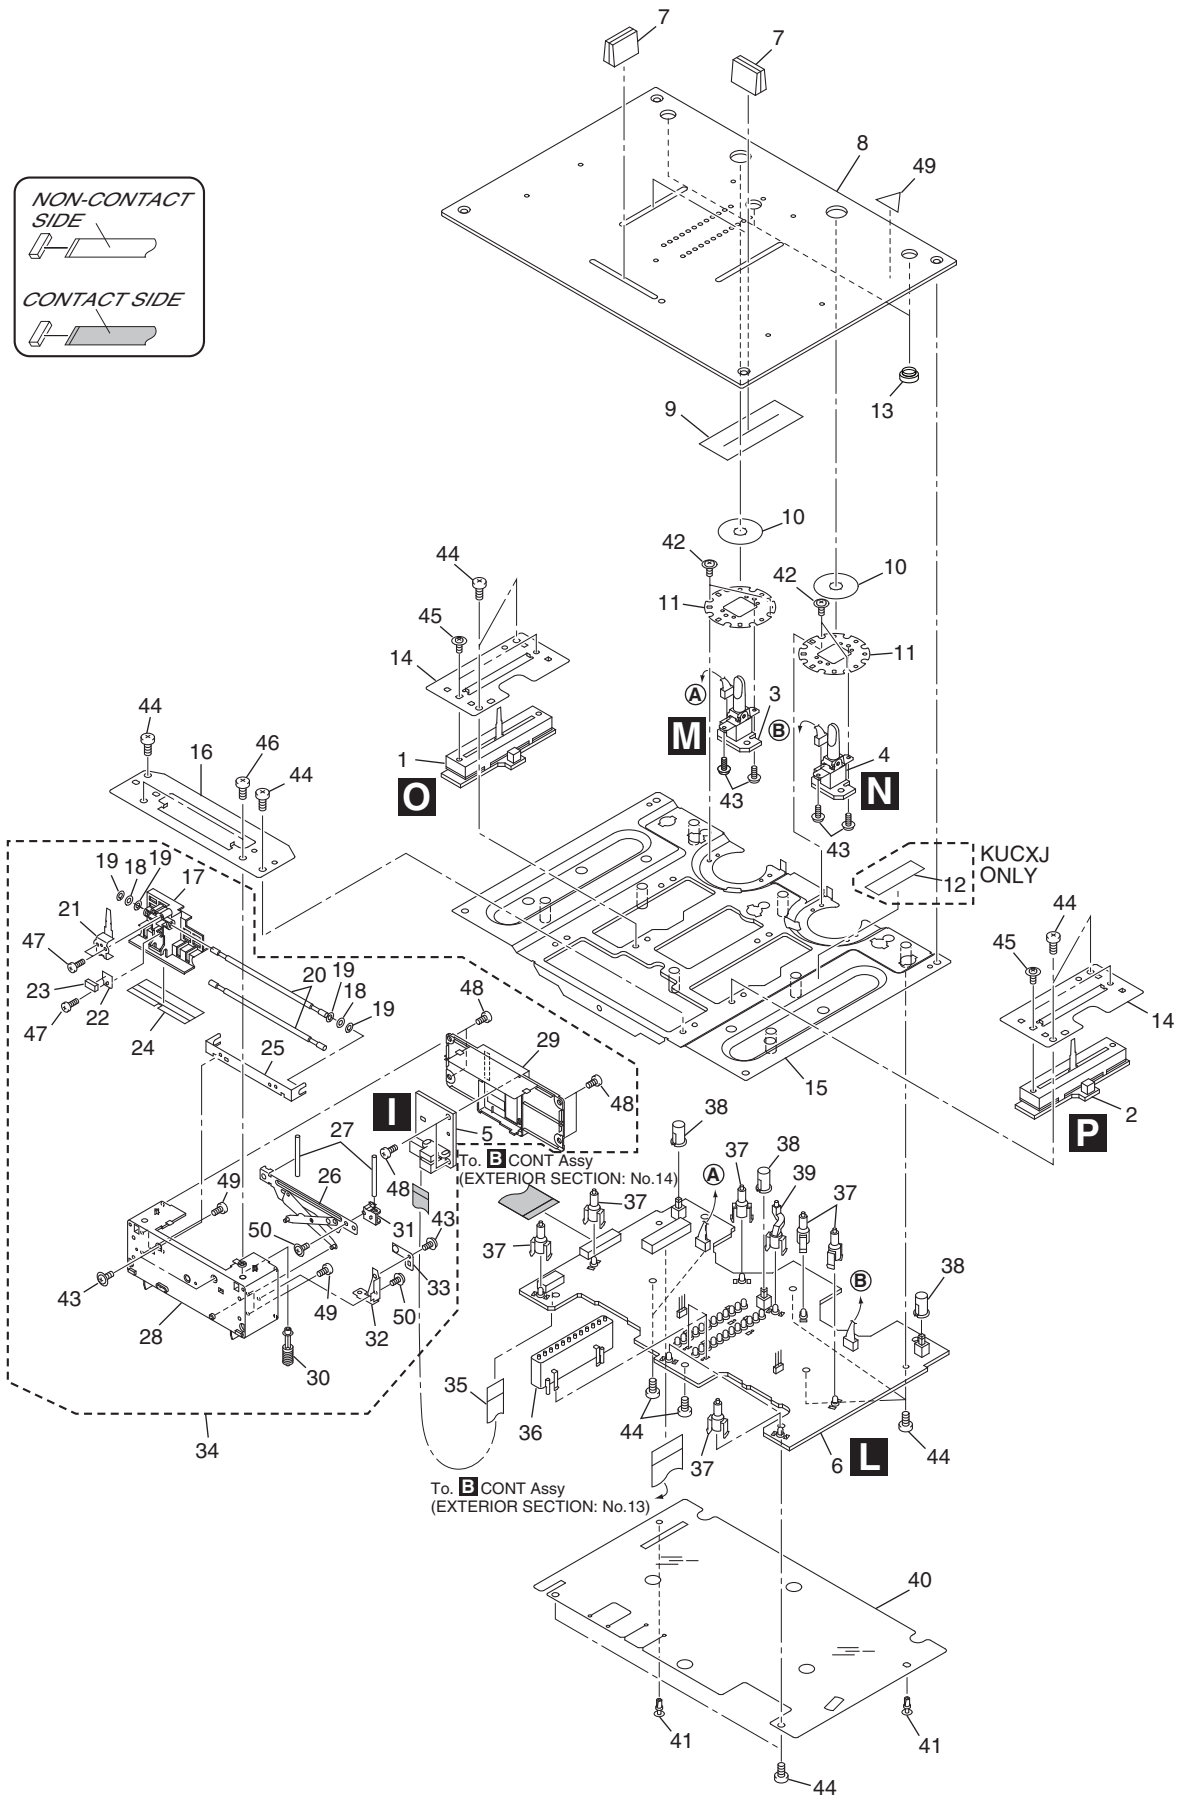

CONTROL PANEL (LOWER) SECTION Parts List


Mark	No.	Description	Part No.
	1	FVA1 Assy	DWX2323
	2	FVA2 Assy	DWX2324
	3	C1TR Assy	DWS1334
	4	C2TR Assy	DWS1335
	5	FDVR Assy	DWX2320
	6	LVMR Assy	DWS1330
	7	Slider Knob (L)	DNK4210
	8	Control Panel (D7)	DNB1124
	9	Fader Packing (A)	DEC2571
	10	SW Packing (A)	DEC2573
	11	Transform Panel	DNF1682
	12	65 Label (S)	See Contrast table (2)
	13	Push SW Guide	DNK4208
	14	CH Fader Bracket	DNF1683
NSP	15	Panel Stay D Assy	DXB1787
	16	CR Fader Bracket	DNF1684
	17	Slider Base	DNK4192
	18	O Ring (2.8)	DEB1618
	19	Washer	WT28D060D025
	20	Guide Shaft	DLA1966
	21	Lever Plate	DNH2564
	22	Yoke	DNH2569
	23	Fader Magnet	DMG1010
	24	Encoder Plate S	DEC2568
	25	Stopper S	DNH2578
	26	MG Plate Assy	DXA1968
	27	MG Shaft	DLA1947
	28	Case A	DNK4193
	29	Case B	DNK4194
	30	Worm Gear S	DNK4195
	31	Rack Gear S	DNK4196
	32	WG Holder	DNF1681
	33	WG Spring	DBK1245
	34	Cross Fader Assy-S	DXX2535
	35	Flexible Cable (9P)	DDD1240
	36	Level Meter Holder	DNK4214
	37	LED Lens (C)	DNK4217
	38	Push SW Knob (B)	DNK4207
	39	LED Lens (B)	DNK4216
	40	Shield Sheet (F)	DEC2591
	41	Rivet	RBM-003
	42	Screw	AMZ26P040FMC
	43	Screw	AMZ20P040FMC
	44	Screw	BBZ30P060FZK
	45	Thin Head Screw	DBA1198
	46	Screw	BPZ30P080FMC
	47	Screw	BPZ20P060FMC
	48	Screw	BPZ20P050FMC
NSP	49	Caution Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-707/ KUCXJ, DJM-707/ WYXJ, DJM-707/ TLTXJ and DJM-707/NKXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-707 KUCXJ	DJM-707 WYXJ	DJM-707 TLTXJ	DJM-707 NKXJ
	12	65 Label (S)	DRW2164	Not used	Not used	Not used
NSP	49	Caution Label	DRW1975	Not used	Not used	Not used

2.4 CONTROL PANEL (UPPER) SECTION

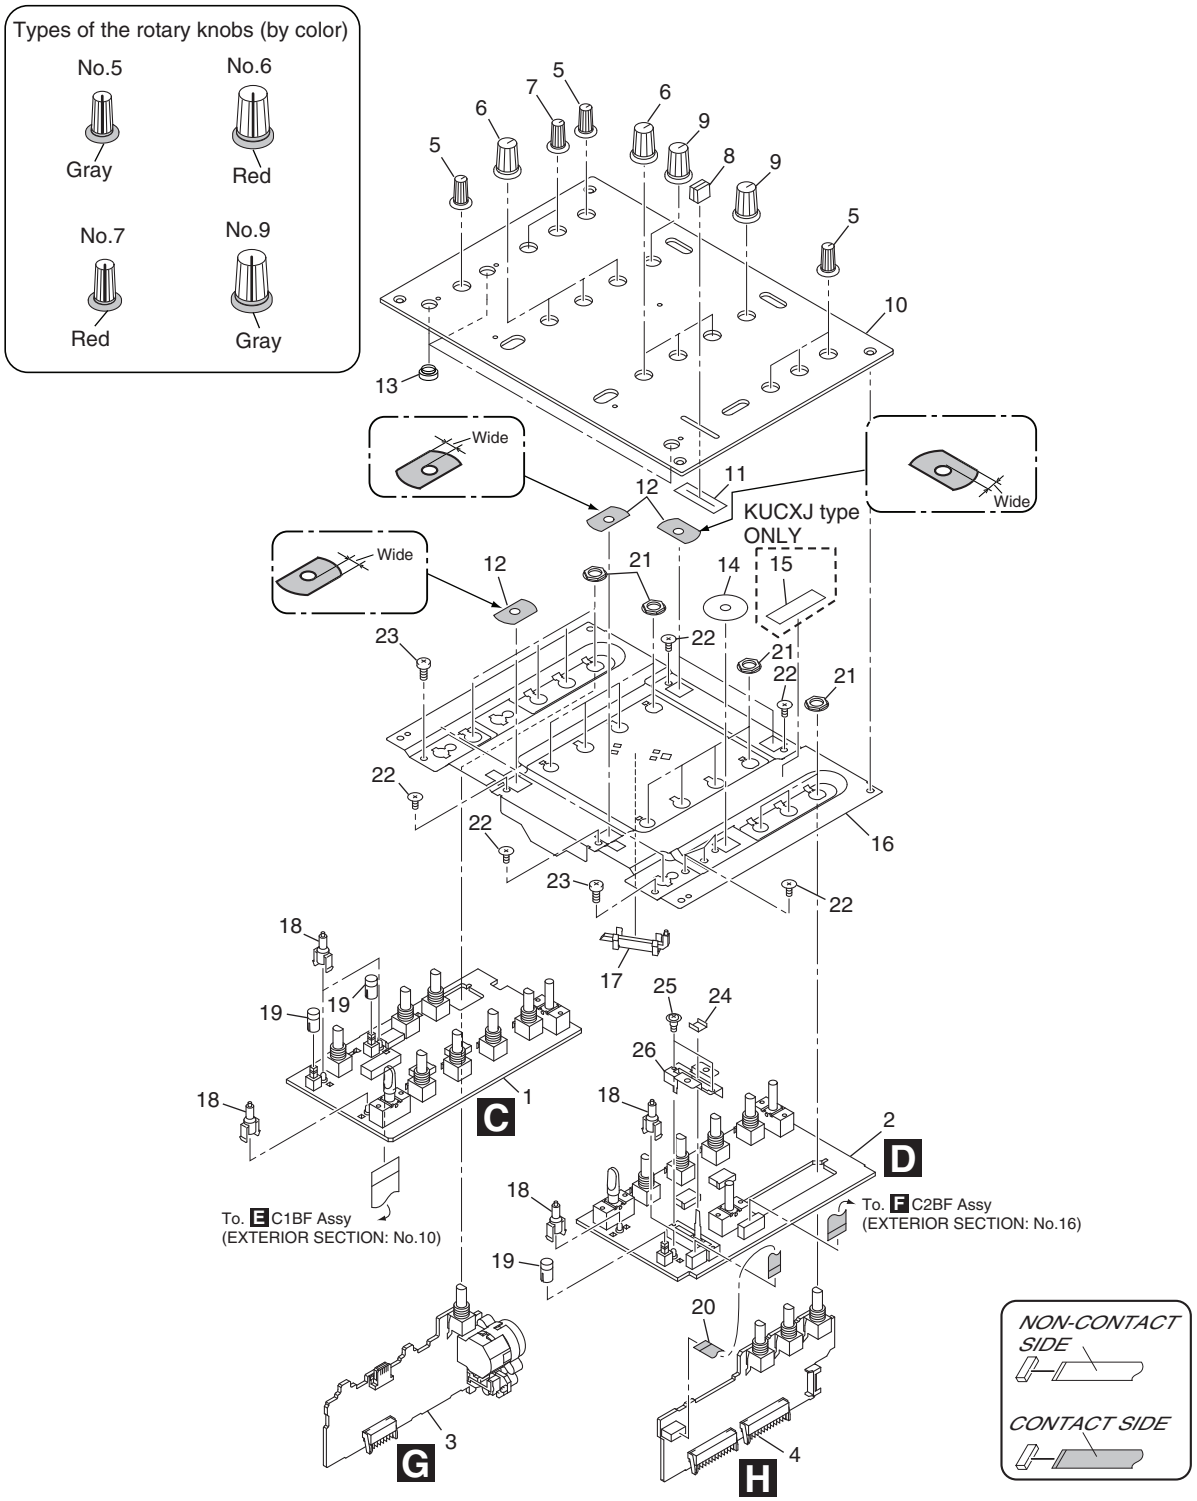

CONTROL PANEL (UPPER) Parts List


Mark	No.	Description	Part No.
	1	C1EQ Assy	DWS1336
	2	C2EQ Assy	DWS1337
	3	MICB Assy	DWX2363
	4	HPBO Assy	DWX2319
	5	Rotary Knob (Small: Red)	DNK4203
	6	Rotary Knob (Large: Red)	DNK4202
	7	Rotary Knob (Small Red)	DNK4204
	8	Slider Knob (L)	DNK4211
	9	Rotary Knob (Large: Glay)	DNK4201
	10	Control Panel (U7)	DNB1123
	11	Fader Packing (B)	DEC2572
	12	SW Packing (D)	DEC2580
	13	Push SW Guide	DNK4208
	14	SW Packing (A)	DEC2573
	15	65 Label (S)	See Contrast table(2)
NSP	16	Panel Stay (U7)	DND1249
	17	LED Lens (E)	DNK4227
	18	LED Lens (A)	DNK4215
	19	Push SW Knob (A)	DNK4206
	20	Flexible Cable (7P)	DDD1244
	21	Flange Nut M9	DBN1004
	22	Screw	CMZ26P050FZK
	23	Screw	BBZ30P060FZK
	24	Cue Earth Plate	DBK1252
	25	Screw	DBA1141
	26	Cue Fader Bracket	DNF1690

(2) CONTRAST TABLE

DJM-707/ KUCXJ, DJM-707/ WYXJ and DJM-707/ TLTXJ and DJM-707/NKXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-707 KUCXJ	DJM-707 WYXJ	DJM-707 TLTXJ	DJM-707 NKXJ
	15	65 Label (S)	DRW2164	Not used	Not used	Not used

2.5 FRONT PANEL SECTION

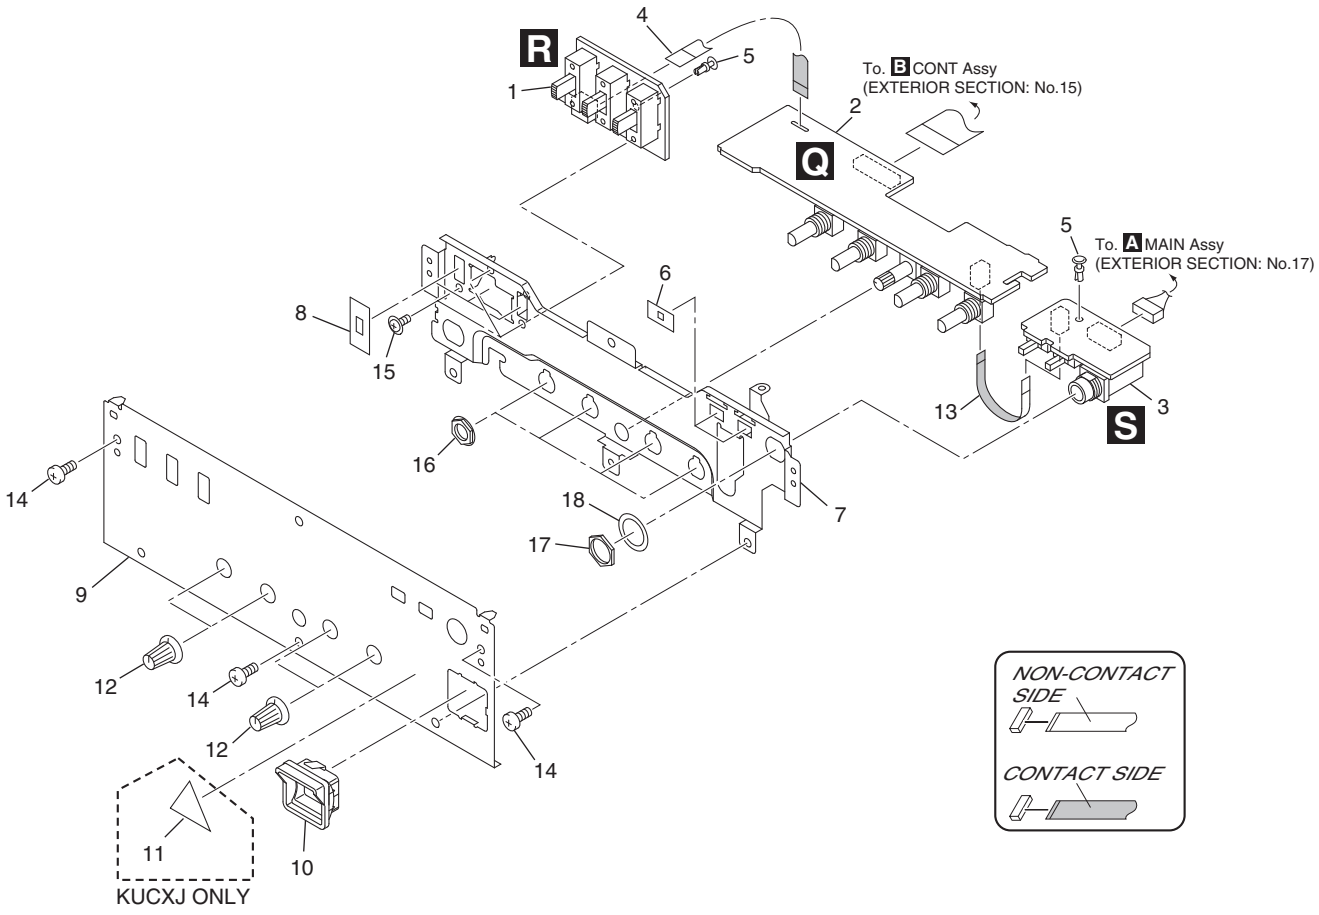

FRONT PANEL Parts List

Mark	No.	Description	Part No.
	1	RVSW Assy	DWS1332
	2	CFVR Assy	DWS1341
	3	FSSW Assy	DWS1333
	4	Flexible Cable (6P)	DDD1235
	5	Rivet	RBM-003
	6	Slide SW Packing (B)	DEC2590
NSP	7	Front Panel Stay	DNH2571
	8	Slide SW Packing (A)	DEC2589
	9	Front Panel (7)	DNB1122
	10	Power Knob Guide	DNK4198
	11	Caution Label	See Contrast table(2)
	12	Rotary Knob (SS)	DAA1162
	13	Flexible Cable (3P)	DDD1236
	14	Screw	BBZ30P060FZK
	15	Screw	AMZ26P040FMC
	16	Flange Nut M9	DBN1004
	17	Nut	NKX2FUC
	18	Washer	DBE1010

(2) CONTRAST TABLE

DJM-707/ KUCXJ, DJM-707 WYXJ, DJM-707/ TLTXJ and DJM-707/NKXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-707 KUCXJ	DJM-707 WYXJ	DJM-707 TLTXJ	DJM-707 NKXJ
NSP	11	Caution Label	DRW1975	Not used	Not used	Not used

5. PCB PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω	→ *56 x 10¹* →	*561*	*RD1/4PU 5 6 1 J*
47k Ω	→ *47 x 10³* →	*473*	*RD1/4PU 4 7 3 J*
0.5 Ω	→ *R50*		*RN2H R 5 0 K*
1 Ω	→ *1R0*		*RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω	→ *562 x 10¹* →	*5621*	*RN1/4PC 5 6 2 1 F*

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
NSP	1	..MOTHER ASSY	DWM2174
	2	..C1EQ ASSY	DWS1336
	2	..C2EQ ASSY	DWS1337
	2	..CONT ASSY	DWX2335
	2	..MAIN ASSY	DWX2338
NSP	1	..JACK ASSY	DWM2171
	2	..C1BF ASSY	DWS1338
	2	..C2BF ASSY	DWS1339
	2	..MICB ASSY	DWX2363
	2	..HPBO ASSY	DWX2319
	2	..FDVR ASSY	DWX2320
	2	..SDRT ASSY	DWX2321
	2	..XLR ASSY	DWX2322
NSP	1	..SUB ASSY	DWM2172
	2	..LVMR ASSY	DWS1330
	2	..CFVR ASSY	DWS1341
	2	..RVSW ASSY	DWS1332
	2	..FSSW ASSY	DWS1333
	2	..C1TR ASSY	DWS1334
	2	..C2TR ASSY	DWS1335
	2	..FVA1 ASSY	DWX2323
	2	..FVA2 ASSY	DWX2324
⚠	1	..SW POWER SUPPLY ASSY	DWR1377

Mark	No.	Description	Part No.
A		**MAIN ASSY**	
		SEMICONDUCTORS	
⚠		IC140,IC142,IC143 (400mA)	AEK7004
⚠		IC135	ICP-N15
⚠		IC134	ICP-N20
		IC104,IC118,IC131-IC133	NJM4558MD
		IC112	NJM4580DD
		IC101	NJM5532MD
		IC114-IC117	SSM2018TP
		IC119	TC9215AF
		Q129,Q132,Q136,Q140	2SA1037K
		Q101-Q108,Q113-Q118	2SC3326
		Q141-Q144,Q150,Q151	2SC3326
		Q153	DTA124EK
		Q109,Q149,Q152,Q154	DTC124EK
		D101,D102,D109-D115	1SS355
		D119-D121,D131-D133	1SS355
		D137,D138	NNCD6.2MF

Mark	No.	Description	Part No.
		COILS AND FILTERS	
⚠		L101-L104 CHIP BEAD	VTL1105
		CAPACITORS	
		C163,C164,C237,C238	CCSRCH101J50
		C250,C251,C304,C305	CCSRCH220J50
		C335-C342	CCSRCH220J50
		C113,C114	CCSRCH270J50
		C176-C179,C188,C189	CCSRCH470J50
		C312,C313	CCSRCH470J50
		C159-C162,C182,C183	CEAL100M35
		C194,C195,C284-C287	CEAL100M35
		C292,C293,C300-C303	CEAL100M35
		C331,C332	CEAL100M35
		C186,C187,C196,C197	CEALNP100M35
		C200,C201,C235,C236	CEAT100M50
		C329,C330	CEAT100M50
		C269,C271,C273,C274	CEAT101M25
		C276,C277	CEAT101M25
		C327,C328	CEAT102M25
		C167,C241	CFTLA103J50
		C294,C295,C321-C324	CKSQYB105K16
		C111,C112,C157,C158	CKSRYB103K50
		C172-C175,C184,C185	CKSRYB103K50
		C190,C191,C198,C199,C202	CKSRYB103K50
		C204,C242,C243,C245,C246	CKSRYB103K50
		C248,C249,C316-C319	CKSRYB103K50
		C325,C326	CKSRYB103K50
		C314,C315	CKSRYB104K25
		C101-C104,C254-C257	CKSRYB473K50
		C262,C263,C351,C352	CKSRYB473K50
		C165,C166,C239,C240	CQMA152J50
		C244,C247	CQMA473J50
		RESISTORS	
		R215,R216,R275,R276	RN1/16SE1000D
		R205-R208,R213,R214	RN1/16SE1003D
		R225,R226,R239,R240	RN1/16SE1003D
		R263,R264,R277,R278	RN1/16SE1003D
		R389-R394	RN1/16SE1003D
		R119,R120,R221-R224	RN1/16SE1802D
		R235-R238	RN1/16SE1802D
		R433-R436	RN1/16SE2202D
		R151,R152	RN1/16SE2702D
		R306,R307	RN1/16SE3302D
		R121,R122	RN1/16SE3901D
		R209-R212,R279-R282	RN1/16SE4300D
		R101-R108,R115,R118	RN1/16SE5602D

Mark No.	Description	Part No.
	R159-R162,R167-R170	RN1/16SE5602D
	R157,R158	RN1/16SE6800D
	R441,R442	RS1/16S2002F
	R443,R444	RS1/16S8201F
	Other Resistors	RS1/16S###J

OTHERS

CN116	15P FFC CONNECTOR	52045-1545
CN118	33P FFC CONNECTOR	52045-3345
CN121	5P VH CONNECTOR	B5P-VH
CN125	KR CONNECTOR	B6B-PH-K-S
CN123	KR CONNECTOR	B9B-PH-K-S
J101	EARTH LEAD UNIT	DDF1031
JA101	4P PIN JACK	DKB1057
JA104,JA105	REMOTE CONTROL JACK	RKN1004
CN102	B TO B CONNECTOR 10P	VKN1398
CN115	B TO B CONNECTOR 12P	VKN1399
CN101,CN127	B TO B CONNECTOR 18P	VKN1402
CN119	B TO B CONNECTOR 20P	VKN1403
CN120	B TO B CONNECTOR 22P	VKN1404
KN102	WRAPPING TERMINAL	VNF1084

B CONT ASSY

SEMICONDUCTORS

⚠	IC734 (400mA)	AEK7004
⚠	IC733 (500mA)	AEK7005
⚠	IC732	ICP-N20
	IC736	NJM4580MD
	IC716	NJM78L05UA
	IC717	NJM79L05UA
	IC718	PD3453A8
	IC720,IC735	TC74VHC14FT
	IC737	TC7WH125FU
	Q710	2SC1740S
	Q709	2SC2458
	Q702,Q711	DTA124EUA
	Q703-Q707	DTC124EUA
	D701	1SS355

CAPACITORS

C992-C998	CCSRCH121J50
C805,C820,C943,C947	CEAT100M50
C850,C868,C926,C990	CEAT101M10
C825,C927	CEAT330M35
C812,C813,C824,C848	CKSRYB103K50
C851,C852,C854,C862,C863	CKSRYB103K50
C865,C869,C870,C874-C878	CKSRYB103K50
C880,C885,C887-C889	CKSRYB103K50
C891,C892,C898,C904,C907	CKSRYB103K50
C909,C922,C924,C939,C944	CKSRYB103K50
C946,C991	CKSRYB103K50
C823,C829,C834,C838	CKSRYB104K25
C811,C830	CKSRYB153K50
C818,C835	CKSRYB222K50
C819,C836	CKSRYB682K50

RESISTORS

R841,R843,R845,R853	RAB4C0R0J
VR700-VR703 (100k)	CCP1402

Mark No.	Description	Part No.
	Other Resistors	RS1/16S###J

OTHERS

CN709	17P FFC CONNECTOR	52045-1745
CN707	19P FFC CONNECTOR	52045-1945
CN708	23P FFC CONNECTOR	52045-2345
CN706	33P FFC CONNECTOR	52045-3345
CN703	8P TOP POST	B8B-EH
X700	CHIP CERAMIC RESONATOR (24.57MHz)	DSS1139
CN702	KR CONNECTOR	S6B-PH-K-S

C C1EQ ASSY

SEMICONDUCTORS

IC1610	NJM4558MD
IC1602-IC1605,IC1607	NJM4580MD
IC1601	NJM5532MD
IC1609	TC7S14F
Q1603-Q1606	2SC3326
Q1602	DTA124EUA
D1601-D1604	1SS355
D1606	SLI-343URCW
D1607,D1608	SLI-343YCW
D1600	TLGE68TG

SWITCHES AND RELAYS

S1602	DSK1029
S1601	DSK1035
S1603,S1604	RSG1032

CAPACITORS

C1663,C1664	CCSRCH101J50
C1631	CCSRCH270J50
C1673,C1674	CCSRCH271J50
C1683,C1684	CCSRCH330J50
C1603,C1604,C1627,C1628,C1661	CEJQ100M50
C1665,C1679,C1680,C1685,C1686	CEJQ100M50
C1630	CFTLA104J50
C1671,C1672	CFTNA473J50
C1681,C1682	CFTNA563J50
C1607,C1638,C1641,C1642	CKSRYB103K50
C1648-C1654,C1656-C1660	CKSRYB103K50
C1688,C1689	CKSRYB103K50
C1635	CKSRYB104K25
C1687	CKSRYB272K50
C1601,C1602,C1605,C1606	CKSRYB473K50
C1677,C1678 (5600pF/50V)	DCE1009
C1675,C1676 (0.47uF/50V)	DCH1192

RESISTORS

R1617,R1618	RN1/10SE1300D
R1601,R1602,R1651,R1652	RN1/16SE1001D
R1689,R1690	RN1/16SE1002D
R1603,R1604,R1637,R1638	RN1/16SE1003D
R1633,R1634,R1641,R1642	RN1/16SE1502D
R1611,R1612,R1623,R1624	RN1/16SE1800D
R1609,R1610,R1615,R1616	RN1/16SE1801D
R1621,R1622	RN1/16SE1801D
R1635,R1636,R1639,R1640	RN1/16SE1802D
R1691,R1692	RN1/16SE1802D
R1625,R1626	RN1/16SE4702D
R1607,R1608,R1627,R1628	RN1/16SE5101D

Mark	No.	Description	Part No.
	R1658		RN1/16SE5601D
	R1613,R1614		RN1/16SE6202D
	R1619,R1620		RN1/16SE7502D
	VR1602-VR1604 (10K-ohm -B)		DCS1065
	VR1601,VR1605 (10K-ohm -B)		DCS1073
	VR1606,VR1607 (20K-ohm -B)		DCS1074
	VR1608-VR1613 (22k-ohm)		VCP1133
	Other Resistors		RS1/16S###J

OTHERS

CN1603	FFC CONNECTOR 17P	52492-1720
CN1601,CN1602,CN1604	B TO B CONNECTOR 6P	DKN1278

D C2EQ ASSY

SEMICONDUCTORS

	IC1748-IC1750	NJM4558MD
	IC1752-IC1755	NJM4580MD
	IC1751	NJM5532MD
	IC1758	TC7S14F
	Q1701-Q1704	2SC3326
	Q1705	DTA124EUA
	D1701-D1704	1SS355
	D1751	SLI-343URCW
	D1754	SLI-343YCW

SWITCHES AND RELAYS

	S1751	DSK1029
	S1752	DSK1033
	S1754	DSK1035
	S1753	RSG1032

CAPACITORS

	C1799,C1800	CCSRCH101J50
	C1805-C1808	CCSRCH220J50
	C1759,C1760	CCSRCH271J50
	C1767,C1768	CCSRCH330J50
	C1769-C1772,C1797,C1798	CEJQ100M50
	C1757,C1758	CFTNA473J50
	C1765,C1766	CFTNA563J50
	C1752-C1756,C1781,C1783,C1784	CKSRYB103K50
	C1790,C1801-C1804,C1809-C1815	CKSRYB103K50
	C1779	CKSRYB104K25
	C1761,C1762,C1777,C1778	CKSRYB473K50
	C1773,C1774 (5600pF/50V)	DCE1009
	C1775,C1776 (0.47uF/50V)	DCH1192

RESISTORS

	R1795,R1796	RN1/10SE1300D
	R1751,R1752	RN1/16SE1001D
	R1815,R1816	RN1/16SE1002D
	R1753,R1754,R1787,R1788	RN1/16SE1003D
	R1779,R1780,R1783,R1784	RN1/16SE1502D
	R1820,R1821,R1824,R1826	RN1/16SE1502D
	R1761,R1762,R1789,R1790	RN1/16SE1800D
	R1759,R1760,R1765,R1766	RN1/16SE1801D
	R1793,R1794	RN1/16SE1801D
	R1777,R1778,R1781,R1782	RN1/16SE1802D
	R1817,R1818	RN1/16SE1802D
	R1763,R1764	RN1/16SE4702D
	R1757,R1758,R1771,R1772	RN1/16SE5101D
	R1791,R1792	RN1/16SE6202D
	R1797,R1798	RN1/16SE7502D

Mark	No.	Description	Part No.
	VR1752-VR1754 (10K-ohm -B)		DCS1065
	VR1751 (10K-ohm -B)		DCS1073
	VR1755 (10K-ohm -B)		DCV1014
	VR1756-VR1761 (22k-ohm)		VCP1133
	Other Resistors		RS1/16S###J

OTHERS

CN1754	7P FFC CONNECTOR	52045-0745
CN1753	11P FFC CONNECTOR	52045-1145
CN1751,CN1752	B TO B CONNECTOR 6P	DKN1278
0	CUE FADER BRACKET	DNF1690

E C1BF ASSY

SEMICONDUCTORS

	IC1255	NJM4580DD
	IC1251-IC1253	NJM5532MD
	Q1251,Q1252	2SC3326
	Q1257	DTA124EUA
	Q1253,Q1254,Q1256	DTC124EUA
	D1251-D1254,D1257,D1258	1SS355

SWITCHES AND RELAYS

	S1251	VSH1009
	RY1251,RY1252	VSR1008

CAPACITORS

	C1251-C1254,C1259-C1262	CCSRCH101J50
	C1297,C1298	CCSRCH220J50
	C1292,C1293	CEAT221M6R3
	C1269,C1270	CEAT470M35
	C1255-C1258,C1263-C1268	CEJQ100M50
	C1275,C1276	CEJQ100M50
	C1285,C1290	CFTLA103J50
	C1279-C1284,C1294,C1301	CKSRYB103K50
	C1271,C1272	CQMA222J50
	C1273,C1274	CQMA681J50

RESISTORS

	R1269,R1270	RN1/10SE4703D
	R1273-R1276	RN1/10SE7503D
	R1251,R1252,R1259,R1260	RN1/16SE1000D
	R1267,R1268,R1293-R1296	RN1/16SE1001D
	R1255-R1258,R1263-R1266	RN1/16SE1003D
	R1279,R1280,R1301-R1304	RN1/16SE1003D
	R1261,R1262,R1277,R1278	RN1/16SE1203D
	R1271,R1272	RN1/16SE1601D
	R1290	RN1/16SE2202D
	R1286,R1287	RN1/16SE3301D
	R1253,R1254,R1309,R1310	RN1/16SE3302D
	Other Resistors	RS1/16S###J

OTHERS

CN1255	FFC CONNECTOR 17P	52492-1720
JA1251	4P PIN JACK	AKB7048
CN1253,CN1254	B TO B CONNECTOR 6P	DKN1279
0	SHIELD CASE S	DNH2589
CN1252	B TO B CONNECTOR 10P	VKN1385
CN1251	B TO B CONNECTOR 18P	VKN1389

Mark	No.	Description	Part No.

F C2BF ASSY

SEMICONDUCTORS

	IC1355	NJM4580DD
	IC1351-IC1353	NJM5532MD
	Q1351,Q1352	2SC3326
	Q1357	DTA124EUA
	Q1353,Q1354,Q1356	DTC124EUA
	D1351-D1354,D1357,D1358	1SS355

SWITCHES AND RELAYS

	S1351	VSH1009
	RY1351,RY1352	VSR1008

CAPACITORS

	C1351-C1354,C1359-C1362	CCSRCH101J50
	C1397,C1398	CCSRCH220J50
	C1392,C1393	CEAT221M6R3
	C1369,C1370	CEAT470M35
	C1355-C1358,C1363-C1368	CEJQ100M50
	C1375,C1376	CEJQ100M50
	C1385,C1390	CFTLA103J50
	C1379-C1384,C1394,C1401	CKSRYB103K50
	C1371,C1372	CQMA222J50
	C1373,C1374	CQMA681J50

RESISTORS

	R1369,R1370	RN1/10SE4703D
	R1373-R1376	RN1/10SE7503D
	R1351,R1352,R1359,R1360	RN1/16SE1000D
	R1367,R1368,R1393-R1396	RN1/16SE1001D
	R1355-R1358,R1363-R1366	RN1/16SE1003D
	R1379,R1380,R1401-R1404	RN1/16SE1003D
	R1361,R1362,R1377,R1378	RN1/16SE1203D
	R1371,R1372	RN1/16SE1601D
	R1390	RN1/16SE2202D
	R1386,R1387	RN1/16SE3301D
	R1353,R1354,R1409,R1410	RN1/16SE3302D
	Other Resistors	RS1/16S###J

OTHERS

	CN1355 11P FFC CONNECTOR	52045-1145
	JA1351 4P PIN JACK	AKB7048
	CN1353,CN1354 B TO B CONNECTOR 6P	DKN1279
0	SHIELD CASE S	DNH2589
	CN1351 B TO B CONNECTOR 18P	VKN1389

G MICB ASSY

SEMICONDUCTORS

	IC1201,IC1203	NJM2068M
	IC1202	NJM4580MD
	D1201-D1204	1SS355
	D1205	NNCD6.2MF

COILS AND FILTERS

⚠	L1201-L1206 CHIP FERRITE BEAD	ATL7002

CAPACITORS

	C1201-C1204,C1244,C1245	CCSRCH101J50
	C1231,C1243	CCSRCH221J50
	C1207,C1208,C1227,C1234	CCSRCH270J50
	C1247	CEAT470M25
	C1205,C1206,C1209,C1210,C1228	CEJQ100M35
	C1230,C1233,C1237,C1241,C1242	CEJQ100M35
	C1248	CEJQ100M35
	C1226,C1239,C1240,C1249	CFTLA103J50
	C1211,C1212,C1229,C1235,C1236	CKSRYB103K50
	C1238	CKSRYB103K50

RESISTORS

	R1205,R1206	RN1/10SE4703D
	R1226	RN1/16SC22R0D
	R1203,R1204	RN1/16SE1000D
	R1219	RN1/16SE1002D
	R1201,R1202	RN1/16SE1003D
	R1209,R1210	RN1/16SE1802D
	R1207,R1208	RN1/16SE3302D
	R1213,R1230	RN1/16SE6202D
	R1211,R1212	RN1/16SE9102D
	VR1201 (10K-ohm -B)	DCS1071
	Other Resistors	RS1/16S###J

OTHERS

	JA1202 2P PIN JACK	AKB7046
	JA1201 CANNON CONNECTOR	DKB1058
	CN1202 B TO B CONNECTOR 6P	DKN1279
	CN1201 B TO B CONNECTOR 12P	VKN1386

H HPBO ASSY

SEMICONDUCTORS

	IC1454	NJM2068M
	IC1453	NJM4558MD
	IC1452	NJM4580MD
	IC1451	NJM5532MD
	IC1457	TC7S14F
	IC1455,IC1456	TC9215AF
	Q1453,Q1454	2SB1238X
	Q1455,Q1456	2SC3326
	Q1451,Q1452	2SD1859X
	Q1457,Q1458	DTC124EUA
	D1451-D1461	1SS355

SWITCHES AND RELAYS

	RY1451	VSR1008

CAPACITORS

	C1457,C1458	CCSRCH220J50
	C1463,C1464,C1467,C1468	CCSRCH820J50
	C1459,C1460	CEAL100M35
	C1451,C1452,C1455,C1456	CEAT100M50
	C1461,C1462,C1465,C1466	CEAT100M50
	C1497,C1498	CEAT100M50
	C1469,C1470	CEAT2R2M50
	C1471,C1472	CEAT470M25
	C1478-C1487,C1489,C1491,C1492	CKSRYB103K50
	C1503,C1504	CKSRYB473K50
	C1475,C1476 (220uF/35V)	DCH1194

RESISTORS

	R1487-R1490	RD1/2VM122J
	R1499,R1500	RD1/2VM221J
	R1451,R1452,R1457,R1458	RN1/16SE1001D
	R1473,R1474	RN1/16SE1002D

Mark	No.	Description	Part No.
	R1459-R1462		RN1/16SE2202D
	R1479,R1480		RN1/16SE5102D
	R1491-R1494		RS2LMF270J
	VR1451-VR1453 (10K-ohm -A)		DCS1064
	Other Resistors		RS1/16S###J
	OTHERS		
	CN1453	7P FFC CONNECTOR	52045-0745
	CN1452	B TO B CONNECTOR 20P	VKN1390
	CN1451	B TO B CONNECTOR 22P	VKN1391

I FDVR ASSY

	SEMICONDUCTORS		
	IC301		TC74VHC14FT
	Q301-Q305		2SC4081
	D307-D313		DA221
	D301		GP1A038RBK
	D302-D306		GP1S94
	CAPACITORS		
	C905-C909		CCSRCH221J50
	C901-C904		CKSRYB104K25
	RESISTORS		
	All Resistors		RS1/16S###J
	OTHERS		
	CN301	9P FFC CONNECTOR	52044-0945

J SDRT ASSY

	SEMICONDUCTORS		
	IC1901,IC1902		NJM4558MD
	IC1903		TC9215AF
	Q1901-Q1904		2SC3326
	Q1905		DTA124EK
	D1901-D1904		NNCD6.2MF
	COILS AND FILTERS		
⚠	L1907-L1909	CHIP FERRITE BEAD	ATL7002
⚠	L1901-L1906	FERRITE BEAD	VTH1020
	CAPACITORS		
	C1901-C1904,C1915-C1918		CCSRCH101J50
	C1907,C1908		CCSRCH270J50
	C1905,C1906,C1909,C1910		CEAT100M50
	C1913,C1914,C1931,C1932		CEAT100M50
	C1921,C1924-C1929		CKSRYB103K50
	C1933-C1935		CKSRYB104K25
	RESISTORS		
	R1911,R1912,R1949,R1950		RN1/16SE4702D
	Other Resistors		RS1/16S###J
	OTHERS		
	CN1901	15P FFC CONNECTOR	52044-1545
	JA1903,JA1904	MIC. JACK	DKN1248
	JA1901,JA1902	HEADPHONES JACK	RKB1014

Mark	No.	Description	Part No.

K XLR ASSY

	SEMICONDUCTORS		
	IC102,IC137		NJM4580MD
	IC108		NJM5532DD
	IC110,IC111		NJM5532L
	Q119-Q126		2SC3326
	D101-D108		1SS355
	COILS AND FILTERS		
	L101-L104	FERRITE BEAD	VTH1020
	CAPACITORS		
	C333,C334		CCSRCH151J50
	C141-C148,C335,C336		CCSRCH330J50
	C131,C132		CEAL100M50
	C149-C152		CEAT101M25
	C161-C164		CEHAT101M25
	C115-C118,C337,C338		CFTNA334J50
	C119,C120,C125,C126		CKSRYB103K50
	C133,C134,C137-C140		CKSRYB103K50
	C153-C156		CQMA103J50
	RESISTORS		
	R196		RD1/2PM101J
	R193-R195		RD1/2VM101J
	R189-R192		RN1/16SC68R0D
	R163,R164		RN1/16SE1001D
	R123,R124,R165-R172		RN1/16SE1002D
	R447,R448		RN1/16SE1002D
	R387,R388		RN1/16SE1003D
	R125,R126		RN1/16SE1503D
	R129,R130		RN1/16SE2002D
	R185-R188		RN1/16SE2201D
	R173-R180,R451,R452		RN1/16SE2202D
	R435,R436,R441,R442		RN1/16SE2700D
	R429,R430		RN1/16SE2701D
	R431,R432		RN1/16SE4301D
	Other Resistors		RS1/16S###J
	OTHERS		
	CN122	KR CONNECTOR	B8B-PH-K-S
	CN124	KR CONNECTOR	B9B-PH-K-S
	JA102,JA103	CANNON CONNECTOR	DKB1059
	0	SCREW PLATE	VNE1948

L LVMR ASSY

	SEMICONDUCTORS		
	IC417,IC418		NJM072BM-E
	IC401-IC404		NJM4558MD
	IC413,IC416		TC4W53F
	IC407-IC412		TS339CDT
	Q401,Q402		2SA1577
	Q415-Q420		2SB1132
	Q404		2SC3326
	Q405		DTA124EUA
	Q403,Q408-Q414		DTC124EUA
	D401-D406,D409,D410		1SS355
	D413,D414,D439-D454		1SS355
	D473,D474,D481,D482		1SS355
	D437,D438,D458-D460		SLI-343URCW
	D429-D436,D455		SLI-343YCW

Mark No.	Description	Part No.
	D415-D428,D461-D464	TLGE68TG
	D467	UDZS10B
	D407,D408,D411,D412	UDZS12B
	SWITCHES AND RELAYS	
	S404,S405	DSG1077
	S401	RSG1032
	CAPACITORS	
	C403,C404,C407,C408	CCSRCH470J50
	C401,C402,C405,C406,C439	CEAT100M50
	C458	CEAT100M50
	C415-C418	CEAT2R2M50
	C433,C434	CEJQ100M35
	C419,C420,C422-C426	CKSRYB103K50
	C428-C432,C435-C438,C440	CKSRYB103K50
	C447,C449,C451,C453,C455	CKSRYB103K50
	C457,C461-C464	CKSRYB103K50
	C409,C410	CKSRYB473K50
	RESISTORS	
	R461,R462	RS1/10S27R0F
	R463,R464	RS1/16S1000F
	R407,R408,R417,R418	RS1/16S1302F
	R473,R474	RS1/16S2000F
	R475,R476	RS1/16S2400F
	R481,R482	RS1/16S2401F
	R465,R466	RS1/16S3000F
	R467,R468	RS1/16S3300F
	R483,R484	RS1/16S3301F
	R471,R472	RS1/16S4300F
	R469,R470	RS1/16S4700F
	R485,R486	RS1/16S5100F
	R477,R478	RS1/16S7500F
	R403,R404,R413,R414	RS1/16S7501F
	R479,R480	RS1/16S9100F
	Other Resistors	RS1/16S###J
	OTHERS	
	CN402 19P FFC CONNECTOR	52044-1945
	CN405 FFC CONNECTOR 9P	52492-0920
	CN401 FFC CONNECTOR 23P	52492-2320
	CN403,CN404 B TO B CONNECTOR 3P	DKN1334
	J406,J407 CONNECTOR ASSY	PG03KA-E07

M C1TR ASSY

	SWITCHES AND RELAYS	
	S591	DSK1031
	OTHERS	
	CN591 KR CONNECTOR 3P	B3B-PH-K-S

N C2TR ASSY

	SWITCHES AND RELAYS	
	S592	DSK1031
	OTHERS	
	CN592 KR CONNECTOR 3P	B3B-PH-K-S

Mark No.	Description	Part No.

O FVA1 ASSY

	RESISTORS	
	VR593 (10k-ohm -B)	DCV1016
	OTHERS	
	CN593 B TO B CONNECTOR 3P	VKN1355

P FVA2 ASSY

	RESISTORS	
	VR594 (10k-ohm -B)	DCV1016
	OTHERS	
	CN594 B TO B CONNECTOR 3P	VKN1355

Q CFVR ASSY

	RESISTORS	
	VR552,VR554 (10k-ohm)	DCS1076
	VR551,VR555 (10k-ohm)	DCS1077
	VR553 (10k-ohm)	DCS1079
	Other Resistors	RS1/16S###J
	OTHERS	
	CN551 17P FFC CONNECTOR	52044-1745
	CN553 3P FFC CONNECTOR	52045-0345
	CN552 FFC CONNCTOR 6P	52492-0620

R RVSW ASSY

	SWITCHES AND RELAYS	
	S571-S573	DSH1036
	OTHERS	
	CN571 FFC CONNECTOR 6P	52492-0620

S FSSW ASSY

	SEMICONDUCTORS	
	D581,D582	NNCD6.2MF
	COILS AND FILTERS	
⚠	L576-L578 FERRITE BEAD	VTH1020
	SWITCHES AND RELAYS	
	S581,S582	DSH1052
	CAPACITORS	
	C581	CQMA102J50
	OTHERS	
	CN581 3P FFC CONNECTOR	52045-0345
	JA581 HEADPHONES JACK	DKN1281
	CN582 KR CONNECTOR	S6B-PH-K-S