
EXPLODED VIEW/PARTS LIST

Escutcheon section

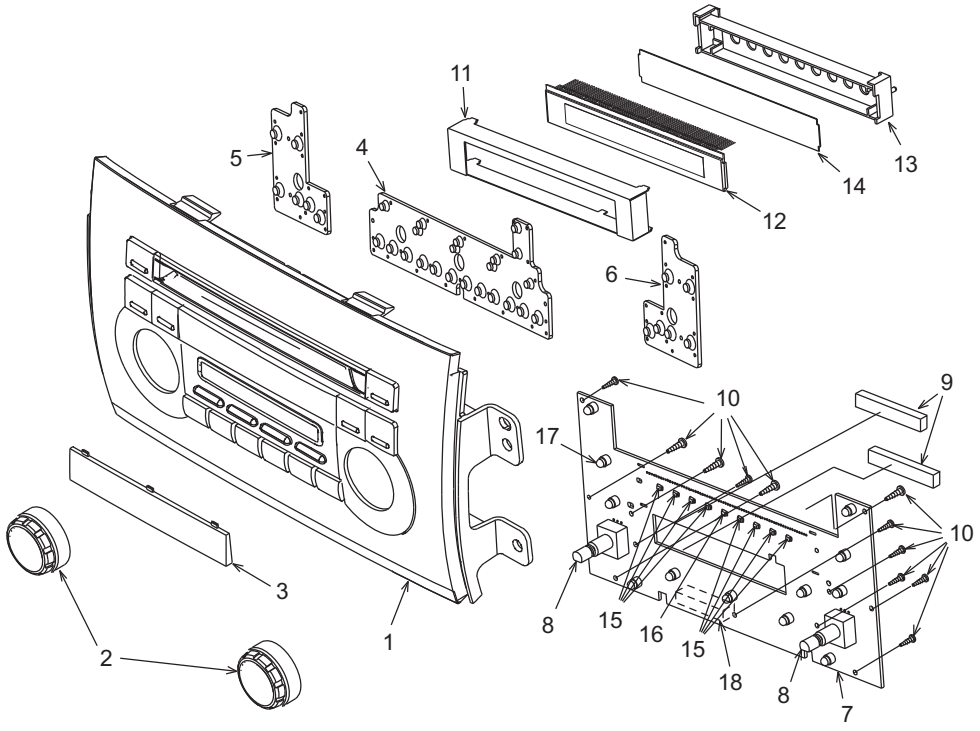


Clamping torque value of a screw is 0.2 +0.04/-0.04 Newton meter.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8120-51	ESCUTCHEON ASSY	1
2	947-0602-00	KNOB ASSY	2
3	371-5854-00	DIAL COVER	1
4	345-5589-00	RUBBER SW (CENTER)	1
5	345-5590-00	RUBBER SW (LEFT)	1
6	345-5591-00	RUBBER SW (RIGHT	1
7	----------	Switch PWB	1
8	016-0014-12	VR W/SHAFT	2
9	345-8639-01	PROTECTOR	2

NO.	PART NO.	DESCRIPTION	Q'TY
10	716-0778-51	P-TITE SCREW (2x6)	11
11	331-4264-00	LCD COVER	1
12	379-1362-51	INDICATOR (LCD)	1
13	335-7705-00	LCD HOLDER	1
14	335-7929-00	COLOR FILTER	1
15	001-7048-91	DIODE RED	8
16	001-7087-90	DIODE RED	1
17	017-0420-43	PL LAMP (14V 40mA RED)	12
18	074-3013-74	OUTLETSOCKET	1

Main section

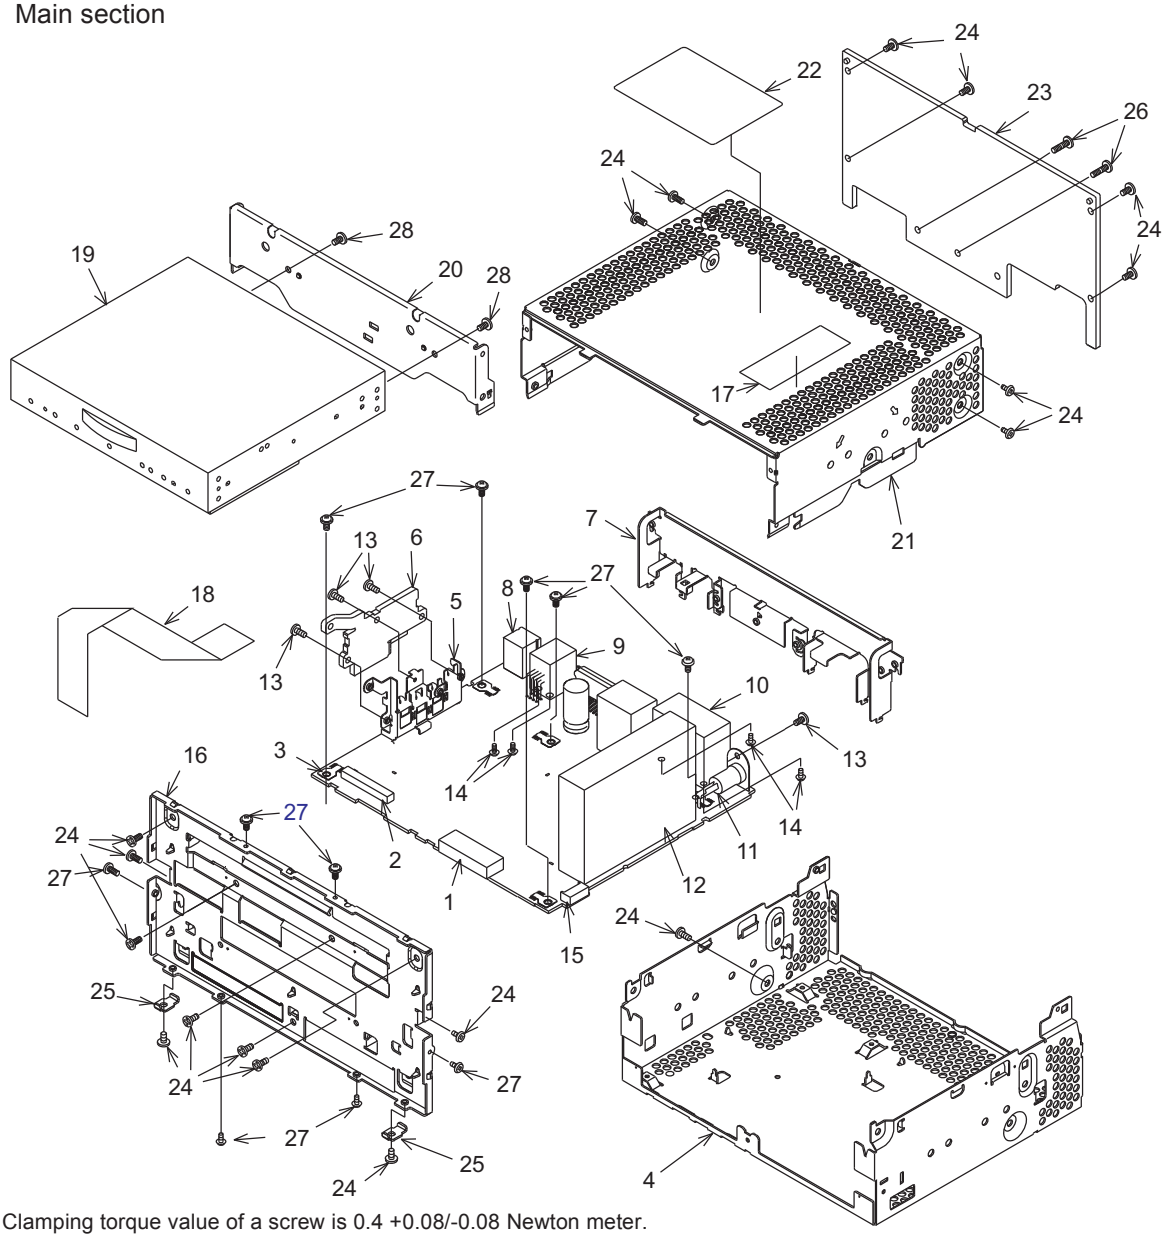


Clamping torque value of a screw is 0.4 +0.08/-0.08 Newton meter.

Note)Some parts depend on each model.The model name is specified in the descripion .
(2811K;PS-2811K-A, 2883K;PS-2883K-A)

NO.	PART NO.	DESCRIPTION	Q'TY
1	076-0662-74	PLUG(26P)	1
2	074-1237-70	OUTLET SOCKET	1
3	073-0762-90	TERMINAL	5
4	311-1919-02	LOWER CASE	1
5	331-4126-00	TR HOLDER	1
6	313-1966-00	SUB HEAT SINK	1
7	331-4127-00	REAR PLATE	1
8	074-1194-00	OUTLET SOCKET	1
9	074-1302-08	OUTLET SOCKET	1
10	074-4007-20	OUTLET SOCKET	1
11	092-0702-00	ANT-RECEPT	1
12	941-0221-70	TUNER PACK	2
13	714-2606-8B	MACHINE SCREW(M2.6x6)	4
14	778-3006-00	TAP-SCREW(3x6)	4
15	076-0717-09	PLUG	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	309-0819-00	ES PLATE	1
17	285-1960-00	GUIDE LABEL	1
18	816-4030-50	FLAT WIRE	1
19	929-5005-80	CD-MECH-MODULE	1
20	331-4123-00	CD BRKT	1
21	310-1826-00	UPPER CASE	1
22	286-6449-61 286-6449-62	SETPLATE (2811K) SETPLATE (2883K)	1
23	313-1962-00	HEAT SINK	1
24	714-2606-8B	MACHINE SCREW(M2.6x6)	18
25	331-4193-20	SU-PLATE	2
26	714-2610-89	MACHINE SCREW(M2.6x10)	2
27	716-0878-50	IT SCREW(M2.6x5)	11
28	714-2603-8B	MACHINE SCREW(M2.6x3)	2

CD mechanism section:(929-5005-80)

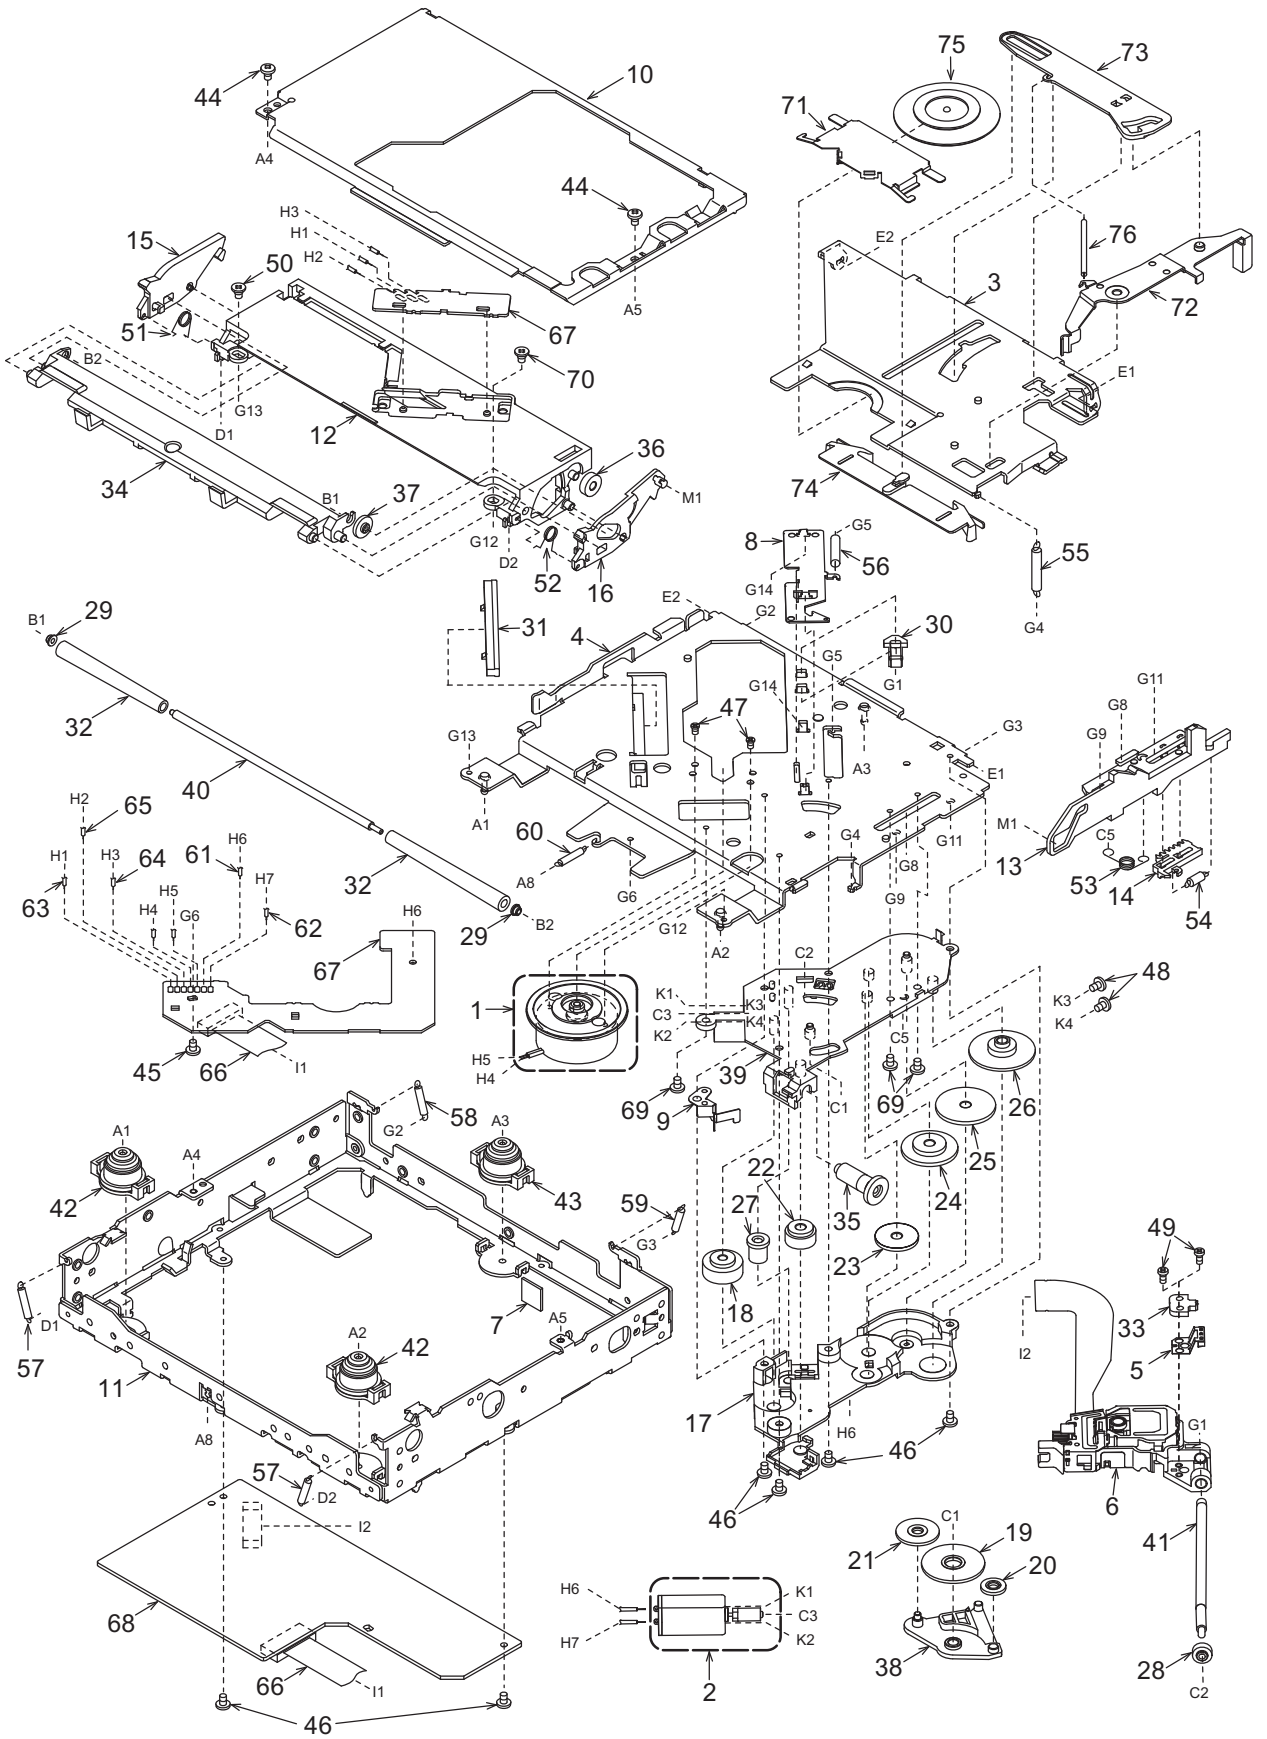

PS-2811K-A
PS-2883K-A

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1
2	SMA-183-100	POW-MOTOR-ASSY	1
3	620-1596-23	CLAMPER LINK	1
4	966-1743-21	DRIVE-PLT-ASSY	1
5	966-1722-20	SH-RACK-ASSY	1
6	969-0071-30	PICKUP-ASSY	1
7	345-5476-20	CUSHION RUBBER	1
8	620-1753-20	ID-LOCK PLATE	1
9	620-1026-21	SPRING PLATE	1
10	620-1598-22	UPPER CHASSIS	1
11	620-1766-20	LOWER CHASSIS-W	1
12	621-1742-20	UPPER GUIDE	1
13	621-1743-20	SHIFT LEVER	1
14	621-1744-20	RACK	1
15	621-1745-20	LOCK ARM L	1
16	621-1746-20	LOCK ARM R	1
17	621-1747-20	GEAR COVER	1
18	621-0608-21	SECOND GEAR	1
19	621-0609-20	BASE GEAR	1
20	621-0610-20	IDLE GEAR A	1
21	621-0611-20	IDLE GEAR B	1
22	621-0612-21	ROLLER GEAR A	1
23	621-1748-20	POWER GEAR A	1
24	621-1749-20	POWER GEAR B	1
25	621-1750-20	POWER GEAR C	1
26	621-1751-20	POWER GEAR D	1
27	621-0620-20	THREAD GEAR A	1
28	621-0621-20	THREAD GEAR B	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-0623-23	LS-HOLDER	1
31	621-0624-22	GUIDE RAIL	1
32	621-0711-20	LOADING ROLLER	2
33	621-1729-20	SH-BASE	1
34	621-0718-21	ROLLER GUIDE	1
35	621-0719-20	ROLLER GEAR	1
36	621-0720-20	ROLLER GEAR C	1
37	621-0721-20	ROLLER GEAR D	1
38	621-1719-20	IDLE CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
39	621-1754-20	GEAR BASE	1
40	622-1571-21	ROLLER SHAFT	1
41	624-0020-00	LEAD SCREW	1
42	629-0086-20	DAMPER F	2
43	629-0087-20	DAMPER R	1
44	714-2003-8B	MACHIN SCREW(M2x3)	2
45	716-1507-01	SCREW(M2x3)	1
46	716-1670-01	SCREW(M2x4)	6
47	716-1733-01	SCREW(M1.7x2.3)	2
48	716-3551-00	SCREW(M1.4x2.5)	2
49	716-3469-01	SCREW(phi1.7x4)	2
50	716-3473-01	SCREW(M2x3)	1
51	750-6797-20	ROLLER SPRING L	1
52	750-6798-20	ROLLER SPRING R	1
53	750-3467-21	SHIFT SPRING	1
54	750-3468-20	RACK SPRING	1
55	750-3469-20	CLAMPER SPRING	1
56	750-3470-20	ID-LOCK SPRING	1
57	750-3472-21	DR-SPRING F	2
58	750-3473-20	DR-SPRING RA	1
59	750-3474-20	DR-SPRING RB	1
60	750-3475-21	DR-SPRING C	1
61	803-4906-60	VINYL-COAT-WIRE(ORG)	1
62	816-2590-00	LEAD(GRN)	1
63	816-2591-00	LEAD(YEL)	1
64	816-2592-00	LEAD(BLU)	1
65	816-2593-00	LEAD(PUR)	1
66	816-2624-50	FLAT WIRE	1
67	----------	SENSOR PWB	1
68	----------	CD PWB	1
69	780-2025-00	SCREW(M2.0x2.5)	3
70	781-1730-00	SCREW(M1.7x3.0)	1
71	620-1023-23	CLAMPER PLATE	1
72	620-1752-20	SENSOR ARM	1
73	621-0728-20	STOPPER LINK	1
74	621-1752-20	DISC STOPPER	1
75	621-1753-20	CLAMPER RING	1
76	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST

Switch PWB section (B1)

Note)Some parts depend on each model.The model name is specified in the descripion .
(2811K;PS-2811K-A, 2883K;PS-2883K-A)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
C100	168-1042-78	16V 0.1uF
C101	168-1042-78	16V 0.1uF
C102	168-1042-78	16V 0.1uF
C103	168-1042-78	16V 0.1uF
C104	168-1042-78	16V 0.1uF
C105	178-1052-78	1uF
D100	001-7048-91	RFR1112H-22 C,D RED
D101	001-7048-91	RFR1112H-22 C,D RED
D102	001-7048-91	RFR1112H-22 C,D RED
D103	001-7048-91	RFR1112H-22 C,D RED
D104	001-7087-90	RBR1112H C,D,E RED
D105	001-7048-91	RFR1112H-22 C,D RED
D106	001-7048-91	RFR1112H-22 C,D RED
D107	001-7048-91	RFR1112H-22 C,D RED
D108	001-7048-91	RFR1112H-22 C,D RED
D113	001-0516-90	MA111
D114	001-0516-90	MA111
D115	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION
D116	001-0516-90	MA111
IC100	051-6084-00	NJU6625FG1-03
J100	074-3013-74	24P
L100	010-3406-66	22uH J
LCD100	379-1362-51	LCD
PL100	017-0420-43	14V 40mA RED
PL101	017-0420-43	14V 40mA RED
PL102	017-0420-43	14V 40mA RED
PL104	017-0420-43	14V 40mA RED
PL105	017-0420-43	14V 40mA RED
PL106	017-0420-43	14V 40mA RED
PL107	017-0420-43	14V 40mA RED
PL108	017-0420-43	14V 40mA RED
PL109	017-0420-43	14V 40mA RED
PL110	017-0420-43	14V 40mA RED
PL111	017-0420-43	14V 40mA RED
R100	119-5611-15	1/10W 560 ohm
R101	119-4711-15	1/10W 470 ohm
R102	119-4711-15	1/10W 470 ohm
R103	119-5611-15	1/10W 560 ohm
R104	119-4711-15	1/10W 470 ohm
R105	119-4711-15	1/10W 470 ohm
R106	119-5611-15	1/10W 560 ohm
R107	119-4711-15	1/10W 470 ohm
R108	119-4711-15	1/10W 470 ohm
R109	119-5611-15	1/10W 560 ohm
R110	119-4711-15	1/10W 470 ohm

REF No.	PART No.	DESCRIPTION
R111	119-4711-15	1/10W 470 ohm
R112	119-8211-15	1/10W 820 ohm
R113	119-8211-15	1/10W 820 ohm
R114	119-7511-15	1/10W 750 ohm
R116	119-0000-05	1/10W 0 ohm JW
R117	119-0000-05	1/10W 0 ohm JW
R119	119-0000-05	1/10W 0 ohm JW
R120	119-0000-05	1/10W 0 ohm JW
R121	119-4341-15	1/10W 430k ohm
R125	119-0000-05	1/10W 0 ohm JW
R126	119-0000-05	1/10W 0 ohm JW
R128	119-1021-15	1/10W 1k ohm
R129	119-1021-15	1/10W 1k ohm
R131	119-0000-05	1/10W 0 ohm JW
R132	119-0000-05	1/10W 0 ohm JW
R200	119-1841-15	1/10W 180k ohm
R201	119-1841-15	1/10W 180k ohm
R202	119-1841-15	1/10W 180k ohm
R203	119-1841-15	1/10W 180k ohm
TH100	002-0306-90	SC20-3J153
TM100	073-0778-90	TERMINAL
VR100	016-0014-12	VR W/SHAFT
VR101	016-0014-12	VR W/SHAFT
PWB	039-2920-00	PWB(WITHOUT COMPONENT)

Main PWB section (B2)

REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT
BL101	941-0221-70	TUNER PACK
C103	168-2232-55	0.022uF K
C104	188-1073-28	10V 100uF
C105	168-1042-78	16V 0.1uF
C106	168-1042-78	16V 0.1uF
C107	188-1073-28	10V 100uF
C108	168-1042-78	16V 0.1uF
C109	168-2232-55	0.022uF K
C111	168-2732-55	0.027uF K
C112	168-4745-79	0.47uF Z
C113	168-3932-78	16V 0.039uF
C114	168-3932-78	16V 0.039uF
C121	166-1501-50	15pF CH
C122	188-4763-38	16V 47uF
C123	168-1022-55	1000pF K
C124	042-1458-90	50V 1uF LN
C125	166-1501-50	15pF CH
C126	166-1011-50	100pF CH
C127	166-1011-50	100pF CH
C128	166-1011-50	100pF CH
C129	166-1011-50	100pF CH
C130	168-2232-55	0.022uF K
C131	188-4763-38	16V 47uF
C132	166-1811-50	180pF CH
C133	168-1042-78	16V 0.1uF
C160	168-1042-78	16V 0.1uF
C212	188-4763-38	16V 47uF
C231	168-1042-78	16V 0.1uF
C232	188-4763-18	6.3V 47uF
C233	168-1042-78	16V 0.1uF
C234	168-2232-55	0.022uF K
C271	189-4773-19	6.3V 470uF
C273	043-0328-90	0.1uF
C274	189-2273-29	10V 220uF
C276	043-0328-90	0.1uF
C301	178-1052-78	1uF

REF No.	PART No.	DESCRIPTION
C302	178-1052-78	1uF
C305	178-1052-78	1uF
C306	178-1052-78	1uF
C309	168-3332-55	0.033uF K
C310	168-3332-55	0.033uF K
C311	188-2253-68	50V 2.2uF
C312	188-2253-68	50V 2.2uF
C313	188-2253-68	50V 2.2uF
C314	188-2253-68	50V 2.2uF
C318	168-1522-55	1500pF K
C319	168-1522-55	1500pF K
C322	188-1063-38	16V 10uF
C323	188-1063-38	16V 10uF
C324	188-1073-28	10V 100uF
C325	168-1042-78	16V 0.1uF
C326	188-1053-68	50V 1uF
C327	188-1053-68	50V 1uF
C328	188-2253-68	50V 2.2uF
C329	188-2253-68	50V 2.2uF
C330	168-2222-55	2200pF K
C331	168-2222-55	2200pF K
C332	178-3342-78	0.33uF
C333	178-3342-78	0.33uF
C334	166-4711-50	470pF CH
C335	166-4711-50	470pF CH
C346	188-1073-28	10V 100uF
C352	168-1042-78	16V 0.1uF
C353	042-1562-15	10V 220uF
C354	166-2201-50	22pF CH
C355	166-2201-50	22pF CH
C356	166-1007-50	10pF CH
C357	166-1007-50	10pF CH
C358	188-1063-38	16V 10uF
C359	188-1063-38	16V 10uF
C360	188-1063-38	16V 10uF
C361	188-1063-38	16V 10uF
C391	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C392	168-1042-78	16V 0.1uF
C393	168-1042-78	16V 0.1uF
C394	168-1042-78	16V 0.1uF
C395	168-1032-55	0.01uF K
C396	163-1053-65	50V 1uF
C397	042-1624-00	16V 4700uF
C398	163-1063-35	16V 10uF
C399	163-1053-65	50V 1uF
C501	168-1042-78	16V 0.1uF
C502	188-4763-18	6.3V 47uF
C503	168-1032-55	0.01uF K
C504	168-1032-55	0.01uF K
C505	168-1032-55	0.01uF K
C506	168-1042-78	16V 0.1uF
C507	188-1053-68	50V 1uF
C509	168-1022-55	1000pF K
C510	168-1022-55	1000pF K
C511	168-1042-78	16V 0.1uF
C512	168-1032-55	0.01uF K
C513	189-1073-29	10V 100uF
C514	168-1042-78	16V 0.1uF
C515	166-1011-50	100pF CH
C516	188-1063-38	16V 10uF
C517	042-0559-00	5.5V 0.1F
C722	168-1042-78	16V 0.1uF
C731	172-1041-15	0.1uF
C732	188-1053-68	50V 1uF
C741	043-0328-90	0.1uF
C744	188-1073-28	10V 100uF
C761	188-1063-38	16V 10uF
C762	188-1063-38	16V 10uF
C771	188-1073-28	10V 100uF
C772	188-1063-38	16V 10uF
C811	172-1041-15	0.1uF
C821	188-1063-38	16V 10uF
CCT501	050-0140-54	1/32W 1k ohm x4J
CCT504	050-0140-54	1/32W 1k ohm x4J

REF No.	PART No.	DESCRIPTION
CCT505	050-0140-54	1/32W 1k ohm x4J
D391	001-0516-90	MA111
D505	001-0516-90	MA111
D506	001-2403-90	M1F60
D507	001-4301-25	HZU4.7B1
D508	001-0466-90	S5688B
D509	001-0504-36	HZS7A1L
D701	001-0424-31	MA4180
D702	001-0424-31	MA4180
D703	001-0424-31	MA4180
D711	001-0466-90	S5688B
D712	001-0466-90	S5688B
D731	001-0466-90	S5688B
D761	001-0504-39	HZS7 B2L
D771	001-0347-43	MA4082L
D772	001-0347-30	MA4051H
D801	001-0592-00	RM4Z
D851	001-4301-68	HZU18B1
IC121	051-6201-90	LC72146M
IC271	051-3333-00	NJM2396F05
IC272	051-3366-00	NJM2396F08
IC301	051-5042-91	CL7639V11
IC351	051-3034-90	NJM4558V
IC391	051-2040-00	TA8276H
IC501	052-3211-30	M30622MGP-D97GP
IC502	051-0869-58	NJM2103M
IC503	051-9400-29	BR93L46F-W
IC504	051-6600-58	HA12187FP
IC741	051-3369-00	NJM2388F84
J231	074-1237-70	20P
J701	074-1194-00	13P CE-NET
J721	074-1302-08	8P
J801	074-4007-20	SOCKET(20P)
L101	010-2003-04	30uH
L102	010-6009-76	22uH J
L103	010-6009-76	22uH J
L121	010-6009-76	22uH J
L231	010-6009-76	22uH J
L501	010-6009-76	22uH J
L502	010-6009-76	22uH J
L801	010-8026-00	210uH
P501	076-0662-74	24P
P503	076-0717-09	9P
Q121	190-1298-00	2SA1298
Q122	190-1298-00	2SA1298
Q123	190-1298-00	2SA1298
Q391	125-2027-91	DTC114EUA
Q392	192-4116-00	2SC4116
Q502	190-1736-00	2SA1736
Q503	192-4116-00	2SC4116
Q504	192-4116-00	2SC4116
Q505	192-4116-00	2SC4116
Q506	193-2118-50	2SD2118F5 R,S
Q701	192-4116-00	2SC4116
Q711	190-1736-00	2SA1736
Q712	192-4116-00	2SC4116
Q761	193-1664-00	2SD1664 P,Q,R
Q762	125-0021-91	DTA114EUA
Q763	125-2027-91	DTC114EUA
Q771	193-2118-00	2SD2118F5 Q,R,S
Q773	192-4116-00	2SC4116
Q775	192-4116-00	2SC4116
Q776	125-0021-91	DTA114EUA
Q777	125-2027-91	DTC114EUA
Q821	190-1736-00	2SA1736
Q822	192-4116-00	2SC4116
R101	119-0000-05	1/10W 0 ohm JW
R102	119-0000-05	1/10W 0 ohm JW
R103	119-1041-15	1/10W 100k ohm
R104	119-2221-15	1/10W 2.2k ohm
R105	119-3911-15	1/10W 390 ohm
R106	119-2221-15	1/10W 2.2k ohm
R107	116-1001-15	1/4W 10 ohm
R108	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R109	119-5121-15	1/10W 5.1k ohm
R111	166-8201-50	82pF CH
R121	119-0000-05	1/10W 0 ohm JW
R122	119-3321-15	1/10W 3.3k ohm
R123	119-4721-15	1/10W 4.7k ohm
R124	119-2221-15	1/10W 2.2k ohm
R125	119-1021-15	1/10W 1k ohm
R127	119-5631-15	1/10W 56k ohm
R128	119-4731-15	1/10W 47k ohm
R130	119-2221-15	1/10W 2.2k ohm
R131	119-1031-15	1/10W 10k ohm
R132	119-1031-15	1/10W 10k ohm
R133	119-2221-15	1/10W 2.2k ohm
R134	119-2221-15	1/10W 2.2k ohm
R135	119-1031-15	1/10W 10k ohm
R271	119-4731-15	1/10W 47k ohm
R274	119-0000-05	1/10W 0 ohm JW
R301	119-1021-15	1/10W 1k ohm
R302	119-1021-15	1/10W 1k ohm
R305	119-1021-15	1/10W 1k ohm
R306	119-1021-15	1/10W 1k ohm
R309	119-1021-15	1/10W 1k ohm
R310	119-1021-15	1/10W 1k ohm
R311	119-5631-15	1/10W 56k ohm
R312	119-5631-15	1/10W 56k ohm
R313	119-5631-15	1/10W 56k ohm
R314	119-5631-15	1/10W 56k ohm
R319	119-1031-15	1/10W 10k ohm
R320	119-1221-15	1/10W 1.2k ohm
R321	119-1031-15	1/10W 10k ohm
R322	119-1221-15	1/10W 1.2k ohm
R323	119-0000-05	1/10W 0 ohm JW
R324	119-0000-05	1/10W 0 ohm JW
R325	119-0000-05	1/10W 0 ohm JW
R326	119-0000-05	1/10W 0 ohm JW
R351	119-8211-15	1/10W 820 ohm
R352	119-1021-15	1/10W 1k ohm
R353	032-0140-50	1/10W 10k ohm F
R354	032-0140-50	1/10W 10k ohm F
R355	032-0140-50	1/10W 10k ohm F
R356	032-0140-50	1/10W 10k ohm F
R357	032-0140-50	1/10W 10k ohm F
R358	032-0140-50	1/10W 10k ohm F
R359	032-0140-50	1/10W 10k ohm F
R360	032-0140-50	1/10W 10k ohm F
R391	119-5631-15	1/10W 56k ohm
R392	119-1221-15	1/10W 1.2k ohm
R393	119-2221-15	1/10W 2.2k ohm
R394	119-2221-15	1/10W 2.2k ohm
R395	119-2221-15	1/10W 2.2k ohm
R396	119-2221-15	1/10W 2.2k ohm
R397	119-1031-15	1/10W 10k ohm
R398	119-4731-15	1/10W 47k ohm
R399	119-4731-15	1/10W 47k ohm
R400	119-1031-15	1/10W 10k ohm
R502	119-4721-15	1/10W 4.7k ohm
R504	119-4721-15	1/10W 4.7k ohm
R510	119-4721-15	1/10W 4.7k ohm
R511	119-4721-15	1/10W 4.7k ohm
R512	119-4721-15	1/10W 4.7k ohm
R513	119-4721-15	1/10W 4.7k ohm
R514	119-1021-15	1/10W 1k ohm
R515	119-1041-15	1/10W 100k ohm
R516	119-1041-15	1/10W 100k ohm
R517	116-1001-15	1/4W 10 ohm
R520	119-4731-15	1/10W 47k ohm
R522	119-4731-15	1/10W 47k ohm
R527	119-4721-15	1/10W 4.7k ohm
R528	032-0140-66	1/10W 220 ohm F
R529	119-1031-15	1/10W 10k ohm
R530	119-1041-15	1/10W 100k ohm
R531	119-1031-15	1/10W 10k ohm
R532	119-4721-15	1/10W 4.7k ohm
R533	119-4721-15	1/10W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R534	119-1021-15	1/10W 1k ohm
R535	119-1031-15	1/10W 10k ohm
R536	119-2221-15	1/10W 2.2k ohm
R537	119-1031-15	1/10W 10k ohm
R538	119-1031-15	1/10W 10k ohm
R539	119-1031-15	1/10W 10k ohm
R540	119-4731-15	1/10W 47k ohm
R541	119-5621-15	1/10W 5.6k ohm
R542	119-2231-15	1/10W 22k ohm
R544	119-4731-15	1/10W 47k ohm
R545	119-6831-15	1/10W 68k ohm
R546	119-1021-15	1/10W 1k ohm
R547	119-1021-15	1/10W 1k ohm
R548	119-1031-15	1/10W 10k ohm
R549	119-3341-15	1/10W 330k ohm
R550	032-0140-22	1/10W 68k ohm F
R551	032-0140-00	1/10W 56k ohm F
R552	117-6821-15	1/8W 6.8k ohm
R553	119-4731-15	1/10W 47k ohm
R554	119-4731-15	1/10W 47k ohm
R555	119-5621-15	1/10W 5.6k ohm
R556	119-1021-15	1/10W 1k ohm
R557	119-2231-15	1/10W 22k ohm
R558	119-2231-15	1/10W 22k ohm
R559	119-1021-15	1/10W 1k ohm
R560	119-1021-15	1/10W 1k ohm
R561	119-1021-15	1/10W 1k ohm
R562	119-1021-15	1/10W 1k ohm
R563	119-0000-05	1/10W 0 ohm JW
R564	119-1021-15	1/10W 1k ohm
R566	119-1021-15	1/10W 1k ohm
R568	119-4731-15	1/10W 47k ohm
R569	119-4731-15	1/10W 47k ohm
R572	119-4731-15	1/10W 47k ohm
R573	119-4731-15	1/10W 47k ohm (2883K)
R574	119-4731-15	1/10W 47k ohm (2811K)
R701	116-1211-15	1/4W 120 ohm
R702	116-6801-15	1/4W 68 ohm
R703	119-2231-15	1/10W 22k ohm
R704	119-2231-15	1/10W 22k ohm
R711	116-2221-15	1/4W 2.2k ohm
R712	117-1031-15	1/8W 10k ohm
R713	116-2221-15	1/4W 2.2k ohm
R714	119-1031-15	1/10W 10k ohm
R715	119-3321-15	1/10W 3.3k ohm
R726	119-1021-15	1/10W 1k ohm
R731	116-5621-15	1/4W 5.6k ohm
R732	116-4721-15	1/4W 4.7k ohm
R761	032-0092-56	1/8W 22k ohm F
R762	119-1541-15	1/10W 150k ohm
R763	032-0092-51	1/8W 1k ohm F
R764	119-1221-15	1/10W 1.2k ohm
R771	119-0000-05	1/10W 0 ohm JW
R772	119-2231-15	1/10W 22k ohm
R773	116-1021-15	1/4W 1k ohm
R774	119-2231-15	1/10W 22k ohm
R779	116-1821-15	1/4W 1.8k ohm
R780	117-1821-15	1/8W 1.8k ohm
R781	119-0000-05	1/10W 0 ohm JW
R793	119-0000-05	1/10W 0 ohm JW
R801	119-0000-05	1/10W 0 ohm JW
R802	119-0000-05	1/10W 0 ohm JW
R821	116-1031-15	1/4W 10k ohm
R822	119-1031-15	1/10W 10k ohm
R823	119-1031-15	1/10W 10k ohm
R824	116-2221-15	1/4W 2.2k ohm
R825	116-2221-15	1/4W 2.2k ohm
R901	119-0000-05	1/10W 0 ohm JW (2883K)
R903	119-0000-05	1/10W 0 ohm JW (2883K)

REF No.	PART No.	DESCRIPTION
R909	119-0000-05	1/10W 0 ohm JW (2811K)
SUP101	060-0122-20	DSP-141N-SOOB
TH711	002-0318-01	1206L035YRT
TM101	073-0762-90	TERMINAL

REF No.	PART No.	DESCRIPTION
TM501	073-0762-90	TERMINAL
TM502	073-0762-90	TERMINAL
TM801	073-0762-90	TERMINAL
TM802	073-0762-90	TERMINAL
X121	061-1066-00	702MHz

REF No.	PART No.	DESCRIPTION
X501	060-1533-90	CSTCE10M0G52-RO
PWB	039-2765-02	PWB(WITHOUT COMPONENT)

CD PWB(B3) section

REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF
C4	168-1042-78	16V 0.1uF
C5	046-1032-78	0.01uF
C9	046-4722-58	4700pF
C10	045-1011-50	100pF
C13	168-1042-78	16V 0.1uF
C16	168-1042-78	16V 0.1uF
C17	046-1032-78	0.01uF
C18	178-1052-78	1uF
C19	046-1032-78	0.01uF
C20	168-1042-78	16V 0.1uF
C21	042-0595-53	4V220uF
C22	168-1042-78	16V 0.1uF
C23	168-1042-78	16V 0.1uF
C24	046-1032-78	0.01uF
C25	045-8097-50	8pF
C26	045-8097-50	8pF
C27	042-0416-52	10V10uF TAN
C28	046-1032-78	0.01uF
C29	168-1042-78	16V 0.1uF
C30	045-1201-50	12pF
C31	168-1042-78	16V 0.1uF
C32	046-1032-78	0.01uF
C33	046-1032-78	0.01uF
C34	046-1032-78	0.01uF
C35	046-1022-58	1000pF
C102	163-1073-35	16V100uF
C103	046-4722-58	4700pF
C104	046-1032-78	0.01uF
C105	168-1042-78	16V 0.1uF
C106	168-1042-78	16V 0.1uF
C107	042-0416-52	10V10uF TAN
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	168-1042-78	16V 0.1uF
C112	168-4732-78	0.047uF
C113	168-4732-78	0.047uF
C114	168-1042-78	16V 0.1uF
C115	045-4701-50	47pF
C116	046-4712-58	470pF
C117	046-4712-58	470pF
C118	168-1042-78	16V 0.1uF
C119	168-1042-78	16V 0.1uF
C120	046-1532-78	0.015uF
C121	046-6822-58	6800pF
C122	168-1042-78	16V 0.1uF
C123	046-1032-78	0.01uF
C126	046-3332-78	0.033uF
C127	046-4722-58	4700pF
C130	168-1042-78	16V 0.1uF
C131	046-1522-58	1500pF
C132	168-1042-78	16V 0.1uF
C133	046-1532-78	0.015uF

REF No.	PART No.	DESCRIPTION
C134	168-1042-78	16V 0.1uF
C135	045-6801-50	50V 68pF
C136	178-1052-78	1uF
C138	168-1042-78	16V 0.1uF
C139	168-1042-78	16V 0.1uF
C140	046-6812-58	680pF
C142	178-1052-78	1uF
C144	042-0560-85	6.3V 100uF
C145	168-1042-78	16V 0.1uF
C146	168-1042-78	16V 0.1uF
C147	178-1052-78	1uF
C148	042-0595-53	4V220uF
C149	163-1073-35	16V100uF
C150	168-1042-78	16V 0.1uF
C151	178-1052-78	1uF
C200	178-1052-78	1uF
CCT1	050-0145-54	1/16W 47k ohm x4
CCT2	050-0145-58	2.2k ohm x 4
CCT3	050-0140-63	1/32W 47k ohm x4J
CCT101	050-0140-68	1/32W 3.3k ohm x4J
D1	001-2610-90	RB480KTL
D2	001-2610-90	RB480KTL
D3	001-2610-90	RB480KTL
D4	001-2610-90	RB480KTL
D5	001-2610-90	RB480KTL
D6	001-2610-90	RB480KTL
D101	001-0367-91	1SS226
IC1	051-7518-18	SN74LVC139APWR
IC2	051-3315-90	TPS76316DBVR
IC3	051-7239-38	SN74AHCT08PWR
IC5	051-5441-08	BD4828G-TR
IC6	051-6700-00	TMS320DA140
IC10	052-5055-34	MBM29DL800BA-90PFTN
IC11	051-6919-08	NJU6391PE
IC12	051-7221-58	SN74AHC1G04HDCKR
IC13	051-7280-38	TC7SU04FU-TE85L
IC14	051-7280-38	TC7SU04FU-TE85L
IC101	051-6069-08	FAN8047G3
IC102	051-6399-00	TC94A15F
J1	074-1138-65	15P
J2	074-1138-60	10P
J3	074-1237-70	20P
Q1	131-1188-50	2SB1188PQR
Q2	125-2004-92	RN1402
Q101	131-1188-50	2SB1188PQR
Q102	131-1188-50	2SB1188PQR
R1	033-4721-15	1/10W 4.7k ohm
R2	033-1041-15	1/10W 100k ohm
R3	033-1041-15	1/10W 100k ohm
R4	033-1031-15	1/10W 10k ohm
R5	033-2231-15	1/10W 22k ohm
R6	033-3911-15	1/10W 390 ohm

REF No.	PART No.	DESCRIPTION
R7	033-4731-15	1/10W 47k ohm
R8	033-1051-15	1/10W 1M ohm
R9	033-3311-15	1/10W 330 ohm
R12	033-4731-15	1/10W 47k ohm
R13	033-1041-15	1/10W 100k ohm
R14	033-4721-15	1/10W 4.7k ohm
R15	033-4721-15	1/10W 4.7k ohm
R16	033-1021-15	1/10W 1k ohm
R17	033-1021-15	1/10W 1k ohm
R19	033-4731-15	1/10W 47k ohm
R20	033-4731-15	1/10W 47k ohm
R23	033-2211-15	1/10W 220 ohm
R24	033-4731-15	1/10W 47k ohm
R28	033-6841-15	1/10W 680k ohm
R29	033-6841-15	1/10W 680k ohm
R30	033-1041-15	1/10W 100k ohm
R31	033-1031-15	1/10W 10k ohm
R32	033-1031-15	1/10W 10k ohm
R33	033-1031-15	1/10W 10k ohm
R34	033-6831-15	1/10W 68k ohm
R35	033-6831-15	1/10W 68k ohm
R36	033-3311-15	1/10W 330 ohm
R43	033-4731-15	1/10W 47k ohm
R44	033-4731-15	1/10W 47k ohm
R45	033-4731-15	1/10W 47k ohm
R101	033-1231-15	1/10W 12k ohm
R102	033-3321-15	1/10W 3.3k ohm
R103	033-3331-15	1/10W 33k ohm
R104	033-4731-15	1/10W 47k ohm
R105	033-4731-15	1/10W 47k ohm
R106	033-2211-15	1/10W 220 ohm
R107	033-2211-15	1/10W 220 ohm
R108	033-1021-15	1/10W 1k ohm
R109	033-1021-15	1/10W 1k ohm
R110	033-4731-15	1/10W 47k ohm
R115	033-0000-05	1/10W 0 ohm
R116	033-5621-15	1/10W 5.6k ohm
R117	033-4731-15	1/10W 47k ohm
R118	033-3341-15	1/10W 330k ohm
R119	033-2231-15	1/10W 22k ohm
R120	033-2231-15	1/10W 22k ohm
R121	117-1001-15	1/10W 10 ohm
R122	033-2211-15	1/10W 220 ohm
R123	117-6811-15	1/10W 680 ohm
R124	032-0162-50	1/10W 0.51 ohm
R126	033-1021-15	1/10W 1k ohm
R127	033-1021-15	1/10W 1k ohm
R130	033-1051-15	1/10W 1M ohm
TM101	073-0768-90	TERMINAL
X1	061-3534-90	16.92MHz
PWB	039-2429-21	PWB(WITHOUT COMPONENTS)

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION
D11	001-7058-90	AN1105W-RR
D12	001-7058-90	AN1105W-RR
J4	074-1138-60	10P

REF No.	PART No.	DESCRIPTION
Q11	060-4015-90	PS1192H
Q12	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING

REF No.	PART No.	DESCRIPTION
S2	013-7413-50	LIMIT
PWB	039-2675-00	PWB(WITHOUT COMPONENTS)