


EXPLODED VIEW

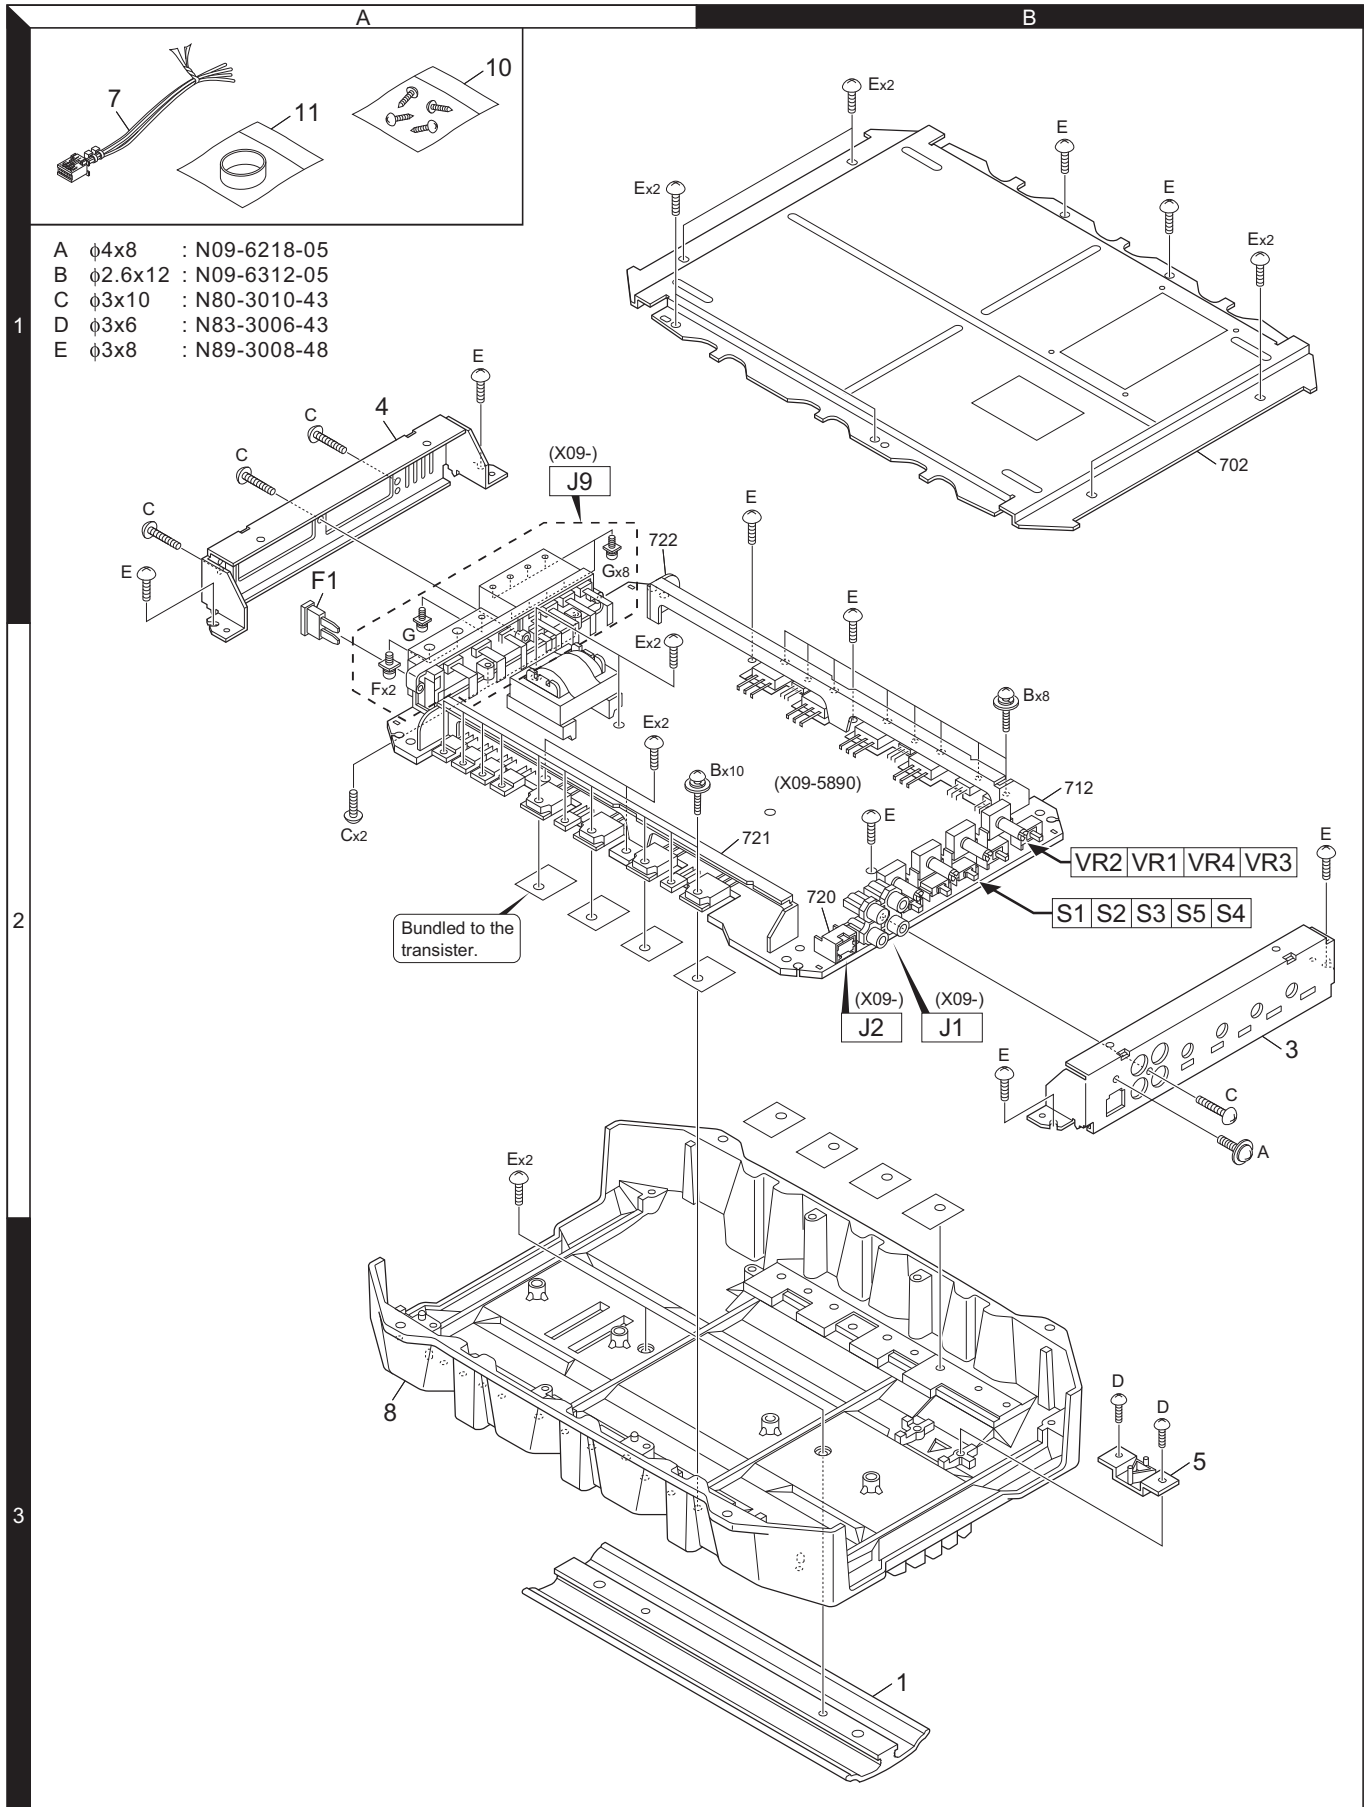

Parts with the exploded numbers larger than 700 are not supplied.

KAC-6402

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Ad	New	Parts No.	Description	Destination
KAC-6402					
1	2B	*	A21-4488-02	DRESSING PANEL	K
1	2B	*	A21-4542-02	DRESSING PANEL	E1M1
3	2B	*	A64-3555-02	PANEL	
4	1A	*	A84-0386-02	REAR PANEL	
5	3B		B19-2324-03	LIGHTING BOARD	
-			B46-0100-50	WARRANTY CARD	
-		*	B64-3045-00	INSTRUCTION MANUAL (ENG.FRE.SPA.)	KE1
-		*	B64-3046-00	INSTR.MANUAL (GER.DUT.ITA.POR.)	E1
-		*	B64-3047-00	INSTRUCTION MANUAL (ENG.T-CHI.)	M1
7	1A		E30-6144-05	CONNECTING CORD ASSY	
8	3A	*	F01-1782-01	HEAT SINK	
△ F1	1A		F52-0014-05	FUSE (BLADE TYPE)	
-		*	H10-4939-13	POLYSTYRENE FOAMED FIXTURE	
-			H25-1192-04	PROTECTION BAG (370X440)	
-			H25-1200-04	PROTECTION BAG (250X350X0.03)	
-		*	H54-3448-03	ITEM CARTON CASE	K
-		*	H54-3449-03	ITEM CARTON CASE	M1
-		*	H54-3501-03	ITEM CARTON CASE	E1
10	1A		N99-1587-05	SCREW SET	
A	2B		N09-6218-05	TAPTITE SCREW (4X8)	
B	2B	*	N09-6312-05	SEMS (TAPTITE SCREW) (2.6X12)	
C	1A		N80-3010-43	PAN HEAD TAPTITE SCREW	
D	3B		N83-3006-43	PAN HEAD TAPTITE SCREW	
E	1B		N89-3008-48	BINDING HEAD TAPTITE SCREW	
F	1A		N07-0003-08	SEMS 6M-AU (ALTERNATIVE PARTS)	
G	2A		N09-4215-08	SEMS 4M-NI	
11	1A		W01-1606-05	ACCESSORIES	
AUDIO UNIT (X09-5890-10)					
D610			B30-1601-05	LED	
C1			C90-5557-05	ELECTRO 10UF 25WV	
C2,3			CD04BJ1E470M	ELECTRO 47UF 25WV	
C4,5			CD04BJ1H100M	ELECTRO 10UF 50WV	
C6,7			CD04AZ1V222M	ELECTRO 2200UF 35WV	
C8			CK45FB1H122K	CERAMIC 1200PF K	
C9		*	CD04AY1C332M	ELECTRO 3300UF 16WV	
C10			C90-5563-05	ELECTRO 2.2UF 50WV	
C11			CK73GB1H103K	CHIP C 0.010UF K	
C12			CD04BJ1E470M	ELECTRO 47UF 25WV	
C13			CC73GCH1H102J	CHIP C 1000PF J	
C14			CD04BJ1H100M	ELECTRO 10UF 50WV	
C15		*	CD04AY1C332M	ELECTRO 3300UF 16WV	
C31-42			CK73GB1H103K	CHIP C 0.010UF K	
C100			CK45FB1H102K	CERAMIC 1000PF K	
C101,102			CK73GB1H102K	CHIP C 1000PF K	
C103,104			CD04BJ1H100M	ELECTRO 10UF 50WV	
C105-108			CC73GCH1H150J	CHIP C 15PF J	
C109,110			CC73GCH1H101J	CHIP C 100PF J	
C111,112			CD04BJ1E470M	ELECTRO 47UF 25WV	
C113-116			CD04BJ1H100M	ELECTRO 10UF 50WV	

Ref. No.	Ad	New	Parts No.	Description	Destination
C117,118			CC73GCH1H101J	CHIP C 100PF J	
C128			CK73GB1H103K	CHIP C 0.010UF K	
C129			CK73GB1H102K	CHIP C 1000PF K	
C150			CC73GCH1H470J	CHIP C 47PF J	
C151,152			CK73GB1H473K	CHIP C 0.047UF K	
C153,154			CK73FB1H334K	CHIP C 0.33UF K	
C155-160			CD04BJ1H100M	ELECTRO 10UF 50WV	
C201,202			CD04BJ1H100M	ELECTRO 10UF 50WV	
C203,204			CK73GB1H471K	CHIP C 470PF K	
C205,206			CK45FB1H472K	CERAMIC 4700PF K	
C207,208			CD04BJ1E470M	ELECTRO 47UF 25WV	
C209,210			CC45FSL1H221J	CERAMIC 220PF J	
C211,212			CC45FSL1H101J	CERAMIC 100PF J	
C213,214			CC45FSL1H470J	CERAMIC 47PF J	
C215,216			CC45FSL1H100D	CERAMIC 10PF D	
C217,218			CK73GB1H103K	CHIP C 0.010UF K	
C219-222			CK73GB1H681K	CHIP C 680PF K	
C223,224			CQ92FM1H473J	MYLAR 0.047UF J	
C259,260			CC73GCH1H470J	CHIP C 47PF J	
C261		*	CD04BJ1V221M	ELECTRO 220UF 35WV	
C300			CK45FB1H102K	CERAMIC 1000PF K	
C301,302			CK73GB1H102K	CHIP C 1000PF K	
C303,304			CD04BJ1H100M	ELECTRO 10UF 50WV	
C305-308			CC73GCH1H150J	CHIP C 15PF J	
C309,310			CC73GCH1H101J	CHIP C 100PF J	
C311,312			CD04BJ1E470M	ELECTRO 47UF 25WV	
C313-316			CD04BJ1H100M	ELECTRO 10UF 50WV	
C317,318			CC73GCH1H101J	CHIP C 100PF J	
C324			CK73GB1H103K	CHIP C 0.010UF K	
C350			CC73GCH1H470J	CHIP C 47PF J	
C351,352			CK73GB1H473K	CHIP C 0.047UF K	
C353,354			CK73FB1H334K	CHIP C 0.33UF K	
C355-360			CD04BJ1H100M	ELECTRO 10UF 50WV	
C401,402			CD04BJ1H100M	ELECTRO 10UF 50WV	
C403,404			CK73GB1H471K	CHIP C 470PF K	
C405,406			CK45FB1H472K	CERAMIC 4700PF K	
C407,408			CD04BJ1E470M	ELECTRO 47UF 25WV	
C409,410			CC45FSL1H221J	CERAMIC 220PF J	
C411,412			CC45FSL1H101J	CERAMIC 100PF J	
C413,414			CC45FSL1H470J	CERAMIC 47PF J	
C415,416			CC45FSL1H100D	CERAMIC 10PF D	
C417,418			CK73GB1H103K	CHIP C 0.010UF K	
C419-422			CK73GB1H681K	CHIP C 680PF K	
C423,424			CQ92FM1H473J	MYLAR 0.047UF J	
C459,460			CC73GCH1H470J	CHIP C 47PF J	
C461		*	CD04BJ1V221M	ELECTRO 220UF 35WV	
C601			CD04BJ1V330M	ELECTRO 33UF 35WV	
C602,603			CD04BJ1H100M	ELECTRO 10UF 50WV	
C606			CD04BJ1A101M	ELECTRO 100UF 10WV	
C607			CK73GB1H103K	CHIP C 0.010UF K	
C608			CD04BJ1A101M	ELECTRO 100UF 10WV	
C609,610			CK73GB1H103K	CHIP C 0.010UF K	
C616			CD04BJ1H100M	ELECTRO 10UF 50WV	
C617			CD04BJ1H0R1M	ELECTRO 0.1UF 50WV	
C901,902			CC73GCH1H030C	CHIP C 3.0PF C	

E1 : Europe K : North America M1 : Other Areas

△ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-5890-10)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
C903,904			CC45FSL1H471J	CERAMIC 470PF J		R205,206			RK73FB2B433J	CHIP R 43K J 1/8W	
C905,906			CC73GCH1H030C	CHIP C 3.0PF C		R207,208			RK73FB2B822J	CHIP R 8.2K J 1/8W	
C907,908			CC45FSL1H471J	CERAMIC 470PF J		R209-212			RK73FB2B821J	CHIP R 820 J 1/8W	
J1		*	E63-0929-05	PIN JACK		R213,214			RK73FB2B101J	CHIP R 100 J 1/8W	
J2			E58-1031-05	RECTANGULAR RECEPTACLE		R215,216			RK73FB2B132J	CHIP R 1.3K J 1/8W	
J9		*	E70-0841-05	SCREW TERMINAL BOARD		R217,218			RK73FB2B152J	CHIP R 1.5K J 1/8W	
L2			L19-0775-05	TRANSFORMER FOR CONVERTER		R219,220			RK73FB2B101J	CHIP R 100 J 1/8W	
L3		*	L33-1920-05	CHOKO COIL		R221,222		*	RK73FB2B622J	CHIP R 6.2K J 1/8W	
C	2A		N80-3010-43	PAN HEAD TAPTITE SCREW		R223-226			RK73FB2B151J	CHIP R 150 J 1/8W	
R1,2			RK73FB2B822J	CHIP R 8.2K J 1/8W		R227,228			RK73FB2B433J	CHIP R 43K J 1/8W	
R5,6			RK73GB2A222J	CHIP R 2.2K J 1/10W		R229,230			RK73FB2B182J	CHIP R 1.8K J 1/8W	
R7			RD14DB2H100J	SMALL-RD 10 J 1/2W		R231,232			RK73FB2B511J	CHIP R 510 J 1/8W	
R8,9			RK73GB2A472J	CHIP R 4.7K J 1/10W		R233,234			RK73FB2B330J	CHIP R 33 J 1/8W	
R10-13			RK73GB2A560J	CHIP R 56 J 1/10W		R235-238			RK73FB2B101J	CHIP R 100 J 1/8W	
R14,15			RK73GB2A152J	CHIP R 1.5K J 1/10W		R239-242			RK73GB2A512J	CHIP R 5.1K J 1/10W	
R16,17			RK73GB2A273J	CHIP R 27K J 1/10W		R243,244			RK73FB2B221J	CHIP R 220 J 1/8W	
R18			RK73GB2A103J	CHIP R 10K J 1/10W		R245-248			RD14NB2E4R7J	RD 4.7 J 1/4W	
R19			RK73GB2A225J	CHIP R 2.2M J 1/10W		R249-252			RK73GB2A182J	CHIP R 1.8K J 1/10W	
R21			RK73GB2A103J	CHIP R 10K J 1/10W		R253-256			R92-0205-05	METAL-PLATE 0.1 K 2W	
R22			RK73GB2A682J	CHIP R 6.8K J 1/10W		R257,258			RD14DB2H100J	SMALL-RD 10 J 1/2W	
R23			RK73GB2A102J	CHIP R 1.0K J 1/10W		R261			RD14NB2E100J	RD 10 J 1/4W	
R24			RK73GB2A163J	CHIP R 16K J 1/10W		R265,266			RK73GB2A103J	CHIP R 10K J 1/10W	
R25			RK73GB2A104J	CHIP R 100K J 1/10W		R300			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R26			RK73GB2A112J	CHIP R 1.1K J 1/10W		R301,302			RD14BB2C102J	RD 1.0K J 1/6W	
R27			RK73GB2A471J	CHIP R 470 J 1/10W		R303,304			RK73GB2A103J	CHIP R 10K J 1/10W	
R100			RK73EB2E102J	CHIP R 1.0K J 1/4W		R305,306			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R101,102			RD14BB2C102J	RD 1.0K J 1/6W		R307,308			RK73GB2A103J	CHIP R 10K J 1/10W	
R103,104			RK73GB2A103J	CHIP R 10K J 1/10W		R309,310			RK73GB2A123J	CHIP R 12K J 1/10W	
R105,106			RK73GB2A102J	CHIP R 1.0K J 1/10W		R311-318			RN73GH1J103D	CHIP R 10K D 1/16W	
R107,108			RK73GB2A103J	CHIP R 10K J 1/10W		R319,320			RK73GB2A473J	CHIP R 47K J 1/10W	
R109,110			RK73GB2A123J	CHIP R 12K J 1/10W		R321,322			RK73EB2E222J	CHIP R 2.2K J 1/4W	
R111-118			RN73GH1J103D	CHIP R 10K D 1/16W		R323-326			RK73EB2E513J	CHIP R 51K J 1/4W	
R119,120			RK73GB2A473J	CHIP R 47K J 1/10W		R327-330			RK73GB2A473J	CHIP R 47K J 1/10W	
R121,122			RK73EB2E222J	CHIP R 2.2K J 1/4W		R351			RK73GB2A101J	CHIP R 100 J 1/10W	
R123-126			RK73EB2E513J	CHIP R 51K J 1/4W		R352-354			RK73GB2A103J	CHIP R 10K J 1/10W	
R127-130			RK73GB2A473J	CHIP R 47K J 1/10W		R355,356			RK73GB2A431J	CHIP R 430 J 1/10W	
R145			RK73GB2A100J	CHIP R 10 J 1/10W		R357,358			RK73GB2A103J	CHIP R 10K J 1/10W	
R151			RK73GB2A101J	CHIP R 100 J 1/10W		R359,360			RK73GB2A203J	CHIP R 20K J 1/10W	
R152-154			RK73GB2A103J	CHIP R 10K J 1/10W		R361,362			RK73GB2A103J	CHIP R 10K J 1/10W	
R155,156			RK73GB2A431J	CHIP R 430 J 1/10W		R363,364			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R157,158			RK73GB2A103J	CHIP R 10K J 1/10W		R365,366			RK73GB2A103J	CHIP R 10K J 1/10W	
R159,160			RK73GB2A203J	CHIP R 20K J 1/10W		R367,368			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R161,162			RK73GB2A103J	CHIP R 10K J 1/10W		R369,370			RK73GB2A163J	CHIP R 16K J 1/10W	
R163,164			RK73GB2A222J	CHIP R 2.2K J 1/10W		R371-374			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R165,166			RK73GB2A103J	CHIP R 10K J 1/10W		R375,376			RK73GB2A101J	CHIP R 100 J 1/10W	
R167,168			RK73GB2A302J	CHIP R 3.0K J 1/10W		R377-380			RK73GB2A473J	CHIP R 47K J 1/10W	
R169,170			RK73GB2A163J	CHIP R 16K J 1/10W		R381,382			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R171-174			RK73GB2A472J	CHIP R 4.7K J 1/10W		R401,402			RK73FB2B302J	CHIP R 3.0K J 1/8W	
R175,176			RK73GB2A101J	CHIP R 100 J 1/10W		R403,404			RK73GB2A104J	CHIP R 100K J 1/10W	
R177-180			RK73GB2A473J	CHIP R 47K J 1/10W		R405,406			RK73FB2B433J	CHIP R 43K J 1/8W	
R181,182			RK73GB2A222J	CHIP R 2.2K J 1/10W		R407,408			RK73FB2B822J	CHIP R 8.2K J 1/8W	
R201,202			RK73FB2B302J	CHIP R 3.0K J 1/8W		R409-412			RK73FB2B821J	CHIP R 820 J 1/8W	
R203,204			RK73GB2A104J	CHIP R 100K J 1/10W		R413,414			RK73FB2B101J	CHIP R 100 J 1/8W	
						R415,416			RK73FB2B132J	CHIP R 1.3K J 1/8W	
						R417,418			RK73FB2B152J	CHIP R 1.5K J 1/8W	

E1 : Europe K : North America M1 : Other Areas

△ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-5890-10)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R419,420			RK73FB2B101J	CHIP R 100 J 1/8W		W309-311			R92-2053-05	CHIP R 0 OHM J 1/8W	
R421,422		*	RK73FB2B622J	CHIP R 6.2K J 1/8W		W312-315			R92-1252-05	CHIP R 0 OHM J 1/16W	
R423-426			RK73FB2B151J	CHIP R 150 J 1/8W		W316-318			R92-2053-05	CHIP R 0 OHM J 1/8W	
R427,428			RK73FB2B433J	CHIP R 43K J 1/8W		W319,320			R92-1252-05	CHIP R 0 OHM J 1/16W	
R429,430			RK73FB2B182J	CHIP R 1.8K J 1/8W		W321			R92-2053-05	CHIP R 0 OHM J 1/8W	
R431,432			RK73FB2B511J	CHIP R 510 J 1/8W		W322			R92-1252-05	CHIP R 0 OHM J 1/16W	
R433,434			RK73FB2B330J	CHIP R 33 J 1/8W		W323-325			R92-2053-05	CHIP R 0 OHM J 1/8W	
R435-438			RK73FB2B101J	CHIP R 100 J 1/8W		W326			R92-1252-05	CHIP R 0 OHM J 1/16W	
R439-442			RK73GB2A512J	CHIP R 5.1K J 1/10W		W327-329			R92-2053-05	CHIP R 0 OHM J 1/8W	
R443,444			RK73FB2B221J	CHIP R 220 J 1/8W		W330,331			R92-1252-05	CHIP R 0 OHM J 1/16W	
R445-448			RD14NB2E4R7J	RD 4.7 J 1/4W		W332-336			R92-2053-05	CHIP R 0 OHM J 1/8W	
R449-452			RK73GB2A182J	CHIP R 1.8K J 1/10W		W337,338			R92-1252-05	CHIP R 0 OHM J 1/16W	
R453-456			R92-0205-05	METAL-PLATE 0.1 K 2W		W339,340			R92-2053-05	CHIP R 0 OHM J 1/8W	
R457,458			RD14DB2H100J	SMALL-RD 10 J 1/2W		W341,342			R92-1252-05	CHIP R 0 OHM J 1/16W	
R461			RD14NB2E100J	RD 10 J 1/4W		W343			R92-2053-05	CHIP R 0 OHM J 1/8W	
R465,466			RK73GB2A103J	CHIP R 10K J 1/10W		W344-349			R92-1252-05	CHIP R 0 OHM J 1/16W	
R602			RK73EB2E821J	CHIP R 820 J 1/4W		W350-352			R92-2053-05	CHIP R 0 OHM J 1/8W	
R603			RD14BB2C101J	RD 100 J 1/6W		W353,354			R92-1252-05	CHIP R 0 OHM J 1/16W	
R604			RK73GB2A103J	CHIP R 10K J 1/10W		W355-363			R92-2053-05	CHIP R 0 OHM J 1/8W	
R605			RK73GB2A333J	CHIP R 33K J 1/10W		W364-366			R92-1252-05	CHIP R 0 OHM J 1/16W	
R606			RK73GB2A103J	CHIP R 10K J 1/10W		W367			R92-2053-05	CHIP R 0 OHM J 1/8W	
R607			RK73GB2A472J	CHIP R 4.7K J 1/10W		W368			R92-1252-05	CHIP R 0 OHM J 1/16W	
R608			RK73EB2E182J	CHIP R 1.8K J 1/4W		W369-371			R92-2053-05	CHIP R 0 OHM J 1/8W	
R609			RK73GB2A333J	CHIP R 33K J 1/10W		W372			R92-1252-05	CHIP R 0 OHM J 1/16W	
R610			RK73GB2A303J	CHIP R 30K J 1/10W		W373-375			R92-2053-05	CHIP R 0 OHM J 1/8W	
R611,612			RK73GB2A362J	CHIP R 3.6K J 1/10W		W376,377			R92-1252-05	CHIP R 0 OHM J 1/16W	
R613			RK73GB2A152J	CHIP R 1.5K J 1/10W		W378-381			R92-2053-05	CHIP R 0 OHM J 1/8W	
R614			RK73GB2A332J	CHIP R 3.3K J 1/10W		W382-389			R92-1252-05	CHIP R 0 OHM J 1/16W	
R615,616			RD14BB2C392J	RD 3.9K J 1/6W		W390-402			R92-2053-05	CHIP R 0 OHM J 1/8W	
R617			RK73GB2A123J	CHIP R 12K J 1/10W		W403-407			R92-1252-05	CHIP R 0 OHM J 1/16W	
R618			RD14BB2C222J	RD 2.2K J 1/6W		W408			R92-2053-05	CHIP R 0 OHM J 1/8W	
R620-623			RK73GB2A473J	CHIP R 47K J 1/10W		W409-412			R92-1252-05	CHIP R 0 OHM J 1/16W	
R629			RK73GB2A103J	CHIP R 10K J 1/10W		W413			R92-2053-05	CHIP R 0 OHM J 1/8W	
R632			RK73GB2A473J	CHIP R 47K J 1/10W		W414			R92-1252-05	CHIP R 0 OHM J 1/16W	
R633,634			RK73GB2A123J	CHIP R 12K J 1/10W		W415			R92-2053-05	CHIP R 0 OHM J 1/8W	
R635			RK73GB2A622J	CHIP R 6.2K J 1/10W		W416-420			R92-1252-05	CHIP R 0 OHM J 1/16W	
R636			RK73GB2A222J	CHIP R 2.2K J 1/10W		W421			R92-2053-05	CHIP R 0 OHM J 1/8W	
R637			RK73GB2A103J	CHIP R 10K J 1/10W		S1-3			S62-0842-05	SLIDE SWITCH	
R659			RK73GB2A104J	CHIP R 100K J 1/10W		S4,5			S31-2630-05	SLIDE SWITCH	
R660			RK73GB2A154J	CHIP R 150K J 1/10W		D1			RM4ZLF-J4NF	DIODE	
R661,662			RK73GB2A220J	CHIP R 22 J 1/10W		D2,3			02DZ16F-Y	ZENER DIODE	
R663,664			RK73GB2A103J	CHIP R 10K J 1/10W		D4			FCH10A20	DIODE	
R665			RK73GB2A682J	CHIP R 6.8K J 1/10W		D5			FRH10A20	DIODE	
R666			RK73GB2A103J	CHIP R 10K J 1/10W		D6			LM1MA142WK-G	DIODE	
R667			RK73GB2A682J	CHIP R 6.8K J 1/10W		D7-9			1SS355	DIODE	
R668			RK73GB2A103J	CHIP R 10K J 1/10W		D22			1SS355	DIODE	
R669			RK73GB2A473J	CHIP R 47K J 1/10W		D32,33			UMZ6.8N	ZENER DIODE	
R670			RK73GB2A682J	CHIP R 6.8K J 1/10W		D34			LM1MA142WK-G	DIODE	
R671			RK73GB2A513J	CHIP R 51K J 1/10W		D35			LM1MA142WA-G	DIODE	
VR1,2		*	R31-0232-15	VARIABLE RESISTOR		D36			LM1MA142WK-G	DIODE	
VR3,4		*	R31-0215-15	VARIABLE RESISTOR		D37			LM1MA142WA-G	DIODE	
VR5-8		*	R32-0116-05	SEMI FIXED VARIABLE RESISTOR		D101-104			1SS355	DIODE	
W301-305			R92-1252-05	CHIP R 0 OHM J 1/16W		D105			LM1MA142WK-G	DIODE	
W306,307			R92-2053-05	CHIP R 0 OHM J 1/8W		D106			LM1MA142WA-G	DIODE	
W308			R92-1252-05	CHIP R 0 OHM J 1/16W							

E1 : Europe K : North America M1 : Other Areas

△ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-5890-10)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D107-110			1SS355	DIODE		Q617			2SA1576A(R,S)	TRANSISTOR	
D111			LM1MA142WK-G	DIODE		Q618			2SC4081	TRANSISTOR	
D201			1SS355	DIODE		TH1			NT732ATTD103J	THERMISTOR	
D203,204			1SS355	DIODE							
D205			LM1MA142WK-G	DIODE							
D206			LM1MA142WA-G	DIODE							
D207-210			1SS355	DIODE							
D211			LM1MA142WK-G	DIODE							
D229			LM1MA142WA-G	DIODE							
D430			LM1MA142WA-G	DIODE							
D601-603			1SS355	DIODE							
D604			02DZ10F-Y	ZENER DIODE							
D605			1SS355	DIODE							
D606			02DZ15F-Y	ZENER DIODE							
D607			02DZ6.8F-Y	ZENER DIODE							
D613			1SS355	DIODE							
D614			02DZ10F-Y	ZENER DIODE							
D616			1SS355	DIODE							
IC1-12			RC4580IDR	ANALOGUE IC							
IC13			TL494IDR	ANALOGUE IC							
Q3			2SD2012-F	TRANSISTOR							
Q4			2SB1375-F	TRANSISTOR							
Q5,6			2SK3662-F	FET							
Q7,8			2SC4097	TRANSISTOR							
Q9,10			2SA1577	TRANSISTOR							
Q11,12			DTA114EUA	DIGITAL TRANSISTOR							
Q101,102			2SC4081	TRANSISTOR							
Q103-106			2SA1576A(R,S)	TRANSISTOR							
Q107-110			2SC1845-A(F,E)	TRANSISTOR							
Q111,112			2SA992-A(F,E)	TRANSISTOR							
Q113,114			2SC3419(Y)-F	TRANSISTOR							
Q115,116			2SC1845-A(F,E)	TRANSISTOR							
Q117,118			2SA992-A(F,E)	TRANSISTOR							
Q119,120			2SC1627A-F	TRANSISTOR							
Q121,122			2SA817A-F	TRANSISTOR							
Q123,124			2SC4467NF	TRANSISTOR							
Q125,126			2SA1694NF	TRANSISTOR							
Q201,202			2SC4081	TRANSISTOR							
Q203-206			2SA1576A(R,S)	TRANSISTOR							
Q207-210			2SC1845-A(F,E)	TRANSISTOR							
Q211,212			2SA992-A(F,E)	TRANSISTOR							
Q213,214			2SC3419(Y)-F	TRANSISTOR							
Q215,216			2SC1845-A(F,E)	TRANSISTOR							
Q217,218			2SA992-A(F,E)	TRANSISTOR							
Q219,220			2SC1627A-F	TRANSISTOR							
Q221,222			2SA817A-F	TRANSISTOR							
Q223,224			2SC4467NF	TRANSISTOR							
Q225,226			2SA1694NF	TRANSISTOR							
Q601,602			2SC4081	TRANSISTOR							
Q603			2SA1576A(R,S)	TRANSISTOR							
Q604			2SB1241	TRANSISTOR							
Q605,606			2SC4081	TRANSISTOR							
Q610-613			2SC4081	TRANSISTOR							
Q614,615			2SA1576A(R,S)	TRANSISTOR							
Q616			2SC4081	TRANSISTOR							

E1 : Europe K : North America M1 : Other Areas

△ Indicates safety critical components.