PARTS LIST

* New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia K: USA P: Canada
Y: PX (Far East, Hawaii) T: England E: Europe
Y: AAFES (Europe) X: Australia M: Other Areas

TH-D7A/E

TX-RX UNIT (X57-570X-XX)

Ref. No.	Adress	New parts	Parts No.	Description	Destination
TH-D7A/E (Y50-483)					
1	1B	*	A02-2356-13	CABINET ASSY(FRONT)	
2	1A	*	A62-0624-03	PANEL ASSY (TOP)	
3	1B		B09-0362-03	CAP (DC IN)	
4	1A	*	B09-0397-03	CAP (MIC/SP/PC/GPS)	
5	1A	*	B10-2537-13	FRONT GLASS	
6	2A	*	B11-1210-02	ILLUMINATION GUIDE(LCD)	
7	2A	*	B38-0805-05	LCD ASSY	
8	-		B46-0310-03	WARRANTY CARD ACSY	E
8	-		B46-0410-00	WARRANTY CARD ACSY	K
10	-	*	B62-1004-00	INSTRUCTION MANUAL(ENG) ACSY	
11	-	*	B62-1076-00	INSTRUCTION MANUAL(SPA) ACSY	
13	3A		E04-0407-05	RF COAXIAL RECEPTACLE(SMA)	
14	2A		E23-0904-05	TERMINAL (ANT)	
15	2B		E23-1042-14	TERMINAL (BATTERY)	
16	2A	*	E23-1123-04	GROUND TERMINAL(CONT-RF)	
17	2B		E37-0681-05	FLAT CABLE	
20	-	*	E30-3374-05	CABLE WITH 2.5D PLUG	
18	2A		F10-2251-04	SHIELDING COVER(P MODULE)	
19	2A	*	F10-2266-03	SHIELDING COVER(RF)	
21	1B		G01-0891-04	COIL SPRING (RELEASE)	
22	2B	*	G11-2569-04	SHEET (PTT)	
23	2A		G13-1460-04	CUSHION (VOL/ENC)	
24	2B		G13-1684-04	CUSHION (RF SHIELD)	
25	3A	*	G53-0843-02	PACKING (CABINET)	
26	2A	*	G53-0844-03	PACKING (SP/MIC)	
27	-	*	H12-3038-01	PACKING FIXTURE	
28	-		H25-0085-04	PROTECTION BAG (160/200/0.07)	
29	-	*	H52-1199-02	ITEM CARTON CASE	K
29	-	*	H52-1264-02	ITEM CARTON CASE	E
31	2B		J19-1599-03	HOLDER (BATT TERMINAL)	
32	1B		J19-5302-04	HOLDER (RELEASE)	
33	2B	*	J21-8362-04	HARDWARE FIXTURE(PTT)	
34	1B	*	J21-8363-04	HARDWARE FIXTURE(BOTTAM)	
35	-		J29-0631-13	HOOK ACSY	
36	-		J69-0342-05	HANDSTRAP ACSY	
37	1B		K29-5165-03	LEVER KNOB (RELEASE)	
38	1A	*	K29-5256-02	BUTTON KNOB(PTT)	
39	1A	*	K29-5257-03	KNOB (VOL)	
40	1B	*	K29-5258-01	KEY TOP	
41	1A	*	K29-5259-03	KNOB (ENC)	
A	2A		N09-1492-05	PAN HEAD SCREW (SMA)	
B	1A		N14-0573-04	CIRCULAR NUT(SMA)	
C	2A		N30-2605-46	PAN HEAD MACHINE SCREW(P MODUL	
D	3B		N80-2012-45	PAN HEAD TAPTITE SCREW(CABINET	
E	2B		N83-2605-46	PAN HEAD TAPTITE SCREW	
SP	1A		T07-0266-05	SPEAKER	
ANT	-		T90-0634-05	WHIP ANTENNA ACSY	
42	-		W08-0437-05	CHARGER(120V 13.5V) ACSY	K
42	-		W08-0440-05	CHARGER(230V 13.5V) ACSY	E
BATT	-		W09-0909-05	BATTERY ASSY(6V 650mAh) ACSY	E
BATT	-		W09-0911-05	BATTERY ASSY(9.6V 800mAh) ACSY	K
TX-RX UNIT (X57-570X-XX) 0-11:K, 2-71:E					
C1			CK73HB1H471K	CHIP C 470PF K	
C2			CK73GB1H471K	CHIP C 470PF K	
C3 -5			CK73HB1H471K	CHIP C 470PF K	
C6			CK73GB1H471K	CHIP C 470PF K	
C7 ,8			CK73HB1H471K	CHIP C 470PF K	
C9			CK73GB1H102K	CHIP C 1000PF K	
C10 ,11			CK73HB1H471K	CHIP C 470PF K	
C12			CK73GB1H102K	CHIP C 1000PF K	
C13			CK73GB1C104K	CHIP C 0.10UF K	
C14			CK73HB1H102K	CHIP C 1000PF K	
C15			CK73GB1C104K	CHIP C 0.10UF K	
C16			CK73GB1H102K	CHIP C 1000PF K	
C17			CK73GB1H471K	CHIP C 470PF K	
C18			CK73GB1H102K	CHIP C 1000PF K	
C19			CK73GB1E103K	CHIP C 0.010UF K	
C20			CK73GB1H102K	CHIP C 1000PF K	
C21			CK73HB1H102K	CHIP C 1000PF K	
C22			CK73HB1H471K	CHIP C 470PF K	
C23			CK73GB1H102K	CHIP C 1000PF K	
C24			CK73HB1H471K	CHIP C 470PF K	
C25			CK73GB1H102K	CHIP C 1000PF K	
C26 -28			C92-0565-05	CHIP-TAN 6.8UF 10WV	
C29			CK73GB1H471K	CHIP C 470PF K	
C30			C92-0565-05	CHIP-TAN 6.8UF 10WV	
C31			CK73HB1H102K	CHIP C 1000PF K	
C32			CK73HB1H471K	CHIP C 470PF K	
C33 -35			CK73FB1A105K	CHIP C 1.0UF K	
C36 ,37			CK73GB1C104K	CHIP C 0.10UF K	
C38 -41			CK73HB1H471K	CHIP C 470PF K	
C42			CK73GB1C104K	CHIP C 0.10UF K	
C43			CK73GB1H471K	CHIP C 470PF K	
C44 ,45			CK73HB1H471K	CHIP C 470PF K	
C46			CK73GB1H471K	CHIP C 470PF K	
C47			CK73GB1C104K	CHIP C 0.10UF K	
C48		*	CK73HB1A104K	CHIP C 0.10UF K	
C49			CK73FB1A105K	CHIP C 1.0UF K	
C50		*	CC73HCH1E181J	CHIP C 180PF J	
C51			CK73GB1H471K	CHIP C 470PF K	
C52			CK73HB1H102K	CHIP C 1000PF K	
C53			CC73HCH1H070D	CHIP C 7.0PF D	
C54			CC73HCH1H390J	CHIP C 39PF J	
C55			CC73HCH1H220J	CHIP C 22PF J	
C56 ,57			CK73HB1H102K	CHIP C 1000PF K	
C58			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C59 ,60			CK73HB1H471K	CHIP C 470PF K	
C65			C92-0518-05	CHIP-TAN 0.22UF 20WV	
C66			CK73HB1H471K	CHIP C 470PF K	
C67			C92-0694-05	TAN C 10UF 16WV	
C68			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C69		*	C92-0715-05	TAN C 0.33UF 20WV	
C70			CK73HB1H471K	CHIP C 470PF K	
C71			CC73HCH1H020C	CHIP C 2.0PF C	
C72 ,73			CK73HB1H471K	CHIP C 470PF K	

PARTS LIST

TX-RX UNIT (X57-570X-XX)

Ref. No.	Adress	New parts	Parts No.	Description	Destination
C74			CC73HCH1H060D	CHIP C 6.0PF D	
C75			CC73HCH1H080D	CHIP C 8.0PF D	
C76			CK73HB1H471K	CHIP C 470PF K	
C78			CK73HB1H471K	CHIP C 470PF K	
C79			CC73HCH1H060D	CHIP C 6.0PF D	
C80			CC73HCH1H100D	CHIP C 10PF D	
C81			CC73HCH1H060D	CHIP C 6.0PF D	
C82			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C83,84			CK73HB1H102K	CHIP C 1000PF K	
C89			C92-0518-05	CHIP-TAN 0.22UF 20WV	
C90			CK73HB1H102K	CHIP C 1000PF K	
C91			C92-0694-05	TAN C 10UF 16WV	
C92			C92-0592-05	CHIP-TAN 4.7UF 6.3WV	
C93		*	C92-0715-05	TAN C 10UF 16WV	
C94-96			CK73HB1H102K	CHIP C 1000PF K	
C98			CK73HB1H102K	CHIP C 1000PF K	
C99			CC73HCH1H080D	CHIP C 8.0PF D	
C100			CK73HB1H102K	CHIP C 1000PF K	
C102			CK73HB1H102K	CHIP C 1000PF K	
C104			CC73HCH1H100D	CHIP C 10PF D	
C106			CC73HCH1H050C	CHIP C 5.0PF C	
C108			C92-0623-05	CHIP TAN 22UF 4WV	
C109			CC73HCH1H100D	CHIP C 10PF D	
C110			CK73GB1C104K	CHIP C 0.10UF K	
C112			CK73GB1C104K	CHIP C 0.10UF K	
C113			CK73HB1C103K	CHIP C 0.010UF K	
C114			CC73HCH1H101J	CHIP C 100PF J	
C115			CK73GB1C104K	CHIP C 0.10UF K	
C116,117			CC73HCH1H121J	CHIP C 120PF J	
C118			CC73HCH1E221J	CHIP C 220PF J	
C119			CK73GB1H472K	CHIP C 4700PF K	
C120			CC73HCH1H150J	CHIP C 15PF J	
C121			CC73HCH1H100D	CHIP C 10PF D	
C122			CK73GB1E103K	CHIP C 0.010UF K	
C123			CK73HB1H471K	CHIP C 470PF K	
C125			CC73GCH1H030C	CHIP C 3.0PF C	
C126			CC73GCH1H060D	CHIP C 6.0PF D	
C127			CK73GB1H102K	CHIP C 1000PF K	
C129			CK73HB1H471K	CHIP C 470PF K	
C131			CK73GB1E103K	CHIP C 0.010UF K	
C132			CK73HB1H102K	CHIP C 1000PF K	
C133			CC73HCH1H220J	CHIP C 22PF J	
C134			CK73HB1C103K	CHIP C 0.010UF K	
C135			CC73HCH1H050C	CHIP C 5.0PF C	
C136			CK73HB1H102K	CHIP C 1000PF K	
C137			CC73HCH1H270J	CHIP C 27PF J	
C138			C92-0623-05	CHIP TAN 22UF 4WV	
C139,140			CK73GB1C104K	CHIP C 0.10UF K	
C142			CK73HB1C103K	CHIP C 0.010UF K	
C143			CC73HCH1H101J	CHIP C 100PF J	
C144			CK73GB1C104K	CHIP C 0.10UF K	
C145,146			CC73HCH1H121J	CHIP C 120PF J	
C147			CC73HCH1E221J	CHIP C 220PF J	
C148			CK73HB1E472K	CHIP C 4700PF K	
C149			CC73HCH1H150J	CHIP C 15PF J	
C151			CK73GB1E103K	CHIP C 0.010UF K	
C152			CK73HB1H102K	CHIP C 1000PF K	
C153			CK73GB1E103K	CHIP C 0.010UF K	
C155			CK73HB1H102K	CHIP C 1000PF K	
C159			CK73HB1H102K	CHIP C 1000PF K	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
C160			CC73HCH1H390J	CHIP C 39PF J	
C163-165		*	CK73HB1A104K	CHIP C 0.10UF K	
C166			CK73HB1H102K	CHIP C 1000PF K	
C167			CK73GB1C104K	CHIP C 0.10UF K	
C168		*	CK73HB1A104K	CHIP C 0.10UF K	
C169			CK73GB1C104K	CHIP C 0.10UF K	
C170			CK73HB1H102K	CHIP C 1000PF K	
C171			CK73HB1C103K	CHIP C 0.010UF K	
C172			CK73FB1A105K	CHIP C 1.0UF K	
C173			CK73GB1C104K	CHIP C 0.10UF K	
C174			CK73HB1H471K	CHIP C 470PF K	
C175			CC73HCH1H180J	CHIP C 18PF J	
C177			CK73HB1H471K	CHIP C 470PF K	
C179			CK73HB1H471K	CHIP C 470PF K	
C180			CC73HCH1H040C	CHIP C 4.0PF C	
C181,182			CK73HB1H471K	CHIP C 470PF K	
C184			C92-0565-05	CHIP-TAN 6.8UF 10WV	
C185			CK73HB1H471K	CHIP C 470PF K	
C186			CC73HCH1H070D	CHIP C 7.0PF D	
C187			CK73HB1C103K	CHIP C 0.010UF K	
C188,189			CK73HB1H471K	CHIP C 470PF K	
C190			CK73GB1H471K	CHIP C 470PF K	
C192			CK73FB1C474K	CHIP C 0.47UF K	
C193			CK73HB1C103K	CHIP C 0.010UF K	
C194			CK73HB1H471K	CHIP C 470PF K	
C197			CK73GB1H471K	CHIP C 470PF K	
C198			CC73GCH1H060D	CHIP C 6.0PF D	
C199			CC73GCH1H040C	CHIP C 4.0PF C	
C200			CC73GCH1H010C	CHIP C 1.0PF C	
C201			CC73GCH1H050C	CHIP C 5.0PF C	
C202			CC73GCH1H100D	CHIP C 10PF D	
C203			CC73GCH1H030C	CHIP C 3.0PF C	
C204			CK73GB1H471K	CHIP C 470PF K	
C206			CC73GCH1H390J	CHIP C 39PF J	
C207			CC73GCH1H220J	CHIP C 22PF J	
C208			CC73GCH1H040C	CHIP C 4.0PF C	
C210			CC73HCH1H070D	CHIP C 7.0PF D	
C211			CK73GB1H102K	CHIP C 1000PF K	
C212			CK73HB1H471K	CHIP C 470PF K	
C213			CC73HCH1H180J	CHIP C 18PF J	
C214			CK73HB1H471K	CHIP C 470PF K	
C215			CC73HCH1H040C	CHIP C 4.0PF C	
C216			CK73HB1C103K	CHIP C 0.010UF K	
C217			CK73GB1H471K	CHIP C 470PF K	
C218			CK73HB1H471K	CHIP C 470PF K	
C219			CC73HCH1H030C	CHIP C 3.0PF C	
C220			CK73HB1H471K	CHIP C 470PF K	
C221			CK73GB1C104K	CHIP C 0.10UF K	
C222,223			CK73HB1H471K	CHIP C 470PF K	
C224			CC73HCH1H060D	CHIP C 6.0PF D	
C225			CC73HCH1H030C	CHIP C 3.0PF C	
C226,227			CK73HB1H471K	CHIP C 470PF K	
C228			CC73HCH1H220J	CHIP C 22PF J	
C229			CC73HCH1H0R5B	CHIP C 0.5PF B	
C230			CC73HCH1H220J	CHIP C 22PF J	
C231			CK73HB1H471K	CHIP C 470PF K	
C232			CC73HCH1H070D	CHIP C 7.0PF D	
C233			CK73HB1H471K	CHIP C 470PF K	
C234			CC73HCH1H090D	CHIP C 9.0PF D	
C235			CK73HB1H471K	CHIP C 470PF K	

PARTS LIST

TX-RX UNIT (X57-570X-XX

Ref. No.	Adress	New parts	Parts No.	Description	Destination
C236			CK73GB1C104K	CHIP C 0.10UF K	
C238			CK73HB1H471K	CHIP C 470PF K	
C239			CK73HB1H471K	CHIP C 470PF K E	
C262			CK73HB1H102K	CHIP C 1000PF K	
C263			CC73HCH1H330J	CHIP C 33PF J	
C264			CK73HB1H102K	CHIP C 1000PF K	
C265			CC73HCH1H060D	CHIP C 6.0PF D	
C266			CK73HB1H102K	CHIP C 1000PF K	
C267			C92-0565-05	CHIP-TAN 6.8UF 10WV	
C268			CK73HB1H102K	CHIP C 1000PF K	
C269			CK73HB1C103K	CHIP C 0.010UF K	
C270			CK73HB1H102K	CHIP C 1000PF K	
C271,272			CC73HCH1H330J	CHIP C 33PF J	
C274			CK73HB1H102K	CHIP C 1000PF K	
C275			CK73FB1C474K	CHIP C 0.47UF K	
C276			CK73HB1C103K	CHIP C 0.010UF K	
C277			CK73HB1H102K	CHIP C 1000PF K	
C278			CC73HCH1H120J	CHIP C 12PF J	
C279			CK73HB1H102K	CHIP C 1000PF K	
C281			CC73GCH1H090D	CHIP C 9.0PF D	
C282			CC73GCH1H160J	CHIP C 16PF J	
C283			CC73GCH1H060D	CHIP C 6.0PF D	
C284			CC73GCH1H270J	CHIP C 27PF J	
C285			CK73GB1C104K	CHIP C 0.10UF K	
C286			CK73HB1H102K	CHIP C 1000PF K	
C288			CK73HB1H102K	CHIP C 1000PF K	
C290			CK73HB1H102K	CHIP C 1000PF K	
C292			CK73HB1H102K	CHIP C 1000PF K	
C293			CC73HCH1H050C	CHIP C 5.0PF C	
C294			CK73HB1H102K	CHIP C 1000PF K	
C295			CK73HB1C103K	CHIP C 0.010UF K	
C296			CC73HCH1H030C	CHIP C 3.0PF C	
C300,301			C92-0592-05	CHIP-TAN 4.7UF 6.3WV	
C302			CC73HCH1H090D	CHIP C 9.0PF D	
C303			CK73HB1H102K	CHIP C 1000PF K	
C304			CC73HCH1H090D	CHIP C 9.0PF D	
C306-309			CK73HB1H102K	CHIP C 1000PF K	
C310			CK73HB1C103K	CHIP C 0.010UF K	
C311			CC73HCH1H050C	CHIP C 5.0PF C	
C313			CK73HB1H102K	CHIP C 1000PF K	
C315		*	CC73HCH1H240J	CHIP C 24PF J	
C316			CK73HB1H102K	CHIP C 1000PF K	
C317			CK73GB1C104K	CHIP C 0.10UF K	
C319,320			CK73HB1H102K	CHIP C 1000PF K	
C321			CC73HCH1H150J	CHIP C 15PF J	
C322,323			CK73HB1H102K	CHIP C 1000PF K	
C324			CK73GB1H102K	CHIP C 1000PF K	
C325			CC73HCH1H270J	CHIP C 27PF J	
C328			CC73HCH1H470J	CHIP C 47PF J	
C329			CC73HCH1H060D	CHIP C 6.0PF D	
C330			CC73HCH1H330J	CHIP C 33PF J	
C331			CC73HCH1H390J	CHIP C 39PF J	
C332			CC73HCH1H330J	CHIP C 33PF J	
C333			CC73HCH1H390J	CHIP C 39PF J	
C335			CC73HCH1H050C	CHIP C 5.0PF C	
C336			CK73FB1A105K	CHIP C 1.0UF K	
C337,338			CK73GB1C104K	CHIP C 0.10UF K	
C339			CK73FB1A105K	CHIP C 1.0UF K	
C340			CK73GB1C104K	CHIP C 0.10UF K	
C342			CK73HB1H471K	CHIP C 470PF K	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
C343			CC73GCH1H040C	CHIP C 4.0PF C	
C345			CK73GB1C104K	CHIP C 0.10UF K	
C347			CK73HB1C103K	CHIP C 0.010UF K	
C348,349			CK73HB1H102K	CHIP C 1000PF K	
C353			CC73GCH1H101J	CHIP C 100PF J	
C354			CC73GCH1H060D	CHIP C 6.0PF D	
C355			CC73GCH1H120J	CHIP C 12PF J	
C356			CC73GCH1H330J	CHIP C 33PF J	
C357			CC73GCH1H050C	CHIP C 5.0PF C	
C358			CC73GCH1H010C	CHIP C 1.0PF C	
C359			CC73GCH1H220J	CHIP C 22PF J	
C360			CC73GCH1H090D	CHIP C 9.0PF D	
C361			CC73GCH1H040C	CHIP C 4.0PF C	
C362			CC73GCH1H030C	CHIP C 3.0PF C	
C363			CC73GCH1H220J	CHIP C 22PF J	
C364			CC73GCH1H020C	CHIP C 2.0PF C	
C365			CC73GCH1H120J	CHIP C 12PF J	
C366			CC73HCH1H010C	CHIP C 1.0PF C	
C367			CC73HCH1H0R5B	CHIP C 0.5PF B	
C368			CK73HB1H102K	CHIP C 1000PF K	
C369			CK73GB1C104K	CHIP C 0.10UF K	
C370,371			CK73HB1H102K	CHIP C 1000PF K	
C372			CC73HCH1H100D	CHIP C 10PF D	
C373			CC73HCH1H090D	CHIP C 9.0PF D	
C374			CC73HCH1H0R5B	CHIP C 0.5PF B	
C375			CK73HB1C103K	CHIP C 0.010UF K	
C376-378			CK73HB1H102K	CHIP C 1000PF K	
C379		*	CK73HB1A104K	CHIP C 0.10UF K	
C380			CK73GB1C104K	CHIP C 0.10UF K	
C381			CC73HCH1H100D	CHIP C 10PF D	
C382			CK73HB1H471K	CHIP C 470PF K	
C384			CC73HCH1H030C	CHIP C 3.0PF C	
C385			CK73HB1C103K	CHIP C 0.010UF K	
C392			CK73HB1H471K	CHIP C 470PF K	
C393		*	CK73HB1A104K	CHIP C 0.10UF K	
C396			CK73HB1H471K	CHIP C 470PF K	
C397			CK73HB1C103K	CHIP C 0.010UF K	
C398			CC73HCH1H680J	CHIP C 68PF J	
C500			CK73HB1H471K	CHIP C 470PF K	
C503,504			CK73HB1H471K	CHIP C 470PF K	
C510			C92-0665-05	TANTAL 100UF 6.3WV	
C511-513			CK73HB1C103K	CHIP C 0.010UF K	
C516			CK73HB1H471K	CHIP C 470PF K	
C519			C92-0565-05	CHIP-TAN 6.8UF 10WV	
C520			CK73FB1A105K	CHIP C 1.0UF K	
C521		*	CK73HB1A473K	CHIP C 0.047UF K	
C522			C92-0628-05	CHIP-TAN 10UF 10WV	
C523			CK73GB1C104K	CHIP C 0.10UF K	
C524			CC73HCH1H101J	CHIP C 100PF J	
C525		*	CK73HB1A473K	CHIP C 0.047UF K	
C526			CK73HB1H102K	CHIP C 1000PF K	
C527		*	CK73HB1A473K	CHIP C 0.047UF K	
C528,529			CK73HB1C103K	CHIP C 0.010UF K	
C530,531			CK73HB1H471K	CHIP C 470PF K	
C532,533			CK73HB1C103K	CHIP C 0.010UF K	
C534			CK73FB1A105K	CHIP C 1.0UF K	
C535			CK73HB1H471K	CHIP C 470PF K	
C536			CK73GB1C104K	CHIP C 0.10UF K	
C537-541			CK73HB1H471K	CHIP C 470PF K	
C542		*	CK73HB1A104K	CHIP C 0.10UF K	

PARTS LIST

TX-RX UNIT (X57-570X-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
C543			CK73HB1H102K	CHIP C 1000PF K	
C544,545			CK73HB1H471K	CHIP C 470PF K	
C546			CK73HB1C103K	CHIP C 0.010UF K	
C547			CC73HCH1H101J	CHIP C 100PF J	
C548		*	C92-0756-05	ELECTRO C 330UF 6.3WV	
C549			CK73FB1A105K	CHIP C 1.0UF K	
C550			CK73HB1C103K	CHIP C 0.010UF K	
C551			C92-0619-05	CHIP TAN 47UF 4WV	
C552			CK73HB1C103K	CHIP C 0.010UF K	
C553			CK73HB1H471K	CHIP C 470PF K	
C554			CK73GB1C104K	CHIP C 0.10UF K	
C555			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C556,557			CK73HB1H471K	CHIP C 470PF K	
C558			CK73GB1C104K	CHIP C 0.10UF K	
C559			CK73GB1E123K	CHIP C 0.012UF K	
C560			CK73HB1H471K	CHIP C 470PF K	
C561			CK73HB1C103K	CHIP C 0.010UF K	
C562			CK73HB1H102K	CHIP C 1000PF K	
C563			CK73HB1H471K	CHIP C 470PF K	
C564			CK73HB1H102K	CHIP C 1000PF K	
C565			CC73HCH1H560JY	CHIP C 56PF J	
C566			CK73HB1H222K	CHIP C 2200PF K	
C567			CK73HB1H471K	CHIP C 470PF K	
C568			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C569-571			CK73HB1H471K	CHIP C 470PF K	
C572			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C573		*	CK73HB1A473K	CHIP C 0.047UF K	
C574		*	CK73HB1A104K	CHIP C 0.10UF K	
C575,576		*	CK73HB1A104K	CHIP C 0.10UF K	K
C575,576			CK73HB1C223K	CHIP C 0.022UF K	E
C577-579			CK73FB1A105K	CHIP C 1.0UF K	
C580			CK73HB1H222K	CHIP C 2200PF K	
C581			CK73FB1A105K	CHIP C 1.0UF K	
C582,583			CK73GB1C104K	CHIP C 0.10UF K	
C584,585			CK73HB1H471K	CHIP C 470PF K	
C586			CK73FB1A105K	CHIP C 1.0UF K	
C587,588			CK73HB1C103K	CHIP C 0.010UF K	
C589			CK73GB1C104K	CHIP C 0.10UF K	
C590			CK73HB1C223K	CHIP C 0.022UF K	
C591			CK73HB1C103K	CHIP C 0.010UF K	
C592,593			CK73HB1H471K	CHIP C 470PF K	
C594			CK73HB1C223K	CHIP C 0.022UF K	
C595			CK73HB1C682K	CHIP C 6800PF K	
C596			CK73HB1C103K	CHIP C 0.010UF K	
C597			CK73FB1A105K	CHIP C 1.0UF K	
C598			CK73HB1E472K	CHIP C 4700PF K	
C599			CK73HB1C223K	CHIP C 0.022UF K	
C600			CK73HB1C682K	CHIP C 6800PF K	
C601		*	CK73HB1A473K	CHIP C 0.047UF K	
C602			CK73HB1C682K	CHIP C 6800PF K	
C603			CK73HB1H222K	CHIP C 2200PF K	
C604			CK73HB1H391K	CHIP C 390PF K	
C605			CC73HCH1E221J	CHIP C 220PF J	
C606			CK73HB1C103K	CHIP C 0.010UF K	
C607			CK73FB1A105K	CHIP C 1.0UF K	
C608			CK73HB1C103K	CHIP C 0.010UF K	
C609			CK73HB1H102K	CHIP C 1000PF K	
C610			CK73HB1H471K	CHIP C 470PF K	
C611			CC73HCH1H101J	CHIP C 100PF J	
C612,613			CK73GB1C104K	CHIP C 0.10UF K	

Ref. No.	Address	New parts	Parts No.	Description	Destination
C614-616			CK73HB1H471K	CHIP C 470PF K	
C617,618			CK73GB1C104K	CHIP C 0.10UF K	
C619			CK73FB1A105K	CHIP C 1.0UF K	
C620,621			CK73GB1C104K	CHIP C 0.10UF K	
C622-625			CK73FB1A105K	CHIP C 1.0UF K	
C626,627			CK73HB1C103K	CHIP C 0.010UF K	
C628-630			CK73HB1H471K	CHIP C 470PF K	
C631			CK73GB1C104K	CHIP C 0.10UF K	
C632			CK73HB1C223K	CHIP C 0.022UF K	
C640-644			CK73GB1C104K	CHIP C 0.10UF K	
C647,648		*	CK73HB1A104K	CHIP C 0.10UF K	
C651,652		*	CK73HB1A104K	CHIP C 0.10UF K	
C659			CK73EF1A106Z	CHIP C 10UF Z	
C660		*	CK73HB1A104K	CHIP C 0.10UF K	
C661			CC73HCH1H030C	CHIP C 3.0PF C	
C662		*	CC73HCH1H160J	CHIP C 16PF J	
C663,664		*	CK73HB1A104K	CHIP C 0.10UF K	
C665			C92-0619-05	CHIP TAN 47UF 4WV	
C666		*	CK73HB1A104K	CHIP C 0.10UF K	
C667			CK73FB1E224K	CHIP C 0.22UF K	
C668			CK73HB1H102K	CHIP C 1000PF K	
C669		*	CK73HB1A473K	CHIP C 0.047UF K	
C670			CK73HB1C103K	CHIP C 0.010UF K	
C671			CC73HCH1H020C	CHIP C 2.0PF C	
C672			C92-0619-05	CHIP TAN 47UF 4WV	
C673			CK73EF1A106Z	CHIP C 10UF Z	
C674			CK73FB1A105K	CHIP C 1.0UF K	
C675			CC73HCH1H470J	CHIP C 47PF J	
TC1			C05-0384-05	CERAMIC TRIMMER CAP(10PF)	
CN1			E40-5902-05	FLAT CABLE CONNECTOR(36P)	
CN500			E40-5630-05	PIN ASSY SOCKET (6P:PTT)	
CN501			E40-5629-05	PIN ASSY (6P:PTT)	
CN502			E40-5409-05	PIN ASSY (5P:VOL)	
CN504			E40-5902-05	FLAT CABLE CONNECTOR(36P)	
CN505		*	E40-5972-05	FLAT CABLE CONNECTOR(30P)	
CN506			E40-5392-05	PIN ASSY (VOL)	
J1			E03-0170-05	DC JACK	
J500			E11-0457-05	PHONE JACK (2.5/3.5)	
J501,502			E11-0439-05	2.5D PHONE JACK(5P)	
W500			E37-0697-05	PROCESSED LEAD WIRE	
706		*	F10-2275-04	SHIELDING CASE (VHF VCO)	
F1			F53-0128-05	FUSE (0.5A)	
CD1			L79-1072-05	TUNING COIL	
CD2			L79-1474-05	TUNING COIL (450KHZ)	
CF1			L72-0916-05	CERAMIC FILTER(455KHZ)	
CF2			L72-0945-05	CERAMIC FILTER(450KHZ)	
L1			L92-0137-05	FERRITE CHIP	
L2			L92-0140-05	FERRITE CHIP	
L3 ,4			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
L5			L92-0140-05	FERRITE CHIP	
L6			L40-1875-77	SMALL FIXED INDUCTOR(18NH)	
L7			L40-1085-77	SMALL FIXED INDUCTOR(100NH)	
L9		*	L40-3381-86	SMALL FIXED INDUCTOR(0.33UH)	
L10 ,11			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)	
L12		*	L40-3381-86	SMALL FIXED INDUCTOR(0.33UH)	
L13			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
L15			L92-0140-05	FERRITE CHIP	
L16			L40-2275-77	SMALL FIXED INDUCTOR(22N)	
L17			L40-1095-68	SMALL FIXED INDUCTOR(1UH)	
L18			L34-4513-05	AIR-CORE COIL(2.5T)	

PARTS LIST

TX-RX UNIT (X57-570X-X)

Ref. No.	Adress	New parts	Parts No.	Description	Destination
L19			L34-4515-05	AIR-CORE COIL(3.5T)	
L20			L40-1275-54	SMALL FIXED INDUCTOR(12NH)	
L23			L40-2775-54	SMALL FIXED INDUCTOR(27NH)	
L24			L34-4513-05	AIR-CORE COIL(2.5T)	
L25			L40-1092-81	SMALL FIXED INDUCTOR	
L26			L40-1085-77	SMALL FIXED INDUCTOR(100NH)	
L27			L40-5675-77	SMALL FIXED INDUCTOR(56NH)	
L28			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
L29			L40-2275-54	SMALL FIXED INDUCTOR(22NH)	
L30			L79-1492-05	FILTER MODULE(435MHZ)	E
L30			L79-1493-05	FILTER MODULE(445MHZ)	K
L30		*	L79-1574-05	FILTER MODULE(435MHZ)	E
L30		*	L79-1575-05	FILTER MODULE(444MHZ)	K
L31			L40-1575-77	SMALL FIXED INDUCTOR(15NH)	
L32			L40-6875-54	SMALL FIXED INDUCTOR(68NH)	
L33			L40-5675-54	SMALL FIXED INDUCTOR(56NH)	
L34			L40-2775-77	SMALL FIXED INDUCTOR(27NH)	
L35 ,36			L40-2275-54	SMALL FIXED INDUCTOR(22NH)	
L37			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
L39			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
L51			L40-1875-77	SMALL FIXED INDUCTOR(18NH)	
L53			L40-6875-77	SMALL FIXED INDUCTOR(68NH)	
L54			L40-1095-68	SMALL FIXED INDUCTOR(1UH)	
L55			L34-1374-05	AIR-CORE COIL(6.5T)	
L56			L34-1333-05	AIR-CORE COIL(8.5T)	
L58		*	L40-1281-86	SMALL FIXED INDUCTOR(0.12UH)	
L59			L40-1085-54	SMALL FIXED INDUCTOR(100NH)	
L62			L40-8285-34	SMALL FIXED INDUCTOR(820NH)	
L63			L40-1085-54	SMALL FIXED INDUCTOR(100NH)	
L65 ,66			L40-1585-54	SMALL FIXED INDUCTOR(150NH)	
L68		*	L40-1281-86	SMALL FIXED INDUCTOR(0.12UH)	
L69			L34-4506-05	COIL	
L70			L40-1095-68	SMALL FIXED INDUCTOR(1UH)	
L71			L34-4506-05	COIL	
L72			L34-4507-05	COIL	
L73			L40-3375-54	SMALL FIXED INDUCTOR(33NH)	
L74			L40-3975-54	SMALL FIXED INDUCTOR(39NH)	
L75			L40-1085-54	SMALL FIXED INDUCTOR(100NH)	
L76			L40-5675-54	SMALL FIXED INDUCTOR(56NH)	
L79 ,80			L92-0149-05	FERRITE CHIP	
L83		*	L34-4580-05	AIR-CORE COIL(4.5T)	
L84			L34-1331-05	AIR-CORE COIL(5.5T)	
L85		*	L34-4579-05	AIR-CORE COIL(8.5T)	
L86			L34-4515-05	AIR-CORE COIL(3.5T)	
L87 ,88		*	L34-4389-05	AIR-CORE COIL(9.5T)	
L89			L40-1085-77	SMALL FIXED INDUCTOR(100NH)	
L90 ,91			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)	
L92			L40-2275-54	SMALL FIXED INDUCTOR(22NH)	
L93			L40-3375-54	SMALL FIXED INDUCTOR(33NH)	
L94			L92-0140-05	FERRITE CHIP	
L500,501			L92-0140-05	FERRITE CHIP	
L502,503		*	L33-1358-05	SMALL FIXED INDUCTOR(330UH)	
L504-511			L92-0140-05	FERRITE CHIP	
X1		*	L77-1783-05	CRYSTAL RESONATOR(12.8MHZ)	
X2		*	L77-1789-05	CRYSTAL RESONATOR(45.505MHZ)	
X500		*	L78-0459-05	RESONATOR (4.19MHZ/12)	
X501		*	L77-1780-05	CRYSTAL RESONATOR(7.9872MHZ)	
XF1			L71-0482-05	MCF (45SC15B)	
XF2		*	L71-0535-05	MCF (38.85MHZ)	
CP1		*	RK75HA1J332J	MULTIPLE R (3.3K X2)	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
CP2			R90-0741-05	MULTIPLE R (1K X2)	
CP3		*	RK75HA1J332J	MULTIPLE R (3.3K X2)	
CP4			R90-0741-05	MULTIPLE R (1K X2)	
CP5		*	RK75HA1J332J	MULTIPLE R (3.3K X2)	
CP501,502			R90-0741-05	MULTIPLE R (1K X2)	
CP504-508			R90-0741-05	MULTIPLE R (1K X2)	
CP509			R90-0740-05	MULTIPLE R (100K X2)	
CP510-513			R90-0741-05	MULTIPLE R (1K X2)	
CP514-521			R90-0749-05	MULTIPLE R (330 X2)	
CP522			R90-0741-05	MULTIPLE R (1K X2)	
CP528			R90-0740-05	MULTIPLE R (100K X2)	
CP529			R90-0741-05	MULTIPLE R (1K X2)	
R1			RK73HB1J101J	CHIP R 100 J 1/16W	
R2			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R3			RK73HB1J474J	CHIP R 470K J 1/16W	
R4			RK73HB1J273J	CHIP R 27K J 1/16W	
R5			R92-1368-05	CHIP R 0 OHM	
R6			RK73HB1J224J	CHIP R 220K J 1/16W	
R7			RK73HB1J471J	CHIP R 470 J 1/16W	
R8 ,9			RK73HB1J103J	CHIP R 10K J 1/16W	
R10 ,11			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R12			RK73GB1J120J	CHIP R 12 J 1/16W	
R13			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R14			RK73GB1J103J	CHIP R 10K J 1/16W	
R15			RK73HB1J101J	CHIP R 100 J 1/16W	
R16 ,17			RK73HB1J103J	CHIP R 10K J 1/16W	
R18			R92-1368-05	CHIP R 0 OHM	
R19			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R20			RK73HB1J103J	CHIP R 10K J 1/16W	
R21			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R22			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R23			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R24 ,25			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R26			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R27			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R28			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R29			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R30			RK73HB1J103J	CHIP R 10K J 1/16W	
R31			RK73HB1J101J	CHIP R 100 J 1/16W	
R32			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R33			RK73HB1J474J	CHIP R 470K J 1/16W	
R34			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R35 ,36			RK73HB1J331J	CHIP R 330 J 1/16W	
R37			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R38			R92-1252-05	CHIP R 0 OHM	
R39			RK73HB1J123J	CHIP R 12K J 1/16W	
R40			RK73HB1J223J	CHIP R 22K J 1/16W	
R41			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R42			RK73HB1J103J	CHIP R 10K J 1/16W	
R43			RK73HB1J474J	CHIP R 470K J 1/16W	
R44			RK73HB1J471J	CHIP R 470 J 1/16W	
R45 ,46			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R47			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R48			RK73HB1J821J	CHIP R 820 J 1/16W	
R49			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R51			R92-1252-05	CHIP R 0 OHM	
R52			RK73HB1J104J	CHIP R 100K J 1/16W	
R53			RK73HB1J470J	CHIP R 47 J 1/16W	
R54			R92-1368-05	CHIP R 0 OHM	
R55			RK73HB1J154J	CHIP R 150K J 1/16W	

PARTS LIST

X-RX UNIT (X57-570X-XX)

Ref. No.	Adress	New parts	Parts No.	Description	Destination
156			RK73HB1J470J	CHIP R 47 J 1/16W	
158			RK73HB1J332J	CHIP R 3.3K J 1/16W	
159			RK73HB1J102J	CHIP R 1.0K J 1/16W	
160			RS2-1252-05	CHIP R 0 OHM	
161			RK73HB1J393J	CHIP R 39K J 1/16W	
162			RK73HB1J273J	CHIP R 27K J 1/16W	
163 ,64			RK73HB1J103J	CHIP R 10K J 1/16W	
165			RK73HB1J474J	CHIP R 470K J 1/16W	
166			RK73HB1J471J	CHIP R 470 J 1/16W	
167 ,68			RK73HB1J332J	CHIP R 3.3K J 1/16W	
169			RK73HB1J102J	CHIP R 1.0K J 1/16W	
170			RK73HB1J821J	CHIP R 820 J 1/16W	
171			RK73HB1J332J	CHIP R 3.3K J 1/16W	
172 ,73			RS2-1252-05	CHIP R 0 OHM	
174			RK73HB1J154J	CHIP R 150K J 1/16W	
175			RS2-1252-05	CHIP R 0 OHM	
176			RK73HB1J470J	CHIP R 47 J 1/16W	
177			RK73HB1J154J	CHIP R 150K J 1/16W	
178			RK73HB1J470J	CHIP R 47 J 1/16W	
180			RK73HB1J103J	CHIP R 10K J 1/16W	
181			RK73HB1J100J	CHIP R 10 J 1/16W	
182			RK73HB1J103J	CHIP R 10K J 1/16W	
183			RS2-1368-05	CHIP R 0 OHM	
184			RK73HB1J154J	CHIP R 150K J 1/16W	
185			RK73HB1J152J	CHIP R 1.5K J 1/16W	
186			RK73HB1J474J	CHIP R 470K J 1/16W	
187			RK73HB1J222J	CHIP R 2.2K J 1/16W	
188			RK73HB1J224J	CHIP R 220K J 1/16W	
189			RK73HB1J272J	CHIP R 2.7K J 1/16W	
190			RK73HB1J152J	CHIP R 1.5K J 1/16W	
191			RK73HB1J104J	CHIP R 100K J 1/16W	
192			RK73HB1J561J	CHIP R 560 J 1/16W	
193			RK73HB1J470J	CHIP R 47 J 1/16W	
194			RS2-1252-05	CHIP R 0 OHM	
195			RK73HB1J272J	CHIP R 2.7K J 1/16W	
196			RK73HB1J474J	CHIP R 470K J 1/16W	
197			RK73HB1J100J	CHIP R 10 J 1/16W	
198			RK73HB1J101J	CHIP R 100 J 1/16W	
199			RK73HB1J102J	CHIP R 1.0K J 1/16W	
1100			RK73HB1J154J	CHIP R 150K J 1/16W	
1101			RK73HB1J152J	CHIP R 1.5K J 1/16W	
1102			RK73HB1J474J	CHIP R 470K J 1/16W	
1103			RK73HB1J222J	CHIP R 2.2K J 1/16W	
1104			RK73HB1J224J	CHIP R 220K J 1/16W	
1105			RK73HB1J272J	CHIP R 2.7K J 1/16W	
1106			RK73HB1J152J	CHIP R 1.5K J 1/16W	
1107			RK73HB1J333J	CHIP R 33K J 1/16W	
1108			RK73HB1J821J	CHIP R 820 J 1/16W	
1109			RK73HB1J470J	CHIP R 47 J 1/16W	
1110			RS2-1252-05	CHIP R 0 OHM	
1111			RK73HB1J102J	CHIP R 1.0K J 1/16W	
1112			RK73HB1J153J	CHIP R 15K J 1/16W	
1113			RK73HB1J474J	CHIP R 470K J 1/16W	
1114			RK73HB1J222J	CHIP R 2.2K J 1/16W	
1115			RK73HB1J474J	CHIP R 470K J 1/16W	
1116			RK73HB1J222J	CHIP R 2.2K J 1/16W	
1117			RK73HB1J564J	CHIP R 560K J 1/16W	
1118			RK73HB1J152J	CHIP R 1.5K J 1/16W	
1119			RK73HB1J102J	CHIP R 1.0K J 1/16W	
1120			RK73HB1J332J	CHIP R 3.3K J 1/16W	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
R121			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R122			RK73HB1J473J	CHIP R 47K J 1/16W	
R123			RK73HB1J103J	CHIP R 10K J 1/16W	
R124			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R125,126			RK73HB1J104J	CHIP R 100K J 1/16W	
R127			RK73HB1J333J	CHIP R 33K J 1/16W	
R128			RK73HB1J561J	CHIP R 560 J 1/16W	
R129			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R130			RK73HB1J563J	CHIP R 56K J 1/16W	
R131			RK73HB1J220J	CHIP R 22 J 1/16W	
R132			RK73HB1J470J	CHIP R 47 J 1/16W	
R133			RK73HB1J151J	CHIP R 150 J 1/16W	
R134			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R135			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R136			RK73HB1J220J	CHIP R 22 J 1/16W	
R137			RK73HB1J561J	CHIP R 560 J 1/16W	
R138			RK73HB1J180J	CHIP R 18 J 1/16W	
R140			RS2-1368-05	CHIP R 0 OHM	
R142			RK73HB1J680J	CHIP R 68 J 1/16W	
R143			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R144			RK73HB1J271J	CHIP R 270 J 1/16W	
R145			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R146			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R147			RS2-1368-05	CHIP R 0 OHM	
R148,149			RK73HB1J104J	CHIP R 100K J 1/16W	
R150			RK73HB1J561J	CHIP R 560 J 1/16W	
R151			RK73HB1J224J	CHIP R 220K J 1/16W	
R152			RK73HB1J104J	CHIP R 100K J 1/16W	
R153			RK73HB1J470J	CHIP R 47 J 1/16W	
R154			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R155			RK73HB1J101J	CHIP R 100 J 1/16W	
R156			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R158			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R159			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R160,161			RK73HB1J104J	CHIP R 100K J 1/16W	
R162			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R163			RS2-1252-05	CHIP R 0 OHM	
R164			RK73GB1J221J	CHIP R 220 J 1/16W	
R165			RK73HB1J104J	CHIP R 100K J 1/16W	
R167			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R168			RS2-1252-05	CHIP R 0 OHM	
R174			RS2-1252-05	CHIP R 0 OHM	
R175			RK73HB1J474J	CHIP R 470K J 1/16W	
R176			RK73HB1J333J	CHIP R 33K J 1/16W	
R177			RS2-1368-05	CHIP R 0 OHM	
R178			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R179			RK73HB1J224J	CHIP R 220K J 1/16W	
R181			RK73HB1J103J	CHIP R 10K J 1/16W	
R182			RK73HB1J151J	CHIP R 150 J 1/16W	
R183			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R184			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R185			RK73HB1J270J	CHIP R 27 J 1/16W	
R186			RK73HB1J561J	CHIP R 560 J 1/16W	
R187			RK73HB1J180J	CHIP R 18 J 1/16W	
R189			RS2-1368-05	CHIP R 0 OHM	
R191			RK73HB1J680J	CHIP R 68 J 1/16W	
R192			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R195			RK73HB1J271J	CHIP R 270 J 1/16W	
R196			RK73HB1J101J	CHIP R 100 J 1/16W	
R197			RK73HB1J222J	CHIP R 2.2K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-570X-XX

Ref. No.	Adress	New parts	Parts No.	Description	Destination
R198			RK73HB1J122J	CHIP R 1.2K J 1/16W	
R199			RK73HB1J103J	CHIP R 10K J 1/16W	
R200			RK73HB1J271J	CHIP R 270 J 1/16W	
R201			RS2-1252-05	CHIP R 0 OHM	
R202			RK73HB1J104J	CHIP R 100K J 1/16W	
R203			RK73HB1J220J	CHIP R 22 J 1/16W	
R204			RK73HB1J223J	CHIP R 22K J 1/16W	
R205			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R206			RK73HB1J104J	CHIP R 100K J 1/16W	
R207			RK73HB1J122J	CHIP R 1.2K J 1/16W	
R208			RS2-1252-05	CHIP R 0 OHM	
R209			RK73HB1J224J	CHIP R 220K J 1/16W	
R210			RK73HB1J104J	CHIP R 100K J 1/16W	
R211			RS2-1368-05	CHIP R 0 OHM	
R212			RK73HB1J470J	CHIP R 47 J 1/16W	
R213			RS2-1368-05	CHIP R 0 OHM	
R214			RK73HB1J823J	CHIP R 82K J 1/16W	
R215			RK73HB1J104J	CHIP R 100K J 1/16W	
R216			RK73HB1J103J	CHIP R 10K J 1/16W	
R217			RK73HB1J104J	CHIP R 100K J 1/16W	
R218,219			RK73HB1J103J	CHIP R 10K J 1/16W	
R220			RK73HB1J823J	CHIP R 82K J 1/16W	
R221			RK73HB1J103J	CHIP R 10K J 1/16W	
R222			RK73HB1J104J	CHIP R 100K J 1/16W	
R223			RK73HB1J473J	CHIP R 47K J 1/16W	
R224,225			RK73HB1J104J	CHIP R 100K J 1/16W	
R226			RS2-1368-05	CHIP R 0 OHM	
R227			RS2-1252-05	CHIP R 0 OHM	
R228,229			RK73HB1J104J	CHIP R 100K J 1/16W	
R231			RS2-1252-05	CHIP R 0 OHM	
R232-234			RK73HB1J104J	CHIP R 100K J 1/16W	
R235			RK73HB1J470J	CHIP R 47 J 1/16W	
R236			RK73HB1J221J	CHIP R 220 J 1/16W	
R237			RK73HB1J220J	CHIP R 22 J 1/16W	
R238			RK73HB1J223J	CHIP R 22K J 1/16W	
R239			RK73HB1J473J	CHIP R 47K J 1/16W	
R240			RK73HB1J821J	CHIP R 820 J 1/16W	
R241,242			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R243			RK73HB1J103J	CHIP R 10K J 1/16W	
R244			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R245			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R247,248			RK73HB1J104J	CHIP R 100K J 1/16W	
R249			RK73HB1J224J	CHIP R 220K J 1/16W	
R501-505			RK73HB1J221J	CHIP R 220 J 1/16W	
R506			RK73HB1J683J	CHIP R 68K J 1/16W	
R509			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R512			RK73HB1J101J	CHIP R 100 J 1/16W	
R514			RK73HB1J103J	CHIP R 10K J 1/16W	
R522			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R523			RK73HB1J103J	CHIP R 10K J 1/16W	
R525			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R526			RK73HB1J473J	CHIP R 47K J 1/16W	
R530			RK73HB1J184J	CHIP R 180K J 1/16W	
R531			RK73HB1J474J	CHIP R 470K J 1/16W	
R533			RK73HB1J101J	CHIP R 100 J 1/16W	
R534			RK73HB1J470J	CHIP R 47 J 1/16W	
R535			RK73HB1J474J	CHIP R 470K J 1/16W	
R536			RK73HB1J103J	CHIP R 10K J 1/16W	
R537,538			RK73HB1J104J	CHIP R 100K J 1/16W	
R540			RK73HB1J184J	CHIP R 100K J 1/16W	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
R541			RK73HB1J223J	CHIP R 22K J 1/16W	
R542			RK73HB1J100J	CHIP R 10 J 1/16W	
R543			RK73HB1J471J	CHIP R 470 J 1/16W	
R544			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R545-548			RK73HB1J473J	CHIP R 47K J 1/16W	
R550			RK73HB1J103J	CHIP R 10K J 1/16W	
R551			RK73HB1J393J	CHIP R 39K J 1/16W	
R552			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R553			RK73HB1J564J	CHIP R 560K J 1/16W	
R554			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R555			RK73HB1J103J	CHIP R 10K J 1/16W	
R557			RK73HB1J334J	CHIP R 330K J 1/16W	
R559			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R560			RK73HB1J331J	CHIP R 330 J 1/16W	
R561			RK73HB1J474J	CHIP R 470K J 1/16W	
R562-564			RS2-1368-05	CHIP R 0 OHM	
R566			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R567			RK73HB1J124J	CHIP R 120K J 1/16W	
R568			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R569,570			RK73HB1J153J	CHIP R 15K J 1/16W	
R571			RK73HB1J104J	CHIP R 100K J 1/16W	
R572			RK73HB1J563J	CHIP R 56K J 1/16W	
R573			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R574			RK73HB1J473J	CHIP R 47K J 1/16W	
R575			RK73HB1J471J	CHIP R 470 J 1/16W	
R576			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R577			RK73HB1J153J	CHIP R 15K J 1/16W	
R578			RS2-1368-05	CHIP R 0 OHM	
R579			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R580			RK73HB1J223J	CHIP R 22K J 1/16W	
R581			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R582			RK73HB1J153J	CHIP R 15K J 1/16W	
R583,584			RK73HB1J104J	CHIP R 100K J 1/16W	
R585			RK73HB1J474J	CHIP R 470K J 1/16W	
R586			RK73HB1J471J	CHIP R 470 J 1/16W	
R587			RK73HB1J474J	CHIP R 470K J 1/16W	
R588			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R589			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R590			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R591			RK73HB1J104J	CHIP R 100K J 1/16W	
R592			RK73HB1J154J	CHIP R 150K J 1/16W	
R593			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R594			RK73HB1J104J	CHIP R 100K J 1/16W	
R595			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R596			RK73HB1J104J	CHIP R 100K J 1/16W	
R597			RK73HB1J473J	CHIP R 47K J 1/16W	
R598			RK73HB1J563J	CHIP R 56K J 1/16W	
R599,600			RK73HB1J224J	CHIP R 220K J 1/16W	
R601			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R602			RK73HB1J123J	CHIP R 12K J 1/16W	
R603			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R604			RK73HB1J822J	CHIP R 8.2K J 1/16W	
R606			RK73HB1J223J	CHIP R 22K J 1/16W	
R607			RK73HB1J393J	CHIP R 39K J 1/16W	
R608			RK73HB1J104J	CHIP R 100K J 1/16W	
R609			RK73HB1J154J	CHIP R 150K J 1/16W	
R610			RK73HB1J563J	CHIP R 56K J 1/16W	
R611			RK73HB1J331J	CHIP R 330 J 1/16W	
R612			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R613			RK73HB1J563J	CHIP R 56K J 1/16W	

PARTS LIST

X-RX UNIT (X57-570X-XX)

Ref. No.	Adress	New parts	Parts No.	Description	Destination
R614			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R616-619			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R620			RK73HB1J103J	CHIP R 10K J 1/16W	
R621			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R622,623			R92-1368-05	CHIP R 0 OHM	
R624			RK73HB1J123J	CHIP R 12K J 1/16W	
R625,626			RK73HB1J104J	CHIP R 100K J 1/16W	
R627			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R628			RK73HB1J123J	CHIP R 12K J 1/16W	
R629,630			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R631			RK73HB1J103J	CHIP R 10K J 1/16W	
R632			RK73HB1J123J	CHIP R 12K J 1/16W	
R633			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R634			RK73HB1J103J	CHIP R 10K J 1/16W	
R635-637			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R638			RK73HB1J103J	CHIP R 10K J 1/16W	
R641			RK73HB1J103J	CHIP R 10K J 1/16W	K
R641			RK73HB1J822J	CHIP R 8.2K J 1/16W	E
R642			RK73HB1J103J	CHIP R 10K J 1/16W	
R643			RK73HB1J123J	CHIP R 12K J 1/16W	
R644			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R645			RK73HB1J104J	CHIP R 100K J 1/16W	
R648			RK73HB1J103J	CHIP R 10K J 1/16W	
R647-649			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R650			RK73HB1J123J	CHIP R 12K J 1/16W	
R651			RK73HB1J103J	CHIP R 10K J 1/16W	
R652-654			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R655			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R656			RK73HB1J473J	CHIP R 47K J 1/16W	
R657,658			RK73HB1J223J	CHIP R 22K J 1/16W	
R659			RK73HB1J103J	CHIP R 10K J 1/16W	
R660			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R661			RK73HB1J563J	CHIP R 56K J 1/16W	
R662			RK73HB1J103J	CHIP R 10K J 1/16W	
R663			RK73HB1J393J	CHIP R 39K J 1/16W	
R664			RK73HB1J103J	CHIP R 10K J 1/16W	
R665			RK73HB1J823J	CHIP R 82K J 1/16W	
R666			RK73HB1J154J	CHIP R 150K J 1/16W	
R667			RK73HB1J473J	CHIP R 47K J 1/16W	
R668,669			RK73HB1J331J	CHIP R 330 J 1/16W	
R670			R92-1368-05	CHIP R 0 OHM	
R671			RK73HB1J331J	CHIP R 330 J 1/16W	
R673			RK73HB1J224J	CHIP R 220K J 1/16W	
R674			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R675,676			RK73HB1J473J	CHIP R 47K J 1/16W	
R677			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R678			RK73HB1J221J	CHIP R 220 J 1/16W	
R679,680			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R682			RK73HB1J104J	CHIP R 100K J 1/16W	
R684			RK73HB1J224J	CHIP R 220K J 1/16W	
R685			RK73HB1J473J	CHIP R 47K J 1/16W	
R686			R92-1368-05	CHIP R 0 OHM	
R688			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R689,690			RK73HB1J104J	CHIP R 100K J 1/16W	
R692			RK73HB1J104J	CHIP R 100K J 1/16W	
R693			RK73HB1J563J	CHIP R 56K J 1/16W	
R694			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R695			RK73HB1J223J	CHIP R 22K J 1/16W	
R696			R92-1368-05	CHIP R 0 OHM	
R697			RK73HB1J473J	CHIP R 47K J 1/16W	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
R698			RK73HB1J221J	CHIP R 220 J 1/16W	
R699			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R708			RK73HB1J221J	CHIP R 220 J 1/16W	
R707,708			R92-1252-05	CHIP R 0 OHM	
R714			R92-1368-05	CHIP R 0 OHM	
R715			RK73HB1J474J	CHIP R 470K J 1/16W	
R716			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R718			RK73HB1J473J	CHIP R 47K J 1/16W	
R719			RK73HB1J474J	CHIP R 470K J 1/16W	
R720,721			R92-1252-05	CHIP R 0 OHM	
R722,723			RK73HB1J221J	CHIP R 220 J 1/16W	
R725			R92-1252-05	CHIP R 0 OHM	
R726			R92-1368-05	CHIP R 0 OHM	
R727			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R728			RK73HB1J104J	CHIP R 100K J 1/16W	
VR1 ,2			R12-7490-05	TRIMMING POT.(47K/B)	
VR3			R12-7490-05	TRIMMING POT.(47K/B)	E
VR500		*	R12-7494-05	TRIMMING POT.(220K/B)	
VR501			R39-0602-05	VARIABLE RESISTOR(10K A)	
S500			S70-0424-05	TACT SWITCH	
MIC500	28		T91-0580-05	MIC ELEMENT	
D1			RB751V-40	DIODE	
D2			DTZ3.9(B)	ZENER DIODE	
D3			SFPB-72VL	DIODE	
D4			1SS357	DIODE	
D5			DA221	DIODE	
D6			RB751V-40	DIODE	
D8			DA221	DIODE	
D9			MA2S111	DIODE	
D10 -12			HSC277	DIODE	
D13			DA221	DIODE	
D14			MA2S111	DIODE	
D15			HSC277	DIODE	
D17			HSC277	DIODE	
D18			RB706F-40	DIODE	
D19			DA221	DIODE	
D20			HVU131	DIODE	
D21 ,22			HSC277	DIODE	
D23			DAN222	DIODE	
D24			DAN235	DIODE	
D25			HSC277	DIODE	
D26			DAN235E	DIODE	
D27 ,28			HVC350B	VARIABLE CAPACITANCE DIODE	
D29			DA221	DIODE	
D30			HVU131	DIODE	
D31			HSC277	DIODE	
D32 -34			HVC350B	VARIABLE CAPACITANCE DIODE	
D36			HVC350B	VARIABLE CAPACITANCE DIODE	
D37 ,38		*	MA2S304	VARIABLE CAPACITANCE DIODE	
D40			DAN222	DIODE	
D42 -44			HSC277	DIODE	
D500			MA2S111	DIODE	
D501			DA227	DIODE	
D502,503			MA2S111	DIODE	
D506			DA227	DIODE	
D507			MA2S111	DIODE	
D508			MA2S111	DIODE	K
D509,510			B30-2157-05	LED(YELLOW/B)	
D511			B30-2143-05	LED(YG/B)	
D512,513			B30-2131-05	LED	

PARTS LIST

TX-RX UNIT (X57-570X-XX

Ref. No.	Adress	New parts	Parts No.	Description	Destination
D516,517			MA2S111	DIODE	
D518			B30-2143-05	LED(YG/8)	
D526			MA2S111	DIODE	
D527			DTZ3.9(B)	ZENER DIODE	
D528		*	DTZ4.3(A)	ZENER DIODE	
D529			1SS388	DIODE	
D530		*	DTZ4.3(A)	ZENER DIODE	
D531			MA2S111	DIODE	
D532			B30-2143-05	LED(YG/8)	
D533,534			MA2S111	DIODE	
D535			B30-2143-05	LED(YG/8)	
D536-539			B30-2157-05	LED(YELLOW/8)	
IC1 ,2			LMC71018IM5	IC(OP AMP)	
IC3			TC7660SEOA	IC	
IC4			BU2090FS	IC(SHIFT/STORE REGISTER)	
IC6		*	MB15E03L	IC(PLL SYNTHESIZER)	
IC7			TC7S66FU	IC(ANALOG SWITCH)	
IC9		*	MB15E03L	IC(PLL SYNTHESIZER)	
IC10			TC7S66FU	IC(ANALOG SWITCH)	
IC12,13			TA31136FN	IC(FM IF DETECTOR)	
IC14			TC4W53FU	IC(2 INPUT NAND GATE)	
IC15	3A		M67799MA	IC(POWER MODULE:UHF)	
IC16	3A		M67798LRA	IC(POWER MODULE:VHF)	
IC17		*	UPB1509GV	IC	
IC18			TA75W01FU	IC(OP AMP X2)	
IC500			KIA6278F	IC	
IC501			XZ5650S8I-2.5	IC(EEPROM)	
IC503		*	RN5VT32C	IC(CONVERTER)	
IC504		*	RN5VT25A	IC(REGULATOR)	
IC505		*	78F4216GCJUKB	IC(CPU)	
IC506			TA75W01FU	IC(OP AMP X2)	
IC507,508			S-8133SHG-KI	IC	
IC509			AK2343	IC(CTCSS ENCODER/DECODER)	
IC510		*	TGT0120Q	IC	
IC511		*	TMT0110Q	IC	
IC512		*	TA75W393FU	IC	
IC513		*	BU4053BCFV	IC	
IC514			TA75W01FU	IC(OP AMP X2)	
IC515			TA75S393F	IC	
IC516		*	X25097Vi-1.8	IC(EEPROM)	
IC517			TA75W01FU	IC(OP AMP X2)	
IC518		*	ADM3202ARU	IC	
Q1			2SC4617(R)	TRANSISTOR	
Q2			2SK1824	FET	
Q3			UMG1	TRANSISTOR	
Q4			UMA11N	TRANSISTOR	
Q5			UPA672T	FET	
Q6			2SD1483	TRANSISTOR	
Q7			2SB1188(Q)	TRANSISTOR	
Q8 ,9			UMW1	TRANSISTOR	
Q10			*2SB1184(Q,R)	TRANSISTOR	
Q11 ,12			IMD16A	TRANSISTOR	
Q13 -15			UMA11N	TRANSISTOR	
Q16 ,17			UMA10N	TRANSISTOR	
Q18			2SC4617(R)	TRANSISTOR	
Q19		*	2SA1774(R)	TRANSISTOR	
Q20			2SC4617(R)	TRANSISTOR	
Q21			2SC4617(S)	TRANSISTOR	
Q22 ,23			2SC5108(Y)	TRANSISTOR	
Q24		*	2SA1774(R)	TRANSISTOR	

Ref. No.	Adress	New parts	Parts No.	Description	Destination
Q25			2SC4617(R)	TRANSISTOR	
Q26			2SC4617(S)	TRANSISTOR	
Q27 ,28			2SC5108(Y)	TRANSISTOR	
Q29 -31			*2SC4649(N,P)	TRANSISTOR	
Q32 -35			2SC4617(R)	TRANSISTOR	
Q36			2SC5108(Y)	TRANSISTOR	
Q37			2SC3356	TRANSISTOR	
Q38			2SK1824	FET	
Q39 ,40			3SK309	FET	
Q45			2SK1824	FET	
Q46			2SC3356	TRANSISTOR	
Q47			DTC144EE	DIGITAL TRANSISTOR	
Q48			3SK309	FET	
Q49			3SK239A	FET	
Q50			3SK309	FET	
Q51			DTC144EE	DIGITAL TRANSISTOR	
Q52			2SC4617(R)	TRANSISTOR	
Q53			3SK239A	FET	
Q54			2SC5108(Y)	TRANSISTOR	
Q55			2SK1875(V)	FET	
Q56			DTC114YE	DIGITAL TRANSISTOR	
Q57			UPA672T	FET	
Q58 ,59			2SJ243	FET	
Q60			2SC4617(R)	TRANSISTOR	
Q61			2SK1824	FET	E
Q62 ,63			2SK1824	FET	
Q504			2SK1588	FET	
Q510,511			2SC4617(R)	TRANSISTOR	
Q512,513			2SB1188(Q)	TRANSISTOR	
Q514			UPA672T	FET	
Q515,516			2SJ243	FET	
Q517			2SK1824	FET	
Q518			2SJ243	FET	
Q519			2SK1824	FET	
Q520			2SC4617(R)	TRANSISTOR	
Q521			IMD16A	TRANSISTOR	
Q522,523			2SK1824	FET	
Q524		*	2SA1774(R)	TRANSISTOR	
Q525,526			2SK1824	FET	
Q527,529			2SC4617(R)	TRANSISTOR	
Q530			UPA672T	FET	
Q531-533			2SK1824	FET	
Q534,535			2SJ243	FET	
Q536			2SC4997	TRANSISTOR	
Q537			2SJ243	FET	
Q538			DTC144EE	DIGITAL TRANSISTOR	
Q539			2SK1824	FET	
TH1			157-104-65001	THERMISTOR(100K)	
TH501			157-153-65001	THERMISTOR(15K)	
A1		*	X58-4600-11	SUB UNIT (UHF VCO)	K
A1		*	X58-4602-71	SUB UNIT (UHF VCO)	E

SUB UNIT (UHF VCO) (X58-460X-XX) 0-11:K, 2-71:E

C1			CK73HB1H471K	CHIP C	470PF	K
C3			CK73GB1C104K	CHIP C	0.10UF	K
C4			CK73HB1H471K	CHIP C	470PF	K
C6			CK73HB1H471K	CHIP C	470PF	K
C7			CC73HCH1H0R5B	CHIP C	0.5PF	B
C8		*	CC73HCH1H070C	CHIP C	7.0PF	C
C9			CC73HCH1H0R5B	CHIP C	0.5PF	B

PARTS LIST


-RX UNIT (X57-570X-XX)

ef. No.	Adress	New parts	Parts No.	Description	Destination
8			CK73HB1H471K	CHIP C 470PF K	
1			CC73HCH1H0R5B	CHIP C 0.5PF B	
2			CC73HCH1H150J	CHIP C 15PF J	
3			CK73GB1C104K	CHIP C 0.10UF K	
4,15			CK73HB1H471K	CHIP C 470PF K	
7			CK73HB1H471K	CHIP C 470PF K	
		*	F10-2276-04	SHIELDING CASE	
			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)	
			L40-2275-77	SMALL FIXED INDUCTOR(22NH)	
			L40-2778-53	SMALL FIXED INDUCTOR(27NH)	
			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)	
			L40-1078-53	SMALL FIXED INDUCTOR(10NH)	
2			RK73HB1J470J	CHIP R 47 J 1/16W	
,4			RK73HB1J473J	CHIP R 47K J 1/16W	
			RK73HB1J471J	CHIP R 470 J 1/16W	
			RK73HB1J222J	CHIP R 2.2K J 1/16W	
			RK73HB1J103J	CHIP R 10K J 1/16W	
			RK73HB1J104J	CHIP R 100K J 1/16W	
0			RK73HB1J823J	CHIP R 82K J 1/16W	
1			RK73HB1J103J	CHIP R 10K J 1/16W	
2			RK73HB1J682J	CHIP R 6.8K J 1/16W	
3			RK73HB1J181J	CHIP R 180 J 1/16W	
4			RK73HB1J103J	CHIP R 10K J 1/16W	
			HSC277	DIODE	
,3			1SV273	VARIABLE CAPACITANCE DIODE	
			2SC5108(Y)	TRANSISTOR	
2			2SC5008	TRANSISTOR	
3			2SC4997	TRANSISTOR	

SUB UNIT(UHF VCO) (X58-460X-XX)

Ref. No.	Adress	New parts	Parts No.	Description	Destination

EXPLODED VIEW

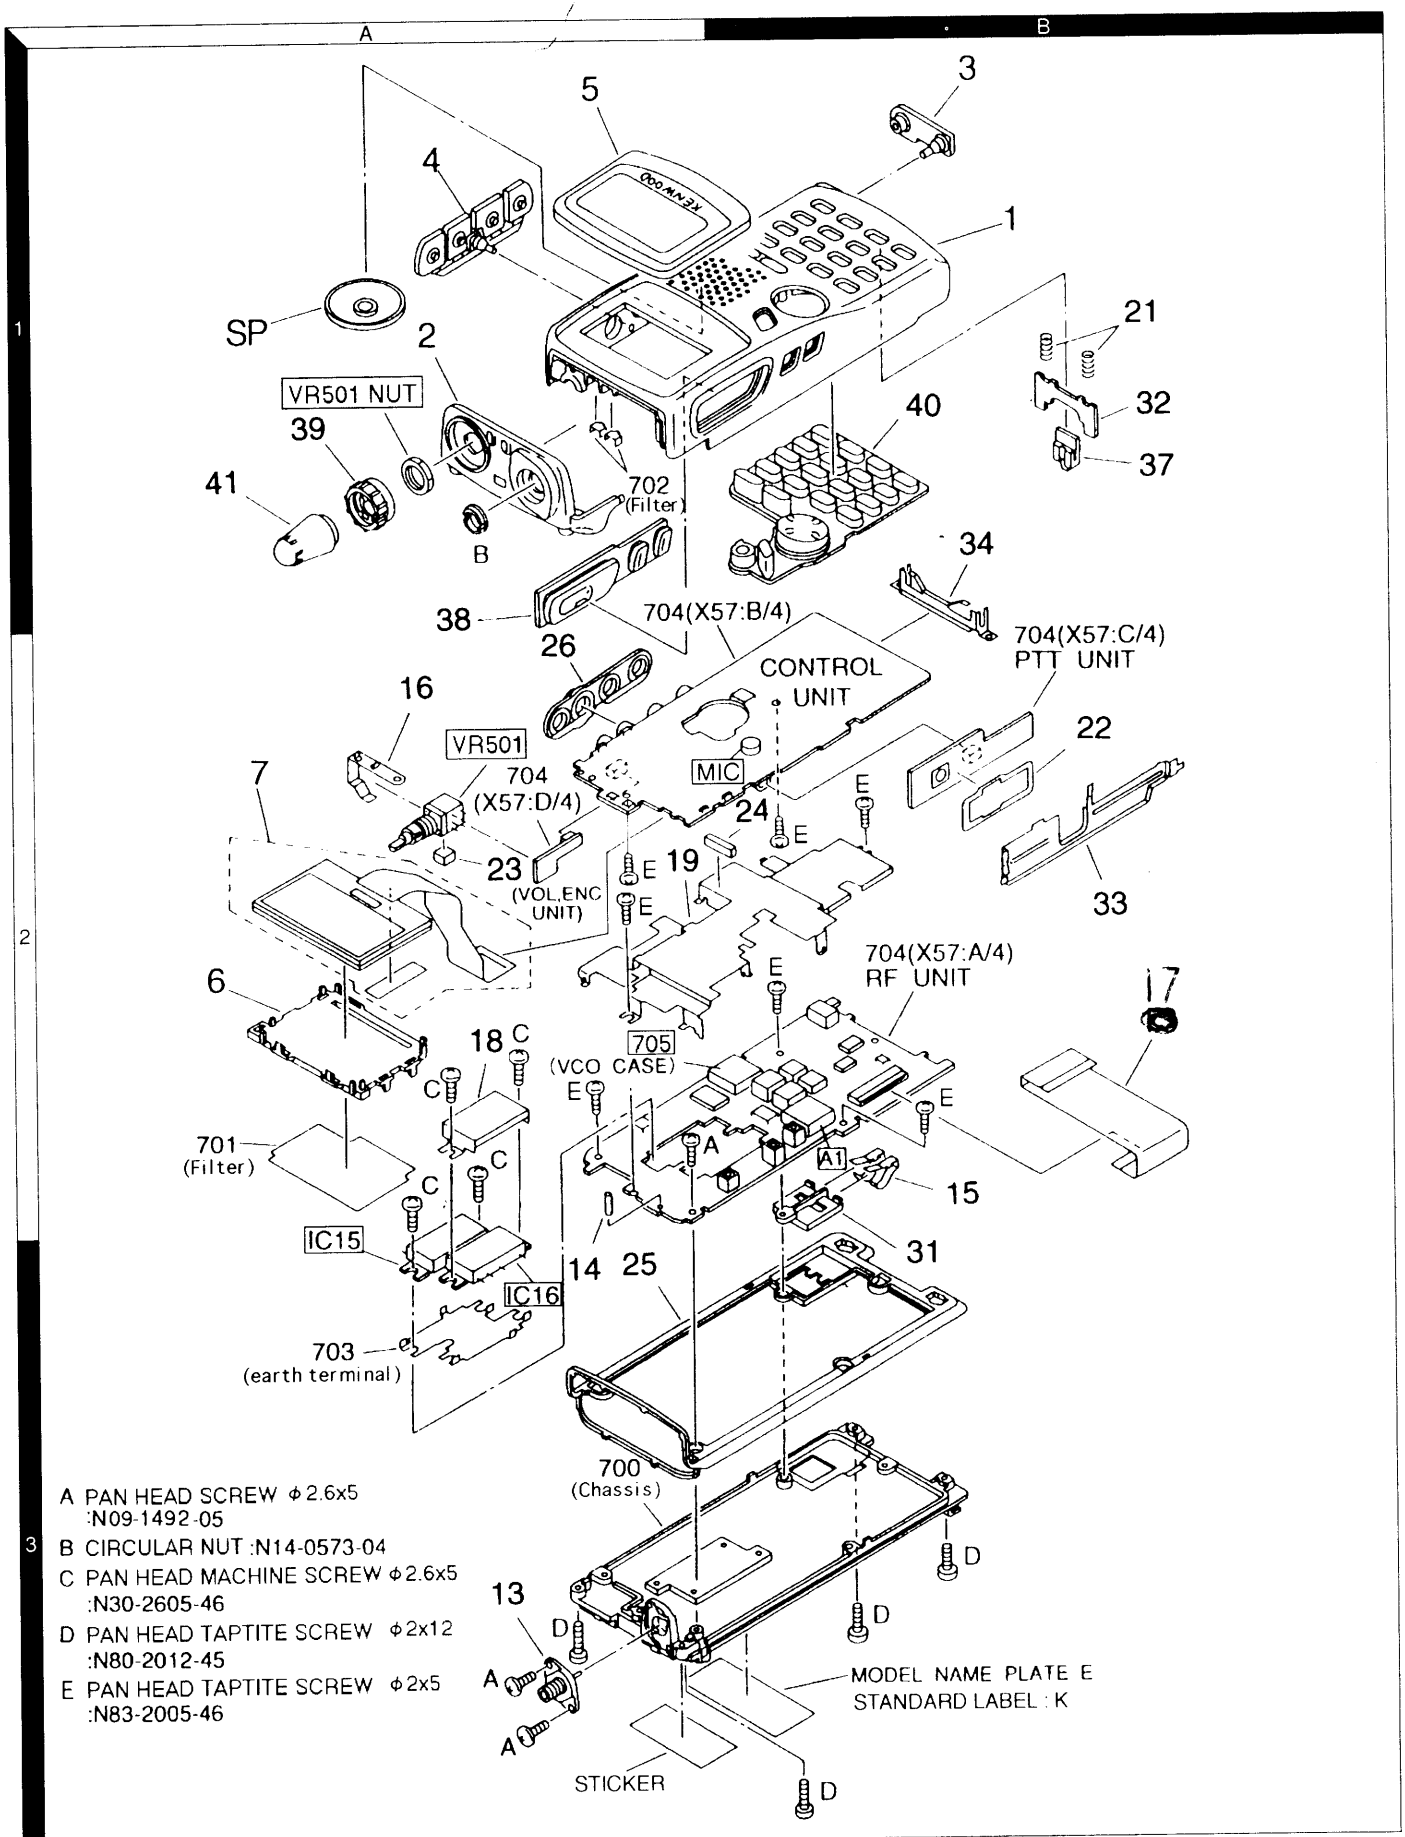

A PAN HEAD SCREW ϕ2.6x5
:N09-1492-05

B CIRCULAR NUT :N14-0573-04


C PAN HEAD MACHINE SCREW ϕ2.6x5
:N30-2605-46

D PAN HEAD TAPTITE SCREW ϕ2x12
:N80-2012-45

E PAN HEAD TAPTITE SCREW ϕ2x5
:N83-2005-46

Parts with exploded numbers larger than 700 are not suppied.

PACKING

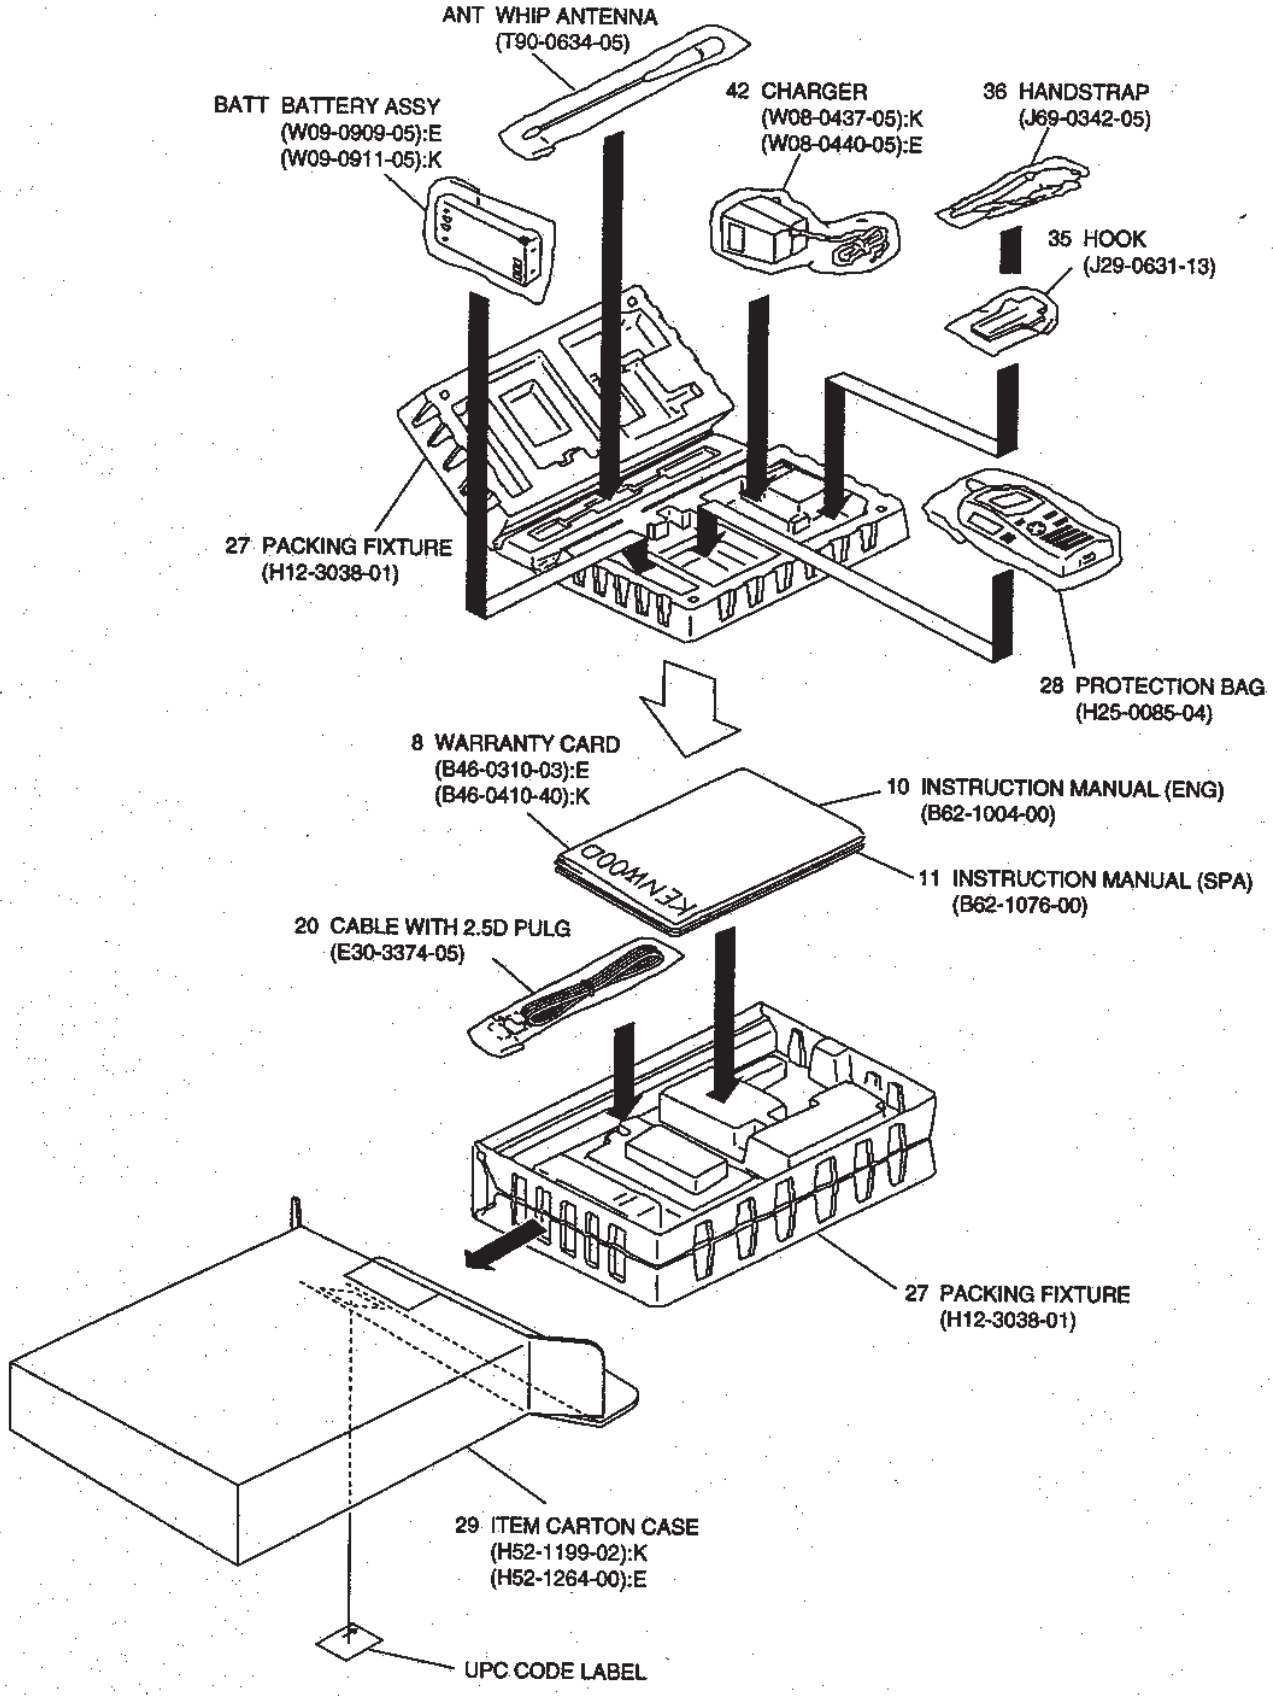
ANT WHIP ANTENNA
(T90-0634-05)
BATT BATTERY ASSY
(W09-0909-05):E
(W09-0911-05):K
42 CHARGER
(W08-0437-05):K
(W08-0440-05):E
36 HANDSTRAP
(J69-0342-05)
35 HOOK
(J29-0631-13)
27 PACKING FIXTURE
(H12-3038-01)
28 PROTECTION BAG
(H25-0085-04)
8 WARRANTY CARD
(B46-0310-03):E
(B46-0410-40):K
10 INSTRUCTION MANUAL (ENG)
(B62-1004-00)
11 INSTRUCTION MANUAL (SPA)
(B62-1076-00)
KENWOOD
20 CABLE WITH 2.5D PULG
(E30-3374-05)
27 PACKING FIXTURE
(H12-3038-01)
29 ITEM CARTON CASE
(H52-1199-02):K
(H52-1264-00):E
UPC CODE LABEL