
9. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

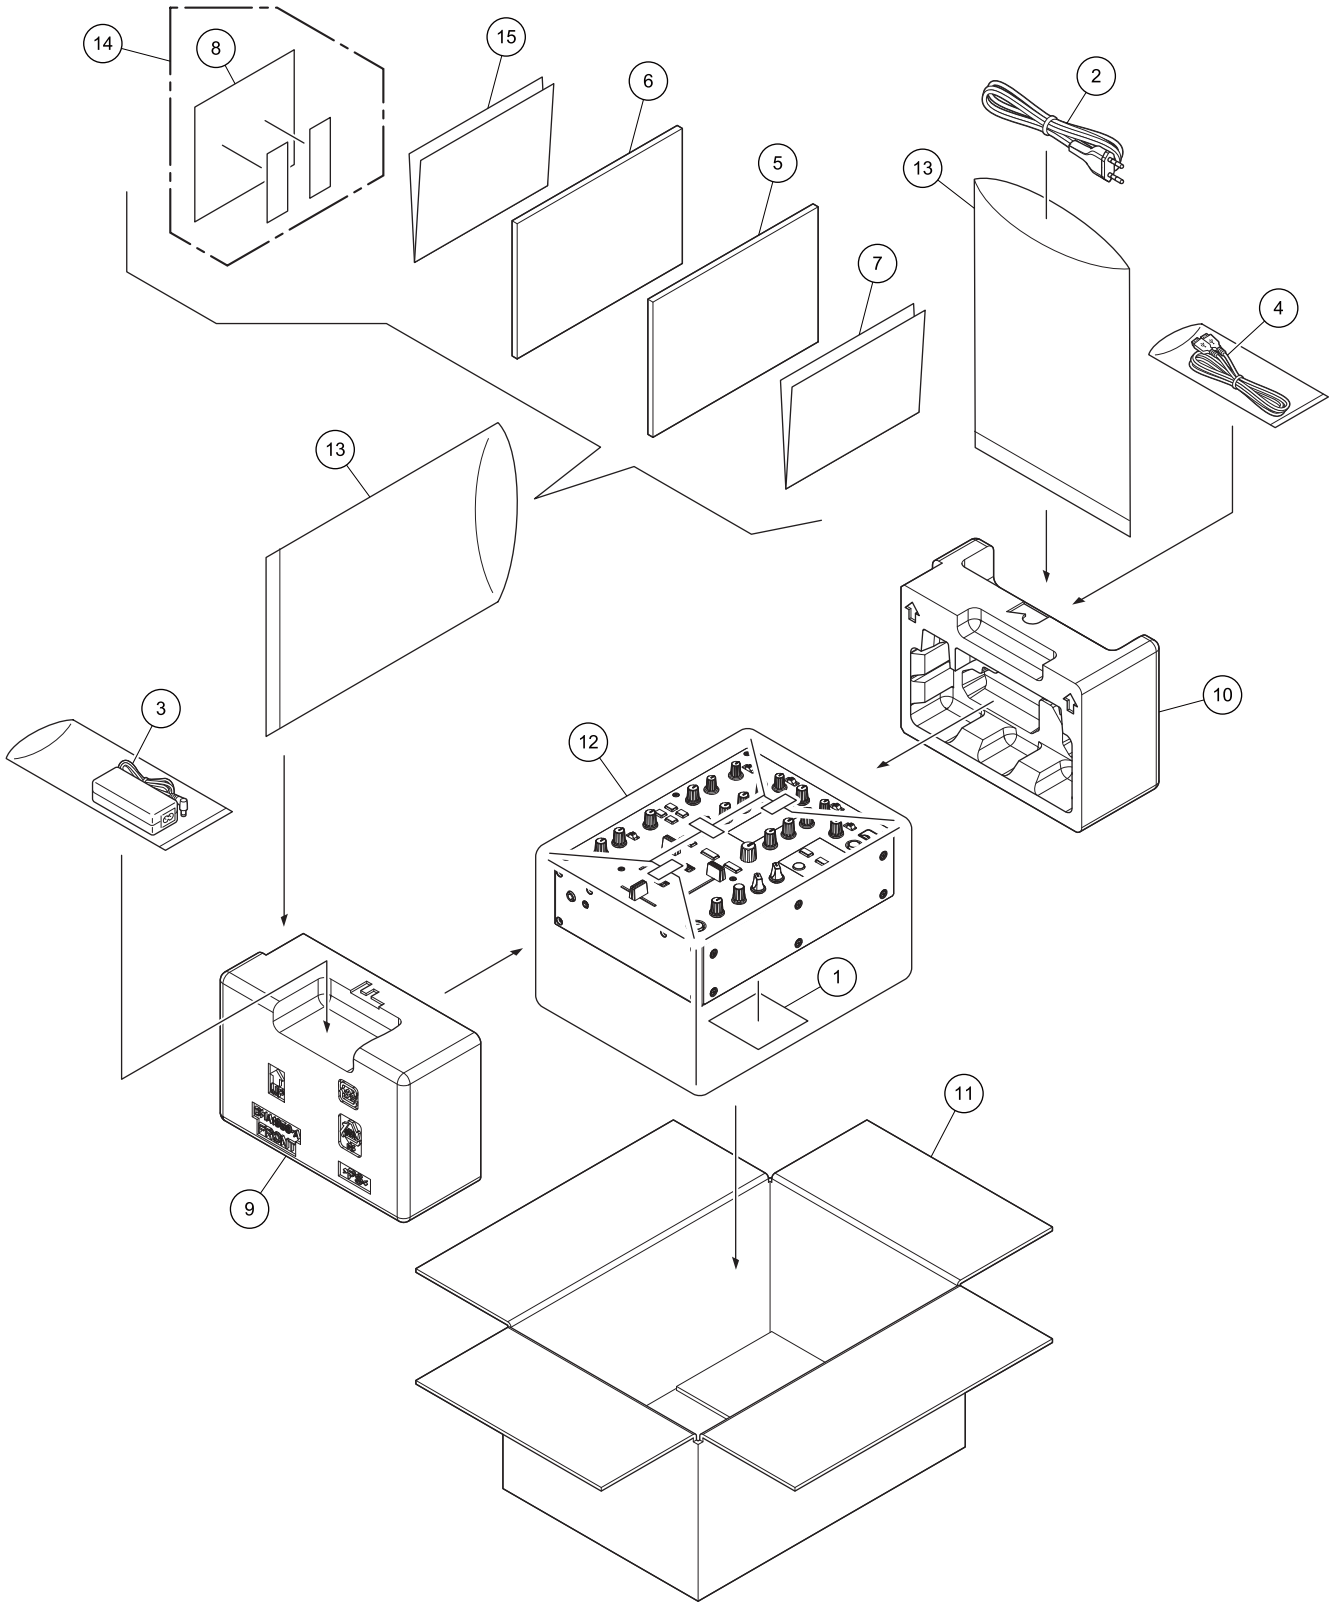

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Name Label	See Contrast table (2)
⚠	2	Power Cord	See Contrast table (2)
⚠	3	AC Adapter	See Contrast table (2)
	4	USB Cable	DDE1128
	5	Operating Instructions (Quick Start Guide)	See Contrast table (2)
	6	Operating Instructions (Quick Start Guide)	See Contrast table (2)
NSP	7	Warranty Card	See Contrast table (2)
NSP	8	Leaflet	DRM1419
	9	Packing Pad	DHA1959
	10	Packing Pad	DHA1960
	11	Packing Case	See Contrast table (2)
	12	Sheet	RHX1006
NSP	13	Polyethylene Bag	AHG7117
NSP	14	License Key Card ASSY (rekordbox dj, recordbox dvs)	DEA1064
NSP	15	Leaflet	See Contrast table (2)


(2) CONTRAST TABLE

SYXJ, UXJCB, FWLPWXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	SYXJ	UXJCB	FWLPWXJ	XJCN
	1	Name Label	DRW2714	DRW2714	DRW2714	DRW2715
⚠	2	Power Cord	ADG1154	XDG3052	ADG1154	ADG7079
⚠	3	AC Adapter	DWR1567	DWR1567	DWR1551	DWR1551
	5	Operating Instructions (Quick Start Guide)	DRH1393	DRH1395	DRH1396	DRH1397
	6	Operating Instructions (Quick Start Guide)	DRH1394	Not used	Not used	Not used
NSP	7	Warranty Card	DRY1270	Not used	Not used	Not used
	11	Packing Case	DHG3496	DHG3522	DHG3523	DHG3525
NSP	15	Leaflet	DRH1431	DRH1431	DRH1431	DRH1432

9.2 EXTERIOR SECTION


* **Notes on assembling :**
  - Always attach the No.11 Panel (DNK6657) first to the CHASSIS SECION, and then attach the No.12 Panel (DNF2012) to the CHASSIS SECTION.
  - Attach the No.12 Panel (DNF2012) while lifting toward the top side (to reduce the gap between it and Control Panel.)

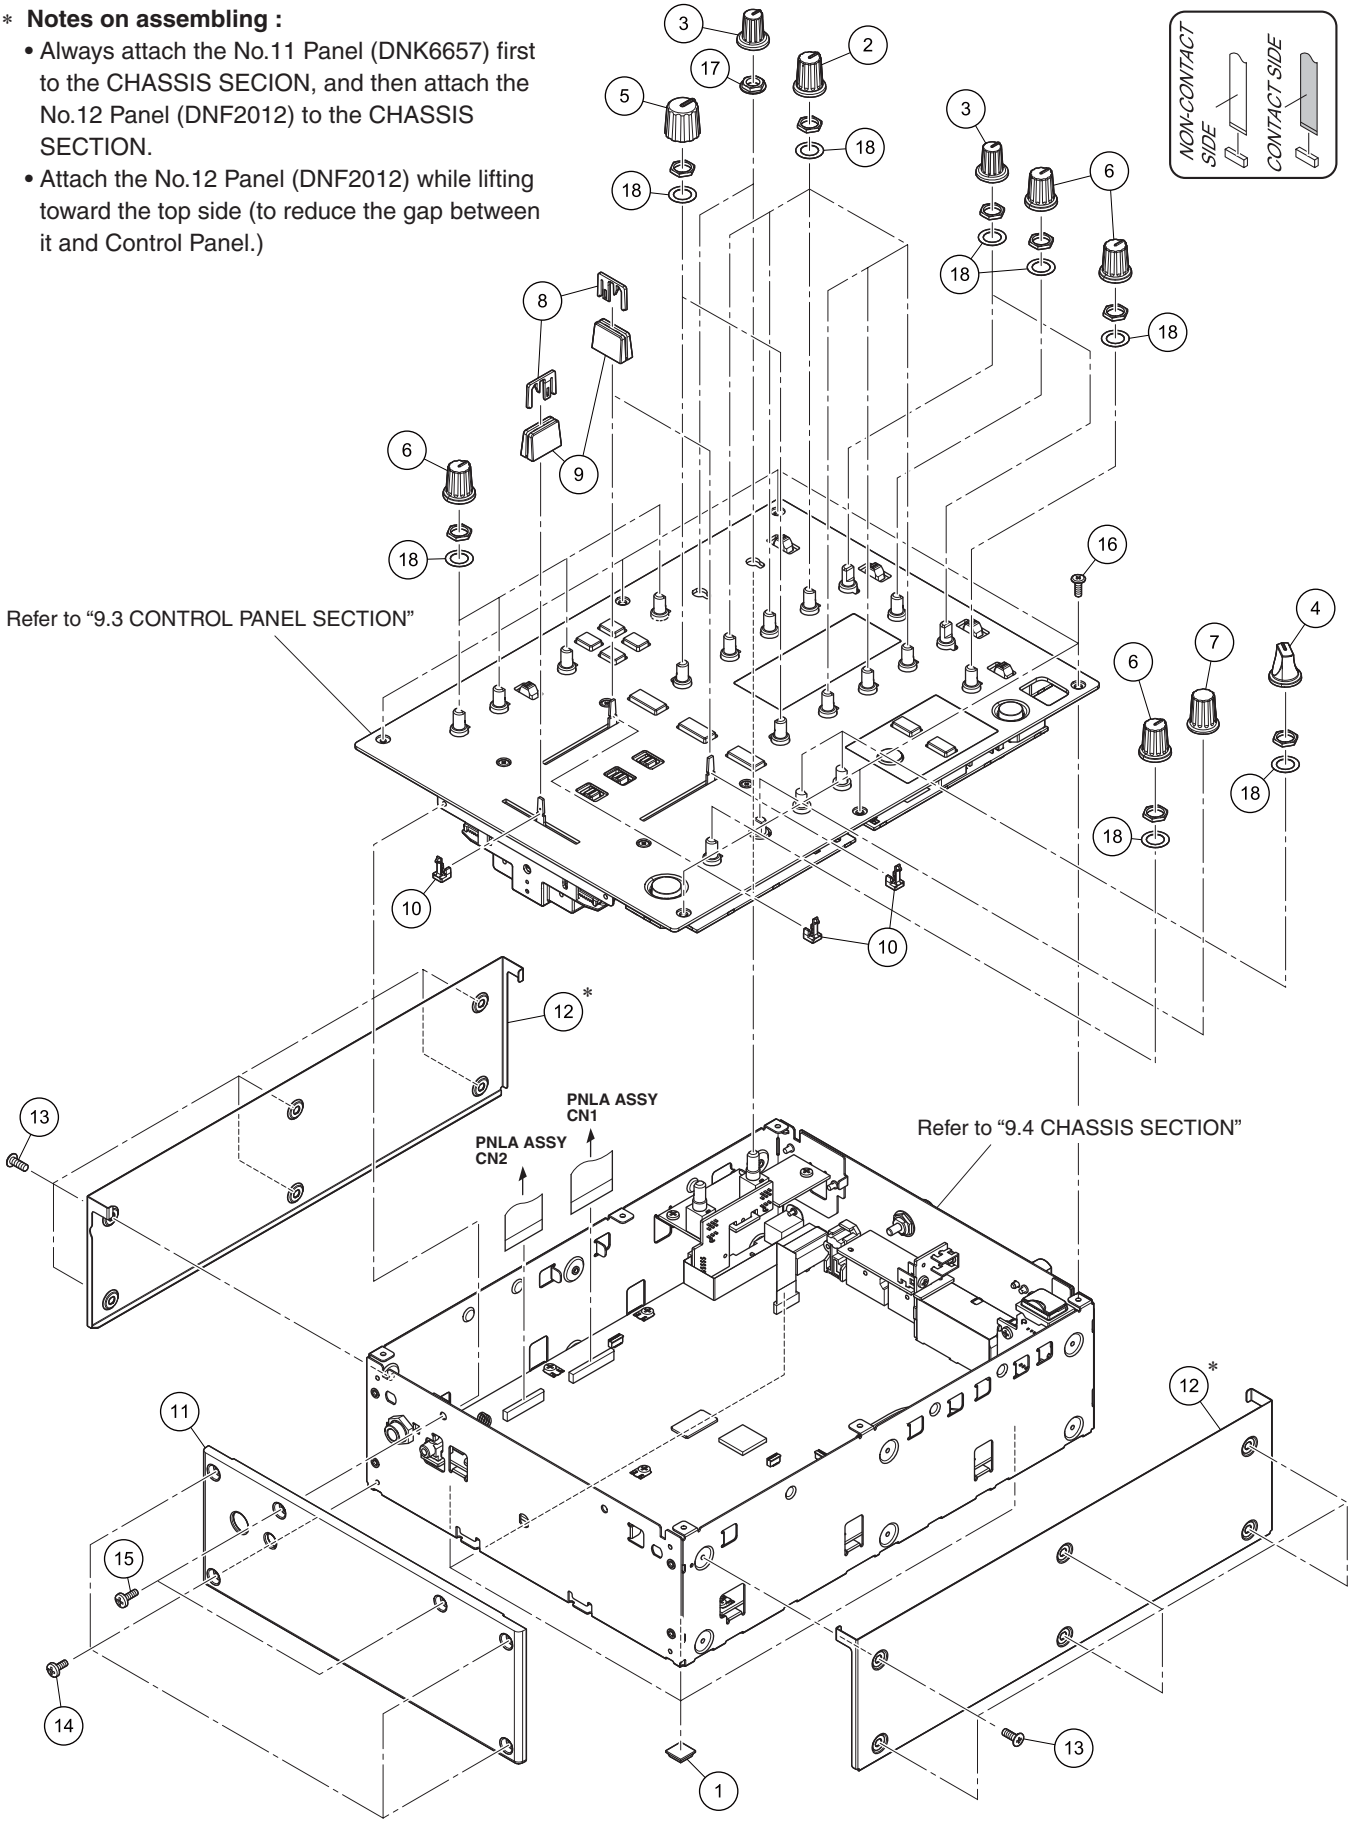

EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Rubber Foot	VEB1325
	2	Rotary VR Knob (B)	DAA1279
	3	Knob	DAA1372
	4	Rotary SW Knob	DAA1185
	5	Knob	DAA1373
	6	Rotary VR Knob (B)	DAA1183
	7	Knob	DAA1374
	8	Slider Knob 2	DAC2685
	9	Slider Knob 1	DAC2684
	10	Slider Knob Stopper	DNK5888
	11	Panel	DNK6657
	12	Panel	DNF2012
	13	Screw (Fe)	DBA1290
	14	Screw	BBZ30P060FTB
	15	Screw	BBZ30P080FTB
	16	Screw	DBA1446
	17	Flange Nut M7	DBN1011
	18	Washer	DEC3731


9.3 CONTROL PANEL SECTION

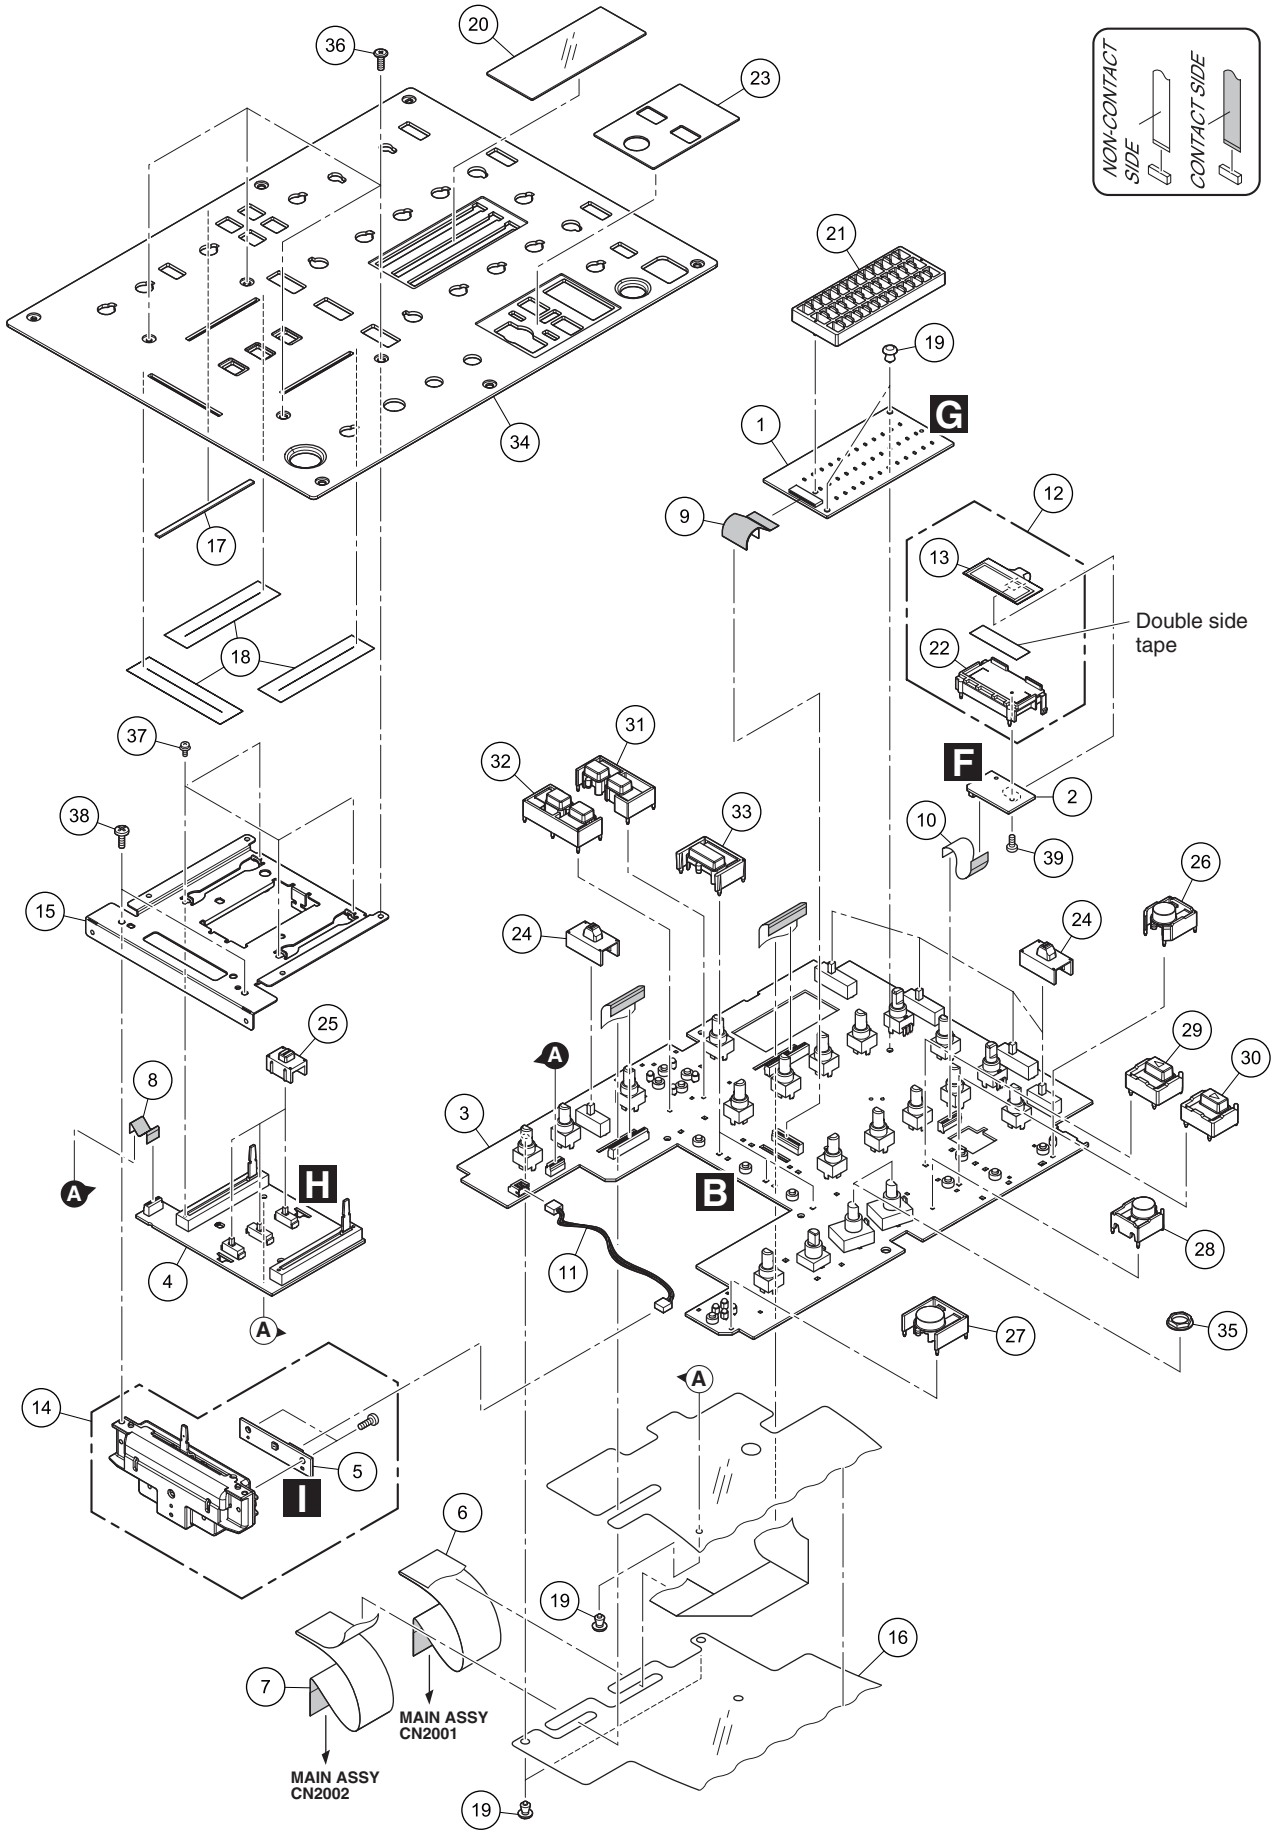

CONTROL PANEL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	LEDB ASSY	DWX3938
	2	OLED ASSY	DWX3939
	3	PNLA ASSY	DWX3940
	4	FADB ASSY	DWX3942
NSP	5	CRFD ASSY	DWX3258
	6	FFC	DDD1790
	7	FFC	DDD1791
	8	FFC	DDD1792
	9	FFC	DDD1793
	10	FFC	DDD1794
	11	Connector ASSY	PF03PP-B12
	12	OLED ASSY	DEA1065
NSP	13	Matrix OEL	MXS4057
	14	Cross Fader ASSY	DXA2257
	15	Stay	DNF2011
	16	Sheet	DEC3714
	17	Packing/L	DEC3416
	18	Fader Packing	DEC2903
	19	Rivet (Plastic)	RBM-003
	20	Plate	DAK1009
	21	Holder	DNK6660
NSP	22	Holder	DNK6659
	23	Plate	DAK1010
	24	Cap/MIC	DAC2773
	25	Cap/FDR	DAC2771
	26	Button	DAC3252
	27	Button	DAC3257
	28	Button	DAC3248
	29	Button	DAC3247
	30	Button	DAC3253
	31	Button	DAC3249
	32	Button	DAC3251
	33	Button	DAC3250
	34	Control Panel	DNB1249
	35	Flange Nut M9	DBN1008
	36	Screw	DBA1446
	37	Screw	PMH20P040FTC
	38	Screw	BPZ30P080FTC
	39	Screw	BPZ20P040FTB

9.4 CHASSIS SECTION

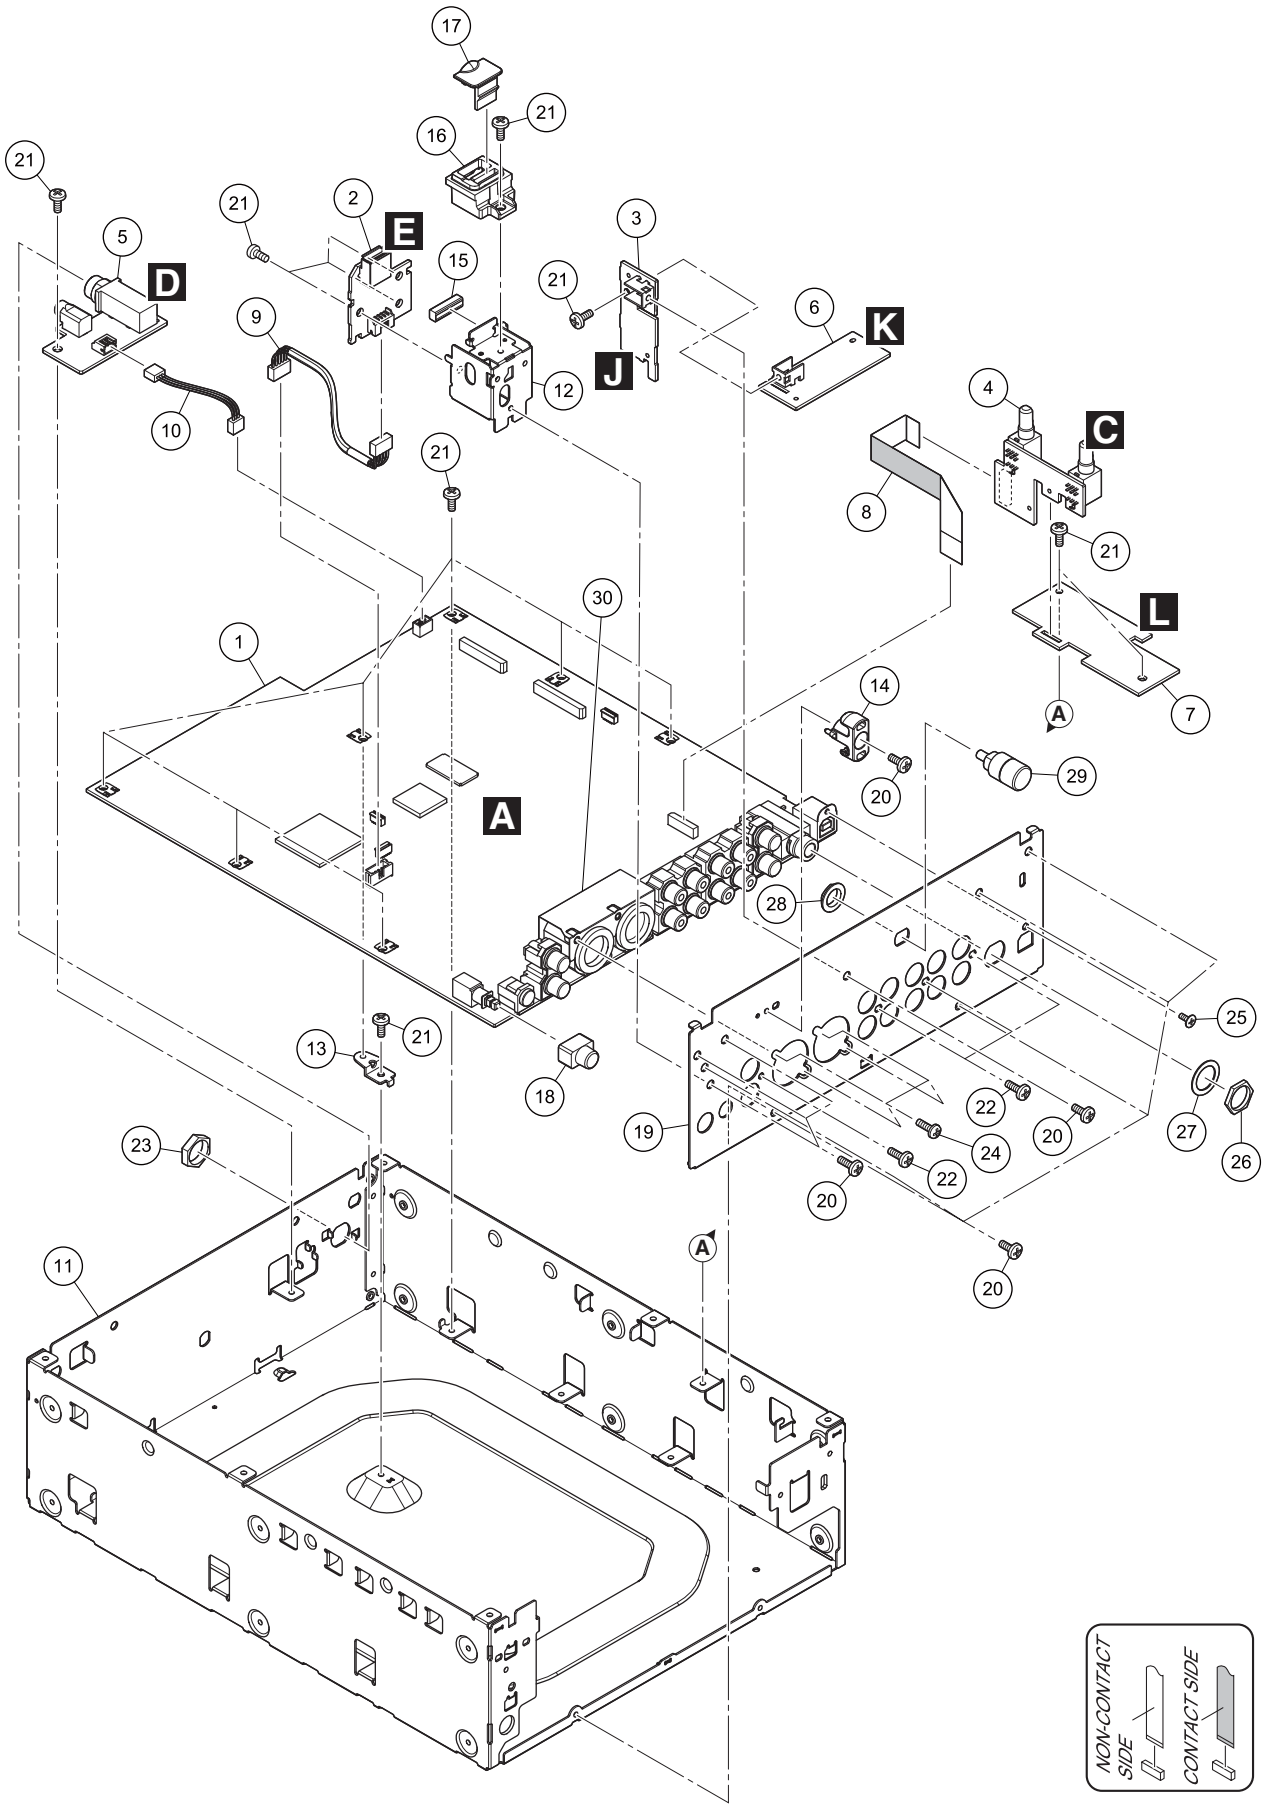

CHASSIS SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN ASSY	DWX3931
	2	USBA ASSY	DWX3937
	3	MPSH ASSY	DWX3943
	4	TRIM ASSY	DWX3944
	5	HPJK ASSY	DWX3941
	6	PPSH ASSY	DWX3932
NSP	7	STAY ASSY	DWX3945
	8	FFC	DDD1795
	9	Shielded CONN-Cable	DDA1077
	10	Connector ASSY	PF03PP-B07
	11	Chassis	DNA1462
	12	Stay	DNF2009
NSP	13	PCB Stay (Fe)	VNE2489
	14	Hook	DNK6067
	15	EMC Gasket	DEC3715
	16	Panel	DNK6656
	17	USB Cover	DNK4999
	18	Knob	DNK6607
	19	Rear Panel	DNC2127
	20	Screw	BBZ30P060FTB
	21	Screw	BBZ30P060FTC
	22	Screw	BPZ30P080FTB
	23	Nut M12	DBN1018
	24	Screw	PPZ30P080FTB
	25	Screw (M3x5)	DBA1340
	26	Nut	NKX2FTC
	27	Washer	DEC2920
	28	Flange Nut M9	DBN1008
	29	Earth Terminal	DKE1019
NSP	30	Canon Shield	DNF1789

12. PCB PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω → 56 × 10^1 → 561 ····· RD1/4PU 5 6 1 J
47 kΩ → 47 × 10^3 → 473 ····· RD1/4PU 4 7 3 J
0.5 Ω → R50 ····· RN2H R 5 0 K
1 Ω → 1R0 ····· RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ → 562 × 10^1 → 5621 ····· RN1/4PC 5 6 2 1 F

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
NSP	1	..MOTHER ASSY	DWM2633
	2	..MAIN ASSY	DWX3931
	2	..USBA ASSY	DWX3937
	2	..LEDB ASSY	DWX3938
	2	..OLED ASSY	DWX3939
	2	..MPSH ASSY	DWX3943
	2	..TRIM ASSY	DWX3944
NSP	1	..PNL ASSY	DWM2634
	2	..PNLA ASSY	DWX3940
	2	..HPJK ASSY	DWX3941
	2	..FADB ASSY	DWX3942
	2	..PPSH ASSY	DWX3932
NSP	2	..STAY ASSY	DWX3945
NSP	1	..CRFD ASSY	DWX3258

A MAIN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	501 AUD DSP SYS LSI	D810K013DZKB400
	IC	502 AND Logic IC	TC7SG08FU
	IC	503 RAM IC	M12L128168A-5TG2N
	IC	504,1005 Logic IC	TC7SZU04FUS2
	IC	505,1007 Logic IC	TC7SZ08FUS2
	IC	506-512 IC	TC74VHC08FK
	IC	1001 Flash Blank UC IC	R5S72690RW266FP
	IC	1002 Flash ROM	DYW1977*
		*Part number of the initial firmware equipped	
	IC	1003 Logic IC	74LCX244FT
	IC	1004 Logic IC	TC7SH04FUS2
	IC	1006 Logic IC	TC7SHU04FUS2
	IC	1008,1009 Logic IC	TC7SH08FUS2
	IC	1501 Flash Blank UC IC	R5S72690RW266FP
	IC	1504 IC	H337S3959
⚠	IC	2001 Regulator IC	MM1856A50N
⚠	IC	2002 DC/DC CONV IC	MM3542BF
⚠	IC	2003 DC-DC Converter	BD9328EFJ
⚠	IC	2004 DC/DC CONV IC	MM3543BH
⚠	IC	2005 IC	TPS2557DRB
⚠	IC	2006 IC	BD2226G
⚠	IC	2007 Regulator IC	NJM78M05DL1A
⚠	IC	2008 Regulator IC	MM3571A33P
⚠	IC	2009,2010 IC	BD9851EFV
⚠	IC	2011 IC	NJM78M15DL1A
⚠	IC	2012 Regulator IC	NJM79M15DL1A
	IC	2013 IC	S-80930CNMC-G80
	IC	2501,2502,2701,2702 IC	NJM4580MD
	IC	2503,2504,2703,2704 AD Converter IC	AK5358AET
	IC	2901,2902,2905 IC	NJM4580MD
	IC	2903,2904 AD Converter IC	AK5358AET
	IC	3101 IC	AK4382AVT
	IC	3102,3103,3106 IC	NJM4580MD
	IC	3104,3105 OP-AMP IC	NJM4580D
	IC	3301 IC	TC74VHC08FK
	IC	3302 Audio DAC	AK4384ET
	IC	3303,3304 IC	NJM4580MD
	Q	501,1001,1501,2003 Resistor Built-IN TR	LTC024EEB
⚠	Q	2001 FET	RSQ035P03
	Q	2002,2004,2009 Bipolar TR	LSCR523UB
	Q	2005 Resistor Built-IN TR	RN1903S1
⚠	Q	2006,2007 FET	RSQ035P03
	Q	2008 Resistor Built-IN TR	LTC024EEB
	Q	2010 Bipolar TR	LSAR523UB
	Q	2011,2014 FET	RSQ030P03
	Q	2012 Power MOS FET	RSR020P05
	Q	2013 FET	RTQ045N03
	Q	2015,2017 Resistor Built-IN TR	LTC024EEB
	Q	2016,2018-2020 Bipolar TR	LSAR523UB
	Q	2021 Resistor Built-IN TR	LTC014YEB
	Q	2022,2025 Bipolar TR	LSAR523UB
	Q	2023,2024,2026 Bipolar TR	LSCR523UB
	Q	2501-2504,2701-2704,2901,2902 Chip FET	2SK209
	Q	3101,3102 Resistor Built-IN TR	LTA024EEB
	Q	3103-3122 Chip Transistor	INC2002AC1
	Q	3123,3124 Resistor Built-IN TR	LTC024EEB
	Q	3301,3302 Chip FET	2SK209
	Q	3303,3304 Chip Transistor	INC2002AC1
	Q	3305,3307 Bipolar TR	LSCR523UB
	Q	3306,3308 Bipolar TR	LSAR523UB
	Q	3309,3311 Transistor	2SD1760F5
	Q	3310,3312 Transistor	2SB1184F5
	Q	3313,3314 Chip Transistor	INC2002AC1
	D	501,1001,1501 LED (Red)	SML-D12V8W(PQ)
⚠	D	2001 Diode	RB060M-30
	D	2002 Zener Diode	DZ2J051M0
	D	2003 Zener Diode	DZ2J150M0

Mark	No.	Description	Part No.
	D	2004,2006,2007 Rectifier Diode	DA2J101
	D	2008-2012 Schottky Diode	DB2J41100
	D	2013,2014 Schottky Diode	RB501VM-40
	D	2016-2020 Rectifier Diode	DA2J101
	D	2501-2504,2701-2704 Switching Diode	DAN217UM
	D	2902-2904 Switching Diode	DAN217UM
	D	3101,3102,3301-3304 Rectifier Diode	DA2J101

MISCELLANEOUS

Mark	No.	Description	Part No.
	L	501 SMD Ferrite Beads	CTF1823
	L	1001,1002,1502,1503 Chip Solid Inductor	QTL1013
	L	1003 Coil	ATH7015
	L	1005,1501 Inductor	CTF1793
	L	1504 Choke Coil	ATH7099
	L	2001 Coil	CTH1475
	L	2002 SMD SPL Inductor	CTH1524
	L	2003 Choke Coil	CTH1561
	L	2004-2007 Power Inductor	ATH7011
	L	2008-2011 Choke Coil	CTH1426
	X	501 Crystal(24.576MHz)	DSS1204
	X	1001 Resonator	CSS1760
	X	1002 Crystal Resonator	CSS1840
	F	501 EMI Filter	DTL1106
	KN	2001-2007 Wrapping Terminal	CKF1089
⚠	P	2001 Protector(4.000A)	DEK1104
	S	2001 Push SW	ASG1102
	VA	2001,2901,2902,3101-3105 Varistors	EZJZ1V270RM
	CN	1502 Connector	AKM1276
	CN	2001 Connector	CKS3868
	CN	2002 Connector	CKS3865
	CN	2901 Connector	CKS3854
	CN	3301 Plug(3P)	KM200NA3
	JA	1001 USB Connector	DKN1237
	JA	2001 DC Power Jack	DKN1649
	JA	2501,2701 RCA Jack/4P	DKB1112
	JA	2901 6.5 DIA Jack	DKN1654
	JA	2902 RCA Jack	DKB1119
	JA	3101,3102 Canon Connector	DKB1093
	JA	3103 RCA Jack	DKB1122

RESISTORS

Mark	No.	Description	Part No.
	R	1078	RAB4CQ103J
	R	1093	RS1/16SS2402F
	R	1095	RS1/16SS5601D
	R	1107,1110	RAB4CQ101J
	R	1111,1112	RAB4CQ104J
	R	1116,1117,1121	RS1/10SR0R0J
	R	1119,1120	RS1/10SR105J
	R	1528	RAB4CQ103J
	R	1542	RS1/16SS5601D
	R	1573	RS1/8SQ0R0J
	R	1577,1581	RS1/10SR0R0J
	R	2006	RS1/10SR101J
	R	2011	RS1/16SS3302D
	R	2012	RS1/16SS2202D
	R	2013	RS1/16SS5601D
	R	2014	RS1/16SS1202D
	R	2015	RS1/10SR1000D
	R	2016,2019	RS1/16SS2201D
	R	2017	RS1/10SR6801D
	R	2018	RS1/10SR75R0D
	R	2020	RS1/16SS6800D
	R	2021	RS1/16SS3301D
	R	2022	RS1/16SS1002D
	R	2034	RS1/16SS2702F
	R	2035	RS1/16SS5602F
	R	2037	RS1/10SR472J
	R	2038	RS1/10SR331J
	R	2043,2045	RS1/10SR1502D
	R	2044,2046	RS1/10SR1002D
	R	2049,2051	RS1/10SR3002D
	R	2050,2052	RS1/10SR6802D
	R	2056	RS1/10SR1803D
	R	2057	RS1/10SR5102D
	R	2061	RS1/10SR1002D
	R	2062	RS1/10SR5101D
	R	2063	RS1/10SR5601D
	R	2064	RS1/10SR1001D
	R	2067	RS1/10SR103J
	R	2068	RS1/10SR1502D
	R	2069	RS1/10SR1002D
	R	2070,2074	RS1/10SR330J
	R	2071,2078	RS1/10SR100J
	R	2072,2073	RS1/10SR472J
	R	2075,2077	RS1/10SR3002D
	R	2076,2079	RS1/10SR105J
	R	2080	RS1/10SR6201D
	R	2081,2086	RS1/10SR6802D
	R	2082	RS1/10SR512J
	R	2085,2089	RS1/10SR1002D
	R	2087	RS1/10SR1503D
	R	2088	RS1/10SR5101D
	R	2090	RS1/10SR2002D
	R	2091	RS1/10SR6202D
	R	2092	RS1/10SR1001D
	R	2095	RS1/10SR3001D
	R	2104,2132	RS1/10SR0R0J
	R	2107	RS1/16SS2002D
	R	2109	RS1/16SS1002D
	R	2130	RS1/10SR822J
	R	2135	RS1/10SR333J
	R	2136	RS1/10SR473J
	R	2501-2504	RN1/16SE1000D
	R	2505,2506,2509,2510	RN1/16SE4702D
	R	2511,2512	RN1/16SE1801D
	R	2513,2516	RN1/16SE1501D
	R	2514,2515,2517,2518	RN1/16SE1201D
	R	2519,2520	RN1/16SE1501D
	R	2521,2523	RN1/16SE1001D
	R	2522,2524	RN1/16SE1000D
	R	2525,2526	RS1/10SR470J
	R	2527,2529	RN1/16SE2701D
	R	2528,2530	RN1/16SE2200D
	R	2531,2532	RN1/16SE3303D
	R	2533,2534	RS1/10SR0R0J
	R	2535,2536	RN1/16SE2702D
	R	2537,2538	RN1/16SE5600D
	R	2539,2540	RN1/16SE1800D
	R	2701-2704	RN1/16SE1000D
	R	2705,2706,2709,2710	RN1/16SE4702D

Mark	No.	Description	Part No.
	R	2711,2712	RN1/16SE1801D
	R	2713,2716,2719,2720	RN1/16SE1501D
	R	2714,2715,2717,2718	RN1/16SE1201D
	R	2721,2723	RN1/16SE1001D
	R	2722,2724	RN1/16SE1000D
	R	2725,2726	RS1/10SR470J
	R	2727,2729	RN1/16SE2701D
	R	2728,2730	RN1/16SE2200D
	R	2731,2732	RN1/16SE3303D
	R	2733,2734	RS1/10SR0R0J
	R	2735,2736	RN1/16SE2702D
	R	2737,2738	RN1/16SE5600D
	R	2739,2740	RN1/16SE1800D
	R	2901,2902	RN1/16SE2001D
	R	2903-2906	RN1/16SE1000D
	R	2907,2908	RN1/16SE2202D
	R	2909,2910	RN1/16SE8201D
	R	2913,2922	RN1/16SE2701D
	R	2914,2917	RN1/16SE1501D
	R	2915,2919	RN1/16SE4701D
	R	2916	RN1/16SE8200D
	R	2918	RN1/16SE1500D
	R	2920,2921	RN1/16SE2202D
	R	2925,2926	RS1/10SR0R0J
	R	2931	RN1/16SE3900D
	R	2933	RN1/16SE3301D
	R	2936	RN1/16SE2700D
	R	3109-3112	RS1/10SR513J
	R	3113-3120	RN1/16SE6801D
	R	3121,3124,3125	RN1/16SE1502D
	R	3122,3123,3126,3127	RN1/16SE1001D
	R	3128,3129,3132,3133,3136	RN1/16SE1502D
	R	3130,3131,3134,3135	RN1/16SE1001D
	R	3137-3144	RN1/16SE4701D
	R	3145-3152	RS1/8SQ8200F
	R	3153-3156	RS1/10SR223J
	R	3157-3164	RS1/8SQ5600F
	R	3165,3170-3172	RS1/8SQ2200F
	R	3166-3169	RS1/10SR223J
	R	3173-3176	RS1/8SQ1800F
	R	3181-3188	RN1/16SE3300D
	R	3189-3196	RN1/16SE1801D
	R	3197-3200	RN1/16SE8201D
	R	3201,3202,3211,3212	RN1/16SE1202D
	R	3203-3210	RN1/16SE4701D
	R	3213,3216-3218	RS1/4SA560J
	R	3214,3215	RS1/4SA330J
	R	3219-3222	RN1/16SE2201D
	R	3223-3228	RS1/10SR103J
	R	3229,3230	RS1/10SR104J
	R	3231-3234	DCN1199
	R	3235-3240	RS1/10SR103J
	R	3241,3242	RS1/4SA330J
	R	3246-3249	RS1/10SR0R0J
	R	3311,3312	RN1/16SE3900D
	R	3313,3314	RN1/16SE3901D
	R	3315,3316	RN1/16SE1502D
	R	3317,3318	RN1/16SE3301D
	R	3319,3320	RS1/10SR1002D
	R	3321,3322	RS1/16SE1002D
	R	3323,3324	RS1/10SR105J
	R	3325,3326	RS1/10SR153J
	R	3328,3330	RS1/8SQ680J
	R	3331	RS1/10SR0R0J
	R	3332-3335	RN1/16SE3301D
	R	3336-3339	RS1/10SR1001D
	R	3340-3343	RS1/10SR1801D
	R	3344-3351	RS1/4SA220J
	R	3352,3353	RS1/10SR102J
	R	3354,3355	RS1/10SR153J
	R	3356,3357	RN1/16SE4702D
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	501,503	CKSSYB104K10
	C	502	CCH1565
	C	504,506-510,512	CKSSYB103K16
	C	505	CKSSYB471K50
	C	511,513,515	CKSSYB102K50
	C	514,516,518,520	CKSSYB103K16
	C	517,519,521,523,525,527	CKSSYB102K50
	C	522,524,526,528	CKSSYB103K16
	C	529,531,533,535	CKSSYB102K50
	C	530,532,534,536,538	CKSSYB103K16
	C	537	CCSSCH101J50
	C	539	CKSRYB105K10
	C	540,541	CKSSYB104K10
	C	542	CCG1192
	C	543-549	CKSSYB103K16
	C	550,551	CCSSCH120J50
	C	552,555,558,559	CCSSCH101J50
	C	553,556	CKSSYB102K50
	C	554,557,560,562	CKSSYB104K10
	C	561,563	CKSSYB102K50
	C	564,565	CCSSCH101J50
	C	566,568,570,574,576	CKSSYB104K10
	C	567,569,571	CKSSYB102K50
	C	572,573	CCSSCH101J50
	C	575,577	CKSSYB102K50
	C	1001-1003,1005,1007	CKSSYB104K10
	C	1004	CCH1961
	C	1008	CKSSYB471K50
	C	1009-1015,1017-1020	CKSSYB104K10
	C	1016,1021,1022,1027,1029	CKSSYB102K50
	C	1023-1026,1028,1030-1032	CKSSYB104K10
	C	1033,1034,1039,1040	CKSSYB102K50
	C	1035-1038,1041-1044	CKSSYB104K10
	C	1045,1046,1050,1051,1054	CKSSYB102K50
	C	1047-1049,1052,1053	CKSSYB104K10
	C	1055-1062	CKSSYB104K10
	C	1063	CKSSYB102K50
	C	1064,1066,1068,1069	CCSSCH471J50
	C	1065	CKSSYB221K50
	C	1067,1076,1078	CKSSYB103K16
	C	1070,1075,1080	CKSSYB102K50
	C	1072-1074,1077	CCSSCH471J50
	C	1079,1081	CKSSYB104K10
	C	1082,1084,1087,1097,1098	CCG1192
	C	1083,1093,1094	CKSSYB103K16

Mark	No.	Description	Part No.
C	1085,1086,1095,1096		CKSSYB104K10
C	1088,1090,1091		CKSSYB102K50
C	1101,1102,1111		CKSSYB104K10
C	1103,1104		CKSSYB103K16
C	1105,1106,1112		CKSSYB102K50
C	1107,1108		CCSSCH101J50
C	1109		CCSSCH150J50
C	1110,1114		CCSSCH120J50
C	1113		CCSSCH100D50
C	1115		CCSSCH471J50
C	1116,1122		CCG1192
C	1117,1120,1121,1123		CKSSYB104K10
C	1118,1119,1125		CKSSYB102K50
C	1124		CKSSYB103K16
C	1126		CCSSCH101J50
C	1501,1504,1507-1514		CKSSYB104K10
C	1502		CCH1961
C	1505		CKSSYB471K50
C	1506,1517,1519		CKSSYB102K50
C	1515,1518,1520,1523		CKSSYB103K16
C	1516,1521,1522		CKSSYB104K10
C	1524,1525		CKSSYB102K50
C	1526-1528		CKSSYB104K10
C	1529,1535,1541		CKSSYB103K16
C	1530,1531,1536,1537		CKSSYB102K50
C	1532-1534,1538-1540		CKSSYB104K10
C	1542,1543,1547,1548		CKSSYB102K50
C	1544-1546,1549		CKSSYB104K10
C	1550,1553-1555,1563,1564		CKSSYB103K16
C	1551,1560-1562		CKSSYB102K50
C	1552,1557-1559,1566,1567		CKSSYB104K10
C	1556		CKSSYB221K50
C	1569,1570,1582,1583		CCG1192
C	1571		CCSSCH101J50
C	1572,1573,1576,1577		CKSSYB102K50
C	1574,1575,1580,1581		CKSSYB103K16
C	1578,1579,1584-1586		CKSSYB104K10
C	1587,1588		CCG1192
C	1589,1594,2015-2017		CKSSYB104K10
C	1590		CKSSYB102K50
C	1593		CKSSYB222K50
C	2001,2014		CKSQYB105K25
C	2002,2003		CCG1236
C	2004		CCG1254
C	2005-2007		CKSQYB104K25
C	2008-2010		CKSRYB102K50
C	2018		CCSSCH101J50
C	2019		CKSRYB104K16
C	2020		ACE7115
C	2021		CKSSYB103K16
C	2022		ACE7129
C	2023		DCE1029
C	2024-2026		CKSRYB153K50
C	2027		CEVW221M25
C	2028-2030,2033		CKSSYB104K10
C	2031		CCSSCH821J50
C	2032		CKSSYB122K50
C	2037		CKSSYB102K50
C	2041,2045,2050-2053		CCG1192
C	2042		CKSRYB104K25

Mark	No.	Description	Part No.
C	2043,2044		CKSRYB102K50
C	2046,2047		CKSQYB104K25
C	2048		CEVW101M16
C	2054,2061		CKSRYB103K50
C	2055,2056,2062,2063		CEVW470M16
C	2057,2058,2064,2065		CKSRYB104K16
C	2059,2060		CKSSYB102K50
C	2066		CKSQYB104K25
C	2067		CEVW331M6R3
C	2068,2069		CKSSYB102K50
C	2070,2071,2075,2076		CKSRYB104K16
C	2072,2073		CEVW470M16
C	2074		CCG1192
C	2077		CCSRCH222J50
C	2078,2079		CKSSYB102K50
C	2080		CFHXSP104J16
C	2081		CCH1565
C	2082		CKSSYB103K16
C	2083		CKSQYB104K25
C	2084		CCSSCH101J50
C	2085,2094,2104		CCSSCH102J50
C	2086		CKSSYB104K16
C	2087,2103,2111,2113		DCH1263
C	2089		CKSRYB105K10
C	2090		CKSRYB474K10
C	2091		CKSQYB334K50
C	2093		CKSRYB334K10
C	2095,2114		CCSRCH102J50
C	2096		CKSRYB104K16
C	2097		CCG1192
C	2098		CCSSCH271J50
C	2099		CCSSCH471J50
C	2100,2118		CCG1328
C	2102		CKSSYB103K16
C	2105		CKSSYB103K25
C	2106		CKSSYB332K50
C	2115,2117		CCSSCH561J50
C	2120		CKSSYB104K10
C	2121,2125,2128,2129,2132		CKSRYB105K10
C	2122,2126		DCH1263
C	2124,2127		CKSYB105K16
C	2135,2137		CKSSYB682K25
C	2138,2139		CCG1218
C	2140,2141		CKSSYB104K16
C	2142		CCSSCH271J50
C	2143,2144		CKSRYB104K25
C	2145,2146		CCG1192
C	2148,2149		CCG1236
C	2150		CCSSCH471J50
C	2151,2152,2155,2156		CCSSCH102J50
C	2153,2154		CKSQYB105K25
C	2157,2158		CEVW221M25
C	2159,2160		CKSRYB105K10
C	2161		CKSSYB103K25
C	2162,2163		CCG1192
C	2164,2165		CKSQYB334K50
C	2166,2167		CCSSCH102J50
C	2168,2169		ACE7099
C	2170,2171		CKSRYB104K25
C	2172,2173,2175-2185,2187-2189		CKSSYB103K16

Mark	No.	Description	Part No.
	C	2186	CKSSYB104K10
	C	2190	CEVW101M16
	C	2501,2502	CCSRCH102J50
	C	2503,2506	CCSRCH101J50
	C	2504,2505	CCSRCH221J50
	C	2507,2508	CCSRCH471J50
	C	2512,2513,2526,2529	CKSRYB104K25
	C	2517,2518	CKSRYB223K50
	C	2519,2520	CCSRCH331J50
	C	2521,2522,2525,2530	CEVW101M25
	C	2523,2524	ACE7125
	C	2527,2528,2533,2534	CEVW330M25
	C	2531,2532,2539,2542,2548	ACE7100
	C	2535,2544	CEVW470M16
	C	2536,2545	CKSSYB104K10
	C	2537,2540,2543,2546,2549	CKSSYB102K50
	C	2538,2547	CEVW101M16
	C	2541,2553	CEVW100M16
	C	2550,2556	CKSSYB103K16
	C	2554,2559,2560	ACE7100
	C	2555	CKSSYB102K50
	C	2563,2567	CKSRYB102K50
	C	2564,2568	CKSRYB103K50
	C	2701,2702	CCSRCH102J50
	C	2703,2706	CCSRCH101J50
	C	2704,2705	CCSRCH221J50
	C	2707,2708	CCSRCH471J50
	C	2712,2713	CKSRYB104K25
	C	2717,2718	CKSRYB223K50
	C	2719,2720	CCSRCH331J50
	C	2721,2722,2725,2730	CEVW101M25
	C	2723,2724	ACE7125
	C	2726,2729	CKSRYB104K25
	C	2727,2728,2733,2734	CEVW330M25
	C	2731,2732,2739,2742	ACE7100
	C	2735,2744	CEVW470M16
	C	2736,2745	CKSSYB104K10
	C	2737,2740,2743	CKSSYB102K50
	C	2738,2747	CEVW101M16
	C	2741,2753	CEVW100M16
	C	2746,2749,2755	CKSSYB102K50
	C	2748,2754,2759,2760	ACE7100
	C	2750,2756	CKSSYB103K16
	C	2763,2767	CKSRYB102K50
	C	2764,2768	CKSRYB103K50
	C	2901,2902,2905,2906,2909,2910	CCSRCH102J50
	C	2903,2904	CKSRYB472K50
	C	2907,2908	CCSRCH101J50
	C	2914,2917	CCSSCH471J50
	C	2915	CKSSYB103K25
	C	2916	CCSRCH331J50
	C	2918,2921	CEVW101M25
	C	2919	CKSRYB104K25
	C	2922,2929	CEVW330M25
	C	2931	CEVW470M16
	C	2932	CKSSYB104K10
	C	2933,2936,2939	CKSSYB102K50
	C	2934	CEVW101M16
	C	2935,2938	ACE7100
	C	2937	CEVW100M16

Mark	No.	Description	Part No.
	C	2940	CKSSYB103K16
	C	2944,2994,2995	CKSRYB104K25
	C	2947,2951	CKSRYB102K50
	C	2948,2952	CKSRYB103K50
	C	2992,2993	CEVW330M25
	C	2996	CEVW470M16
	C	2997	CKSSYB104K10
	C	2998,3001	CKSSYB102K50
	C	2999	CEVW101M16
	C	3000,3003	ACE7100
	C	3002	CEVW100M16
	C	3004	CKSSYB102K50
	C	3005,3105	CKSSYB103K16
	C	3006,3007	CKSRYB104K25
	C	3008,3009	CEVW330M25
	C	3101	CKSRYB102K50
	C	3102	CKSRYB103K50
	C	3106	CCSRCH102J50
	C	3107,3127,3139	ACE7100
	C	3108	CCH2000
	C	3109-3112	ACE7117
	C	3113-3120	ACE7107
	C	3122-3126,3141-3144	CKSRYB104K25
	C	3133,3138	CEVW221M25
	C	3134-3137,3147-3150	CCSRCH101J50
	C	3145	CKSRYB102K50
	C	3146,3151	CKSRYB104K25
	C	3153-3158	CEVW221M25
	C	3159-3162	ACE7119
	C	3163,3164	ACE7115
	C	3301	CCSSCH101J50
	C	3302,3310,3313	CKSSYB104K10
	C	3303,3309	CKSSYB102K50
	C	3304	CKSRYB102K50
	C	3305	CKSRYB103K50
	C	3308	CKSSYB103K16
	C	3311	CEVW220M6R3
	C	3312	CEVW101M16
	C	3314	CKSSYB102K50
	C	3315,3316	CEVW220M16
	C	3317,3318	CCSRCH102J50
	C	3319,3320	CCSRCH181J50
	C	3321,3322,3326,3327,3330-3333	CKSRYB104K16
	C	3328,3329	CKSRYB104K25
	C	3334,3335	CEVW101M16
	C	3336,3337	CEVW471M10
	C	3338,3339	CCSRCH330J50
	C	3340	CKSRYB104K25
	C	3341	CKSRYB102K50

B PNLA ASSY

SEMICONDUCTORS

	IC	1 Flash ROM	DYW1979*
		* Part number of the initial firmware equipped	
⚠	IC	2 Regulator IC	NJM2872BF33
	IC	3 IC	S-80927CNMC-G8X
	IC	4 Comparator IC	NJM2903M

Mark	No.	Description	Part No.
	Q	1 Transistor	LTC124EUB
	Q	2 Bipolar TR	LSAR523UB
	Q	3 Chip Digital Trans.	LTA124EUB
	Q	4 Resistor Built-IN TR	LTA114EUB
	Q	5-13 Bipolar TR	LSCR523UB
	Q	14-17,19,22 Transistor	LTC124EUB
	Q	18 Transistor	LTA143EUB
	Q	20 Bipolar TR	LSAR523UB
	Q	21,23 Bipolar TR	LSCR523UB
	D	2 LED	LTL17KRH5D
	D	3,6,9,13 LED (White)	SLR343WBD2PT(Z1)
	D	4,8,42-44 LED (Blue)	SLR343BC4T(JK)
	D	5,7,10-12,14 LED (Yellow)	SLI-343YYW(TUV)
	D	15-41 Rectifier Diode	DA2J101

MISCELLANEOUS

	X	1 Ceramic Resonator	DSS1147
	J	1,2,4 Jmper 15mm	JMPR15R0
	J	3,11,18,25 Jmper 10mm	JMPR10R0
	J	5-7,12,14,16,17,20,21,24,26 Jmper 7.5mm	JMPR7R5
	J	8,23 Jmper 5mm	JMPR5R0
	J	9,27,35 Jmper 12.5mm	JMPR12R5
	J	10 Jmper 27.5mm	JMPR27R5
	J	15 Jmper 22.5mm	JMPR22R5
	J	19 Jmper 20mm	JMPR20R0
	J	22 Jmper 15mm	JMPR15R0
	J	28,30,40 Jmper 17.5mm	JMPR17R5
	J	29,31,34,38,39,42,43 Jmper 7.5mm	JMPR7R5
	J	32,33,44,46 Jmper 25mm	JMPR25R0
	J	36,41 Jmper 30mm	JMPR30R0
	J	37,45,48,53,63 Jmper 10mm	JMPR10R0
	J	47,52 Jmper 5mm	JMPR5R0
	J	49,54,58 Jmper 15mm	JMPR15R0
	J	50,57,62,66 Jmper 12.5mm	JMPR12R5
	J	51,56,59,60,64 Jmper 7.5mm	JMPR7R5
	J	55 Jmper 20mm	JMPR20R0
	J	61 Jmper 30mm	JMPR30R0
	J	65,69,73,86 Jmper 15mm	JMPR15R0
	J	67 Jmper 27.5mm	JMPR27R5
	J	68,76,81,87,91 Jmper 10mm	JMPR10R0
	J	70,71 Jmper 20mm	JMPR20R0
	J	72,85,89 Jmper 22.5mm	JMPR22R5
	J	74,77,78,80,82,88,90 Jmper 7.5mm	JMPR7R5
	J	75,84,8211 Jmper 5mm	JMPR5R0
	J	79 Jmper 12.5mm	JMPR12R5
	J	83 Jmper 25mm	JMPR25R0
	S	1,3,4,6-14 Tact Switch	DSG1079
	S	2,15 Slide Switch	DSH1066
	S	5,16,18 Slide Switch	DSH1058
	S	17 Rotary Encoder	DSX1134
	S	19 Rotary Switch	DSG1098
	S	20 Rotary Switch	DSG1144
	VR	1-8,10,13,14,16,18 Rotary VR	DCS1116
	VR	9,11,12,15 Rotary VR	DCS1117
	CN	1 27P Connector	VKN1258
	CN	2 24P Connector	VKN1255
	CN	3 8P Connector	VKN1239
	CN	4 L-Plug(3P)	KM200NA3L
	CN	5 11P Connector	VKN1242
	CN	7 17P Connector	VKN1248

RESISTORS

	R	160-166,180,181,184-186	RS1/4SA0R0J
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	1,3,6,8,10,13	CEJQ470M16
	C	2,4,5,7,9,11	CKSRYB104K16
	C	12	CCSRCH471J50
	C	14-29,39	CCSRCH102J50
	C	30,31,33,37,40	CKSRYB104K16
	C	32,34,35,38	CKSRYB103K50
	C	36	CKSRYB105K10
	C	41	CCSRCH101J50
	C	42,43,45-60,63-67,69	CKSRYB104K16
	C	44	CKSRYB473K50
	C	61,62	CKSRYB103K50

C TRIM ASSY

MISCELLANEOUS

	VR	4301,4302 Rotary VR	DCS1119
	CN	4301 13P Connector	VKN1273

CAPACITORS

	C	4301	CKSRYB104K25

D HPJK ASSY

MISCELLANEOUS

	J	4001 Jmper 17.5mm	JMPR17R5
	J	4002 Jmper 7.5mm	JMPR7R5
	CN	4001 L-Plug(3P)	KM200NA3L
	JA	4001 Headphone Jack	DKN1622
	JA	4002 Stereo Mini Jack	XKN3017

CAPACITORS

	C	4001,4002,4005,4006	ACE7113

E USBA ASSY

MISCELLANEOUS

	CN	3501 L-Plug(5P)	KM200NA5L
	JA	3501 USB Jack	DKB1118

RESISTORS

		All Resistors	RS1/10SR###J

CAPACITORS

Mark	No.	Description	Part No.
	C	3502	CCG1192
	C	3503	CKSSYB103K16
	C	3504	CKSSYB102K50

F OLED ASSY

MISCELLANEOUS

	CN	3801 Connector	CKS3852
	CN	3802 FFC/FPC Connector	CKS6476

RESISTORS

		All Resistors	RS1/16SS###J

CAPACITORS

	C	3801	CKSSYB103K16
	C	3802	CKSSYB104K10
	C	3803,3807	CKSRYB104K25
	C	3804	CCG1222
	C	3806	CKSQYB105K25

G LEDB ASSY

SEMICONDUCTORS

	Q	3601,3602,3605,3606 Resistor Built-IN TR	LTC014EEB
	Q	3603,3604,3607,3608,3611,3612 Transistor	2SAR502UB
	Q	3609,3610 Resistor Built-IN TR	LTC014EEB
	Q	3625-3636 Bipolar TR	LSCR523UB
	D	3602 LED (Red)	SML-D12V8W(PQ)
	D	3603-3606,3615-3618 Yellow LED	SML-D12Y8W(QR)
	D	3607-3612,3619-3624 Green LED	SML-D12M8W(NP)
	D	3613,3614,3626 LED (Red)	SML-D12V8W(PQ)
	D	3627-3630 Yellow LED	SML-D12Y8W(QR)
	D	3632-3637 Green LED	SML-D12M8W(NP)

MISCELLANEOUS

	CN	3601 17P Connector	RKN1058

CAPACITORS

	C	3601	CEVW100M16

H FADB ASSY

SEMICONDUCTORS

	D	4101-4108 Rectifier Diode	DA2J101

MISCELLANEOUS

	J	4101 Jmper 7.5mm	JMPR7R5
	S	4101 Slide Switch	ASH1037
	S	4102,4103 Slide Switch	ASH1039
	VR	4101 Variable Resistor	DCV1020
	VR	4102 Variable Resistor	DCV1020

Mark	No.	Description	Part No.
	CN	4101 8P Connector	VKN1239

CAPACITORS

	C	4101,4102	CKSRYB104K16

I CRFD ASSY

CRFD ASSY because of only ASSY replacement, parts are not serviced.

CRFD ASSY は ASSY 交換のみとなる為、
部品はサービスされません。

J MPSH ASSY

MISCELLANEOUS

	KN	4201 Screw Plate	VNE1948

K PPSH ASSY

MISCELLANEOUS

	KN	4501 Screw Plate	VNE1948

L STAY ASSY

STAY ASSY has no service parts.