
2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

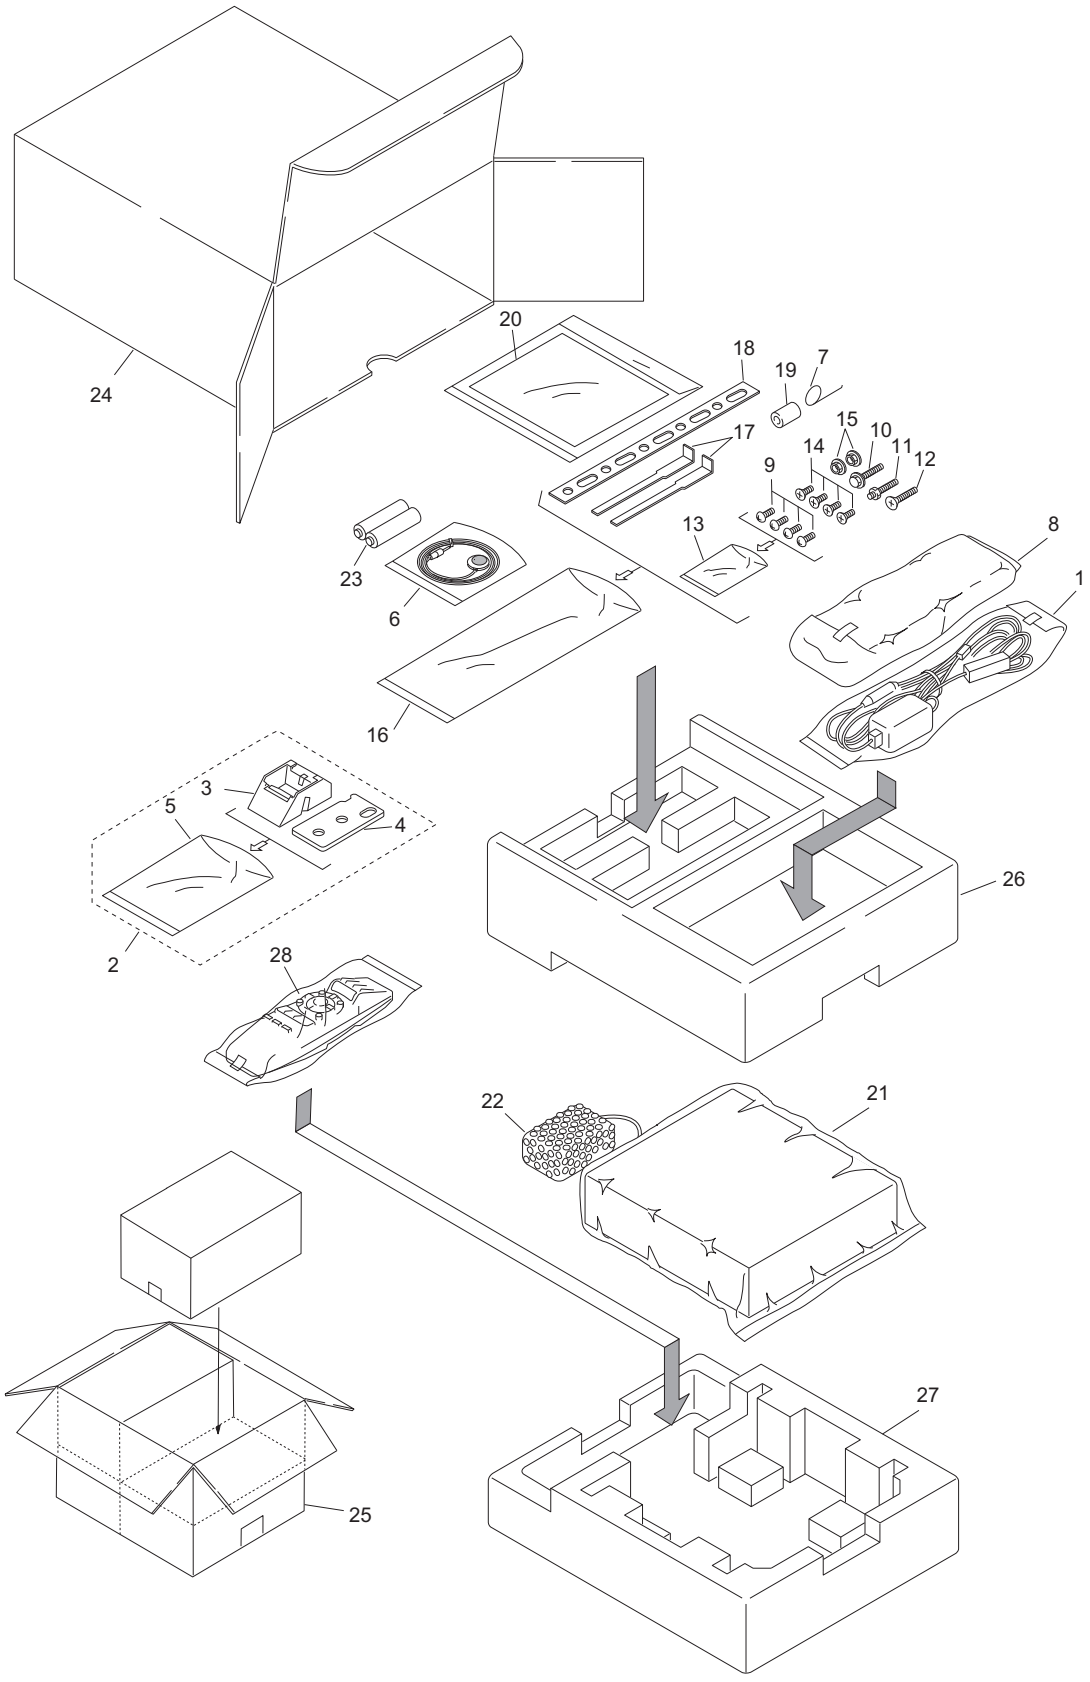

NOTE:

● Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.

● Screws adjacent to ∇ mark on the product are used for disassembly.


● PACKING SECTION PARTS LIST

Mark	No.	Description	Part No. DEH-P920R/UC	Part No. DEH-P9200R/UC	Part No. DEH-P9250/ES
	1	Cord Assy	CDE6336	CDE6336	CDE6336
	2	Base Assy	CEA2426	CEA2426	CEA2426
*	3	Base	CNS5031	CNS5031	CNS5031
*	4	Sheet	CZA3371	CZA3371	CZA3371
	5	Polyethylene Bag	CZE3188	CZE3188	CZE3188
	6	Microphone Assy	CPM1022	Not used	CPM1022
	7	Spring	CBH-865	CBH-865	CBH-865
	8	Case Assy	CXB3520	CXB3520	CXB3520
	9	Screw	BMZ50P060FMC	BMZ50P060FMC	BMZ50P060FMC
	10	Screw	CBA-102	CBA-102	Not used
	11	Screw	CBA1002	CBA1002	CBA1002
	12	Screw	CBA1120	CBA1120	CBA1120
*	13	Polyethylene Bag	CEG-127	CEG-127	CEG-127
	14	Screw	CMZ50P060FMC	CMZ50P060FMC	CMZ50P060FMC
	15	Nut	NF50FMC	NF50FMC	Not used
*	16	Polyethylene Bag	CEG-158	CEG-158	CEG-158
	17	Handle	CNC5395	CNC5395	CNC5395
	18	Strap	CNC5402	CNC5402	Not used
	19	Bush	CNV1917	CNV1917	CNV1917
	20-1	Polyethylene Bag	CEG1116	CEG1116	CEG1116
	20-2	Owner's Manual	CRD3211	CRD3220	CRD3213
	20-3	Owner's Manual	Not used	Not used	CRD3214
	20-4	Installation Manual	CRD3212	CRD3221	CRD3215
*	20-5	Caution Card	CRP1207	CRP1207	CRP1207
*	20-6	Warranty Card	CRY1070	Not used	Not used
*	20-7	Label	CRW1343	CRW1343	Not used
*	20-8	Card	Not used	ARY1048	Not used
	21	Polyethylene Bag	CEG1185	CEG1185	* CEG1088(Cover)
	22	Air Cushioned Bag	CEG1192	Not used	CEG1192
	23	Battery	CEX1006	CEX1006	CEX1006
	24	Carton	CHG4039	CHG4040	CHG4038
	25	Contain Box	CHL4039	CHL4040	CHL4038
	26	Protector	CHP2032	CHP2032	CHP2032
	27	Protector	CHP2033	CHP2033	CHP2033
	28	Remote Control Assy	CXB3875	CXB3875	CXB3875

● Owner's Manual, Installation Manual

Model	Part No.	Language
DEH-P920R/UC	CRD3211	English, French
	CRD3112	English, French
DEH-P9200R/UC	CRD3220	English, French
	CRD3221	English, French
DEH-P9250/ES	CRD3213	English, Spanish
	CRD3214	Portuguese(B), Arabic
	CRD3115	English, Spanish, Portuguese(B), Arabic

2.2 EXTERIOR(DEH-P920R/UC, DEH-P9250/ES)

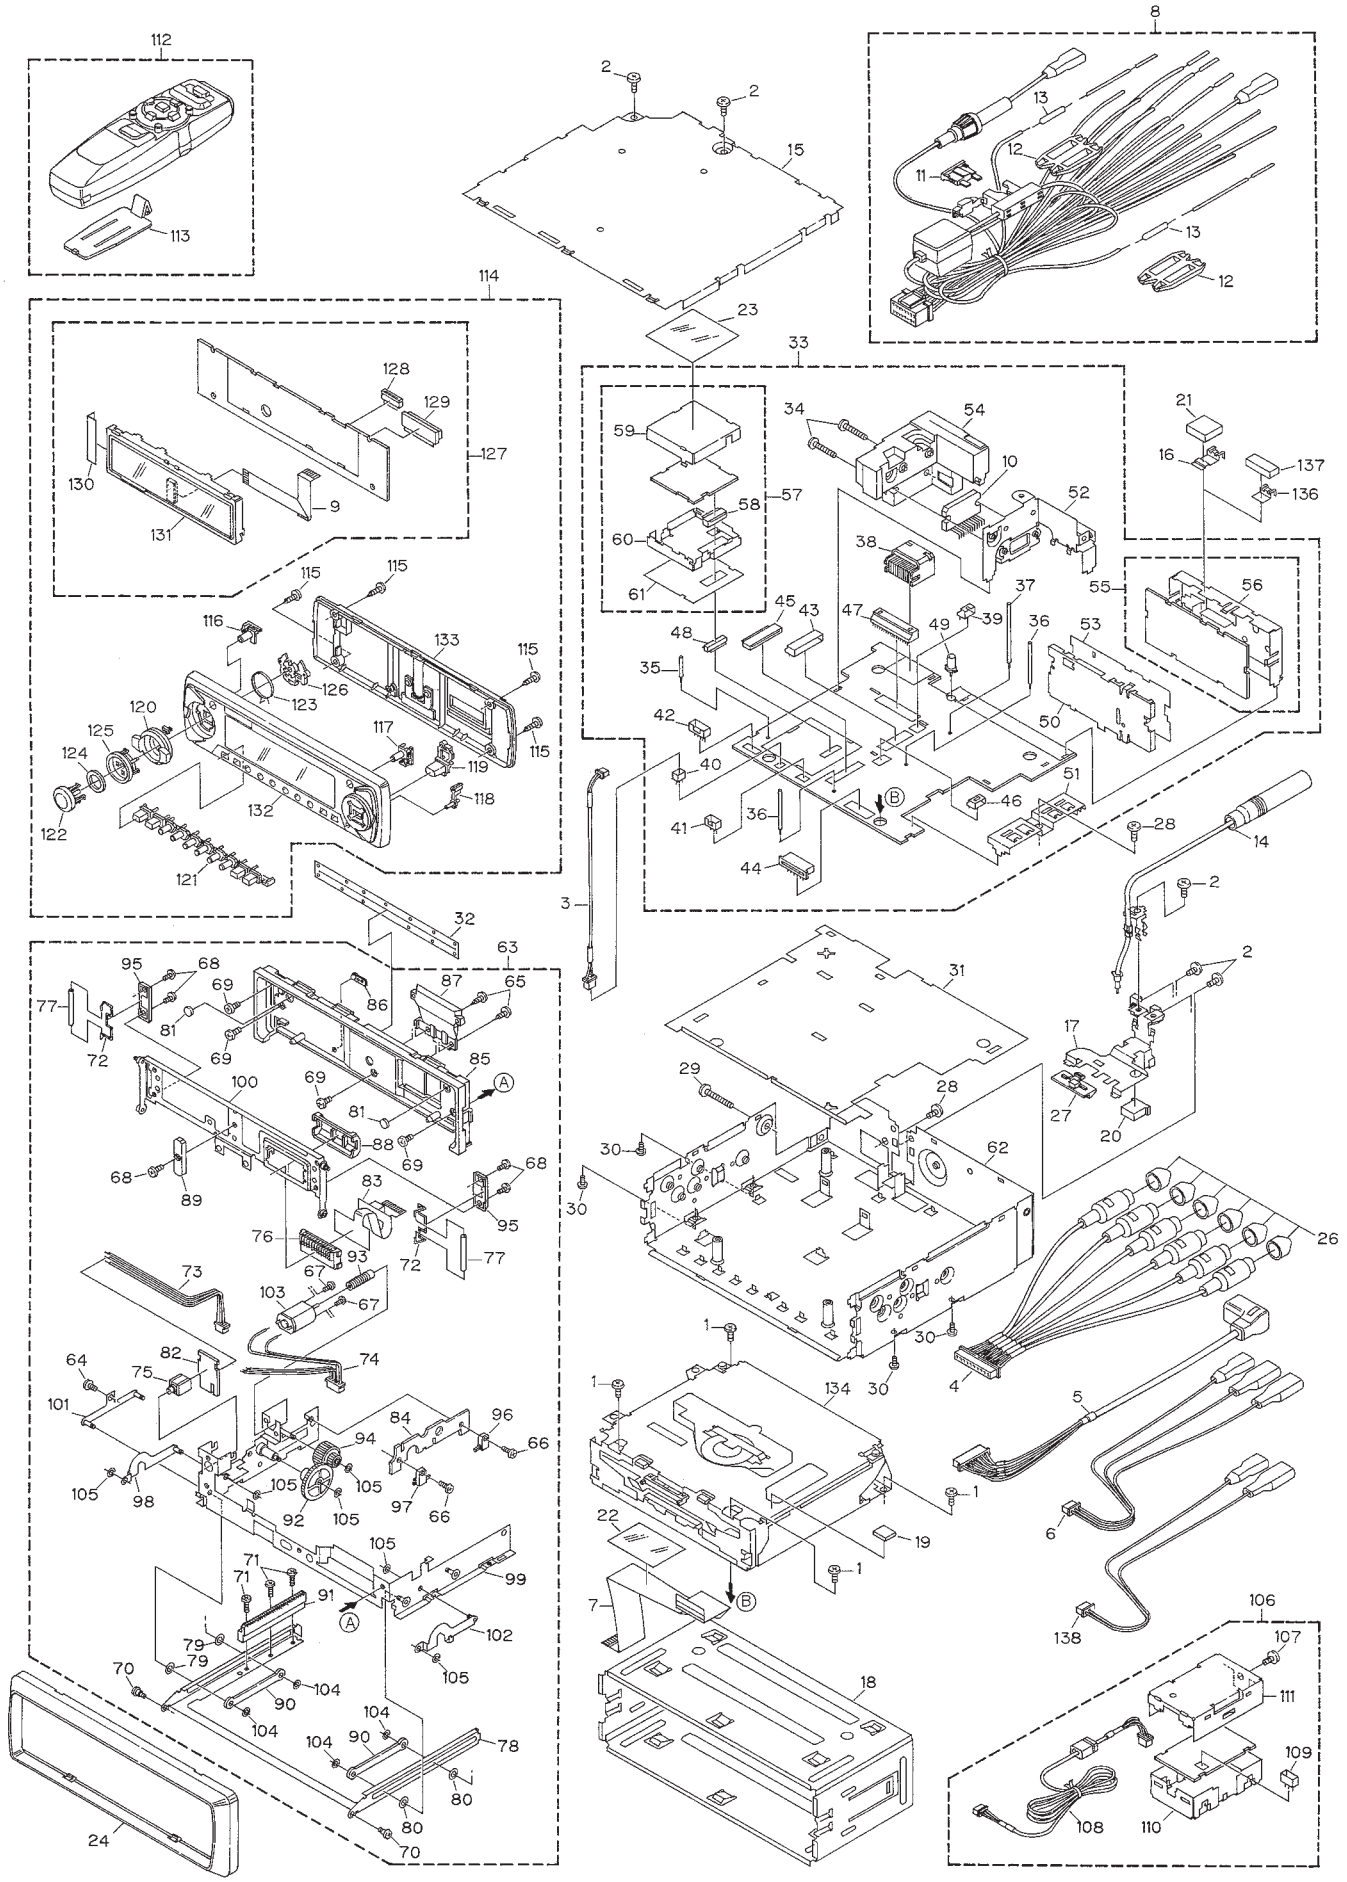

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BSZ26P060FMC
	2	Screw	BSZ30P050FMC
	3	Cord	CDE5536
	4	Cord Assy	CDE5840
	5	Cord Assy	CDE5842
	6	Cord Assy	See Contrast table(2)
	7	Connector	CDE5846
	8	Cord Assy	CDE6336
*	9	PCB	CNP5508
	10	IC(IC301)	PAL005A
	11	Fuse(10A)	CEK1136
	12	Cap	CNS1472
	13	Resistor	RS1/2PMF102J
	14	Antenna Cable	CDH1256
	15	Case	CNB2426
	16	Earth Plate	See Contrast table(2)
	17	Holder	CNC8170
	18	Holder	CNC8659
	19	Cushion	CNM6065
	20	Cushion	CNM6387
	21	Spacer	See Contrast table(2)
	22	Insulator	CNM6897
	23	Insulator	CNM6898
	24	Panel	See Contrast table(2)
	25	•••••	
	26	Cap	CNV2680
	27	Holder	CNV6396
	28	Screw	BSZ30P050FMC
	29	Screw	BSZ30P200FMC
	30	Screw(M2x2.5)	CBA1447
	31	Insulator	CNM6135
	32	Cover	CNM6489
	33	Tuner Amp Unit	See Contrast table(2)
	34	Screw	BMZ26P160FMC
	35	Clamper	CEF1004
	36	Clamper	CEF1008
	37	Clamper	CEF1009
	38	Plug(CN901)	CKM1278
	39	Plug(CN141)	CKS-766
	40	Plug(CN251)	CKS-783
	41	Plug(CN131)	CKS-784
	42	Plug(CN851)	CKS-786
*	43	Plug(CN101)	CKS1058
	44	Connector(CN801)	CKS1532
	45	Connector(CN991)	CKS1960
	46	Connector(CN681)	CKS3597
	47	Connector(CN351)	CKS3606
	48	Connector(CN252)	CKS3781
	49	Mini Pin Jack(CN451)	CKX1046
	50	Holder	See Contrast table(2)
	51	Holder	CNC8168
	52	Holder	CNC8169
	53	Insulator	See Contrast table(2)
	54	Heat Sink	CNR1535
	55	FM/AM Tuner Unit	CWE1501
	56	Holder	CNC7532
	57	DSP Unit	CWX2323
	58	Connector(CN3001)	CKS3782
	59	Case	CNC8166
	60	Case	CNC8167
	61	Insulator	CNM6130
	62	Chassis Unit	CXB3556
	63	Panel Assy	CXB5801
	64	Screw	BMZ20P030FMC
	65	Screw	BPZ20P060FMC
	66	Screw(M2x7)	CBA1060
	67	Screw(M2x3)	CBA1061
	68	Screw(M2x3)	CBA1082
	69	Screw(M2x3)	CBA1154
	70	Screw(M2x1.5)	CBA1430
	71	Screw(M1.4x4)	CBA1454
	72	Spring	CBH2130
	73	Cord	CDE5856
	74	Cord	CDE5960
	75	Mini Jack(CN4602)	CKN1015
	76	Connector	CKS3997
	77	Roller	CLA3583
	78	Frame	CNC8201
	79	Spacer	CNM6155
	80	Spacer	CNM6156
	81	Spacer	CNM6419
	82	PCB	CNP5341
	83	PCB	CNP5355
	84	PCB	CNP5941
	85	Panel	CNS5232
*	86	Lighting Conductor	CNV5391
	87	Lighting Conductor	CNV5605
	88	Cover	CNV5610
	89	Guide	CNV5672
	90	Guide	CNV5696

Mark	No.	Description	Part No.
	91	Rack	CNV5697
	92	Gear	CNV5698
	93	Gear	CNV5761
	94	Torque Limiter Unit	CNV5762
	95	Holder	CNV5763
	96	Switch(S951)	CSN1012
	97	Switch(S952)	CSN1022
	98	Arm Unit	CXB3574
	99	Frame Unit	CXB3575
	100	Holder Unit	CXB3576
	101	Bracket Unit	CXB3577
	102	Arm Unit	CXB3866
	103	Motor(M951)	CXM1085
	104	Washer	2-1816-0035-D2-00
	105	Washer	2-1821-0045-D2-00
	106	ASL Unit	CWX2322
	107	Screw	BSZ30P050FMC
	108	Cord Assy	CDE5845
	109	Plug(CN4501)	CKS-784
	110	Case	CNB2299
	111	Case	CNB2300
	112	Remote Control Assy	CXB3875
	113	Battery Cover	CNS5032
	114	Detach Grille Assy	See Contrast table(2)
	115	Screw	BPZ20P080FZK


Mark	No.	Description	Part No.
	116	Button(DISP)	CAC6511
	117	Button(OPEN)	CAC6512
	118	Button(RESET)	CAC6513
	119	Button(BAND)	CAC6515
	120	Knob(EQ)	CAC6732
	121	Button(1-6)	See Contrast table(2)
	122	Button(SOURCE)	See Contrast table(2)
	123	Spring	CBH2415
	124	Cushion	CNM6767
	125	Lighting Conductor	CNV6214
	126	Lighting Conductor	CNV6215
	127	Keyboard Unit	CWM7064
	128	Connector(CN1902)	CKS3995
	129	Connector(CN1901)	CKS3996
	130	Insulator	CNM6775
	131	OEL Module	MXK8002
	132	Grille Unit	See Contrast table(2)
	133	Cover Unit	See Contrast table(2)
	134	CD Mechanism Module(S8)	CXK5252
	135	•••••	
	136	Holder	See Contrast table(2)
	137	Cushion	See Contrast table(2)
	138	Cord Assy	See Contrast table(2)

(2) CONTRAST TABLE

DEH-P920R/UC and DEH-P9250/ES are constructed same except for the following:

Mark	No.	Description	Part No.	
			DEH-P920R/UC	DEH-P9250/ES
	6	Cord Assy	CDE5843	Not used
	16	Earth Plate	CNC7358	Not used
	21	Spacer	CNM6482	Not used
	24	Panel	CNS5256	CNS5548
	33	Tuner Amp Unit	CWM6214	CWM6126
	50	Holder	CNC7533	Not used
	53	Insulator	CNM5967	Not used
	114	Detach Grille Assy	CXB5456	CXB5457
	121	Button(1-6)	CAC6722	CAC6723
	122	Button(SOURCE)	CAC6719	CAC6718
	132	Grille Unit	CXB5330	CXB5331
	133	Cover Unit	CXB5339	CXB5340
	136	Holder	Not used	CNC6469
	137	Cushion	Not used	CNM4870
	138	Cord Assy	Not used	CDE5844

2.3 EXTERIOR(DEH-P9200R/UC)

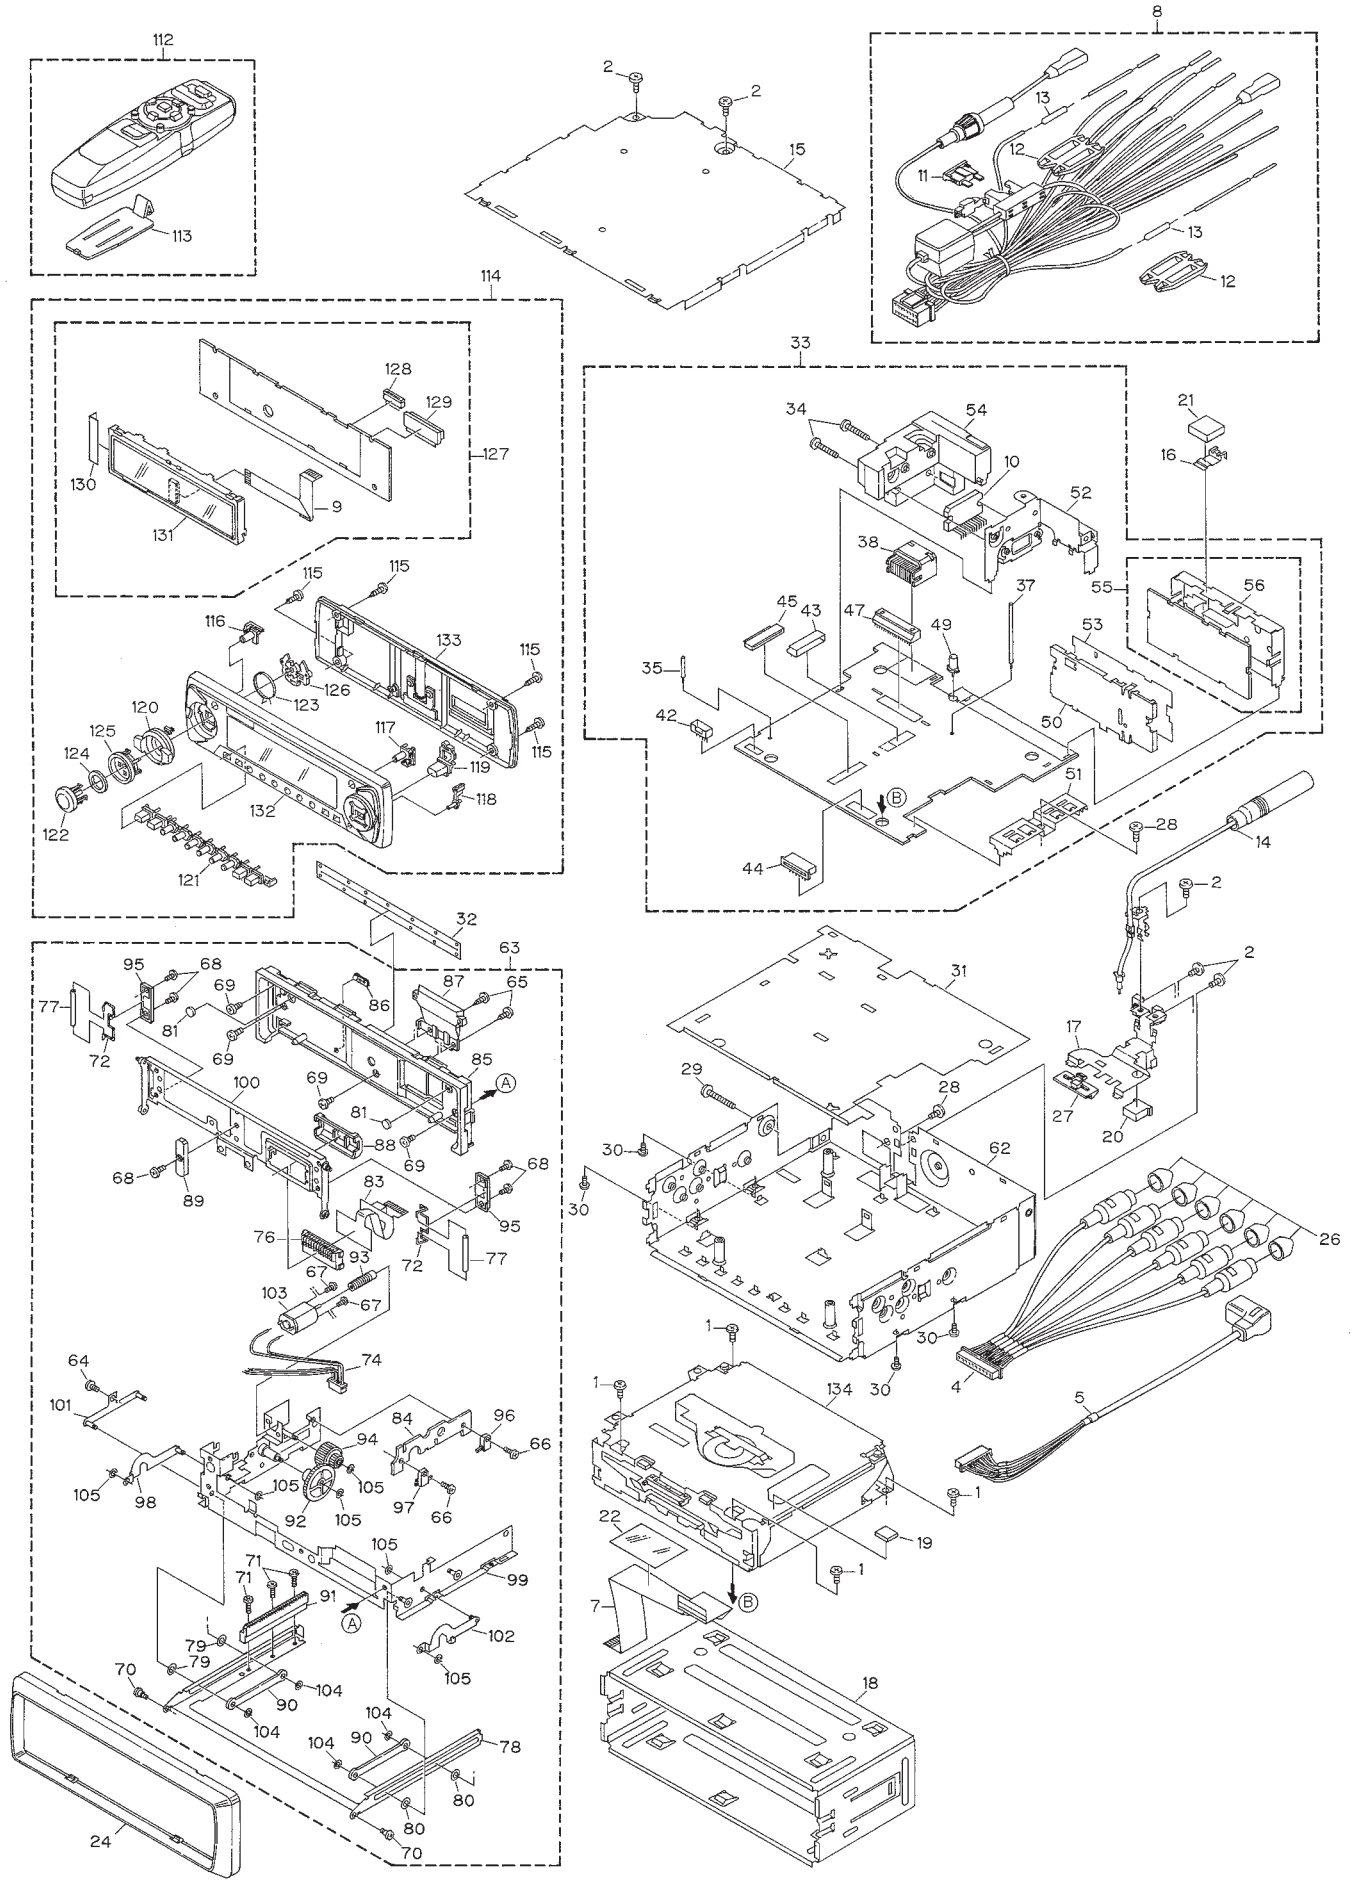


● EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BSZ26P060FMC
	2	Screw	BSZ30P050FMC
	3	•••••	
	4	Cord Assy	CDE5840
	5	Cord Assy	CDE5842
	6	•••••	
	7	Connector	CDE5846
	8	Cord Assy	CDE6336
*	9	PCB	CNP5508
	10	IC(IC301)	PAL005A
	11	Fuse(10A)	CEK1136
	12	Cap	CNS1472
	13	Resistor	RS1/2PMF102J
	14	Antenna Cable	CDH1256
	15	Case	CNB2426
	16	Earth Plate	CNC7358
	17	Holder	CNC8170
	18	Holder	CNC8659
	19	Cushion	CNM6065
	20	Cushion	CNM6132
	21	Spacer	CNM6482
	22	Insulator	CNM6897
	23	•••••	
	24	Panel	CNS5256
	25	•••••	
	26	Cap	CNV2680
	27	Holder	CNV6396
	28	Screw	BSZ30P050FMC
	29	Screw	BSZ30P200FMC
	30	Screw(M2x2.5)	CBA1447
	31	Insulator	CNM6135
	32	Cover	CNM6489
	33	Tuner Amp Unit	CWM6222
	34	Screw	BMZ26P160FMC
	35	Clamper	CEF1004
	36	•••••	
	37	Clamper	CEF1009
	38	Plug(CN901)	CKM1278
	39	•••••	
	40	•••••	
	41	•••••	
	42	Plug(CN851)	CKS-786
*	43	Plug(CN101)	CKS1058
	44	Connector(CN801)	CKS1532
	45	Connector(CN991)	CKS1960
	46	•••••	
	47	Connector(CN351)	CKS3606
	48	•••••	
	49	Mini Pin Jack(CN451)	CKX1046
	50	Holder	CNC7533
	51	Holder	CNC8168
	52	Holder	CNC8169
	53	Insulator	CNM5967
	54	Heat Sink	CNR1535
	55	FM/AM Tuner Unit	CWE1501
	56	Holder	CNC7532
	57	•••••	
	58	•••••	
	59	•••••	
	60	•••••	
	61	•••••	
	62	Chassis Unit	CXB3556
	63	Panel Assy	CXB3580
	64	Screw	BMZ20P030FMC
	65	Screw	BPZ20P060FMC
	66	Screw(M2x7)	CBA1060
	67	Screw(M2x3)	CBA1061
	68	Screw(M2x3)	CBA1082
	69	Screw(M2x3)	CBA1154
	70	Screw(M2x1.5)	CBA1430
	71	Screw(M1.4x4)	CBA1454
	72	Spring	CBH2130
	73	•••••	
	74	Cord	CDE5960
	75	•••••	
	76	Connector	CKS3997
	77	Roller	CLA3583
	78	Frame	CNC8201
	79	Spacer	CNM6155
	80	Spacer	CNM6156
	81	Spacer	CNM6419
	82	•••••	
	83	PCB	CNP5355
	84	PCB	CNP5321
	85	Panel	CNS5247
*	86	Lighting Conductor	CNV5391
	87	Lighting Conductor	CNV5605
	88	Cover	CNV5610
	89	Guide	CNV5672
	90	Guide	CNV5696

Mark	No.	Description	Part No.
	91	Rack	CNV5697
	92	Gear	CNV5698
	93	Gear	CNV5761
	94	Torque Limiter Unit	CNV5762
	95	Holder	CNV5763
	96	Switch(S951)	CSN1012
	97	Switch(S952)	CSN1022
	98	Arm Unit	CXB3574
	99	Frame Unit	CXB3575
	100	Holder Unit	CXB3576
	101	Bracket Unit	CXB3577
	102	Arm Unit	CXB3866
	103	Motor(M951)	CXM1085
	104	Washer	2-1816-0035-D2-00
	105	Washer	2-1821-0045-D2-00
	106	•••••	
	107	•••••	
	108	•••••	
	109	•••••	
	110	•••••	
	111	•••••	
	112	Remote Control Assy	CXB3875
	113	Battery Cover	CNS5032
	114	Detach Grille Assy	CXB5459
	115	Screw	BPZ20P080FZK
	116	Button(DISP)	CAC6511
	117	Button(OPEN)	CAC6512
	118	Button(RESET)	CAC6513
	119	Button(BAND)	CAC6515
	120	Knob(EQ)	CAC6732
	121	Button(1-6)	CAC6722
	122	Button(SOURCE)	CAC6719
	123	Spring	CBH2415
	124	Cushion	CNM6767
	125	Lighting Conductor	CNV6214
	126	Lighting Conductor	CNV6215
	127	Keyboard Unit	CWM7064
	128	Connector(CN1902)	CKS3995
	129	Connector(CN1901)	CKS3996
	130	Insulator	CNM6775
	131	OEL Module	MXK8002
	132	Grille Unit	CXB5333
	133	Cover Unit	CXB5339
	134	CD Mechanism Module(S8)	CXK5251

2.4 CD MECHANISM MODULE

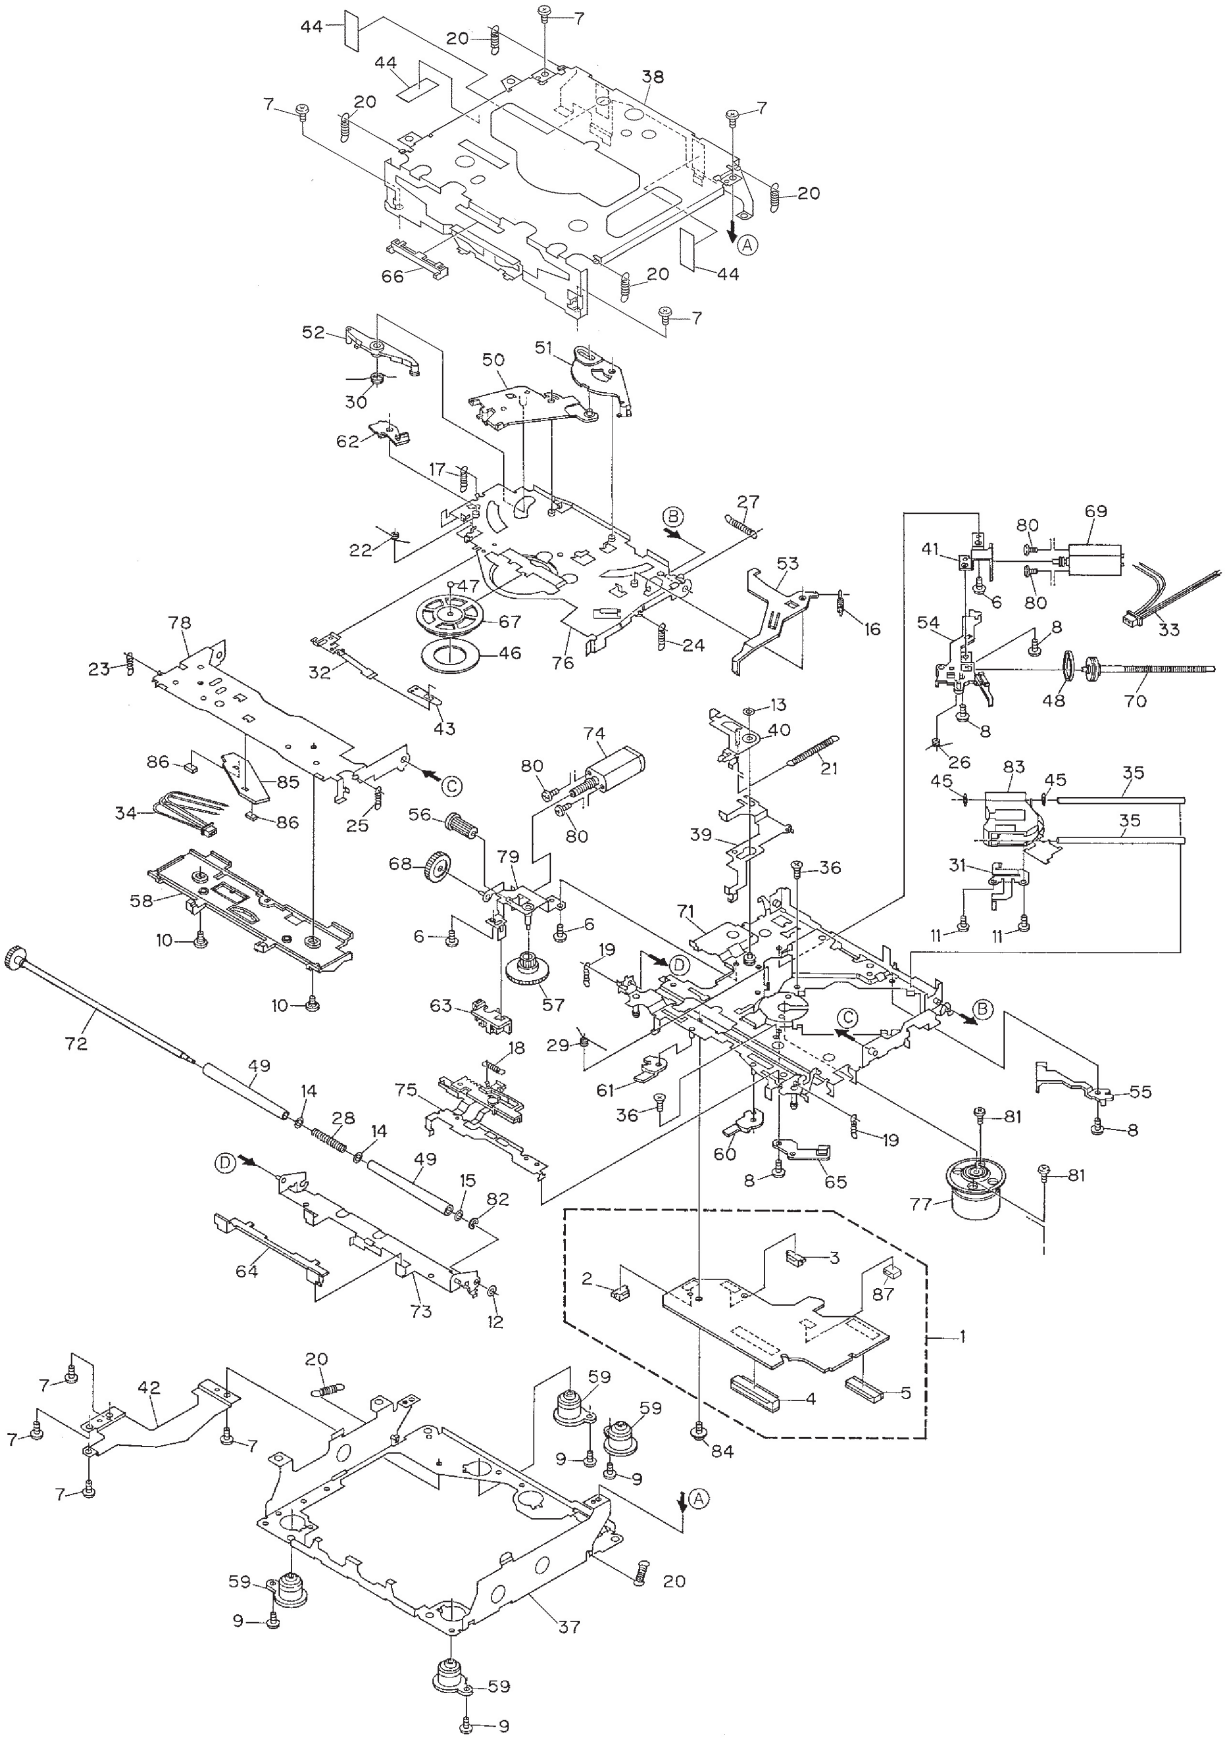

(1) CD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Control Unit	See Contrast table(2)
	2	Connector(CN802)	CKS2192
	3	Connector(CN801)	CKS2193
	4	Connector(CN701)	CKS2771
	5	Connector(CN101)	CKS3486
	6	Screw	BMZ20P030FZK
	7	Screw	BSZ20P040FZK
	8	Screw(M2×3)	CBA1077
	9	Screw(M2×6)	CBA1489
	10	Screw	CBA1243
	11	Screw(M2×4)	CBA1362
	12	Washer	CBF1037
	13	Washer	CBF1038
	14	Washer	CBF1060
*	15	Washer	CBF1075
	16	Spring	CBH2079
	17	Spring	CBH2117
	18	Spring	CBH2278
	19	Spring	CBH2110
	20	Spring	CBH2282
	21	Spring	CBH2114
	22	Spring	CBH2115
	23	Spring	CBH2080
	24	Spring	CBH2118
	25	Spring	CBH2161
	26	Spring	CBH2163
	27	Spring	CBH2189
	28	Spring	CBH2249
	29	Spring	CBH2260
	30	Spring	CBH2262
	31	Spring	CBL1367
	32	Spring	CBL1369
	33	Connector	CDE5531
	34	Connector	CDE5532
	35	Shaft	CLA3304
	36	Screw(M2.6×6)	CBA1458
	37	Frame	CNC7544
	38	Frame	CNC7545
	39	Lever	CNC7546
	40	Arm	CNC7739
	41	Bracket	CNC7798
	42	Plate	CNC8090
	43	Spacer	CNM3315
	44	Sheet	CNM6170
	45	Cushion	CNM6204
	46	Sheet	CNM6215
	47	Ball	CNR1189
	48	Belt	CNT1086
	49	Roller	CNV4509
	50	Arm	CNV5246
	51	Arm	CNV5247
	52	Arm	CNV5248
	53	Arm	CNV5249
	54	Guide	CNV5254
	55	Guide	CNV5255
	56	Gear	CNV5257
	57	Gear	CNV5256
	58	Guide	CNV6176
	59	Damper	CNV5266
	60	Arm	CNV5359
	61	Arm	CNV5360
	62	Arm	CNV6211
	63	Guide	CNV5509
	64	Guide	CNV5510
	65	Holder	CNV5578
	66	Guide	CNV5751
	67	Clamper	CNV5758
	68	Gear	CNV5813
	69	Motor Unit(M1)	CXB2190
	70	Screw Unit	CXB2191
	71	Chassis Unit	CXB2192
	72	Gear Unit	CXB2193
	73	Arm Unit	CXB2194
	74	Motor Unit(M2)	CXB2195
	75	Lever Unit	CXB2553
	76	Arm Unit	CXB2554
	77	Motor Unit(M3)	CXB2562
	78	Arm Unit	CXB2795
	79	Bracket Unit	CXB4071
	80	Screw	JFZ20P025FMC
	81	Screw	JGZ17P025FZK
	82	Washer	YE15FUC
	83	Pickup Unit(Service)(P8)	CXX1285
	84	Screw	IMS26P030FMC
*	85	PCB	CNX2982
	86	Photo-transistor(Q1, 2)	CPT230SX-TU
	87	Connector(CN702)	See Contrast table(2)

(2) CONTRAST TABLE

DEH-P920R/UC, DEH-P9200R/UC and DEH-P9250/ES are constructed same except for the following:

Mark	No.	Description	Part No.	
			DEH-P920R/UC DEH-P9250/ES	DEH-P9200R/UC
	2	Control Unit	CWX2359	CWX2358
	87	Connector(CN702)	CKS2191	Not used

5. ELECTRICAL PARTS LIST

NOTES:

● Parts whose parts numbers are omitted are subject to being not supplied.

● The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A Unit Number : CWM6214(DEH-P920R/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

=====Circuit Symbol and No.		===Part Name	Part No.
IC	101	IC	CA0008AM
IC	203	IC	PML004AF
IC	271	IC	PA2028A
IC	301	IC	PAL005A
IC	401	IC	S-81250SGUP
IC	501	IC	PM4009A
IC	601	IC	PD5483C
IC	681	IC	TPD1018F
IC	851	IC	BA6288FS
IC	961	IC	S-80735ANDZI
IC	971	IC	NJM7805FA
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EK
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	261	Transistor	IMD2A
Q	291	Transistor	2SD1859
Q	292	Transistor	IMD2A
Q	301	Transistor	DTC124EK
Q	302	Transistor	DTC124EK
Q	351	Transistor	2SC3326
Q	352	Transistor	2SC3326
Q	353	Transistor	2SC3326
Q	354	Transistor	2SC3326
Q	355	Transistor	2SC3326
Q	356	Transistor	2SC3326
Q	401	Transistor	2SC2412K
Q	501	Transistor	DTA124EK
Q	641	Transistor	DTC114EK
Q	681	Transistor	2SA1162
Q	682	Transistor	DTC124EK
Q	683	Transistor	2SC2412K
Q	684	Transistor	2SC2412K
Q	685	Transistor	2SC2412K
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	803	Transistor	2SD2396
Q	805	Transistor	2SC2412K
Q	806	Transistor	2SB1238
Q	807	Transistor	DTC143EK
Q	808	Transistor	IMD2A
Q	851	Transistor	2SD1760F5
Q	852	Transistor	DTA114EK
Q	853	Transistor	DTC124EK
Q	911	Transistor	2SD1760F5
Q	913	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	DTC114EK
Q	923	Transistor	2SB1238
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	941	Transistor	2SB1243
Q	942	Transistor	DTC124EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	971	Transistor	DTC123EK
Q	972	Transistor	2SB1238
Q	981	Transistor	2SC2412K
Q	982	Transistor	2SC2412K
Q	991	Transistor	IMD2A
Q	998	Transistor	2SD2396
D	131	Diode	MA3039(L)
D	271	Diode	1SS396
D	291	Diode	MA3056(M)
D	401	Diode	1SR154-400
D	402	Diode	HZS16(2)
D	681	Diode	ERA15-02VH
D	682	Diode	ERA15-02VH
D	683	LED	BR4361F
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3056(M)
D	806	Diode	HZS9L(C2)
D	807	LED	CL170PGCD
D	808	LED	CL170PGCD
D	809	LED	CL170PGCD
D	810	Diode	MA3062(M)
D	851	Diode	HZS7L(C3)
D	852	Diode	1SS133
D	853	Diode	1SS133
D	901	Diode	ERA15-02VH
D	902	Diode	ERA15-02VH
D	903	Diode	ERA15-02VH
D	911	Diode	ERA15-02VH
D	912	Diode	HZS6L(B1)
D	921	Diode	HZS9L(C1)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)
D	933	Diode	ERA15-02VH
D	941	Diode	ERA15-02VH
D	942	Diode	ERA15-02VH
D	951	Diode	MA152WK
D	961	Diode	MA152K
D	971	Diode	MA152WK
D	981	Diode	MA152WK
D	982	Diode	HZS9L(A2)
D	983	Diode	MA152K
D	984	Diode	MA152WK
D	985	Diode	1SS133
D	991	Diode	HZS9L(B1)
ZNR	451		DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	141	Inductor	CTF1420

=====Circuit Symbol and No.		===Part Name	Part No.
L	251	Ferri-Inductor	LAU2R2K
L	252	Ferri-Inductor	LAU1R0M
L	271	Ferri-Inductor	LAU101K
L	401	Ferri-Inductor	LAU2R2K
L	402	Inductor	LCTB4R7K2125
L	403	Inductor	CTF1420
L	404	Inductor	LCTA1R0J3225
L	501	Inductor	CTF1295
L	502	Inductor	CTF1420
L	601	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1484
L	951	Ferri-Inductor	LAU2R2K
X	501	Crystal Resonator 3.648MHz	CSS1447
X	601	Radiator 10.00MHz	CSS1475
		DSP Unit	CWX2323
SP	641	Buzzer	CPV1012
		FM/AM Tuner Unit	CWE1501

RESISTORS

R	101		RS1/10S101J
R	102		RS1/10S620J
R	103		RS1/10S101J
R	104		RS1/10S222J
R	105		RS1/10S103J
R	106		RS1/10S562J
R	107		RS1/10S332J
R	108		RS1/16S102J
R	109		RS1/16S102J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S181J
R	113		RS1/16S181J
R	131		RS1/10S104J
R	132		RS1/10S222J
R	133		RS1/10S103J
R	134		RS1/10S561J
R	135		RS1/10S223J
R	136		RS1/10S473J
R	151		RS1/10S0R0J
R	152		RS1/10S0R0J
R	161		RS1/16S272J
R	162		RS1/16S272J
R	163		RS1/16S162J
R	164		RS1/16S162J
R	208		RS1/16S102J
R	209		RS1/16S102J
R	210		RS1/16S102J
R	241		RS1/10S102J
R	242		RS1/10S102J
R	251		RS1/10S472J
R	252		RS1/10S472J
R	253		RS1/10S472J
R	254		RS1/10S472J
R	255		RS1/10S223J
R	256		RS1/10S223J
R	257		RS1/10S331J
R	258		RS1/10S331J
R	259		RS1/10S331J
R	260		RS1/10S331J
R	261		RN1/10SE4702D
R	262		RN1/10SE4702D
R	263		RS1/10S102J
R	283		RS1/10S203J
R	291		RD1/4PU911J
R	301		RS1/10S103J
R	302		RS1/10S103J
R	303		RS1/10S103J
R	304		RS1/10S331J
R	351		RS1/10S820J

=====Circuit Symbol and No.		===Part Name	Part No.
R	352		RS1/10S820J
R	353		RS1/10S820J
R	354		RS1/10S820J
R	355		RS1/10S820J
R	356		RS1/10S820J
R	357		RS1/16S223J
R	358		RS1/16S223J
R	359		RS1/16S223J
R	360		RS1/16S223J
R	361		RS1/16S223J
R	362		RS1/16S223J
R	363		RS1/16S103J
R	364		RS1/16S103J
R	365		RS1/16S103J
R	366		RS1/16S103J
R	367		RS1/16S103J
R	368		RS1/16S103J
R	369		RS1/16S471J
R	370		RS1/16S471J
R	371		RS1/16S471J
R	372		RS1/16S471J
R	373		RS1/16S471J
R	374		RS1/16S471J
R	375		RS1/10S0R0J
R	376		RS1/10S0R0J
R	377		RS1/10S0R0J
R	401		RS1/10S473J
R	402		RS1/10S473J
R	403		RS1/10S681J
R	404		RS1/10S681J
R	409		RS1/16S681J
R	410		RS1/16S103J
R	411		RS1/16S681J
R	412		RS1/16S681J
R	413		RS1/16S681J
R	414		RS1/16S473J
R	415		RS1/16S472J
R	416		RS1/16S473J
R	417		RS1/16S473J
R	418		RS1/10S473J
R	419		RS1/10S222J
R	420		RS1/10S222J
R	423		RS1/10S0R0J
R	424		RS1/16S393J
R	431		RS1/8S151J
R	501		RS1/16S102J
R	502		RS1/16S102J
R	503		RS1/16S102J
R	507		RS1/10S0R0J
R	508		RS1/16S0R0J
R	511		RS1/16S102J
R	512		RS1/16S0R0J
R	513		RS1/16S225J
R	514		RS1/10S0R0J
R	518		RS1/16S681J
R	601		RS1/16S473J
R	602		RS1/16S472J
R	603		RS1/16S221J
R	604		RS1/16S682J
R	605		RS1/16S221J
R	606		RS1/16S682J
R	607		RS1/16S102J
R	608		RS1/16S102J
R	609		RS1/16S473J
R	610		RS1/16S473J
R	611		RS1/16S473J
R	612		RS1/16S221J
R	613		RS1/16S682J
R	614		RS1/16S221J
R	615		RS1/16S682J

Circuit Symbol and No.	Part Name	Part No.
R 616		RS1/16S221J
R 617		RS1/16S473J
R 618		RS1/16S221J
R 619		RS1/16S682J
R 620		RS1/16S473J
R 623		RS1/16S473J
R 627		RS1/16S473J
R 628		RS1/16S473J
R 633		RS1/10S0R0J
R 634		RS1/10S102J
R 637		RS1/16S473J
R 641		RS1/10S202J
R 642		RS1/10S102J
R 651		RS1/10S0R0J
R 652		RS1/10S0R0J
R 653		RS1/10S0R0J
R 658		RS1/16S473J
R 681		RS1/8S102J
R 682		RS1/8S102J
R 683		RS1/8S102J
R 684		RS1/10S103J
R 685		RS1/10S103J
R 686		RS1/10S103J
R 687		RS1/10S223J
R 688		RS1/10S223J
R 689		RS1/10S223J
R 690		RS1/10S272J
R 691		RS1/10S223J
R 692		RS1/10S272J
R 693		RS1/10S223J
R 694		RS1/10S272J
R 695		RS1/16S473J
R 696		RS1/16S473J
R 697		RS1/16S473J
R 698		RS1/8S471J
R 699		RS1/10S102J
R 700		RS1/10S103J
R 801		RS1/8S222J
R 802		RS1/8S222J
R 803		RS1/8S222J
R 804		RS1/8S103J
R 805		RS1/8S472J
R 806		RS2PMF220J
R 807		RS1/8S221J
R 809		RS1/10S103J
R 810		RS1/10S222J
R 811		RD1/4PU102J
R 812		RS1/10S152J
R 813		RS1/4S221J
R 814		RD1/4PU391J
R 818		RS1/10S103J
R 819		RS1/8S221J
R 820		RS1/10S1R0J
R 821		RS1/10S1R0J
R 851		RD1/4PU271J
R 852		RS1/10S102J
R 853		RS1/10S102J
R 862		RS1/10S102J
R 864		RS1/10S102J
R 911		RS1/10S0R0J
R 912		RS1/10S152J
R 913		RS1/10S512J
R 914		RS1/10S0R0J
R 921		RS1/10S1R0J
R 922		RD1/4PU221J
R 923		RS1/10S102J
R 924		RS1/4S152J
R 926		RS1/10S223J
R 931		RS1/10S472J
R 932		RS1/10S473J
R 933		RS1/10S103J
R 934		RS1/10S473J
R 935		RS1/10S103J
R 936		RS1/10S103J
R 941		RS1/10S472J
R 942		RS1/4S221J
R 943		RS1/4S221J
R 951		RS1/8S153J
R 952		RS1/10S472J
R 953		RS1/10S472J
R 954		RS1/16S102J
R 962		RS1/10S102J
R 963		RS1/10S473J
R 964		RS1/10S822J
R 971		RS1/10S102J
R 972		RD1/4PU102J
R 973		RS1/10S473J
R 981		RS1/16S223J
R 982		RS1/10S473J
R 983		RS1/10S103J
R 984		RS1/10S473J
R 985		RS1/10S102J
R 986		RS1/10S224J
R 989		RS1/10S473J
R 991		RD1/4PU221J
R 992		RS1/10S221J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSQYB104K16
C 102		CKSQYB104K16
C 131		CKSQYB681K50
C 132		CEJA101M10
C 141		CCSQCH101J50
C 161		CKSQYB183K25
C 162		CKSQYB183K25
C 171		CEJA470M16
C 172		CKSQYB104K16
C 173		CEJA100M16
C 201		CKSYB105K16
C 205		CKSYB224K16
C 206		CKSYB224K16
C 207		CKSYB105K16
C 208		CKSYB105K16
C 209		CKSYB105K16
C 210		CKSYB105K16
C 211		CEJANP4R7M16
C 212		CEJANP4R7M16
C 213		CEJANP4R7M16
C 214		CEJANP4R7M16
C 215		CKSQYB473K50
C 216		CKSQYB473K50
C 217		CKSQYB473K50
C 218		CKSQYB473K50
C 219		CKSYB105K16
C 220		CKSYB105K16
C 221		CKSYB105K16
C 222		CKSYB105K16
C 223		CKSYB105K16
C 224		CKSYB105K16
C 225		CKSQYB333K50
C 226		CKSQYB123K50
C 227		CKSQYB473K50
C 228		CKSQYB153K50
C 229		CKSQYB153K50
C 241		CKSQYB152K50
C 242		CKSQYB152K50
C 251		CEJA4R7M35
C 252		CEJA4R7M35

=====Circuit Symbol and No.		===Part Name	Part No.
C	253		CEJA100M16
C	254		CEJA100M16
C	255		CKSQYB104K16
C	256		CKSQYB104K16
C	257		CEJA100M16
C	258		CEJA100M16
C	259		CKSQYB103K50
C	260		CKSQYB103K50
C	261		CKSQYB103K50
C	262		CKSYB475K10
C	263		CEJANP100M10
C	277		CEJA4R7M35
C	278		CEJA101M16
C	279		CEJA100M16
C	280		CEJA100M16
C	281		CKSYB225K16
C	282		CEJA330M25
C	283		CEJA330M25
C	284		CEJA330M25
C	285		CEJA330M25
C	286		CASAQ3R3M16
C	287		CKSYB684K25
C	291		CKSYB225K16
C	292		CKSQYB103K50
C	293		CKSQYB103K50
C	301		CKSQYB224K16
C	302		CKSQYB224K16
C	303		CKSQYB224K16
C	304		CKSQYB224K16
C	306		CEJA330M10
C	307	470µF/16V	CCH1339
C	309		CKSQYB104K16
C	310		CEJA100M16
C	311		CKSYB105K16
C	351		CEJA100M35
C	352		CEJA100M35
C	353		CEJA100M35
C	354		CEJA100M35
C	355		CEJA100M35
C	356		CEJA100M35
C	357		CKSRYB222K50
C	358		CKSRYB222K50
C	359		CKSRYB222K50
C	360		CKSRYB222K50
C	361		CKSRYB222K50
C	362		CKSRYB222K50
C	403		CKSQYB473K16
C	404		CEJA101M10
C	405		CKSQYB103K50
C	406		CEJA220M10
C	407		CKSQYB103K50
C	408		CKSQYB223K50
C	409		CKSQYB223K50
C	411		CKSRYB472K50
C	413		CKSQYB103K50
C	431		CEJA101M16
C	432		CKSQYB104K16
C	435		CCSQCH101J50
C	502		CCSQCH101J50
C	503		CCSQCH270J50
C	504		CCSQCH270J50
C	505		CKSQYB104K16
C	506		CKSQYB471K50
C	507		CKSQYB471K50
C	508		CKSQYB104K16
C	509		CEJA220M6R3
C	511		CKSQYB103K50
C	512		CCSRCH101J50
C	601		CEJA4R7M35
C	602		CKSQYB103K50

=====Circuit Symbol and No.		===Part Name	Part No.
C	603		CCSQCH101J50
C	604		CCSQCH150J50
C	605		CCSQCH220J50
C	651		CKSYB225K16
C	681		CKSQYB473K50
C	682		CKSQYB473K50
C	683		CKSQYB103K50
C	684		CKSQYB103K50
C	685		CKSQYB103K50
C	686		CKSQYB473K16
C	801		CKSYB475K10
C	802		CKSQYB104K16
C	803		CEJA470M10
C	804		CKSQYB103K50
C	805		CEJA470M10
C	806		CKSQYB103K50
C	807		CKSQYB102K50
C	808		CKSYB221K50
C	809		CKSYB103K50
C	810		CKSYB475K10
C	811		CKSYB225K16
C	812		CCSCH101J50
C	813		CKSQYB103K50
C	814		CKSQYB105K10
C	851		CKSQYB103K50
C	852		CKSYB104K16
C	853		CEJA220M16
C	855		CKSQYB102K50
C	856		CCSQCH101J50
C	857		CCSQCH101J50
C	901		CKSYB103K50
C	911	470µF/16V	CCH1183
C	912		CKSQYB472K50
C	913		CKSQYB103K50
C	914		CEJA470M10
C	915	470µF/16V	CCH1183
C	921	330µF/10V	CCH1181
C	922		CKSQYB103K50
C	923		CEJA101M16
C	931		CKSYB105K16
C	951		CKSYB103K50
C	961		CKSQYB102K50
C	962		CKSQYB104K16
C	963		CEJA2R2M50
C	971		CEJA101M16
C	972		CEJA100M16
C	973		CKSQYB103K50
C	975		CKSQYB102K50
C	981		CEJA220M16
C	991		CKSQYB473K50
C	992		CKSQYB102K50
C	993		CEJA101M10

A Unit Number : CWM6222(DEH-P9200R/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	CA0008AM
IC	203	IC	PML004AF
IC	231	IC	NJM2068MD
IC	271	IC	PA2028A
IC	301	IC	PAL005A
IC	401	IC	S-81250SGUP
IC	501	IC	PM4009A
IC	601	IC	PD5487C
IC	851	IC	BA6288FS
IC	961	IC	S-80735ANDZI

Circuit Symbol and No.		Part Name	Part No.
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EK
Q	261	Transistor	IMD2A
Q	301	Transistor	DTC124EK
Q	302	Transistor	DTC124EK
Q	351	Transistor	2SC3326
Q	352	Transistor	2SC3326
Q	353	Transistor	2SC3326
Q	354	Transistor	2SC3326
Q	355	Transistor	2SC3326
Q	356	Transistor	2SC3326
Q	401	Transistor	2SC2412K
Q	501	Transistor	DTA124EK
Q	641	Transistor	DTC114EK
Q	681	Transistor	2SA1162
Q	682	Transistor	DTC124EK
Q	683	Transistor	2SC2412K
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	803	Transistor	2SD2396
Q	805	Transistor	2SC2412K
Q	806	Transistor	2SB1238
Q	807	Transistor	DTC143EK
Q	808	Transistor	IMD2A
Q	851	Transistor	2SD1760F5
Q	852	Transistor	DTA114EK
Q	853	Transistor	DTC124EK
Q	911	Transistor	2SD1760F5
Q	913	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	DTC114EK
Q	923	Transistor	2SB1238
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	941	Transistor	2SB1243
Q	942	Transistor	DTC124EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	981	Transistor	2SC2412K
Q	982	Transistor	2SC2412K
Q	991	Transistor	IMD2A
Q	998	Transistor	2SD2396
D	231	Diode Network	DA204U
D	232	Diode Network	DA204U
D	233	Diode Network	DA204U
D	234	Diode Network	DA204U
D	401	Diode	1SR154-400
D	402	Diode	HZS16(2)
D	683	LED	BR4361F
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3056(M)
D	806	Diode	HZS9L(C2)
D	807	LED	CL170PGCD
D	808	LED	CL170PGCD
D	809	LED	CL170PGCD
D	810	Diode	MA3062(M)
D	851	Diode	HZS7L(C3)
D	852	Diode	1SS133
D	853	Diode	1SS133
D	901	Diode	ERA15-02VH
D	902	Diode	ERA15-02VH
D	903	Diode	ERA15-02VH
D	911	Diode	ERA15-02VH
D	912	Diode	HZS6L(B1)
D	921	Diode	HZS9L(C1)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)

Circuit Symbol and No.		Part Name	Part No.
D	933	Diode	ERA15-02VH
D	941	Diode	ERA15-02VH
D	942	Diode	ERA15-02VH
D	951	Diode	MA152WK
D	961	Diode	MA152K
D	981	Diode	MA152WK
D	982	Diode	HZS9L(A2)
D	983	Diode	MA152K
D	984	Diode	MA152WK
D	985	Diode	1SS133
D	991	Diode	HZS9L(B1)
ZNR	451		DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	251	Ferri-Inductor	LAU2R2K
L	271	Ferri-Inductor	LAU101K
L	401	Ferri-Inductor	LAU2R2K
L	402	Inductor	LCTB4R7K2125
L	403	Inductor	CTF1420
L	404	Inductor	LCTA1R0J3225
L	501	Inductor	CTF1295
L	502	Inductor	CTF1420
L	601	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1484
L	951	Ferri-Inductor	LAU2R2K
X	501	Crystal Resonator 3.648MHz	CSS1447
X	601	Radiator 10.00MHz	CSS1475
		FM/AM Tuner Unit	CWE1501
SP	641	Buzzer	CPV1012

RESISTORS

R	101		RS1/10S101J
R	102		RS1/10S620J
R	103		RS1/10S101J
R	104		RS1/10S222J
R	105		RS1/10S103J
R	106		RS1/10S562J
R	107		RS1/10S332J
R	108		RS1/16S102J
R	109		RS1/16S102J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S181J
R	113		RS1/16S181J
R	151		RS1/10S0R0J
R	152		RS1/10S0R0J
R	161		RS1/16S272J
R	162		RS1/16S272J
R	163		RS1/16S162J
R	164		RS1/16S162J
R	201		RS1/10S0R0J
R	203		RS1/10S102J
R	204		RS1/10S102J
R	205		RA3C102J
R	231		RS1/10S474J
R	232		RS1/10S474J
R	233		RS1/10S104J
R	234		RS1/10S104J
R	235		RS1/10S273J
R	236		RS1/10S273J
R	283		RS1/10S203J
R	284		RS1/10S0R0J
R	301		RS1/10S103J
R	302		RS1/10S103J
R	303		RS1/10S103J
R	304		RS1/10S331J

=====Circuit Symbol and No.	===Part Name	Part No.
R 351		RS1/10S820J
R 352		RS1/10S820J
R 353		RS1/10S820J
R 354		RS1/10S820J
R 355		RS1/10S820J
R 356		RS1/10S820J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 363		RS1/16S103J
R 364		RS1/16S103J
R 365		RS1/16S103J
R 366		RS1/16S103J
R 367		RS1/16S103J
R 368		RS1/16S103J
R 369		RS1/16S471J
R 370		RS1/16S471J
R 371		RS1/16S471J
R 372		RS1/16S471J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/10S0R0J
R 376		RS1/10S0R0J
R 377		RS1/10S0R0J
R 401		RS1/10S473J
R 402		RS1/10S473J
R 403		RS1/10S681J
R 404		RS1/10S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/10S473J
R 419		RS1/10S222J
R 420		RS1/10S222J
R 423		RS1/10S0R0J
R 424		RS1/16S393J
R 431		RS1/8S151J
R 501		RS1/16S102J
R 502		RS1/16S102J
R 503		RS1/16S102J
R 507		RS1/10S0R0J
R 508		RS1/16S0R0J
R 511		RS1/16S102J
R 512		RS1/16S0R0J
R 513		RS1/16S225J
R 514		RS1/10S0R0J
R 518		RS1/16S681J
R 601		RS1/16S473J
R 602		RS1/16S472J
R 603		RS1/16S221J
R 604		RS1/16S682J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S102J
R 608		RS1/16S102J
R 609		RS1/16S473J

=====Circuit Symbol and No.	===Part Name	Part No.
R 610		RS1/16S473J
R 611		RS1/16S473J
R 614		RS1/16S221J
R 615		RS1/16S682J
R 616		RS1/16S221J
R 617		RS1/16S473J
R 618		RS1/16S221J
R 619		RS1/16S682J
R 620		RS1/16S473J
R 623		RS1/16S473J
R 627		RS1/16S473J
R 628		RS1/16S473J
R 633		RS1/10S0R0J
R 634		RS1/10S102J
R 637		RS1/16S473J
R 641		RS1/10S202J
R 642		RS1/10S102J
R 654		RS1/10S0R0J
R 655		RS1/10S0R0J
R 656		RS1/10S0R0J
R 658		RS1/16S473J
R 659		RS1/16S0R0J
R 681		RS1/8S102J
R 686		RS1/10S103J
R 687		RS1/10S223J
R 688		RS1/10S223J
R 689		RS1/10S223J
R 690		RS1/10S272J
R 695		RS1/16S473J
R 698		RS1/8S471J
R 699		RS1/10S102J
R 700		RS1/10S103J
R 801		RS1/8S222J
R 802		RS1/8S222J
R 803		RS1/8S222J
R 804		RS1/8S103J
R 805		RS1/8S472J
R 806		RS2PMF220J
R 807		RS1/8S221J
R 809		RS1/10S103J
R 810		RS1/10S222J
R 811		RD1/4PU102J
R 812		RS1/10S152J
R 813		RS1/4S221J
R 814		RD1/4PU391J
R 818		RS1/10S103J
R 819		RS1/8S221J
R 820		RS1/10S1R0J
R 821		RS1/10S1R0J
R 851		RD1/4PU271J
R 852		RS1/10S102J
R 853		RS1/10S102J
R 862		RS1/10S102J
R 864		RS1/10S102J
R 911		RS1/10S0R0J
R 912		RS1/10S152J
R 913		RS1/10S512J
R 914		RS1/10S0R0J
R 921		RS1/10S1R0J
R 922		RD1/4PU221J
R 923		RS1/10S102J
R 924		RS1/4S152J
R 926		RS1/10S223J
R 931		RS1/10S472J
R 932		RS1/10S473J

=====Circuit Symbol and No.		===Part Name	Part No.
R	933		RS1/10S103J
R	934		RS1/10S473J
R	935		RS1/10S103J
R	936		RS1/10S103J
R	941		RS1/10S472J
R	942		RS1/4S221J
R	943		RS1/4S221J
R	951		RS1/8S153J
R	952		RS1/10S472J
R	953		RS1/10S472J
R	954		RS1/16S102J
R	962		RS1/10S102J
R	963		RS1/10S473J
R	964		RS1/10S822J
R	981		RS1/16S223J
R	982		RS1/10S473J
R	983		RS1/10S103J
R	984		RS1/10S473J
R	985		RS1/10S102J
R	986		RS1/10S224J
R	989		RS1/10S473J
R	991		RD1/4PU221J
R	992		RS1/10S221J

CAPACITORS

C	101		CKSQYB104K16
C	102		CKSQYB104K16
C	161		CKSQYB183K25
C	162		CKSQYB183K25
C	171		CEJA470M16
C	172		CKSQYB104K16
C	173		CEJA100M16
C	203		CKSYB225K16
C	204		CKSYB225K16
C	205		CKSYB224K16
C	206		CKSYB224K16
C	207		CKSYB105K16
C	208		CKSYB105K16
C	209		CKSYB105K16
C	210		CKSYB105K16
C	211		CEJANP4R7M16
C	212		CEJANP4R7M16
C	213		CEJANP4R7M16
C	214		CEJANP4R7M16
C	215		CKSQYB473K50
C	216		CKSQYB473K50
C	217		CKSQYB473K50
C	218		CKSQYB473K50
C	219		CKSYB105K16
C	220		CKSYB105K16
C	221		CKSYB105K16
C	222		CKSYB105K16
C	223		CKSYB105K16
C	224		CKSYB105K16
C	225		CKSQYB333K50
C	226		CKSQYB123K50
C	227		CKSQYB473K50
C	228		CKSQYB153K50
C	229		CKSQYB153K50
C	231		CKSQYB103K50
C	233		CKSQYB474K16
C	234		CKSQYB474K16
C	235		CKSQYB104K16
C	236		CKSQYB104K16
C	237		CKSQYB104K25

=====Circuit Symbol and No.		===Part Name	Part No.
C	238		CKSQYB104K25
C	239		CCSQCH470J50
C	240		CCSQCH470J50
C	241		CKSQYB152K50
C	242		CKSQYB152K50
C	262		CKSYB475K10
C	277		CEJA4R7M35
C	278		CEJA101M16
C	279		CEJA100M16
C	280		CEJA100M16
C	281		CKSYB225K16
C	282		CEJA330M25
C	283		CEJA330M25
C	286		CASAQ3R3M16
C	287		CKSYB684K25
C	301		CKSQYB224K16
C	302		CKSQYB224K16
C	303		CKSQYB224K16
C	304		CKSQYB224K16
C	306		CEJA330M10
C	307	470µF/16V	CCH1339
C	309		CKSQYB104K16
C	310		CEJA100M16
C	311		CKSYB105K16
C	351		CEJA100M35
C	352		CEJA100M35
C	353		CEJA100M35
C	354		CEJA100M35
C	355		CEJA100M35
C	356		CEJA100M35
C	357		CKSRYB222K50
C	358		CKSRYB222K50
C	359		CKSRYB222K50
C	360		CKSRYB222K50
C	361		CKSRYB222K50
C	362		CKSRYB222K50
C	403		CKSQYB473K16
C	404		CEJA101M10
C	405		CKSQYB103K50
C	406		CEJA220M10
C	407		CKSQYB103K50
C	408		CKSQYB223K50
C	409		CKSQYB223K50
C	411		CKSRYB472K50
C	413		CKSQYB103K50
C	431		CEJA101M16
C	432		CKSQYB104K16
C	435		CCSQCH101J50
C	502		CCSQCH101J50
C	503		CCSQCH270J50
C	504		CCSQCH270J50
C	505		CKSQYB104K16
C	506		CKSQYB471K50
C	507		CKSQYB471K50
C	508		CKSQYB104K16
C	509		CEJA220M6R3
C	511		CKSQYB103K50
C	512		CCSRCH101J50
C	601		CEJA4R7M35
C	602		CKSQYB103K50
C	603		CCSQCH101J50
C	604		CCSQCH150J50
C	605		CCSQCH220J50
C	651		CKSYB225K16
C	683		CKSQYB103K50

=====Circuit Symbol and No.		===Part Name	Part No.
C	686		CKSQYB473K16
C	801		CKSYB475K10
C	802		CKSQYB104K16
C	803		CEJA470M10
C	804		CKSQYB103K50
C	805		CEJA470M10
C	806		CKSQYB103K50
C	807		CKSQYB102K50
C	808		CKSYB221K50
C	809		CKSYB103K50
C	810		CKSYB475K10
C	811		CKSYB225K16
C	812		CCSCH101J50
C	813		CKSQYB103K50
C	814		CKSQYB105K10
C	851		CKSQYB103K50
C	852		CKSYB104K16
C	853		CEJA220M16
C	855		CKSQYB102K50
C	856		CCSQCH101J50
C	857		CCSQCH101J50
C	901		CKSYB103K50
C	911	470µF/16V	CCH1183
C	912		CKSQYB472K50
C	913		CKSQYB103K50
C	914		CEJA470M10
C	915	470µF/16V	CCH1183
C	921	330µF/10V	CCH1181
C	922		CKSQYB103K50
C	923		CEJA101M16
C	931		CKSYB105K16
C	951		CKSYB103K50
C	961		CKSQYB102K50
C	962		CKSQYB104K16
C	963		CEJA2R2M50
C	981		CEJA220M16
C	991		CKSQYB473K50
C	992		CKSQYB102K50
C	993		CEJA101M10

A Unit Number : CWM6216(DEH-P9250/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	CA0008AM
IC	203	IC	PML004AF
IC	271	IC	PA2028A
IC	301	IC	PAL005A
IC	401	IC	S-81250SGUP
IC	601	IC	PD5484C
IC	851	IC	BA6288FS
IC	961	IC	S-80735ANDZI
IC	971	IC	NJM7805FA
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EK
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	261	Transistor	IMD2A
Q	291	Transistor	2SD1859
Q	292	Transistor	IMD2A
Q	301	Transistor	DTC124EK
Q	302	Transistor	DTC124EK
Q	351	Transistor	2SC3326
Q	352	Transistor	2SC3326
Q	353	Transistor	2SC3326
Q	354	Transistor	2SC3326
Q	355	Transistor	2SC3326
Q	356	Transistor	2SC3326
Q	401	Transistor	2SC2412K

=====Circuit Symbol and No.		===Part Name	Part No.
Q	641	Transistor	DTC114EK
Q	681	Transistor	2SA1162
Q	682	Transistor	DTC124EK
Q	683	Transistor	2SC2412K
Q	684	Transistor	2SC2412K
Q	685	Transistor	2SC2412K
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	803	Transistor	2SD2396
Q	805	Transistor	2SC2412K
Q	806	Transistor	2SB1238
Q	807	Transistor	DTC143EK
Q	808	Transistor	IMD2A
Q	851	Transistor	2SD1760F5
Q	852	Transistor	DTA114EK
Q	853	Transistor	DTC124EK
Q	911	Transistor	2SD1760F5
Q	913	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	DTC114EK
Q	923	Transistor	2SB1238
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	941	Transistor	2SB1243
Q	942	Transistor	DTC124EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	971	Transistor	DTC123EK
Q	972	Transistor	2SB1238
Q	981	Transistor	2SC2412K
Q	982	Transistor	2SC2412K
Q	991	Transistor	IMD2A
Q	998	Transistor	2SD2396
D	131	Diode	MA3039(L)
D	291	Diode	MA3056(M)
D	401	Diode	1SR154-400
D	402	Diode	HZS16(2)
D	683	LED	BR4361F
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3056(M)
D	806	Diode	HZS9L(C2)
D	807	LED	CL170PGCD
D	808	LED	CL170PGCD
D	809	LED	CL170PGCD
D	810	Diode	MA3062(M)
D	851	Diode	HZS7L(C3)
D	852	Diode	1SS133
D	853	Diode	1SS133
D	901	Diode	ERA15-02VH
D	902	Diode	ERA15-02VH
D	903	Diode	ERA15-02VH
D	911	Diode	ERA15-02VH
D	912	Diode	HZS6L(B1)
D	921	Diode	HZS9L(C1)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)
D	933	Diode	ERA15-02VH
D	941	Diode	ERA15-02VH
D	942	Diode	ERA15-02VH
D	951	Diode	MA152WK
D	961	Diode	MA152K
D	971	Diode	MA152WK
D	981	Diode	MA152WK
D	982	Diode	HZS9L(A2)
D	983	Diode	MA152K
D	984	Diode	MA152WK
D	985	Diode	1SS133

=====Circuit Symbol and No.		===Part Name	Part No.
D	991	Diode	HZS9L(B1)
ZNR	451		DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	141	Inductor	CTF1420
L	251	Ferri-Inductor	LAU2R2K
L	252	Ferri-Inductor	LAU1R0M
L	271	Ferri-Inductor	LAU101K
L	401	Ferri-Inductor	LAU2R2K
L	402	Inductor	LCTB4R7K2125
L	403	Inductor	CTF1420
L	404	Inductor	LCTA1R0J3225
L	601	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1484
L	951	Ferri-Inductor	LAU2R2K
X	601	Radiator 10.00MHz	CSS1475
		FM/AM Tuner Unit	CWE1501
		DSP Unit	CWX2323
SP	641	Buzzer	CPV1012

RESISTORS

R	101		RS1/10S101J
R	102		RS1/10S620J
R	103		RS1/10S101J
R	104		RS1/10S222J
R	105		RS1/10S103J
R	106		RS1/10S562J
R	107		RS1/10S332J
R	108		RS1/16S102J
R	109		RS1/16S102J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S181J
R	113		RS1/16S181J
R	131		RS1/10S104J
R	132		RS1/10S222J
R	133		RS1/10S103J
R	134		RS1/10S561J
R	135		RS1/10S223J
R	136		RS1/10S473J
R	151		RS1/10S0R0J
R	152		RS1/10S0R0J
R	161		RS1/16S272J
R	162		RS1/16S272J
R	163		RS1/16S162J
R	164		RS1/16S162J
R	208		RS1/16S102J
R	209		RS1/16S102J
R	210		RS1/16S102J
R	241		RS1/10S102J
R	242		RS1/10S102J
R	251		RS1/10S472J
R	252		RS1/10S472J
R	253		RS1/10S472J
R	254		RS1/10S472J
R	255		RS1/10S223J
R	256		RS1/10S223J
R	257		RS1/10S331J
R	258		RS1/10S331J
R	259		RS1/10S331J
R	260		RS1/10S331J
R	261		RN1/10SE4702D
R	262		RN1/10SE4702D
R	263		RS1/10S102J
R	283		RS1/10S203J
R	284		RS1/10S0R0J

=====Circuit Symbol and No.		===Part Name	Part No.
R	291		RD1/4PU911J
R	301		RS1/10S103J
R	302		RS1/10S103J
R	303		RS1/10S103J
R	304		RS1/10S331J
R	351		RS1/10S820J
R	352		RS1/10S820J
R	353		RS1/10S820J
R	354		RS1/10S820J
R	355		RS1/10S820J
R	356		RS1/10S820J
R	357		RS1/16S223J
R	358		RS1/16S223J
R	359		RS1/16S223J
R	360		RS1/16S223J
R	361		RS1/16S223J
R	362		RS1/16S223J
R	363		RS1/16S103J
R	364		RS1/16S103J
R	365		RS1/16S103J
R	366		RS1/16S103J
R	367		RS1/16S103J
R	368		RS1/16S103J
R	369		RS1/16S471J
R	370		RS1/16S471J
R	371		RS1/16S471J
R	372		RS1/16S471J
R	373		RS1/16S471J
R	374		RS1/16S471J
R	375		RS1/10S0R0J
R	376		RS1/10S0R0J
R	377		RS1/10S0R0J
R	401		RS1/10S473J
R	402		RS1/10S473J
R	403		RS1/10S681J
R	404		RS1/10S681J
R	409		RS1/16S681J
R	410		RS1/16S103J
R	411		RS1/16S681J
R	412		RS1/16S681J
R	413		RS1/16S681J
R	414		RS1/16S473J
R	415		RS1/16S472J
R	416		RS1/16S473J
R	417		RS1/16S473J
R	418		RS1/10S473J
R	419		RS1/10S222J
R	420		RS1/10S222J
R	423		RS1/10S0R0J
R	424		RS1/16S393J
R	431		RS1/8S151J
R	601		RS1/16S473J
R	602		RS1/16S472J
R	603		RS1/16S221J
R	604		RS1/16S682J
R	605		RS1/16S221J
R	606		RS1/16S682J
R	607		RS1/16S102J
R	608		RS1/16S102J
R	609		RS1/16S473J
R	610		RS1/16S473J
R	611		RS1/16S473J
R	612		RS1/16S221J
R	613		RS1/16S682J
R	614		RS1/16S221J

=====Circuit Symbol and No.===		Part Name	Part No.
R	615		RS1/16S682J
R	616		RS1/16S221J
R	617		RS1/16S473J
R	618		RS1/16S221J
R	619		RS1/16S682J
R	620		RS1/16S473J
R	623		RS1/16S473J
R	627		RS1/16S473J
R	628		RS1/16S473J
R	633		RS1/10S0R0J
R	634		RS1/10S102J
R	637		RS1/16S473J
R	641		RS1/10S202J
R	642		RS1/10S102J
R	651		RS1/10S0R0J
R	652		RS1/10S0R0J
R	653		RS1/10S0R0J
R	658		RS1/16S473J
R	681		RS1/8S102J
R	682		RS1/8S102J
R	683		RS1/8S102J
R	685		RS1/10S103J
R	686		RS1/10S103J
R	687		RS1/10S223J
R	688		RS1/10S223J
R	689		RS1/10S223J
R	690		RS1/10S272J
R	691		RS1/10S223J
R	692		RS1/10S272J
R	693		RS1/10S223J
R	694		RS1/10S272J
R	695		RS1/16S473J
R	696		RS1/16S473J
R	697		RS1/16S473J
R	698		RS1/8S471J
R	699		RS1/10S102J
R	700		RS1/10S103J
R	801		RS1/8S222J
R	802		RS1/8S222J
R	803		RS1/8S222J
R	804		RS1/8S103J
R	805		RS1/8S472J
R	806		RS2PMF220J
R	807		RS1/8S221J
R	809		RS1/10S103J
R	810		RS1/10S222J
R	811		RD1/4PU102J
R	812		RS1/10S152J
R	813		RS1/4S221J
R	814		RD1/4PU391J
R	818		RS1/10S103J
R	819		RS1/8S221J
R	820		RS1/10S1R0J
R	821		RS1/10S1R0J
R	851		RD1/4PU271J
R	852		RS1/10S102J
R	853		RS1/10S102J
R	862		RS1/10S102J
R	864		RS1/10S102J
R	911		RS1/10S0R0J
R	912		RS1/10S152J
R	913		RS1/10S512J
R	914		RS1/10S0R0J
R	921		RS1/10S1R0J
R	922		RD1/4PU221J
R	923		RS1/10S102J
R	924		RS1/4S152J
R	926		RS1/10S223J
R	931		RS1/10S472J
R	932		RS1/10S473J
R	933		RS1/10S103J
R	934		RS1/10S473J
R	935		RS1/10S103J
R	936		RS1/10S103J
R	941		RS1/10S472J
R	942		RS1/4S221J
R	943		RS1/4S221J
R	951		RS1/8S153J
R	952		RS1/10S472J
R	953		RS1/10S472J
R	954		RS1/16S102J
R	962		RS1/10S102J
R	963		RS1/10S473J
R	964		RS1/10S822J
R	971		RS1/10S102J
R	972		RD1/4PU102J
R	973		RS1/10S473J
R	981		RS1/16S223J
R	982		RS1/10S473J
R	983		RS1/10S103J
R	984		RS1/10S473J
R	985		RS1/10S102J
R	986		RS1/10S224J
R	989		RS1/10S473J
R	991		RD1/4PU221J
R	992		RS1/10S221J

CAPACITORS

C	101		CKSQYB104K16
C	102		CKSQYB104K16
C	131		CKSQYB681K50
C	132		CEJA101M10
C	141		CCSQCH101J50
C	161		CKSQYB183K25
C	162		CKSQYB183K25
C	171		CEJA470M16
C	172		CKSQYB104K16
C	173		CEJA100M16
C	201		CKSYB105K16
C	205		CKSYB224K16
C	206		CKSYB224K16
C	207		CKSYB105K16
C	208		CKSYB105K16
C	209		CKSYB105K16
C	210		CKSYB105K16
C	211		CEJANP4R7M16
C	212		CEJANP4R7M16
C	213		CEJANP4R7M16
C	214		CEJANP4R7M16
C	215		CKSQYB473K50
C	216		CKSQYB473K50
C	217		CKSQYB473K50
C	218		CKSQYB473K50
C	219		CKSYB105K16
C	220		CKSYB105K16
C	221		CKSYB105K16
C	222		CKSYB105K16
C	223		CKSYB105K16
C	224		CKSYB105K16
C	225		CKSQYB333K50
C	226		CKSQYB123K50
C	227		CKSQYB473K50
C	228		CKSQYB153K50
C	229		CKSQYB153K50
C	241		CKSQYB152K50
C	242		CKSQYB152K50
C	251		CEJA4R7M35
C	252		CEJA4R7M35

=====Circuit Symbol and No.		===Part Name	Part No.
C	253		CEJA100M16
C	254		CEJA100M16
C	255		CKSQYB104K16
C	256		CKSQYB104K16
C	257		CEJA100M16
C	258		CEJA100M16
C	259		CKSQYB103K50
C	260		CKSQYB103K50
C	261		CKSQYB103K50
C	262		CKSYB475K10
C	263		CEJANP100M10
C	277		CEJA4R7M35
C	278		CEJA101M16
C	279		CEJA100M16
C	280		CEJA100M16
C	281		CKSYB225K16
C	282		CEJA330M25
C	283		CEJA330M25
C	286		CASAQ3R3M16
C	287		CKSYB684K25
C	291		CKSYB225K16
C	292		CKSQYB103K50
C	293		CKSQYB103K50
C	301		CKSQYB224K16
C	302		CKSQYB224K16
C	303		CKSQYB224K16
C	304		CKSQYB224K16
C	306		CEJA330M10
C	307	470µF/16V	CCH1339
C	309		CKSQYB104K16
C	310		CEJA100M16
C	311		CKSYB105K16
C	351		CEJA100M35
C	352		CEJA100M35
C	353		CEJA100M35
C	354		CEJA100M35
C	355		CEJA100M35
C	356		CEJA100M35
C	357		CKSRYB222K50
C	358		CKSRYB222K50
C	359		CKSRYB222K50
C	360		CKSRYB222K50
C	361		CKSRYB222K50
C	362		CKSRYB222K50
C	403		CKSQYB473K16
C	404		CEJA101M10
C	405		CKSQYB103K50
C	406		CEJA220M10
C	407		CKSQYB103K50
C	408		CKSQYB223K50
C	409		CKSQYB223K50
C	411		CKSRYB472K50
C	431		CEJA101M16
C	432		CKSQYB104K16
C	433		CCSQCH101J50
C	435		CCSQCH101J50
C	601		CEJA4R7M35
C	602		CKSQYB103K50
C	603		CCSQCH101J50
C	604		CCSQCH150J50
C	605		CCSQCH220J50
C	651		CKSYB225K16
C	683		CKSQYB103K50
C	684		CKSQYB103K50
C	685		CKSQYB103K50
C	686		CKSQYB473K16
C	801		CKSYB475K10
C	802		CKSQYB104K16
C	803		CEJA470M10
C	804		CKSQYB103K50

=====Circuit Symbol and No.		===Part Name	Part No.
C	805		CEJA470M10
C	806		CKSQYB103K50
C	807		CKSQYB102K50
C	808		CKSYB221K50
C	809		CKSYB103K50
C	810		CKSYB475K10
C	811		CKSYB225K16
C	812		CCSCH101J50
C	813		CKSQYB103K50
C	814		CKSQYB105K10
C	851		CKSQYB103K50
C	852		CKSYB104K16
C	853		CEJA220M16
C	855		CKSQYB102K50
C	856		CCSQCH101J50
C	857		CCSQCH101J50
C	901		CKSYB103K50
C	911	470µF/16V	CCH1183
C	912		CKSQYB472K50
C	913		CKSQYB103K50
C	914		CEJA470M10
C	915	470µF/16V	CCH1183
C	921	330µF/10V	CCH1181
C	922		CKSQYB103K50
C	923		CEJA101M16
C	931		CKSYB105K16
C	951		CKSYB103K50
C	961		CKSQYB102K50
C	962		CKSQYB104K16
C	963		CEJA2R2M50
C	971		CEJA101M16
C	972		CEJA100M16
C	973		CKSQYB103K50
C	975		CKSQYB102K50
C	981		CEJA220M16
C	991		CKSQYB473K50
C	992		CKSQYB102K50
C	993		CEJA101M10

B Unit Number : CWE1501
Unit Name : FM/AM Tuner Unit

MISCELLANEOUS

IC	1	IC	PML002A
IC	2	IC	PM4008A
IC	3	IC	BR9010FV
Q	1	Transistor	2SC4081
Q	2	Transistor	DTC124EU
Q	3	FET	3SK263
Q	51	Transistor	2SC4081
Q	201	FET	2SK932
Q	202	Transistor	DTC124EU
Q	204	Transistor	2SC4081
D	1	Diode	KV1410(23)
D	2	Diode	1SV248
D	6	Diode	KV1410(23)
D	201	Diode	DAN217U
D	202	Diode	MA147
D	903	Diode	KV1410(23)
D	904	Diode	SVC253
L	1	Coil	CTC1155
L	3	Inductor	LCTB1R5K2125
L	4	Coil	CTC1155
L	201	Inductor	LCTB330K1608
L	202	Inductor	LFEA102J
L	203	Inductor	LCTA121J3225
L	901	Coil	CTC1154
L	902	Inductor	LCTA3R3J3225

=====Circuit Symbol and No.		===Part Name	Part No.
L	904	Inductor	LCTBR47K1608
L	905	Inductor	LCTBR47K1608
T	51	Coil	CTE1132
CF	51	Ceramic Filter	CTF1442
CF	52	Ceramic Filter	CTF1442
CF	53	Ceramic Filter	CTF1442
CF	202	Ceramic Filter	CTF1476
X	901	Crystal Resonator 10.250MHz	CSS1432

RESISTORS

R	1		RS1/16S183J
R	2		RS1/16S103J
R	5		RS1/16S0R0J
R	7		RS1/16S273J
R	8		RS1/16S473J
R	9		RS1/16S223J
R	10		RS1/16S473J
R	11		RS1/16S221J
R	12		RS1/16S103J
R	13		RS1/16S104J
R	16		RS1/16S223J
R	17		RS1/16S221J
R	18		RS1/16S221J
R	19		RS1/16S473J
R	20		RS1/16S470J
R	31		RS1/16S0R0J
R	51		RS1/16S470J
R	52		RS1/16S103J
R	53		RS1/16S103J
R	54		RS1/16S331J
R	55		RS1/16S331J
R	56		RS1/16S560J
R	57		RS1/16S560J
R	58		RS1/16S102J
R	59		RS1/16S225J
R	60		RS1/16S133J
R	61		RS1/16S433J
R	101		RS1/16S333J
R	102		RS1/16S103J
R	103		RS1/16S333J
R	104		RS1/16S562J
R	110		RS1/16S154J
R	111		RS1/16S273J
R	113		RS1/16S222J
R	114		RS1/16S333J
R	115		RS1/16S334J
R	116		RS1/16S473J
R	202		RS1/16S472J
R	203		RS1/16S225J
R	204		RS1/16S102J
R	205		RS1/16S220J
R	206		RS1/16S471J
R	208		RS1/16S104J
R	209		RS1/16S104J
R	210		RS1/16S563J
R	213		RS1/16S223J
R	251		RS1/16S225J
R	902		RS1/16S103J
R	904		RS1/16S473J
R	907		RS1/16S103J
R	908		RS1/16S681J
R	909		RS1/16S473J
R	914		RS1/16S562J

CAPACITORS

C	1		CCSQCH4R0C50
C	6		CKSQYB105K10
C	8		CKSRYB222K50
C	10		CCSRCH220J50
C	11		CCSRCH150J50
C	12		CCSRCH8R0D50
C	14		CCSRCJ3R0C50
C	15		CKSRYB103K50
C	16		CKSRYB222K50
C	17		CKSRYB222K50
C	18		CCSRCJ3R0C50
C	19		CKSRYB103K50
C	20		CKSRYB103K50
C	21		CKSRYB103K50
C	24		CKSQYB334K16
C	26		CKSRYB472K50
C	30		CCSRCH220J50
C	32		CCSRCH470J50
C	35		CKSRYB103K50
C	51		CKSRYB103K50
C	52		CKSRYB473K16
C	53		CCSRCK2R0C50
C	54		CKSRYB103K50
C	55		CKSRYB104K16
C	56		CKSRYB104K16
C	58		CKSQYB224K16
C	101		CEALNP100M10
C	102		CCSRCH151J50
C	103		CKSRYB473K16
C	105		CKSRYB682K25
C	106		CEALR68M50
C	107		CKSRYB103K50
C	108		CKSQYB474K16
C	109		CKSQYB474K16
C	110		CKSRYB104K16
C	111		CKSRYB104K16
C	112		CKSRYB104K16
C	113		CKSRYB123K25
C	114		CEAL220M6R3
C	115		CKSRYB473K16
C	116		CEAL2R2M50
C	117		CKSRYB102K50
C	120		CKSRYB183K25
C	121		CKSRYB332K50
C	122		CKSRYB562K25
C	123		CKSRYB681K50
C	125		CKSRYB103K50
C	126		CKSRYB103K50
C	127		CEAL2R2M50
C	128		CKSRYB103K50
C	201		CCSRCH471J50
C	202		CCSRCH100D50
C	203		CKSRYB104K16
C	204		CKSRYB332K50
C	205		CKSRYB103K50
C	206		CKSRYB104K16
C	207		CKSRYB473K16
C	208		CCSRCH560J50
C	209		CEAL470M6R3
C	210		CKSRYB103K50
C	211		CKSRYB103K50
C	212		CCSRCH101J50
C	215		CKSRYB223K25
C	216		CKSQYB334K16
C	217		CKSRYB103K50
C	219		CKSQYB105K10
C	220		CKSRYB104K16
C	221		CKSRYB473K16
C	222		CKSQYB334K16
C	223		CKSQYB474K16
C	224		CKSRYB104K16
C	225		CKSRYB272K50
C	226		CKSRYB682K25
C	902		CCSRCH270J50
C	904		CKSRYB223K25

=====Circuit Symbol and No.		===Part Name	Part No.
C	905		CKSRYB103K50
C	906		CCSRTH100D50
C	907		CCSRTH150J50
C	909		CCSRTH100D50
C	910		CKSRYB332K50
C	912		CKSQYB474K16
C	913		CKSRYB223K25
C	914		CKSRYB682K25
C	915		CKSQYB223K25
C	916		CKSQYB474K16
C	917		CKSYB475K10
C	918		CKSRYB223K25
C	919		CKSQYB225K10
C	920		CCSRCH270J50
C	921		CCSRCH270J50
C	922		CKSYB105K16
C	923		CKSRYB103K50

C Unit Number : CWM7064
Unit Name : Keyboard Unit

MISCELLANEOUS

IC	1901	IC	PD5471A
IC	1902	IC	PD8051A
IC	1903		RS-140
D	1901	Diode Network	DA204U
D	1902	Diode Network	DA204U
D	1904	Diode	MA110
D	1907	LED	CL170UBX
D	1908	LED	CL170UBX
D	1910	LED	CL155DPGD
L	1901		LCTA2R2J3225
L	1902		LCTA2R2J3225
L	1903	Inductor	CTF1484
L	1904	Inductor	LCTA220J2520
L	1905		CTF1421
L	1906		CTF1421
L	1907	Inductor	CTF1295
L	1908	Inductor	CTF1295
X	1901	Ceramic Resonator 15.62MHz	CSS1458
S	1901		CSG1112
S	1902		CSG1112
S	1903	Spring Switch	CSN1033
S	1904	Spring Switch	CSN1033
S	1905		CSG1112
S	1906	Switch	CSG1043
S	1907		CSG1112
S	1908		CSG1112
S	1909		CSG1112
S	1910		CSG1112
S	1911		CSG1112
S	1912		CSG1112
S	1913		CSG1112
S	1914		CSG1112
S	1915		CSG1112
S	1916		CSG1112
S	1917		CSG1112
S	1918		CSG1112
S	1919		CSG1111
S	1920		CSG1112
S	1921		CSG1112
S	1922		CSG1112
S	1923		CSG1112
S	1924		CSG1112
S	1925		CSG1111

=====Circuit Symbol and No.		===Part Name	Part No.

RESISTORS

R	1901	RS1/16S154J
R	1902	RS1/16S473J
R	1903	RA4C101J
R	1904	RA3C101J
R	1905	RA3C101J
R	1906	RA4C101J
R	1907	RS1/16S473J
R	1908	RA3C101J
R	1909	RA3C101J
R	1910	RA4C101J
R	1911	RA4C101J
R	1912	RA4C101J
R	1913	RA3C101J
R	1914	RA4C101J
R	1915	RA4C101J
R	1922	RS1/10S121J
R	1923	RS1/10S2R2J
R	1924	RS1/8S222J
R	1925	RS1/8S222J
R	1930	RS1/16S222J
R	1931	RS1/16S473J
R	1956	RS1/10S0R0J
R	1957	RS1/10S0R0J
R	1958	RS1/10S0R0J
R	1959	RS1/10S0R0J
R	1962	RS1/10S511J
R	1963	RS1/10S511J
R	1964	RS1/10S821J
R	1965	RS1/10S821J
R	1966	RS1/8S821J
R	1967	RS1/8S821J
R	1968	RS1/8S511J
R	1969	RS1/8S511J
R	1970	RS1/8S511J
R	1971	RS1/8S511J
R	1972	RS1/8S511J
R	1973	RS1/8S511J
R	1974	RS1/8S511J
R	1975	RS1/8S511J
R	1976	RS1/8S751J
R	1977	RS1/8S751J
R	1978	RS1/8S391J
R	1979	RS1/8S391J
R	1982	RS1/16S0R0J
R	1983	RS1/16S0R0J

CAPACITORS

C	1901	CKSQYB105K10
C	1902	CKSRYB103K25
C	1903	CSZS100M6R3
C	1904	CSZS100M6R3
C	1906	CKSQYB103K25
C	1907	CSZS100M6R3
C	1908	CKSRYB473K16
C	1911	CKSRYB473K16
C	1914	CKSRYB103K25
C	1917	CSZSR100M16
C	1918	CKSRYB102K50
C	1919	CCSQCH221J50
C	1921	CKSQYB104K25
C	1922	CKSQYB104K25

D

Unit Number : CWX2323(DEH-P920R/ES, DEH-P9250/ES)
Unit Name : DSP Unit

MISCELLANEOUS

=====Circuit Symbol and No.		===Part Name	Part No.
IC	3001	IC	PD5504A
IC	3101	IC	AK7714
IC	3201	IC	TC74HC393AF
IC	3202	IC	TC9246F
IC	3203	IC	HD74HCT126FP
IC	3301	IC	NJM4580M
D	3301	Diode	MA8043(L)
L	3001		CTF1410
L	3101		CTF1410
L	3201		CTF1410
L	3202	Inductor	LCTB2R2K1608
L	3203		CTF1410
L	3301		CTF1410
L	3302		CTF1410
L	3303		CTF1410
L	3304		CTF1410
L	3305		CTF1410
L	3306		CTF1410
L	3307		CTF1410
L	3308		CTF1410
L	3309		CTF1410
L	3310		CTF1410
X	3001	Radiator 10.00MHz	CSS1428
X	3101	Crystal Resonator 22.5792MHz	CSS1403

RESISTORS

R	3001		RA4C102J
R	3004		RS1/16S102J
R	3010		RS1/16S681J
R	3011		RS1/16S102J
R	3012		RS1/16S102J
R	3013		RS1/16S102J
R	3014		RS1/16S102J
R	3018		RS1/16S102J
R	3023		RA3C221J
R	3024		RS1/16S102J
R	3025		RA3C102J
R	3026		RA4C681J
R	3028		RS1/16S473J
R	3029		RS1/16S473J
R	3033		RS1/16S102J
R	3034		RS1/16S102J
R	3038		RS1/16S102J
R	3039		RS1/16S102J
R	3040		RS1/16S102J
R	3041		RS1/16S102J
R	3042		RS1/16S102J
R	3043		RS1/16S102J
R	3044		RS1/16S102J
R	3045		RS1/16S473J
R	3047		RS1/16S473J
R	3048		RS1/16S473J
R	3049		RS1/16S473J
R	3101		RS1/16S0R0J
R	3102		RS1/16S0R0J
R	3103		RS1/16S471J
R	3104		RS1/16S473J
R	3105		RS1/16S473J
R	3106		RS1/16S105J
R	3107		RS1/16S102J
R	3108		RS1/16S102J
R	3109		RS1/16S102J
R	3110		RS1/16S0R0J
R	3201		RS1/16S332J
R	3202		RS1/16S391J
R	3203		RS1/16S101J
R	3204		RS1/16S271J
R	3301		RS1/16S273J
R	3302		RS1/16S273J
R	3303		RS1/16S512J
R	3304		RS1/16S512J
R	3305		RS1/16S272J
R	3306		RS1/16S272J
R	3307		RS1/16S681J

CAPACITORS

C	3001		CKSRYB103K50
C	3101		CCSRCH180J50
C	3102		CCSRCH180J50
C	3103		CKSQYB103K50
C	3104		CKSYB106K6R3
C	3105		CKSRYB104K16
C	3106		CKSRYB104K16
C	3107		CKSRYB104K16
C	3108		CKSRYB104K16
C	3201		CKSRYB103K50
C	3202		CKSQYB474K16
C	3203		CKSRYB103K50
C	3204		CKSRYB123K25
C	3205		CKSRYB103K50
C	3206		CKSRYB103K50
C	3207		CCSRCH330J50
C	3208		CKSYB106K6R3
C	3301		CKSRYB332K50
C	3302		CKSRYB332K50
C	3303		CKSYB106K6R3
C	3304		CKSYB106K6R3
C	3305		CKSYB106K6R3
C	3306		CKSYB106K6R3
C	3307		CKSYB225K16
C	3308		CKSRYB104K16
C	3309		CKSYB106K6R3
C	3310		CKSRYB104K16
C	3311		CSZSR470M6R3
C	3312		CKSRYB104K16
C	3313		CKSYB106K6R3
C	3314		CKSRYB103K50
C	3315		CKSQYB105K10

E

Unit Number : CWX2322(DEH-P920R/UC, DEH-P9250/ES)
Unit Name : ASL Unit

MISCELLANEOUS

IC	4501	IC	NJM2068MD
IC	4502	IC	NJM2068MD
Q	4501	Transistor	2SC2458
D	4501	Diode	MA152WK
D	4502	Diode	MA3043(LMH)
D	4503	Diode	MA3075(M)
VR	4501	Semi-fixed 10kΩ(B)	CCP1319
MIC	4501	Microphone	CPM1011

RESISTORS

R	4501		RS1/8S222J
R	4502		RS1/8S683J
R	4503		RS1/8S103J
R	4504		RS1/8S472J
R	4505		RS1/8S471J

=====Circuit Symbol and No.	===	Part Name	Part No.
R	4506		RS1/8S682J
R	4507		RS1/8S684J
R	4508		RS1/8S562J
R	4509		RS1/8S391J
R	4510		RS1/8S472J
R	4511		RS1/8S472J
R	4512		RS1/8S472J
R	4513		RS1/8S153J
R	4514		RS1/8S153J
R	4515		RS1/8S102J
R	4517		RS1/8S270J

CAPACITORS

C	4501		CEJA470M10
C	4502		CEJA470M10
C	4503		CEJAR68M50
C	4504		CEJA100M16
C	4505		CEJA470M10
C	4506		CEJA470M16
C	4507		CEJA100M16
C	4508		CEJANP220M10
C	4509		CEJAR68M50
C	4510		CEJANP100M10
C	4511		CKSYB823K50
C	4512		CCSCH101J50
C	4513		CEJA470M10

F Unit Number :
Unit Name : Switch PCB

S	951	Switch(CLOSE)	CSN1012
S	952	Switch(OPEN)	CSN1022

H Unit Number : CWX2359(DEH-P920R/UC, DEH-P9250/ES)
Unit Name : Control Unit

MISCELLANEOUS

IC	201	IC	UPD63710GC
IC	301	IC	BA5985FM
IC	601	IC	PD0236AM
IC	701	IC	BA05SFP
IC	901	IC	PE5011C
Q	101	Transistor	2SB1132
Q	901	Transistor	UN2111
D	801	Chip LED	CL200IRX
D	802	Chip LED	CL200IRX
TH	901	Thermistor	CCX1037
X	901	Radiator 8.380MHz	CSS1453
S	801	Spring Switch	CSN1051
S	802	Spring Switch	CSN1052

RESISTORS

R	101		RS1/8S120J
R	102		RS1/8S100J
R	103		RS1/16S222J
R	201		RS1/16S104J
R	205		RS1/16S103J
R	206		RS1/16S393J
R	207		RS1/16S182J
R	208		RS1/16S304J
R	210		RS1/16S0R0J
R	212		RS1/16S103J
R	213		RS1/16S103J
R	214		RS1/16S123J
R	215		RS1/16S273J
R	216		RS1/16S273J
R	217		RS1/16S681J

=====Circuit Symbol and No.	===	Part Name	Part No.
R	218		RS1/16S681J
R	309		RS1/16S473J
R	310		RS1/16S473J
R	501		RS1/16S102J
R	502		RS1/16S681J
R	503		RS1/16S681J
R	504		RS1/16S681J
R	505		RS1/16S681J
R	506		RS1/16S681J
R	507		RS1/16S0R0J
R	511		RS1/16S0R0J
R	512		RS1/16S512J
R	605		RA4C0R0J
R	801		RS1/8S751J
R	802		RS1/8S751J
R	901		RS1/16S222J
R	902		RS1/16S473J
R	903		RS1/16S222J
R	904		RS1/16S473J
R	905		RN1/16SE1502D
R	907		RS1/16S473J
R	908		RS1/16S222J
R	909		RS1/16S104J
R	910		RS1/16S103J
R	911		RS1/16S223J
R	912		RS1/16S473J
R	917		RS1/16S0R0J

CAPACITORS

C	101		CCSRCH102J25
C	102		CKSQYB104K16
C	103		CEV101M6R3
C	104		CEV470M6R3
C	105		CKSQYB334K16
C	106		CKSQYB334K16
C	107		CKSQYB334K16
C	201		CKSQYB104K16
C	202		CEV101M6R3
C	203		CKSQYB104K16
C	204		CKSRYB332K50
C	205		CKSQYB104K16
C	206		CKSRYB392K50
C	207		CKSQYB224K16
C	208		CCSRCH270J50
C	209		CCSRCJ3R0C50
C	210		CCSRCH221J50
C	211		CCSRCH101J50
C	212		CKSRYB682K25
C	213		CKSQYB104K16
C	214		CKSRYB104K16
C	215		CKSQYB104K16
C	216		CKSRYB104K16
C	217		CKSRYB104K16
C	218		CKSRYB104K16
C	219		CKSRYB104K16
C	220		CKSRYB104K16
C	223		CKSQYB471K50
C	301		CEV101M10
C	501		CKSRYB221K50
C	611		CKSRYB104K16
C	701		CEV101M6R3
C	702	22µF/6.3V	CCH1300
C	703		CKSQYB334K16
C	801		CKSRYB103K25
C	802		CKSRYB103K25
C	901		CKSRYB472K50
C	902		CKSYB475K10
C	903		CKSRYB103K25

=====Circuit Symbol and No.		===Part Name	Part No.

H Unit Number : CWX2358(DEH-P9200R/UC)
Unit Name : Control Unit

MISCELLANEOUS

IC	201	IC	UPD63710GC
IC	301	IC	BA5985FM
IC	602	IC	AK4321VF
IC	701	IC	BA05SFP
IC	901	IC	PE5011C
Q	101	Transistor	2SB1132
Q	901	Transistor	UN2111
D	801	Chip LED	CL200IRX
D	802	Chip LED	CL200IRX
TH	901	Thermistor	CCX1037
X	201	Ceramic Resonator 16.934MHz	CSS1456
X	901	Radiator 8.380MHz	CSS1453
S	801	Spring Switch	CSN1051
S	802	Spring Switch	CSN1052

RESISTORS

R	101		RS1/8S120J
R	102		RS1/8S100J
R	103		RS1/16S222J
R	201		RS1/16S104J
R	205		RS1/16S103J
R	206		RS1/16S393J
R	207		RS1/16S182J
R	208		RS1/16S304J
R	210		RS1/16S0R0J
R	212		RS1/16S103J
R	213		RS1/16S103J
R	214		RS1/16S123J
R	215		RS1/16S273J
R	216		RS1/16S273J
R	217		RS1/16S681J
R	218		RS1/16S681J
R	309		RS1/16S473J
R	310		RS1/16S473J
R	501		RS1/16S102J
R	502		RS1/16S681J
R	503		RS1/16S681J
R	504		RS1/16S681J
R	505		RS1/16S681J
R	506		RS1/16S681J
R	511		RS1/16S0R0J
R	601		RS1/16S102J
R	602		RS1/16S102J
R	603		RS1/16S223J
R	604		RS1/16S223J
R	606		RS1/16S0R0J
R	607		RS1/16S0R0J
R	612		RA4C0R0J
R	801		RS1/8S751J
R	802		RS1/8S751J
R	901		RS1/16S222J
R	902		RS1/16S473J
R	903		RS1/16S222J
R	904		RS1/16S473J
R	905		RN1/16SE1502D
R	906		RS1/16S473J
R	908		RS1/16S222J
R	909		RS1/16S104J
R	910		RS1/16S103J
R	911		RS1/16S223J
R	912		RS1/16S473J
R	917		RS1/16S0R0J

=====Circuit Symbol and No.		===Part Name	Part No.

CAPACITORS

C	101		CCSRCH102J25
C	102		CKSQYB104K16
C	103		CEV101M6R3
C	104		CEV470M6R3
C	105		CKSQYB334K16
C	106		CKSQYB334K16
C	107		CKSQYB334K16
C	201		CKSQYB104K16
C	202		CEV101M6R3
C	203		CKSQYB104K16
C	204		CKSRYB332K50
C	205		CKSQYB104K16
C	206		CKSRYB392K50
C	207		CKSQYB224K16
C	208		CCSRCH270J50
C	209		CCSRCJ3R0C50
C	210		CCSRCH221J50
C	211		CCSRCH101J50
C	212		CKSRYB682K25
C	213		CKSQYB104K16
C	214		CKSRYB104K16
C	215		CKSQYB104K16
C	216		CKSRYB104K16
C	217		CKSRYB104K16
C	218		CKSRYB104K16
C	219		CKSRYB104K16
C	220		CKSRYB104K16
C	223		CKSQYB471K50
C	301		CEV101M10
C	601		CEV4R7M35
C	602		CEV4R7M35
C	603		CCSQSL152J50
C	604		CCSQSL152J50
C	605		CEV470M6R3
C	606		CKSRYB104K16
C	607		CKSRYB104K16
C	608		CKSRYB104K16
C	609		CEV100M16
C	610		CKSRYB104K16
C	612		CKSRYB104K16
C	701		CEV101M6R3
C	702	22µF/6.3V	CCH1300
C	703		CKSQYB334K16
C	801		CKSRYB103K25
C	802		CKSRYB103K25
C	901		CKSRYB472K50
C	902		CKSYB475K10
C	903		CKSRYB103K25

I Unit Number :
Unit Name : Photo Unit

Q	1	Photo-transistor	CPT230SX-TU
Q	2	Photo-transistor	CPT230SX-TU

Miscellaneous Parts List

		Pickup Unit(Service)(P8)	CXX1285
M	1	Motor Unit(CARRIAGE)	CXB2190
M	2	Motor Unit(LOADING)	CXB2195
M	3	Motor Unit(SPINDLE)	CXB2562
M	951	Motor (AUTO FLAP)	CXM1085