
2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

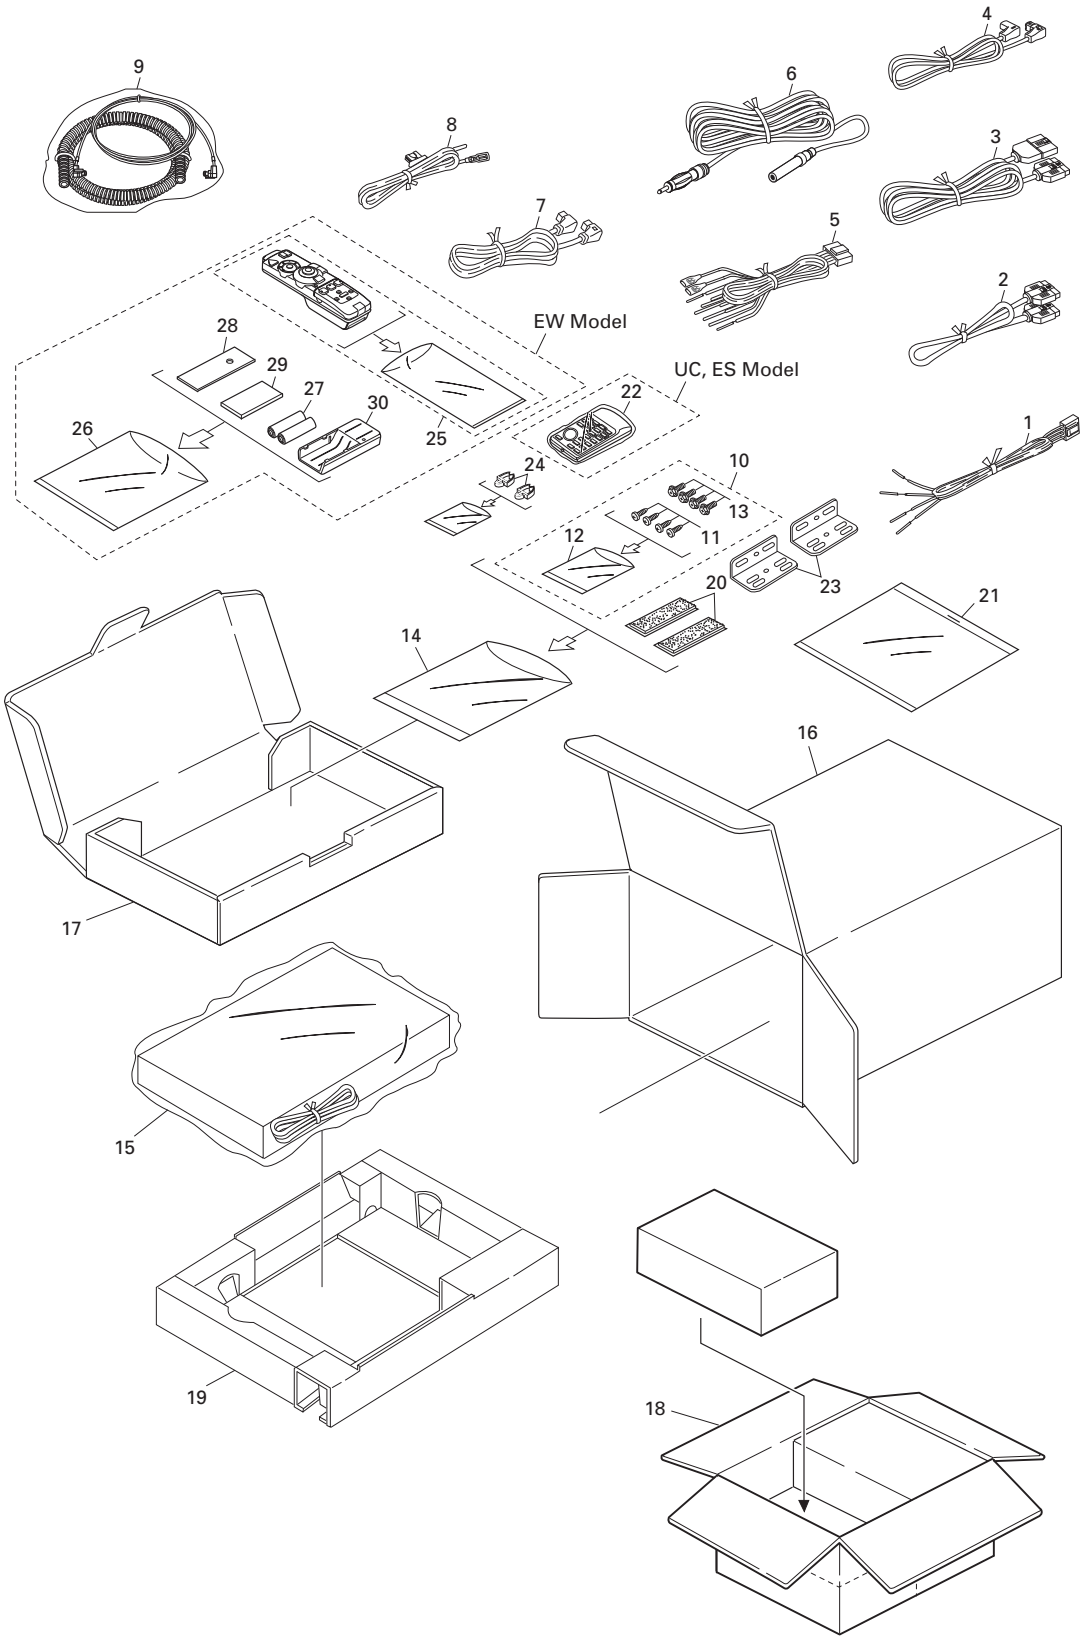

NOTE:

● Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.

● Screws adjacent to ∇ mark on the product are used for disassembly.


● PACKING SECTION PARTS LIST

Mark	No.	Description	Part No. AVM-P9000R/UC	AVM-P9000R/EW	AVM-P9000/ES
	1	Cord Assy	CDE5905	CDE5905	CDE5905
	2	Cord Assy	CDE5906	CDE5906	Not used
	3	Cord Assy	CDE5908	CDE5908	CDE5908
	4	Cord Assy	CDE6016	CDE6016	CDE6016
	5	Cord Assy	CDE6305	CDE6305	CDE6305
	6	Antenna Cord	CDH1265	CDH1265	CDH1265
	7	Cord Assy	CDE6365	CDE6365	CDE6365
	8	Cord Assy	CDE6368	CDE6368	CDE6368
	9	Cable	CDE6366	CDE6366	CDE6366
*	10	Screw Assy	CEA2440	CEA2440	CEA2440
	11	Screw	BNC40P120FZK	BNC40P120FZK	BNC40P120FZK
*	12	Polyethylene Bag	CEG1158	CEG1158	CEG1158
	13	Screw	HMF40P080FZK	HMF40P080FZK	HMF40P080FZK
*	14	Polyethylene Bag	CEG1101	CEG1101	CEG1101
	15	Polyethylene Bag	CEG1181	CEG1057 (Cover)	CEG1057 (Cover)
	16	Carton	CHG4085	CHG4083	CHG4084
	17	Sub Carton	CHG4089	CHG4089	CHG4089
	18	Contain Box	CHL4085	CHL4083	CHL4084
	19	Protector	CHP2280	CHP2280	CHP2280
	20	Fastener	CNM3728	CNM3728	CNM3728
	21-1	Owner's Manual	CRB1591	CRB1585	CRB1593
	21-2	Owner's Manual	CRB1592	CRB1586	CRB1594
	21-3	Owner's Manual	Not used	CRB1587	CRB1595
	21-4	Owner's Manual	Not used	CRB1588	CRB1596
	21-5	Owner's Manual	Not used	CRB1589	CRB1597
	21-6	Owner's Manual	Not used	CRB1590	Not used
*	21-7	Card	ARY1048	Not used	Not used
*	21-8	Warranty Card	Not used	CRY1157	Not used
	21-9	Polyethylene Bag	CEG1116	CEG1116	CEG1116
	22	Remote Control Assy	CXB6029	Not used	CXB6028
	23	Angle	CNB2351	CNB2351	CNB2351
	24	Clamper	CNV1343	CNV1343	CNV1343
	25	Remote Control Main Assy	Not used	CPN1639	Not used
	26	Polyethylene Bag	Not used	CEG1011	Not used
	27	Battery	Not used	CEX1021	Not used
	28	Sheet	Not used	CNM5288	Not used
	29	Sheet	Not used	CNM5472	Not used
	30	Holder	Not used	CNS4502	Not used

● **Owner's Manual**

Model	Part No.	Language
AVM-P9000R/UC	CRB1591	English
	CRB1592	French
AVM-P9000R/EW	CRB1585	English
	CRB1586	Spanish
	CRB1587	German
	CRB1588	French
	CRB1589	Italian
	CRB1590	Dutch
AVM-P9000/ES	CRB1593	English
	CRB1594	Spanish
	CRB1595	Portuguese(B)
	CRB1596	Chinese
	CRB1597	Arabic

2.2 EXTERIOR

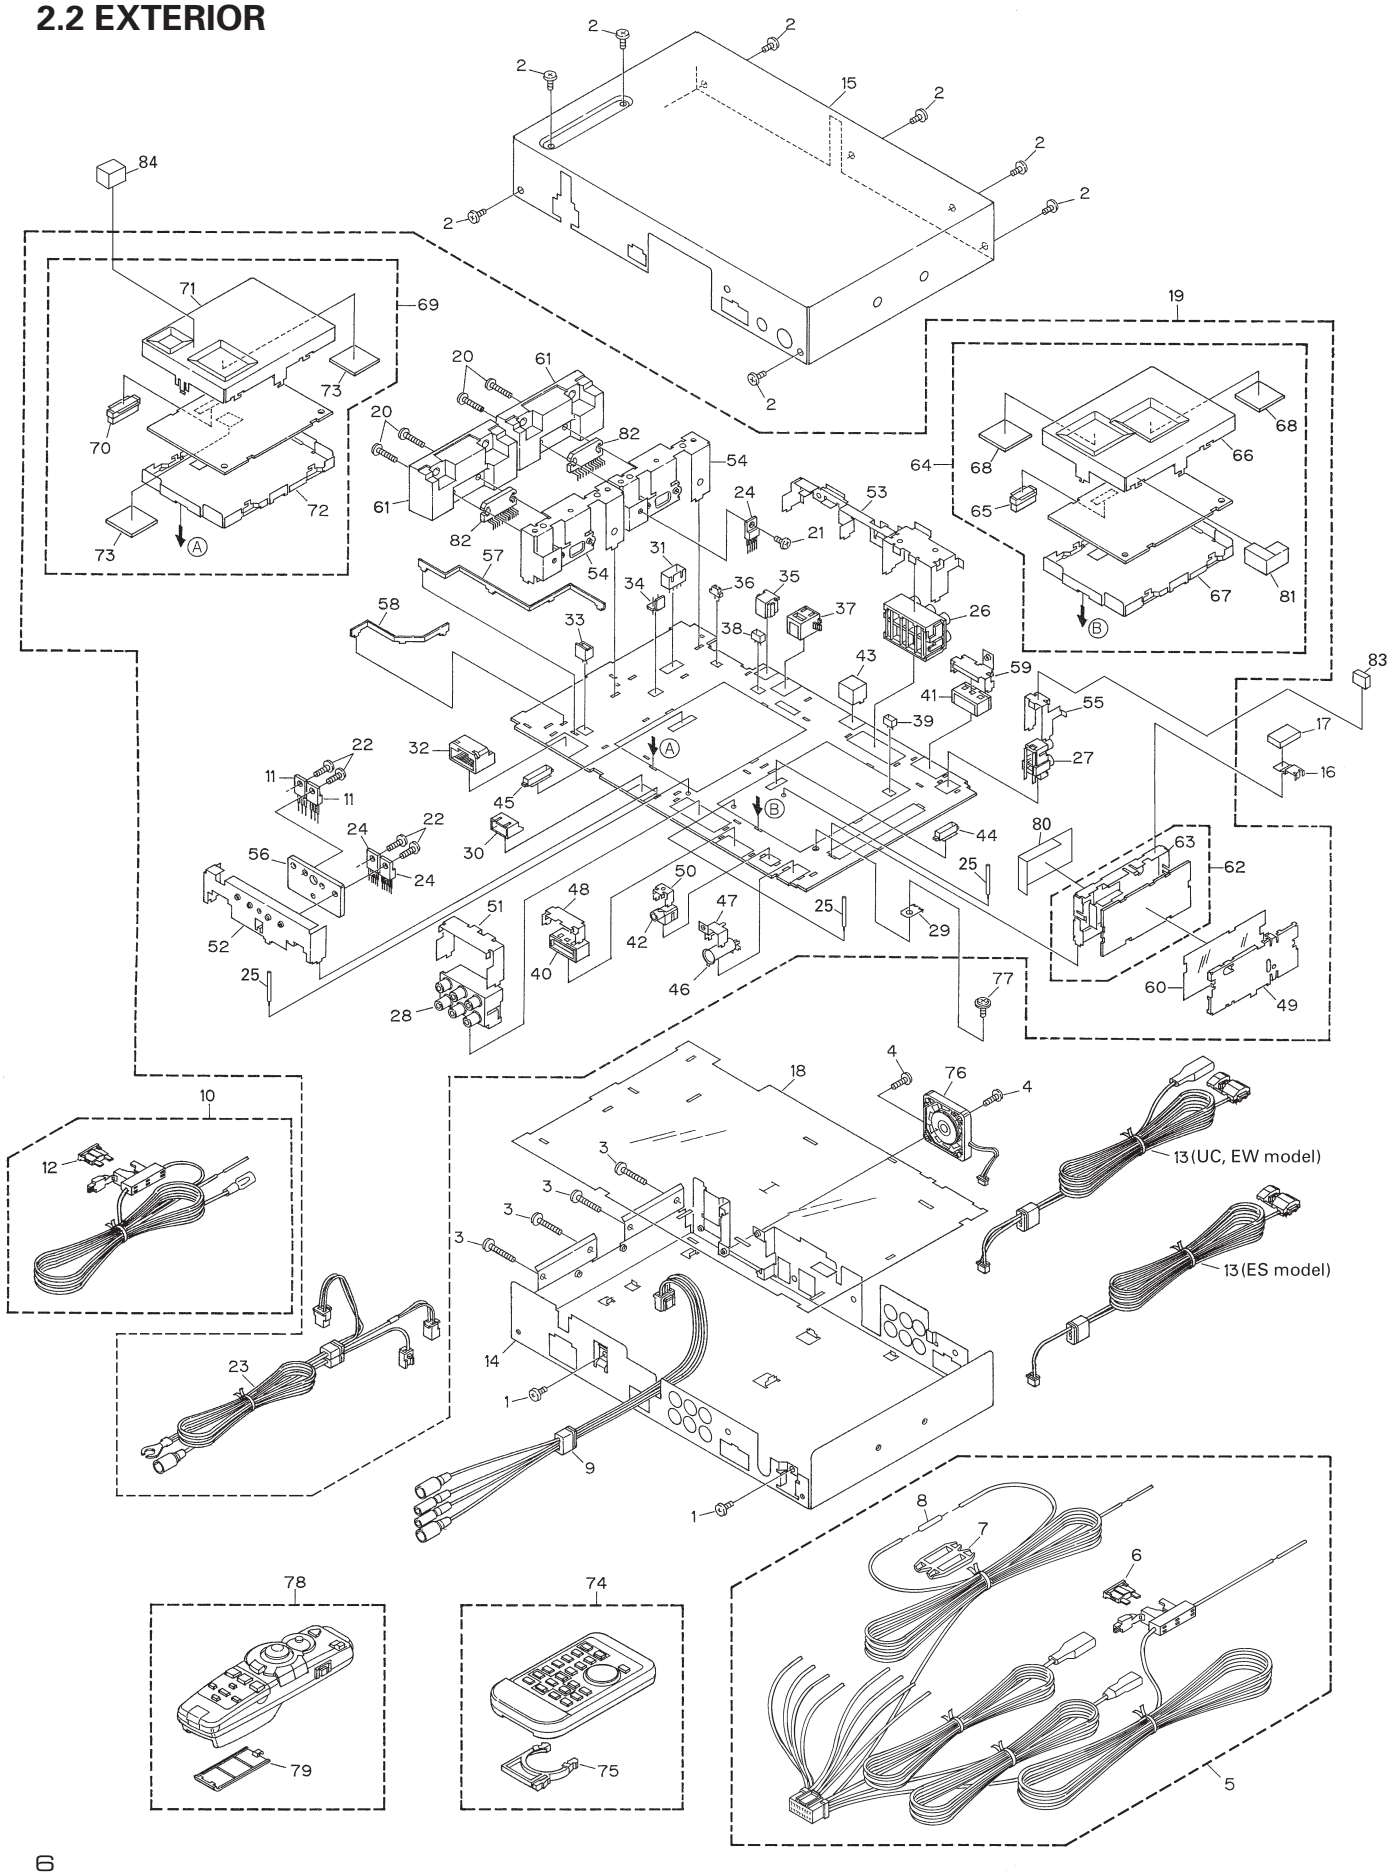

(1) EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.
1	Screw	BSZ30P060FMC
2	Screw	BSZ30P060FZK
3	Screw	BSZ30P200FMC
4	Screw(M2.6x10)	CBA1147
5	Cord Assy	CDE6305
6	Fuse(10A)	CEK1136
7	Cap	CNS1472
8	Resistor	RS1/2PMF102J
9	Cord Assy	CDE6307
10	Cord Assy	CDE6368
11	Transistor(Q804,813)	2SD2396
12	Fuse(4A)	CEK1001
13	Cord Assy	See Contrast table(2)
14	Chassis	CNA2292
15	Case	See Contrast table(2)
16	Holder	CNC8964
17	Cushion	CNM7001
18	Insulator	CNM6988
19	Tuner Amp Unit	See Contrast table(2)
20	Screw	BMZ26P160FMC
21	Screw	BSZ26P060FMC
22	Screw	BSZ26P100FMC
23	Cord Assy	CDE6442
24	IC(IC800,801,802)	BA05ST-V5
25	Clamper	CEF1007
26	Pin Jack(CN101)	CKB1037
27	Pin Jack(CN200)	CKB1045
28	Pin Jack(CN920)	CKB1046
29	Terminal(CN402)	CKF1059
30	Plug(CN202)	CKM1131
31	Connector(CN900)	CKM1192
32	Plug(CN800)	CKM1278
33	Plug(CN802)	CKM1325
34	Plug(CN803)	CKS-555
35	Connector(CN201)	CKS2601
36	Connector(CN860)	CKS3124
37	Connector(CN160)	CKS3414
38	Connector(CN801)	CKS3582
39	Connector(CN260)	CKS3596
40	Connector(CN350)	CKS3644
41	Connector(CN1)	See Contrast table(2)
42	Connector(CN100)	CKS4124
43	Connector(CN185)	CKS4362
44	Connector(CN661)	CKS4363
45	Connector(CN660)	CKS4364

Mark No.	Description	Part No.
46	Antenna Jack(CN401)	CKX1056
47	Holder	CNC4569
48	Holder	CNC7047
49	Holder	CNC7533
50	Holder	CNC8205
51	Holder	CNC8274
52	Holder	CNC8819
53	Holder	CNC8820
54	Holder	CNC8821
55	Holder	CNC8826
56	Heat Sink	CNC8827
57	Buss Bar	CNC8841
58	Buss Bar	CNC8842
59	Holder	See Contrast table(2)
60	Insulator	CNM5967
61	Heat Sink	CNR1570
62	FM/AM Tuner Unit	See Contrast table(2)
63	Holder	CNC7532
64	GDC Unit	CWM7146
65	Connector(CN1601)	CKS4365
66	Shield	CNC9134
67	Shield	CNC9135
68	Sheet	CNM6866
69	DSP Unit	CWM7147
70	Connector(CN2701)	CKS4366
71	Shield	CNC9107
72	Shield	CNC9108
73	Sheet	CNM6866
74	Remote Control Assy	See Contrast table(2)
75	Cover	See Contrast table(2)
76	Fan Motor	CXM1154
77	Screw	ISS26P055FUC
78	Remote Control Main Assy	See Contrast table(2)
79	Case	See Contrast table(2)
80	Sheet	CNM7002
81	Sheet	CNM7003
82	IC(IC900,901)	PAL005A
83	Cushion	CNM7052
84	Spacer	CNM7053

(2) CONTRAST TABLE

AVM-P9000R/UC, AVM-P9000R/EW and AVM-P9000/ES are constructed the same except for the following:

Mark	No.	Description	Part No.		
			AVM-P9000R/UC	AVM-P9000R/EW	AVM-P9000/ES
	13	Cord Assy	CDE6370	CDE6370	CDE6386
	15	Case	CNB2573	CNB2573	CNB2592
	19	Tuner Amp Unit	CWM7150	CWM7151	CWM7152
	41	Connector(CN1)	CKS3645	CKS3645	Not used
	59	Holder	CNC8963	CNC8963	Not used
	62	FM/AM Tuner Unit	CWE1501	CWE1500	CWE1501
	74	Remote Control Assy	CXB6029	Not used	CXB6028
	75	Cover	CZN5357	Not used	CZN5357
	78	Remote Control Main Assy	Not used	CPN1639	Not used
	79	Case	Not used	CNS6050	Not used

5. ELECTRICAL PARTS LIST

NOTE:

● Parts whose parts numbers are omitted are subject to being not supplied.

● The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

B Unit Number : CWE1501
(AVM-P9000R/UC)
(AVM-P9000/ES)

Unit Name : FM/AM Tuner Unit

MISCELLANEOUS

Circuit Symbol & No.		Part Name	Part No.
IC	1	IC	PML002A
IC	2	IC	PM4008A
IC	3	IC	BR9010FV
Q	1	Transistor	2SC4081
Q	2	Transistor	DTC124EU
Q	3	FET	3SK263
Q	51	Transistor	2SC4081
Q	201	FET	2SK932
Q	202	Transistor	DTC124EU
Q	204	Transistor	2SC4081
D	1	Diode	KV1410(23)
D	2	Diode	1SV248
D	6	Diode	KV1410(23)
D	201	Diode	DAN217U
D	202	Diode	MA147
D	903	Diode	KV1410(23)
D	904	Diode	SVC253
L	1	Coil	CTC1155
L	3	Inductor	LCTB1R5K2125
L	4	Coil	CTC1155
L	201	Inductor	LCTB330K1608
L	202	Inductor	LFEA102J
L	203	Inductor	LCTA121J3225
L	901	Coil	CTC1154
L	902	Inductor	LCTA3R3J3225
L	904	Inductor	LCTBR47K1608
L	905	Inductor	LCTBR47K1608
T	51	Coil	CTE1132
CF	51	Ceramic Filter	CTF1442
CF	52	Ceramic Filter	CTF1442
CF	53	Ceramic Filter	CTF1442
CF	202	Ceramic Filter	CTF1476
X	901	Crystal Resonator 10.250MHz	CSS1432

RESISTORS

Circuit Symbol & No.		Part No.
R	1	RS1/16S183J
R	2	RS1/16S103J
R	5	RS1/16S0R0J
R	7	RS1/16S273J
R	8	RS1/16S473J
R	9	RS1/16S223J
R	10	RS1/16S473J
R	11	RS1/16S221J
R	12	RS1/16S103J
R	13	RS1/16S104J
R	16	RS1/16S223J
R	17	RS1/16S221J
R	18	RS1/16S221J
R	19	RS1/16S473J
R	20	RS1/16S470J
R	31	RS1/16S0R0J
R	51	RS1/16S470J
R	52	RS1/16S103J
R	53	RS1/16S103J
R	54	RS1/16S331J
R	55	RS1/16S331J
R	56	RS1/16S560J
R	57	RS1/16S560J
R	58	RS1/16S102J
R	59	RS1/16S225J
R	60	RS1/16S133J
R	61	RS1/16S433J
R	101	RS1/16S333J
R	102	RS1/16S103J
R	103	RS1/16S333J
R	104	RS1/16S562J
R	110	RS1/16S154J
R	111	RS1/16S273J
R	113	RS1/16S222J
R	114	RS1/16S333J
R	115	RS1/16S334J
R	116	RS1/16S473J
R	202	RS1/16S472J
R	203	RS1/16S225J
R	204	RS1/16S102J
R	205	RS1/16S220J
R	206	RS1/16S471J
R	208	RS1/16S104J
R	209	RS1/16S104J
R	210	RS1/16S563J
R	213	RS1/16S223J
R	251	RS1/16S225J
R	902	RS1/16S103J
R	904	RS1/16S473J
R	907	RS1/16S103J
R	908	RS1/16S681J
R	909	RS1/16S473J
R	914	RS1/16S562J

CAPACITORS

Circuit Symbol & No.		Part No.
C	1	CCSQCH4R0C50
C	6	CKSQYB105K10
C	8	CKSRYB222K50
C	10	CCSRCH220J50
C	11	CCSRCH150J50
C	12	CCSRCH8R0D50
C	14	CCSRCJ3R0C50
C	15	CKSRYB103K50
C	16	CKSRYB222K50
C	17	CKSRYB222K50
C	18	CCSRCJ3R0C50
C	19	CKSRYB103K50
C	20	CKSRYB103K50
C	21	CKSRYB103K50
C	24	CKSQYB334K16

=====Circuit Symbol & No.===Part Name			Part No.
C	26		CKSRYB472K50
C	30		CCSRCH220J50
C	32		CCSRCH470J50
C	35		CKSRYB103K50
C	51		CKSRYB103K50
C	52		CKSRYB473K16
C	53		CCSRCK2R0C50
C	54		CKSRYB103K50
C	55		CKSRYB104K16
C	56		CKSRYB104K16
C	58		CKSQYB224K16
C	101		CEALNP100M10
C	102		CCSRCH151J50
C	103		CKSRYB473K16
C	105		CKSRYB682K25
C	106		CEALR68M50
C	107		CKSRYB103K50
C	108		CKSQYB474K16
C	109		CKSQYB474K16
C	110		CKSRYB104K16
C	111		CKSRYB104K16
C	112		CKSRYB104K16
C	113		CKSRYB123K25
C	114		CEAL220M6R3
C	115		CKSRYB473K16
C	116		CEAL2R2M50
C	117		CKSRYB102K50
C	120		CKSRYB183K25
C	121		CKSRYB332K50
C	122		CKSRYB562K25
C	123		CKSRYB681K50
C	125		CKSRYB103K50
C	126		CKSRYB103K50
C	127		CEAL2R2M50
C	128		CKSRYB103K50
C	201		CCSRCH471J50
C	202		CCSRCH100D50
C	203		CKSRYB104K16
C	204		CKSRYB332K50
C	205		CKSRYB103K50
C	206		CKSRYB104K16
C	207		CKSRYB473K16
C	208		CCSRCH560J50
C	209		CEAL470M6R3
C	210		CKSRYB103K50
C	211		CKSRYB103K50
C	212		CCSRCH101J50
C	215		CKSRYB223K25
C	216		CKSQYB334K16
C	217		CKSRYB103K50
C	219		CKSQYB105K10
C	220		CKSRYB104K16
C	221		CKSRYB473K16
C	222		CKSQYB334K16
C	223		CKSQYB474K16
C	224		CKSRYB104K16
C	225		CKSRYB272K50
C	226		CKSRYB682K25
C	902		CCSRCH270J50
C	904		CKSRYB223K25
C	905		CKSRYB103K50
C	906		CCSRTH100D50
C	907		CCSRTH150J50
C	909		CCSRTH100D50
C	910		CKSRYB332K50

=====Circuit Symbol & No.===Part Name			Part No.
C	912		CKSQYB474K16
C	913		CKSRYB223K25
C	914		CKSRYB682K25
C	915		CKSQYB223K25
C	916		CKSQYB474K16
C	917		CKSYB475K10
C	918		CKSRYB223K25
C	919		CKSQYB225K10
C	920		CCSRCH270J50
C	921		CCSRCH270J50
C	922		CKSYB105K16
C	923		CKSRYB103K50

B Unit Number : CWE1500 (AVM-P9000R/EW)
Unit Name : FM/AM Tuner Unit

MISCELLANEOUS

IC	1	IC	PML002A
IC	2	IC	PM4008A
IC	3	IC	BR9010FV
Q	1	Transistor	2SC4081
Q	2	Transistor	DTC124EU
Q	3	FET	3SK263
Q	51	Transistor	2SC4081
Q	201	FET	2SK932
Q	202	Transistor	DTC124EU
Q	204	Transistor	2SC4081
D	1	Diode	KV1410(23)
D	2	Diode	1SV248
D	4	Diode	KV1410(23)
D	6	Diode	KV1410(23)
D	101	Diode	1SS355
D	201	Diode	DAN217U
D	202	Diode	MA147
D	903	Diode	KV1410(23)
D	904	Diode	SVC253
L	1	Coil	CTC1155
L	2	Coil	CTC1155
L	3	Inductor	LCTB100K2125
L	4	Coil	CTC1155
L	201	Inductor	LCTB330K1608
L	202	Inductor	CTF1287
L	203	Inductor	LCTA121J3225
L	901	Coil	CTC1154
L	902	Inductor	LCTA3R3J3225
L	904	Inductor	LCTBR47K1608
L	905	Inductor	LCTBR47K1608
T	51	Coil	CTE1133
CF	51	Ceramic Filter	CTF1442
CF	52	Ceramic Filter	CTF1442
CF	53	Ceramic Filter	CTF1442
CF	202	Ceramic Filter	CTF1476
X	901	Crystal Resonator 10.250MHz	CSS1432

RESISTORS

R	1		RS1/16S153J
R	2		RS1/16S103J
R	6		RS1/16S103J
R	7		RS1/16S273J
R	8		RS1/16S473J
R	9		RS1/16S223J
R	10		RS1/16S473J
R	11		RS1/16S221J
R	12		RS1/16S103J
R	13		RS1/16S104J

Circuit Symbol & No.	Part Name	Part No.
R 16		RS1/16S223J
R 17		RS1/16S221J
R 18		RS1/16S221J
R 19		RS1/16S473J
R 20		RS1/16S470J
R 51		RS1/16S470J
R 52		RS1/16S103J
R 53		RS1/16S103J
R 54		RS1/16S331J
R 55		RS1/16S331J
R 56		RS1/16S560J
R 57		RS1/16S560J
R 58		RS1/16S102J
R 59		RS1/16S225J
R 60		RS1/16S133J
R 61		RS1/16S433J
R 62		RS1/16S562J
R 101		RS1/16S333J
R 102		RS1/16S103J
R 103		RS1/16S333J
R 104		RS1/16S562J
R 110		RS1/16S154J
R 111		RS1/16S273J
R 112		RS1/16S223J
R 113		RS1/16S222J
R 114		RS1/16S333J
R 115		RS1/16S334J
R 116		RS1/16S473J
R 117		RS1/16S333J
R 118		RS1/16S223J
R 122		RS1/16S0R0J
R 202		RS1/16S472J
R 203		RS1/16S225J
R 204		RS1/16S102J
R 205		RS1/16S220J
R 206		RS1/16S471J
R 208		RS1/16S104J
R 209		RS1/16S104J
R 210		RS1/16S563J
R 213		RS1/16S223J
R 251		RS1/16S225J
R 902		RS1/16S103J
R 904		RS1/16S473J
R 907		RS1/16S103J
R 908		RS1/16S681J
R 909		RS1/16S473J
R 914		RS1/16S562J

CAPACITORS

Circuit Symbol & No.	Part Name	Part No.
C 1		CCSQCH5R0C50
C 2		CCSRCH5R0C50
C 4		CCSRCJ3R0C50
C 6		CKSQYB105K10
C 8		CKSRYB222K50
C 10		CCSRCH220J50
C 11		CCSRCH150J50
C 12		CCSRCH8R0D50
C 14		CCSRCJ3R0C50
C 15		CKSRYB103K50
C 16		CKSRYB222K50
C 17		CKSRYB222K50
C 18		CCSRCJ3R0C50
C 19		CKSRYB103K50
C 20		CKSRYB103K50
C 21		CKSRYB103K50
C 24		CKSQYB334K16
C 31		CKSRYB222K50
C 32		CCSRCH470J50
C 35		CKSRYB103K50
C 51		CKSRYB103K50
C 52		CKSRYB473K16
C 53		CCSRCK2R0C50
C 54		CKSRYB103K50
C 55		CKSRYB104K16
C 56		CKSRYB104K16
C 58		CKSQYB224K16
C 59		CKSRYB223K25
C 60		CKSRYB104K16
C 101		CEALNP100M10
C 102		CCSRCH151J50
C 103		CKSRYB473K16
C 105		CKSRYB682K25
C 106		CEAL2R2M50
C 107		CKSRYB103K50
C 108		CKSQYB474K16
C 109		CKSQYB474K16
C 110		CKSRYB104K16
C 111		CKSRYB104K16
C 112		CKSRYB104K16
C 113		CKSRYB123K25
C 114		CEAL220M6R3
C 115		CKSRYB473K16
C 116		CEAL2R2M50
C 117		CKSRYB102K50
C 120		CKSRYB153K25
C 121		CKSRYB332K50
C 122		CKSRYB682K25
C 123		CKSRYB681K50
C 125		CKSRYB103K50
C 126		CKSRYB103K50
C 127		CEAL2R2M50
C 128		CKSRYB103K50
C 201		CCSRCH471J50
C 202		CCSRCH100D50
C 203		CKSRYB104K16
C 204		CKSRYB332K50
C 205		CKSRYB103K50
C 206		CKSRYB104K16
C 207		CKSRYB473K16
C 208		CCSRCH560J50
C 209		CEAL470M6R3
C 210		CKSRYB103K50
C 211		CKSRYB103K50
C 212		CCSRCH101J50
C 215		CKSRYB223K25
C 216		CKSQYB334K16
C 217		CKSRYB103K50
C 219		CKSQYB105K10
C 220		CKSRYB104K16
C 221		CKSRYB473K16
C 222		CKSQYB334K16
C 223		CKSQYB474K16
C 224		CKSRYB104K16
C 225		CKSRYB272K50
C 226		CKSRYB682K25
C 902		CCSRCH270J50
C 904		CKSRYB223K25
C 905		CKSRYB103K50
C 906		CCSRTH100D50

=====Circuit Symbol & No.	===Part Name	Part No.
C 907		CCSRTH150J50
C 909		CCSRTH100D50
C 910		CKSRYB332K50
C 912		CKSQYB474K16
C 913		CKSRYB223K25
C 914		CKSRYB682K25
C 915		CKSQYB223K25
C 916		CKSQYB474K16
C 917		CKSYB475K10
C 918		CKSRYB223K25
C 919		CKSQYB225K10
C 920		CCSRCH270J50
C 921		CCSRCH270J50
C 922		CKSYB105K16
C 923		CKSRYB103K50

A Unit Number : CWM7150 (AVM-P9000R/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC 60	IC	NJM4558MD
IC 100	IC	BA3121F
IC 101	IC	BA3129F
IC 150	IC	NJM2246M
IC 160	IC	TA2050S
IC 161	IC	CA0008AM
IC 185	IC	NJM4558MD
IC 200	IC	NJM4558MD
IC 230	IC	NJM4558MD
IC 231	IC	TDA7052BT
IC 232	IC	NJM4558MD
IC 260	IC	CXA2061S
IC 261	IC	TC74VHC123AFT
IC 263	IC	NJM2235V
IC 264	IC	TC7SH04FU
IC 265	IC	NJM2246M
IC 266	IC	NJM2246M
IC 267	IC	NJM2246M
IC 268	IC	TC7SH04FU
IC 350	IC	NJM2267M
IC 351	IC	BA7623F
IC 480	IC	S-81250SGUP
IC 500	IC	PM4009A
IC 600	IC	PDH027A
IC 601	IC	PE5154A
IC 650	IC	S-80734ANDYI
IC 681	IC	BA3834F
IC 800	IC	BA05ST-V5
IC 801	IC	BA05ST-V5
IC 802	IC	BA05ST-V5
IC 803	IC	BA09SFP
IC 900	IC	PAL005A
IC 901	IC	PAL005A
IC 920	IC	NJU7032M
IC 921	IC	NJM2068MD
IC 922	IC	NJU7032M
Q 1	Transistor	2SC2412K
Q 2	Transistor	DTA114EK
Q 100	Transistor	DTC124EK
Q 101	Transistor	FMG12
Q 102	Transistor	DTA114EK
Q 150	Transistor	2SA1037K
Q 151	Transistor	FMG12
Q 152	Transistor	DTA114EK
Q 160	Transistor	2SA1037K

=====Circuit Symbol & No.	===Part Name	Part No.
Q 161	Transistor	DTC124EK
Q 200	Transistor	2SC2412K
Q 230	Transistor	DTC124EK
Q 261	Transistor	2SA1037K
Q 262	Transistor	2SC2412K
Q 263	Transistor	2SC2412K
Q 264	Transistor	2SC2412K
Q 265	Transistor	2SC2412K
Q 266	Transistor	2SA1037K
Q 267	Transistor	2SA1037K
Q 268	Transistor	2SC2412K
Q 269	Transistor	2SA1037K
Q 270	Transistor	2SA1037K
Q 271	Transistor	2SA1037K
Q 350	Transistor	DTA143EK
Q 351	Transistor	DTC323TU
Q 352	Transistor	FMG12
Q 353	Transistor	DTA114EK
Q 400	Transistor	2SC2412K
Q 500	Transistor	DTA124EK
Q 600	Transistor	DTA144EU
Q 601	Transistor	2SC2412K
Q 680	Transistor	2SC2412K
Q 681	Transistor	DTC124TK
Q 730	Transistor	2SC2412K
Q 731	Transistor	DTC144EK
Q 732	Transistor	2SC2412K
Q 733	Transistor	2SC2412K
Q 734	Transistor	DTC124EK
Q 735	Transistor	2SA1037K
Q 736	Transistor	IMD2A
Q 737	Transistor	DTA124EU
Q 738	Transistor	2SC2412K
Q 800	Transistor	DTA124EK
Q 801	Transistor	2SA1797
Q 802	Transistor	DTC114EK
Q 803	Transistor	2SD1857
Q 804	Transistor	2SD2396
Q 805	Transistor	2SB1184F5
Q 806	Transistor	2SC2412K
Q 807	Transistor	2SA1797
Q 808	Transistor	2SA1797
Q 809	Transistor	DTC144EK
Q 810	Transistor	2SC2412K
Q 811	Transistor	2SA1037K
Q 812	Transistor	2SD1760F5
Q 813	Transistor	2SD2396
Q 814	Transistor	2SC2412K
Q 815	Transistor	DTA124EK
Q 816	Transistor	2SA1037K
Q 817	Transistor	IMD2A
Q 818	Transistor	DTC144EK
Q 819	Transistor	IMX1
Q 820	Transistor	2SA1037K
Q 821	Transistor	DTC124EK
Q 822	Transistor	2SA1037K
Q 860	Transistor	2SD1859
Q 861	Transistor	IMD3A
Q 900	Transistor	DTC114TK
Q 920	Transistor	IMD2A
Q 921	Transistor	DTA124EK
Q 922	Transistor	FMG12
Q 923	Transistor	IMD2A
Q 924	Transistor	FMG12
Q 925	Transistor	FMG12

=====Circuit Symbol & No.===		Part Name	Part No.
Q	926	Transistor	FMG12
Q	927	Transistor	IMH3A
Q	928	Transistor	FMG12
Q	929	Transistor	FMG12
Q	932	Transistor	DTC323TK
Q	933	Transistor	DTC323TK
Q	934	Transistor	FMG13
Q	935	Transistor	FMG13
Q	936	Transistor	FMG13
D	1	Diode	UDZ12(B)
D	2	Diode	UDZ12(B)
D	3	Diode	UDZ12(B)
D	4	Diode	UDZ12(B)
D	6	Diode	UDZ12(B)
D	7	Diode	UDZ12(B)
D	9	Diode	UDZ12(B)
D	10	Diode	UDZ12(B)
D	11	Diode	UDZ12(B)
D	12	Diode	UDZ12(B)
D	13	Diode	UDZ12(B)
D	100	Diode	UDZ12(B)
D	101	Diode	UDZ12(B)
D	102	Diode	MA110
D	103	Diode	UDZ12(B)
D	185	Diode	UDZ12(B)
D	200	Diode	UDZ12(B)
D	201	Diode	MA110
D	260	Diode	MA110
D	261	Diode	MA110
D	262	Diode	MA8039(H)
D	263	Diode	MA152WK
D	350	Diode	UDZ12(B)
D	351	Diode	UDZ12(B)
D	352	Diode	UDZ12(B)
D	353	Diode	UDZ12(B)
D	354	Diode	UDZ12(B)
D	355	Diode	UDZ12(B)
D	357	Diode	UDZ12(B)
D	358	Diode	UDZ12(B)
D	359	Diode	UDZ12(B)
D	360	Diode	UDZ12(B)
D	361	Diode	UDZ12(B)
D	480	Diode	HZS16L(1)
D	650	Diode	MA152WK
D	651	Diode	MA110
D	660	Diode	1SS133
D	661	Diode	UDZ12(B)
D	730	Diode	HZS9L(A2)
D	731	Diode	MA111
D	732	Diode	HZS9L(A2)
D	733	Diode	MA152WK
D	734	Diode	MA152WK
D	800	Diode	ERA15-02VH
D	801	Diode	HZS6L(B1)
D	802	Diode	HZS9L(B3)
D	803	Diode	1SS133
D	804	Diode	MA152WK
D	805	Diode	HZS6L(C3)
D	806	Diode	HZS9L(B3)
D	807	Diode	MA152WK
D	808	Diode	ERA15-02VH
D	809	Diode	MA152WK
D	810	Diode	UDZ7R5(B)
D	811	Diode	HZS7L(A1)
D	814	Diode	ERA15-02VH

=====Circuit Symbol & No.===		Part Name	Part No.
D	815	Diode	MA152WK
D	816	Diode	ERA15-02VH
D	817	Diode	ERA15-02VH
D	818	Diode	ERA15-02VH
D	819	Diode	ERA15-02VH
D	820	Diode	ERA15-02VH
D	821	Diode	ERA15-02VH
D	823	Diode	1SR154-400
D	824	Diode	1SR154-400
D	825	Diode	1SR154-400
D	826	Diode	1SR154-400
D	860	Diode	UDZ12(B)
D	921	Diode	MA152WK
L	1	Inductor	CTF1305
L	2	Inductor	CTF1305
L	3	Inductor	CTF1305
L	4	Inductor	CTF1305
L	100	Inductor	LCTB2R2K2125
L	101	Inductor	LCTB2R2K2125
L	150	Inductor	LCTB4R7K2125
L	151	Inductor	LCTA220J3225
L	160	Inductor	LCTB3R3K2125
L	200	Inductor	LCTA1R5J3225
L	260	Chip-Inductor	LCTA2R2J3225
L	261	Chip-Inductor	LCTA2R2J3225
L	263	Inductor	CTF1305
L	264	Inductor	CTF1305
L	265	Inductor	LCTB2R2K2125
L	266	Inductor	CTF1305
L	267	Inductor	LCTB2R2K2125
L	268	Inductor	LCTB2R2K2125
L	269	Inductor	CTF1306
L	270	Inductor	LCTB4R7K2125
L	271	Inductor	LCTB4R7K2125
L	272	Inductor	LCTB4R7K2125
L	274	Inductor	LCTB100K2125
L	275	Inductor	CTF1305
L	276	Inductor	CTF1399
L	350	Inductor	LCTA680J3225
L	351	Inductor	LCTA680J3225
L	353	Inductor	CTF1305
L	355	Inductor	CTF1305
L	356	Inductor	CTF1305
L	357	Inductor	CTF1305
L	358	Inductor	CTF1399
L	359	Inductor	CTF1399
L	400	Inductor	LCTB4R7K2125
L	408	Inductor	CTF1399
L	409	Inductor	CTF1306
L	410	Inductor	CTF1306
L	411	Inductor	CTF1306
L	412	Inductor	CTF1306
L	413	Chip-Inductor	LCTA2R2J3225
L	418	Ferri-Inductor	LAU2R2K
L	419	Inductor	CTF1399
L	500	Inductor	CTF1409
L	501	Inductor	CTF1409
L	507	Inductor	CTF1420
L	508	Inductor	CTF1409
L	509	Inductor	CTF1306
L	510	Inductor	CTF1306
L	512	Inductor	CTF1409
L	513	Inductor	CTF1409
L	600	Inductor	CTF1306
L	601	Inductor	CTF1420

=====Circuit Symbol & No.		===Part Name	Part No.
L	602	Inductor	CTF1470
L	603	Inductor	CTF1306
L	604	Inductor	CTF1306
L	605	Inductor	CTF1399
L	606	Inductor	CTF1399
L	607	Inductor	CTF1306
L	608	Inductor	CTF1410
L	650	Inductor	CTF1399
L	660	Inductor-Array	CTF1421
L	661	Inductor-Array	CTF1421
L	662	Inductor	CTF1306
L	663	Inductor	CTF1306
L	664	Inductor	CTF1306
L	665	Inductor	CTF1306
L	666	Inductor	CTF1409
L	668	Inductor	CTF1306
L	669	Inductor	CTF1306
L	670	Inductor	CTF1306
L	672	Inductor	CTF1306
L	673	Inductor	CTF1409
L	674	Inductor	CTF1409
L	675	Inductor	CTF1409
L	676	Inductor	CTF1409
L	677	Inductor	CTF1306
L	680	Inductor	CTF1399
L	681	Inductor	CTF1399
L	682	Inductor-Array	CTF1421
L	683	Inductor	CTF1306
L	800	Inductor	CTF1420
L	801	Inductor	CTF1420
L	802	Choke Coil 100µH	CTH1157
L	803	Choke Coil 390mH	CTH1209
L	804	Ferri-Inductor	LAU2R2K
L	805	Chip-Inductor	LCTA2R2J3225
L	806	Choke Coil 600mH	CTH1171
L	807	Choke Coil 600mH	CTH1171
L	808	Chip-Inductor	LCTA2R2J3225
L	809	Inductor	CTF1399
L	810	Inductor	CTF1489
L	980	Inductor	CTF1409
X	261	Crystal Resonator 3.579545MHz	CSS1465
X	500	Crystal Resonator 3.648MHz	CSS1447
X	600	Radiator 12.5829MHz	CSS1495
S	650	Switch(RESET)	CSG1046
VR	260	Semi-fixed 100kΩ(B)	CCP1133
FU	1	Micro-Fuse 2A	CEK1190
FU	2	Micro-Fuse 2A	CEK1190
FU	3	Micro-Fuse 2A	CEK1190
FU	100	Micro-Fuse 2A	CEK1190
FU	150	Micro-Fuse 2A	CEK1190
FU	180	Micro-Fuse 2A	CEK1190
FU	200	Micro-Fuse 2A	CEK1190
FU	350	Micro-Fuse 2A	CEK1190
FU	351	Micro-Fuse 2A	CEK1190
FU	352	Micro-Fuse 2A	CEK1190
FU	800	Micro-Fuse 800mA	CEK1206
FU	801	Micro-Fuse 2A	CEK1190
FU	860	Micro-Fuse 400mA	CEK1184
		DSP Unit	CWM7147
		FM/AM Tuner Unit	CWE1501
		GDC Unit	CWM7146
AR	400	Surge Protector	DSPS-201M-S00B

=====Circuit Symbol & No.		===Part Name	Part No.
RESISTORS			
R	1		RS1/16S750J
R	2		RS1/16S750J
R	3		RS1/16S750J
R	4		RS1/16S0R0J
R	5		RS1/16S750J
R	7		RS1/16S0R0J
R	9		RS1/16S0R0J
R	10		RS1/16S0R0J
R	11		RS1/16S0R0J
R	15		RS1/16S0R0J
R	16		RS1/10S0R0J
R	17		RS1/10S332J
R	18		RS1/10S333J
R	19		RS1/10S104J
R	20		RS1/10S473J
R	60		RS1/10S101J
R	61		RS1/10S473J
R	62		RS1/10S473J
R	63		RS1/10S563J
R	64		RS1/10S563J
R	65		RS1/10S473J
R	66		RS1/10S473J
R	100		RS1/10S0R0J
R	101		RS1/10S0R0J
R	102		RS1/16S750J
R	103		RS1/10S123J
R	104		RS1/10S123J
R	105		RS1/16S123J
R	106		RS1/16S123J
R	107		RS1/10S102J
R	108		RS1/10S102J
R	109		RS1/10S220J
R	110		RS1/16S0R0J
R	111		RS1/16S0R0J
R	112		RS1/16S102J
R	113		RS1/16S102J
R	114		RS1/16S104J
R	115		RS1/16S104J
R	116		RS1/16S104J
R	117		RS1/16S104J
R	118		RS1/16S123J
R	119		RS1/16S133J
R	120		RS1/16S473J
R	121		RS1/16S153J
R	122		RS1/16S153J
R	123		RS1/16S473J
R	124		RS1/16S362J
R	125		RS1/16S223J
R	126		RS1/16S223J
R	127		RS1/16S362J
R	128		RS1/10S220J
R	129		RS1/10S821J
R	130		RS1/10S821J
R	131		RS1/16S104J
R	132		RS1/16S473J
R	133		RS1/16S0R0J
R	135		RS1/16S0R0J
R	136		RS1/16S223J
R	137		RS1/16S0R0J
R	140		RS1/16S223J
R	150		RS1/10S471J
R	151		RS1/10S471J
R	152		RS1/10S681J
R	153		RS1/10S0R0J
R	154		RS1/10S101J

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
R	155		RS1/10S0R0J	R	241		RS1/16S473J
R	156		RS1/16S270J	R	242		RS1/16S101J
R	157		RS1/16S330J	R	243		RS1/16S101J
R	160		RS1/10S101J	R	244		RS1/16S473J
R	161		RS1/10S620J	R	245		RS1/16S104J
R	162		RS1/10S101J	R	246		RS1/16S104J
R	163		RS1/10S181J	R	247		RS1/16S222J
R	164		RS1/10S223J	R	248		RS1/16S222J
R	165		RS1/10S102J	R	249		RS1/16S473J
R	166		RS1/16S102J	R	250		RS1/16S473J
R	167		RS1/10S223J	R	259		RS1/16S750J
R	168		RS1/16S181J	R	260		RS1/16S0R0J
R	169		RS1/16S183J	R	261		RS1/10S471J
R	170		RS1/10S222J	R	262		RS1/10S0R0J
R	171		RS1/16S102J	R	264		RS1/10S101J
R	172		RS1/16S102J	R	265		RS1/16S473J
R	173		RS1/10S472J	R	266		RS1/10S0R0J
R	174		RS1/10S223J	R	267		RS1/10S471J
R	175		RS1/16S473J	R	268		RS1/10S471J
R	176		RS1/16S473J	R	269		RS1/16S0R0J
R	177		RS1/10S0R0J	R	270		RS1/16S471J
R	178		RS1/16S0R0J	R	271		RS1/10S103J
R	179		RS1/16S0R0J	R	272		RS1/10S102J
R	185		RS1/16S0R0J	R	273		RN1/10SE1002D
R	186		RS1/16S0R0J	R	274		RS1/10S471J
R	187		RS1/16S0R0J	R	275		RS1/10S471J
R	188		RS1/16S101J	R	276		RS1/10S0R0J
R	189		RS1/16S473J	R	277		RS1/10S0R0J
R	190		RS1/16S473J	R	278		RN1/10SE1002D
R	191		RS1/16S0R0J	R	279		RS1/10S681J
R	192		RS1/16S103J	R	281		RS1/10S102J
R	193		RS1/16S103J	R	282		RS1/10S222J
R	194		RS1/16S473J	R	283		RS1/10S123J
R	195		RS1/16S473J	R	284		RS1/10S222J
R	200		RS1/10S750J	R	285		RN1/10SE1002D
R	201		RS1/10S102J	R	286		RS1/10S101J
R	202		RS1/10S102J	R	287		RS1/10S101J
R	203		RS1/10S473J	R	288		RS1/10S222J
R	204		RS1/4S101J	R	289		RS1/10S101J
R	205		RS1/16S104J	R	290		RS1/10S101J
R	206		RS1/16S104J	R	291		RS1/10S103J
R	207		RS1/16S102J	R	292		RS1/10S103J
R	208		RS1/16S104J	R	293		RS1/10S331J
R	209		RS1/16S104J	R	294		RS1/10S102J
R	210		RS1/16S102J	R	295		RS1/10S331J
R	211		RN1/16SE1002D	R	296		RS1/10S102J
R	212		RN1/16SE1002D	R	297		RS1/10S331J
R	213		RN1/16SE1002D	R	298		RS1/10S102J
R	214		RN1/16SE1002D	R	299		RS1/16S471J
R	215		RN1/16SE3001D	R	300		RS1/16S471J
R	216		RN1/16SE3001D	R	301		RS1/16S471J
R	217		RN1/16SE3001D	R	302		RS1/16S471J
R	218		RN1/16SE3001D	R	303		RS1/16S471J
R	219		RS1/10S103J	R	304		RS1/16S471J
R	220		RS1/10S103J	R	305		RS1/10S0R0J
R	230		RS1/16S0R0J	R	306		RS1/10S0R0J
R	231		RS1/16S223J	R	307		RS1/10S0R0J
R	232		RS1/16S223J	R	309		RS1/10S0R0J
R	233		RS1/16S223J	R	310		RS1/10S0R0J
R	234		RS1/16S222J	R	311		RS1/10S0R0J
R	235		RS1/16S0R0J	R	350		RS1/10S104J
R	236		RS1/16S104J	R	351		RS1/10S750J
R	237		RS1/16S223J	R	352		RS1/10S750J
R	238		RS1/16S561J	R	353		RS1/10S750J
R	239		RS1/16S223J	R	354		RS1/10S750J

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
R	355		RS1/16S0R0J	R	617		RS1/16S102J
R	360		RS1/16S0R0J	R	618		RS1/16S221J
R	364		RS1/16S0R0J	R	619		RS1/16S473J
R	365		RS1/16S0R0J	R	620		RS1/10S102J
R	366		RS1/16S0R0J	R	621		RS1/16S101J
R	368		RS1/10S0R0J	R	622		RS1/16S103J
R	370		RS1/10S0R0J	R	623		RS1/16S101J
R	371		RS1/16S0R0J	R	624		RS1/16S103J
R	400		RS1/10S0R0J	R	625		RS1/16S473J
R	401		RS1/10S473J	R	626		RS1/16S473J
R	402		RS1/16S103J	R	627		RS1/16S102J
R	403		RS1/10S473J	R	628		RS1/16S473J
R	404		RS1/10S681J	R	629		RS1/16S471J
R	405		RS1/10S681J	R	630		RS1/16S102J
R	406		RS1/10S272J	R	631		RS1/16S473J
R	407		RS1/10S272J	R	632		RS1/16S473J
R	408		RS1/10S102J	R	633		RS1/16S681J
R	410		RS1/16S393J	R	634		RS1/16S0R0J
R	411		RS1/10S162J	R	635		RS1/16S0R0J
R	412		RS1/10S162J	R	636		RS1/16S0R0J
R	414		RS1/16S0R0J	R	637		RS1/16S0R0J
R	415		RS1/16S0R0J	R	638		RS1/16S473J
R	417		RS1/16S681J	R	639		RS1/16S473J
R	418		RS1/10S0R0J	R	640		RS1/16S473J
R	419		RS1/16S681J	R	641		RS1/16S473J
R	420		RS1/16S681J	R	642		RS1/10S473J
R	421		RS1/16S681J	R	643		RS1/10S223J
R	424		RS1/16S473J	R	644		RS1/16S223J
R	425		RS1/16S473J	R	645		RS1/16S102J
R	426		RS1/10S473J	R	646		RS1/16S102J
R	427		RS1/16S472J	R	647		RS1/16S473J
R	429		RS1/16S473J	R	648		RS1/16S473J
R	430		RS1/16S0R0J	R	649		RS1/16S473J
R	431		RS1/16S0R0J	R	650		RS1/10S0R0J
R	445		RS1/16S0R0J	R	651		RS1/10S471J
R	446		RS1/16S0R0J	R	652		RS1/10S822J
R	480		RS1/8S151J	R	660		RS1/16S221J
R	491		RS1/16S0R0J	R	661		RAB4C221J
R	492		RS1/10S0R0J	R	662		RS1/10S0R0J
R	500		RS1/16S102J	R	663		RS1/16S102J
R	501		RS1/16S0R0J	R	664		RS1/16S0R0J
R	502		RS1/16S225J	R	665		RS1/16S0R0J
R	503		RS1/16S102J	R	682		RS1/16S104J
R	504		RS1/16S681J	R	683		RS1/16S103J
R	507		RS1/16S0R0J	R	684		RS1/16S473J
R	508		RS1/16S473J	R	685		RS1/16S471J
R	509		RS1/10S0R0J	R	686		RS1/10S104J
R	510		RS1/16S0R0J	R	687		RS1/10S102J
R	511		RS1/16S102J	R	689		RS1/16S473J
R	512		RS1/16S0R0J	R	690		RS1/16S102J
R	513		RS1/16S0R0J	R	691		RS1/16S102J
R	515		RS1/10S0R0J	R	692		RS1/16S102J
R	516		RS1/10S0R0J	R	698		RS1/16S0R0J
R	601		RS1/16S0R0J	R	730		RS1/16S472J
R	602		RS1/16S102J	R	731		RS1/16S103J
R	603		RS1/16S102J	R	732		RS1/4S681J
R	604		RS1/16S102J	R	733		RS1/16S473J
R	605		RS1/16S222J	R	734		RS1/16S103J
R	606		RS1/16S222J	R	735		RS1/16S103J
R	607		RS1/16S473J	R	736		RS1/10S473J
R	609		RS1/16S473J	R	737		RS1/16S103J
R	610		RS1/16S473J	R	738		RS1/10S103J
R	613		RAB4C471J	R	739		RS1/10S103J
R	614		RAB4C221J	R	740		RS1/10S333J
R	616		RS1/16S473J	R	741		RS1/16S331J

Circuit Symbol & No.	Part Name	Part No.
R 742		RS1/16S224J
R 743		RS1/16S473J
R 745		RS1/16S0R0J
R 800		RS1/16S102J
R 801		RS1/16S102J
R 802		RS1/10S473J
R 803		RS1/10S473J
R 804		RS1/10S472J
R 805		RS1/10S473J
R 806		RS1/10S102J
R 807		RS1/10S102J
R 808		RS1/10S472J
R 810		RS1/10S472J
R 811		RD1/4PU271J
R 812		RD1/4PU271J
R 813		RS1/10S472J
R 814		RS1/10S271J
R 815		RS1/10S822J
R 816		RD1/4PU431J
R 818		RS1/10S822J
R 819		RD1/4PU122J
R 820		RS1/10S331J
R 821		RS1/10S102J
R 822		RS1/10S472J
R 823		RS1/10S273J
R 824		RS1/10S273J
R 825		RS1/10S102J
R 826		RS1/10S472J
R 827		RS1/10S221J
R 828		RS1/10S752J
R 829		RS1/10S472J
R 830		RS1/10S561J
R 831		RS1/16S103J
R 832		RS1/16S473J
R 833		RS1/10S473J
R 834		RS1/8S153J
R 835		RS1/10S473J
R 836		RS1/10S392J
R 837		RS1/10S223J
R 838		RS1/8S101J
R 839		RS1/16S472J
R 840		RS1/10S102J
R 841		RS1/10S473J
R 842		RS1/16S472J
R 843		RS1/10S472J
R 845		RS1/10S103J
R 846		RS1/8S103J
R 847		RS1/10S103J
R 848		RS1/10S102J
R 849		RS1/10S473J
R 850		RS1/10S473J
R 851		RS1/10S472J
R 852		RS1/10S103J
R 853		RS1/10S472J
R 854		RS1/10S472J
R 855		RS1/8S153J
R 860		RD1/4PU221J
R 870		RS1/16S102J
R 900		RS1/16S103J
R 901		RS1/16S103J
R 902		RS1/10S103J
R 903		RS1/16S0R0J
R 904		RS1/10S331J
R 905		RS1/10S103J
R 906		RS1/16S0R0J

Circuit Symbol & No.	Part Name	Part No.
R 907		RS1/16S331J
R 919		RS1/16S102J
R 920		RS1/10S471J
R 921		RS1/10S471J
R 922		RS1/10S471J
R 923		RS1/10S471J
R 924		RS1/10S471J
R 925		RS1/10S471J
R 926		RS1/10S471J
R 927		RS1/10S471J
R 928		RS1/16S472J
R 929		RS1/10S471J
R 930		RS1/10S471J
R 931		RS1/10S101J
R 932		RS1/10S101J
R 934		RS1/16S472J
R 935		RS1/10S471J
R 936		RS1/10S471J
R 938		RS1/10S473J
R 939		RS1/10S473J
R 942		RS1/10S473J
R 943		RS1/10S473J
R 944		RS1/10S473J
R 945		RS1/10S473J
R 947		RS1/16S101J
R 948		RS1/10S821J
R 949		RS1/10S103J
R 950		RS1/10S473J
R 951		RS1/10S103J
R 952		RS1/10S104J
R 953		RS1/10S104J
R 954		RS1/10S103J
R 955		RS1/16S104J
R 956		RS1/10S103J
R 957		RS1/16S103J
R 958		RS1/16S103J
R 959		RS1/16S103J
R 960		RS1/16S103J
R 961		RS1/16S103J
R 962		RS1/16S103J
R 963		RS1/10S821J
R 964		RS1/10S821J
R 965		RS1/10S821J
R 966		RS1/10S821J
R 967		RS1/10S821J
R 968		RS1/10S821J
R 969		RS1/10S223J
R 970		RS1/10S223J
R 971		RS1/10S223J
R 972		RS1/10S223J
R 973		RS1/10S223J
R 974		RS1/10S223J
R 975		RS1/16S822J
R 976		RS1/16S0R0J
R 977		RS1/16S0R0J
R 978		RS1/16S0R0J

CAPACITORS

Circuit Symbol & No.	Part Name	Part No.
C 60		CEJA100M16
C 61		CEJA100M16
C 62		CEJA100M16
C 63		CKSQYB104K50
C 64		CKSQYB104K50
C 65		CCSRCH270J50
C 66		CCSRCH270J50
C 100		CKSRYB471K50
C 101		CKSRYB471K50
C 102		CCSRCH101J50

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
C	103		CCSRCH101J50	C	239		CKSRYB222K50
C	104		CEJA220M16	C	240		CKSRYB473K25
C	105		CEJA101M16	C	241		CEJANP100M16
C	106		CEJA4R7M35	C	242		CEJANP100M16
C	107		CEJA4R7M35	C	243		CEJA100M16
C	108		CEJA4R7M35	C	244		CKSRYB104K16
C	109		CEJA1R0M50	C	259		CKSRYB221K50
C	110		CEJA4R7M35	C	261		CEJAR10M50
C	111		CKSRYB102K50	C	262		CKSQYB103K50
C	112		CEJA330M16	C	263		CCSQCH180J50
C	113		CEJA100M16	C	264		CKSQYB474K16
C	115		CKSYB225K16	C	265		CEJA1R0M50
C	117		CKSYB225K16	C	266		CKSQYB105K16
C	118		CKSRYB102K50	C	267		CEJA1R0M50
C	119		CKSQYB225K10	C	268		CEJA100M16
C	120		CKSQYB225K10	C	269		CEJA4R7M35
C	121		CKSRYB102K50	C	270		CKSQYB103K50
C	122		CCSRCH101J50	C	271		CCSQCH470J50
C	123		CCSRCH101J50	C	272		CEJA1R0M50
C	150		CEJA100M16	C	273		CKSQYB104K50
C	151		CEJA100M16	C	274		CEJA100M16
C	152		CKSQYB103K50	C	275		CKSQYB103K50
C	153	470µF/6.3V	CCH1182	C	276		CCSQCH100J50
C	154		CEJA100M16	C	277		CKSQYB104K50
C	155		CEJA100M16	C	278		CKSQYB103K50
C	156		CKSYB475K10	C	279		CKSQYB103K50
C	160		CKSQYB104K50	C	280		CKSQYB103K50
C	161		CKSQYB105K16	C	281		CEJA470M10
C	162		CKSQYB105K16	C	282		CKSQYB104K50
C	163		CEJA100M16	C	283		CEJA100M16
C	164		CEJA100M16	C	285		CKSQYB103K50
C	165		CKSQYB105K16	C	286		CKSQYB105K16
C	166		CKSQYB105K16	C	287		CKSQYB103K50
C	167		CKSQYB104K50	C	288		CKSQYB103K50
C	168		CEJANP100M10	C	289		CKSQYB471K50
C	169		CEJANP100M10	C	290		CEJA1R0M50
C	170		CEJANP220M10	C	291		CKSQYB103K50
C	171		CEJANP220M10	C	292		CKSQYB472K50
C	185		CEJA100M16	C	293		CCSQCH100J50
C	186		CEJA100M16	C	294		CKSQYB103K50
C	187		CEJA1R0M50	C	295		CKSQYB103K50
C	200		CKSQYB104K50	C	300		CEJA470M10
C	201		CKSQYB104K50	C	301		CKSRYB103K50
C	202		CKSQYB104K50	C	302		CEJA100M16
C	203		CEJANP100M10	C	303		CKSQYB221K50
C	204		CEJANP100M10	C	304		CEJA100M16
C	205		CEJANP100M10	C	305		CKSQYB221K50
C	206		CEJANP100M10	C	306		CKSQYB105K16
C	207		CCSQCH101J50	C	307		CKSQYB105K16
C	208		CCSQCH101J50	C	308		CKSQYB105K16
C	209		CEJA4R7M35	C	309		CKSQYB221K50
C	210		CCSQCH101J50	C	310		CKSQYB105K16
C	211		CCSQCH101J50	C	311		CKSQYB105K16
C	212		CEJA4R7M35	C	312		CKSQYB105K16
C	213		CKSQYB471K50	C	316		CEJA100M16
C	214		CEJA101M10	C	317		CKSQYB105K16
C	230		CKSQYB104K50	C	318		CEJA100M16
C	231		CKSRYB153K25	C	319		CEJA100M16
C	232		CEJAR10M50	C	321		CKSQYB103K50
C	233		CEJA100M16	C	322		CKSQYB103K50
C	234		CCSRCH101J50	C	323		CKSQYB105K16
C	235		CEJA101M16	C	325		CKSQYB103K50
C	236		CKSQYB104K50	C	328		CKSQYB103K50
C	237		CEJANPR10M50	C	350		CEJA1R0M50
C	238		CKSRYB473K25	C	351		CKSQYB103K50

=====Circuit Symbol & No.		===Part Name	Part No.
C	352		CEJA470M6R3
C	353		CKSQYB103K50
C	354		CEJA220M10
C	355		CEJA221M6R3
C	356		CKSQYB103K50
C	357		CEJA470M6R3
C	359	470µF/6.3V	CCH1182
C	360	470µF/6.3V	CCH1182
C	361	470µF/6.3V	CCH1182
C	400		CKSQYB103K50
C	401		CKSQYB183K50
C	402		CKSQYB183K50
C	403		CKSQYB102K50
C	405	330µF/10V	CCH1181
C	406		CKSQYB472K50
C	411		CKSQYB473K50
C	413		CEJA101M16
C	414		CKSQYB223K50
C	418		CKSQYB105K16
C	419		CKSQYB105K16
C	424		CCSRCH101J50
C	480		CCSRCH101J50
C	481		CKSRYB102K50
C	482		CEJA100M16
C	501		CEJA220M10
C	503		CKSRYB104K16
C	505		CCSRCH471J50
C	506		CCSRCH471J50
C	507		CKSRYB104K16
C	509		CCSQCH270J50
C	510		CCSQCH270J50
C	513		CCSRCH101J50
C	514		CCSRCH101J50
C	600		CKSRYB103K50
C	601		CKSRYB102K50
C	603		CKSRYB102K50
C	604		CCSRCH102J50
C	606		CKSQYB104K50
C	607		CKSRYB104K16
C	608		CCSRCH270J50
C	609		CCSRCH270J50
C	610		CCSRCH101J50
C	611		CCSRCH101J50
C	650		CEJA2R2M50
C	660		CCSRCH220J50
C	661		CCSRCH220J50
C	662		CCSRCH220J50
C	663		CCSRCH220J50
C	664		CCSRCH220J50
C	665	0.1F/5.5V	CCL1023
C	666		CKSQYB104K50
C	667		CEJA470M16
C	668		CKSQYB105K16
C	669		CCSRCH220J50
C	670		CCSRCH220J50
C	671		CCSRCH220J50
C	672		CCSRCH220J50
C	673		CCSRCH220J50
C	674		CCSRCH220J50
C	682		CEJANP1R0M50
C	685		CEJANP1R0M50
C	686		CKSQYB104K50
C	687		CKSQYB104K50
C	688		CKSQYB103K50
C	689		CKSQYB105K16

=====Circuit Symbol & No.		===Part Name	Part No.
C	730		CKSRYB472K50
C	800		CKSYB225K16
C	801		CKSYB225K16
C	802	330µF/10V	CCH1181
C	803		CKSRYB103K50
C	804	330µF/10V	CCH1181
C	805		CKSRYB103K50
C	806		CKSQYB104K50
C	807		CEJA101M16
C	808		CKSQYB104K50
C	809	330µF/10V	CCH1181
C	810		CKSYB225K16
C	811	1000µF/16V	CCH1003
C	812		CEJA101M10
C	813	330µF/10V	CCH1181
C	814		CKSQYB103K50
C	815		CKSQYB103K50
C	816		CEJA100M16
C	817		CEJA220M10
C	818		CEJA101M16
C	819		CKSQYB103K50
C	820		CEJA470M10
C	821		CEJA101M16
C	822		CKSQYB472K50
C	823		CKSQYB103K50
C	824		CKSQYB103K50
C	825		CEJA101M16
C	826	2200µF/16V	CCH1186
C	827	1000µF/16V	CCH1003
C	829		CEJA101M16
C	830		CKSQYB103K50
C	831		CKSQYB472K50
C	833		CKSQYB472K50
C	834		CCSRCH101J50
C	860		CKSQYB103K50
C	861		CEJA100M16
C	862		CKSQYB103K50
C	902		CEJA100M16
C	903		CEJA100M16
C	904		CKSYB475K16
C	905		CKSYB475K16
C	906	10.0µF/16V	CCG1143
C	907	10.0µF/16V	CCG1143
C	908		CKSYB104K50
C	909		CEJA330M16
C	910		CEAT682M16
C	911		CEJA330M16
C	912		CKSQYB473K50
C	913		CKSYB104K50
C	914	3300µF/16V	CCH1344
C	916		CEJA4R7M35
C	917		CEJA4R7M35
C	919		CKSYB105K16
C	920		CEJA4R7M35
C	921		CEJA4R7M35
C	922		CEJA4R7M35
C	923		CEJA4R7M35
C	925		CKSYB225K16
C	926		CKSYB225K16
C	927		CKSYB225K16
C	928		CKSYB225K16
C	929		CKSYB225K16
C	930		CKSYB225K16
C	931		CKSYB225K16
C	932		CKSYB225K16

=====Circuit Symbol & No.		===Part Name	Part No.
C	933		CEJA4R7M35
C	934		CEJA4R7M35
C	935		CKSQYB224K16
C	936		CCSRCH560J50
C	937		CKSYB225K16
C	938		CKSYB225K16
C	939		CKSQYB224K16
C	940		CKSYB225K16
C	941		CKSYB225K16
C	942		CCSRCH560J50
C	943		CEJA100M16
C	944		CEJA100M16
C	945		CEJA100M16
C	946		CEJA100M16
C	947		CEJA100M16
C	948		CEJA100M16
C	949		CEJA100M16
C	950		CKSQYB102K50
C	951		CKSQYB102K50
C	952		CKSQYB102K50
C	953		CKSQYB102K50
C	954		CKSQYB102K50
C	955		CKSQYB102K50
C	978		CKSRYB103K50
C	979		CKSRYB104K16

A Unit Number : CWM7151 (AVM-P9000R/EW)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	60	IC	NJM4558MD
IC	100	IC	BA3121F
IC	101	IC	BA3129F
IC	150	IC	NJM2246M
IC	160	IC	TA2050S
IC	161	IC	CA0008AM
IC	185	IC	NJM4558MD
IC	200	IC	NJM4558MD
IC	230	IC	NJM4558MD
IC	231	IC	TDA7052BT
IC	232	IC	NJM4558MD
IC	260	IC	CXA2060BS
IC	261	IC	TC74VHC123AFT
IC	263	IC	NJM2235V
IC	264	IC	TC7SH04FU
IC	265	IC	NJM2246M
IC	266	IC	NJM2246M
IC	267	IC	NJM2246M
IC	268	IC	TC7SH04FU
IC	350	IC	NJM2267M
IC	351	IC	BA7623F
IC	480	IC	S-81250SGUP
IC	500	IC	PM4009A
IC	600	IC	PDH026A
IC	601	IC	PE5152A
IC	650	IC	S-80734ANDYI
IC	681	IC	BA3834F
IC	800	IC	BA05ST-V5
IC	801	IC	BA05ST-V5
IC	802	IC	BA05ST-V5
IC	803	IC	BA09SFP
IC	900	IC	PAL005A
IC	901	IC	PAL005A
IC	920	IC	NJU7032M
IC	921	IC	NJM2068MD

=====Circuit Symbol & No.		===Part Name	Part No.
IC	922	IC	NJU7032M
Q	1	Transistor	2SC2412K
Q	2	Transistor	DTA114EK
Q	100	Transistor	DTC124EK
Q	101	Transistor	FMG12
Q	102	Transistor	DTA114EK
Q	150	Transistor	2SA1037K
Q	151	Transistor	FMG12
Q	152	Transistor	DTA114EK
Q	160	Transistor	2SA1037K
Q	161	Transistor	DTC124EK
Q	200	Transistor	2SC2412K
Q	230	Transistor	DTC124EK
Q	261	Transistor	2SA1037K
Q	262	Transistor	2SC2412K
Q	263	Transistor	2SC2412K
Q	264	Transistor	2SC2412K
Q	265	Transistor	2SC2412K
Q	266	Transistor	2SA1037K
Q	267	Transistor	2SA1037K
Q	268	Transistor	2SC2412K
Q	269	Transistor	2SA1037K
Q	270	Transistor	2SA1037K
Q	271	Transistor	2SA1037K
Q	350	Transistor	DTA143EK
Q	351	Transistor	DTC323TU
Q	352	Transistor	FMG12
Q	353	Transistor	DTA114EK
Q	400	Transistor	2SC2412K
Q	402	Transistor	IMH3A
Q	403	Transistor	DTA114EK
Q	404	Transistor	2SC2412K
Q	405	Transistor	2SD1757K
Q	406	Transistor	2SD1757K
Q	407	Transistor	2SC2412K
Q	500	Transistor	DTA124EK
Q	600	Transistor	DTA144EU
Q	601	Transistor	2SC2412K
Q	680	Transistor	2SC2412K
Q	681	Transistor	DTC124TK
Q	730	Transistor	2SC2412K
Q	731	Transistor	DTC144EK
Q	732	Transistor	2SC2412K
Q	733	Transistor	2SC2412K
Q	734	Transistor	DTC124EK
Q	735	Transistor	2SA1037K
Q	736	Transistor	IMD2A
Q	737	Transistor	DTA124EU
Q	738	Transistor	2SC2412K
Q	800	Transistor	DTA124EK
Q	801	Transistor	2SA1797
Q	802	Transistor	DTC114EK
Q	803	Transistor	2SD1857
Q	804	Transistor	2SD2396
Q	805	Transistor	2SB1184F5
Q	806	Transistor	2SC2412K
Q	807	Transistor	2SA1797
Q	808	Transistor	2SA1797
Q	809	Transistor	DTC144EK
Q	810	Transistor	2SC2412K
Q	811	Transistor	2SA1037K
Q	812	Transistor	2SD1760F5
Q	813	Transistor	2SD2396
Q	814	Transistor	2SC2412K
Q	815	Transistor	DTA124EK

=====Circuit Symbol & No.		===Part Name	Part No.
Q	816	Transistor	2SA1037K
Q	817	Transistor	IMD2A
Q	818	Transistor	DTC144EK
Q	819	Transistor	IMX1
Q	820	Transistor	2SA1037K
Q	821	Transistor	DTC124EK
Q	822	Transistor	2SA1037K
Q	860	Transistor	2SD1859
Q	861	Transistor	IMD3A
Q	900	Transistor	DTC114TK
Q	920	Transistor	IMD2A
Q	921	Transistor	DTA124EK
Q	922	Transistor	FMG12
Q	923	Transistor	IMD2A
Q	924	Transistor	FMG12
Q	925	Transistor	FMG12
Q	926	Transistor	FMG12
Q	927	Transistor	IMH3A
Q	928	Transistor	FMG12
Q	929	Transistor	FMG12
Q	932	Transistor	DTC323TK
Q	933	Transistor	DTC323TK
Q	934	Transistor	FMG13
Q	935	Transistor	FMG13
Q	936	Transistor	FMG13
D	1	Diode	UDZ12(B)
D	2	Diode	UDZ12(B)
D	3	Diode	UDZ12(B)
D	4	Diode	UDZ12(B)
D	6	Diode	UDZ12(B)
D	7	Diode	UDZ12(B)
D	9	Diode	UDZ12(B)
D	10	Diode	UDZ12(B)
D	11	Diode	UDZ12(B)
D	12	Diode	UDZ12(B)
D	13	Diode	UDZ12(B)
D	100	Diode	UDZ12(B)
D	101	Diode	UDZ12(B)
D	102	Diode	MA110
D	103	Diode	UDZ12(B)
D	185	Diode	UDZ12(B)
D	200	Diode	UDZ12(B)
D	201	Diode	MA110
D	260	Diode	MA110
D	261	Diode	MA110
D	262	Diode	MA8039(H)
D	263	Diode	MA152WK
D	350	Diode	UDZ12(B)
D	351	Diode	UDZ12(B)
D	352	Diode	UDZ12(B)
D	353	Diode	UDZ12(B)
D	354	Diode	UDZ12(B)
D	355	Diode	UDZ12(B)
D	357	Diode	UDZ12(B)
D	358	Diode	UDZ12(B)
D	359	Diode	UDZ12(B)
D	360	Diode	UDZ12(B)
D	361	Diode	UDZ12(B)
D	480	Diode	HZS16L(1)
D	650	Diode	MA152WK
D	651	Diode	MA110
D	660	Diode	1SS133
D	661	Diode	UDZ12(B)
D	730	Diode	HZS9L(A2)
D	731	Diode	MA111

=====Circuit Symbol & No.		===Part Name	Part No.
D	732	Diode	HZS9L(A2)
D	733	Diode	MA152WK
D	734	Diode	MA152WK
D	800	Diode	ERA15-02VH
D	801	Diode	HZS6L(B1)
D	802	Diode	HZS9L(B3)
D	803	Diode	1SS133
D	804	Diode	MA152WK
D	805	Diode	HZS6L(C3)
D	806	Diode	HZS9L(B3)
D	807	Diode	MA152WK
D	808	Diode	ERA15-02VH
D	809	Diode	MA152WK
D	810	Diode	UDZ7R5(B)
D	811	Diode	HZS7L(A1)
D	814	Diode	ERA15-02VH
D	815	Diode	MA152WK
D	816	Diode	ERA15-02VH
D	817	Diode	ERA15-02VH
D	818	Diode	ERA15-02VH
D	819	Diode	ERA15-02VH
D	820	Diode	ERA15-02VH
D	821	Diode	ERA15-02VH
D	823	Diode	1SR154-400
D	824	Diode	1SR154-400
D	825	Diode	1SR154-400
D	826	Diode	1SR154-400
D	860	Diode	UDZ12(B)
D	921	Diode	MA152WK
L	1	Inductor	CTF1305
L	2	Inductor	CTF1305
L	3	Inductor	CTF1305
L	4	Inductor	CTF1305
L	100	Inductor	LCTB2R2K2125
L	101	Inductor	LCTB2R2K2125
L	150	Inductor	LCTB4R7K2125
L	151	Inductor	LCTA220J3225
L	160	Inductor	LCTB3R3K2125
L	200	Inductor	LCTA1R5J3225
L	260	Chip-Inductor	LCTA2R2J3225
L	261	Chip-Inductor	LCTA2R2J3225
L	263	Inductor	CTF1305
L	264	Inductor	CTF1305
L	265	Inductor	LCTB2R2K2125
L	266	Inductor	CTF1305
L	267	Inductor	LCTB2R2K2125
L	268	Inductor	LCTB2R2K2125
L	269	Inductor	CTF1306
L	270	Inductor	LCTB4R7K2125
L	271	Inductor	LCTB4R7K2125
L	272	Inductor	LCTB4R7K2125
L	274	Inductor	LCTB100K2125
L	275	Inductor	CTF1305
L	276	Inductor	CTF1399
L	350	Inductor	LCTA680J3225
L	351	Inductor	LCTA680J3225
L	353	Inductor	CTF1305
L	355	Inductor	CTF1305
L	356	Inductor	CTF1305
L	357	Inductor	CTF1305
L	358	Inductor	CTF1399
L	359	Inductor	CTF1399
L	400	Inductor	LCTB4R7K2125
L	408	Inductor	CTF1399
L	409	Inductor	CTF1306

=====Circuit Symbol & No.		===Part Name	Part No.
L	410	Inductor	CTF1306
L	411	Inductor	CTF1306
L	412	Inductor	CTF1306
L	413	Chip-Inductor	LCTA2R2J3225
L	416	Inductor	CTF1306
L	418	Ferri-Inductor	LAU2R2K
L	419	Inductor	CTF1399
L	500	Inductor	CTF1409
L	501	Inductor	CTF1409
L	507	Inductor	CTF1420
L	508	Inductor	CTF1409
L	509	Inductor	CTF1306
L	510	Inductor	CTF1306
L	512	Inductor	CTF1409
L	513	Inductor	CTF1409
L	600	Inductor	CTF1306
L	601	Inductor	CTF1420
L	602	Inductor	CTF1470
L	603	Inductor	CTF1306
L	604	Inductor	CTF1306
L	605	Inductor	CTF1399
L	606	Inductor	CTF1399
L	607	Inductor	CTF1306
L	608	Inductor	CTF1410
L	650	Inductor	CTF1399
L	660	Inductor-Array	CTF1421
L	661	Inductor-Array	CTF1421
L	662	Inductor	CTF1306
L	663	Inductor	CTF1306
L	664	Inductor	CTF1306
L	665	Inductor	CTF1306
L	666	Inductor	CTF1409
L	668	Inductor	CTF1306
L	669	Inductor	CTF1306
L	670	Inductor	CTF1306
L	672	Inductor	CTF1306
L	673	Inductor	CTF1409
L	674	Inductor	CTF1409
L	675	Inductor	CTF1409
L	676	Inductor	CTF1409
L	677	Inductor	CTF1306
L	680	Inductor	CTF1399
L	681	Inductor	CTF1399
L	682	Inductor-Array	CTF1421
L	683	Inductor	CTF1306
L	800	Inductor	CTF1420
L	801	Inductor	CTF1420
L	802	Choke Coil 100µH	CTH1157
L	803	Choke Coil 390mH	CTH1209
L	804	Ferri-Inductor	LAU2R2K
L	805	Chip-Inductor	LCTA2R2J3225
L	806	Choke Coil 600mH	CTH1171
L	807	Choke Coil 600mH	CTH1171
L	808	Chip-Inductor	LCTA2R2J3225
L	809	Inductor	CTF1399
L	810	Inductor	CTF1489
L	980	Inductor	CTF1409
X	260	Crystal Resonator 4.433619MHz	CSS1460
X	261	Crystal Resonator 3.579545MHz	CSS1465
X	500	Crystal Resonator 3.648MHz	CSS1447
X	600	Radiator 12.5829MHz	CSS1495
S	650	Switch(RESET)	CSG1046
VR	260	Semi-fixed 100kΩ(B)	CCP1133
FU	1	Micro-Fuse 2A	CEK1190
FU	2	Micro-Fuse 2A	CEK1190

=====Circuit Symbol & No.		===Part Name	Part No.
FU	3	Micro-Fuse 2A	CEK1190
FU	100	Micro-Fuse 2A	CEK1190
FU	150	Micro-Fuse 2A	CEK1190
FU	180	Micro-Fuse 2A	CEK1190
FU	200	Micro-Fuse 2A	CEK1190
FU	350	Micro-Fuse 2A	CEK1190
FU	351	Micro-Fuse 2A	CEK1190
FU	352	Micro-Fuse 2A	CEK1190
FU	800	Micro-Fuse 800mA	CEK1206
FU	801	Micro-Fuse 2A	CEK1190
FU	860	Micro-Fuse 400mA	CEK1184
		GDC Unit	CWM7146
		DSP Unit	CWM7147
		FM/AM Tuner Unit	CWE1500
AR	400	Surge Protector	DSPS-201M-S00B

RESISTORS

R	1	RS1/16S750J
R	2	RS1/16S750J
R	3	RS1/16S750J
R	4	RS1/16S0R0J
R	5	RS1/16S750J
R	7	RS1/16S0R0J
R	9	RS1/16S0R0J
R	10	RS1/16S0R0J
R	11	RS1/16S0R0J
R	15	RS1/16S0R0J
R	16	RS1/10S0R0J
R	17	RS1/10S332J
R	18	RS1/10S333J
R	19	RS1/10S104J
R	20	RS1/10S473J
R	60	RS1/10S101J
R	61	RS1/10S473J
R	62	RS1/10S473J
R	63	RS1/10S563J
R	64	RS1/10S563J
R	65	RS1/10S473J
R	66	RS1/10S473J
R	100	RS1/10S0R0J
R	101	RS1/10S0R0J
R	102	RS1/16S750J
R	103	RS1/10S123J
R	104	RS1/10S123J
R	105	RS1/16S123J
R	106	RS1/16S123J
R	107	RS1/10S102J
R	108	RS1/10S102J
R	109	RS1/10S220J
R	110	RS1/16S0R0J
R	111	RS1/16S0R0J
R	112	RS1/16S102J
R	113	RS1/16S102J
R	114	RS1/16S104J
R	115	RS1/16S104J
R	116	RS1/16S104J
R	117	RS1/16S104J
R	118	RS1/16S123J
R	119	RS1/16S133J
R	120	RS1/16S473J
R	121	RS1/16S153J
R	122	RS1/16S153J
R	123	RS1/16S473J
R	124	RS1/16S362J
R	125	RS1/16S223J
R	126	RS1/16S223J
R	127	RS1/16S362J

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
R	128		RS1/10S220J	R	216		RN1/16SE3001D
R	129		RS1/10S821J	R	217		RN1/16SE3001D
R	130		RS1/10S821J	R	218		RN1/16SE3001D
R	131		RS1/16S104J	R	219		RS1/10S103J
R	132		RS1/16S473J	R	220		RS1/10S103J
R	133		RS1/16S0R0J	R	230		RS1/16S0R0J
R	135		RS1/16S0R0J	R	231		RS1/16S223J
R	136		RS1/16S223J	R	232		RS1/16S223J
R	137		RS1/16S0R0J	R	233		RS1/16S223J
R	140		RS1/16S223J	R	234		RS1/16S222J
R	150		RS1/10S471J	R	235		RS1/16S0R0J
R	151		RS1/10S471J	R	236		RS1/16S104J
R	152		RS1/10S681J	R	237		RS1/16S223J
R	153		RS1/10S0R0J	R	238		RS1/16S561J
R	154		RS1/10S101J	R	239		RS1/16S223J
R	155		RS1/10S0R0J	R	241		RS1/16S473J
R	156		RS1/16S270J	R	242		RS1/16S101J
R	157		RS1/16S330J	R	243		RS1/16S101J
R	160		RS1/10S101J	R	244		RS1/16S473J
R	161		RS1/10S620J	R	245		RS1/16S104J
R	162		RS1/10S101J	R	246		RS1/16S104J
R	163		RS1/10S181J	R	247		RS1/16S222J
R	164		RS1/10S223J	R	248		RS1/16S222J
R	165		RS1/10S102J	R	249		RS1/16S473J
R	166		RS1/16S102J	R	250		RS1/16S473J
R	167		RS1/10S223J	R	259		RS1/16S750J
R	168		RS1/16S181J	R	260		RS1/16S0R0J
R	169		RS1/16S183J	R	261		RS1/10S471J
R	170		RS1/10S222J	R	262		RS1/10S0R0J
R	171		RS1/16S102J	R	264		RS1/10S101J
R	172		RS1/16S102J	R	265		RS1/16S473J
R	173		RS1/10S472J	R	266		RS1/10S0R0J
R	174		RS1/10S223J	R	267		RS1/10S471J
R	175		RS1/16S473J	R	268		RS1/10S471J
R	176		RS1/16S473J	R	269		RS1/16S0R0J
R	177		RS1/10S0R0J	R	270		RS1/16S471J
R	178		RS1/16S0R0J	R	271		RS1/10S103J
R	179		RS1/16S0R0J	R	272		RS1/10S102J
R	185		RS1/16S0R0J	R	273		RN1/10SE1002D
R	186		RS1/16S0R0J	R	274		RS1/10S471J
R	187		RS1/16S0R0J	R	275		RS1/10S471J
R	188		RS1/16S101J	R	276		RS1/10S0R0J
R	189		RS1/16S473J	R	277		RS1/10S0R0J
R	190		RS1/16S473J	R	278		RN1/10SE1002D
R	191		RS1/16S0R0J	R	279		RS1/10S681J
R	192		RS1/16S103J	R	281		RS1/10S102J
R	193		RS1/16S103J	R	282		RS1/10S222J
R	194		RS1/16S473J	R	283		RS1/10S123J
R	195		RS1/16S473J	R	284		RS1/10S222J
R	200		RS1/10S750J	R	285		RN1/10SE1002D
R	201		RS1/10S102J	R	286		RS1/10S101J
R	202		RS1/10S102J	R	287		RS1/10S101J
R	203		RS1/10S473J	R	288		RS1/10S222J
R	204		RS1/4S101J	R	289		RS1/10S101J
R	205		RS1/16S104J	R	290		RS1/10S101J
R	206		RS1/16S104J	R	291		RS1/10S103J
R	207		RS1/16S102J	R	292		RS1/10S103J
R	208		RS1/16S104J	R	293		RS1/10S331J
R	209		RS1/16S104J	R	294		RS1/10S102J
R	210		RS1/16S102J	R	295		RS1/10S331J
R	211		RN1/16SE1002D	R	296		RS1/10S102J
R	212		RN1/16SE1002D	R	297		RS1/10S331J
R	213		RN1/16SE1002D	R	298		RS1/10S102J
R	214		RN1/16SE1002D	R	299		RS1/16S471J
R	215		RN1/16SE3001D	R	300		RS1/16S471J

=====Circuit Symbol & No.===Part Name			Part No.
R	301		RS1/16S471J
R	302		RS1/16S471J
R	303		RS1/16S471J
R	304		RS1/16S471J
R	305		RS1/10S0R0J
R	306		RS1/10S0R0J
R	307		RS1/10S0R0J
R	309		RS1/10S0R0J
R	310		RS1/10S0R0J
R	311		RS1/10S0R0J
R	350		RS1/10S104J
R	351		RS1/10S750J
R	352		RS1/10S750J
R	353		RS1/10S750J
R	354		RS1/10S750J
R	355		RS1/16S0R0J
R	360		RS1/16S0R0J
R	364		RS1/16S0R0J
R	365		RS1/16S0R0J
R	366		RS1/16S0R0J
R	368		RS1/10S0R0J
R	370		RS1/10S0R0J
R	371		RS1/16S0R0J
R	400		RS1/10S0R0J
R	401		RS1/10S473J
R	402		RS1/16S103J
R	403		RS1/10S473J
R	404		RS1/10S681J
R	405		RS1/10S681J
R	406		RS1/10S162J
R	407		RS1/10S162J
R	408		RS1/10S102J
R	410		RS1/16S393J
R	411		RS1/10S272J
R	412		RS1/10S272J
R	413		RS1/10S473J
R	416		RS1/10S681J
R	417		RS1/16S681J
R	418		RS1/10S0R0J
R	419		RS1/16S681J
R	420		RS1/16S681J
R	421		RS1/16S681J
R	422		RS1/10S104J
R	423		RS1/10S104J
R	424		RS1/16S473J
R	425		RS1/16S473J
R	426		RS1/10S473J
R	427		RS1/16S472J
R	429		RS1/16S473J
R	430		RS1/16S0R0J
R	431		RS1/16S0R0J
R	432		RS1/16S681J
R	433		RS1/16S681J
R	434		RS1/10S222J
R	435		RS1/10S222J
R	436		RS1/10S224J
R	437		RS1/10S224J
R	438		RS1/10S223J
R	439		RS1/10S223J
R	440		RS1/10S224J
R	441		RS1/10S153J
R	442		RS1/10S474J
R	443		RS1/16S681J
R	445		RS1/16S0R0J
R	446		RS1/16S0R0J

=====Circuit Symbol & No.===Part Name			Part No.
R	480		RS1/8S151J
R	500		RS1/16S102J
R	501		RS1/16S0R0J
R	502		RS1/16S225J
R	503		RS1/16S102J
R	504		RS1/16S681J
R	505		RS1/16S0R0J
R	507		RS1/16S0R0J
R	508		RS1/16S473J
R	509		RS1/10S0R0J
R	510		RS1/16S0R0J
R	511		RS1/16S102J
R	512		RS1/16S0R0J
R	513		RS1/16S0R0J
R	514		RS1/16S0R0J
R	515		RS1/10S0R0J
R	516		RS1/10S0R0J
R	600		RS1/16S0R0J
R	601		RS1/16S0R0J
R	602		RS1/16S102J
R	603		RS1/16S102J
R	604		RS1/16S102J
R	605		RS1/16S222J
R	606		RS1/16S222J
R	607		RS1/16S473J
R	609		RS1/16S473J
R	610		RS1/16S473J
R	613		RAB4C471J
R	614		RAB4C221J
R	616		RS1/16S473J
R	617		RS1/16S102J
R	618		RS1/16S221J
R	619		RS1/16S473J
R	620		RS1/10S102J
R	621		RS1/16S101J
R	622		RS1/16S103J
R	623		RS1/16S101J
R	624		RS1/16S103J
R	625		RS1/16S473J
R	626		RS1/16S473J
R	627		RS1/16S102J
R	628		RS1/16S473J
R	629		RS1/16S471J
R	630		RS1/16S102J
R	631		RS1/16S473J
R	632		RS1/16S473J
R	633		RS1/16S681J
R	634		RS1/16S0R0J
R	635		RS1/16S0R0J
R	636		RS1/16S0R0J
R	637		RS1/16S0R0J
R	638		RS1/16S473J
R	639		RS1/16S473J
R	640		RS1/16S473J
R	641		RS1/16S473J
R	642		RS1/10S473J
R	643		RS1/10S223J
R	644		RS1/16S223J
R	645		RS1/16S102J
R	646		RS1/16S102J
R	647		RS1/16S473J
R	648		RS1/16S473J
R	649		RS1/16S473J
R	650		RS1/10S0R0J
R	651		RS1/10S471J

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
R	652		RS1/10S822J	R	834		RS1/8S153J
R	660		RS1/16S221J	R	835		RS1/10S473J
R	661		RAB4C221J	R	836		RS1/10S392J
R	662		RS1/10S0R0J	R	837		RS1/10S223J
R	663		RS1/16S102J	R	838		RS1/8S101J
R	664		RS1/16S0R0J	R	839		RS1/16S472J
R	665		RS1/16S0R0J	R	840		RS1/10S102J
R	682		RS1/16S104J	R	841		RS1/10S473J
R	683		RS1/16S103J	R	842		RS1/16S472J
R	684		RS1/16S473J	R	843		RS1/10S472J
R	685		RS1/16S471J	R	845		RS1/10S103J
R	686		RS1/10S104J	R	846		RS1/8S103J
R	687		RS1/10S102J	R	847		RS1/10S103J
R	689		RS1/16S473J	R	848		RS1/10S102J
R	690		RS1/16S102J	R	849		RS1/10S473J
R	691		RS1/16S102J	R	850		RS1/10S473J
R	692		RS1/16S102J	R	851		RS1/10S472J
R	698		RS1/16S0R0J	R	852		RS1/10S103J
R	730		RS1/16S472J	R	853		RS1/10S472J
R	731		RS1/16S103J	R	854		RS1/10S472J
R	732		RS1/4S681J	R	855		RS1/8S153J
R	733		RS1/16S473J	R	860		RD1/4PU221J
R	734		RS1/16S103J	R	870		RS1/16S102J
R	735		RS1/16S103J	R	900		RS1/16S103J
R	736		RS1/10S473J	R	901		RS1/16S103J
R	737		RS1/16S103J	R	902		RS1/10S103J
R	738		RS1/10S103J	R	903		RS1/16S0R0J
R	739		RS1/10S103J	R	904		RS1/10S331J
R	740		RS1/10S333J	R	905		RS1/10S103J
R	741		RS1/16S331J	R	906		RS1/16S0R0J
R	742		RS1/16S224J	R	907		RS1/16S331J
R	743		RS1/16S473J	R	919		RS1/16S102J
R	745		RS1/16S0R0J	R	920		RS1/10S471J
R	800		RS1/16S102J	R	921		RS1/10S471J
R	801		RS1/16S102J	R	922		RS1/10S471J
R	802		RS1/10S473J	R	923		RS1/10S471J
R	803		RS1/10S473J	R	924		RS1/10S471J
R	804		RS1/10S472J	R	925		RS1/10S471J
R	805		RS1/10S473J	R	926		RS1/10S471J
R	806		RS1/10S102J	R	927		RS1/10S471J
R	807		RS1/10S102J	R	928		RS1/16S472J
R	808		RS1/10S472J	R	929		RS1/10S471J
R	810		RS1/10S472J	R	930		RS1/10S471J
R	811		RD1/4PU271J	R	931		RS1/10S101J
R	812		RD1/4PU271J	R	932		RS1/10S101J
R	813		RS1/10S472J	R	934		RS1/16S472J
R	814		RS1/10S271J	R	935		RS1/10S471J
R	815		RS1/10S822J	R	936		RS1/10S471J
R	816		RD1/4PU431J	R	938		RS1/10S473J
R	818		RS1/10S822J	R	939		RS1/10S473J
R	819		RD1/4PU122J	R	942		RS1/10S473J
R	820		RS1/10S331J	R	943		RS1/10S473J
R	821		RS1/10S102J	R	944		RS1/10S473J
R	822		RS1/10S472J	R	945		RS1/10S473J
R	823		RS1/10S273J	R	947		RS1/16S101J
R	824		RS1/10S273J	R	948		RS1/10S821J
R	825		RS1/10S102J	R	949		RS1/10S103J
R	826		RS1/10S472J	R	950		RS1/10S473J
R	827		RS1/10S221J	R	951		RS1/10S103J
R	828		RS1/10S752J	R	952		RS1/10S104J
R	829		RS1/10S472J	R	953		RS1/10S104J
R	830		RS1/10S561J	R	954		RS1/10S103J
R	831		RS1/16S103J	R	955		RS1/16S104J
R	832		RS1/16S473J	R	956		RS1/10S103J
R	833		RS1/10S473J	R	957		RS1/16S103J

=====Circuit Symbol & No.===Part Name			Part No.
R	958		RS1/16S103J
R	959		RS1/16S103J
R	960		RS1/16S103J
R	961		RS1/16S103J
R	962		RS1/16S103J
R	963		RS1/10S821J
R	964		RS1/10S821J
R	965		RS1/10S821J
R	966		RS1/10S821J
R	967		RS1/10S821J
R	968		RS1/10S821J
R	969		RS1/10S223J
R	970		RS1/10S223J
R	971		RS1/10S223J
R	972		RS1/10S223J
R	973		RS1/10S223J
R	974		RS1/10S223J
R	975		RS1/16S822J
R	976		RS1/16S0R0J
R	977		RS1/16S0R0J
R	978		RS1/16S0R0J

CAPACITORS

C	60		CEJA100M16
C	61		CEJA100M16
C	62		CEJA100M16
C	63		CKSQYB104K50
C	64		CKSQYB104K50
C	65		CCSRCH270J50
C	66		CCSRCH270J50
C	100		CKSRYB471K50
C	101		CKSRYB471K50
C	102		CCSRCH101J50
C	103		CCSRCH101J50
C	104		CEJA220M16
C	105		CEJA101M16
C	106		CEJA4R7M35
C	107		CEJA4R7M35
C	108		CEJA4R7M35
C	109		CEJA1R0M50
C	110		CEJA4R7M35
C	111		CKSRYB102K50
C	112		CEJA330M16
C	113		CEJA100M16
C	115		CKSYB225K16
C	117		CKSYB225K16
C	118		CKSRYB102K50
C	119		CKSQYB225K10
C	120		CKSQYB225K10
C	121		CKSRYB102K50
C	122		CCSRCH101J50
C	123		CCSRCH101J50
C	150		CEJA100M16
C	151		CEJA100M16
C	152		CKSQYB103K50
C	153	470µF/6.3V	CCH1182
C	154		CEJA100M16
C	155		CEJA100M16
C	156		CKSYB475K10
C	160		CKSQYB104K50
C	161		CKSQYB105K16
C	162		CKSQYB105K16
C	163		CEJA100M16
C	164		CEJA100M16
C	165		CKSQYB105K16
C	166		CKSQYB105K16
C	167		CKSQYB104K50
C	168		CEJANP100M10

=====Circuit Symbol & No.===Part Name			Part No.
C	169		CEJANP100M10
C	170		CEJANP220M10
C	171		CEJANP220M10
C	185		CEJA100M16
C	186		CEJA100M16
C	187		CEJA1R0M50
C	200		CKSQYB104K50
C	201		CKSQYB104K50
C	202		CKSQYB104K50
C	203		CEJANP100M10
C	204		CEJANP100M10
C	205		CEJANP100M10
C	206		CEJANP100M10
C	207		CCSQCH101J50
C	208		CCSQCH101J50
C	209		CEJA4R7M35
C	210		CCSQCH101J50
C	211		CCSQCH101J50
C	212		CEJA4R7M35
C	213		CKSQYB471K50
C	214		CEJA101M10
C	230		CKSQYB104K50
C	231		CKSRYB153K25
C	232		CEJAR10M50
C	233		CEJA100M16
C	234		CCSRCH101J50
C	235		CEJA101M16
C	236		CKSQYB104K50
C	237		CEJANPR10M50
C	238		CKSRYB473K25
C	239		CKSRYB222K50
C	240		CKSRYB473K25
C	241		CEJANP100M16
C	242		CEJANP100M16
C	243		CEJA100M16
C	244		CKSRYB104K16
C	259		CKSRYB221K50
C	260		CCSQCH180J50
C	261		CEJAR10M50
C	262		CKSQYB103K50
C	263		CCSQCH180J50
C	264		CKSQYB224K25
C	265		CEJA1R0M50
C	266		CKSQYB105K16
C	267		CEJA1R0M50
C	268		CEJA100M16
C	269		CEJA4R7M35
C	270		CKSQYB103K50
C	271		CCSQCH470J50
C	272		CEJA1R0M50
C	273		CKSQYB104K50
C	274		CEJA100M16
C	275		CKSQYB103K50
C	276		CCSQCH100J50
C	277		CKSQYB104K50
C	278		CKSQYB103K50
C	279		CKSQYB103K50
C	280		CKSQYB103K50
C	281		CEJA470M10
C	282		CKSQYB104K50
C	283		CEJA100M16
C	285		CKSQYB103K50
C	286		CKSQYB105K16
C	287		CKSQYB103K50
C	288		CKSQYB103K50

=====Circuit Symbol & No.		===Part Name	Part No.
C	289		CKSQYB471K50
C	290		CEJA1R0M50
C	291		CKSQYB103K50
C	292		CKSQYB472K50
C	293		CCSQCH100J50
C	294		CKSQYB103K50
C	295		CKSQYB103K50
C	300		CEJA470M10
C	301		CKSRYB103K50
C	302		CEJA100M16
C	303		CKSQYB221K50
C	304		CEJA100M16
C	305		CKSQYB221K50
C	306		CKSQYB105K16
C	307		CKSQYB105K16
C	308		CKSQYB105K16
C	309		CKSQYB221K50
C	310		CKSQYB105K16
C	311		CKSQYB105K16
C	312		CKSQYB105K16
C	316		CEJA100M16
C	317		CKSQYB105K16
C	318		CEJA100M16
C	319		CEJA100M16
C	321		CKSQYB103K50
C	322		CKSQYB103K50
C	323		CKSQYB105K16
C	325		CKSQYB103K50
C	328		CKSQYB103K50
C	350		CEJA1R0M50
C	351		CKSQYB103K50
C	352		CEJA470M6R3
C	353		CKSQYB103K50
C	354		CEJA220M10
C	355		CEJA221M6R3
C	356		CKSQYB103K50
C	357		CEJA470M6R3
C	359	470µF/6.3V	CCH1182
C	360	470µF/6.3V	CCH1182
C	361	470µF/6.3V	CCH1182
C	400		CKSQYB103K50
C	401		CKSQYB123K50
C	402		CKSQYB123K50
C	403		CKSQYB102K50
C	405	330µF/10V	CCH1181
C	406		CKSQYB472K50
C	407		CKSQYB182K50
C	408		CEJA1R0M50
C	409		CEJA1R0M50
C	411		CKSQYB473K50
C	413		CEJA101M16
C	414		CKSQYB223K50
C	416		CKSQYB223K50
C	417		CKSQYB472K50
C	418		CKSQYB105K16
C	419		CKSQYB105K16
C	424		CCSRCH101J50
C	480		CCSRCH101J50
C	481		CKSRYB102K50
C	482		CEJA100M16
C	501		CEJA220M10
C	503		CKSRYB104K16
C	505		CCSRCH471J50
C	506		CCSRCH471J50
C	507		CKSRYB104K16

=====Circuit Symbol & No.		===Part Name	Part No.
C	509		CCSQCH270J50
C	510		CCSQCH270J50
C	513		CCSRCH101J50
C	514		CCSRCH101J50
C	600		CKSQYB103K50
C	601		CKSRYB102K50
C	602		CCSRCH101J50
C	603		CKSRYB102K50
C	604		CCSRCH102J50
C	605		CCSRCH101J50
C	606		CKSQYB104K50
C	607		CKSRYB104K16
C	608		CCSRCH270J50
C	609		CCSRCH270J50
C	610		CCSRCH101J50
C	611		CCSRCH101J50
C	650		CEJA2R2M50
C	660		CCSRCH220J50
C	661		CCSRCH220J50
C	662		CCSRCH220J50
C	663		CCSRCH220J50
C	664		CCSRCH220J50
C	665	0.1F/5.5V	CCL1023
C	666		CKSQYB104K50
C	667		CEJA470M16
C	668		CKSQYB105K16
C	669		CCSRCH220J50
C	670		CCSRCH220J50
C	671		CCSRCH220J50
C	672		CCSRCH220J50
C	673		CCSRCH220J50
C	674		CCSRCH220J50
C	682		CEJANP1R0M50
C	685		CEJANP1R0M50
C	686		CKSQYB104K50
C	687		CKSQYB104K50
C	688		CKSQYB103K50
C	689		CKSQYB105K16
C	730		CKSRYB472K50
C	800		CKSYB225K16
C	801		CKSYB225K16
C	802	330µF/10V	CCH1181
C	803		CKSRYB103K50
C	804	330µF/10V	CCH1181
C	805		CKSRYB103K50
C	806		CKSQYB104K50
C	807		CEJA101M16
C	808		CKSQYB104K50
C	809	330µF/10V	CCH1181
C	810		CKSYB225K16
C	811	1000µF/16V	CCH1003
C	812		CEJA101M10
C	813	330µF/10V	CCH1181
C	814		CKSQYB103K50
C	815		CKSQYB103K50
C	816		CEJA100M16
C	817		CEJA220M10
C	818		CEJA101M16
C	819		CKSQYB103K50
C	820		CEJA470M10
C	821		CEJA101M16
C	822		CKSQYB472K50
C	823		CKSQYB103K50
C	824		CKSQYB103K50
C	825		CEJA101M16

=====Circuit Symbol & No.		===Part Name	Part No.
C	826	2200µF/16V	CCH1186
C	827	1000µF/16V	CCH1003
C	829		CEJA101M16
C	830		CKSQYB103K50
C	831		CKSQYB472K50
C	833		CKSQYB472K50
C	834		CCSRCH101J50
C	860		CKSQYB103K50
C	861		CEJA100M16
C	862		CKSQYB103K50
C	902		CEJA100M16
C	903		CEJA100M16
C	904		CKSYB475K16
C	905		CKSYB475K16
C	906	10.0µF/16V	CCG1143
C	907	10.0µF/16V	CCG1143
C	908		CKSYB104K50
C	909		CEJA330M16
C	910		CEAT682M16
C	911		CEJA330M16
C	912		CKSQYB473K50
C	913		CKSYB104K50
C	914	3300µF/16V	CCH1344
C	916		CEJA4R7M35
C	917		CEJA4R7M35
C	919		CKSYB105K16
C	920		CEJA4R7M35
C	921		CEJA4R7M35
C	922		CEJA4R7M35
C	923		CEJA4R7M35
C	925		CKSYB225K16
C	926		CKSYB225K16
C	927		CKSYB225K16
C	928		CKSYB225K16
C	929		CKSYB225K16
C	930		CKSYB225K16
C	931		CKSYB225K16
C	932		CKSYB225K16
C	933		CEJA4R7M35
C	934		CEJA4R7M35
C	935		CKSQYB224K16
C	936		CCSRCH560J50
C	937		CKSYB225K16
C	938		CKSYB225K16
C	939		CKSQYB224K16
C	940		CKSYB225K16
C	941		CKSYB225K16
C	942		CCSRCH560J50
C	943		CEJA100M16
C	944		CEJA100M16
C	945		CEJA100M16
C	946		CEJA100M16
C	947		CEJA100M16
C	948		CEJA100M16
C	949		CEJA100M16
C	950		CKSQYB102K50
C	951		CKSQYB102K50
C	952		CKSQYB102K50
C	953		CKSQYB102K50
C	954		CKSQYB102K50
C	955		CKSQYB102K50
C	978		CKSRYB103K50
C	979		CKSRYB104K16

A Unit Number : CWM7152 (AVM-P9000/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

=====Circuit Symbol & No.		===Part Name	Part No.
IC	100	IC	BA3121F
IC	101	IC	BA3129F
IC	150	IC	NJM2246M
IC	160	IC	TA2050S
IC	161	IC	CA0008AM
IC	185	IC	NJM4558MD
IC	200	IC	NJM4558MD
IC	230	IC	NJM4558MD
IC	231	IC	TDA7052BT
IC	232	IC	NJM4558MD
IC	260	IC	CXA2060BS
IC	261	IC	TC74VHC123AFT
IC	263	IC	NJM2235V
IC	264	IC	TC7SH04FU
IC	265	IC	NJM2246M
IC	266	IC	NJM2246M
IC	267	IC	NJM2246M
IC	268	IC	TC7SH04FU
IC	350	IC	NJM2267M
IC	351	IC	BA7623F
IC	480	IC	S-81250SGUP
IC	600	IC	PDH028A
IC	601	IC	PE5153A
IC	650	IC	S-80734ANDYI
IC	681	IC	BA3834F
IC	800	IC	BA05ST-V5
IC	801	IC	BA05ST-V5
IC	802	IC	BA05ST-V5
IC	803	IC	BA09SFP
IC	900	IC	PAL005A
IC	901	IC	PAL005A
IC	920	IC	NJU7032M
IC	921	IC	NJM2068MD
IC	922	IC	NJU7032M
Q	100	Transistor	DTC124EK
Q	101	Transistor	FMG12
Q	102	Transistor	DTA114EK
Q	150	Transistor	2SA1037K
Q	151	Transistor	FMG12
Q	152	Transistor	DTA114EK
Q	160	Transistor	2SA1037K
Q	161	Transistor	DTC124EK
Q	200	Transistor	2SC2412K
Q	230	Transistor	DTC124EK
Q	261	Transistor	2SA1037K
Q	262	Transistor	2SC2412K
Q	263	Transistor	2SC2412K
Q	264	Transistor	2SC2412K
Q	265	Transistor	2SC2412K
Q	266	Transistor	2SA1037K
Q	267	Transistor	2SA1037K
Q	268	Transistor	2SC2412K
Q	269	Transistor	2SA1037K
Q	270	Transistor	2SA1037K
Q	271	Transistor	2SA1037K
Q	350	Transistor	DTA143EK
Q	351	Transistor	DTC323TU
Q	352	Transistor	FMG12
Q	353	Transistor	DTA114EK
Q	400	Transistor	2SC2412K

=====Circuit Symbol & No.===Part Name			Part No.
Q	600	Transistor	DTA144EU
Q	601	Transistor	2SC2412K
Q	680	Transistor	2SC2412K
Q	681	Transistor	DTC124TK
Q	730	Transistor	2SC2412K
Q	731	Transistor	DTC144EK
Q	732	Transistor	2SC2412K
Q	733	Transistor	2SC2412K
Q	734	Transistor	DTC124EK
Q	735	Transistor	2SA1037K
Q	736	Transistor	IMD2A
Q	737	Transistor	DTA124EU
Q	738	Transistor	2SC2412K
Q	800	Transistor	DTA124EK
Q	801	Transistor	2SA1797
Q	802	Transistor	DTC114EK
Q	803	Transistor	2SD1857
Q	804	Transistor	2SD2396
Q	805	Transistor	2SB1184F5
Q	806	Transistor	2SC2412K
Q	807	Transistor	2SA1797
Q	808	Transistor	2SA1797
Q	809	Transistor	DTC144EK
Q	810	Transistor	2SC2412K
Q	811	Transistor	2SA1037K
Q	812	Transistor	2SD1760F5
Q	813	Transistor	2SD2396
Q	814	Transistor	2SC2412K
Q	815	Transistor	DTA124EK
Q	816	Transistor	2SA1037K
Q	817	Transistor	IMD2A
Q	818	Transistor	DTC144EK
Q	819	Transistor	IMX1
Q	820	Transistor	2SA1037K
Q	821	Transistor	DTC124EK
Q	860	Transistor	2SD1859
Q	861	Transistor	IMD3A
Q	900	Transistor	DTC114TK
Q	920	Transistor	IMD2A
Q	921	Transistor	DTA124EK
Q	922	Transistor	FMG12
Q	923	Transistor	IMD2A
Q	924	Transistor	FMG12
Q	925	Transistor	FMG12
Q	926	Transistor	FMG12
Q	927	Transistor	IMH3A
Q	928	Transistor	FMG12
Q	929	Transistor	FMG12
Q	932	Transistor	DTC323TK
Q	933	Transistor	DTC323TK
Q	934	Transistor	FMG13
Q	935	Transistor	FMG13
Q	936	Transistor	FMG13
D	100	Diode	UDZ12(B)
D	101	Diode	UDZ12(B)
D	102	Diode	MA110
D	103	Diode	UDZ12(B)
D	185	Diode	UDZ12(B)
D	200	Diode	UDZ12(B)
D	201	Diode	MA110
D	260	Diode	MA110
D	261	Diode	MA110
D	262	Diode	MA8039(H)
D	263	Diode	MA152WK
D	350	Diode	UDZ12(B)

=====Circuit Symbol & No.===Part Name			Part No.
D	351	Diode	UDZ12(B)
D	352	Diode	UDZ12(B)
D	353	Diode	UDZ12(B)
D	354	Diode	UDZ12(B)
D	355	Diode	UDZ12(B)
D	357	Diode	UDZ12(B)
D	358	Diode	UDZ12(B)
D	359	Diode	UDZ12(B)
D	360	Diode	UDZ12(B)
D	361	Diode	UDZ12(B)
D	480	Diode	HZS16L(1)
D	650	Diode	MA152WK
D	651	Diode	MA110
D	660	Diode	1SS133
D	661	Diode	UDZ12(B)
D	730	Diode	HZS9L(A2)
D	731	Diode	MA111
D	732	Diode	HZS9L(A2)
D	733	Diode	MA152WK
D	734	Diode	MA152WK
D	800	Diode	ERA15-02VH
D	801	Diode	HZS6L(B1)
D	802	Diode	HZS9L(B3)
D	803	Diode	1SS133
D	804	Diode	MA152WK
D	805	Diode	HZS6L(C3)
D	806	Diode	HZS9L(B3)
D	807	Diode	MA152WK
D	808	Diode	ERA15-02VH
D	809	Diode	MA152WK
D	810	Diode	UDZ7R5(B)
D	811	Diode	HZS7L(A1)
D	814	Diode	ERA15-02VH
D	816	Diode	ERA15-02VH
D	817	Diode	ERA15-02VH
D	818	Diode	ERA15-02VH
D	819	Diode	ERA15-02VH
D	820	Diode	ERA15-02VH
D	821	Diode	ERA15-02VH
D	823	Diode	1SR154-400
D	824	Diode	1SR154-400
D	825	Diode	1SR154-400
D	826	Diode	1SR154-400
D	860	Diode	UDZ12(B)
D	921	Diode	MA152WK
L	100	Inductor	LCTB2R2K2125
L	101	Inductor	LCTB2R2K2125
L	150	Inductor	LCTB4R7K2125
L	151	Inductor	LCTA220J3225
L	160	Inductor	LCTB3R3K2125
L	200	Inductor	LCTA1R5J3225
L	260	Chip-Inductor	LCTA2R2J3225
L	261	Chip-Inductor	LCTA2R2J3225
L	263	Inductor	CTF1305
L	264	Inductor	CTF1305
L	265	Inductor	LCTB2R2K2125
L	266	Inductor	CTF1305
L	267	Inductor	LCTB2R2K2125
L	268	Inductor	LCTB2R2K2125
L	269	Inductor	CTF1306
L	270	Inductor	LCTB4R7K2125
L	271	Inductor	LCTB4R7K2125
L	272	Inductor	LCTB4R7K2125
L	274	Inductor	LCTB100K2125
L	275	Inductor	CTF1305

Circuit Symbol & No.		Part Name	Part No.
L	276	Inductor	CTF1399
L	350	Inductor	LCTA680J3225
L	351	Inductor	LCTA680J3225
L	353	Inductor	CTF1305
L	355	Inductor	CTF1305
L	356	Inductor	CTF1305
L	357	Inductor	CTF1305
L	358	Inductor	CTF1399
L	359	Inductor	CTF1399
L	400	Inductor	LCTB4R7K2125
L	408	Inductor	CTF1399
L	409	Inductor	CTF1306
L	410	Inductor	CTF1306
L	411	Inductor	CTF1306
L	412	Inductor	CTF1306
L	413	Chip-Inductor	LCTA2R2J3225
L	418	Ferri-Inductor	LAU2R2K
L	419	Inductor	CTF1399
L	600	Inductor	CTF1306
L	601	Inductor	CTF1420
L	602	Inductor	CTF1470
L	603	Inductor	CTF1306
L	604	Inductor	CTF1306
L	605	Inductor	CTF1399
L	606	Inductor	CTF1399
L	607	Inductor	CTF1306
L	608	Inductor	CTF1410
L	650	Inductor	CTF1399
L	660	Inductor-Array	CTF1421
L	661	Inductor-Array	CTF1421
L	662	Inductor	CTF1306
L	663	Inductor	CTF1306
L	664	Inductor	CTF1306
L	665	Inductor	CTF1306
L	666	Inductor	CTF1409
L	668	Inductor	CTF1306
L	669	Inductor	CTF1306
L	670	Inductor	CTF1306
L	672	Inductor	CTF1306
L	673	Inductor	CTF1409
L	674	Inductor	CTF1409
L	675	Inductor	CTF1409
L	676	Inductor	CTF1409
L	677	Inductor	CTF1306
L	680	Inductor	CTF1399
L	681	Inductor	CTF1399
L	682	Inductor-Array	CTF1421
L	683	Inductor	CTF1306
L	800	Inductor	CTF1420
L	801	Inductor	CTF1420
L	802	Choke Coil 100µH	CTH1157
L	803	Choke Coil 390mH	CTH1209
L	804	Ferri-Inductor	LAU2R2K
L	805	Chip-Inductor	LCTA2R2J3225
L	806	Choke Coil 600mH	CTH1171
L	807	Choke Coil 600mH	CTH1171
L	809	Inductor	CTF1399
L	810	Inductor	CTF1489
L	980	Inductor	CTF1409
X	260	Crystal Resonator 4.433619MHz	CSS1460
X	261	Crystal Resonator 3.579545MHz	CSS1465
X	600	Radiator 12.5829MHz	CSS1495
S	650	Switch(RESET)	CSG1046
VR	260	Semi-fixed 100kΩ(B)	CCP1133
FU	100	Micro-Fuse 2A	CEK1190
FU	150	Micro-Fuse 2A	CEK1190
FU	180	Micro-Fuse 2A	CEK1190
FU	200	Micro-Fuse 2A	CEK1190
FU	350	Micro-Fuse 2A	CEK1190
FU	351	Micro-Fuse 2A	CEK1190
FU	352	Micro-Fuse 2A	CEK1190
FU	800	Micro-Fuse 800mA	CEK1206
FU	801	Micro-Fuse 2A	CEK1190
FU	860	Micro-Fuse 400mA	CEK1184
		GDC Unit	CWM7146
		DSP Unit	CWM7147
		FM/AM Tuner Unit	CWE1501
AR	400	Surge Protector	DSPS-201M-S00B

RESISTORS

R	100		RS1/10S0R0J
R	101		RS1/10S0R0J
R	102		RS1/16S750J
R	103		RS1/10S123J
R	104		RS1/10S123J
R	105		RS1/16S123J
R	106		RS1/16S123J
R	107		RS1/10S102J
R	108		RS1/10S102J
R	109		RS1/10S220J
R	110		RS1/16S0R0J
R	111		RS1/16S0R0J
R	112		RS1/16S102J
R	113		RS1/16S102J
R	114		RS1/16S104J
R	115		RS1/16S104J
R	116		RS1/16S104J
R	117		RS1/16S104J
R	118		RS1/16S123J
R	119		RS1/16S133J
R	120		RS1/16S473J
R	121		RS1/16S153J
R	122		RS1/16S153J
R	123		RS1/16S473J
R	124		RS1/16S362J
R	125		RS1/16S223J
R	126		RS1/16S223J
R	127		RS1/16S362J
R	128		RS1/10S220J
R	129		RS1/10S821J
R	130		RS1/10S821J
R	131		RS1/16S104J
R	132		RS1/16S473J
R	133		RS1/16S0R0J
R	135		RS1/16S0R0J
R	136		RS1/16S223J
R	137		RS1/16S0R0J
R	140		RS1/16S223J
R	150		RS1/10S471J
R	151		RS1/10S471J
R	152		RS1/10S681J
R	153		RS1/10S0R0J
R	154		RS1/10S101J
R	155		RS1/10S0R0J
R	156		RS1/16S270J
R	157		RS1/16S330J
R	160		RS1/10S101J
R	161		RS1/10S620J
R	162		RS1/10S101J
R	163		RS1/10S181J

=====Circuit Symbol & No.===Part Name			Part No.
R	164		RS1/10S223J
R	165		RS1/10S102J
R	166		RS1/16S102J
R	167		RS1/10S223J
R	168		RS1/16S181J
R	169		RS1/16S183J
R	170		RS1/10S222J
R	171		RS1/16S102J
R	172		RS1/16S102J
R	173		RS1/10S472J
R	174		RS1/10S223J
R	175		RS1/16S473J
R	176		RS1/16S473J
R	177		RS1/10S0R0J
R	178		RS1/16S0R0J
R	179		RS1/16S0R0J
R	185		RS1/16S0R0J
R	186		RS1/16S0R0J
R	187		RS1/16S0R0J
R	188		RS1/16S101J
R	189		RS1/16S473J
R	190		RS1/16S473J
R	191		RS1/16S0R0J
R	192		RS1/16S103J
R	193		RS1/16S103J
R	194		RS1/16S473J
R	195		RS1/16S473J
R	200		RS1/10S750J
R	201		RS1/10S102J
R	202		RS1/10S102J
R	203		RS1/10S473J
R	204		RS1/4S101J
R	205		RS1/16S104J
R	206		RS1/16S104J
R	207		RS1/16S102J
R	208		RS1/16S104J
R	209		RS1/16S104J
R	210		RS1/16S102J
R	211		RN1/16SE1002D
R	212		RN1/16SE1002D
R	213		RN1/16SE1002D
R	214		RN1/16SE1002D
R	215		RN1/16SE3001D
R	216		RN1/16SE3001D
R	217		RN1/16SE3001D
R	218		RN1/16SE3001D
R	219		RS1/10S103J
R	220		RS1/10S103J
R	231		RS1/16S223J
R	233		RS1/16S223J
R	234		RS1/16S222J
R	235		RS1/16S0R0J
R	236		RS1/16S104J
R	237		RS1/16S223J
R	238		RS1/16S561J
R	239		RS1/16S223J
R	241		RS1/16S473J
R	242		RS1/16S101J
R	243		RS1/16S101J
R	244		RS1/16S473J
R	245		RS1/16S104J
R	246		RS1/16S104J
R	247		RS1/16S222J
R	248		RS1/16S222J
R	249		RS1/16S473J

=====Circuit Symbol & No.===Part Name			Part No.
R	250		RS1/16S473J
R	259		RS1/16S750J
R	260		RS1/16S0R0J
R	261		RS1/10S471J
R	262		RS1/10S0R0J
R	264		RS1/10S101J
R	265		RS1/16S473J
R	266		RS1/10S0R0J
R	267		RS1/10S471J
R	268		RS1/10S471J
R	269		RS1/16S0R0J
R	270		RS1/16S471J
R	271		RS1/10S103J
R	272		RS1/10S102J
R	273		RN1/10SE1002D
R	274		RS1/10S471J
R	275		RS1/10S471J
R	276		RS1/10S0R0J
R	277		RS1/10S0R0J
R	278		RN1/10SE1002D
R	279		RS1/10S681J
R	281		RS1/10S102J
R	282		RS1/10S222J
R	283		RS1/10S123J
R	284		RS1/10S222J
R	285		RN1/10SE1002D
R	286		RS1/10S101J
R	287		RS1/10S101J
R	288		RS1/10S222J
R	289		RS1/10S101J
R	290		RS1/10S101J
R	291		RS1/10S103J
R	292		RS1/10S103J
R	293		RS1/10S331J
R	294		RS1/10S102J
R	295		RS1/10S331J
R	296		RS1/10S102J
R	297		RS1/10S331J
R	298		RS1/10S102J
R	299		RS1/16S471J
R	300		RS1/16S471J
R	301		RS1/16S471J
R	302		RS1/16S471J
R	303		RS1/16S471J
R	304		RS1/16S471J
R	305		RS1/10S0R0J
R	306		RS1/10S0R0J
R	307		RS1/10S0R0J
R	309		RS1/10S0R0J
R	310		RS1/10S0R0J
R	311		RS1/10S0R0J
R	350		RS1/10S104J
R	351		RS1/10S750J
R	352		RS1/10S750J
R	353		RS1/10S750J
R	354		RS1/10S750J
R	355		RS1/16S0R0J
R	360		RS1/16S0R0J
R	364		RS1/16S0R0J
R	365		RS1/16S0R0J
R	366		RS1/16S0R0J
R	368		RS1/10S0R0J
R	370		RS1/10S0R0J
R	371		RS1/16S0R0J
R	400		RS1/10S0R0J

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
R	401		RS1/10S473J	R	642		RS1/10S473J
R	402		RS1/16S103J	R	643		RS1/10S223J
R	403		RS1/10S473J	R	644		RS1/16S223J
R	404		RS1/10S681J	R	645		RS1/16S102J
R	405		RS1/10S681J	R	646		RS1/16S102J
R	406		RS1/10S272J	R	647		RS1/16S473J
R	407		RS1/10S272J	R	648		RS1/16S473J
R	408		RS1/10S102J	R	649		RS1/16S473J
R	410		RS1/16S393J	R	650		RS1/10S0R0J
R	411		RS1/10S162J	R	651		RS1/10S471J
R	412		RS1/10S162J	R	652		RS1/10S822J
R	414		RS1/16S0R0J	R	660		RS1/16S221J
R	415		RS1/16S0R0J	R	661		RAB4C221J
R	417		RS1/16S681J	R	662		RS1/10S0R0J
R	418		RS1/10S0R0J	R	663		RS1/16S102J
R	419		RS1/16S681J	R	664		RS1/16S0R0J
R	420		RS1/16S681J	R	665		RS1/16S0R0J
R	421		RS1/16S681J	R	682		RS1/16S104J
R	424		RS1/16S473J	R	683		RS1/16S103J
R	425		RS1/16S473J	R	684		RS1/16S473J
R	426		RS1/10S473J	R	685		RS1/16S471J
R	427		RS1/16S472J	R	686		RS1/10S104J
R	429		RS1/16S473J	R	687		RS1/10S102J
R	430		RS1/16S0R0J	R	689		RS1/16S473J
R	431		RS1/16S0R0J	R	690		RS1/16S102J
R	445		RS1/16S0R0J	R	691		RS1/16S102J
R	446		RS1/16S0R0J	R	692		RS1/16S102J
R	480		RS1/8S151J	R	698		RS1/16S0R0J
R	491		RS1/16S0R0J	R	730		RS1/16S472J
R	492		RS1/10S0R0J	R	731		RS1/16S103J
R	601		RS1/16S0R0J	R	732		RS1/4S681J
R	602		RS1/16S102J	R	733		RS1/16S473J
R	603		RS1/16S102J	R	734		RS1/16S103J
R	604		RS1/16S102J	R	735		RS1/16S103J
R	605		RS1/16S222J	R	736		RS1/10S473J
R	606		RS1/16S222J	R	737		RS1/16S103J
R	607		RS1/16S473J	R	738		RS1/10S103J
R	609		RS1/16S473J	R	739		RS1/10S103J
R	610		RS1/16S473J	R	740		RS1/10S333J
R	613		RAB4C471J	R	741		RS1/16S331J
R	614		RAB4C221J	R	742		RS1/16S224J
R	616		RS1/16S473J	R	743		RS1/16S473J
R	617		RS1/16S102J	R	745		RS1/16S0R0J
R	618		RS1/16S221J	R	800		RS1/16S102J
R	619		RS1/16S473J	R	801		RS1/16S102J
R	620		RS1/10S102J	R	802		RS1/10S473J
R	621		RS1/16S101J	R	803		RS1/10S473J
R	622		RS1/16S103J	R	804		RS1/10S472J
R	623		RS1/16S101J	R	805		RS1/10S473J
R	624		RS1/16S103J	R	806		RS1/10S102J
R	626		RS1/16S473J	R	807		RS1/10S102J
R	628		RS1/16S473J	R	808		RS1/10S472J
R	629		RS1/16S471J	R	810		RS1/10S472J
R	630		RS1/16S102J	R	811		RD1/4PU271J
R	631		RS1/16S473J	R	812		RD1/4PU271J
R	632		RS1/16S473J	R	813		RS1/10S472J
R	633		RS1/16S681J	R	814		RS1/10S271J
R	634		RS1/16S0R0J	R	815		RS1/10S822J
R	635		RS1/16S0R0J	R	816		RD1/4PU431J
R	636		RS1/16S0R0J	R	818		RS1/10S822J
R	637		RS1/16S0R0J	R	819		RD1/4PU122J
R	638		RS1/16S473J	R	820		RS1/10S331J
R	639		RS1/16S473J	R	821		RS1/10S102J
R	640		RS1/16S473J	R	822		RS1/10S472J
R	641		RS1/16S473J	R	823		RS1/10S273J

Circuit Symbol & No.	Part Name	Part No.
R 824		RS1/10S273J
R 825		RS1/10S102J
R 826		RS1/10S472J
R 827		RS1/10S221J
R 828		RS1/10S752J
R 829		RS1/10S472J
R 830		RS1/10S561J
R 831		RS1/16S103J
R 832		RS1/16S473J
R 833		RS1/10S473J
R 834		RS1/8S153J
R 835		RS1/10S473J
R 836		RS1/10S392J
R 837		RS1/10S223J
R 838		RS1/8S101J
R 839		RS1/16S472J
R 840		RS1/10S102J
R 841		RS1/10S473J
R 842		RS1/16S472J
R 843		RS1/10S472J
R 845		RS1/10S103J
R 846		RS1/8S103J
R 847		RS1/10S103J
R 849		RS1/10S473J
R 850		RS1/10S473J
R 852		RS1/10S103J
R 853		RS1/10S472J
R 860		RD1/4PU221J
R 870		RS1/16S102J
R 900		RS1/16S103J
R 901		RS1/16S103J
R 902		RS1/10S103J
R 903		RS1/16S0R0J
R 904		RS1/10S331J
R 905		RS1/10S103J
R 906		RS1/16S0R0J
R 907		RS1/16S331J
R 919		RS1/16S102J
R 920		RS1/10S471J
R 921		RS1/10S471J
R 922		RS1/10S471J
R 923		RS1/10S471J
R 924		RS1/10S471J
R 925		RS1/10S471J
R 926		RS1/10S471J
R 927		RS1/10S471J
R 928		RS1/16S472J
R 929		RS1/10S471J
R 930		RS1/10S471J
R 931		RS1/10S101J
R 932		RS1/10S101J
R 934		RS1/16S472J
R 935		RS1/10S471J
R 936		RS1/10S471J
R 938		RS1/10S473J
R 939		RS1/10S473J
R 942		RS1/10S473J
R 943		RS1/10S473J
R 944		RS1/10S473J
R 945		RS1/10S473J
R 947		RS1/16S101J
R 948		RS1/10S821J
R 949		RS1/10S103J
R 950		RS1/10S473J
R 951		RS1/10S103J

Circuit Symbol & No.	Part Name	Part No.
R 952		RS1/10S104J
R 953		RS1/10S104J
R 954		RS1/10S103J
R 955		RS1/16S104J
R 956		RS1/10S103J
R 957		RS1/16S103J
R 958		RS1/16S103J
R 959		RS1/16S103J
R 960		RS1/16S103J
R 961		RS1/16S103J
R 962		RS1/16S103J
R 963		RS1/10S821J
R 964		RS1/10S821J
R 965		RS1/10S821J
R 966		RS1/10S821J
R 967		RS1/10S821J
R 968		RS1/10S821J
R 969		RS1/10S223J
R 970		RS1/10S223J
R 971		RS1/10S223J
R 972		RS1/10S223J
R 973		RS1/10S223J
R 974		RS1/10S223J
R 975		RS1/16S822J
R 976		RS1/16S0R0J
R 977		RS1/16S0R0J
R 978		RS1/16S0R0J
CAPACITORS		
C 100		CKSRYB471K50
C 101		CKSRYB471K50
C 102		CCSRCH101J50
C 103		CCSRCH101J50
C 104		CEJA220M16
C 105		CEJA101M16
C 106		CEJA4R7M35
C 107		CEJA4R7M35
C 108		CEJA4R7M35
C 109		CEJA1R0M50
C 110		CEJA4R7M35
C 111		CKSRYB102K50
C 112		CEJA330M16
C 113		CEJA100M16
C 115		CKSYB225K16
C 117		CKSYB225K16
C 118		CKSRYB102K50
C 119		CKSQYB225K10
C 120		CKSQYB225K10
C 121		CKSRYB102K50
C 122		CCSRCH101J50
C 123		CCSRCH101J50
C 150		CEJA100M16
C 151		CEJA100M16
C 152		CKSQYB103K50
C 153	470µF/6.3V	CCH1182
C 154		CEJA100M16
C 155		CEJA100M16
C 156		CKSYB475K10
C 160		CKSQYB104K50
C 161		CKSQYB105K16
C 162		CKSQYB105K16
C 163		CEJA100M16
C 164		CEJA100M16
C 165		CKSQYB105K16

=====Circuit Symbol & No.===Part Name			Part No.	=====Circuit Symbol & No.===Part Name			Part No.
C	166		CKSQYB105K16	C	286		CKSQYB105K16
C	167		CKSQYB104K50	C	287		CKSQYB103K50
C	168		CEJANP100M10	C	288		CKSQYB103K50
C	169		CEJANP100M10	C	289		CKSQYB471K50
C	170		CEJANP220M10	C	290		CEJA1R0M50
C	171		CEJANP220M10	C	291		CKSQYB103K50
C	185		CEJA100M16	C	292		CKSQYB472K50
C	186		CEJA100M16	C	293		CCSQCH100J50
C	187		CEJA1R0M50	C	294		CKSQYB103K50
C	200		CKSQYB104K50	C	295		CKSQYB103K50
C	201		CKSQYB104K50	C	300		CEJA470M10
C	202		CKSQYB104K50	C	301		CKSRYB103K50
C	203		CEJANP100M10	C	302		CEJA100M16
C	204		CEJANP100M10	C	303		CKSQYB221K50
C	205		CEJANP100M10	C	304		CEJA100M16
C	206		CEJANP100M10	C	305		CKSQYB221K50
C	207		CCSQCH101J50	C	306		CKSQYB105K16
C	208		CCSQCH101J50	C	307		CKSQYB105K16
C	209		CEJA4R7M35	C	308		CKSQYB105K16
C	210		CCSQCH101J50	C	309		CKSQYB221K50
C	211		CCSQCH101J50	C	313		CKSQYB103K50
C	212		CEJA4R7M35	C	314		CKSQYB103K50
C	213		CKSQYB471K50	C	315		CKSQYB103K50
C	214		CEJA101M10	C	316		CEJA100M16
C	230		CKSQYB104K50	C	317		CKSQYB105K16
C	231		CKSRYB681K50	C	318		CEJA100M16
C	232		CEJAR10M50	C	319		CEJA100M16
C	233		CEJA100M16	C	321		CKSQYB103K50
C	234		CCSRCH101J50	C	322		CKSQYB103K50
C	235		CEJA101M16	C	323		CKSQYB105K16
C	236		CKSQYB104K50	C	325		CKSQYB103K50
C	237		CEJANPR10M50	C	328		CKSQYB103K50
C	238		CKSRYB473K25	C	350		CEJA1R0M50
C	239		CKSRYB222K50	C	351		CKSQYB103K50
C	240		CKSRYB473K25	C	352		CEJA470M6R3
C	241		CEJANP100M16	C	353		CKSQYB103K50
C	242		CEJANP100M16	C	354		CEJA220M10
C	243		CEJA100M16	C	355		CEJA221M6R3
C	244		CKSRYB104K16	C	356		CKSQYB103K50
C	259		CKSRYB221K50	C	357		CEJA470M6R3
C	260		CCSQCH180J50	C	359	470µF/6.3V	CCH1182
C	261		CEJAR10M50	C	360	470µF/6.3V	CCH1182
C	262		CKSQYB103K50	C	361	470µF/6.3V	CCH1182
C	263		CCSQCH180J50	C	400		CKSQYB103K50
C	264		CKSQYB224K25	C	401		CKSQYB183K50
C	265		CEJA1R0M50	C	402		CKSQYB183K50
C	266		CKSQYB105K16	C	403		CKSQYB102K50
C	267		CEJA1R0M50	C	405	330µF/10V	CCH1181
C	268		CEJA100M16	C	406		CKSQYB472K50
C	269		CEJA4R7M35	C	410		CKSQYB223K50
C	270		CKSQYB103K50	C	411		CKSQYB473K50
C	271		CCSQCH470J50	C	413		CEJA101M16
C	272		CEJA1R0M50	C	414		CKSQYB223K50
C	273		CKSQYB104K50	C	418		CKSQYB105K16
C	274		CEJA100M16	C	419		CKSQYB105K16
C	275		CKSQYB103K50	C	424		CCSRCH101J50
C	276		CCSQCH100J50	C	480		CCSRCH101J50
C	277		CKSQYB104K50	C	481		CKSRYB102K50
C	278		CKSQYB103K50	C	482		CEJA100M16
C	279		CKSQYB103K50	C	600		CKSRYB103K50
C	280		CKSQYB103K50	C	601		CKSRYB102K50
C	281		CEJA470M10	C	603		CKSRYB102K50
C	282		CKSQYB104K50	C	604		CCSRCH102J50
C	283		CEJA100M16	C	605		CCSRCH101J50
C	285		CKSQYB103K50	C	606		CKSQYB104K50

=====Circuit Symbol & No.		===Part Name	Part No.
C	607		CKSRYB104K16
C	608		CCSRCH270J50
C	609		CCSRCH270J50
C	611		CCSRCH101J50
C	612		CCSRCH101J50
C	650		CEJA2R2M50
C	660		CCSRCH220J50
C	661		CCSRCH220J50
C	662		CCSRCH220J50
C	663		CCSRCH220J50
C	664		CCSRCH220J50
C	665	0.1F/5.5V	CCL1023
C	666		CKSQYB104K50
C	667		CEJA470M16
C	668		CKSQYB105K16
C	669		CCSRCH220J50
C	670		CCSRCH220J50
C	671		CCSRCH220J50
C	672		CCSRCH220J50
C	673		CCSRCH220J50
C	674		CCSRCH220J50
C	682		CEJANP1R0M50
C	685		CEJANP1R0M50
C	686		CKSQYB104K50
C	687		CKSQYB104K50
C	688		CKSQYB103K50
C	689		CKSQYB105K16
C	730		CKSRYB472K50
C	800		CKSYB225K16
C	801		CKSYB225K16
C	802	330µF/10V	CCH1181
C	803		CKSRYB103K50
C	804	330µF/10V	CCH1181
C	805		CKSRYB103K50
C	806		CKSQYB104K50
C	807		CEJA101M16
C	808		CKSQYB104K50
C	809	330µF/10V	CCH1181
C	810		CKSYB225K16
C	811	1000µF/16V	CCH1003
C	812		CEJA101M10
C	813	330µF/10V	CCH1181
C	814		CKSQYB103K50
C	815		CKSQYB103K50
C	816		CEJA100M16
C	817		CEJA220M10
C	818		CEJA101M16
C	819		CKSQYB103K50
C	820		CEJA470M10
C	821		CEJA101M16
C	822		CKSQYB472K50
C	823		CKSQYB103K50
C	824		CKSQYB103K50
C	825		CEJA101M16
C	826	2200µF/16V	CCH1186
C	827	1000µF/16V	CCH1003
C	829		CEJA101M16
C	830		CKSQYB103K50
C	831		CKSQYB472K50
C	833		CKSQYB472K50
C	834		CCSRCH101J50
C	860		CKSQYB103K50
C	861		CEJA100M16
C	862		CKSQYB103K50
C	902		CEJA100M16

=====Circuit Symbol & No.		===Part Name	Part No.
C	903		CEJA100M16
C	904		CKSYB475K16
C	905		CKSYB475K16
C	906	10.0µF/16V	CCG1143
C	907	10.0µF/16V	CCG1143
C	908		CKSYB104K50
C	909		CEJA330M16
C	910		CEAT682M16
C	911		CEJA330M16
C	912		CKSQYB473K50
C	913		CKSYB104K50
C	914	3300µF/16V	CCH1344
C	916		CEJA4R7M35
C	917		CEJA4R7M35
C	919		CKSYB105K16
C	920		CEJA4R7M35
C	921		CEJA4R7M35
C	922		CEJA4R7M35
C	923		CEJA4R7M35
C	925		CKSYB225K16
C	926		CKSYB225K16
C	927		CKSYB225K16
C	928		CKSYB225K16
C	929		CKSYB225K16
C	930		CKSYB225K16
C	931		CKSYB225K16
C	932		CKSYB225K16
C	933		CEJA4R7M35
C	934		CEJA4R7M35
C	935		CKSQYB224K16
C	936		CCSRCH560J50
C	937		CKSYB225K16
C	938		CKSYB225K16
C	939		CKSQYB224K16
C	940		CKSYB225K16
C	941		CKSYB225K16
C	942		CCSRCH560J50
C	943		CEJA100M16
C	944		CEJA100M16
C	945		CEJA100M16
C	946		CEJA100M16
C	947		CEJA100M16
C	948		CEJA100M16
C	949		CEJA100M16
C	950		CKSQYB102K50
C	951		CKSQYB102K50
C	952		CKSQYB102K50
C	953		CKSQYB102K50
C	954		CKSQYB102K50
C	955		CKSQYB102K50
C	978		CKSRYB103K50
C	979		CKSRYB104K16

C Unit Number : CWM7146
Unit Name : GDC Unit

MISCELLANEOUS

IC	1601	IC	PD3415A
IC	1602	IC	TC7SH04FU
IC	1651	IC	PD8064A
IC	1652	IC	PD8065A
IC	1701	IC	HD64412FI
IC	1751	IC	MSM5118165D-60TS
IC	1752	IC	MSM5118165D-60TS
IC	1823	IC	TC7WH125FU
IC	1831	IC	BA7046F
IC	1841	IC	TC74VHC123AFT

=====Circuit Symbol & No.===		Part Name	Part No.
IC	1891	IC	NJM78L03UA
IC	1892	IC	TLC2932
IC	1893	IC	TC7SET04FU
IC	1894	IC	TC74VHC4040FT
IC	1895	IC	TC3W03FU
D	1841	Diode	MA110
D	1842	Diode	MA110
L	1601	Inductor-Array	CTF1421
L	1602	Inductor-Array	CTF1421
L	1603	Inductor-Array	CTF1421
L	1604	Inductor-Array	CTF1421
L	1605	Inductor-Array	CTF1421
L	1606	Inductor	CTF1410
L	1607	Inductor-Array	CTF1421
L	1608	Inductor-Array	CTF1421
L	1609	Inductor-Array	CTF1421
L	1610	Inductor	CTF1410
L	1611	Inductor-Array	CTF1421
L	1612	Inductor	CTF1410
L	1613	Inductor	CTF1399
L	1614	Inductor	CTF1410
L	1615	Inductor-Array	CTF1421
L	1616	Inductor-Array	CTF1421
L	1617	Inductor	CTF1410
L	1618	Inductor	CTF1410
L	1619	Inductor	CTF1410
L	1620	Inductor	CTF1410
L	1621	Inductor	CTF1410
L	1623	Inductor-Array	CTF1421
L	1624	Inductor-Array	CTF1421
L	1625	Inductor-Array	CTF1421
L	1627	Inductor	CTF1399
L	1701	Inductor-Array	CTF1421
L	1702	Inductor-Array	CTF1421
L	1703	Inductor-Array	CTF1421
L	1704	Inductor-Array	CTF1421
L	1705	Inductor-Array	CTF1421
L	1709	Inductor	CTF1410
L	1710	Inductor-Array	CTF1421
L	1711	Inductor-Array	CTF1421
L	1712	Inductor-Array	CTF1421
L	1713	Inductor-Array	CTF1421
L	1714	Inductor-Array	CTF1421
L	1715	Inductor-Array	CTF1421
L	1716	Inductor-Array	CTF1421
L	1717	Inductor-Array	CTF1421
L	1718	Inductor-Array	CTF1421
L	1719	Inductor-Array	CTF1421
L	1720	Inductor	CTF1410
L	1721	Inductor-Array	CTF1421
L	1722	Inductor-Array	CTF1421
L	1723	Inductor-Array	CTF1421
L	1724	Inductor-Array	CTF1421
L	1725	Inductor-Array	CTF1421
L	1726	Inductor-Array	CTF1421
L	1727	Inductor-Array	CTF1421
L	1728	Inductor-Array	CTF1421
L	1729	Inductor	CTF1410
L	1730	Inductor-Array	CTF1421
L	1731	Inductor-Array	CTF1421
L	1732	Inductor-Array	CTF1421
L	1733	Inductor	CTF1306
L	1823	Inductor	CTF1399
L	1831	Inductor	CTF1399
L	1841	Inductor	CTF1399

=====Circuit Symbol & No.===		Part Name	Part No.
L	1892	Inductor	CTF1399
L	1893	Inductor	CTF1399
L	1894	Inductor	CTF1399
L	1895	Inductor	CTF1399
L	1896	Inductor	CTF1399
X	1601	Radiator 20MHz	CSS1520
X	1701	Radiator 8.25MHz	CWX2475
X	1702	Radiator 7.977138MHz	CWX2474
EF	1601	EMI Filter	CCG1142
EF	1651	EMI Filter	CCG1142
EF	1652	EMI Filter	CCG1142
EF	1701	EMI Filter	CCG1142
EF	1702	EMI Filter	CCG1142
EF	1703	EMI Filter	CCG1142
EF	1751	EMI Filter	CCG1142
EF	1752	EMI Filter	CCG1142

RESISTORS

R	1601	RS1/16S473J
R	1603	RS1/16S102J
R	1604	RS1/16S102J
R	1605	RS1/16S102J
R	1606	RA3C102J
R	1609	RS1/16S102J
R	1611	RS1/16S473J
R	1612	RS1/16S473J
R	1613	RS1/16S105J
R	1614	RS1/16S471J
R	1615	RS1/16S102J
R	1616	RAB4C102J
R	1617	RS1/16S102J
R	1618	RA3C102J
R	1621	RS1/16S0R0J
R	1622	RS1/16S0R0J
R	1623	RS1/16S0R0J
R	1624	RS1/16S0R0J
R	1631	RS1/16S0R0J
R	1651	RAB4C0R0J
R	1652	RAB4C0R0J
R	1653	RAB4C0R0J
R	1654	RAB4C0R0J
R	1655	RAB4C0R0J
R	1656	RAB4C0R0J
R	1657	RAB4C0R0J
R	1658	RAB4C0R0J
R	1659	RAB4C0R0J
R	1660	RAB4C0R0J
R	1661	RAB4C0R0J
R	1662	RAB4C0R0J
R	1663	RAB4C0R0J
R	1664	RAB4C0R0J
R	1665	RAB4C0R0J
R	1666	RAB4C0R0J
R	1667	RAB4C0R0J
R	1668	RAB4C0R0J
R	1669	RAB4C0R0J
R	1670	RAB4C0R0J
R	1702	RS1/16S0R0J
R	1703	RS1/16S473J
R	1706	RS1/16S0R0J
R	1707	RS1/16S220J
R	1708	RS1/16S220J
R	1709	RAB4C220J
R	1710	RAB4C220J
R	1711	RAB4C220J
R	1712	RAB4C220J
R	1713	RAB4C220J
R	1714	RS1/16S220J

=====Circuit Symbol & No.===	Part Name	Part No.
R 1715		RS1/16S302J
R 1716		RS1/16S220J
R 1717		RS1/16S220J
R 1718		RAB4C220J
R 1719		RAB4C220J
R 1720		RAB4C220J
R 1721		RAB4C220J
R 1722		RAB4C220J
R 1723		RS1/16S473J
R 1725		RS1/16S220J
R 1726		RS1/16S473J
R 1727		RS1/16S473J
R 1751		RAB4C0R0J
R 1752		RAB4C0R0J
R 1753		RS1/16S0R0J
R 1754		RS1/16S0R0J
R 1755		RAB4C0R0J
R 1756		RAB4C0R0J
R 1757		RAB4C0R0J
R 1758		RAB4C0R0J
R 1759		RS1/16S0R0J
R 1760		RAB4C0R0J
R 1761		RAB4C0R0J
R 1762		RAB4C0R0J
R 1763		RS1/16S0R0J
R 1764		RS1/16S0R0J
R 1765		RAB4C0R0J
R 1766		RAB4C0R0J
R 1767		RAB4C0R0J
R 1768		RAB4C0R0J
R 1769		RS1/16S0R0J
R 1770		RAB4C0R0J
R 1781		RS1/16S332J
R 1782		RS1/16S332J
R 1783		RS1/16S332J
R 1784		RS1/16S332J
R 1785		RS1/16S332J
R 1786		RS1/16S332J
R 1787		RS1/16S103J
R 1788		RS1/16S103J
R 1789		RS1/16S103J
R 1790		RAB4C103J
R 1791		RAB4C103J
R 1792		RAB4C103J
R 1793		RAB4C203J
R 1794		RAB4C203J
R 1795		RAB4C203J
R 1796		RAB4C203J
R 1797		RAB4C203J
R 1798		RAB4C203J
R 1801		RS1/16S153J
R 1802		RS1/16S102J
R 1831		RS1/16S134J
R 1832		RS1/16S102J
R 1833		RS1/16S102J
R 1834		RS1/16S474J
R 1835		RS1/16S103J
R 1836		RS1/16S474J
R 1837		RS1/16S331J
R 1838		RS1/16S103J
R 1841		RS1/16S103J
R 1842		RS1/16S681J
R 1845		RS1/16S681J
R 1846		RS1/16S0R0J
R 1848		RS1/16S681J

=====Circuit Symbol & No.===	Part Name	Part No.
R 1849		RS1/16S0R0J
R 1851		RS1/16S103J
R 1852		RS1/16S681J
R 1860		RS1/16S0R0J
R 1861		RS1/16S0R0J
R 1891		RS1/16S332J
R 1892		RS1/16S301J
R 1893		RS1/16S331J
R 1894		RS1/16S101J
R 1895		RS1/16S102J
R 1896		RS1/16S102J
R 1897		RS1/16S222J
R 1898		RS1/16S102J
R 1899		RS1/16S102J
R 1900		RS1/16S222J
R 1901		RS1/16S101J

CAPACITORS

C 1601		CKSRYB104K16
C 1602		CKSRYB104K16
C 1603		CKSRYB104K16
C 1604		CKSRYB104K16
C 1605		CKSRYB104K16
C 1606		CKSRYB104K16
C 1607		CKSRYB104K16
C 1608		CCSRCH150J50
C 1609		CCSRCH150J50
C 1610		CEV101M16
C 1611		CKSRYB102K50
C 1612		CKSYB104K16
C 1613		CKSRYB104K16
C 1631		CCSRCH101J50
C 1651		CEV101M16
C 1652		CKSYB104K16
C 1653		CEV101M16
C 1654		CKSYB104K16
C 1701		CKSRYB104K16
C 1702		CKSYB104K16
C 1703		CCSRCH471J50
C 1704		CEV100M16
C 1705		CKSYB104K16
C 1706		CKSRYB104K16
C 1707		CEV101M16
C 1708		CKSRYB104K16
C 1709		CKSRYB104K16
C 1710		CKSRYB104K16
C 1711		CKSRYB104K16
C 1712		CKSRYB104K16
C 1713		CKSRYB104K16
C 1714		CKSYB104K16
C 1715		CEV100M16
C 1716		CKSRYB104K16
C 1717		CKSRYB104K16
C 1718		CKSRYB104K16
C 1719		CCSRCH101J50
C 1751		CKSYB104K16
C 1752		CEV101M16
C 1753		CKSYB104K16
C 1754		CEV101M16
C 1781		CCSRCH220J50
C 1782		CCSRCH220J50
C 1783		CCSRCH220J50
C 1825		CKSRYB104K16
C 1831		CCSRCH101J50
C 1832		CKSRYB222K50
C 1833		CKSRYB105K6R3
C 1834		CKSRYB105K6R3
C 1835		CKSRYB102K50

=====Circuit Symbol & No.===Part Name			Part No.
C	1836		CKSRYB222K50
C	1837		CEV470M6R3
C	1841		CKSRYB183K25
C	1842		CCSRCH100D50
C	1843		CCSRCH100D50
C	1844		CCSRCH100D50
C	1845		CCSRCH471J50
C	1847		CKSRYB104K16
C	1848		CKSRYB102K50
C	1891		CEV220M6R3
C	1892		CKSRYB104K16
C	1893		CKSRYB104K16
C	1894		CKSRYB105K6R3
C	1895		CKSRYB103K25
C	1897		CKSRYB104K16
C	1898		CKSRYB104K16
C	1899		CKSRYB104K16
C	1900		CEV1R0M50

D Unit Number : CWM7147
Unit Name : DSP Unit

MISCELLANEOUS

IC	2101	IC	CS4226-BQ
IC	2102	IC	BA3131FS
IC	2103	IC	TC7S08FU
IC	2201	IC	YSS912C-F
IC	2202	IC	TC55V8128BFTI-12
IC	2301	IC	PD5572A
IC	2302	IC	S-80734ANDYI
IC	2401	IC	TC9164AF
IC	2402	IC	NJM4558MD
IC	2403	IC	NJM4558MD
IC	2405	IC	NJM4558MD
IC	2406	IC	NJM4558MD
IC	2407	IC	NJM4558MD
IC	2408	IC	NJM4558MD
IC	2501	IC	PML003AM
IC	2502	IC	PML003AM
IC	2503	IC	PML003AM
IC	2602	IC	NJU7032M
IC	2603	IC	NJU7032M
IC	2604	IC	NJU7032M
IC	2901	IC	BA033FP
Q	2401	Transistor	2SC2412K
Q	2402	Transistor	2SC2412K
Q	2403	Transistor	2SC2412K
D	2301	Diode	MA111
D	2302	Diode	MA152WK
D	2401	Diode	MA3051(M)
L	2103	Inductor	CTF1410
L	2104	Inductor	CTF1410
L	2105	Inductor	CTF1410
L	2106	Inductor	CTF1410
L	2107	Inductor	CTF1410
L	2108	Inductor	CTF1410
L	2109	Inductor	CTF1399
L	2110	Inductor	CTF1410
L	2301	Inductor	CTF1399
L	2401	Inductor	CTF1410
L	2402	Inductor	CTF1410
L	2403	Inductor	CTF1410
L	2405	Inductor	CTF1410
L	2406	Inductor	CTF1410
L	2407	Inductor	CTF1410
L	2408	Inductor	CTF1410
L	2501	Inductor	CTF1399
L	2502	Inductor	CTF1399

=====Circuit Symbol & No.===Part Name			Part No.
L	2503	Inductor	CTF1399
L	2602	Inductor	CTF1399
L	2603	Inductor	CTF1399
L	2604	Inductor	CTF1399
L	2701	Inductor	CTF1410
L	2702	Inductor	CTF1410
L	2703	Inductor	CTF1410
L	2704	Inductor	CTF1410
L	2705	Inductor	CTF1410
L	2706	Inductor	CTF1410
X	2101	Radiator 12.288MHz	CSS1519
X	2201	Radiator 12.288MHz	CSS1519
X	2301	Radiator 10.00MHz	CSS1428
EF	2101	EMI Filter	CCG1142
EF	2102	EMI Filter	CCG1142
EF	2201	EMI Filter	CCG1142
EF	2202	EMI Filter	CCG1142
EF	2203	EMI Filter	CCG1142
EF	2204	EMI Filter	CCG1142
EF	2205	EMI Filter	CCG1142
EF	2206	EMI Filter	CCG1142
EF	2207	EMI Filter	CCG1142
EF	2208	EMI Filter	CCG1142
EF	2209	EMI Filter	CCG1142
EF	2210	EMI Filter	CCG1142
EF	2301	EMI Filter	CCG1142
EF	2302	EMI Filter	CCG1142
EF	2701	EMI Filter	CCG1142
EF	2702	EMI Filter	CCG1142
EF	2703	EMI Filter	CCG1142
EF	2704	EMI Filter	CCG1142

RESISTORS

R	2101		RS1/16S101J
R	2102		RS1/16S101J
R	2103		RS1/10S2R0J
R	2104		RS1/16S471J
R	2105		RAB4C101J
R	2106		RAB4C223J
R	2107		RS1/16S470J
R	2108		RS1/16S332J
R	2109		RS1/16S0R0J
R	2110		RS1/16S0R0J
R	2111		RS1/16S470J
R	2112		RS1/16S470J
R	2113		RS1/16S101J
R	2114		RS1/16S622J
R	2115		RS1/16S622J
R	2116		RS1/16S102J
R	2117		RS1/16S102J
R	2118		RS1/16S104J
R	2119		RS1/16S104J
R	2120		RS1/16S104J
R	2121		RS1/16S104J
R	2122		RS1/16S100J
R	2123		RS1/16S105J
R	2124		RA3C101J
R	2125		RS1/16S102J
R	2126		RS1/16S681J
R	2127		RS1/16S102J
R	2128		RS1/16S102J
R	2129		RS1/16S102J
R	2130		RS1/16S101J
R	2131		RS1/16S101J
R	2132		RS1/16S473J
R	2201		RAB4C101J
R	2202		RAB4C102J
R	2203		RS1/16S473J

=====Circuit Symbol & No.===Part Name	Part No.	=====Circuit Symbol & No.===Part Name	Part No.
R 2204	RAB4C102J	R 2432	RS1/16S104J
R 2205	RAB4C471J	R 2433	RS1/16S622J
R 2206	RAB4C471J	R 2435	RS1/16S622J
R 2207	RS1/16S471J	R 2437	RS1/16S162J
R 2208	RS1/16S105J	R 2438	RS1/16S122J
R 2209	RS1/16S473J	R 2439	RS1/16S752J
R 2210	RS1/16S102J	R 2440	RS1/16S752J
R 2211	RAB4C102J	R 2441	RS1/16S363J
R 2212	RS1/16S102J	R 2442	RS1/16S153J
R 2213	RS1/16S102J	R 2443	RS1/16S113J
R 2214	RS1/16S102J	R 2444	RS1/16S363J
R 2215	RS1/16S103J	R 2445	RS1/16S153J
R 2216	RAB4C102J	R 2446	RS1/16S113J
R 2217	RAB4C102J	R 2449	RS1/16S752J
R 2218	RS1/16S102J	R 2451	RS1/16S752J
R 2219	RAB4C101J	R 2455	RS1/16S0R0J
R 2220	RAB4C102J	R 2456	RS1/16S0R0J
R 2221	RAB4C471J	R 2457	RS1/16S133J
R 2222	RAB4C471J	R 2458	RS1/16S133J
R 2301	RS1/16S473J	R 2459	RS1/16S101J
R 2302	RS1/16S473J	R 2460	RS1/16S101J
R 2303	RS1/16S473J	R 2461	RS1/16S104J
R 2304	RAB4C102J	R 2462	RS1/16S104J
R 2305	RS1/16S102J	R 2463	RS1/16S622J
R 2306	RS1/16S102J	R 2465	RS1/16S432J
R 2307	RS1/16S105J	R 2467	RS1/16S363J
R 2308	RAB4C102J	R 2472	RS1/16S752J
R 2309	RS1/16S102J	R 2473	RS1/16S512J
R 2310	RS1/16S473J	R 2474	RS1/16S473J
R 2311	RAB4C102J	R 2481	RS1/16S133J
R 2312	RAB4C681J	R 2484	RS1/16S752J
R 2313	RS1/16S681J	R 2486	RS1/16S512J
R 2314	RA3C102J	R 2488	RS1/16S473J
R 2316	RS1/16S473J	R 2489	RS1/16S104J
R 2317	RS1/16S102J	R 2490	RS1/16S102J
R 2318	RS1/16S471J	R 2491	RS1/16S102J
R 2319	RAB4C102J	R 2492	RS1/16S102J
R 2320	RS1/16S124J	R 2493	RS1/16S102J
R 2321	RS1/16S102J	R 2494	RS1/16S102J
R 2322	RAB4C102J	R 2495	RS1/16S102J
R 2324	RS1/16S123J	R 2497	RS1/16S122J
R 2326	RS1/16S0R0J	R 2498	RS1/16S122J
R 2401	RS1/16S622J	R 2501	RA3C101J
R 2403	RS1/16S622J	R 2502	RA3C101J
R 2405	RS1/16S752J	R 2503	RA3C101J
R 2406	RS1/16S752J	R 2505	RS1/16S104J
R 2407	RS1/16S363J	R 2506	RS1/16S104J
R 2408	RS1/16S223J	R 2507	RS1/16S104J
R 2409	RS1/16S153J	R 2508	RS1/16S104J
R 2410	RS1/16S133J	R 2510	RS1/16S104J
R 2411	RS1/16S113J	R 2601	RS1/16S273J
R 2412	RS1/16S363J	R 2602	RS1/16S103J
R 2413	RS1/16S223J	R 2603	RS1/16S273J
R 2414	RS1/16S153J	R 2604	RS1/16S103J
R 2415	RS1/16S133J	R 2605	RS1/16S273J
R 2416	RS1/16S113J	R 2606	RS1/16S103J
R 2419	RS1/16S752J	R 2607	RS1/16S0R0J
R 2421	RS1/16S752J	R 2608	RS1/16S103J
R 2425	RS1/16S0R0J	R 2609	RS1/16S0R0J
R 2426	RS1/16S0R0J	R 2610	RS1/16S103J
R 2427	RS1/16S133J	R 2611	RS1/16S0R0J
R 2428	RS1/16S133J	R 2612	RS1/16S103J
R 2429	RS1/16S101J	R 2613	RS1/16S104J
R 2430	RS1/16S101J	R 2614	RS1/16S104J
R 2431	RS1/16S104J	R 2615	RS1/16S104J

=====Circuit Symbol & No.===		Part Name	Part No.
R	2618		RS1/16S104J
R	2619		RS1/16S104J
R	2620		RS1/16S104J
R	2621		RS1/16S103J
R	2622		RS1/16S103J
R	2623		RS1/16S103J
R	2624		RS1/16S0R0J
R	2625		RS1/16S0R0J
R	2626		RS1/16S0R0J
R	2627		RS1/16S273J
R	2628		RS1/16S103J
R	2629		RS1/16S273J
R	2630		RS1/16S103J
R	2631		RS1/16S753J
R	2632		RS1/16S103J
R	2633		RS1/16S102J
R	2634		RS1/16S102J
R	2641		RS1/16S100J
R	2642		RS1/16S100J

CAPACITORS


C	2101		CEV101M16
C	2102		CKSRYB104K16
C	2103		CEV4R7M25
C	2104		CEV100M16
C	2105		CEV4R7M25
C	2106		CEV100M16
C	2107		CEV101M16
C	2108		CCSRCH101J50
C	2109		CKSRYB105K6R3
C	2110	0.018μF/16V	CCE1028
C	2111		CCSRCH151J50
C	2112		CCSRCH151J50
C	2113	0.18μF/16V	CCE1029
C	2114		CKSRYB104K16
C	2115		CCSRCH151J50
C	2116		CCSRCH151J50
C	2117		CEV100M16
C	2118		CCSRCH101J50
C	2119		CCSRCH101J50
C	2120		CCSRCH270J50
C	2121		CCSRCH220J50
C	2122		CSZS220M6R3
C	2123		CSZS220M6R3
C	2124		CSZS220M6R3
C	2125		CSZS220M6R3
C	2126		CSZS220M6R3
C	2127		CSZS220M6R3
C	2201		CKSYB106K6R3
C	2202		CKSYB106K6R3
C	2203		CKSYB106K6R3
C	2204		CKSYB106K6R3
C	2205		CCSRCH270J50
C	2206		CCSRCH220J50
C	2207		CKSYB106K6R3
C	2208		CCSRCH471J50
C	2209		CKSYB106K6R3
C	2210		CKSYB106K6R3
C	2211		CKSYB106K6R3
C	2212		CKSYB106K6R3
C	2213		CKSYB106K6R3
C	2301		CKSYB106K6R3
C	2302		CCSRCH220J50
C	2303		CCSRCH220J50
C	2304		CCSRCH220J50
C	2305		CCSRCH220J50

=====Circuit Symbol & No.===		Part Name	Part No.
C	2306		CCSRCH220J50
C	2307		CKSYB106K6R3
C	2308		CKSYB225K16
C	2401		CKSRYB122K50
C	2402		CKSRYB122K50
C	2403		CKSYB106K6R3
C	2408		CCSRCH221J50
C	2409		CCSRCH221J50
C	2410		CKSYB106K6R3
C	2411		CKSYB106K6R3
C	2412		CKSYB475K10
C	2413		CKSYB475K10
C	2415		CKSYB106K6R3
C	2416		CKSRYB122K50
C	2417		CKSRYB122K50
C	2423		CCSRCH221J50
C	2424		CCSRCH221J50
C	2425		CKSYB106K6R3
C	2426		CKSYB106K6R3
C	2427		CKSYB475K10
C	2428		CKSYB475K10
C	2429		CKSRYB122K50
C	2430		CKSRYB103K50
C	2444		CCSRCH221J50
C	2445		CCSRCH120J50
C	2446		CKSRYB153K25
C	2447		CKSYB106K6R3
C	2448		CKSYB475K10
C	2449		CKSYB475K10
C	2452		CKSRYB222K50
C	2454		CKSRYB222K50
C	2455		CKSRYB222K50
C	2456		CKSRYB222K50
C	2457		CKSRYB222K50
C	2458		CKSRYB104K16
C	2460		CCSRCH560J50
C	2461		CCSRCH560J50
C	2462		CCSRCH560J50
C	2463		CCSRCH560J50
C	2464		CCSRCH120J50
C	2471		CKSYB106K6R3
C	2472		CKSYB106K6R3
C	2473		CKSYB106K6R3
C	2474		CKSYB106K6R3
C	2475		CKSYB106K6R3
C	2476		CKSYB106K6R3
C	2477		CKSYB106K6R3
C	2478		CKSYB106K6R3
C	2479		CKSYB106K6R3
C	2480		CKSYB106K6R3
C	2481		CKSYB106K6R3
C	2482		CKSYB106K6R3
C	2483		CKSYB106K6R3
C	2484		CKSYB106K6R3
C	2485		CKSYB106K6R3
C	2486		CKSYB106K6R3
C	2487		CKSYB106K6R3
C	2488		CKSYB106K6R3
C	2489		CKSYB106K6R3
C	2490		CKSYB106K6R3
C	2491		CKSYB106K6R3
C	2492		CKSYB106K6R3
C	2493		CKSYB106K6R3
C	2495		CKSYB106K6R3
C	2496		CKSYB106K6R3


=====Circuit Symbol & No.===Part Name			Part No.
C	2497		CKSYB106K6R3
C	2498		CKSYB106K6R3
C	2501		CKSYB106K6R3
C	2502		CKSYB475K10
C	2503		CKSYB475K10
C	2504		CKSYB106K6R3
C	2505		CKSYB475K10
C	2506		CKSYB475K10
C	2507		CKSYB106K6R3
C	2508		CKSYB475K10
C	2509		CKSYB475K10
C	2510		CEV100M16
C	2511		CEV100M16
C	2512		CEV100M16
C	2513		CKSQYB103K25
C	2514		CEV470M10
C	2515		CKSQYB103K25
C	2516		CEV470M10
C	2517		CKSQYB103K25
C	2518		CEV470M10
C	2519		CKSYB475K10
C	2520		CKSYB475K10
C	2521		CKSYB475K10
C	2522		CKSYB475K10
C	2523		CKSYB475K10
C	2524		CKSYB475K10
C	2525		CKSYB106K6R3
C	2526		CKSYB106K6R3
C	2527		CKSYB106K6R3
C	2531		CKSRYB105K6R3
C	2532		CKSRYB105K6R3
C	2533		CKSRYB105K6R3
C	2534		CKSRYB105K6R3
C	2536		CKSRYB105K6R3
C	2601		CCSRCH270J50
C	2602		CCSRCH270J50
C	2603		CCSRCH270J50
C	2605		CKSYB475K10
C	2606		CKSYB475K10
C	2607		CKSYB475K10
C	2610		CCSRCH270J50
C	2611		CCSRCH270J50
C	2612		CKSRYB182K50
C	2613		CSZS220M6R3
C	2615		CSZS220M6R3
C	2901		CKSYB334K16
C	2902		CSZSR220M10
C	2903		CKSRYB103K50

6. ADJUSTMENT

● **Connection Diagram (1)**

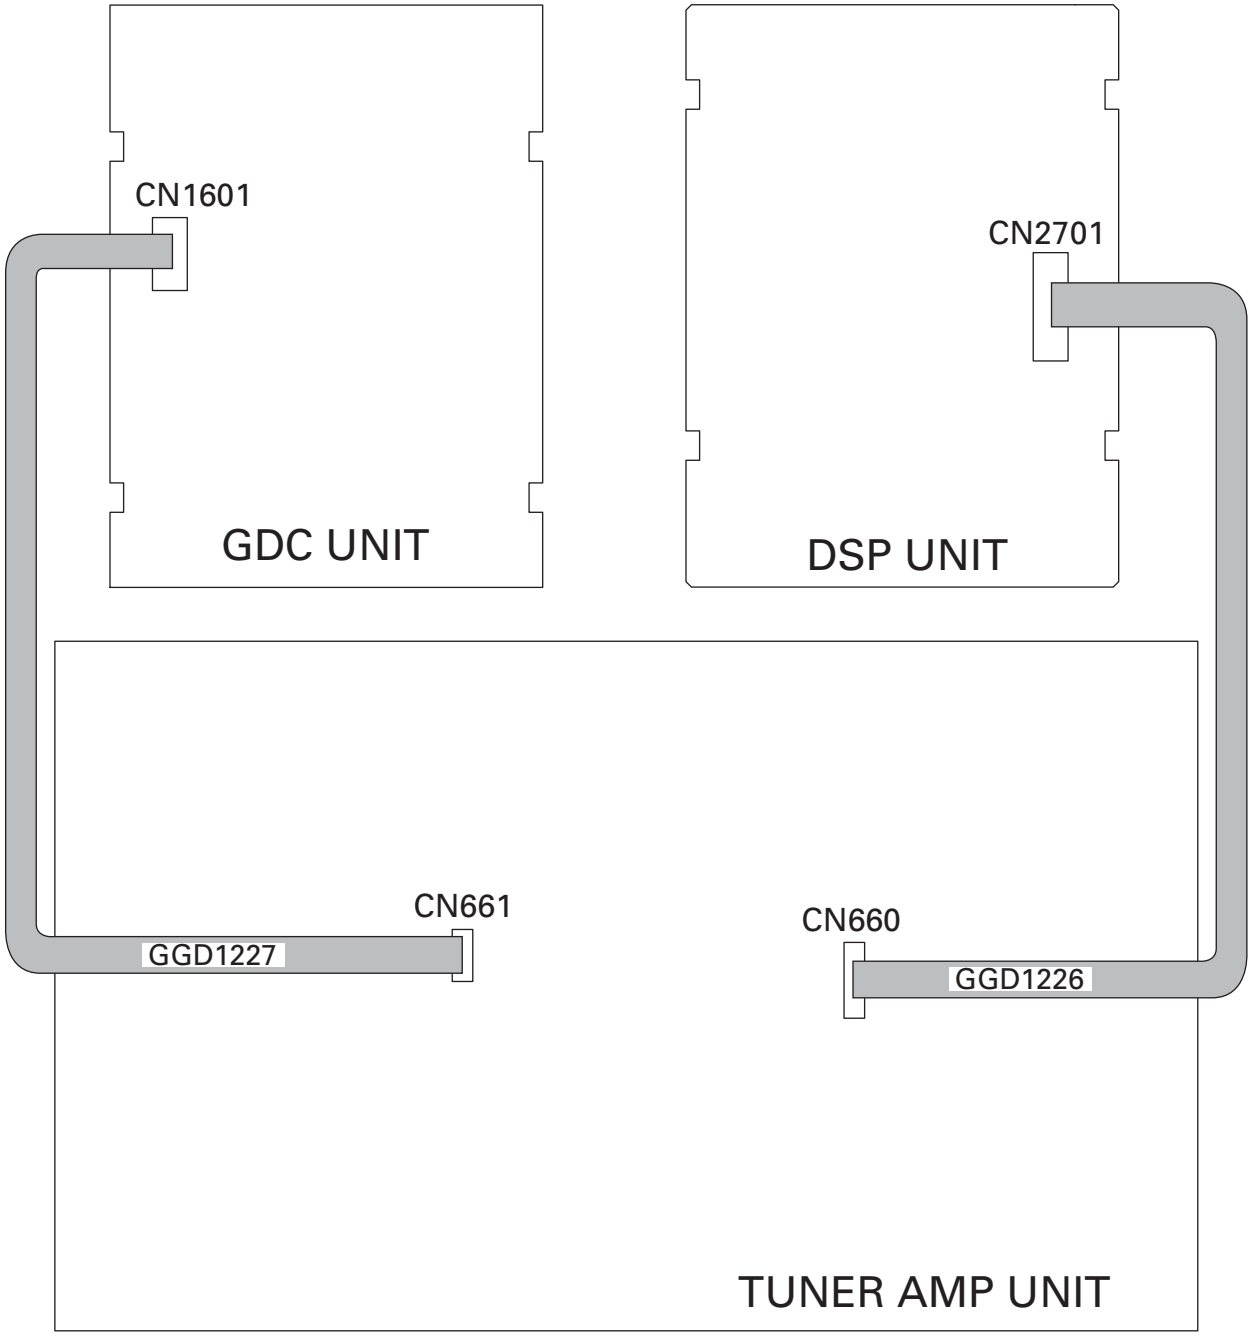



Connecting the Power Cord

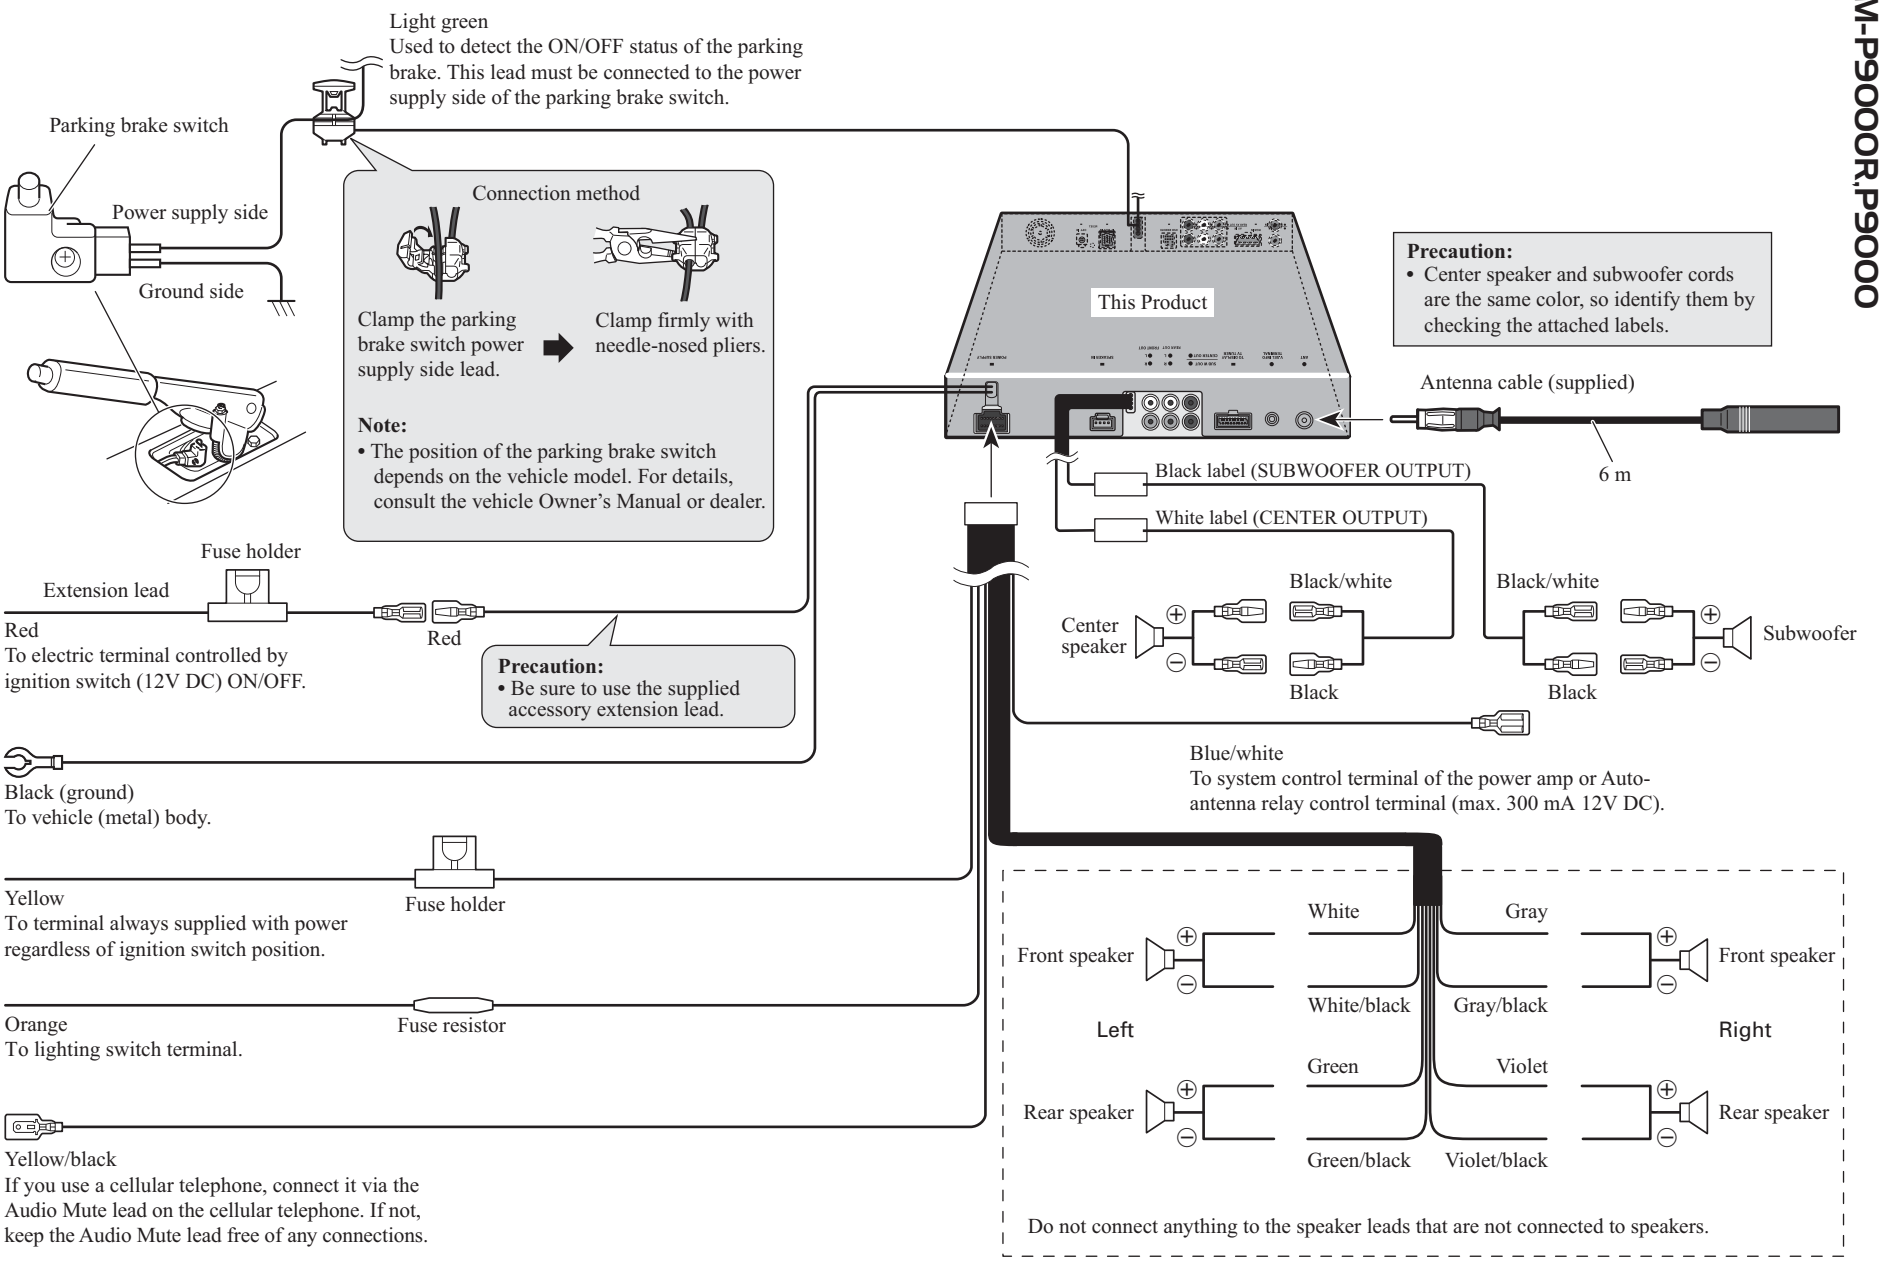

Connecting to a Sold Separately Power Amp


This product can be connected to a sold separately power amp using the RCA output jacks.

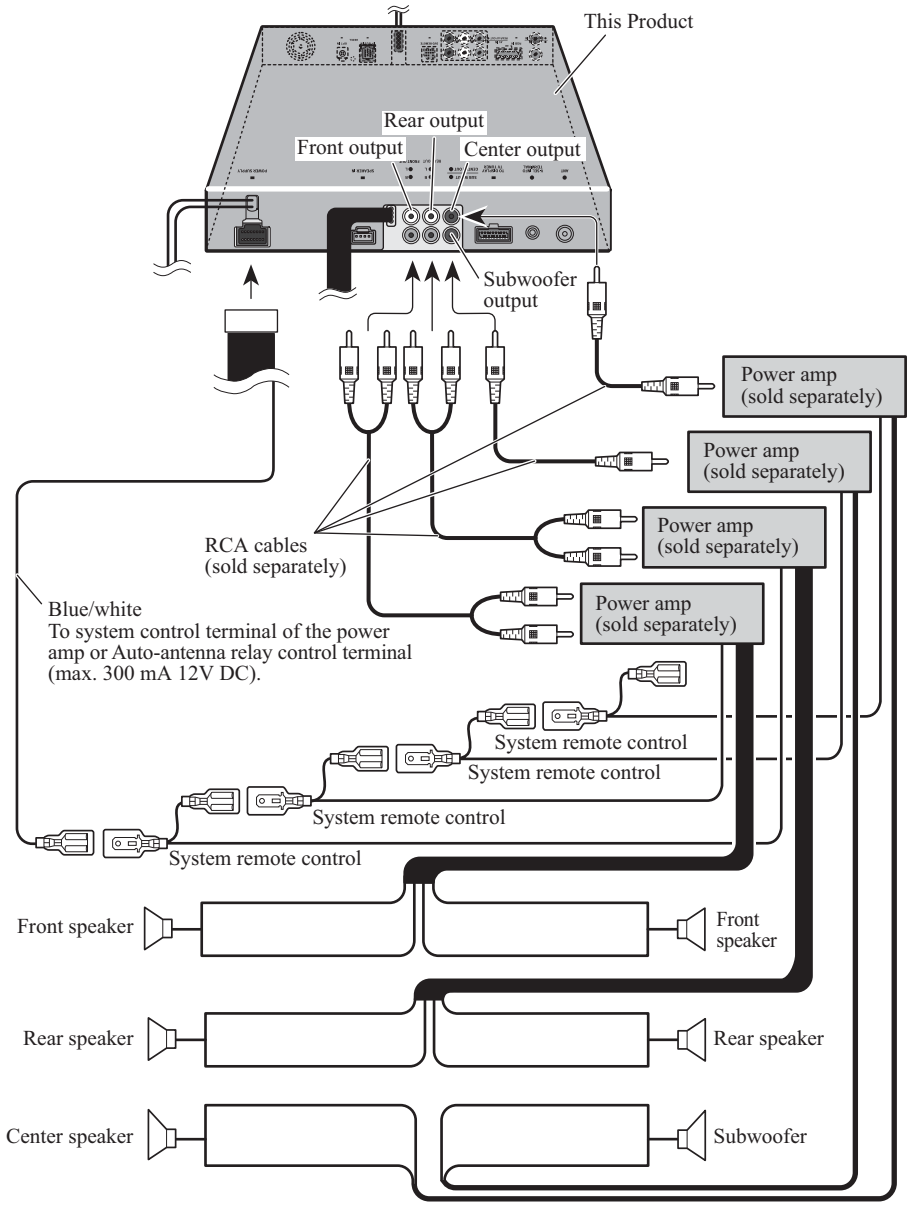

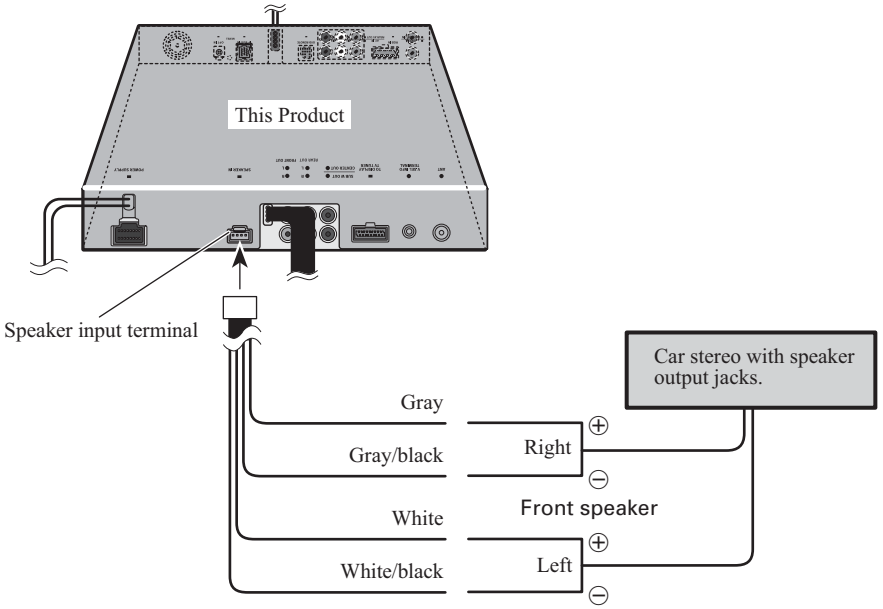


Perform these connections when using a different amp (sold separately).

Connecting the System (A)

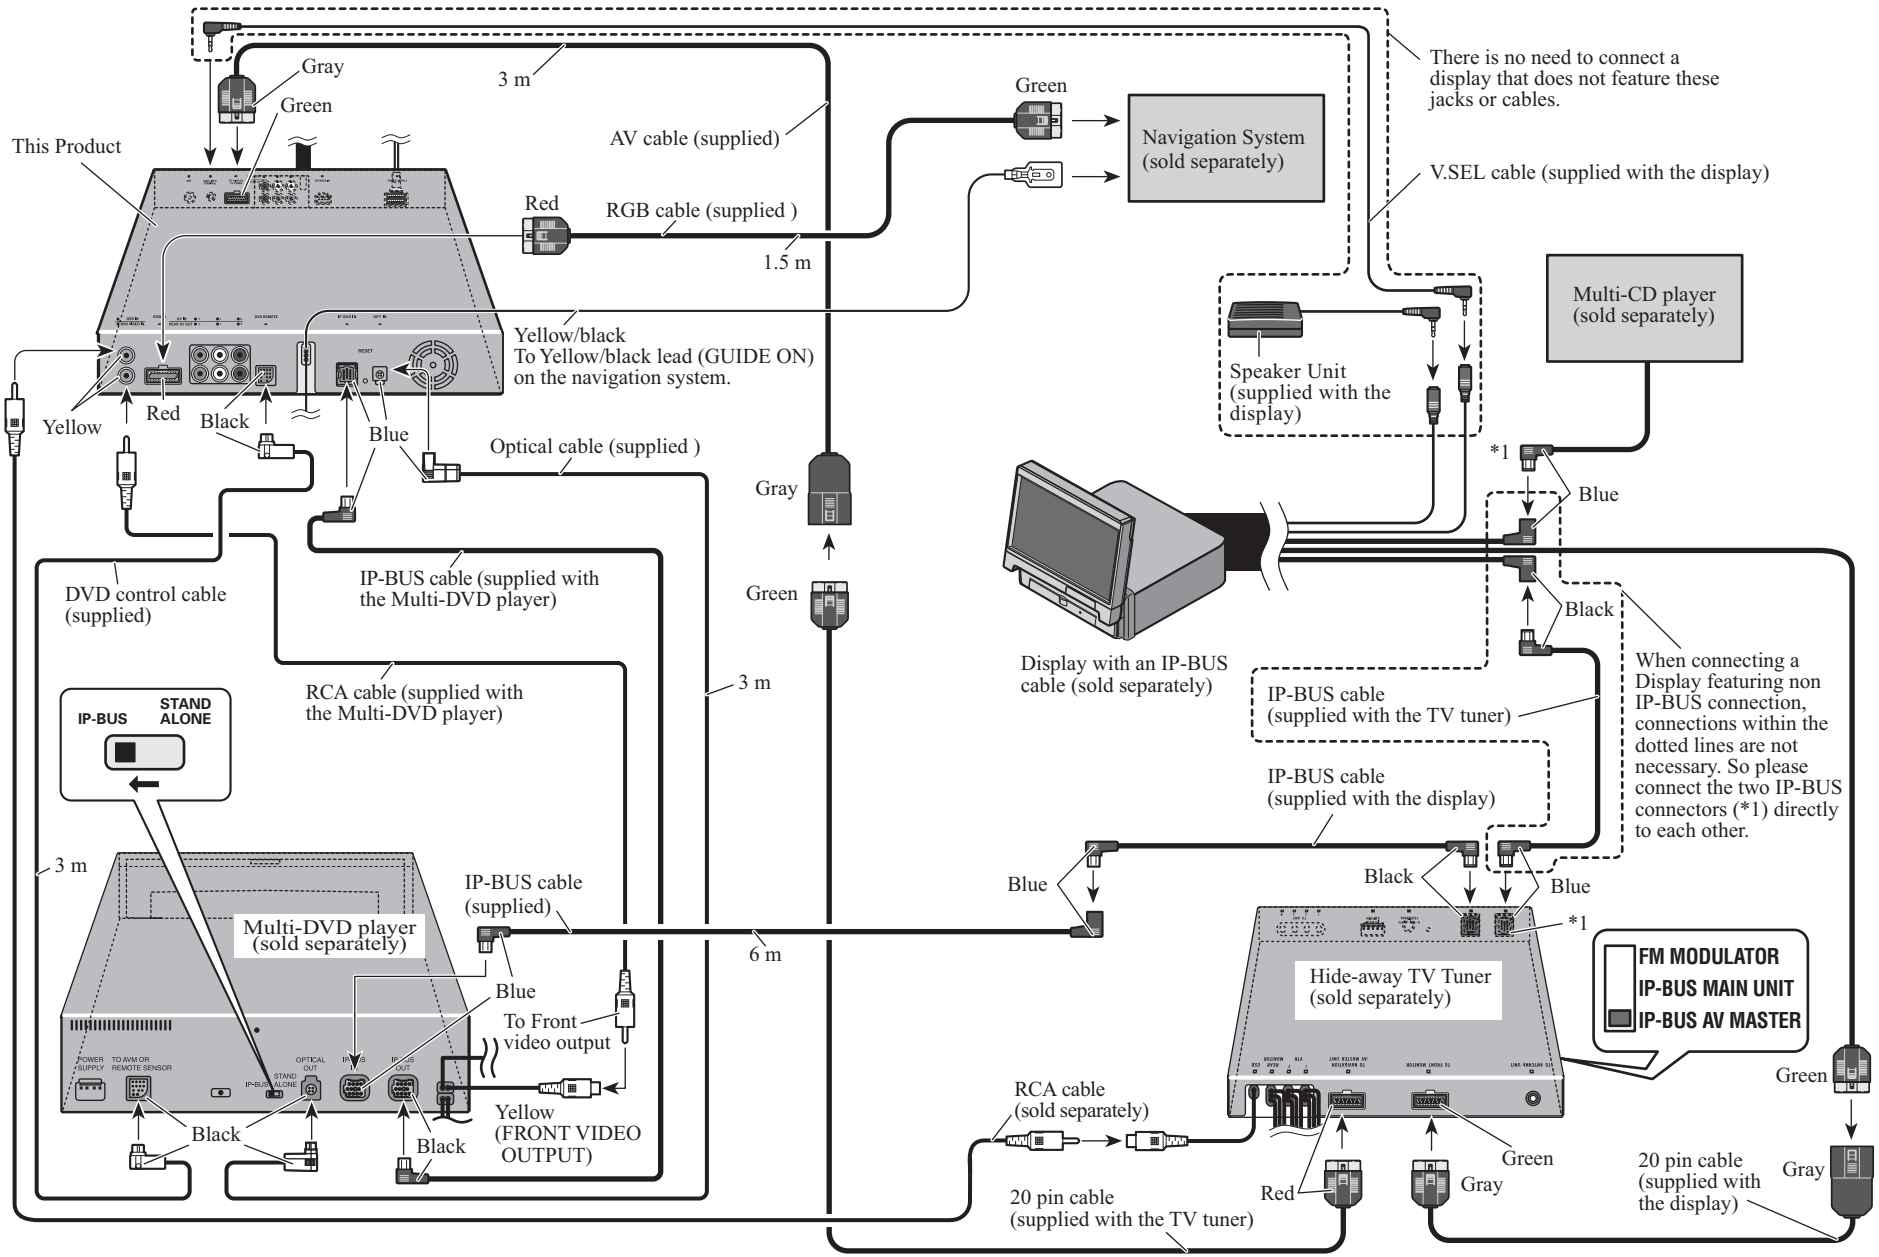

Connecting the System (B)

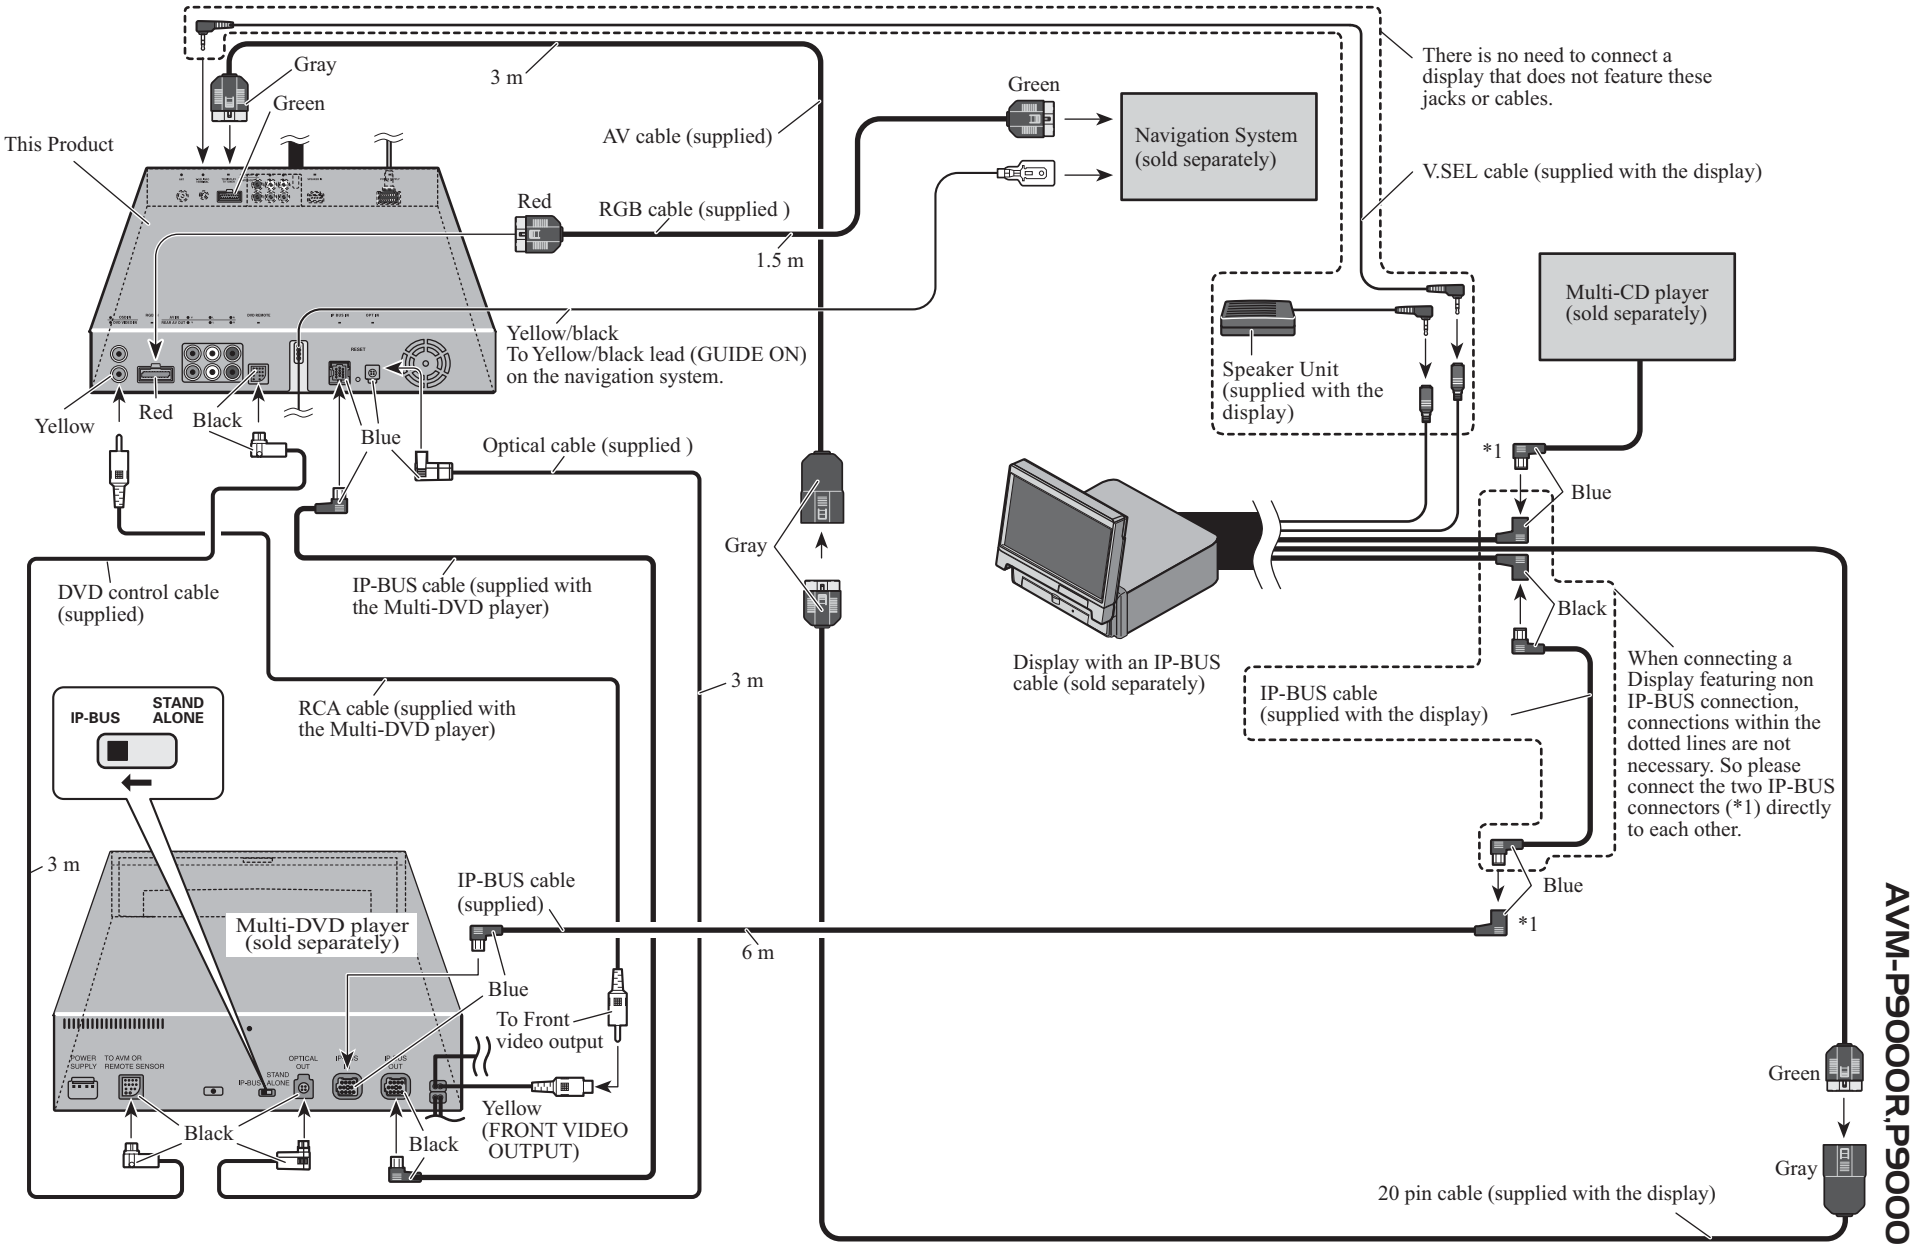

AVM-P9000R,P9000

VIDEO Input/Output Connection

It is possible to use an external video component by connecting it to the AV input on this product.
When connecting the Display with RCA input jacks to Rear AV output, you can also watch the external video component's picture.

