


EXPLODED VIEW / PARTS LIST

DCP section

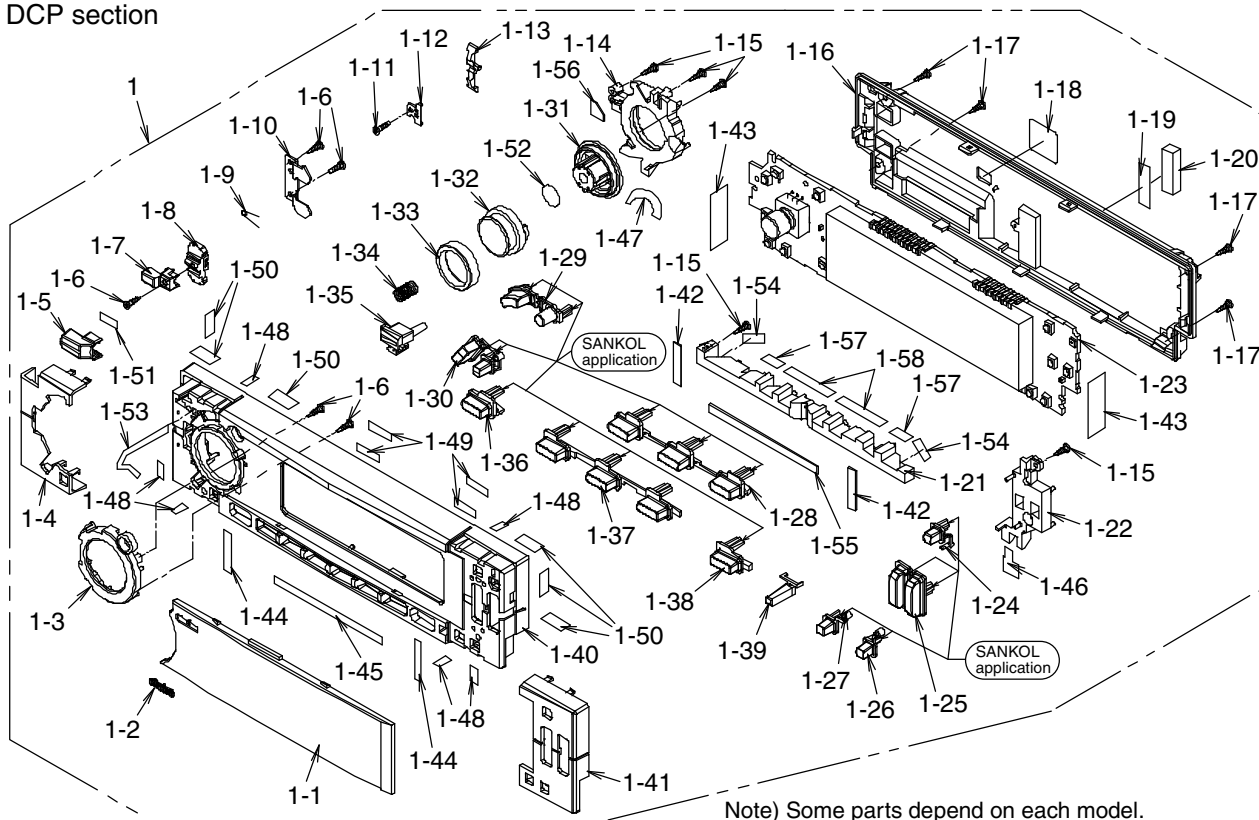

Note) Some parts depend on each model.

The model name is specified in the description.


SANKOL uses CFD-512.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-571-600	DCP ASSY(PE-2826B-A)	1
	DCP-571-800	DCP ASSY(PE-2826K-A/B)	1
1-1	373-1098-04	DIAL COVER(PE-2826B-A)	1
	373-1098-05	DIAL COVER(PE-2826K-A/B)	1
1-2	378-0553-00	BRAND	1
1-3	335-7745-00	RING	1
1-4	335-7746-00	FACE PANEL	1
1-5	335-7741-00	LEVER CAP	1
1-6	716-0872-52	PAD SCREW(M1.7x5)	5
1-7	335-7748-00	LEVER INNER	1
1-8	335-7758-00	LEVER BASE	1
1-9	750-6818-00	SPRING	1
1-10	331-4152-00	LEVER HOLDER	1
1-11	716-0872-70	PAD SCREW(M1.7x4)	1
1-12	331-3944-00	ARM COVER	1
1-13	335-7404-00	LEVER ARM	1
1-14	335-7751-00	ILLUMI PLATE	1
1-15	716-0872-51	SCREW(M1.7x6)	5
1-16	335-6899-01	REAR COVER	1
1-17	716-0872-62	SCREW(M1.7x8)	4
1-18	347-6977-00	COVER FILM	1
1-19	347-6628-00	SPACER FILM	1
1-20	345-8647-00	CUSHION	1
1-21	335-7742-00	ILLUMI PLATE	1
1-22	335-7743-00	ILLUMI PLATE	1
1-23	379-4060-00	VFD ASSY	1
1-24	382-7806-00	BUTTON	1
1-25	382-7805-00	BUTTON	1
1-26	382-7811-00	BUTTON	1
1-27	382-7804-00	BUTTON	1
1-28	382-7802-00	BUTTON	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-29	382-7808-00	BUTTON	1
1-30	382-7807-01	BUTTON	1
1-31	380-5670-00	INNER KNOB	1
1-32	380-5669-00	KNOB COVER	1
1-33	345-5873-00	RUBBER RING	1
1-34	750-6720-00	SPRING	1
1-35	382-7799-00	BUTTON	1
1-36	382-7800-00	BUTTON	1
1-37	382-7801-00	BUTTON	1
1-38	382-7803-00	BUTTON	1
1-39	335-7744-00	FILTER	1
1-40	370-6209-00	ESCUTCHEON	1
1-41	335-7747-00	FACE PANEL	1
1-42	345-5941-00	SPONGE	2
1-43	347-7980-00	SHADE	2
1-44	347-7986-00	DOUBLE FACE	2
1-45	347-7981-00	DOUBLE FACE	1
1-46	347-7982-00	SHADE	1
1-47	347-7983-00	SHADE	1
1-48	347-7987-00	DOUBLE FACE	6
1-49	347-7984-00	SHADE	4
1-50	347-7978-00	SHADE	6
1-51	347-7537-00	DOUBLE FACE	1
1-52	347-6988-00	DOUBLE FACE	1
1-53	347-7985-00	SURGE FILM	1
1-54	347-8047-00	FILM	2
1-55	345-5940-00	SPONGE	1
1-56	347-8067-00	FILM	1
1-57	347-8049-00	SHADE	2
1-58	345-6004-00	SPONGE	2

DXZ765MP/DXZ766MP


Inner Escutcheon section

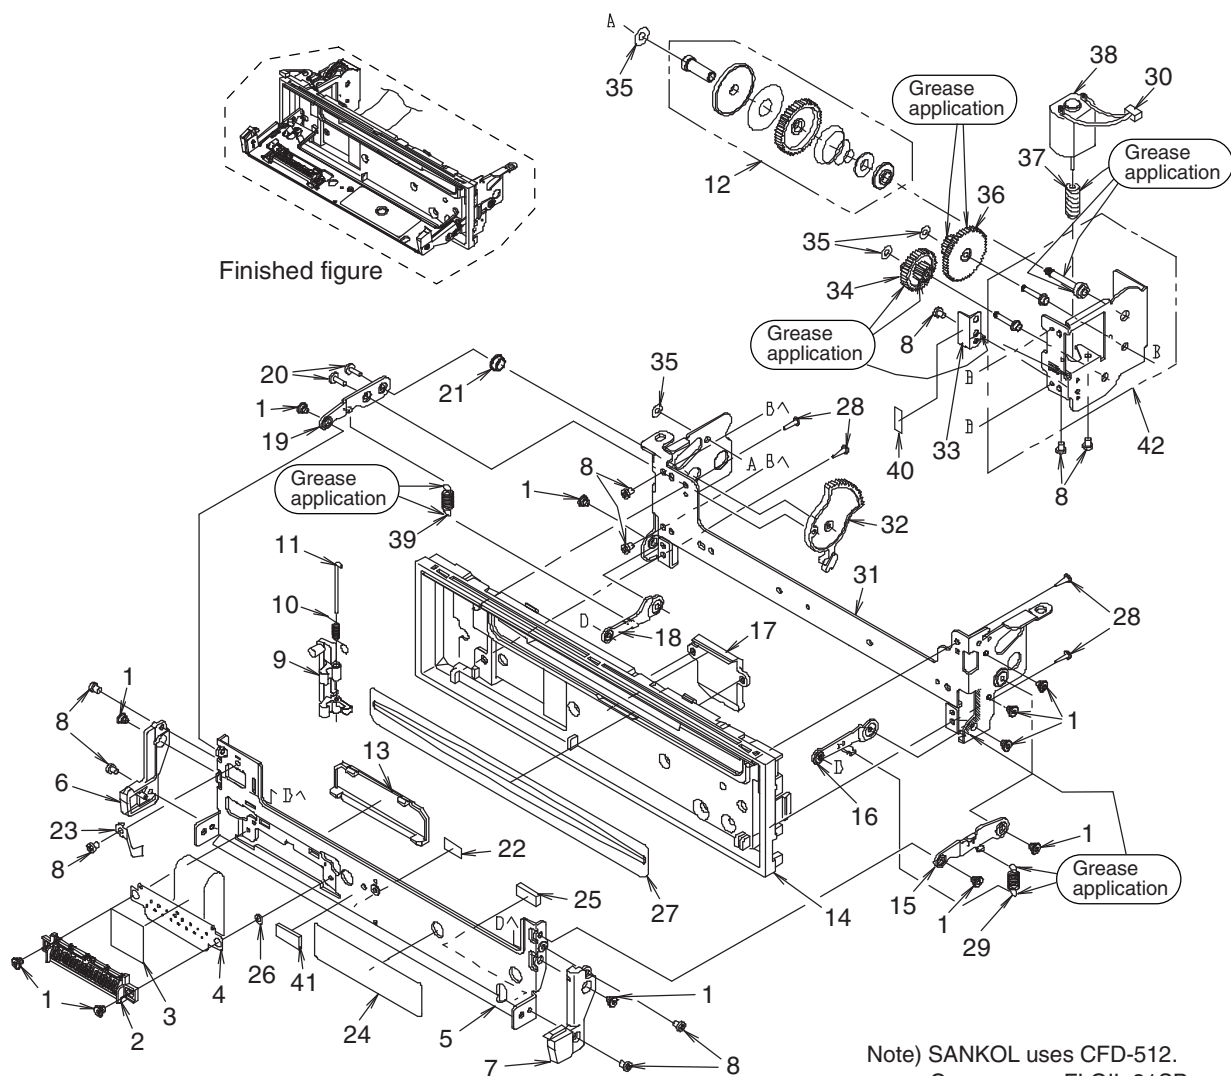


Note) SANKOL uses CFD-512.
Grease uses FLOIL 31SB.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-52	DECORATIVE SCREW(M2)	11	22	347-6527-00	CUSHION	1
2	074-1278-01	OUTLET SOCKET(16P)	1	23	750-3457-00	SPRING	1
3	347-6528-00	INSULATOR	1	24	291-0102-01	STICKER	1
4	039-2409-00	FPC PWB (WITHOUT COMPONENT)	1	25	345-8627-00	CUSHION	1
5	331-3115-01	DCP-HOLDER	1	26	347-7347-00	SPACER	1
6	335-6903-00	ARM-COVER(L)	1	27	346-0150-02	LEATHER SHEET	1
7	335-6904-00	ARM-COVER(R)	1	28	716-0872-50	PAD SCREW(M1.7x5)	4
8	716-1468-70	SCREW(M2x2.5)	10	29	750-3304-20	SPRING	1
9	335-7484-00	HOOK	1	30	854-4380-01	EX-LEAD	1
10	750-3431-02	SPRING	1	31	309-0772-02	FRONT-PLATE	1
11	341-1802-00	SHAFT	1	32	613-0719-00	ARM-GEAR	1
12	947-0513-04	T-LIM GEAR ASSY	1	33	750-3432-00	SPRING	1
13	335-6499-00	CN-COVER	1	34	613-0733-00	HUS-GEAR	1
14	370-5935-07	INNER-ES	1	35	746-0768-70	WASHER(M1.0/T0.5)	4
15	331-3117-01	LEVER-UP(R)	1	36	613-0717-00	INPUT-GEAR	1
16	331-3118-01	LEVER-LO(R)	1	37	621-0714-00	MOTOR GEAR	1
17	335-6505-00	ILLUMI PLATE	1	38	020-1518-00	DC-MOTOR	1
18	331-3119-00	LEVER-LO(L)	1	39	750-3303-20	SPRING	1
19	331-3120-00	LEVER-UP(L)	1	40	347-8056-00	SHADE	1
20	716-1758-50	PAD SCREW(M2x5)	2	41	345-5937-00	CUSHION	1
21	341-1740-00	ROLLER	1	42	946-0079-01	GEAR BOX ASSY	1

Main section

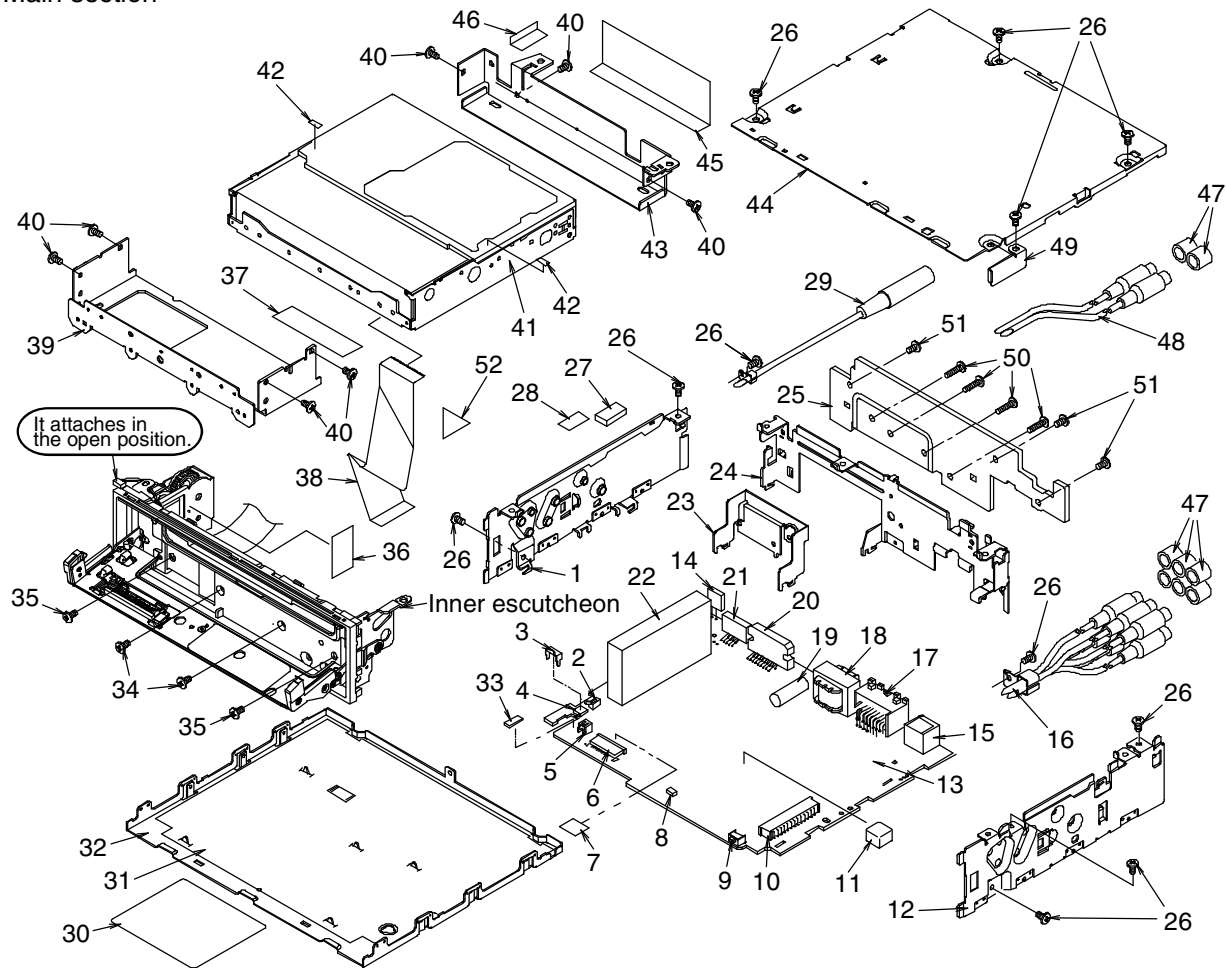

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	305-0274-01	SIDE COVER(L)	1	28	347-6341-00	E-SHEET	1
2	013-7106-00	DETECTOR SWITCH	1	29	092-2225-50	ANT-RECEPT	1
3	331-3378-00	SW-HOLDER	1	30	286-6785-00	SETPLATE(PE-2826B-A)	1
4	013-7206-50	DETECTOR SWITCH	1		276-0022-00	SETPLATE(PE-2826K-A)	1
5	076-0313-02	PLUG(2P)	1		276-0023-00	SETPLATE(PE-2826K-B)	1
6	074-1198-68	OUTLET SOCKET(18P)	1	31	347-5918-00	INSULATOR	1
7	347-6215-00	SPACER FILM	1	32	304-0460-04	LOWER CASE	1
8	001-7062-90	DIODE	1	33	345-8701-00	CUSHION	1
9	013-6100-00	SWITCH	1	34	716-0717-60	STEEL SCREW(M2.3x0.4P)	2
10	074-1138-79	OUTLET SOCKET(29P)	1	35	780-2005-50	SCREW(M2x5)	2
11	331-2869-00	SHIELD CASE	1	36	347-6536-00	PROTECT SHEET	1
12	305-0275-00	SIDE COVER(R)	1	37	347-8050-00	FILM	1
13	-----	MAIN PWB	1	38	816-4026-50	PLAT WIRE	1
14	125-4015-90	TRANSISTOR	1	39	331-3323-02	MECH-BRKT	1
15	074-1194-00	OUTLET SOCKET(CeNET)	1	40	714-2603-89	MACHINE SCREW(M2.6x3)	7
16	855-5541-50	RCA PIN CORD	1	41	929-5000-80	CD-MECH MODULE	1
17	074-1214-00	OUTLET SOCKET(16P)	1	42	347-6821-00	SPACER FILM	2
18	010-8038-01	CHOKE	1	43	331-3324-00	MECH-BRKT	1
19	042-1715-00	ALUMI ELECTROLYT	1	44	303-0472-06	UPPER CASE	1
20	051-2056-00	IC	1	45	347-6705-00	INSULATOR	1
21	051-3349-00	IC	1	46	347-7018-00	INSULATOR	1
22	880-2150A	CCC-TUNER	1	47	345-3799-20	RUBBER PART	8
23	331-4125-00	IC HOLDER	1	48	855-5542-50	RCA PIN CORD	1
24	313-1959-00	REAR COVER	1	49	331-2744-00	STOPPER	1
25	313-1960-00	HEAT SINK	1	50	714-2610-85	MACHINE SCREW(M2.6x10)	4
26	731-3006-85	TAPTIGHT(M3x6)	11	51	731-3008-89	SCREW(M3x8)	3
27	345-5312-00	CUSHION	1	52	347-7017-00	DOUBLE FACE	1

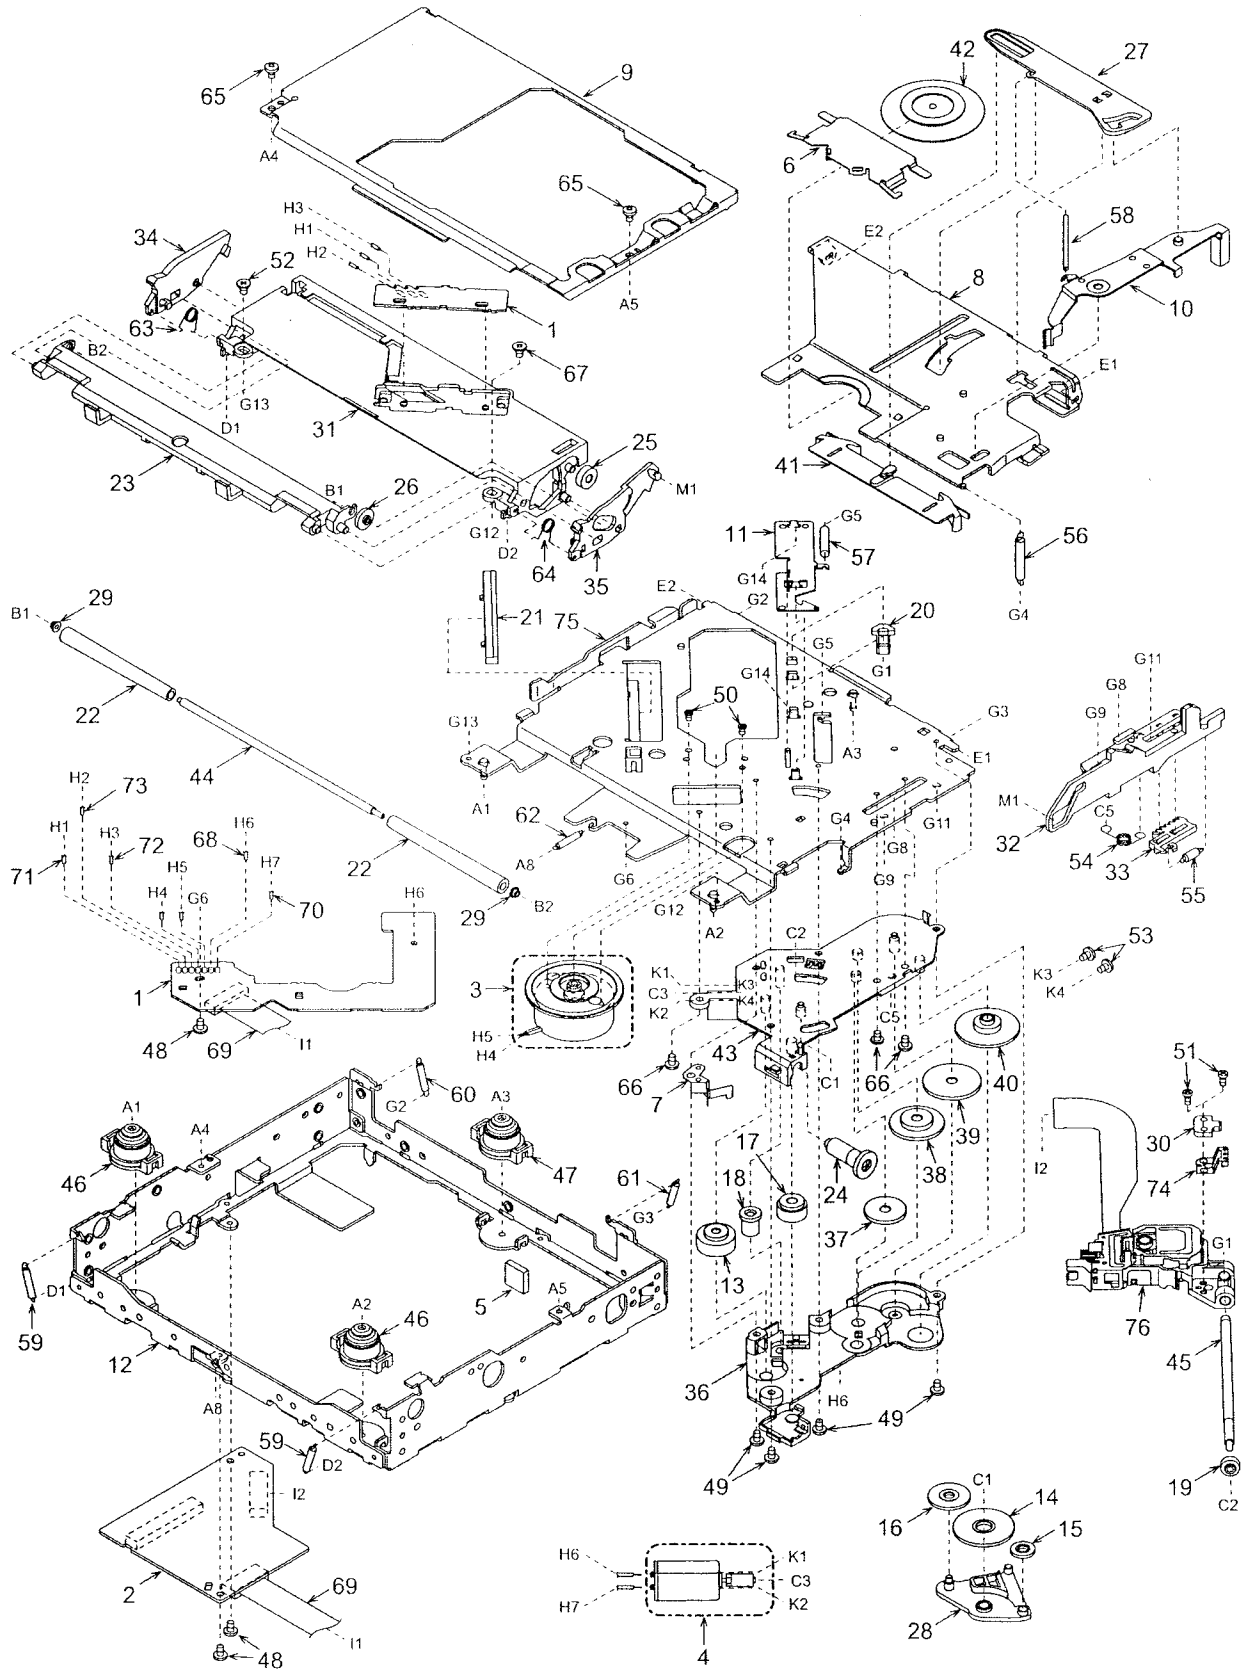

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB		39	621-1750-20	POWER GEAR C	1
2	-----	MAIN PWB	1	40	621-1751-20	POWER GEAR D	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1	41	621-1752-20	DISC STOPPER	1
4	SMA-183-100	SLED MOTOR-ASSY	1	42	621-1753-20	CLAMPER RING	1
5	345-5476-20	CUSHION RUBBER	1	43	621-1754-20	GEAR BASE	1
6	620-1023-23	CLAMPER PLATE	1	44	622-1571-21	ROLLER SHAFT	1
7	620-1026-21	SPRING PLATE	1	45	624-0020-00	LEAD SCREW	1
8	620-1596-23	CLAMPER LINK	1	46	629-0086-20	DAMPER F	2
9	620-1598-22	UPPER CHASSIS	1	47	629-0087-20	DAMPER R	1
10	620-1752-20	SENSOR ARM	1	48	716-1507-01	SCREW(M2x3)	3
11	620-1753-20	ID-LOCK PLATE	1	49	716-1670-01	SCREW(M2x4)	4
12	620-1754-20	LOWER CHASSIS	1	50	716-1733-01	SCREW(M1.7x2.3)	2
13	621-0608-21	SECOND GEAR	1	51	716-3469-01	SCREW(1.7x4)	2
14	621-0609-20	BASE GEAR	1	52	716-3473-01	SCREW(M2x3)	1
15	621-0610-20	IDLE GEAR A	1	53	716-3551-00	SCREW(M1.4x2.5)	2
16	621-0611-20	IDLE GEAR B	1	54	750-3467-21	SHIFT SPRING	1
17	621-0612-21	ROLLER GEAR A	1	55	750-3468-20	RACK SPRING	1
18	621-0620-20	THREAD GEAR A	1	56	750-3469-20	CLAMPER SPRING	1
19	621-0621-20	THREAD GEAR B	1	57	750-3470-20	ID-LOCK SPRING	1
20	621-0623-23	LS-HOLDER	1	58	750-3471-20	SENSOR SPRING	1
21	621-0624-22	GUIDE RAIL	1	59	750-3472-21	DR-SPRING F	2
22	621-0711-20	LOADING ROLLER	2	60	750-3473-20	DR-SPRING RA	1
23	621-0718-21	ROLLER GUIDE	1	61	750-3474-20	DR-SPRING RB	1
24	621-0719-20	ROLLER GEAR B	1	62	750-3475-21	DR-SPRING C	1
25	621-0720-20	ROLLER GEAR C	1	63	750-6797-20	ROLLER SPRING L	1
26	621-0721-20	ROLLER GEAR D	1	64	750-6798-20	ROLLER SPRING R	1
27	621-0728-20	STOPPER LINK	1	65	714-2003-8B	SCREW(M2x3)	2
28	621-1719-20	IDLE CASE	1	66	780-2025-00	SCREW(M2x2.5)	3
29	621-1726-20	ROLLER SLEEVE	2	67	781-1730-00	SCREW(M1.7x3)	1
30	621-1729-20	SH-BASE	1	68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
31	621-1742-20	UPPER GUIDE	1	69	816-2542-01	FLAT WIRE	1
32	621-1743-20	SHIFT LEVER	1	70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
33	621-1744-20	RACK	1	71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
34	621-1745-20	LOCK ARM L	1	72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
35	621-1746-20	LOCK ARM R	1	73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
36	621-1747-20	GEAR COVER	1	74	966-1722-20	SH-RACK-ASSY	1
37	621-1748-20	POWER GEAR A	1	75	966-1743-21	DRIVE-PLT-ASSY	1
38	621-1749-20	POWER GEAR B	1	76	969-0071-30	PICKUP-ASSY	1

ELECTRICAL PARTSLIST

Main PWB(B1) section

Note) Some parts depend on each model.
The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-2225-50	ANT-RECEPT	C217	187-1073-35	16V 100uF	C500	042-0397-54	10V 2.2uF TAN
BL1	880-2150A	CCC-TUNER	C218	187-1063-35	16V 10uF	C501	042-0397-54	10V 2.2uF TAN
C1	166-1511-50	50V 150pF	C219	168-1042-78	25V 0.1uF	C502	042-0397-54	10V 2.2uF TAN
C2	187-4763-35	16V 47uF	C220	042-0423-94	10V 4.7uF TAN	C503	042-0423-97	16V 10uF TAN
C3	168-2232-55	25V 0.022uF	C221	178-4742-78	0.47uF	C504	187-1063-35	16V 10uF
C4	187-4763-35	16V 47uF	C229	166-5611-50	50V 560pF	C505	168-1042-78	25V 0.1uF
C5	168-2232-55	25V 0.022uF	C280	042-0416-60	25V 10uF TAN	C506	187-1063-35	16V 10uF
C6	187-4763-35	16V 47uF	C281	042-1452-81	10V 220uF	C507	168-4732-78	25V 0.047uF
C7	168-2232-55	25V 0.022uF	C282	042-1631-50	10V 100uF	C508	168-4732-78	25V 0.047uF
C11	187-2253-65	50V 2.2uF	C283	042-1631-50	10V 100uF	C509	042-0423-97	16V 10uF TAN
C13	166-2201-50	50V 22pF CH	C284	168-2232-55	25V 0.022uF	C510	042-0423-97	16V 10uF TAN
C14	166-2201-50	50V 22pF CH	C285	168-1042-78	25V 0.1uF	C511	042-0423-97	16V 10uF TAN
C15	166-2201-50	50V 22pF CH	C286	166-2211-50	50V 220pF	C512	042-0423-97	16V 10uF TAN
C16	168-1032-55	50V 0.01uF	C287	168-1042-78	25V 0.1uF	C513	042-0423-97	16V 10uF TAN
C18	166-1011-50	50V 100pF	C301	166-1007-50	50V 10pF	C514	042-0397-54	10V 2.2uF TAN
C19	166-1011-50	50V 100pF	C302	166-1007-50	50V 10pF	C515	042-0423-97	16V 10uF TAN
C20	166-1011-50	50V 100pF	C303	042-0423-97	16V 10uF TAN	C516	042-0423-97	16V 10uF TAN
C21	166-1011-50	50V 100pF	C304	042-0423-97	16V 10uF TAN	C517	042-0423-97	16V 10uF TAN
C22	168-1032-55	50V 0.01uF	C305	168-1042-78	25V 0.1uF	C518	042-0423-97	16V 10uF TAN
C23	168-1032-55	50V 0.01uF	C306	168-1042-78	25V 0.1uF	C519	042-0397-54	10V 2.2uF TAN
C101	168-1222-55	50V 1200pF	C307	168-1042-78	25V 0.1uF	C530	042-0397-54	10V 2.2uF TAN
C102	168-1222-55	50V 1200pF	C308	168-1042-78	25V 0.1uF	C533	166-1801-50	50V 18pF CH
C103	168-1222-55	50V 1200pF	C309	042-0423-97	16V 10uF TAN	C534	166-1801-50	50V 18pF CH
C104	168-1222-55	50V 1200pF	C310	189-2273-21	10V 220uF	C535	166-1011-50	50V 100pF
C105	168-1222-55	50V 1200pF	C311	168-1042-78	25V 0.1uF	C536	166-1011-50	50V 100pF
C106	168-1222-55	50V 1200pF	C402	168-1042-78	25V 0.1uF	C537	166-1011-50	50V 100pF
C107	168-1222-55	50V 1200pF	C403	168-1042-78	25V 0.1uF	C538	166-1011-50	50V 100pF
C108	168-1222-55	50V 1200pF	C404	168-1042-78	25V 0.1uF	C540	168-1042-78	25V 0.1uF
C109	187-1073-25	10V 100uF	C405	168-1042-78	25V 0.1uF	C541	187-1063-35	16V 10uF
C110	163-1053-65	50V 1uF	C406	168-1042-78	25V 0.1uF	C542	187-1063-35	16V 10uF
C111	168-1042-78	25V 0.1uF	C407	187-4763-35	16V 47uF	C543	187-1073-25	10V 100uF
C112	166-4711-50	50V 470pF	C409	168-1042-78	25V 0.1uF	C551	187-1063-35	16V 10uF
C113	166-6811-50	50V 680pF	C410	168-1042-78	25V 0.1uF	C552	187-1063-35	16V 10uF
C114	163-1063-35	16V 10uF	C411	168-1042-78	25V 0.1uF	C553	187-1063-35	16V 10uF
C115	166-6811-50	50V 680pF	C412	168-1042-78	25V 0.1uF	C554	187-1063-35	16V 10uF
C116	172-2231-15	50V 0.022uF	C413	168-1042-78	25V 0.1uF	C555	187-1063-35	16V 10uF
C117	042-1715-00	16V 3300uF	C414	168-1042-78	25V 0.1uF	C556	187-1063-35	16V 10uF
C118	178-4742-78	0.47uF	C415	187-1073-15	6.3V 100uF	C557	042-0423-97	16V 10uF TAN
C119	178-4742-78	0.47uF	C416	168-1042-78	25V 0.1uF	C558	042-0423-97	16V 10uF TAN
C120	178-4742-78	0.47uF	C417	168-1042-78	25V 0.1uF	C559	168-1032-55	50V 0.01uF
C121	166-6811-50	50V 680pF	C418	042-1631-50	10V 100uF	C561	168-1032-55	50V 0.01uF
C122	166-6811-50	50V 680pF	C419	168-1042-78	25V 0.1uF	C562	042-0423-97	16V 10uF TAN
C128	166-6811-50	50V 680pF	C420	168-1022-55	50V 1000pF	C563	042-0423-97	16V 10uF TAN
C201	042-1714-00	100V 82uF	C422	187-1063-35	16V 10uF	C575	168-1042-78	25V 0.1uF
C202	168-1042-78	25V 0.1uF	C423	168-1042-78	25V 0.1uF	C601	166-2201-50	50V 22pF CH
C203	168-1042-78	25V 0.1uF	C426	168-1042-78	25V 0.1uF	C602	166-1801-50	50V 18pF CH
C204	042-1631-50	10V 100uF	C427	187-4763-15	6.3V 47uF	C603	042-0423-94	10V 4.7uF TAN
C205	168-1042-78	25V 0.1uF	C428	168-1042-78	25V 0.1uF	C604	187-3363-45	25V 33uF
C206	042-1714-00	100V 82uF	C434	187-1073-35	16V 100uF	C605	166-1011-50	50V 100pF
C207	042-0643-51	16V 100uF	C436	166-1011-50	50V 100pF	C606	168-2232-55	25V 0.022uF
C208	187-1073-25	10V 100uF	C437	168-1042-78	25V 0.1uF	C608	187-4763-35	16V 47uF
C209	168-2232-55	25V 0.022uF	C438	163-4763-15	6.3V 47uF	C609	168-1022-55	50V 1000pF
C210	168-4732-78	25V 0.047uF	C441	163-4763-15	6.3V 47uF	C614	168-1032-55	50V 0.01uF
C211	168-1042-78	25V 0.1uF	C442	168-1042-78	25V 0.1uF	C615	042-1577-00	6.3V 100uF
C212	168-1042-78	25V 0.1uF	C445	168-1042-78	25V 0.1uF	C616	042-1596-00	50V 0.33uF
C213	187-1073-15	6.3V 100uF	C446	163-4763-15	6.3V 47uF	C617	168-1032-55	50V 0.01uF
C214	187-1073-35	16V 100uF	C460	166-2211-50	50V 220pF	C618	166-1011-50	50V 100pF
C215	168-1042-78	25V 0.1uF	C461	166-2211-50	50V 220pF	C630	187-1073-35	16V 100uF
C216	168-1042-78	25V 0.1uF	C462	166-2211-50	50V 220pF	C632	166-1011-50	50V 100pF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C650	178-2242-78	0.22uF	L5	010-2230-70	6.8uH	Q610	192-4155-51	2SC4155A
C651	187-1063-35	16V 10uF	L101	010-8038-01	130uH	Q611	125-4014-90	KTC2020D
D1	001-0535-90	MA729	L102	010-3112-90	1k ohm/100MHz	Q612	125-0034-92	RT1P141M
D101	001-0592-61	IN5404	L103	010-3112-90	1k ohm/100MHz	Q613	125-3005-90	KTA1273
D102	001-1310-00	KDS160	L104	010-3112-90	1k ohm/100MHz	Q614	125-2041-93	RT1N241M
D103	001-1310-00	KDS160	L105	010-3112-90	1k ohm/100MHz	Q660	125-2041-93	RT1N241M
D104	001-4301-43	HZU8.2B1	L106	010-3112-90	1k ohm/100MHz	Q661	190-1365-50	2SA1365
D105	001-4301-24	HZU4.3B3	L107	010-3112-90	1k ohm/100MHz	Q662	125-2041-93	RT1N241M
D180	001-1310-00	KDS160	L201	010-3058-57	47uH	R1	119-4721-15	1/10W 4.7k ohm
D201	001-1310-00	KDS160	L202	010-6025-00	10uH	R2	119-4721-15	1/10W 4.7k ohm
D202	001-1310-00	KDS160	L203	010-2275-53	220uH	R4	119-4721-15	1/10W 4.7k ohm
D203	001-0424-31	MA4180	L222	010-2285-56	BLM21B222S	R5	119-4721-15	1/10W 4.7k ohm
D205	001-0644-91	MA113	L280	010-3406-66	NLV25 22uH J	R6	119-1811-15	1/10W 180 ohm
D206	001-0466-91	S5688G	L281	010-3406-66	NLV25 22uH J	R7	119-1811-15	1/10W 180 ohm
D207	001-1310-00	KDS160	L282	010-6003-03	270uH	R10	119-1041-15	1/10W 100k ohm
D208	001-1310-00	KDS160	L283	010-2285-56	BLM21B222S	R14	119-2711-15	1/10W 270 ohm
D209	001-0347-36	MA4062H	L301	010-3112-90	1k ohm/100MHz	R15	119-2711-15	1/10W 270 ohm
D210	001-4301-38	HZU6.8B2	L302	010-3112-90	1k ohm/100MHz	R103	119-0000-05	1/10W 0 ohm JW
D211	001-1310-00	KDS160	L304	010-3112-90	1k ohm/100MHz	R104	119-4711-15	1/10W 470 ohm
D212	001-0466-91	S5688G	L305	010-3112-90	1k ohm/100MHz	R105	119-4711-15	1/10W 470 ohm
D213	001-1310-00	KDS160	L307	010-3111-90	30 ohm/100MHz	R106	119-4711-15	1/10W 470 ohm
D214	001-1310-00	KDS160	L309	010-3406-66	NLV25 22uH J	R107	119-4711-15	1/10W 470 ohm
D280	001-2606-90	MIFS4	L321	010-3103-64	1.5k ohm/100MHz	R108	119-4731-15	1/10W 47k ohm
D601	001-0529-26	MA8047M	L401	010-3111-90	30 ohm/100MHz	R109	119-1031-15	1/10W 10k ohm
D603	001-1310-00	KDS160	L402	010-3111-90	30 ohm/100MHz	R120	119-3311-15	1/10W 330 ohm
D604	001-1310-00	KDS160	L602	010-3406-66	NLV25 22uH J	R125	119-1021-15	1/10W 1k ohm
D605	001-2601-90	MA728	L603	010-3406-66	NLV25 22uH J	R141	119-8221-15	1/10W 8.2k ohm
D606	001-4301-35	HZU6.2B2	L604	010-3103-64	1.5k ohm/100MHz	R142	119-1021-15	1/10W 1k ohm
D607	001-4301-38	HZU6.8B2	L605	010-3103-64	1.5k ohm/100MHz	R143	119-4721-15	1/10W 4.7k ohm
D660	001-7062-90	RBR1111C	L606	010-3103-64	1.5k ohm/100MHz	R144	119-2231-15	1/10W 22k ohm
DD201	060-6029-00	DC-DC CONVERTER	L607	010-3103-64	1.5k ohm/100MHz	R145	119-1021-15	1/10W 1k ohm
F201	060-8053-90	CCP2E13TTE	Q134	125-2041-96	RT1N436M	R180	116-1831-15	1/4WS 18k ohm
IC101	051-2056-00	TB2913H	Q135	125-0034-96	RT1P436M	R181	119-6831-15	1/10W 68k ohm
IC201	051-3349-00	HA13166	Q136	192-4155-51	2SC4155A	R185	119-1041-15	1/10W 100k ohm
IC203	051-3335-90	AN77L04M/E	Q137	125-0034-96	RT1P436M	R201	116-6801-15	1/4WS 68 ohm
IC204	051-6078-90	BA6285AFP	Q138	125-2041-96	RT1N436M	R202	119-1021-15	1/10W 1k ohm
IC280	051-3605-90	NJM2360A	Q201	192-4155-49	2SA4155A	R203	119-2231-15	1/10W 22k ohm
IC301	051-5834-90	UPC5701GR-028	Q202	131-1260-00	2SB1260	R204	116-6801-15	1/4WS 68 ohm
IC303	051-3322-90	BA15BCOWFP	Q203	192-4155-49	2SA4155A	R205	119-4731-15	1/10W 47k ohm
IC304	051-3322-90	BA15BCOWFP	Q205	125-0013-97	RN2427	R206	116-2221-15	1/4WS 2.2k ohm
IC401	051-3354-90	BA33BCOWFP	Q206	125-2041-92	RT1N141M	R207	116-2221-15	1/4WS 2.2k ohm
IC402	051-6711-10	TC94A34FG-002	Q207	125-4015-90	KTC2026	R208	119-4721-15	1/10W 4.7k ohm
IC403	051-6394-90	UDA1334ATS/N2	Q208	125-4014-90	KTC2020D	R209	119-2211-15	1/10W 220 ohm
IC501	051-3026-90	NJM4580V	Q209	125-0034-92	RT1P141M	R210	119-4721-15	1/10W 4.7k ohm
IC502	051-3026-90	NJM4580V	Q210	125-2041-93	RT1N241M	R211	119-0000-05	1/10W 0 ohm JW
IC503	051-3026-90	NJM4580V	Q211	131-1260-00	2SB1260	R212	119-2741-15	1/10W 270k ohm
IC504	051-3057-90	BA4558RFV	Q212	125-2041-93	RT1N241M	R213	116-1521-15	1/4WS 1.5k ohm
IC551	051-3057-90	BA4558RFV	Q213	131-1260-00	2SB1260	R214	116-1221-15	1/4WS 1.2k ohm
IC580	051-5035-90	TC9260AFG	Q302	125-2041-93	RT1N241M	R215	119-1031-15	1/10W 10k ohm
IC601	052-3966-01	uPD703270YGC	Q303	192-4155-49	2SA4155A	R216	116-3911-15	1/4WS 390 ohm
		308-8EAA	Q501	125-4012-90	KTD1304	R217	119-1031-15	1/10W 10k ohm
IC602	051-6600-58	HA12187FP	Q502	125-4012-90	KTD1304	R218	119-1031-15	1/10W 10k ohm
IC603	051-5438-38	BD4830G	Q503	125-4012-90	KTD1304	R219	116-6801-15	1/4WS 68 ohm
IC605	051-5437-08	S-80821ANMP	Q504	125-4012-90	KTD1304	R220	119-4721-15	1/10W 4.7k ohm
J101	074-1214-00	16P	Q505	125-4012-90	KTD1304	R221	119-8231-15	1/10W 82k ohm
J301	074-1138-79	29P	Q506	125-4012-90	KTD1304	R222	119-4731-15	1/10W 47k ohm
J601	074-1194-00	13P CeNET	Q602	125-2041-93	RT1N241M	R223	119-8231-15	1/10W 82k ohm
J602	074-1198-68	18P	Q603	190-1602-00	2SA1602A	R224	119-1031-15	1/10W 10k ohm
J604	076-0313-02	2P	Q605	190-1602-00	2SA1602A	R225	119-1031-15	1/10W 10k ohm
L1	010-2003-04	30uH	Q606	125-0034-92	RT1P141M	R226	116-6801-15	1/4WS 68 ohm
L3	010-2230-70	6.8uH	Q607	125-2041-96	RT1N436M	R227	119-1811-15	1/10W 180 ohm
L4	010-2230-70	6.8uH	Q608	192-4155-51	2SC4155A	R281	119-2291-15	1/10W 2.2 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R282	119-2291-15	1/10W 2.2 ohm	R526	119-1031-15	1/10W 10k ohm	R625	119-2231-15	1/10W 22k ohm
R283	119-2721-15	1/10W 2.7k ohm	R527	119-8221-15	1/10W 8.2k ohm	R626	119-1021-15	1/10W 1k ohm
R284	119-1531-15	1/10W 15k ohm	R528	119-8221-15	1/10W 8.2k ohm	R627	119-1021-15	1/10W 1k ohm
R285	116-3911-15	1/4WS 390 ohm	R529	119-1031-15	1/10W 10k ohm	R628	119-1021-15	1/10W 1k ohm
R301	119-1031-15	1/10W 10k ohm	R530	119-1031-15	1/10W 10k ohm	R629	119-1021-15	1/10W 1k ohm
R302	119-1031-15	1/10W 10k ohm	R531	119-2231-15	1/10W 22k ohm	R630	119-1031-15	1/10W 10k ohm
R303	119-1031-15	1/10W 10k ohm	R532	119-2231-15	1/10W 22k ohm	R631	119-2721-15	1/10W 2.7k ohm
R304	119-1021-15	1/10W 1k ohm	R533	119-2231-15	1/10W 22k ohm	R632	119-1031-15	1/10W 10k ohm
R305	119-3931-15	1/10W 39k ohm	R534	119-2231-15	1/10W 22k ohm	R637	119-4731-15	1/10W 47k ohm
R402	119-0000-05	1/10W 0 ohm JW	R535	119-2231-15	1/10W 22k ohm	R638	119-3331-15	1/10W 33k ohm
R403	119-2211-15	1/10W 220 ohm	R536	119-2231-15	1/10W 22k ohm	R639	119-1021-15	1/10W 1k ohm
R407	119-1031-15	1/10W 10k ohm	R537	119-3311-15	1/10W 330 ohm	R640	119-1021-15	1/10W 1k ohm
R408	119-3321-15	1/10W 3.3k ohm	R538	119-3311-15	1/10W 330 ohm	R642	119-1031-15	1/10W 10k ohm
R410	119-3331-15	1/10W 33k ohm	R539	119-3311-15	1/10W 330 ohm	R643	119-3321-15	1/10W 3.3k ohm
R411	119-3321-15	1/10W 3.3k ohm	R540	119-3311-15	1/10W 330 ohm	R644	119-0000-05	1/10W 0 ohm JW
R412	119-3321-15	1/10W 3.3k ohm	R541	119-3311-15	1/10W 330 ohm	R645	119-1031-15	1/10W 10k ohm
R415	119-0000-05	1/10W 0 ohm JW	R542	119-3311-15	1/10W 330 ohm	R646	119-1031-15	1/10W 10k ohm
R416	119-0000-05	1/10W 0 ohm JW	R543	119-1021-15	1/10W 1k ohm	R647	119-0000-05	1/10W 0 ohm JW
R417	119-0000-05	1/10W 0 ohm JW	R544	119-1021-15	1/10W 1k ohm	R648	119-1031-15	1/10W 10k ohm
R418	119-1031-15	1/10W 10k ohm	R545	119-1021-15	1/10W 1k ohm	R649	119-1031-15	1/10W 10k ohm
R419	119-1031-15	1/10W 10k ohm	R551	032-0140-58	1/10W 51k ohm(F)	R650	119-1021-15	1/10W 1k ohm
R422	119-2711-15	1/10W 270 ohm	R552	032-0140-58	1/10W 51k ohm(F)	R651	119-1031-15	1/10W 10k ohm
R423	119-2711-15	1/10W 270 ohm	R553	032-0140-58	1/10W 51k ohm(F)	R652	119-5621-15	1/10W 5.6k ohm
R424	119-2711-15	1/10W 270 ohm	R554	032-0140-58	1/10W 51k ohm(F)	R653	119-1041-15	1/10W 100k ohm
R425	119-1031-15	1/10W 10k ohm	R555	032-0140-51	1/10W 15k ohm(F)	R654	119-2221-15	1/10W 2.2k ohm
R426	119-1031-15	1/10W 10k ohm	R556	032-0140-51	1/10W 15k ohm(F)	R661	119-2221-15	1/10W 2.2k ohm
R427	119-1031-15	1/10W 10k ohm	R557	032-0140-51	1/10W 15k ohm(F)	R662	119-1031-15	1/10W 10k ohm
R429	119-1031-15	1/10W 10k ohm	R558	032-0140-51	1/10W 15k ohm(F)	R663	119-2711-15	1/10W 270 ohm
R430	119-1031-15	1/10W 10k ohm	R559	119-1011-15	1/10W 100 ohm	R664	119-2221-15	1/10W 2.2k ohm
R431	119-1031-15	1/10W 10k ohm	R561	119-1011-15	1/10W 100 ohm	R665	119-4731-15	1/10W 47k ohm
R439	119-0000-05	1/10W 0 ohm JW	R562	119-2241-15	1/10W 220k ohm	R668	119-1031-15	1/10W 10k ohm
R440	119-0000-05	1/10W 0 ohm JW	R563	119-2241-15	1/10W 220k ohm	R672	119-1041-15	1/10W 100k ohm
R501	119-5631-15	1/10W 56k ohm	R587	119-1041-15	1/10W 100k ohm	R675	119-2221-15	1/10W 2.2k ohm
R502	119-5631-15	1/10W 56k ohm	R588	119-1041-15	1/10W 100k ohm	R676	119-2221-15	1/10W 2.2k ohm
R503	119-1031-15	1/10W 10k ohm	R596	119-1021-15	1/10W 1k ohm	R677	119-2221-15	1/10W 2.2k ohm
R504	119-1031-15	1/10W 10k ohm	R603	116-6801-15	1/4WS 68 ohm	R681	119-4731-15	1/10W 47k ohm
R505	119-1041-15	1/10W 100k ohm	R604	119-3321-15	1/10W 3.3k ohm	R682	119-4731-15	1/10W 47k ohm
R508	032-0140-89	1/10W 47k ohm(F)	R606	119-1031-15	1/10W 10k ohm	R683	119-1041-15	1/10W 100k ohm
R509	032-0140-89	1/10W 47k ohm(F)	R607	119-1531-15	1/10W 15k ohm	R684	119-1041-15	1/10W 100k ohm
R510	032-0140-89	1/10W 47k ohm(F)	R608	119-1031-15	1/10W 10k ohm	R694	119-1031-15	1/10W 10k ohm (PE-2826K-A/B)
R511	032-0140-89	1/10W 47k ohm(F)	R609	119-4731-15	1/10W 47k ohm	R695	119-1031-15	1/10W 10k ohm (PE-2826B-A)
R512	032-0140-89	1/10W 47k ohm(F)	R610	119-4721-15	1/10W 4.7k ohm	R697	119-1031-15	1/10W 10k ohm
R513	032-0140-89	1/10W 47k ohm(F)	R611	119-2221-15	1/10W 2.2k ohm	S201	013-7106-00	TKR00120670MM
R514	032-0140-89	1/10W 47k ohm(F)	R612	119-2221-15	1/10W 2.2k ohm	S202	013-7206-50	SPPB530701
R515	032-0140-89	1/10W 47k ohm(F)	R613	119-4731-15	1/10W 4.7k ohm	S601	013-6100-00	SWITCH
R516	119-1041-15	1/10W 100k ohm	R614	119-4731-15	1/10W 47k ohm	SUP1	060-0122-20	DSP-141N-S00B
R517	119-1021-15	1/10W 1k ohm	R615	119-1031-15	1/10W 10k ohm	X402	060-1535-90	16.934MHz
R518	119-1021-15	1/10W 1k ohm	R616	119-0000-05	1/10W 0 ohm JW	X601	060-1541-90	3.14MHz
R519	119-1041-15	1/10W 100k ohm	R617	119-0000-05	1/10W 0 ohm JW	X602	061-1056-00	32.768KHz
R520	119-1041-15	1/10W 100k ohm	R618	119-0000-05	1/10W 0 ohm JW	PWB	039-2853-00	PWB(WITHOUT COMPONENT)
R521	119-1041-15	1/10W 100k ohm	R619	119-0000-05	1/10W 0 ohm JW			
R522	119-1041-15	1/10W 100k ohm	R620	119-0000-05	1/10W 0 ohm JW			
R523	119-1031-15	1/10W 10k ohm	R621	119-4731-15	1/10W 47k ohm			
R524	119-8221-15	1/10W 8.2k ohm	R622	119-4721-15	1/10W 4.7k ohm			
R525	119-8221-15	1/10W 8.2k ohm	R623	119-4731-15	1/10W 47k ohm			

CD mechanism section: 929-5000-80
SENSOR PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB	PWB	039-2675-20	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			


DXZ765MP/DXZ766MP

CD PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C27	046-3332-78	0.033uF	R2	117-1001-15	1/8W 10 ohm
C2	163-1073-35	16V 100uF	C29	046-6822-58	6800pF	R3	033-2211-15	1/10W 220 ohm
C4	178-1052-78	1uF	C30	168-1042-78	16V 0.1uF	R5	033-0000-05	1/10W 0 ohm
C5	042-0560-85	6.3V 100uF	C31	046-4712-58	470pF	R6	033-5621-15	1/10W 5.6k ohm
C6	178-1052-78	1uF	C32	046-4712-58	470pF	R7	033-4731-15	1/10W 47k ohm
C8	178-1052-78	1uF	C33	168-1042-78	16V 0.1uF	R8	033-3341-15	1/10W 330k ohm
C10	168-1042-78	16V 0.1uF	C34	168-4732-78	16V 0.047uF	R9	033-2231-15	1/10W 22k ohm
C11	168-1042-78	16V 0.1uF	C35	168-4732-78	16V 0.047uF	R10	033-2231-15	1/10W 22k ohm
C12	045-4701-50	47pF	C36	045-1007-50	10pF	R11	033-2731-15	1/10W 27k ohm
C13	046-1532-78	0.015uF	C37	045-1007-50	10pF	R12	033-4731-15	1/10W 47k ohm
C14	168-1042-78	16V 0.1uF	C38	168-1042-78	16V 0.1uF	R13	033-2731-15	1/10W 27k ohm
C15	046-1032-78	0.01uF	C39	046-5622-58	5600pF	R14	033-1531-15	1/10W 15k ohm
C17	046-4722-58	4700pF	C40	168-1042-78	16V 0.1uF	R15	033-2731-15	1/10W 27k ohm
C18	046-1522-58	1500pF	CCT1	050-0140-63	1/32W 47k ohm x4J	R16	033-8231-15	1/10W 82k ohm
C19	168-1042-78	16V 0.1uF	D3	001-0367-91	1SS226-TE85L	R17	033-2731-15	1/10W 27k ohm
C20	168-1042-78	16V 0.1uF	IC1	051-6079-90	BA5830FP-E2	R18	033-8231-15	1/10W 82k ohm
C21	046-6812-58	680pF	IC2	051-6399-00	TC94A15F	R19	033-1051-15	1/10W 1M ohm
C22	168-1042-78	16V 0.1uF	J101	074-1228-79	29P	R20	119-2221-15	1/10W 2.2k ohm
C23	046-1532-78	0.015uF	J201	074-1138-65	15P	X2	061-3534-90	16.92MHz
C24	168-1042-78	16V 0.1uF	J301	074-1138-60	10P	PWB	039-2741-20	PWB(WITHOUT COMPONENT)
C25	045-6801-50	68pF	Q3	131-1188-50	2SB1188PQR			
C26	168-1042-78	16V 0.1uF	R1	117-6811-15	1/8W 680 ohm			

CONNECTOR LAYOUT

Rear view

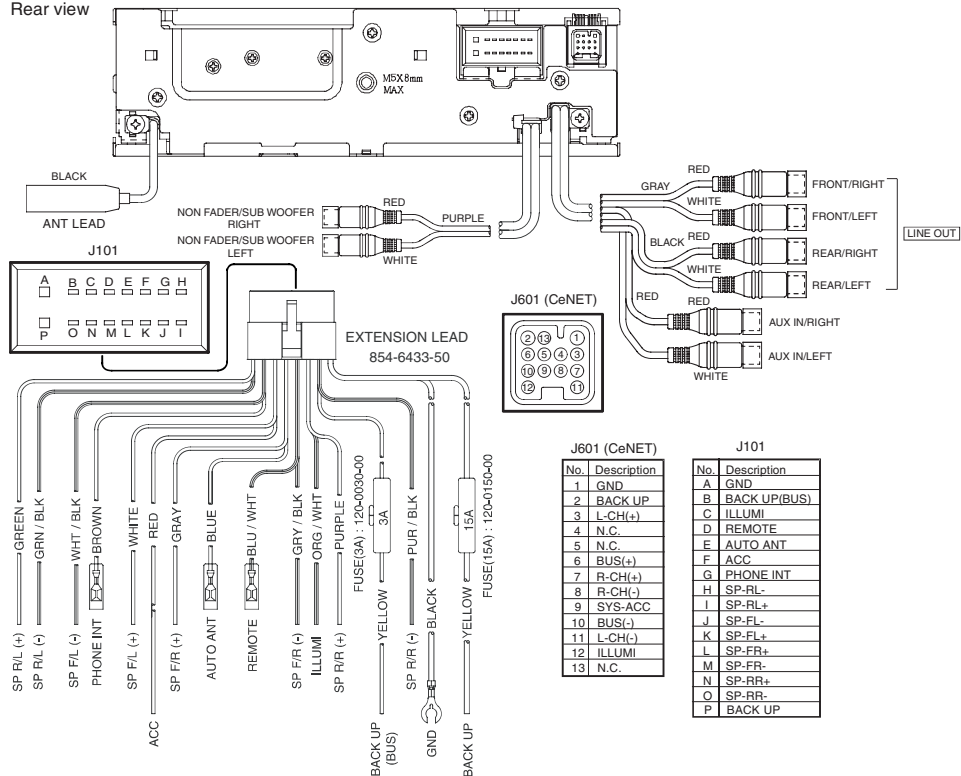

PRINTED WIRING BOARD 1/3 SENSOR PWB(B2)/CD PWB(B3) section

