

PARTS LIST

* New Parts. △ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

Y : PX (Far East, Hawaii)

Y : AAFES (Europe)

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

TK-2170 (Y50-5850-XX)

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-2170					
1	1A	*	A02-3890-03	PLASTIC CABINET ASSY	K K2
2	1B	*	A02-3891-13	PLASTIC CABINET ASSY	
3	3A	*	A10-4088-01	CHASSIS	
5	3A		B01-0694-03	ESCUTCHEON	
6	2D	*	B09-0686-03	CAP ACCESSORY	
7	2B	*	B11-1826-03	ILLUMINATION GUIDE	
8	2A	*	B11-1827-04	ILLUMINATION GUIDE	
9	2B	*	B11-1828-04	FILTER	
10	2B	*	B38-0901-05	LCD	
13	1A,1B	*	B43-1178-04	BADGE	
17	1C	*	B62-1809-00	INSTRUCTION MANUAL	
20	2A		E04-0436-05	RF COAXIAL RECEPTACLE (SMA)	
21	2A		E23-1188-04	TERMINAL	
22	3A		E23-1189-04	TERMINAL	
23	2B	*	E29-1204-04	INTER CONNECTOR (LCD)	
24	2B	*	E29-1211-04	INTER CONNECTOR (4-KEY)	
25	2A	*	E37-1142-05	FLAT CABLE	
26	3A	*	E72-0421-03	TERMINAL BLOCK	
28	3A	*	F07-1890-04	COVER	
-	-	*	G10-1333-04	FIBROUS SHEET (CABINET ASSY)	
31	3A	*	G11-4315-04	SHEET	
32	2A	*	G11-4316-04	SHEET	
33	2B	*	G11-4335-04	SHEET	
34	1A,1B	*	G11-4351-04	SHEET	K K2
35	2A		G13-1885-04	CUSHION	
36	3A		G13-2001-04	CUSHION	
38	2A		G53-1603-04	PACKING	
39	2B	*	G53-1650-12	PACKING	
40	1A	*	G53-1651-01	PACKING	
41	1B	*	G53-1652-11	PACKING	
42	2B	*	G53-1653-03	PACKING	
43	3A	*	G53-1654-04	PACKING	
44	3A	*	G53-1655-04	PACKING	
46	3C		H12-3150-02	PACKING FIXTURE	
47	2D		H25-0029-04	PROTECTION BAG (60/110/0.07)	
48	1D	*	H52-2066-02	ITEM CARTON CASE	
50	2B	*	J19-5481-03	HOLDER	
51	2D	*	J19-5483-13	HOLDER ACCESSORY	
52	1B	*	J21-8488-03	MOUNTING HARDWARE	
53	2C		J29-0701-05	HOOK ACCESSORY	
54	3A	*	J82-0106-05	FPC	
55	2A	*	J99-0399-04	DOUBLE-SIDED TAPE (4 x 7mm)	
56	1B		K29-9278-13	KNOB (VOLUME)	
57	1B	*	K29-9339-03	KNOB (PTT)	
58	1B	*	K29-9340-03	KNOB (SELECTOR)	
59	1B	*	K29-9341-03	KEY TOP (SIDE)	
A	2A,3A	*	N09-2438-05	BINDING HEAD SCREW	
B	2A		N14-0583-04	CIRCULAR NUT	
C	3B		N14-0805-04	CIRCULAR NUT	
D	3A	*	N30-2610-48	PAN HEAD MACHINE SCREW	
E	3A		N30-3006-45	PAN HEAD MACHINE SCREW	

Ref. No.	Address	New parts	Parts No.	Description	Desti- nation
F	3A	*	N79-2030-48	PAN HEAD TAPTITE SCREW	
G	2A,2B		N83-2005-48	PAN HEAD TAPTITE SCREW	
61	3A	*	R31-0655-05	VARIABLE RESISTOR	
63	1B	*	T07-0369-05	SPEAKER	
64	2B		T91-0650-05	MIC ELEMENT	
66	2A		W02-3684-05	SELECTOR	
TX-RX UNIT (X57-7000-XX) -10 : K -11 : K2					
D2			B30-2278-05	LED (RED/YELLOW)	K2 K2
D5			B30-2210-05	LED (TLY)	
D7			B30-2210-05	LED (TLY)	
D8,9			B30-2050-05	LED	
D12,13			B30-2050-05	LED	
C2			CK73HB1H102K	CHIP C 1000PF K	
C3			CK73FB1A475K	CHIP C 4.7UF K	
C4			CK73GB1E105K	CHIP C 1.0UF K	
C5,6			CK73HB1H102K	CHIP C 1000PF K	
C7			CK73HB1A104K	CHIP C 0.10UF K	
C9			CK73GB1E105K	CHIP C 1.0UF K	
C11			CK73FB1A225K	CHIP C 2.2UF K	
C13			CK73HB1H102K	CHIP C 1000PF K	
C14,15			CK73HB1E472K	CHIP C 4700PF K	
C16,17			CK73HB1H102K	CHIP C 1000PF K	
C18			CK73HB1A104K	CHIP C 0.10UF K	
C19			CK73HB1H102K	CHIP C 1000PF K	
C20			CK73HB1E472K	CHIP C 4700PF K	
C21			CK73HB1H102K	CHIP C 1000PF K	
C22			CK73HB1E472K	CHIP C 4700PF K	
C23,24			CK73GB1E105K	CHIP C 1.0UF K	
C25			CK73HB1E472K	CHIP C 4700PF K	
C26			CK73HB1H102K	CHIP C 1000PF K	
C27			C92-0712-05	CHIP-TAN 22UF 6.3WV	
C28-31			CK73HB1H102K	CHIP C 1000PF K	
C32			CK73HB1A104K	CHIP C 0.10UF K	
C33,34			CK73HB1H102K	CHIP C 1000PF K	
C35			CK73HB1A104K	CHIP C 0.10UF K	
C37			CK73FB1A475K	CHIP C 4.7UF K	
C38,39			CK73HB1A473K	CHIP C 0.047UF K	
C40	CK73HB1H102K	CHIP C 1000PF K			
C42	CK73HB1H681K	CHIP C 680PF K			
C43,44	CK73HB1C103K	CHIP C 0.010UF K			
C45	C92-0712-05	CHIP-TAN 22UF 6.3WV			
C46	CK73HB1H102K	CHIP C 1000PF K			
C47	CK73GB1E105K	CHIP C 1.0UF K			
C48-51	CK73HB1H102K	CHIP C 1000PF K			
C52	CK73HB1A104K	CHIP C 0.10UF K			
C53	CK73HB1C103K	CHIP C 0.010UF K			

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C54			CK73HB1H471K	CHIP C 470PF K		C128			CK73HB1H102K	CHIP C 1000PF K	
C55			CK73GB1E105K	CHIP C 1.0UF K		C129			CK73GB1E105K	CHIP C 1.0UF K	
C56			CK73HB1A104K	CHIP C 0.10UF K		C130			CK73HB1A104K	CHIP C 0.10UF K	
C57			C92-0662-05	CHIP-TAN 15UF 6.3WV		C131			CK73HB1H821K	CHIP C 820PF K	
C58			CK73HB1H102K	CHIP C 1000PF K		C132			CK73HB1A104K	CHIP C 0.10UF K	
C59			CC73HCH1H220J	CHIP C 22PF J		C133			CK73GB1E105K	CHIP C 1.0UF K	
C60			CC73HCH1H120J	CHIP C 12PF J		C134			CK73HB1A104K	CHIP C 0.10UF K	
C61			CK73HB1A104K	CHIP C 0.10UF K		C135			CK73GB1E105K	CHIP C 1.0UF K	
C62			CC73HCH1H010C	CHIP C 1.0PF C		C136			CK73HB1H561K	CHIP C 560PF K	
C63			CC73HCH1H120J	CHIP C 12PF J		C137			CK73HB1H102K	CHIP C 1000PF K	
C65			CK73HB1A104K	CHIP C 0.10UF K		C138			CK73HB1A104K	CHIP C 0.10UF K	
C66			CK73HB1C103K	CHIP C 0.010UF K		C139			CK73GB1E105K	CHIP C 1.0UF K	
C67			C92-0514-05	CHIP-TAN 2.2UF 10WV		C140			CK73HB1A104K	CHIP C 0.10UF K	
C68			CK73HB1H102K	CHIP C 1000PF K		C142,143			CK73GB1E105K	CHIP C 1.0UF K	
C69			C92-0560-05	CHIP-TAN 10UF 6.3WV		C145-148			CK73HB1H102K	CHIP C 1000PF K	
C70			CK73HB1E682K	CHIP C 6800PF K		C149			CK73HB1H221K	CHIP C 220PF K	
C71			CK73HB1H392K	CHIP C 3900PF K		C150,151			CK73FB1A225K	CHIP C 2.2UF K	
C72			CK73HB1H122K	CHIP C 1200PF K		C153			CK73GB1E105K	CHIP C 1.0UF K	
C73			CC73HCH1H470J	CHIP C 47PF J		C154,155			CK73HB1H102K	CHIP C 1000PF K	
C74			CK73HB1H122K	CHIP C 1200PF K		C157			CK73GB1A224K	CHIP C 0.22UF K	
C75			CK73HB1C153K	CHIP C 0.015UF K		C158			CK73HB1A104K	CHIP C 0.10UF K	
C76			CK73HB1H332K	CHIP C 3300PF K		C159			CC73HCH1H101J	CHIP C 100PF J	
C77			CK73HB1C153K	CHIP C 0.015UF K		C161			CC73HCH1H101J	CHIP C 100PF J	
C78			CK73HB1A104K	CHIP C 0.10UF K		C162			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C79			CK73HB1H222K	CHIP C 2200PF K		C166			CK73HB1H102K	CHIP C 1000PF K	
C81			CK73HB1A104K	CHIP C 0.10UF K		C168			CK73HB1A473K	CHIP C 0.047UF K	
C82			CC73HCH1H101J	CHIP C 100PF J		C169			CK73HB1A393K	CHIP C 0.039UF K	
C84			CK73HB1H102K	CHIP C 1000PF K		C170			CK73HB1H102K	CHIP C 1000PF K	
C85			CK73HB1C123K	CHIP C 0.012UF K		C171			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C87			CK73HB1A104K	CHIP C 0.10UF K		C172			C92-0665-05	TANTAL 100UF 6.3WV	
C88,89			CC73HCH1H010B	CHIP C 1.0PF B		C173			CK73HB1H221K	CHIP C 220PF K	
C90,91			CK73GB1E104K	CHIP C 0.10UF K		C174			CK73HB1H102K	CHIP C 1000PF K	
C93			CK73GB1E105K	CHIP C 1.0UF K		C175			CK73HB1C103K	CHIP C 0.010UF K	
C95		*	CK73HB1A224K	CHIP C 0.22UF K		C176		*	CK73HB1A224K	CHIP C 0.22UF K	
C96			CK73GB1E105K	CHIP C 1.0UF K		C177			CK73HB1A104K	CHIP C 0.10UF K	
C97			CC73HCH1H101J	CHIP C 100PF J		C178			CK73GB1E105K	CHIP C 1.0UF K	
C98			CK73HB1A683K	CHIP C 0.068UF K		C180			CC73HCH1H101J	CHIP C 100PF J	
C99,100			CK73FB1A475K	CHIP C 4.7UF K		C181			CK73GB0J475K	CHIP C 4.7UF K	
C102			CK73HB1C103K	CHIP C 0.010UF K		C182			CK73HB1H681K	CHIP C 680PF K	
C103			CK73FB1A475K	CHIP C 4.7UF K		C183			CK73HB1H102K	CHIP C 1000PF K	
C104			CK73GB1E104K	CHIP C 0.10UF K		C184			CK73HB1H222K	CHIP C 2200PF K	
C106			CK73HB1H102K	CHIP C 1000PF K		C185			CK73HB1C103K	CHIP C 0.010UF K	
C107			CK73HB1A104K	CHIP C 0.10UF K		C186			CC73HCH1H270J	CHIP C 27PF J	
C108			CK73GB1E105K	CHIP C 1.0UF K		C187			CK73HB1C103K	CHIP C 0.010UF K	
C109			CC73HCH1H100D	CHIP C 10PF D		C188			CC73HCH1H270J	CHIP C 27PF J	
C110			CK73HB1H102K	CHIP C 1000PF K		C189			CK73GB1E104K	CHIP C 0.10UF K	
C111			CK73HB1C103K	CHIP C 0.010UF K		C190-192			CK73HB1H102K	CHIP C 1000PF K	
C112			CC73HCH1H680J	CHIP C 68PF J		C197,198			CK73HB1H102K	CHIP C 1000PF K	
C113-115			CK73HB1A104K	CHIP C 0.10UF K		C199,200			CK73HB1A104K	CHIP C 0.10UF K	
C116			CC73HCH1H120J	CHIP C 12PF J		C201		*	CK73HB1A224K	CHIP C 0.22UF K	
C117			CK73GB1E105K	CHIP C 1.0UF K		C423			CK73FB1A475K	CHIP C 4.7UF K	
C118			CK73HB1A104K	CHIP C 0.10UF K		C501			CK73HB1C103K	CHIP C 0.010UF K	
C119			CK73HB1C103K	CHIP C 0.010UF K		C502			CC73HCH1H470J	CHIP C 47PF J	
C120			CK73FB1A225K	CHIP C 2.2UF K		C503			CC73HCH1H101J	CHIP C 100PF J	
C121			CK73HB1A393K	CHIP C 0.039UF K		C504			CC73HCH1H100D	CHIP C 10PF D	
C122			CK73HB1H102K	CHIP C 1000PF K		C505			CC73HCH1H101J	CHIP C 100PF J	
C123			CC73HCH1H680J	CHIP C 68PF J		C506			CK73HB1C103K	CHIP C 0.010UF K	
C125			CK73HB1A104K	CHIP C 0.10UF K		C507			CC73HCH1H101J	CHIP C 100PF J	
C126			CC73HCH1H470J	CHIP C 47PF J		C508			CK73HB1H471K	CHIP C 470PF K	
C127			CC73HCH1H181J	CHIP C 180PF J		C509			CC73HCH1H100D	CHIP C 10PF D	

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C510			CK73HB1C223K	CHIP C 0.022UF K		C611			CC73HCH1H470J	CHIP C 47PF J	
C511			CK73GB1E105K	CHIP C 1.0UF K		C612			CK73HB1H102K	CHIP C 1000PF K	
C512			CK73HB1C103K	CHIP C 0.010UF K		C613			CK73GB1E105K	CHIP C 1.0UF K	
C513			CK73HB1H102K	CHIP C 1000PF K		C615,616			CK73HB1H102K	CHIP C 1000PF K	
C514			CK73HB1H471K	CHIP C 470PF K		C617			CC73HCH1H390J	CHIP C 39PF J	
C515			CK73HB1H102K	CHIP C 1000PF K		C618			CK73HB1H102K	CHIP C 1000PF K	
C516			CK73GB1E105K	CHIP C 1.0UF K		C619			CC73HCH1H150J	CHIP C 15PF J	
C517			CK73HB1C103K	CHIP C 0.010UF K		C622			CK73HB1H102K	CHIP C 1000PF K	
C518			CK73HB1H102K	CHIP C 1000PF K		C624			CC73HCH1H050B	CHIP C 5.0PF B	
C519-521			CK73GB1E105K	CHIP C 1.0UF K		C625			CK73HB1H102K	CHIP C 1000PF K	
C522			CK73HB1H471K	CHIP C 470PF K		C626			CC73HCH1H101J	CHIP C 100PF J	
C523			C92-0001-05	CHIP-TAN 0.1UF 35WV		C629			CC73HCH1H270J	CHIP C 27PF J	
C524			CK73HB1H471K	CHIP C 470PF K		C632			C92-0514-05	CHIP-TAN 2.2UF 10WV	
C525			C92-0543-05	CHIP-TAN 3.3UF 10WV		C633			CK73HB1H102K	CHIP C 1000PF K	
C526			C92-0001-05	CHIP-TAN 0.1UF 35WV		C635			CK73HB1H102K	CHIP C 1000PF K	
C527			CC73HCH1H120J	CHIP C 12PF J		C636			CC73HCH1H560J	CHIP C 56PF J	
C528			C92-0002-05	CHIP-TAN 0.22UF 35WV		C639			CK73HB1H102K	CHIP C 1000PF K	
C529			CC73HCH1H020C	CHIP C 2.0PF C		C641			CC73HCH1H101J	CHIP C 100PF J	
C530			CC73HCH1H080B	CHIP C 8.0PF B		C643			CK73HB1C103K	CHIP C 0.010UF K	
C531			CC73HCH1H120J	CHIP C 12PF J		C644			CK73FB1A225K	CHIP C 2.2UF K	
C532			CK73HB1H471K	CHIP C 470PF K		C646-648			CK73HB1H102K	CHIP C 1000PF K	
C533			CC73HCH1H050C	CHIP C 5.0PF C		C651			CK73HB1A104K	CHIP C 0.10UF K	
C534,535			CK73HB1H102K	CHIP C 1000PF K		C652			CC73GCH1H270G	CHIP C 27PF G	
C536			CC73HCH1H330J	CHIP C 33PF J		C655			CC73GCH1H680G	CHIP C 68PF G	
C537			CC73HCH1H180J	CHIP C 18PF J		C657			CC73GCH1H070D	CHIP C 7.0PF D	
C538			CC73HCH1H050C	CHIP C 5.0PF C		C658			CK73HB1H102K	CHIP C 1000PF K	
C541			CC73HCH1H560J	CHIP C 56PF J		C669			CC73GCH1H180J	CHIP C 18PF J	
C542			CK73GB1E105K	CHIP C 1.0UF K		C670			CC73GCH1H680J	CHIP C 68PF J	
C543			CC73HCH1H090D	CHIP C 9.0PF D		C671			CC73GCH1H020B	CHIP C 2.0PF B	
C544			CC73HCH1H050C	CHIP C 5.0PF C		C673			CK73HB1H102K	CHIP C 1000PF K	
C545			CC73HCH1H220J	CHIP C 22PF J		C675			CC73GCH1H270J	CHIP C 27PF J	
C548			CC73HCH1H300J	CHIP C 30PF J		C676			CK73GB1H102K	CHIP C 1000PF K	
C549			CC73HCH1H150J	CHIP C 15PF J		C677			CC73GCH1H270J	CHIP C 27PF J	
C550			CK73HB1H471K	CHIP C 470PF K		C678			CC73GCH1H080D	CHIP C 8.0PF D	
C551			CC73HCH1H75B	CHIP C 0.75PF B		C679			CC73GCH1H100D	CHIP C 10PF D	
C552			CK73HB1H471K	CHIP C 470PF K		C680			CC73GCH1H180J	CHIP C 18PF J	
C555,556			CC73HCH1H080B	CHIP C 8.0PF B		C681			CC73GCH1H110J	CHIP C 11PF J	
C558			CC73HCH1H100D	CHIP C 10PF D		C682			CC73GCH1H130J	CHIP C 13PF J	
C559			CC73HCH1H100B	CHIP C 10PF B		C683			CC73GCH1H100D	CHIP C 10PF D	
C560			CK73HB1H471K	CHIP C 470PF K		C701,702			CK73HB1A104K	CHIP C 0.10UF K	
C562,563			CK73HB1H102K	CHIP C 1000PF K		C703			CC73HCH1H560J	CHIP C 56PF J	
C564,565			CK73HB1A104K	CHIP C 0.10UF K		C704			CK73HB1C103K	CHIP C 0.010UF K	
C566,567			CC73HCH1H0R5B	CHIP C 0.5PF B		C705			CC73HCH1H220J	CHIP C 22PF J	
C568			CK73HB1C103K	CHIP C 0.010UF K		C706			CC73HCH1H560J	CHIP C 56PF J	
C569			CK73HB1H102K	CHIP C 1000PF K		C707			CK73HB1H331K	CHIP C 330PF K	
C570			CK73HB1C103K	CHIP C 0.010UF K		C708,709			CK73HB1A104K	CHIP C 0.10UF K	
C571			CK73HB1H102K	CHIP C 1000PF K		C710			CC73HCH1H470J	CHIP C 47PF J	
C572			C92-0628-05	CHIP-TAN 10UF 10WV		C711			CC73HCH1H680J	CHIP C 68PF J	
C573			CK73HB1H102K	CHIP C 1000PF K		C712			CK73HB1H331K	CHIP C 330PF K	
C574			CC73HCH1H330J	CHIP C 33PF J		C713			CK73HB1A104K	CHIP C 0.10UF K	
C575			CC73HCH1H040C	CHIP C 4.0PF C		C714			CC73HCH1H390J	CHIP C 39PF J	
C576			CC73HCH1H150J	CHIP C 15PF J		C715			CK73HB1H471K	CHIP C 470PF K	
C577,578			CK73HB1H102K	CHIP C 1000PF K		C716			CK73HB1H182K	CHIP C 1800PF K	
C579			CC73HCH1H100D	CHIP C 10PF D		C717			CK73GB1E105K	CHIP C 1.0UF K	
C580,581			CK73HB1H102K	CHIP C 1000PF K		C718			C92-0712-05	CHIP-TAN 22UF 6.3WV	
C601			CK73HB1H102K	CHIP C 1000PF K		C719			CC73HCH1H820J	CHIP C 82PF J	
C602			CC73HCH1H060D	CHIP C 6.0PF D		C720			CK73HB1C103K	CHIP C 0.010UF K	
C603			CK73HB1H102K	CHIP C 1000PF K		C721			CK73HB1H102K	CHIP C 1000PF K	
C604			CC73HCH1H060D	CHIP C 6.0PF D		C722			CK73HB1A104K	CHIP C 0.10UF K	
C610			CK73HB1H102K	CHIP C 1000PF K		C723			CK73HB1A333K	CHIP C 0.033UF K	

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C724			CC73HCH1H330J	CHIP C 33PF J		J1			E11-0457-05	PHONE JACK (2.5/3.5)	
C725			CK73HB1A104K	CHIP C 0.10UF K		F901			F53-0324-05	FUSE	
C726			CK73HB1C103K	CHIP C 0.010UF K		CD701			L79-1474-05	TUNING COIL	
C727			CK73HB1H102K	CHIP C 1000PF K		CF701		*	L72-1010-05	CERAMIC FILTER	
C728			CK73HB1C103K	CHIP C 0.010UF K		CF702		*	L72-1012-05	CERAMIC FILTER	
C729			CC73HCH1H010B	CHIP C 1.0PF B		L1			L92-0140-05	CHIP FERRITE	
C730			CC73HCH1H080B	CHIP C 8.0PF B		L2-9			L92-0138-05	CHIP FERRITE	
C732,733			CK73HB1C103K	CHIP C 0.010UF K		L10			L92-0140-05	CHIP FERRITE	
C734,735			CK73HB1H102K	CHIP C 1000PF K		L11			L92-0149-05	CHIP FERRITE	
C736			CC73HCH1H120G	CHIP C 12PF G		L12,13			L92-0419-15	CHIP FERRITE	
C737			CK73HB1C103K	CHIP C 0.010UF K		L14,15			L92-0138-05	CHIP FERRITE	
C738			CC73HCH1H020B	CHIP C 2.0PF B		L501			L41-4795-39	SMALL FIXED INDUCTOR (4.7UH)	
C739,740			CC73HCH1H120J	CHIP C 12PF J		L502		*	L40-1075-57	SMALL FIXED INDUCTOR (10.0NH)	
C741			CC73HCH1H030B	CHIP C 3.0PF B		L503			L92-0138-05	CHIP FERRITE	
C742			CC73HCH1H050B	CHIP C 5.0PF B		L504			L40-3375-57	SMALL FIXED INDUCTOR (33.0NH)	
C743			CK73HB1C103K	CHIP C 0.010UF K		L505			L40-1001-86	SMALL FIXED INDUCTOR (10UH)	
C744			CC73HCH1H010B	CHIP C 1.0PF B		L506			L40-1802-86	SMALL FIXED INDUCTOR (18UH)	
C745,746			CK73HB1H102K	CHIP C 1000PF K		L507			L40-2775-57	SMALL FIXED INDUCTOR (27.0NH)	
C747			CC73HCH1H050B	CHIP C 5.0PF B		L508,509			L40-1502-86	SMALL FIXED INDUCTOR (15UH)	
C748,749			CK73HB1H102K	CHIP C 1000PF K		L511			L40-1085-57	SMALL FIXED INDUCTOR (100NH)	
C750			CC73HCH1H080B	CHIP C 8.0PF B		L512			L41-3378-14	SMALL FIXED INDUCTOR (33NH)	
C751			CC73HCH1H020B	CHIP C 2.0PF B		L513			L41-2278-14	SMALL FIXED INDUCTOR (22NH)	
C752			CC73HCH1H390J	CHIP C 39PF J		L517,518			L40-1001-86	SMALL FIXED INDUCTOR (10UH)	
C753			CK73HB1H102K	CHIP C 1000PF K		L519			L92-0138-05	CHIP FERRITE	
C755			CC73HCH1H030B	CHIP C 3.0PF B		L520,521			L40-1085-57	SMALL FIXED INDUCTOR (100NH)	
C756			CK73HB1H102K	CHIP C 1000PF K		L601			L40-4775-57	SMALL FIXED INDUCTOR (47.0NH)	
C757			CC73HCH1H040B	CHIP C 4.0PF B		L602			L40-1085-57	SMALL FIXED INDUCTOR (100NH)	
C758			CC73HCH1H270J	CHIP C 27PF J		L603			L92-0138-05	CHIP FERRITE	
C759			CC73HCH1H1R5B	CHIP C 1.5PF B		L604			L40-4775-57	SMALL FIXED INDUCTOR (47.0NH)	
C760			CK73HB1H102K	CHIP C 1000PF K		L605		*	L41-1585-45	SMALL FIXED INDUCTOR (150NH)	
C764,765			CK73HB1H102K	CHIP C 1000PF K		L606			L92-0149-05	CHIP FERRITE	
C767			CK73HB1H102K	CHIP C 1000PF K		L607		*	L41-1275-45	SMALL FIXED INDUCTOR (12NH)	
C768			CC73HCH1H080B	CHIP C 8.0PF B		L609			L92-0149-05	CHIP FERRITE	
C769			CC73HCH1H1R5B	CHIP C 1.5PF B		L610			L34-4563-05	AIR-CORE COIL	
C770			CC73HCH1H220J	CHIP C 22PF J		L611			L34-4577-05	AIR-CORE COIL	
C771			CC73HCH1H470J	CHIP C 47PF J		L612			L34-4574-05	AIR-CORE COIL	
C772			CC73HCH1H040B	CHIP C 4.0PF B		L613			L34-4563-05	AIR-CORE COIL	
C773			CC73HCH1H030B	CHIP C 3.0PF B		L614			L41-2295-39	SMALL FIXED INDUCTOR (2.2UH)	
C774			CK73HB1H102K	CHIP C 1000PF K		L615			L34-4576-05	AIR-CORE COIL	
C775			CC73HCH1H150J	CHIP C 15PF J		L616			L34-4575-05	AIR-CORE COIL	
C776			CC73HCH1H010B	CHIP C 1.0PF B		L617			L34-4567-05	AIR-CORE COIL	
C777			CC73HCH1H100B	CHIP C 10PF B		L618			L34-4566-05	AIR-CORE COIL	
C778			CC73HCH1H030B	CHIP C 3.0PF B		L701			L40-1585-92	SMALL FIXED INDUCTOR (150NH)	
C779			CC73HCH1H330J	CHIP C 33PF J		L702			L40-1085-57	SMALL FIXED INDUCTOR (100NH)	
C901			CK73HB1H102K	CHIP C 1000PF K		L703			L40-1591-86	SMALL FIXED INDUCTOR (1.5UH)	
C904			CK73HB1H102K	CHIP C 1000PF K		L704			L92-0138-05	CHIP FERRITE	
C906			CK73HB1H102K	CHIP C 1000PF K		L705			L41-5685-39	SMALL FIXED INDUCTOR (0.56UH)	
C916			CK73HB1H102K	CHIP C 1000PF K		L706			L40-5675-57	SMALL FIXED INDUCTOR (56.0NH)	
C924-926			CK73HB1H102K	CHIP C 1000PF K		L707			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
C928			CK73HB1H102K	CHIP C 1000PF K		L708			L40-5675-57	SMALL FIXED INDUCTOR (56.0NH)	
C929			CC73HCH1H470J	CHIP C 47PF J		L709			L40-1285-92	SMALL FIXED INDUCTOR (120NH)	
TC501,502			C05-0384-05	CERAMIC TRIMMER (10PF)		L710			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
101	2A	*	E37-1141-15	FLAT CABLE		L711			L41-6878-14	SMALL FIXED INDUCTOR (68NH)	
CN1		*	E41-2440-05	FLAT CABLE CONNECTOR		L712			L92-0138-05	CHIP FERRITE	
CN8			E40-5915-05	FLAT CABLE CONNECTOR		L713			L41-6878-14	SMALL FIXED INDUCTOR (68NH)	
CN18			E40-6420-05	FLAT CABLE CONNECTOR		L715			L41-6878-14	SMALL FIXED INDUCTOR (68NH)	
CN60			E40-5932-05	SOCKET FOR PIN ASSY		L716			L41-5678-14	SMALL FIXED INDUCTOR (56NH)	
CN71			E40-5915-05	FLAT CABLE CONNECTOR		L717			L40-5675-57	SMALL FIXED INDUCTOR (56.0NH)	
CN901		*	E40-6420-05	FLAT CABLE CONNECTOR							

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L901			L92-0149-05	CHIP FERRITE		R58,59		*	RK73HB1J473J	CHIP R 47K J 1/16W	
X1			L77-1950-05	CRYSTAL RESONATOR (11.0592MHZ)		R61			RK73HB1J331J	CHIP R 330 J 1/16W	
X2			L77-1976-05	CRYSTAL RESONATOR (3.6864MHZ)		R62			RK73HB1J103J	CHIP R 10K J 1/16W	
X501		*	L77-1969-05	TCXO (16.8MHZ)		R63			RK73HB1J332J	CHIP R 3.3K J 1/16W	
XF701			L71-0617-25	MCF (49.95MHZ)		R64		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP1			RK74HB1J473J	CHIP-COM 47K J 1/16W		R65,66		*	RK73HB1J473J	CHIP R 47K J 1/16W	
CP3,4			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R67			RK73HB1J472J	CHIP R 4.7K J 1/16W	
CP5			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R68			RK73GB1J181J	CHIP R 180 J 1/16W	
CP7,8			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R69		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP10			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R71		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP11			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R72			RK73GB1J181J	CHIP R 180 J 1/16W	
CP12,13			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R73,74		*	RK73HB1J474J	CHIP R 470K J 1/16W	
CP16			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R75			RK73GB1J391J	CHIP R 390 J 1/16W	K2
CP18			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R76-80		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP19			RK75HA1J473J	CHIP-COM 47K J 1/16W		R82			RK73GB1J391J	CHIP R 390 J 1/16W	K2
CP22-24			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R83			R92-1252-05	CHIP R 0 OHM J 1/16W	
CP28			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R84			RK73HB1J184J	CHIP R 180K J 1/16W	
CP30			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R89		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP32			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R90			RK73HB1J394J	CHIP R 390K J 1/16W	
CP34			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R91			RK73HB1J332J	CHIP R 3.3K J 1/16W	
CP36			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R92		*	RK73HB1J473J	CHIP R 47K J 1/16W	
CP38			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R93			RK73HB1J393J	CHIP R 39K J 1/16W	
CP40			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R94			RK73HB1J684J	CHIP R 680K J 1/16W	
CP42,43			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R95,96		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
CP44			RK75HA1J474J	CHIP-COM 470K J 1/16W		R97		*	RK73HB1J474J	CHIP R 470K J 1/16W	
CP45-47			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R98,99		*	RK73HB1J473J	CHIP R 47K J 1/16W	
CP48,49			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R100			RK73HB1J223J	CHIP R 22K J 1/16W	
CP50			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R101			RK73HB1J103J	CHIP R 10K J 1/16W	
CP54			RK75HA1J473J	CHIP-COM 47K J 1/16W		R102		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R1			R92-1252-05	CHIP R 0 OHM J 1/16W		R103			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R2			RK73HB1J153J	CHIP R 15K J 1/16W		R104			RK73HB1J103J	CHIP R 10K J 1/16W	
R7		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R105			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R8			RK73HB1J272J	CHIP R 2.7K J 1/16W		R106		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R9			RK73HB1J332J	CHIP R 3.3K J 1/16W		R107			RK73HB1J564J	CHIP R 560K J 1/16W	
R11		*	RK73HB1J473J	CHIP R 47K J 1/16W		R108			RK73HB1J334J	CHIP R 330K J 1/16W	
R12			RK73HB1J334J	CHIP R 330K J 1/16W		R109			RK73HB1J824J	CHIP R 820K J 1/16W	
R13			RK73HB1J332J	CHIP R 3.3K J 1/16W		R111			RK73HB1J824J	CHIP R 820K J 1/16W	
R14		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R112			RK73HB1J334J	CHIP R 330K J 1/16W	
R15			RK73HB1J272J	CHIP R 2.7K J 1/16W		R113			R92-1368-05	CHIP R 0 OHM	
R16			RK73HB1J331J	CHIP R 330 J 1/16W		R114			RK73HB1J184J	CHIP R 180K J 1/16W	
R17			RK73HB1J821J	CHIP R 820 J 1/16W		R115			RK73GB1J103J	CHIP R 10K J 1/16W	
R18			RK73GB1J100J	CHIP R 10 J 1/16W		R116			RK73HB1J393J	CHIP R 39K J 1/16W	
R20			RK73HB1J103J	CHIP R 10K J 1/16W		R117			RK73HB1J683J	CHIP R 68K J 1/16W	
R21			RK73HB1J821J	CHIP R 820 J 1/16W		R119			RK73HB1J101J	CHIP R 100 J 1/16W	
R22,23			R92-1368-05	CHIP R 0 OHM		R121			RK73HB1J184J	CHIP R 180K J 1/16W	
R24			RK73HB1J224J	CHIP R 220K J 1/16W		R122			RK73HB1J104J	CHIP R 100K J 1/16W	
R25			RK73HB1J153J	CHIP R 15K J 1/16W		R125			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R26			R92-1368-05	CHIP R 0 OHM		R129			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R27,28			RK73HB1J474D	CHIP R 470K D 1/16W		R130		*	RK73HB1J474J	CHIP R 470K J 1/16W	
R31			RK73HB1J103J	CHIP R 10K J 1/16W		R131,132			R92-1368-05	CHIP R 0 OHM	
R36			RK73GB1J433J	CHIP R 43K J 1/16W		R134			RK73HB1J154J	CHIP R 150K J 1/16W	
R37			RK73HB1J103J	CHIP R 10K J 1/16W		R135			R92-1368-05	CHIP R 0 OHM	
R39,40		*	RK73HB1J473J	CHIP R 47K J 1/16W		R137			RK73HB1J223J	CHIP R 22K J 1/16W	
R42-44			RK73HB1J103J	CHIP R 10K J 1/16W		R139			RK73HB1J103J	CHIP R 10K J 1/16W	
R45,46		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R140		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R48-52		*	RK73HB1J473J	CHIP R 47K J 1/16W		R141			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R53		*	RK73HB1J474J	CHIP R 470K J 1/16W		R142			RK73HB1J223J	CHIP R 22K J 1/16W	
R54		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R143		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R55,56		*	RK73HB1J474J	CHIP R 470K J 1/16W		R144			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R57			RK73HB1J103J	CHIP R 10K J 1/16W		R145			RK73HB1J154J	CHIP R 150K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R146			RK73HB1J105J	CHIP R 1.0M J 1/16W		R232			RK73HB1J153J	CHIP R 15K J 1/16W	
R147			RK73HB1J103J	CHIP R 10K J 1/16W		R236			RK73HB1J124J	CHIP R 120K J 1/16W	
R149			RK73HB1J105J	CHIP R 1.0M J 1/16W		R239			RK73HB1J104J	CHIP R 100K J 1/16W	
R150			RK73HB1J153J	CHIP R 15K J 1/16W		R240		*	RK73HB1J474J	CHIP R 470K J 1/16W	
R151			RK73HB1J183J	CHIP R 18K J 1/16W		R241		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R152			RK73HB1J105J	CHIP R 1.0M J 1/16W		R242			RK73HB1J104J	CHIP R 100K J 1/16W	
R153			RK73HB1J332J	CHIP R 3.3K J 1/16W		R243		*	RK73HB1J474J	CHIP R 470K J 1/16W	
R154			RK73HB1J683J	CHIP R 68K J 1/16W		R244		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R155			RK73HB1J223J	CHIP R 22K J 1/16W		R245			RK73HB1J103J	CHIP R 10K J 1/16W	
R156-158			RK73HB1J334J	CHIP R 330K J 1/16W		R246			RK73HB1J223J	CHIP R 22K J 1/16W	
R159		*	RK73HB1J474J	CHIP R 470K J 1/16W		R247			RK73HB1J184J	CHIP R 180K J 1/16W	
R160			RK73HB1J224J	CHIP R 220K J 1/16W		R248			R92-1252-05	CHIP R 0 OHM J 1/16W	
R161,162			RK73HB1J124J	CHIP R 120K J 1/16W		R250			R92-1252-05	CHIP R 0 OHM J 1/16W	
R163			RK73HB1J393J	CHIP R 39K J 1/16W		R251		*	RK73HB1J474J	CHIP R 470K J 1/16W	
R164			RK73HB1J184J	CHIP R 180K J 1/16W		R254,255		*	RK73HB1J474J	CHIP R 470K J 1/16W	
R165			RK73HB1J154J	CHIP R 150K J 1/16W		R259			RK73HB1J103J	CHIP R 10K J 1/16W	
R166			RK73HB1J103J	CHIP R 10K J 1/16W		R261			RK73HB1J103J	CHIP R 10K J 1/16W	
R167			RK73GB1J104J	CHIP R 100K J 1/16W		R262		*	RK73HB1J473J	CHIP R 47K J 1/16W	
R168		*	RK73HB1J474J	CHIP R 470K J 1/16W		R501			R92-1368-05	CHIP R 0 OHM	
R169			RK73HB1J223J	CHIP R 22K J 1/16W		R502		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R170			R92-1252-05	CHIP R 0 OHM J 1/16W		R503			RK73HB1J100J	CHIP R 10 J 1/16W	
R171			R92-1368-05	CHIP R 0 OHM		R504			RK73HB1J103J	CHIP R 10K J 1/16W	
R172			RK73HB1J684J	CHIP R 680K J 1/16W		R505		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R173			RK73HB1J184J	CHIP R 180K J 1/16W		R506			RK73HB1J154J	CHIP R 150K J 1/16W	
R174			RK73HB1J123J	CHIP R 12K J 1/16W		R507			RK73HB1J470J	CHIP R 47 J 1/16W	
R175			RK73HB1J103J	CHIP R 10K J 1/16W		R508			RK73HB1J100J	CHIP R 10 J 1/16W	
R176			RK73HB1J683J	CHIP R 68K J 1/16W		R509			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R177			R92-1368-05	CHIP R 0 OHM		R510			RK73HB1J100J	CHIP R 10 J 1/16W	
R178		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R511,512			R92-1368-05	CHIP R 0 OHM	
R180			RK73HB1J103J	CHIP R 10K J 1/16W		R513			RK73HB1J470J	CHIP R 47 J 1/16W	
R181			R92-1368-05	CHIP R 0 OHM		R514,515		*	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R183			RK73HB1J103J	CHIP R 10K J 1/16W		R516			RK73HB1J471J	CHIP R 470 J 1/16W	
R187		*	RK73HB1J473J	CHIP R 47K J 1/16W		R517			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R189,190			R92-1368-05	CHIP R 0 OHM		R518			RK73HB1J103J	CHIP R 10K J 1/16W	
R192,193			RK73HB1J104J	CHIP R 100K J 1/16W		R519			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R194,195		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R520,521			RK73HB1J103J	CHIP R 10K J 1/16W	
R196			RK73HB1J151J	CHIP R 150 J 1/16W		R522			RK73HB1J184J	CHIP R 180K J 1/16W	
R198			R92-1252-05	CHIP R 0 OHM J 1/16W		R523			RK73HB1J220J	CHIP R 22 J 1/16W	
R199		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R525			RK73HB1J274J	CHIP R 270K J 1/16W	
R200		*	RK73HB1J473J	CHIP R 47K J 1/16W		R527			RK73HB1J683J	CHIP R 68K J 1/16W	
R202		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R528			RK73HB1J331J	CHIP R 330 J 1/16W	
R203			RK73HB1J222J	CHIP R 2.2K J 1/16W		R529			RK73HB1J181J	CHIP R 180 J 1/16W	
R204			RK73HB1J104J	CHIP R 100K J 1/16W		R530			RK73HB1J271J	CHIP R 270 J 1/16W	
R206			R92-1368-05	CHIP R 0 OHM		R531,532			RK73HB1J220J	CHIP R 22 J 1/16W	
R207			RK73HB1J154J	CHIP R 150K J 1/16W		R533			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R210			RK73HB1J471J	CHIP R 470 J 1/16W		R534			RK73HB1J154J	CHIP R 150K J 1/16W	
R211		*	RK73HB1J474J	CHIP R 470K J 1/16W		R535			RK73HB1J101J	CHIP R 100 J 1/16W	
R212			RK73GB1J101J	CHIP R 100 J 1/16W		R536			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R213			RK73HB1J101J	CHIP R 100 J 1/16W		R540			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R214			RK73HB1J182J	CHIP R 1.8K J 1/16W		R541			RK73HB1J103J	CHIP R 10K J 1/16W	
R215			RK73HB1J334J	CHIP R 330K J 1/16W		R542			RK73HB1J331J	CHIP R 330 J 1/16W	
R216			RK73HB1J274J	CHIP R 270K J 1/16W		R543			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R217,218			R92-1252-05	CHIP R 0 OHM J 1/16W		R545			RK73HB1J333D	CHIP R 33K D 1/16W	
R220			RK73GB1J222J	CHIP R 2.2K J 1/16W		R546			RK73HB1J104D	CHIP R 100K D 1/16W	
R221		*	RK73HB1J473J	CHIP R 47K J 1/16W		R548			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R222,223		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		R549			RK73HB1J470J	CHIP R 47 J 1/16W	
R224,225			RK73HB1J104J	CHIP R 100K J 1/16W		R550			R92-1368-05	CHIP R 0 OHM	
R226			RK73HB1J184J	CHIP R 180K J 1/16W		R601			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R229,230			RK73HB1J123J	CHIP R 12K J 1/16W		R602			R92-1252-05	CHIP R 0 OHM J 1/16W	
R231			RK73HB1J103J	CHIP R 10K J 1/16W		R611			RK73HB1J823J	CHIP R 82K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7000-XX)


Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R612			RK73HB1J101J	CHIP R 100 J 1/16W		R749			RK73HB1J184J	CHIP R 180K J 1/16W	
R613		*	RK73HB1J473J	CHIP R 47K J 1/16W		R750			RK73HB1J150J	CHIP R 15 J 1/16W	
R614			RK73HB1J331J	CHIP R 330 J 1/16W		R751			R92-1368-05	CHIP R 0 OHM	
R616			R92-1368-05	CHIP R 0 OHM		R752,753			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R618			RK73HB1J101J	CHIP R 100 J 1/16W		R754,755			R92-0670-05	CHIP R 0 OHM	
R619			RK73HB1J103J	CHIP R 10K J 1/16W		R759			R92-1252-05	CHIP R 0 OHM J 1/16W	
R621			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R760,761			R92-1368-05	CHIP R 0 OHM	
R622			RK73HB1J270J	CHIP R 27 J 1/16W		R901-903			RK73HB1J471J	CHIP R 470 J 1/16W	
R623			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R912			RK73HB1J101J	CHIP R 100 J 1/16W	
R624		*	RK73HB1J473J	CHIP R 47K J 1/16W		R913			RK73HB1J471J	CHIP R 470 J 1/16W	
R625			RK73HB1J151J	CHIP R 150 J 1/16W		R918			RK73HB1J470J	CHIP R 47 J 1/16W	
R626			R92-1252-05	CHIP R 0 OHM J 1/16W		R921,922			RK73HB1J101J	CHIP R 100 J 1/16W	
R627			RK73HB1J123J	CHIP R 12K J 1/16W		R923			R92-1252-05	CHIP R 0 OHM J 1/16W	
R628			RK73HB1J392J	CHIP R 3.9K J 1/16W		S1			S70-0424-05	TACT SWITCH	
R629			RK73EB2ER39K	CHIP R 0.39 K 1/4W		S2			S70-0457-05	TACT SWITCH	
R630,631			RK73HH1J104D	CHIP R 100K D 1/16W		S3,4			S70-0424-05	TACT SWITCH	
R632,633			RK73HH1J334D	CHIP R 330K D 1/16W		D1			RB521S-30	DIODE	
R634			RK73HB1J103J	CHIP R 10K J 1/16W		D4			MA2S111	DIODE	
R635		*	RK73HB1J473J	CHIP R 47K J 1/16W		D14			MA2S111	DIODE	
R636			R92-1368-05	CHIP R 0 OHM		D16,17			MA2S111	DIODE	
R637			RK73HB1J103J	CHIP R 10K J 1/16W		D24-27			MA2S111	DIODE	
R638		*	RK73HB1J474J	CHIP R 470K J 1/16W		D28-31			RB706F-40	DIODE	
R639			RK73HB1J154J	CHIP R 150K J 1/16W		D32			DA221	DIODE	
R640		*	RK73HB1J474J	CHIP R 470K J 1/16W		D501-503			HSC277	DIODE	
R642			RK73HB1J820J	CHIP R 82 J 1/16W		D504-511		*	1SV325F	VARIABLE CAPACITANCE DIODE	
R643			RK73HB1J473J	CHIP R 47K J 1/16W		D512			HSC277	DIODE	
R645,646		*	RK73GB1J271J	CHIP R 270 J 1/16W		D513		*	1SV278F	VARIABLE CAPACITANCE DIODE	
R647			R92-1252-05	CHIP R 0 OHM J 1/16W		D514			HSC277	DIODE	
R648			R92-1368-05	CHIP R 0 OHM		D517,518			HSC277	DIODE	
R701			RK73HB1J103J	CHIP R 10K J 1/16W		D601			UDZS4.7B	ZENER DIODE	
R702,703			RK73HB1J472J	CHIP R 4.7K J 1/16W		D604-606			HVC131	DIODE	
R704			RK73HB1J334J	CHIP R 330K J 1/16W		D608			HVC131	DIODE	
R705,706			RK73HB1J472J	CHIP R 4.7K J 1/16W		D609		*	02DZ15F-(X,Y)	ZENER DIODE	
R707			RK73HB1J101J	CHIP R 100 J 1/16W		D610		*	AVRM1608270MAB	VARISTOR	
R708			RK73HB1J103J	CHIP R 10K J 1/16W		D701,702			DAN235E	DIODE	
R710		*	RK73HB1J102J	CHIP R 1.0K J 1/16W		D703-706		*	1SV323F	VARIABLE CAPACITANCE DIODE	
R711		*	RK73HB1J474J	CHIP R 470K J 1/16W		D901			1SR154-400	DIODE	
R713			RK73HB1J334J	CHIP R 330K J 1/16W		IC1		*	XC61CC5002NR	MOS-IC	
R715,716			RK73HB1J332J	CHIP R 3.3K J 1/16W		IC2			XC6204B502PR	MOS-IC	
R717			RK73HB1J272J	CHIP R 2.7K J 1/16W		IC3		*	XC61CN3402NR	MOS-IC	
R718			RK73HB1J100J	CHIP R 10 J 1/16W		IC4,5			BU4094BCFV	MOS-IC	
R719			RK73HB1J332J	CHIP R 3.3K J 1/16W		IC6			LC75834W	MOS-IC	
R721			RK73HB1J124J	CHIP R 120K J 1/16W		IC7		*	30625MGP234HU	MICROPROCESSOR IC	
R722			RK73HB1J101J	CHIP R 100 J 1/16W		IC8			AT29C040A-90TU	ROM IC	
R726			RK73HB1J224J	CHIP R 220K J 1/16W		IC9			CAT24WC64JI	ROM IC	
R727			RK73HB1J681J	CHIP R 680 J 1/16W		IC10-12		*	TK62012F	MOS-IC	
R728			RK73HB1J471J	CHIP R 470 J 1/16W		IC13			AQUA-L	MOS-IC	
R729			RK73HB1J101J	CHIP R 100 J 1/16W		IC14		*	TC7W53FK(F)	MOS-IC	
R731			RK73HB1J322J	CHIP R 2.2K J 1/16W		IC15		*	TK62012F	MOS-IC	
R732			RK73HB1J391J	CHIP R 390 J 1/16W		IC16			M62364FP-F	MOS-IC	
R733			RK73HB1J563J	CHIP R 56K J 1/16W		IC17		*	TK62012F	MOS-IC	
R734			RK73HB1J104J	CHIP R 100K J 1/16W		IC18			TA7368F	MOS-IC	
R735			RK73HB1J563J	CHIP R 56K J 1/16W		IC19		*	TC75S51FE(F)	MOS-IC	
R736			RK73HB1J104J	CHIP R 100K J 1/16W		IC501			ADF4111BCP7	MOS-IC	
R738,739			RK73HB1J105J	CHIP R 1.0M J 1/16W		IC601		*	TA75W01FUF	MOS-IC	
R740			RK73HB1J471J	CHIP R 470 J 1/16W		IC701		*	TA31136FNG	MOS-IC	
R741			RK73HB1J470J	CHIP R 47 J 1/16W		Q1			UMG3N	TRANSISTOR	
R742			RK73HB1J471J	CHIP R 470 J 1/16W		Q4			FP210	TRANSISTOR	
R745			RK73HB1J104J	CHIP R 100K J 1/16W		Q5			UPA672T	FET	
R748			RK73HB1J104J	CHIP R 100K J 1/16W							

PARTS LIST

TX-RX UNIT (X57-7000-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
Q6			UMG3N	TRANSISTOR							
Q7			UPA672T	FET							
Q8			DTA114EE	DIGITAL TRANSISTOR							
Q9		*	SSM6J08FU(F)	FET							
Q12			2SC4617(S)	TRANSISTOR							
Q13			2SB1132(Q,R)	TRANSISTOR							
Q14,15		*	SSM3K15TE(F)	FET							
Q16			2SA1774(S)	TRANSISTOR							
Q17			2SC4649(N,P)	TRANSISTOR							
Q19		*	SSM3K15TE(F)	FET							
Q21		*	RN4910(F)	TRANSISTOR							
Q22		*	SSM3K15TE(F)	FET							
Q23			DTC144EE	DIGITAL TRANSISTOR							
Q24		*	SSM6J08FU(F)	FET							
Q25		*	2SK1830F	FET							
Q26		*	2SJ347F	FET							
Q27			DTC144EE	DIGITAL TRANSISTOR							
Q28		*	SSM3K01T(F)	FET							
Q29		*	SSM3K15TE(F)	FET							
Q30			2SJ243	FET							
Q31,32			2SC4649(N,P)	TRANSISTOR							
Q33		*	2SJ347F	FET							
Q34		*	SSM3K15TE(F)	FET							
Q35		*	SSM3K01T(F)	FET							
Q501			2SC5488	TRANSISTOR							
Q502,503			2SK508NV(K52)	FET							
Q504		*	SSM6P05FU(F)	FET							
Q505			2SC4617(S)	TRANSISTOR							
Q506,507			2SC5488	TRANSISTOR							
Q602		*	2SK3077F	FET							
Q603			RD01MUS1	FET							
Q604			RD07MVS1	FET							
Q605			DTC114EE	DIGITAL TRANSISTOR							
Q607			DTC114EE	DIGITAL TRANSISTOR							
Q608			DTA144EE	DIGITAL TRANSISTOR							
Q609		*	SSM3K15TE(F)	FET							
Q701			2SC4649(N,P)	TRANSISTOR							
Q702			DTA144EE	DIGITAL TRANSISTOR							
Q703			2SC4649(N,P)	TRANSISTOR							
Q704			3SK318	FET							
Q705		*	3SK294(F)	FET							
TH501			B57331V2104J	THERMISTOR							
TH701,702			B57331V2104J	THERMISTOR							

EXPLODED VIEW

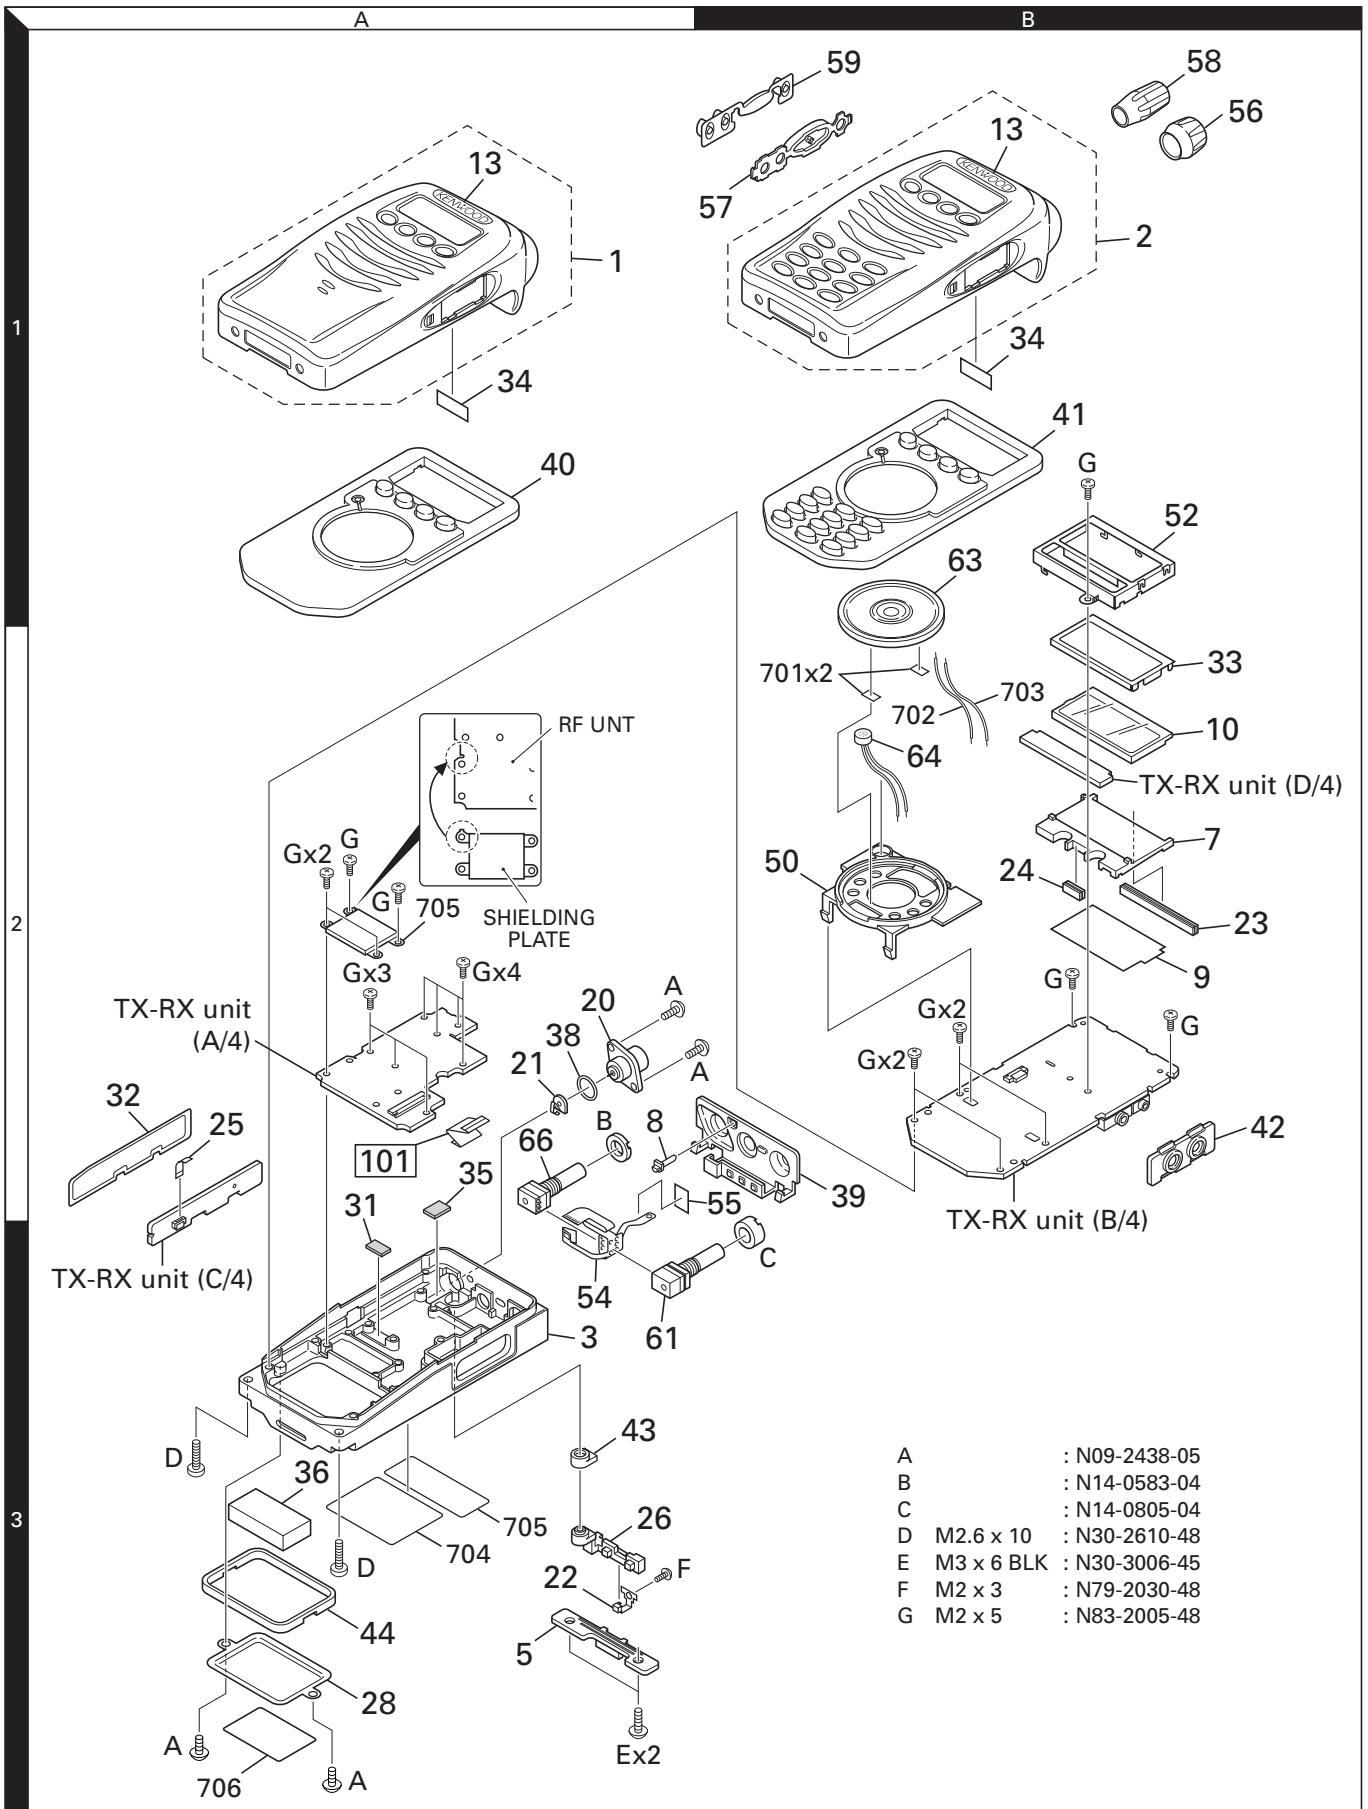

PACKING

