
EXPLODED VIEW/PARTS LIST

Main section

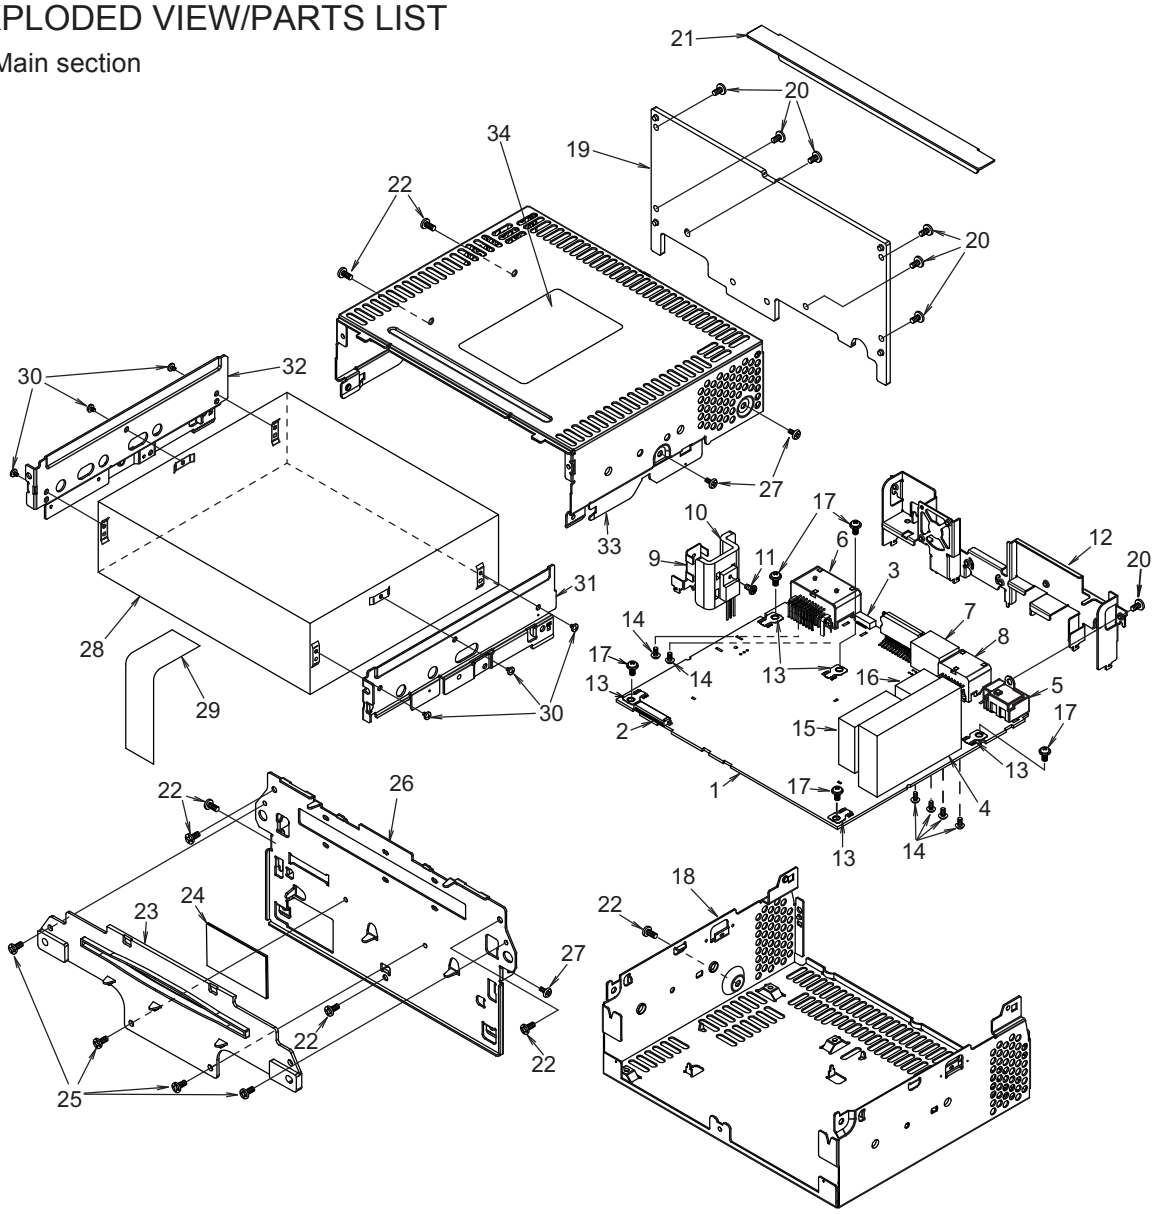

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	MAIN PWB	1
2	074-1237-69	OUTLET SOCKET	1
3	076-0478-59	PLUG	1
4	880-2026B	TUNER PACK	1
5	092-2210-00	ANT-RECEPT	1
6	074-4009-20	OUTLET SOCKET	1
7	074-1302-08	OUTLET SOCKET	1
8	074-1302-12	OUTLET SOCKET	1
9	331-3880-00	TR-HOLDER	1
10	313-1967-00	HEAT SINK	1
11	716-1646-50	IT SCREW(2.6x8)	1
12	307-0722-00	REAR PLATE	1
13	073-0762-90	TERMINAL	5
14	778-3006-00	TAP-SCREW(M3x5)	6
15	880-1761A	TUNER PACK	1
16	881-0003D	ANT-DIST BLOCK	1
17	716-0878-50	SCREW(M2.6x5)	5

NO.	PART NO.	DESCRIPTION	Q'TY
18	311-1954-01	LOWER CASE	1
19	313-1980-10	HEAT SINK	1
20	714-2608-8B	MACHINE SCREW(M2.6x8)	7
21	347-8174-00	SHEED	1
22	714-2606-8B	MACHINE SCREW(M2.6x6)	7
23	335-8240-00	DISC GUIDE	1
24	347-8469-00	SHIELD PART	1
25	716-3642-00	SCREW(M2.6x5)	4
26	309-0854-00	ES PLATE	4
27	716-3504-60	SCREW(M2.6x5)	3
28	929-0390-82	CD-CHANG-MODULE	1
29	816-4054-50	FLAT WIRE	1
30	716-3552-00	SCREW(M2.3x2.5)	6
31	331-4530-00	6CD BRKT(R)	1
32	331-4091-10	6CD BRKT(L)	1
33	310-1873-00	UPPER CASE	1
34	276-0429-00	SETPLATE	1

Caution of assembling

When installing this unit into a vehicle, this unit side is equipped with an attachment bracket.
In assembling the upper block(CD changer module) and the lower block(main unit) of the unit, please use the "Attachment jig". (P/No.PN-2813-MOB)After assembling, please check the attachment position of the unit with "Attachment jig" again.

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	ANTENNA RECEPT
BL101	881-0003D	ANT DIST BLOCK
BL102	880-2026B	AM/FM TUNER PACK
BL103	880-1761A	RDS TUNER PACK
C103	166-1511-50	150pF CH
C104	163-4763-35	16V 47uF
C128	166-2201-50	22pF CH
C130	168-2222-55	2200pF K
C134	166-1011-50	100pF CH
C136	166-1011-50	100pF CH
C137	168-1022-55	1000pF K
C138	168-1022-55	1000pF K
C142	168-1022-55	1000pF K
C143	163-1073-35	16V 100uF
C144	168-2222-55	2200pF K
C146	166-1011-50	100pF CH
C147	166-1011-50	100pF CH
C149	168-1022-55	1000pF K
C150	168-1022-55	1000pF K
C153	168-1022-55	1000pF K
C154	163-1073-35	16V 100uF
C163	168-2222-55	2200pF K
C170	168-4732-78	0.047uF K
C171	168-4732-78	0.047uF K
C172	163-1063-35	16V 10uF
C173	168-1022-55	1000pF K
C174	163-1063-35	16V 10uF
C175	168-4732-78	0.047uF K
C176	168-3322-55	3300pF K
C177	168-2232-55	0.022uF K
C178	168-2232-55	0.022uF K
C179	168-4732-78	0.047uF K
C180	168-4732-78	0.047uF K
C181	163-4763-35	16V 47uF
C182	178-1042-78	0.1uF
C183	166-5611-50	560pF CH
C184	168-1022-55	1000pF K
C185	168-1032-55	0.01uF K
C186	166-4701-50	47pF CH
C187	166-3311-50	330pF CH
C188	178-1042-78	0.1uF
C189	178-2255-79	2.2uF
C190	166-5601-50	56pF CH
C191	166-6801-50	68pF CH
C192	166-2711-50	270pF
C193	168-2232-55	0.022uF K
C194	166-1811-50	180pF CH
C195	166-2711-50	270pF
C196	166-1811-50	180pF CH
C197	166-6801-50	68pF CH
C198	166-2201-50	22pF CH
C200	043-0548-50	10V 2.2uF
C201	043-0548-50	10V 2.2uF
C205	043-0548-50	10V 2.2uF
C206	043-0548-50	10V 2.2uF
C223	163-4763-35	16V 47uF
C225	168-1042-78	16V 0.1uF
C226	168-1042-78	16V 0.1uF
C228	163-2273-25	10V 220uF
C230	168-1042-78	16V 0.1uF
C231	163-1063-35	16V 10uF
C232	163-1063-35	16V 10uF
C233	168-1042-78	16V 0.1uF
C250	168-1022-55	1000pF K
C251	168-1022-55	1000pF K
C252	168-1022-55	1000pF K
C253	168-1022-55	1000pF K
C264	166-2201-50	22pF CH
C265	166-2201-50	22pF CH
C266	043-0548-50	10V 2.2uF
C267	043-0548-50	10V 2.2uF
C268	166-2201-50	22pF CH
C269	166-2201-50	22pF CH
C270	178-4732-78	0.047uF
C271	178-4732-78	0.047uF
C272	178-4732-78	0.047uF
C273	178-4732-78	0.047uF
C274	168-8222-55	8200pF K
C275	168-8222-55	8200pF K
C276	168-8222-55	8200pF K
C277	168-8222-55	8200pF K
C278	166-2201-50	22pF CH
C279	166-2201-50	22pF CH
C280	043-0548-50	10V 2.2uF
C281	043-0548-50	10V 2.2uF
C282	043-0548-50	10V 2.2uF
C283	043-0548-50	10V 2.2uF
C301	168-2222-55	2200pF K
C302	168-2222-55	2200pF K
C303	168-2222-55	2200pF K
C304	168-2222-55	2200pF K
C306	168-1042-78	16V 0.1uF
C307	168-1022-55	1000pF K
C308	168-2222-55	2200pF K
C311	168-1022-55	1000pF K
C312	168-1022-55	1000pF K
C313	168-1042-78	16V 0.1uF
C314	168-1042-78	16V 0.1uF
C315	168-1042-78	16V 0.1uF
C316	166-8097-50	8pF C CH
C317	168-1042-78	16V 0.1uF
C318	168-4712-55	470pF K
C319	166-8097-50	8pF C CH
C320	166-1811-50	180pF CH
C321	168-1022-55	1000pF K
C323	168-1022-55	1000pF K
C325	168-1022-55	1000pF K
C326	168-3322-55	3300pF K
C327	168-1042-78	16V 0.1uF
C328	168-3322-55	3300pF K
C329	168-1022-55	1000pF K
C330	168-1022-55	1000pF K
C331	163-4753-65	50V 4.7uF
C332	168-1042-78	16V 0.1uF
C333	168-1022-55	1000pF K
C334	166-1011-50	100pF CH
C336	168-3322-55	3300pF K
C337	168-1022-55	1000pF K
C338	168-3322-55	3300pF K
C340	163-3373-15	6.3V 330uF
C342	168-1022-55	1000pF K
C343	168-1042-78	16V 0.1uF
C344	163-4753-65	50V 4.7uF
C345	168-1042-78	16V 0.1uF
C346	163-4753-65	50V 4.7uF
C347	168-3332-78	0.033uF K
C348	178-1052-78	1uF
C349	168-1042-78	16V 0.1uF
C350	163-2273-25	10V 220uF
C351	168-4732-78	0.047uF K
C352	163-2263-35	16V 22uF
C354	166-1011-50	100pF CH
C355	163-3373-15	6.3V 330uF
C356	163-2263-35	16V 22uF
C357	168-1042-78	16V 0.1uF
C358	168-1042-78	16V 0.1uF
C359	163-3373-15	6.3V 330uF
C360	168-1022-55	1000pF K
C361	163-1063-35	16V 10uF
C362	168-1042-78	16V 0.1uF
C401	168-1042-78	16V 0.1uF
C402	168-1042-78	16V 0.1uF
C403	166-2201-50	22pF CH
C404	166-1201-50	12pF CH
C405	166-2201-50	22pF CH
C406	166-1201-50	12pF CH
C407	168-1042-78	16V 0.1uF
C408	163-4763-15	6.3V 47uF
C409	168-1042-78	16V 0.1uF
C410	168-4722-55	4700pF K
C411	168-1042-78	16V 0.1uF
C412	168-1032-55	0.01uF K
C417	166-1511-50	150pF CH
C501	168-1042-78	16V 0.1uF
C502	168-1042-78	16V 0.1uF
C503	168-1042-78	16V 0.1uF
C504	168-1042-78	16V 0.1uF
C505	166-5611-50	560pF CH
C506	166-5611-50	560pF CH
C507	166-5611-50	560pF CH
C508	166-5611-50	560pF CH
C509	166-2201-50	22pF CH
C510	166-2201-50	22pF CH
C511	168-1042-78	16V 0.1uF
C513	166-2201-50	22pF CH
C514	166-2201-50	22pF CH
C516	166-5611-50	560pF CH
C517	166-5611-50	560pF CH
C518	043-0554-90	25V 10uF
C519	166-5611-50	560pF CH
C520	166-5611-50	560pF CH
C522	163-1063-35	16V 10uF
C523	168-2222-55	2200pF K
C525	043-0554-90	25V 10uF
C526	043-0328-90	0.1uF
C528	168-1022-55	1000pF K
C529	043-0548-50	10V 2.2uF
C531	168-6822-55	6800pF K
C548	163-4763-35	16V 47uF
C549	163-2273-25	10V 220uF
C550	168-2212-55	220pF K
C551	166-2201-50	22pF CH
C552	042-0592-61	16V 47uF
C553	042-0592-61	16V 47uF
C554	189-1083-32	16V 1000uF
C556	043-0499-51	0.1uF
C557	163-4763-35	16V 47uF
C559	168-2222-55	2200pF K
C560	168-2222-55	2200pF K
C561	168-6822-55	6800pF K
C562	168-2222-55	2200pF K

REF No.	PART No.	DESCRIPTION
C563	168-2222-55	2200pF K
C564	042-0427-94	16V 47uF TAN
C565	168-2222-55	2200pF K
C566	168-2222-55	2200pF K
C567	168-1042-78	16V 0.1uF
C568	168-2222-55	2200pF K
C569	168-2222-55	2200pF K
C570	168-1042-78	16V 0.1uF
C571	042-0627-90	16V 100uF
C572	178-1052-78	1uF
C574	163-1063-35	16V 10uF
C575	168-2232-55	0.022uF K
C577	166-4701-50	47pF CH
C578	163-4763-35	16V 47uF
C579	168-1042-78	16V 0.1uF
C580	178-2242-78	0.22uF
C581	178-2242-78	0.22uF
C582	163-1073-35	16V 100uF
C583	166-5611-50	560pF CH
C584	163-1063-35	16V 10uF
C585	166-4701-50	47pF CH
C901	043-0548-50	10V 2.2uF
C902	043-0548-50	10V 2.2uF
C903	043-0548-50	10V 2.2uF
C904	043-0548-50	10V 2.2uF
C906	166-5601-50	56pF CH
C907	166-5601-50	56pF CH
C908	166-2201-50	22pF CH
C909	166-2201-50	22pF CH
C910	166-2201-50	22pF CH
C911	166-2201-50	22pF CH
C912	166-5601-50	56pF CH
C913	166-5601-50	56pF CH
C914	166-5601-50	56pF CH
C915	166-5601-50	56pF CH
C916	166-2201-50	22pF CH
C917	166-2201-50	22pF CH
C918	166-2201-50	22pF CH
C919	166-2201-50	22pF CH
C920	166-5601-50	56pF CH
C921	166-5601-50	56pF CH
C924	163-3363-25	10V 33uF
C925	163-3363-25	10V 33uF
C926	163-3363-25	10V 33uF
C927	163-3363-25	10V 33uF
C928	163-3363-25	10V 33uF
C929	163-3363-25	10V 33uF
C930	163-3363-25	10V 33uF
C931	163-3363-25	10V 33uF
CCT403	050-0145-52	1/16W 1k ohm x4
CCT404	050-0145-52	1/16W 1k ohm x4
D170	001-0367-91	1SS226
D202	001-0516-90	MA111
D216	001-9210-50	AVR-M1608C270 MTAAD
D217	001-9210-50	AVR-M1608C270 MTAAD
D218	001-9210-50	AVR-M1608C270 MTAAD
D219	001-9210-50	AVR-M1608C270 MTAAD
D502	001-2624-90	RB501V-40
D504	001-2627-90	SSA24
D505	001-0516-90	MA111
D506	001-0529-47	MA8091M
D508	001-0529-47	MA8091M
D509	001-2403-90	M1F60
D510	001-2015-00	RL253
D511	001-0516-90	MA111
D512	001-0529-48	MA8091-H
D513	001-2403-90	M1F60
D514	001-0516-90	MA111
D515	001-0529-34	MA8062-L
D517	001-2403-90	M1F60

REF No.	PART No.	DESCRIPTION
D530	001-0516-90	MA111
D567	001-0516-90	MA111
D568	001-0516-90	MA111
IC170	051-3034-90	NJM4558V
IC171	051-4607-90	SAA6581T
IC203	051-3367-90	NJU7780U1-33-TE2
IC204	051-3340-00	LD1085P
IC206	051-3034-90	NJM4558V
IC301	----------	SAF7730HV/N317F
IC401	051-9424-90	BR24L16FVM-WTR
IC402	052-3213-91	M30879FLAGP
IC403	051-6607-08	PCA82C250T-T
IC404	051-5420-08	S-80943CNMC-G9D
IC501	051-3019-90	NJM2060V
IC502	051-3372-90	LT1767EMS8E #TRPBF
IC505	051-3034-90	NJM4558V
IC506	051-5441-08	BD4828G-TR
IC507	051-3341-90	BD3931FP
IC510	051-3341-90	BD3931FP
IC901	051-1407-00	NJM4556AL
IC902	051-1407-00	NJM4556AL
IC903	051-1407-00	NJM4556AL
IC904	051-1407-00	NJM4556AL
J201	074-1302-12	TH12P-SOCKET
J202	074-1237-69	19PIN
J250	074-1302-08	TH8P-SOCKET
J502	074-4009-20	SOCKET (20P)
L111	010-2003-04	30uH
L170	010-2174-86	1mH
L171	010-3103-68	2.5k ohm/100MHz
L172	010-2174-66	22uH
L190	010-3105-70	240ohm/100MHz
L191	010-3103-68	2.5k ohm/100MHz
L203	119-0000-05	1/10W 0 ohm JW
L208	119-0000-05	1/10W 0 ohm JW
L209	119-0000-05	1/10W 0 ohm JW
L210	119-0000-05	1/10W 0 ohm JW
L301	010-3104-54	600 ohm/100MHz
L302	010-3104-54	600 ohm/100MHz
L303	010-3104-54	600 ohm/100MHz
L304	010-3104-54	600 ohm/100MHz
L305	010-3104-54	600 ohm/100MHz
L306	010-3104-54	600 ohm/100MHz
L307	010-3104-54	600 ohm/100MHz
L308	010-3104-54	600 ohm/100MHz
L309	010-3104-54	600 ohm/100MHz
L310	010-3104-54	600 ohm/100MHz
L311	010-3104-54	600 ohm/100MHz
L312	010-3104-54	600 ohm/100MHz
L313	010-3104-54	600 ohm/100MHz
L401	010-3601-50	600 ohm/100MHz
L402	010-3406-54	2.2uH J
L403	010-3104-54	600 ohm/100MHz
L501	010-3104-54	600 ohm/100MHz
L502	010-8028-00	520uH
L503	010-3104-54	600 ohm/100MHz
L504	010-3074-51	5.4uH
L505	010-3104-54	600 ohm/100MHz
L506	010-3104-54	600 ohm/100MHz
P401	076-0478-59	PLUG (9P)
Q170	125-2004-92	RN1402
Q201	192-4116-00	2SC4116
Q203	125-2026-91	UN5211
Q204	125-0020-96	UN5110-Q,R,S
Q205	125-0020-91	UN5111
Q206	198-3018-00	2SK3018
Q207	198-3018-00	2SK3018
Q208	125-2026-91	UN5211
Q211	125-2026-91	UN5211
Q221	125-2026-91	UN5211
Q222	125-9017-92	UMD3N-TR
Q301	125-2026-91	UN5211
Q302	125-2026-91	UN5211

REF No.	PART No.	DESCRIPTION
Q304	125-2026-91	UN5211
Q305	125-2026-91	UN5211
Q306	125-2026-91	UN5211
Q307	125-2026-91	UN5211
Q308	125-2026-91	UN5211
Q309	125-2026-91	UN5211
Q310	125-2026-91	UN5211
Q311	125-7007-90	Si5441BDC-TI-E3
Q312	125-2026-91	UN5211
Q504	192-5886-00	2SC5886
Q506	131-1188-00	2SB1188
Q507	125-2026-95	UN521N
Q508	192-4116-00	2SC4116
Q509	125-9017-92	UMD3N-TR
Q515	193-1664-00	2SD1664
Q516	192-4116-51	2SC4116G,L
Q517	191-1204-61	2SB1204R,S,T
Q518	125-2026-91	UN5211
Q519	190-1298-00	2SA1298
Q520	192-4116-00	2SC4116
R102	119-0000-05	1/10W 0 ohm JW
R103	119-0000-05	1/10W 0 ohm JW
R106	117-0000-05	1/8W 0 ohm JW
R107	119-0000-05	1/10W 0 ohm JW
R108	119-0000-05	1/10W 0 ohm JW
R112	116-8291-15	1/4W 8.2 ohm
R137	119-1041-15	1/10W 100k ohm
R138	119-1011-15	1/10W 100 ohm
R139	119-1011-15	1/10W 100 ohm
R140	119-1011-15	1/10W 100 ohm
R141	119-1011-15	1/10W 100 ohm
R142	119-1011-15	1/10W 100 ohm
R151	119-1011-15	1/10W 100 ohm
R153	119-1011-15	1/10W 100 ohm
R154	119-1011-15	1/10W 100 ohm
R155	119-1011-15	1/10W 100 ohm
R156	119-1011-15	1/10W 100 ohm
R157	116-1091-15	1/4W 1 ohm
R162	119-0000-05	1/10W 0 ohm JW
R163	119-0000-05	1/10W 0 ohm JW
R164	119-0000-05	1/10W 0 ohm JW
R165	119-0000-05	1/10W 0 ohm JW
R170	119-6831-15	1/10W 68k ohm
R171	119-4791-15	1/10W 4.7 ohm
R172	119-0000-05	1/10W 0 ohm JW
R173	119-0000-05	1/10W 0 ohm JW
R174	119-1011-15	1/10W 100 ohm
R175	119-1821-15	1/10W 1.8k ohm
R176	119-1031-15	1/10W 10k ohm
R177	119-4731-15	1/10W 47k ohm
R178	119-1231-15	1/10W 12k ohm
R179	119-1041-15	1/10W 100k ohm
R180	119-2211-15	1/10W 220 ohm
R181	119-1021-15	1/10W 1k ohm
R182	119-1021-15	1/10W 1k ohm
R202	119-0000-05	1/10W 0 ohm JW
R203	119-0000-05	1/10W 0 ohm JW
R204	119-0000-05	1/10W 0 ohm JW
R205	119-0000-05	1/10W 0 ohm JW
R206	119-0000-05	1/10W 0 ohm JW
R207	119-2721-15	1/10W 2.7k ohm
R208	119-1021-15	1/10W 1k ohm
R210	119-1021-15	1/10W 1k ohm
R211	119-0000-05	1/10W 0 ohm JW
R212	119-3331-15	1/10W 33k ohm
R215	119-4731-15	1/10W 47k ohm
R220	119-1041-15	1/10W 100k ohm
R224	119-3331-15	1/10W 33k ohm
R225	119-0000-05	1/10W 0 ohm JW
R227	119-4731-15	1/10W 47k ohm
R229	119-3331-15	1/10W 33k ohm
R233	119-4731-15	1/10W 47k ohm
R249	032-0140-98	1/10W 330 ohm F
R250	119-1131-15	1/10W 11k ohm

REF No.	PART No.	DESCRIPTION
R251	032-0140-93	1/10W 2k ohm F
R252	119-1131-15	1/10W 11k ohm
R254	119-4721-15	1/10W 4.7k ohm
R258	119-4731-15	1/10W 47k ohm
R261	119-4731-15	1/10W 47k ohm
R270	119-3011-15	1/10W 300 ohm
R271	119-3011-15	1/10W 300 ohm
R272	032-0140-80	1/10W 18k ohm F
R273	032-0140-80	1/10W 18k ohm F
R274	032-0140-80	1/10W 18k ohm F
R275	032-0140-80	1/10W 18k ohm F
R280	032-0140-52	1/10W 33k ohm F
R281	032-0140-52	1/10W 33k ohm F
R282	032-0140-89	1/10W 47k ohm F
R283	032-0140-89	1/10W 47k ohm F
R284	032-0140-89	1/10W 47k ohm F
R285	032-0140-89	1/10W 47k ohm F
R301	119-1021-15	1/10W 1k ohm
R302	119-3921-15	1/10W 3.9k ohm
R303	119-3921-15	1/10W 3.9k ohm
R304	010-3104-54	600 ohm/100MHz
R305	119-3921-15	1/10W 3.9k ohm
R306	119-3921-15	1/10W 3.9k ohm
R307	119-1021-15	1/10W 1k ohm
R308	119-1021-15	1/10W 1k ohm
R309	119-1021-15	1/10W 1k ohm
R310	119-1031-15	1/10W 10k ohm
R311	119-1031-15	1/10W 10k ohm
R312	119-0000-05	1/10W 0 ohm JW
R313	119-0000-05	1/10W 0 ohm JW
R314	119-1021-15	1/10W 1k ohm
R315	119-4731-15	1/10W 47k ohm
R316	119-4731-15	1/10W 47k ohm
R317	119-4731-15	1/10W 47k ohm
R318	010-3104-54	600 ohm/100MHz
R319	119-1031-15	1/10W 10k ohm
R320	119-4731-15	1/10W 47k ohm
R321	119-4731-15	1/10W 47k ohm
R322	119-4731-15	1/10W 47k ohm
R323	119-4731-15	1/10W 47k ohm
R325	119-1031-15	1/10W 10k ohm
R326	119-0000-05	1/10W 0 ohm JW
R327	119-4731-15	1/10W 47k ohm
R328	119-1011-15	1/10W 100 ohm
R329	119-1021-15	1/10W 1k ohm
R331	119-1021-15	1/10W 1k ohm
R332	119-1001-15	1/10W 10 ohm
R333	119-2201-15	1/10W 22 ohm
R334	119-1011-15	1/10W 100 ohm
R335	119-1011-15	1/10W 100 ohm
R336	119-0000-05	1/10W 0 ohm JW
R337	119-0000-05	1/10W 0 ohm JW
R338	119-0000-05	1/10W 0 ohm JW
R339	119-0000-05	1/10W 0 ohm JW
R340	032-0140-63	1/10W 27k ohm F
R341	032-0140-63	1/10W 27k ohm F
R342	032-0140-63	1/10W 27k ohm F
R343	032-0140-63	1/10W 27k ohm F
R344	119-4731-15	1/10W 47k ohm
R345	119-4731-15	1/10W 47k ohm
R346	119-0000-05	1/10W 0 ohm JW
R347	119-0000-05	1/10W 0 ohm JW
R348	032-0140-50	1/10W 10k ohm F
R349	032-0140-50	1/10W 10k ohm F
R350	032-0140-50	1/10W 10k ohm F
R351	032-0140-50	1/10W 10k ohm F
R352	119-1041-15	1/10W 100k ohm
R353	119-1041-15	1/10W 100k ohm
R354	119-1041-15	1/10W 100k ohm
R355	119-1041-15	1/10W 100k ohm
R356	119-0000-05	1/10W 0 ohm JW
R357	119-0000-05	1/10W 0 ohm JW
R358	119-0000-05	1/10W 0 ohm JW
R359	119-5131-15	1/10W 51k ohm

REF No.	PART No.	DESCRIPTION
R360	119-1001-15	1/10W 10 ohm
R361	119-5131-15	1/10W 51k ohm
R366	119-0000-05	1/10W 0 ohm JW
R367	119-0000-05	1/10W 0 ohm JW
R368	119-0000-05	1/10W 0 ohm JW
R369	119-0000-05	1/10W 0 ohm JW
R370	119-1031-15	1/10W 10k ohm
R372	119-0000-05	1/10W 0 ohm JW
R373	119-0000-05	1/10W 0 ohm JW
R401	119-1021-15	1/10W 1k ohm
R402	119-1021-15	1/10W 1k ohm
R403	119-1021-15	1/10W 1k ohm
R404	119-0000-05	1/10W 0 ohm JW
R405	119-1021-15	1/10W 1k ohm
R406	119-1021-15	1/10W 1k ohm
R407	119-1021-15	1/10W 1k ohm
R408	119-4721-15	1/10W 4.7k ohm
R409	119-4721-15	1/10W 4.7k ohm
R410	119-1021-15	1/10W 1k ohm
R411	119-4711-15	1/10W 470 ohm
R412	119-4711-15	1/10W 470 ohm
R414	119-4721-15	1/10W 4.7k ohm
R415	119-4721-15	1/10W 4.7k ohm
R416	119-4731-15	1/10W 47k ohm
R417	119-4731-15	1/10W 47k ohm
R420	119-1511-15	1/10W 150 ohm
R421	119-1041-15	1/10W 100k ohm
R422	119-1011-15	1/10W 100 ohm
R423	119-1011-15	1/10W 100 ohm
R424	119-1011-15	1/10W 100 ohm
R425	119-1011-15	1/10W 100 ohm
R426	119-1011-15	1/10W 100 ohm
R427	119-1011-15	1/10W 100 ohm
R428	119-1031-15	1/10W 10k ohm
R429	119-1031-15	1/10W 10k ohm
R433	119-1031-15	1/10W 10k ohm
R436	119-1021-15	1/10W 1k ohm
R437	119-1021-15	1/10W 1k ohm
R440	119-4731-15	1/10W 47k ohm
R441	119-1021-15	1/10W 1k ohm
R442	119-1031-15	1/10W 10k ohm
R443	119-4731-15	1/10W 47k ohm
R445	119-0000-05	1/10W 0 ohm JW
R446	119-4731-15	1/10W 47k ohm
R447	119-1031-15	1/10W 10k ohm
R448	119-4731-15	1/10W 47k ohm
R449	119-1021-15	1/10W 1k ohm
R450	119-1021-15	1/10W 1k ohm
R451	119-4731-15	1/10W 47k ohm
R452	119-4731-15	1/10W 47k ohm
R453	119-4731-15	1/10W 47k ohm
R454	119-4731-15	1/10W 47k ohm
R455	119-2231-15	1/10W 22k ohm
R456	119-4731-15	1/10W 47k ohm
R458	119-1011-15	1/10W 100 ohm
R459	119-1011-15	1/10W 100 ohm
R460	119-4721-15	1/10W 4.7k ohm
R461	119-4721-15	1/10W 4.7k ohm
R462	119-1021-15	1/10W 1k ohm
R463	119-1021-15	1/10W 1k ohm
R464	119-1011-15	1/10W 100 ohm
R465	119-1011-15	1/10W 100 ohm
R466	119-4721-15	1/10W 4.7k ohm
R467	119-4721-15	1/10W 4.7k ohm
R478	116-6201-15	1/4W 62 ohm
R479	116-6201-15	1/4W 62 ohm
R481	119-0000-05	1/10W 0 ohm JW
R502	119-1031-15	1/10W 10k ohm
R503	119-1031-15	1/10W 10k ohm
R504	119-1031-15	1/10W 10k ohm
R505	119-1031-15	1/10W 10k ohm
R507	119-1031-15	1/10W 10k ohm
R508	119-1031-15	1/10W 10k ohm
R509	119-1031-15	1/10W 10k ohm


REF No.	PART No.	DESCRIPTION
R510	119-1031-15	1/10W 10k ohm
R512	119-1031-15	1/10W 10k ohm
R513	119-1031-15	1/10W 10k ohm
R514	119-1051-15	1/10W 1M ohm
R515	119-1051-15	1/10W 1M ohm
R517	119-1051-15	1/10W 1M ohm
R518	119-1051-15	1/10W 1M ohm
R519	119-1031-15	1/10W 10k ohm
R520	119-1031-15	1/10W 10k ohm
R521	119-1031-15	1/10W 10k ohm
R522	119-1031-15	1/10W 10k ohm
R524	119-1031-15	1/10W 10k ohm
R525	119-1031-15	1/10W 10k ohm
R527	116-1221-15	1/4W 1.2k ohm
R528	119-0000-05	1/10W 0 ohm JW
R530	032-0140-50	1/10W 10k ohm F
R531	032-0140-80	1/10W 18k ohm F
R532	116-1091-15	1/4W 1 ohm
R533	116-1221-15	1/4W 1.2k ohm
R534	119-1031-15	1/10W 10k ohm
R535	032-0140-22	1/10W 68k ohm F
R536	119-1001-15	1/10W 10 ohm
R537	119-4721-15	1/10W 4.7k ohm
R538	119-2221-15	1/10W 2.2k ohm
R539	119-1041-15	1/10W 100k ohm
R553	119-1031-15	1/10W 10k ohm
R554	119-1031-15	1/10W 10k ohm
R555	116-8211-15	1/4W 820 ohm
R556	116-8211-15	1/4W 820 ohm
R557	116-8211-15	1/4W 820 ohm
R563	116-4711-15	1/4W 470 ohm
R564	116-1221-15	1/4W 1.2k ohm
R565	116-1221-15	1/4W 1.2k ohm
R566	119-1521-15	1/10W 1.5k ohm
R567	119-4721-15	1/10W 4.7k ohm
R568	116-1221-15	1/4W 1.2k ohm
R569	116-1221-15	1/4W 1.2k ohm
R570	119-1031-15	1/10W 10k ohm
R571	119-4721-15	1/10W 4.7k ohm
R572	119-1031-15	1/10W 10k ohm
R573	032-0148-50	1/10W 100k ohm
R574	032-0140-16	1/10W 180k ohm F
R575	116-2721-15	1/4W 2.7k ohm
R576	116-1531-15	1/4W 15k ohm
R579	116-2721-15	1/4W 2.7k ohm
R581	119-1031-15	1/10W 10k ohm
R582	119-5611-15	1/10W 560 ohm
R583	116-4791-15	1/4W 4.7 ohm
R584	116-4791-15	1/4W 4.7 ohm
R586	119-0000-05	1/10W 0 ohm JW
R594	119-1051-15	1/10W 1M ohm
R595	119-0000-05	1/10W 0 ohm JW
R597	119-0000-05	1/10W 0 ohm JW
R908	119-6821-15	1/10W 6.8k ohm
R910	119-6821-15	1/10W 6.8k ohm
R912	119-6821-15	1/10W 6.8k ohm
R914	119-6821-15	1/10W 6.8k ohm
R916	119-1001-15	1/10W 10 ohm
R917	119-1531-15	1/10W 15k ohm
R918	119-2231-15	1/10W 22k ohm
R919	119-1001-15	1/10W 10 ohm
R920	119-1531-15	1/10W 15k ohm
R921	119-2231-15	1/10W 22k ohm
R922	119-5631-15	1/10W 56k ohm
R923	119-5631-15	1/10W 56k ohm
R924	119-2231-15	1/10W 22k ohm
R925	119-2231-15	1/10W 22k ohm
R926	119-1001-15	1/10W 10 ohm
R927	119-2231-15	1/10W 22k ohm
R928	119-1001-15	1/10W 10 ohm
R929	119-2231-15	1/10W 22k ohm
R930	119-1001-15	1/10W 10 ohm
R931	119-1531-15	1/10W 15k ohm
R932	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R933	119-1001-15	1/10W 10 ohm
R934	119-1531-15	1/10W 15k ohm
R935	119-2231-15	1/10W 22k ohm
R936	119-5631-15	1/10W 56k ohm
R937	119-5631-15	1/10W 56k ohm
R938	119-2231-15	1/10W 22k ohm
R939	119-2231-15	1/10W 22k ohm
R940	119-2231-15	1/10W 22k ohm
R941	119-1001-15	1/10W 10 ohm
R942	119-2231-15	1/10W 22k ohm
R943	119-1001-15	1/10W 10 ohm


REF No.	PART No.	DESCRIPTION
R2013	032-0148-56	1/16W 68k ohm
R2014	032-0148-56	1/16W 68k ohm
R2015	032-0148-56	1/16W 68k ohm
R2016	032-0148-56	1/16W 68k ohm
R2017	032-0148-51	1/10W 47k ohm
R2018	032-0148-51	1/10W 47k ohm
R2019	032-0148-51	1/10W 47k ohm
R2020	032-0148-51	1/10W 47k ohm
SUP101	060-0122-91	DSP-141N-S00B
SUP102	060-0122-91	DSP-141N-S00B
TH502	002-0229-90	PTH8L05B

REF No.	PART No.	DESCRIPTION
TM101	073-0762-90	TERMINAL
TM102	073-0762-90	TERMINAL
TM201	073-0762-90	TERMINAL
TM501	073-0762-90	TERMINAL
TM502	073-0762-90	TERMINAL
X170	061-3013-00	4.33MHz
X301	061-3537-90	41.6MHz
X401	061-3541-90	CRYSTAL 10MHz
PWB	039-3246-00	PWB(WITHOUT COMPONENTS)

CONNECTOR

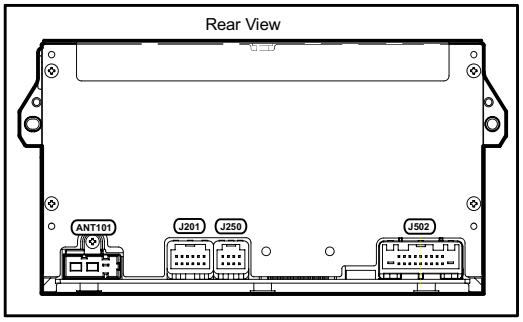


ANT101 (GT13)
Antenna connector




A	ANT+B
B	MAIN ANT
C	SUB ANT

J201 (TH12)
TEL/NAVI connector




h11	AUX LH(-)
h12	TEL(+)
h13	TEL(-)
h14	NAVI(+)
h15	NAVI(-)
h16	CD EJECT
h17	AUX RH(+)
h18	AUX GND
h19	TEL GND
h20	NAVI GND
h21	AUX GND
h22	SW GND

J250 (TH08)
AUDIO-BUS
connector




h01	AUDIO L(+)
h02	AUDIO R(+)
h03	M-CAN(+)
h04	M-CAN(-)
h05	AUDIO L(-)
h06	AUDIO R(-)
h07	AUDIO GND
h08	N.C.

J502 (TH18)
Main connector




1	AMP ON	11	SP FR(+)
2	SP FL(+)	12	SP FR(-)
3	SP FL(-)	13	SP RR(+)
4	SP RL(+)	14	SP RR(-)
5	SP RL(-)	15	STRG GND
6	STRG SW A	16	STRG SW B
7	ACC	17	N.C.
8	N.C.	18	N.C.
9	ILL (+)	19	B/U
10	N.C.	20	GND

SYSTEM

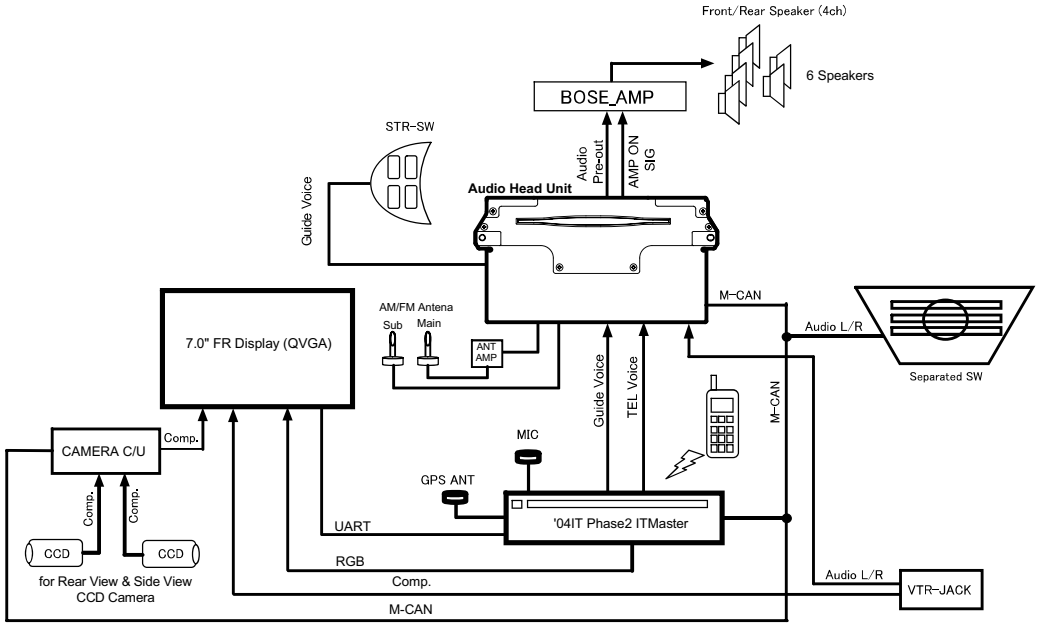

EXPLODED VIEW/PARTS LIST

Main section

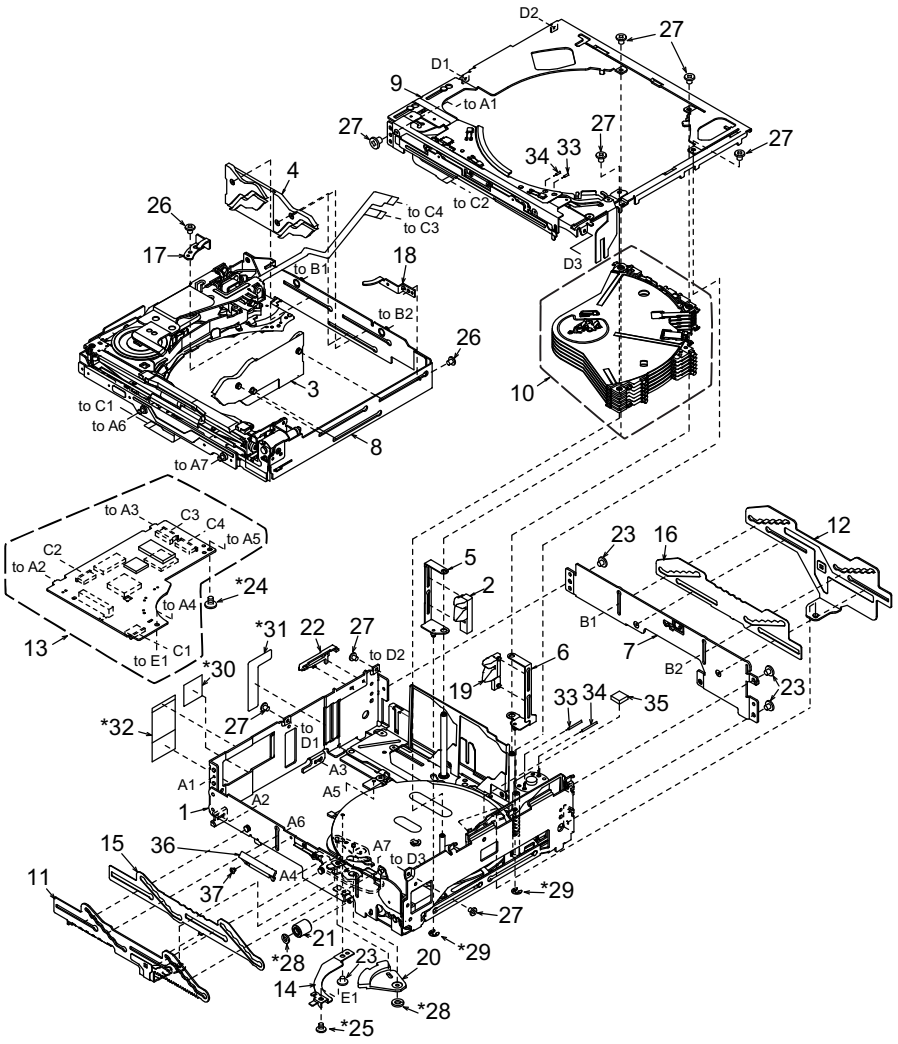


* Do not reuse the following parts.
(No.24,25,28,29,30,31,32)

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-610-100	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	HBS-584-100	DH-SEL-ASSY S	1
4	HBS-583-100	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-0671-23	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1871-21	N-DRIVE-CH UNIT	1
9	966-1764-23	UPPRR UNIT ASSY	1
10	HBS-566-300	DISCHOLDER UNIT	1
11	966-1771-21	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY R	1
13	HBS-605-100	CD-PWB-ASSY	1
14	620-1640-20	SW-H-PLATE	1
15	620-1778-21	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1
19	621-1634-23	DISC STOPPER R	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	621-1636-24	SW LINK	1
21	621-1765-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW (M2.0x2.0)	4
24	716-3629-00	SCREW (M2.0x2.5)	1
25	716-1851-03	SCREW (M2.0x3.0)	1
26	716-3450-00	SCREW (M1.7x2.0)	2
27	716-3451-01	SCREW (M1.7x2.5)	8
28	746-0761-00	WASHER	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT WIRE	1
34	802-4921-60	VINYL-COAT WIRE	1
35	345-5824-00	RUBBER PART	1
36	621-1763-20	LOADING GUIDE B	1
37	716-1859-01	SCREW (M1.7x2.0)	1


Lower unit assy section

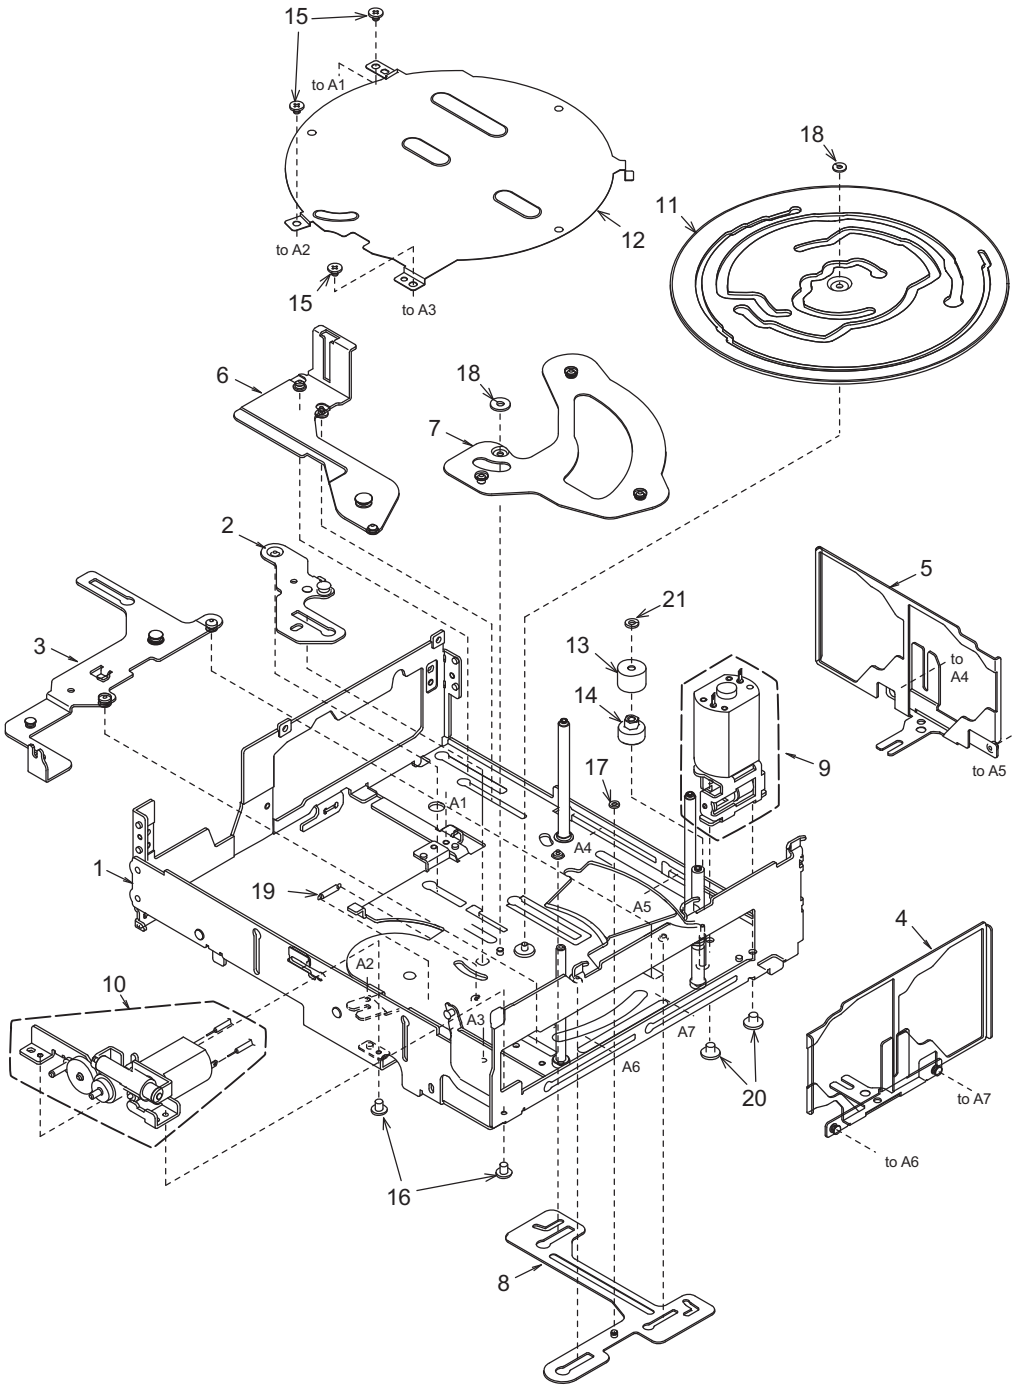

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1869-00	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-1758-20	DS-SP-ASSY A	1
4	966-1808-20	DH-SP-ASSY S	1
5	966-1809-20	DH-SP-ASSY R	1
6	966-0677-24	D-SHT PL-B-ASSY	1
7	966-0659-22	DH-SP-ASSY B	1
8	966-0666-22	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-568-200	UD-MOTOR-ASSY	1
11	620-1623-24	CAM GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	3
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	1
18	746-0768-00	WASHER	2
19	750-6756-20	SW-L-SPRING	1
20	716-1851-03	SCREW(M2.0x3.0)	2
21	746-0941-00	WASHER	1

N-Drive-CH unit section

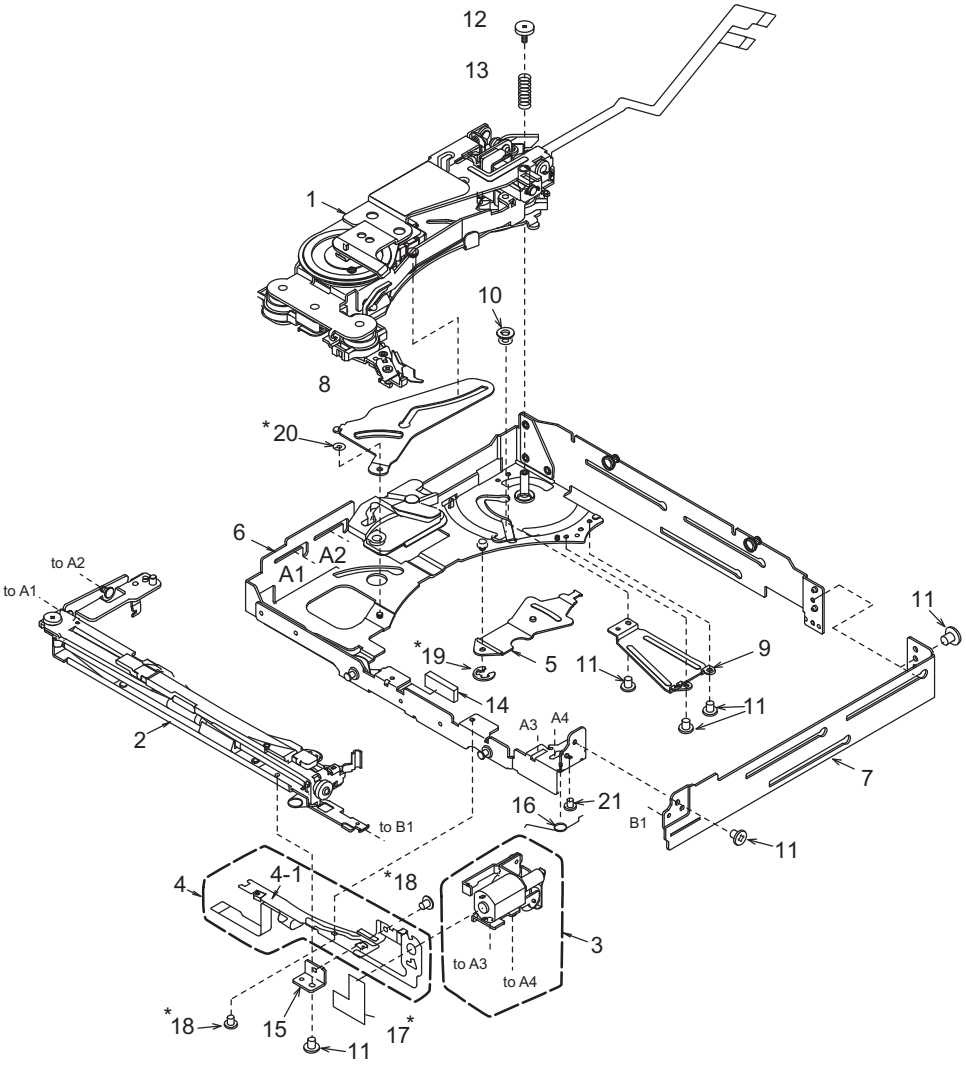


* Do not reuse the following parts.
(No.17,18,19,20)

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-604-100	N-DRIVE UNIT	1
2	HBS-567-200	LOADING-U-ASSY	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1
4	HBS-552-200	L-SENSOR-S-ASSY	1
4-1	----------	SENSOR-L-FPC	1
5	966-0676-21	D-SHT LK-A-ASSY	1
6	966-1755-23	DRIVE-CH A ASSY	1
7	620-1681-21	DRIVE CHASSIS B	1
8	620-1672-21	DR-SUPPORT-PL	1
9	620-1680-20	D-SHIFT COVER	1
10	622-1743-21	D-SHIFT ROLLER B	1

NO.	PART NO.	DESCRIPTION	Q'TY
11	716-3450-00	SCREW(M1.7x2.0)	6
12	716-3459-01	SCREW(M1.7x2.0)	1
13	750-6761-20	DRIVE SPRING A	1
14	345-5868-01	RUBBER PART	1
15	620-1651-21	S-PWB-PLATE	1
16	750-6754-20	LO-ES-SPRING B	1
17	345-5424-01	SEN-FPC GUIDE	1
18	716-1859-01	SCREW(M1.7x2.0)	2
19	744-0039-00	E-RING	1
20	746-0870-00	WASHER	1
21	716-3538-00	SCREW(M1.7x2.0)	1

Upper unit assy section

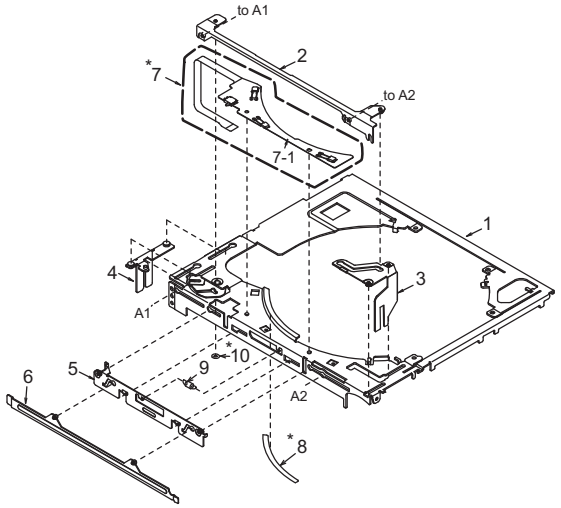


* Do not reuse the following parts.
(No.7,8,10)

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1761-22	UPPER-CHA-ASSY	1
2	966-1765-20	LO-SHIFT A ASSY	1
3	966-0700-22	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-1766-20	SHUTTER-PL-ASSY	1
6	966-1763-20	SHUTTER ASSY	1
7	HBS-553-200	U-SENSOR-S-ASSY	1
7-1	----------	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

[Grease Point]

* Grease : SANKOL FG-87HSR

Put grease on the surface	
Put grease on the reverse side	
Put grease on the both sides	
Put grease on the edge	

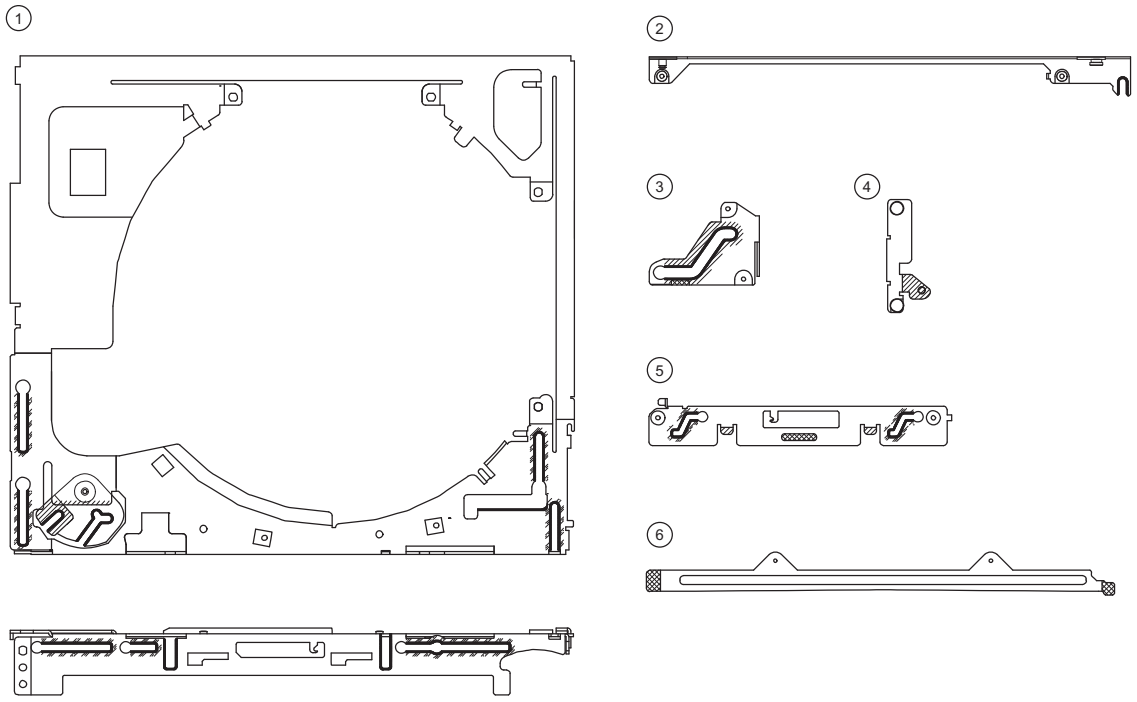

ELECTRICAL PARTS LIST

* Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

CD PWB(BM1)

REF No.	PART No.	DESCRIPTION
C1	168-1052-78	1uF
C3	168-1042-78	16V 0.1uF
C4	043-0559-90	6.3V 22uF
C5	168-1032-55	0.01uF K
C6	042-1702-90	6.3V 100uF
C7	168-1052-78	1uF
C9	168-1052-78	1uF
C11	168-1052-78	1uF
C12	042-0671-01	10V 47uF TA
C13	168-1052-78	1uF
C14	168-1042-78	16V 0.1uF
C15	168-1052-78	1uF
C16	043-0559-90	6.3V 22uF
C17	168-1032-55	0.01uF K
C18	168-1052-78	1uF
C19	043-0559-90	6.3V 22uF
C20	168-1042-78	16V 0.1uF
C21	168-1032-55	0.01uF K
C23	043-0559-90	6.3V 22uF
C24	043-0559-90	6.3V 22uF
C25	168-4732-78	0.047uF K
C26	166-4711-50	470pF CH
C28	168-4732-78	0.047uF K
C29	166-4711-50	470pF CH
C30	166-1007-50	10pF CH
C31	166-1007-50	10pF CH
C32	168-1042-78	16V 0.1uF
C33	168-2222-55	2200pF K
C34	168-1042-78	16V 0.1uF
C35	168-1042-78	16V 0.1uF
C36	168-1042-78	16V 0.1uF
C37	168-6822-55	6800pF K
C39	168-1042-78	16V 0.1uF
C40	168-3332-78	0.033uF K
C41	168-1042-78	16V 0.1uF
C42	168-1042-78	16V 0.1uF
C43	168-1042-78	16V 0.1uF
C45	168-1042-78	16V 0.1uF
C46	168-1042-78	16V 0.1uF
C48	168-1042-78	16V 0.1uF
C49	168-1042-78	16V 0.1uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C52	168-5622-55	5600pF K
C53	168-1042-78	16V 0.1uF
C54	166-6801-50	68pF CH
C55	168-1532-55	0.015uF K
C56	168-1042-78	16V 0.1uF
C57	168-1032-55	0.01uF K
C58	168-1042-78	16V 0.1uF
C59	168-1042-78	16V 0.1uF
C60	168-1522-55	1500pF K
C61	168-3322-55	3300pF K
C62	168-1032-55	0.01uF K
C64	168-1042-78	16V 0.1uF
C65	168-1032-55	0.01uF K
C67	168-1032-55	0.01uF K
C69	168-1532-55	0.015uF K
C70	166-4701-50	47pF CH
C71	168-1042-78	16V 0.1uF
C72	168-1042-78	16V 0.1uF
C74	166-6097-50	6pF CH
C75	168-1042-78	16V 0.1uF
C76	168-5622-55	5600pF K
C77	168-1032-55	0.01uF K
C79	166-1501-50	15pF CH
C80	166-1501-50	15pF CH
C101	043-0563-90	16V 47uF
CCT1	050-0145-59	1/16W 22 ohm x4
CCT2	050-0145-54	1/16W 47k ohm x4
CCT3	050-0145-54	1/16W 47k ohm x4
CCT4	050-0145-55	1/16W 10k ohm x4
CCT5	050-0140-55	1/32W 2.2k ohmx4J
D1	001-4301-14	HZU 3.0B1
D1	001-0529-14	MA8030-L
D2	001-0367-91	1SS226
D3	001-4301-13	HZU 2.7B2
D3	001-0529-13	MA8027-H
D4	001-4301-18	HZU 3.6B1
D4	001-0529-18	MA8036-L
D5	001-2612-90	RB520S-30
D6	001-2612-90	RB520S-30
D7	001-9210-50	AVR-M1608C270MTAAD
D8	001-9210-50	AVR-M1608C270MTAAD
IC2	052-5071-30	TMP91CY22IFG-6R96
IC3	051-6733-00	TC94A73MFG-201
IC4	051-6060-08	BD7961FM-E2
IC5	051-5445-08	BD5227G-TR
IC8	051-9402-78	BR93L56RFVM-W
IC9	051-6072-08	BD7931FE2
IC10	051-5833-00	GP1S093HCZ
IC11	051-3392-90	S-1323B15NB-N8ATFG
J1	074-1237-69	19PIN
J2	074-1201-65	15P
J3	074-1138-56	6P
J4	074-1100-61	SOCKET 11P
J5	074-1201-61	11P SOCKET
Q1	060-0252-01	PT4850F
Q2	125-0021-91	DTA114EUA
Q3	198-3018-00	2SK3018
Q4	190-2060-00	2SA2060
Q8	190-2060-00	2SA2060
Q9	125-9026-90	IMF29
Q10	125-2027-91	DTC114EUA
Q11	125-0021-91	DTA114EUA
Q12	125-2027-91	DTC114EUA
Q13	125-9026-90	IMF29
R1	119-6811-15	1/10W 680 ohm
R2	119-6811-15	1/10W 680 ohm
R3	032-0163-91	1/2W 10 ohm
R4	032-0163-91	1/2W 10 ohm
R5	119-2231-15	1/10W 22k ohm
R6	116-1001-15	1/4W 10 ohm
R7	119-1021-15	1/10W 1k ohm
R8	116-1591-15	1/4W 1.5 ohm
R9	119-2231-15	1/10W 22k ohm
R10	119-4711-15	1/10W 470 ohm
R11	119-2211-15	1/10W 220 ohm
R12	119-6811-15	1/10W 680 ohm
R13	119-1011-15	1/10W 100 ohm
R14	119-2231-15	1/10W 22k ohm
R15	119-8231-15	1/10W 82k ohm
R16	119-1041-15	1/10W 100k ohm
R17	119-1041-15	1/10W 100k ohm
R18	119-1041-15	1/10W 100k ohm
R19	119-1041-15	1/10W 100k ohm
R20	119-1041-15	1/10W 100k ohm
R21	119-2221-15	1/10W 2.2k ohm
R22	119-4711-15	1/10W 470 ohm
R23	119-1051-15	1/10W 1M ohm
R24	119-2211-15	1/10W 220 ohm
R25	119-2211-15	1/10W 220 ohm
R26	119-1041-15	1/10W 100k ohm
R27	119-1051-15	1/10W 1M ohm
R28	119-1041-15	1/10W 100k ohm
R29	119-1041-15	1/10W 100k ohm
R30	119-4701-15	1/10W 47 ohm
R31	119-2201-15	1/10W 22 ohm
R32	119-1051-15	1/10W 1M ohm
R33	119-2211-15	1/10W 220 ohm
R35	119-1051-15	1/10W 1M ohm
R36	119-4721-15	1/10W 4.7k ohm
R37	119-4731-15	1/10W 47k ohm
R38	119-2231-15	1/10W 22k ohm
R39	119-1041-15	1/10W 100k ohm
R40	119-4721-15	1/10W 4.7k ohm
R41	119-4731-15	1/10W 47k ohm
R43	119-4731-15	1/10W 47k ohm
R44	119-2201-15	1/10W 22 ohm
R45	119-1511-15	1/10W 150 ohm
R46	119-4721-15	1/10W 4.7k ohm
R48	119-1041-15	1/10W 100k ohm
R49	119-0000-05	1/10W 0 ohm JW
R50	119-2211-15	1/10W 220 ohm
R51	119-0000-05	1/10W 0 ohm JW
R52	119-1041-15	1/10W 100k ohm
R53	119-5621-15	1/10W 5.6k ohm
R55	119-3341-15	1/10W 330k ohm
R56	119-4731-15	1/10W 47k ohm
R57	119-2231-15	1/10W 22k ohm
R58	119-0000-05	1/10W 0 ohm JW
R59	119-1511-15	1/10W 150 ohm
R60	119-4731-15	1/10W 47k ohm
R61	119-1041-15	1/10W 100k ohm
R62	119-1041-15	1/10W 100k ohm
R63	119-1041-15	1/10W 100k ohm
R64	119-1011-15	1/10W 100 ohm
R65	119-1041-15	1/10W 100k ohm
R66	117-5611-15	1/8W 560 ohm
R67	117-7511-15	1/8W 750 ohm
R68	117-7511-15	1/8W 750 ohm
R69	119-1041-15	1/10W 100k ohm
R81	116-1591-15	1/4W 1.5 ohm
R211	119-1041-15	1/10W 100k ohm
R212	119-1041-15	1/10W 100k ohm
S1	013-7416-50	SW SPVL110200
S2	013-7416-50	SW SPVL110200
S3	013-7416-50	SW SPVL110200
S4	013-7415-50	SPVG110400
X1	061-3534-90	16.92MHz
X3	060-1545-90	20MHz
PWB	039-3083-21	PWB(WITHOUT COMPONENT)

Sensor-L-PFC(BM2) section

REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F
PT2	060-0252-01	PT14850F
PT3	051-5833-00	GP1S093HCZ
PWB	039-2467-21	PWB(WITHOUT COMPONENTS)

Sensor-U-PFC(BM3) section

REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804
LED2	001-7077-00	GL4804
LED3	001-7077-00	GL4804
S5	013-7417-50	ABC1122P161
PWB	039-2466-20	PWB(WITHOUT COMPONENTS)