9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

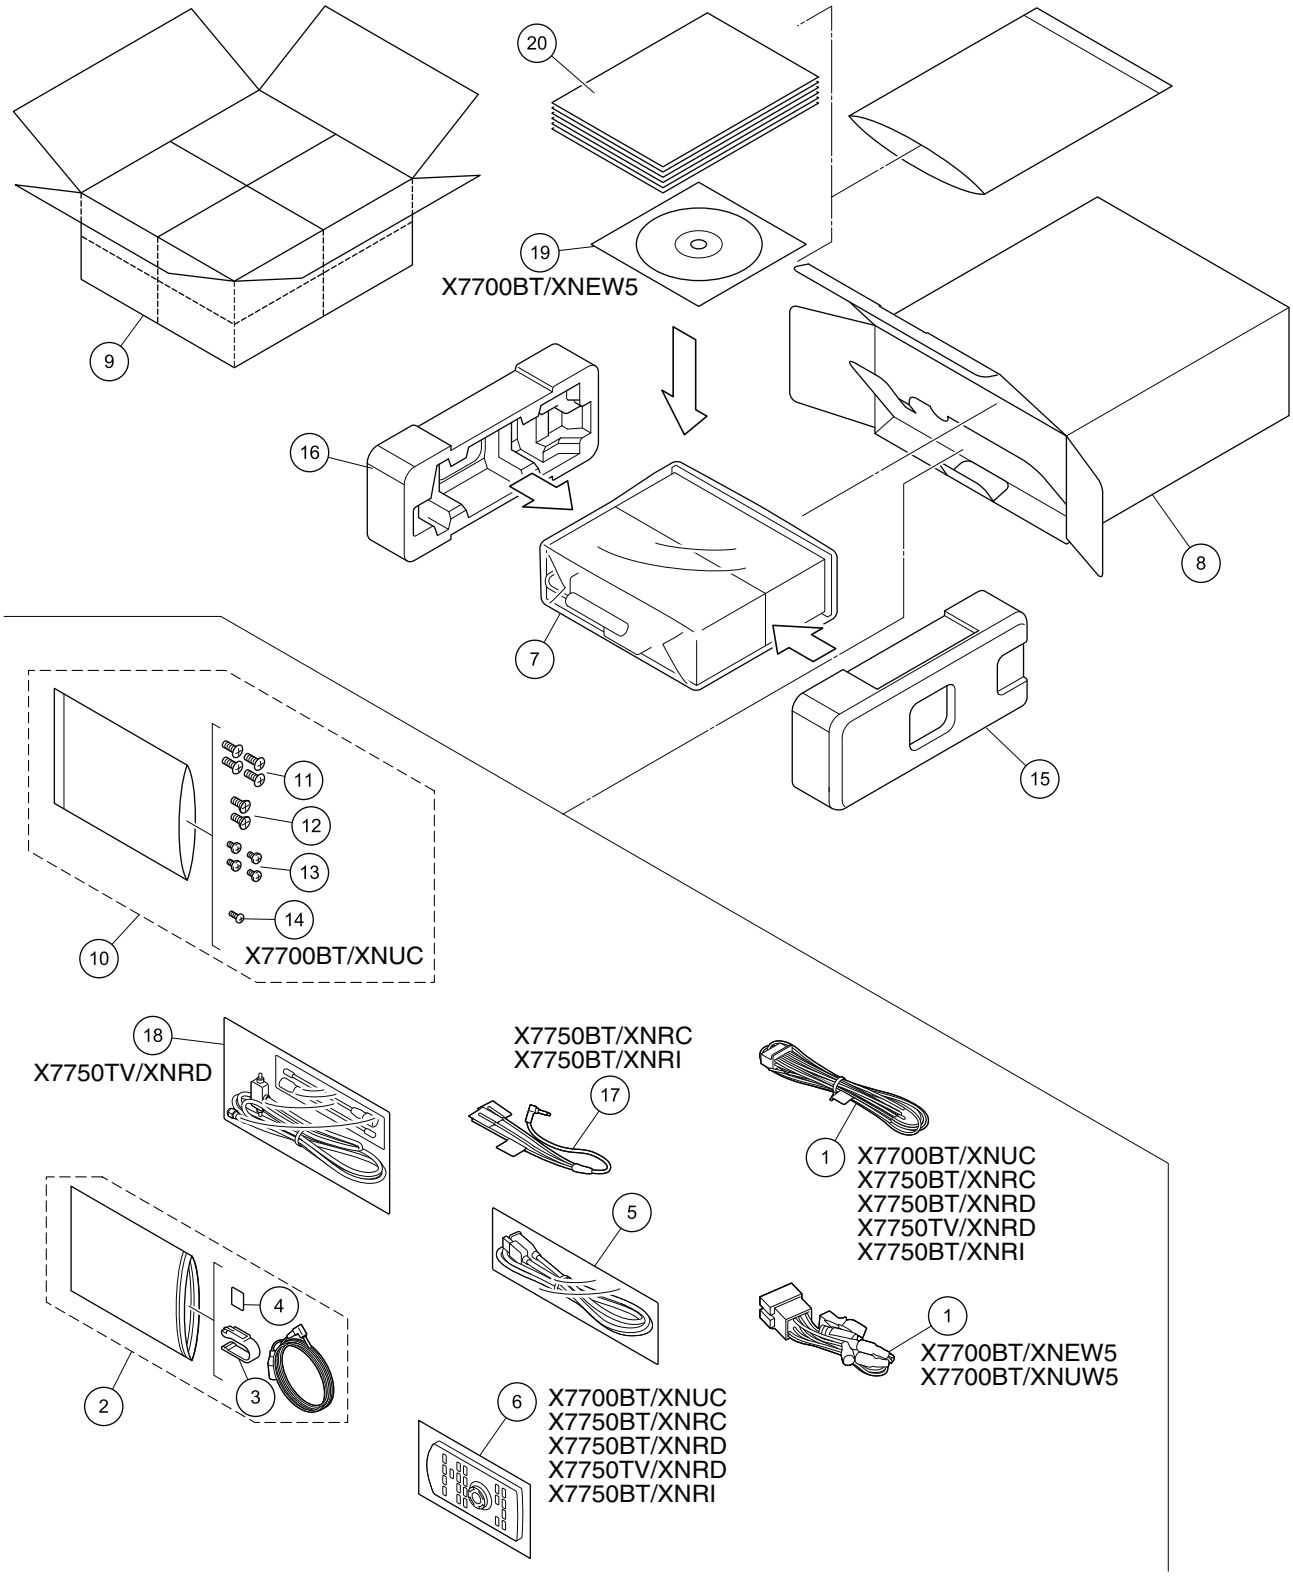

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	See Contrast table (2)
	2	Microphone Assy	CPM1083
	3	Holder	CZN7192
	4	Cushion	CZN7193
	5	USB Extended Cable	CDP1587
	6	Card Remote Control Unit	See Contrast table (2)
	7	Cover	See Contrast table (2)
	8	Unit Box	See Contrast table (2)
	9	Contain Box	See Contrast table (2)
	10	Screw Assy	See Contrast table (2)
	11	Screw	BMZ50P060FTC
	12	Screw	CMZ50P060FTC
	13	Screw (M4 x 3)	CBA1870
	14	Screw	See Contrast table (2)
	15	Protector	CHP4684
	16	Protector	CHP4685
	17	Cord Assy	See Contrast table (2)
	18	Rod Antenna	See Contrast table (2)
	19	IM CD-ROM	See Contrast table (2)
*	20-1	Warranty Card	See Contrast table (2)
	20-2	Owner's Manual	See Contrast table (2)
	20-3	Installation Manual	See Contrast table (2)
	20-4	Quick Start Guide	See Contrast table (2)
*	20-5	Caution Card	See Contrast table (2)
*	20-6	Caution Card	See Contrast table (2)

(2) CONTRAST TABLE

AVH-X7700BT/XNUC, AVH-X7700BT/XNEW5, AVH-X7700BT/XNUW5, AVH-X7750BT/XNRC, AVH-X7750BT/XNRD, AVH-X7750TV/XNRD and AVH-X7750BT/XNRI are constructed the same except for the following:

Mark	No.	Description	AVH-X7700BT/XNUC	AVH-X7700BT/XNEW5	AVH-X7700BT/XNUW5	AVH-X7750BT/XNRC
	1	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665
	6	Card Remote Control Unit	CXE5116	Not used	Not used	CXE5116
	7	Cover	CEG1544	CEG1474	CEG1474	CEG1474
	8	Unit Box	CHG8752	CHG8750	CHG8751	CHG8753
	9	Contain Box	CHL8752	CHL8750	CHL8751	CHL8753
	10	Screw Assy	CEC4353	CEC2991	CEC2991	CEC2991
	14	Screw	BPZ20P060FTC	Not used	Not used	Not used
	17	Cord Assy	Not used	Not used	Not used	CDP1655
	18	Rod Antenna	Not used	Not used	Not used	Not used
	19	IM CD-ROM	Not used	CPJ1485	Not used	Not used
*	20-1	Warranty Card	QRY3001	CRY1376	CRY1376	Not used
	20-2	Owner's Manual	CRD4829	Not used	CRB4468	CRD4830
	20-3	Installation Manual	Not used	CRD4828	Not used	Not used
	20-4	Quick Start Guide	Not used	CRD4827	Not used	Not used
*	20-5	Caution Card	Not used	CRP1436	Not used	Not used
*	20-6	Caution Card	Not used	CRP1441	Not used	Not used

Mark	No.	Description	AVH-X7750BT/XNRD	AVH-X7750TV/XNRD	AVH-X7750BT/XNRI
	1	Cord Assy	CDP1665	CDP1665	CDP1665
	6	Card Remote Control Unit	CXE5116	CXE5116	CXE5116
	7	Cover	CEG1474	CEG1474	CEG1474
	8	Unit Box	CHG8754	CHG8761	CHG8755
	9	Contain Box	CHL8754	CHL8761	CHL8755
	10	Screw Assy	CEC2991	CEC2991	CEC2991
	14	Screw	Not used	Not used	Not used
	17	Cord Assy	Not used	Not used	CDP1655
	18	Rod Antenna	Not used	CXE7989	Not used
	19	IM CD-ROM	Not used	Not used	Not used
*	20-1	Warranty Card	Not used	Not used	Not used
	20-2	Owner's Manual	CRD4831	CRD4831	CRD4832
	20-3	Installation Manual	Not used	Not used	Not used
	20-4	Quick Start Guide	Not used	Not used	Not used
*	20-5	Caution Card	Not used	Not used	Not used
*	20-6	Caution Card	Not used	Not used	Not used

9.2 EXTERIOR (1)

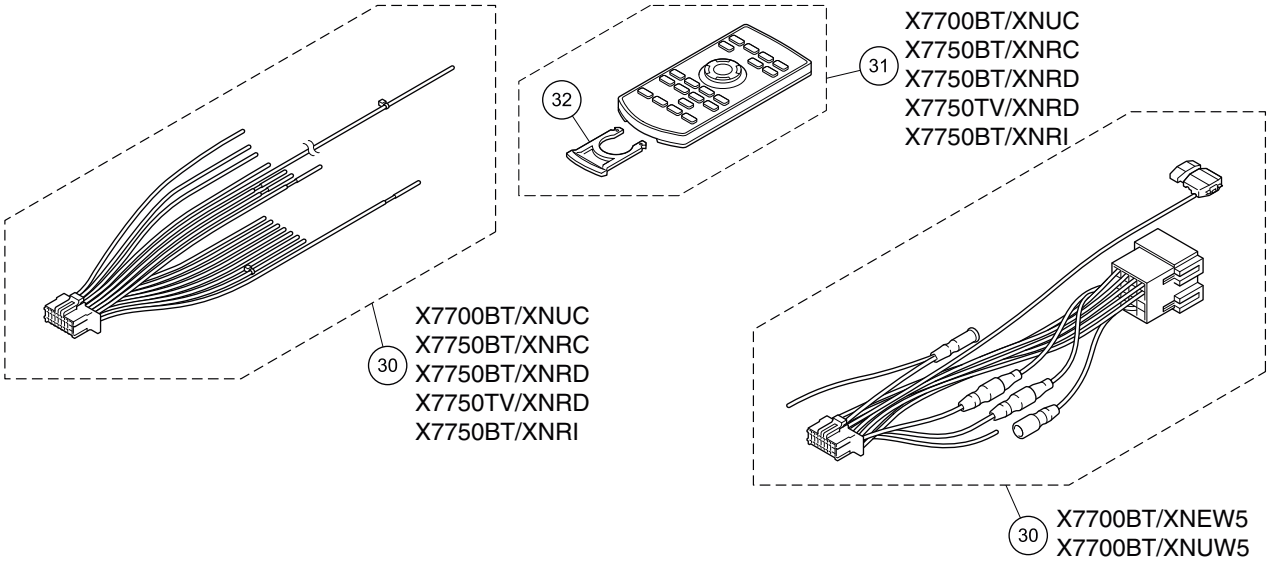

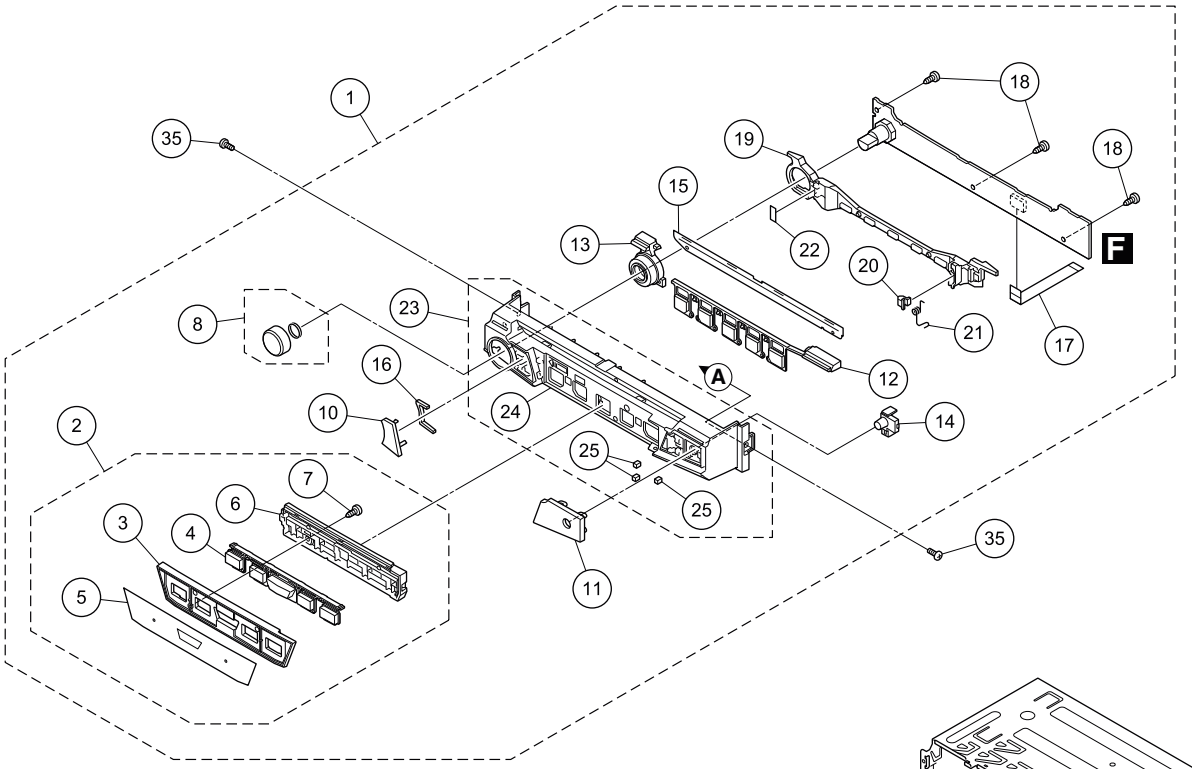

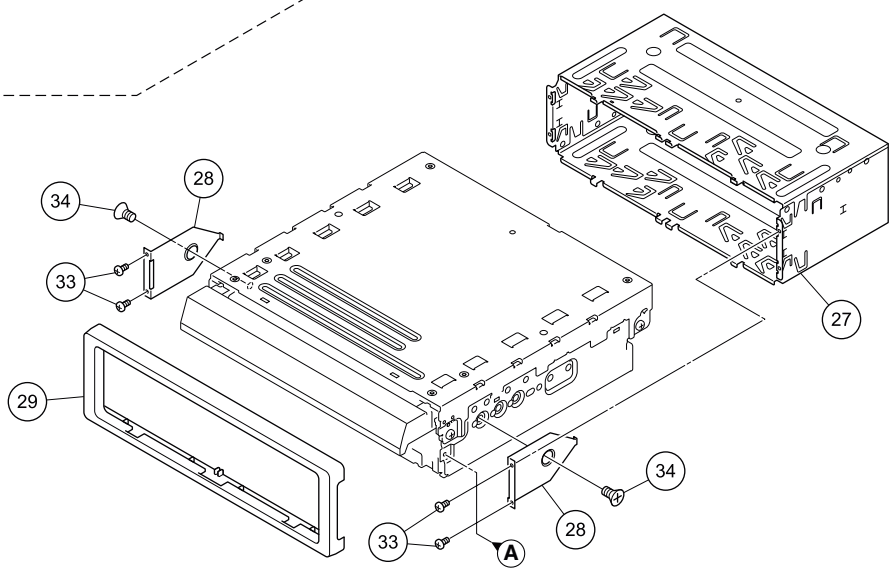

(1) EXTERIOR (1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Grille Assy	See Contrast table (2)
	2	Detach Grille Assy	See Contrast table (2)
	3	Grille	CNU2892
	4	Button	CAI4446
	5	Plate	See Contrast table (2)
	6	Cover	CNU2893
	7	Screw	BPZ20P060FTC
	8	Knob Unit	CXE5949
	9	•••••	
	10	Button (DISP)	CAI4443
	11	Button (EJECT)	CAI4444
	12	Button	CAI4445
	13	Lighting Conductor	CNW3299
	14	Lighting Conductor	CNW3301
	15	Cover	CNN4266
	16	Cushion	CNN4832
	17	FFC	CDD1065
	18	Screw	BPZ20P060FTC
	19	Lighting Conductor	CNW3300
	20	Arm	CNV9891
	21	Spring	CBH2997
	22	Sheet	CNN4939
	23	Service Grille Unit	CXX7710
	24	Grille Unit	CXE7594
	25	Cushion	QNM3094
	26	•••••	
	27	Holder	CND3854
	28	Bracket	CND3855
	29	Panel	CNU2269
	30	Cord Assy	See Contrast table (2)
	31	Card Remote Control Unit	See Contrast table (2)
	32	Battery Cover	See Contrast table (2)
	33	Screw	BMZ20P025FTC
	34	Screw	CMZ50P060FTC
	35	Screw	ISS26P055FTC

(2) CONTRAST TABLE

AVH-X7700BT/XNUC, AVH-X7700BT/XNEW5, AVH-X7700BT/XNUW5, AVH-X7750BT/XNRC, AVH-X7750BT/XNRD, AVH-X7750TV/XNRD and AVH-X7750BT/XNRI are constructed the same except for the following:

Mark	No.	Description	AVH-X7700BT/XNUC	AVH-X7700BT/XNEW5	AVH-X7700BT/XNUW5	AVH-X7750BT/XNRC
	1	Grille Assy	CXE7714	CXE7714	CXE7714	CXE7715
	2	Detach Grille Assy	CXE7721	CXE7721	CXE7721	CXE7722
	5	Plate	CNN4833	CNN4833	CNN4833	CNN4951
	30	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665
	31	Card Remote Control Unit	CXE5116	Not used	Not used	CXE5116
	32	Battery Cover	CNU1624	Not used	Not used	CNU1624

Mark	No.	Description	AVH-X7750BT/XNRD	AVH-X7750TV/XNRD	AVH-X7750BT/XNRI
	1	Grille Assy	CXE7715	CXE7716	CXE7715
	2	Detach Grille Assy	CXE7722	CXE7723	CXE7722
	5	Plate	CNN4951	CNN4953	CNN4951
	30	Cord Assy	CDP1665	CDP1665	CDP1665
	31	Card Remote Control Unit	CXE5116	CXE5116	CXE5116
	32	Battery Cover	CNU1624	CNU1624	CNU1624

9.3 EXTERIOR (2)

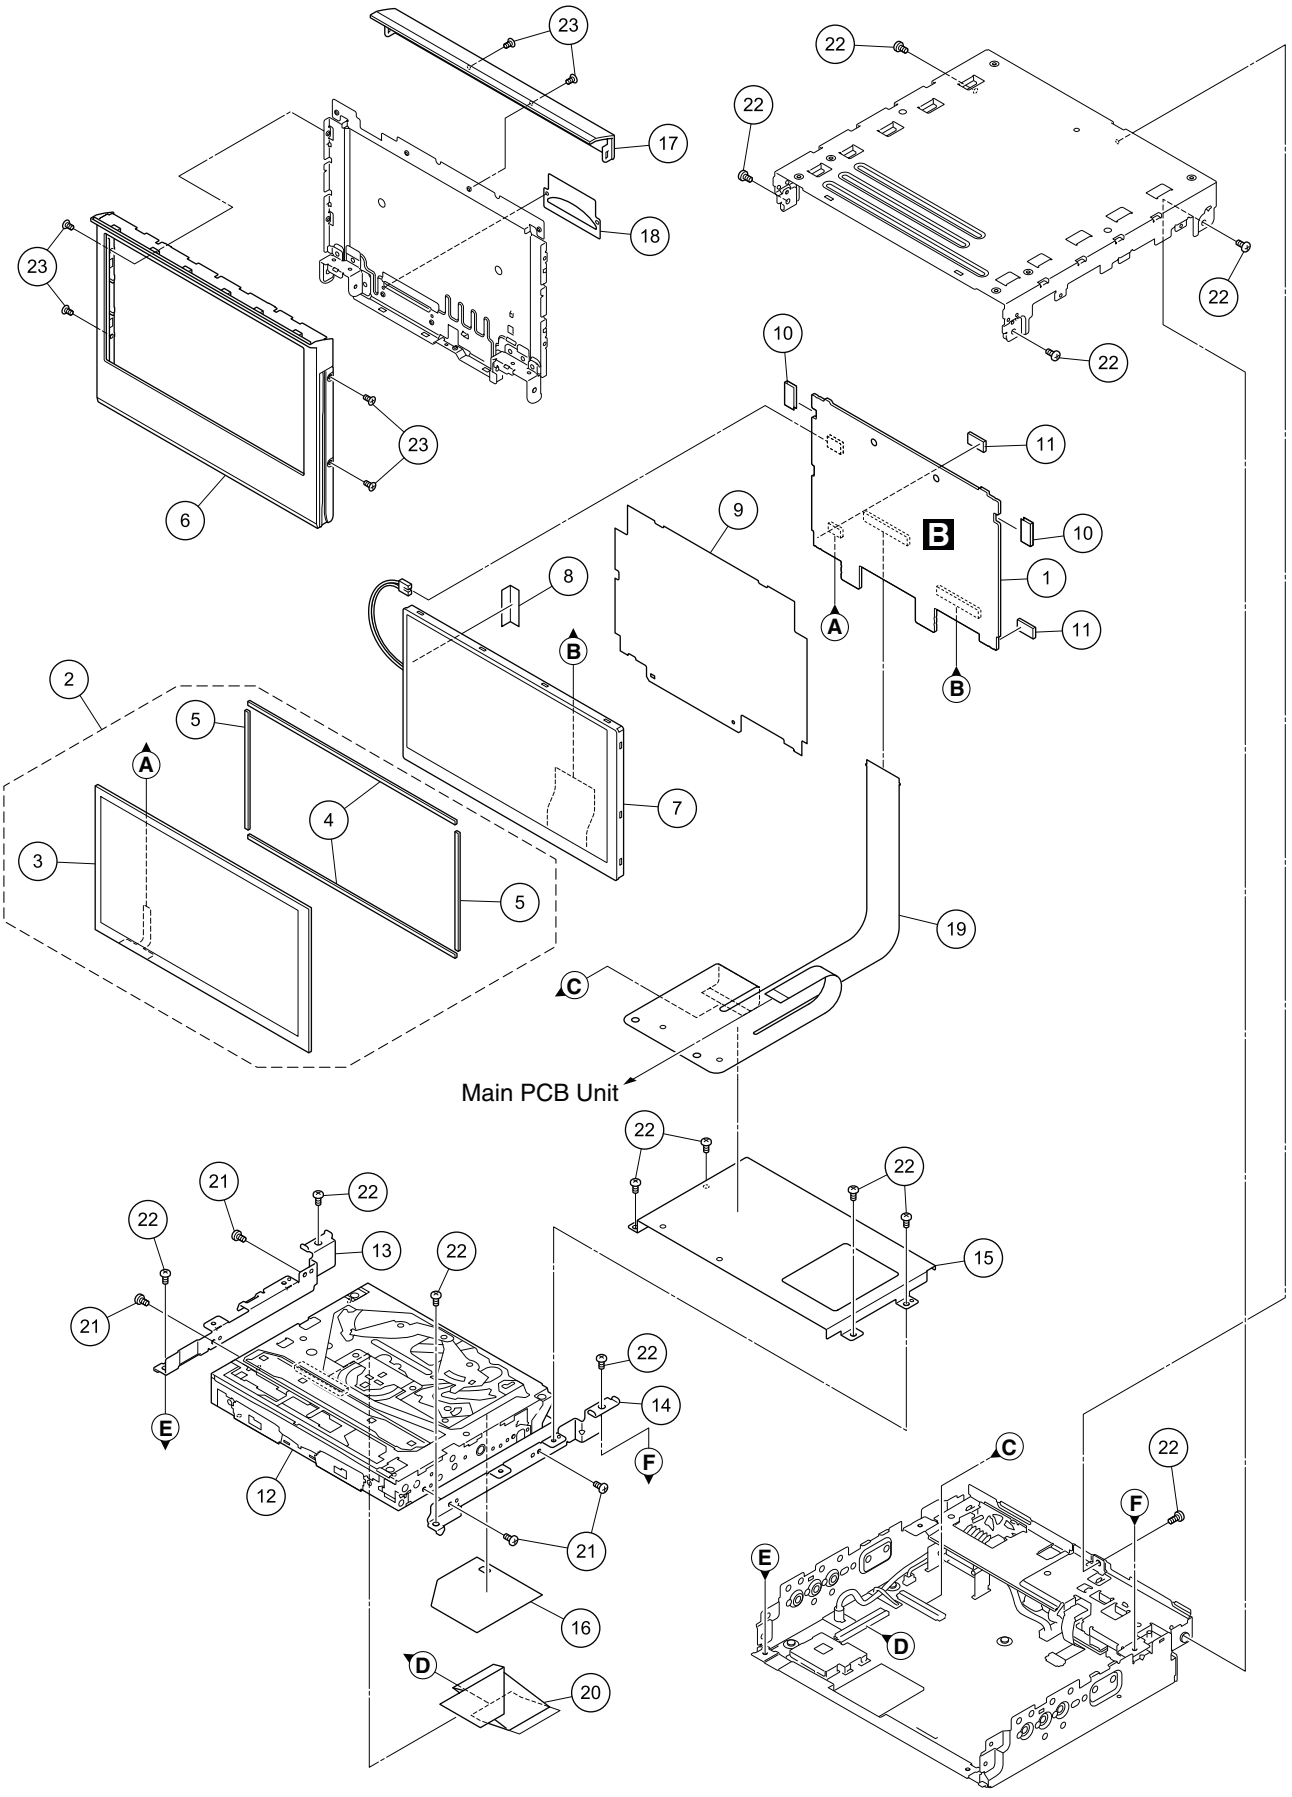

EXTERIOR (2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Monitor Unit	CWN9246
	2	Touch Panel Assy	CXE5830
	3	Touch Panel	CSX1196
	4	Cushion	CNN4271
	5	Cushion	CNN4272
	6	Grille	
		X7700BT/XNUC	CNU2178
		X7700BT/XNEW5	CNU3031
		X7700BT/XNUW5	CNU3031
		X7750BT/XNRC	CNU2178
		X7750BT/XNRD	CNU2178
		X7750TV/XNRD	CNU2178
		X7750BT/XNRI	CNU2178
	7	TFT LCD	CWX4352
	8	Sheet	CNN1694
	9	Insulator	CNN4259
	10	Sheet	CNN1750
	11	Gasket	CNN4740
	12	DVD Mechanism Module (MS7.2)	CXK6903
	13	Bracket	CND6668
	14	Bracket	CND6669
	15	Bracket	CND6667
	16	Insulator	CNN2764
	17	Cover	CNU3032
	18	Sheet	CNN4437
	19	FPC	CNQ7214
	20	FFC	CDD1066
	21	Screw	BMZ20P025FTC
	22	Screw	BSZ26P060FTC
	23	Screw (M2 x 2)	CBA1872

9.4 EXTERIOR (3)

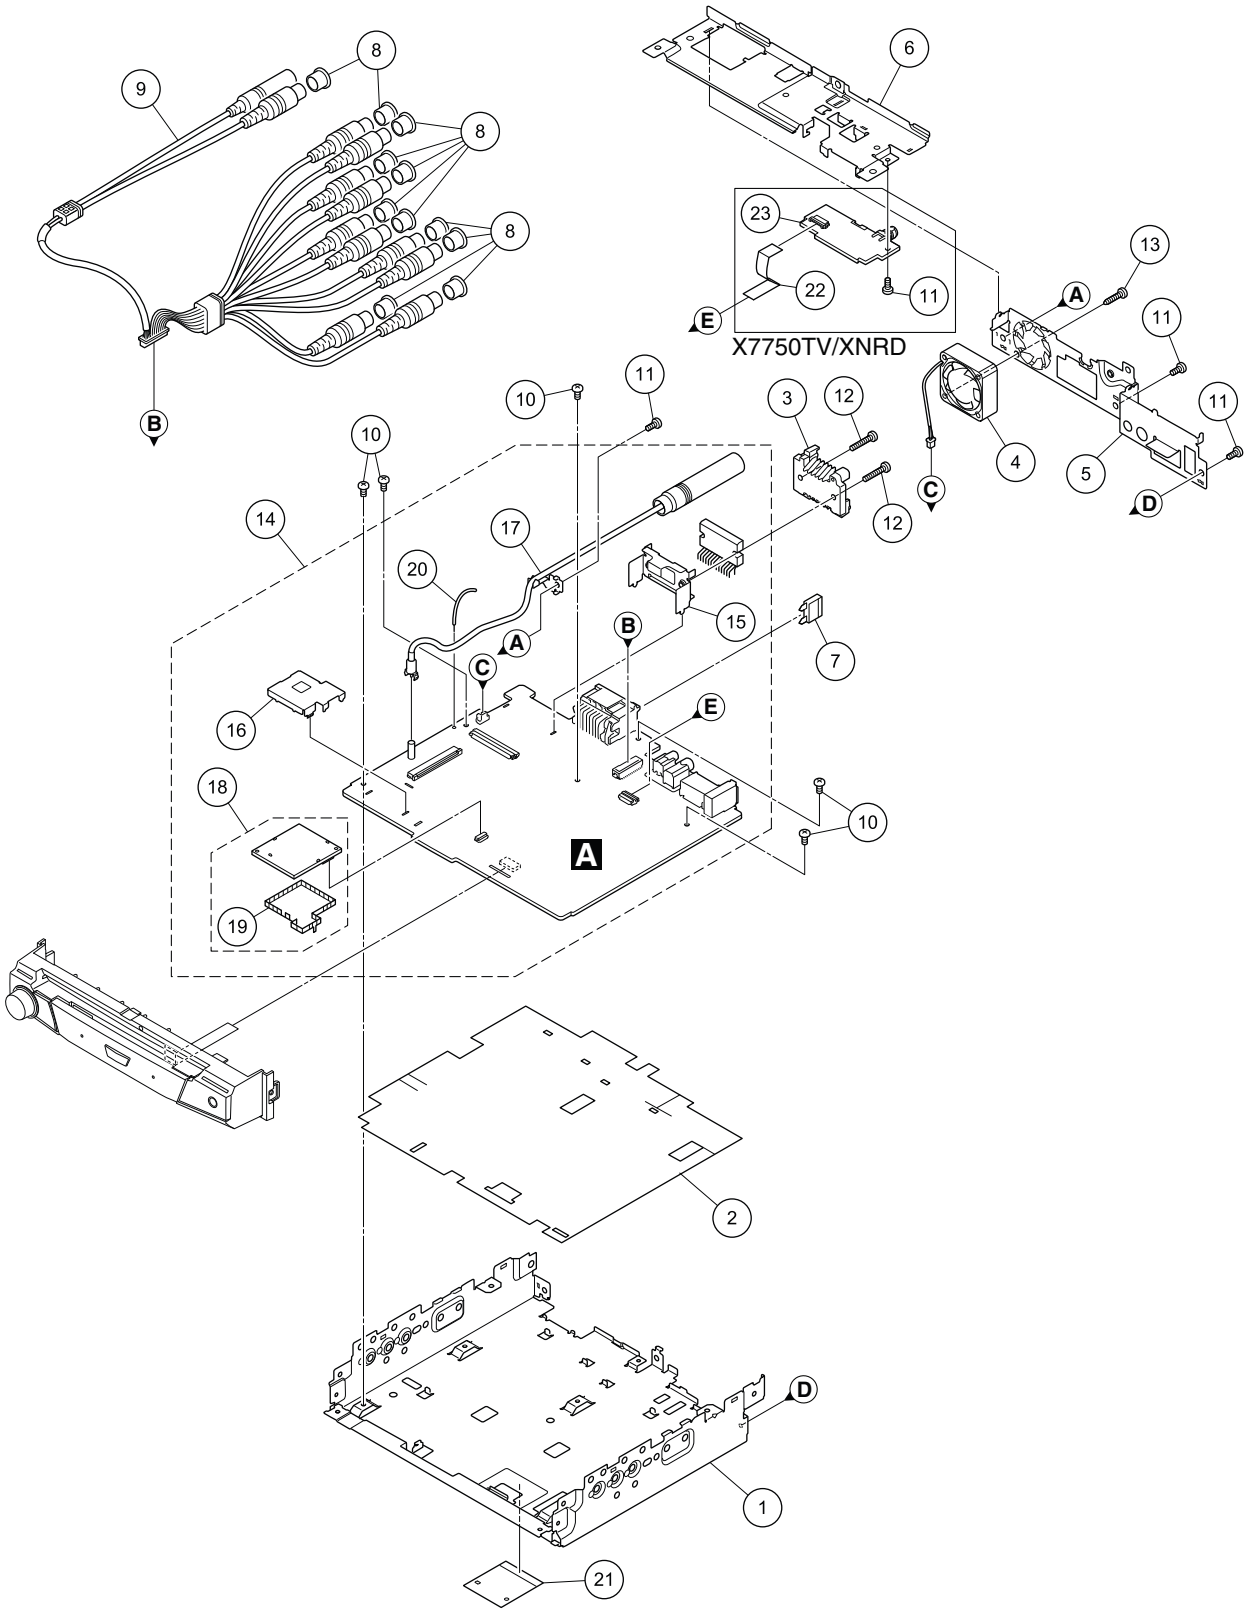

(1) EXTERIOR (3) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Chassis	CNA3339
	2	Insulator	CNN4835
	3	Heat Sink	CNR2177
	4	Fan Motor	CXM1460
	5	Holder	See Contrast table (2)
	6	Holder	CND7195
⚠	7	Fuse (10 A)	YEK5001
	8	Cap	CNV6727
	9	Cord Assy	CDF1179
	10	Screw	BMZ26P040FTC
	11	Screw	BSZ26P060FTC
	12	Screw	BSZ26P160FTC
	13	Screw	BPZ26P080FTC
	14	Mother Unit	See Contrast table (2)
	15	Holder	CND6671
	16	Shield Case	CND7316
	17	Antenna Cable	CDH1390
	18	BT Module	YWX5053
	19	Shield Case	YNC5123
	20	Clamper (CN2201)	CEF1046
	21	Sheet	CNN4834
	22	FFC	See Contrast table (2)
	23	DTT Tuner	See Contrast table (2)

(2) CONTRAST TABLE

AVH-X7700BT/XNUC, AVH-X7700BT/XNEW5, AVH-X7700BT/XNUW5, AVH-X7750BT/XNRC, AVH-X7750BT/XNRD, AVH-X7750TV/XNRD and AVH-X7750BT/XNRI are constructed the same except for the following

Mark	No.	Description	AVH-X7700BT/XNUC	AVH-X7700BT/XNEW5	AVH-X7700BT/XNUW5	AVH-X7750BT/XNRC
	5	Holder	CND7192	CND7192	CND7192	CND7192
	14	Mother Unit	CWN8784	CWN8782	CWN8783	CWN8785
	22	FFC	Not used	Not used	Not used	Not used
	23	DTT Tuner	Not used	Not used	Not used	Not used

Mark	No.	Description	AVH-X7750BT/XNRD	AVH-X7750TV/XNRD	AVH-X7750BT/XNRI
	5	Holder	CND7192	CND7194	CND7192
	14	Mother Unit	CWN8787	CWN8786	CWN8788
	22	FFC	Not used	CDD1067	Not used
	23	DTT Tuner	Not used	CWE2519	Not used

9.5 EXTERIOR (4)

The application position of grease is referred to page XXX and page XXX.

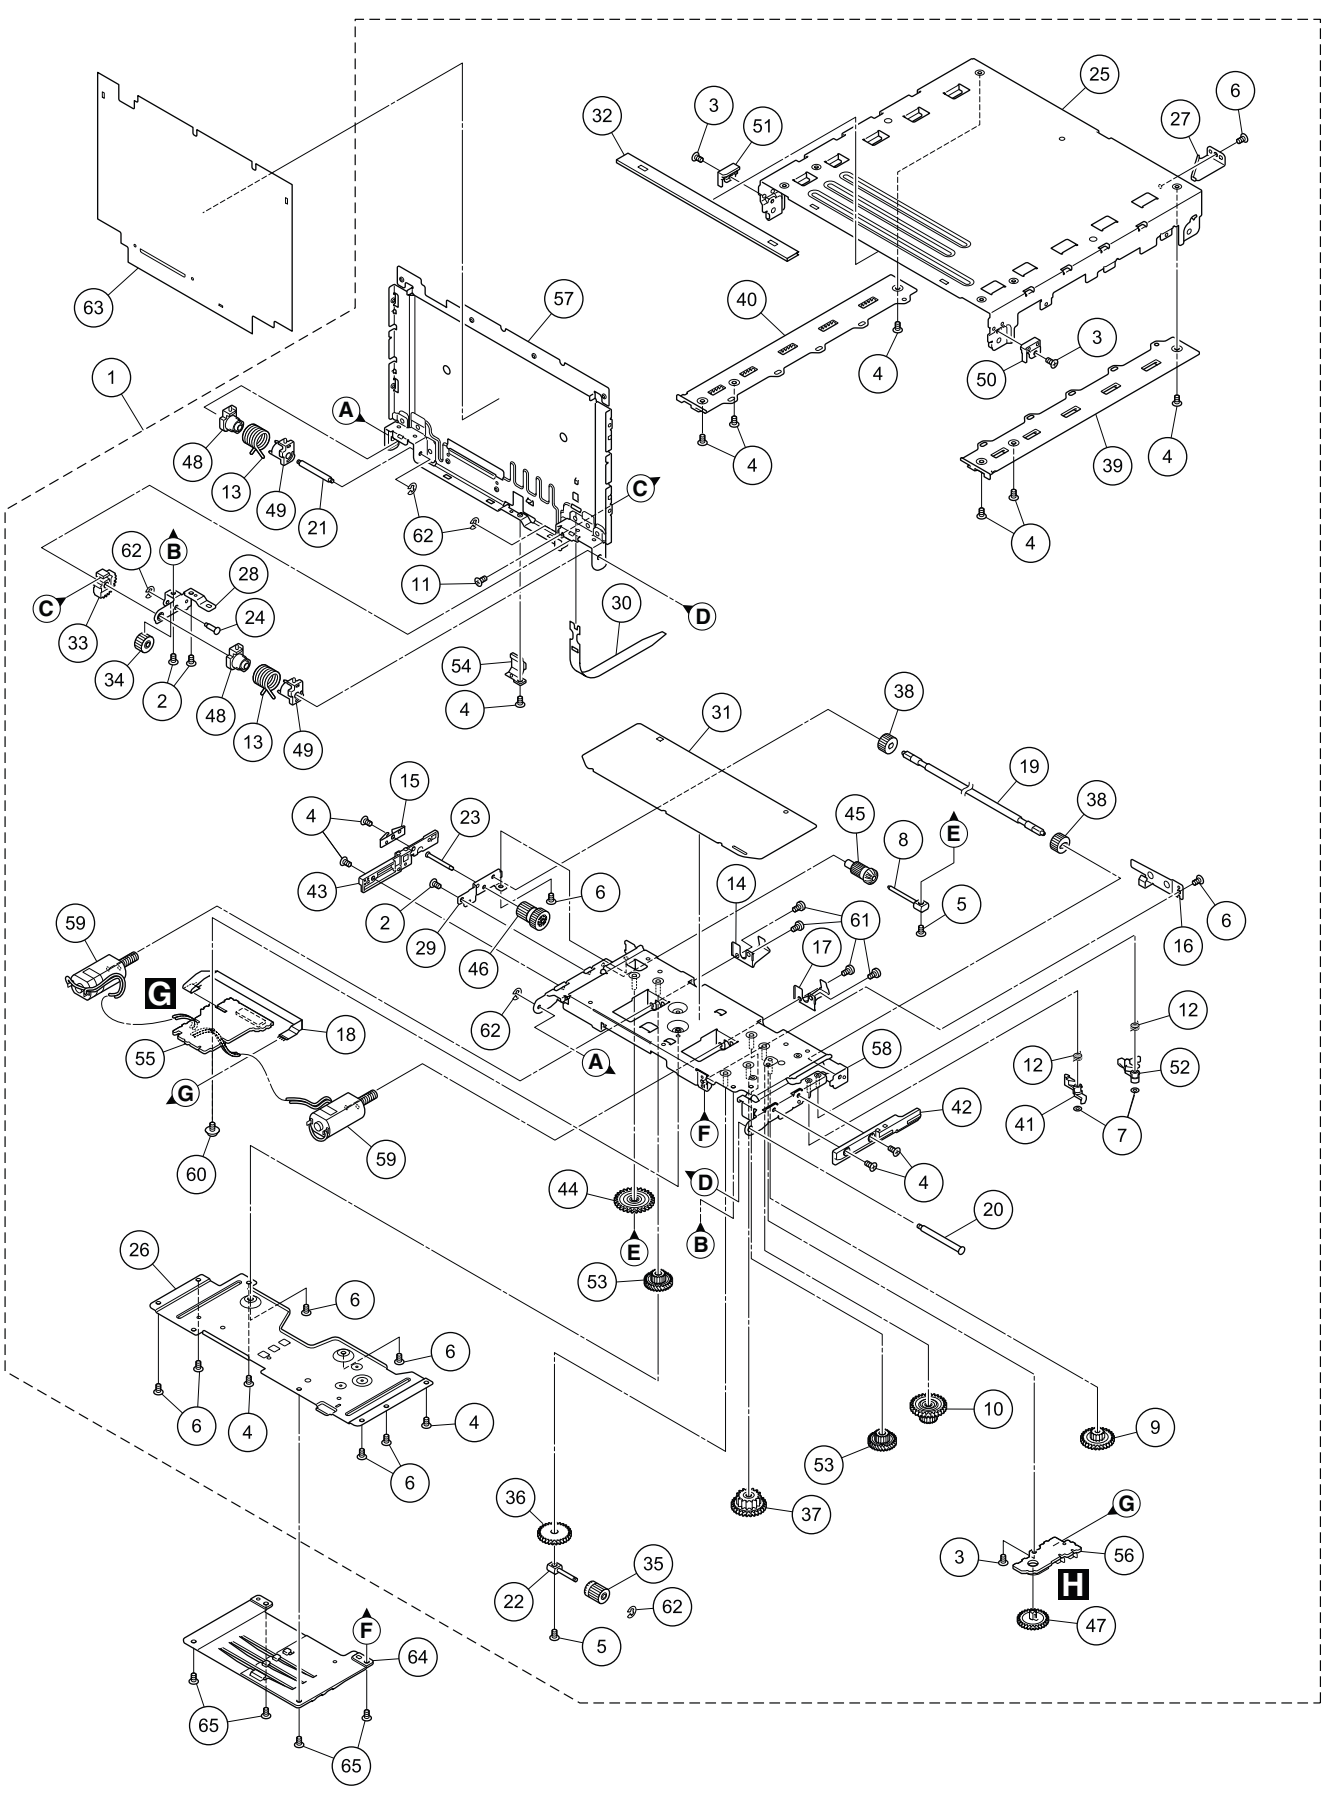

EXTERIOR (4) SECTION PARTS LIST

Mark No.	Description	Part No.
1	Display Module Unit	CXE5803
2	Screw	CBA1608
3	Screw (M2 x 1.5)	CBA1615
4	Screw (M2 x 3)	CBA1877
5	Screw (M2.3 x 6)	CBA2027
6	Screw (M2 x 2)	CBA2129
7	Washer	CBF1038
8	Shaft	CLA4821
9	Gear	CNR1862
10	Gear	CNV8980
11	Screw	EBA2003
12	Torsion Spring	EBH3010
13	Torsion Spring	EBH3011
14	Plate Spring	EBL2005
15	Plate Spring	EBL2006
16	Plate Spring	EBL2007
17	Plate Spring	EBL2008
18	FFC	EDD2002
19	Shaft	ELA3022
20	Shaft	ELA3023
21	Shaft	ELA3024
22	Shaft	ELA3026
23	Shaft	ELA3027
24	Shaft	ELA3028
25	Chassis	ENA3007
26	Cover	ENC2025
27	Lever	ENC2026
28	Holder	ENC2027
29	Holder	ENC2032
30	Sheet	ENM3002
31	Sheet	ENM3003
32	Sheet	ENM3004
33	Gear	ENR2001
34	Gear	ENR2002
35	Gear	ENR2003
36	Gear	ENR2004
37	Gear	ENR2005
38	Gear	ENV3023
39	Rack	ENV3024
40	Rack	ENV3025
41	Arm	ENV3026
42	Guide	ENV3027
43	Guide	ENV3028
44	Gear	ENV3029
45	Gear	ENV3030
46	Gear	ENV3031
47	Gear	ENV3032
48	Holder	ENV3033
49	Holder	ENV3034
50	Guide	ENV3035
51	Guide	ENV3036
52	Arm	ENV3037
53	Gear	ENV3038
54	Lever	ENV3039
55	Main PCB Unit	EWX2008
56	SW PCB Unit	EWX2009
57	Case Unit	EXA4010
58	Frame Unit	EXA4011
59	Motor Unit	EXA4013
60	Screw	IMS20P030FTC
61	Screw	JGZ20P025FTC
62	Washer	YE15FTC
63	Insulator	CNN4260
64	Cover	CNW2687
65	Screw (M2 x 3)	CBA1877

● The gear assembly figure of the Drive Unit

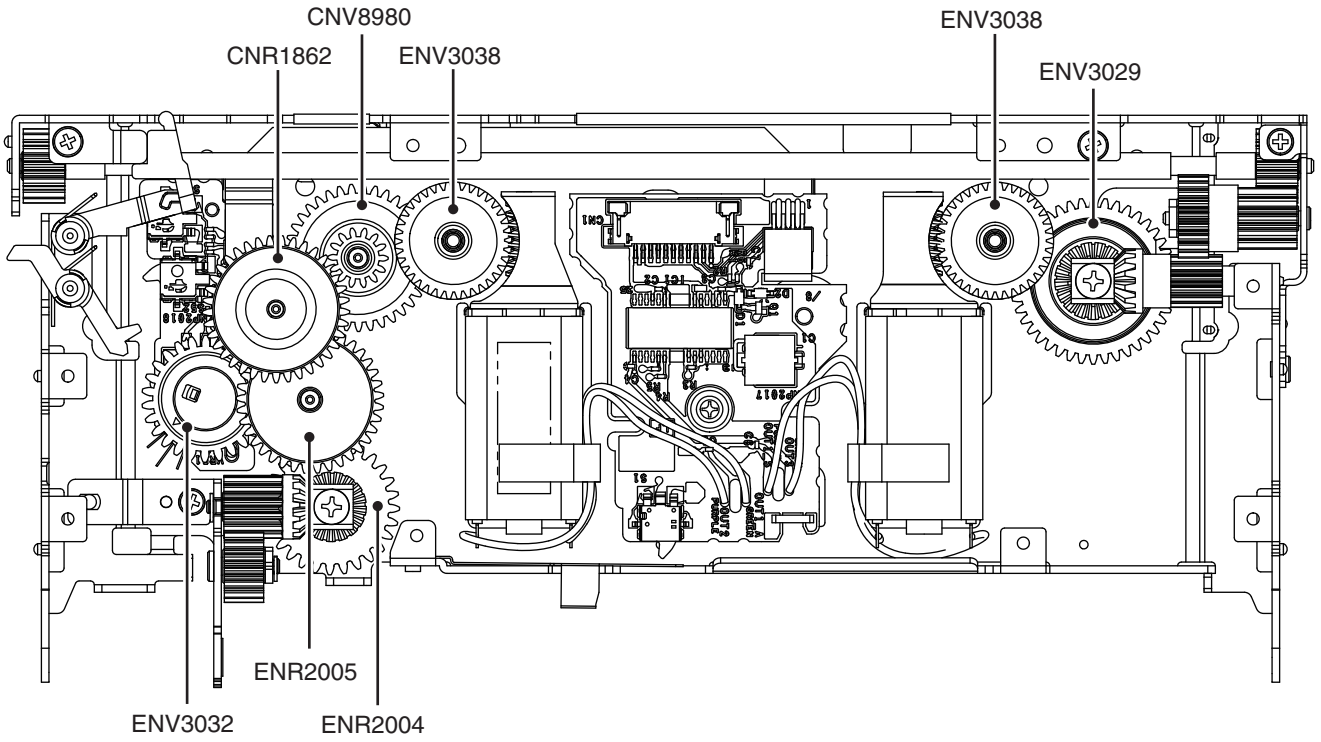

● Grease

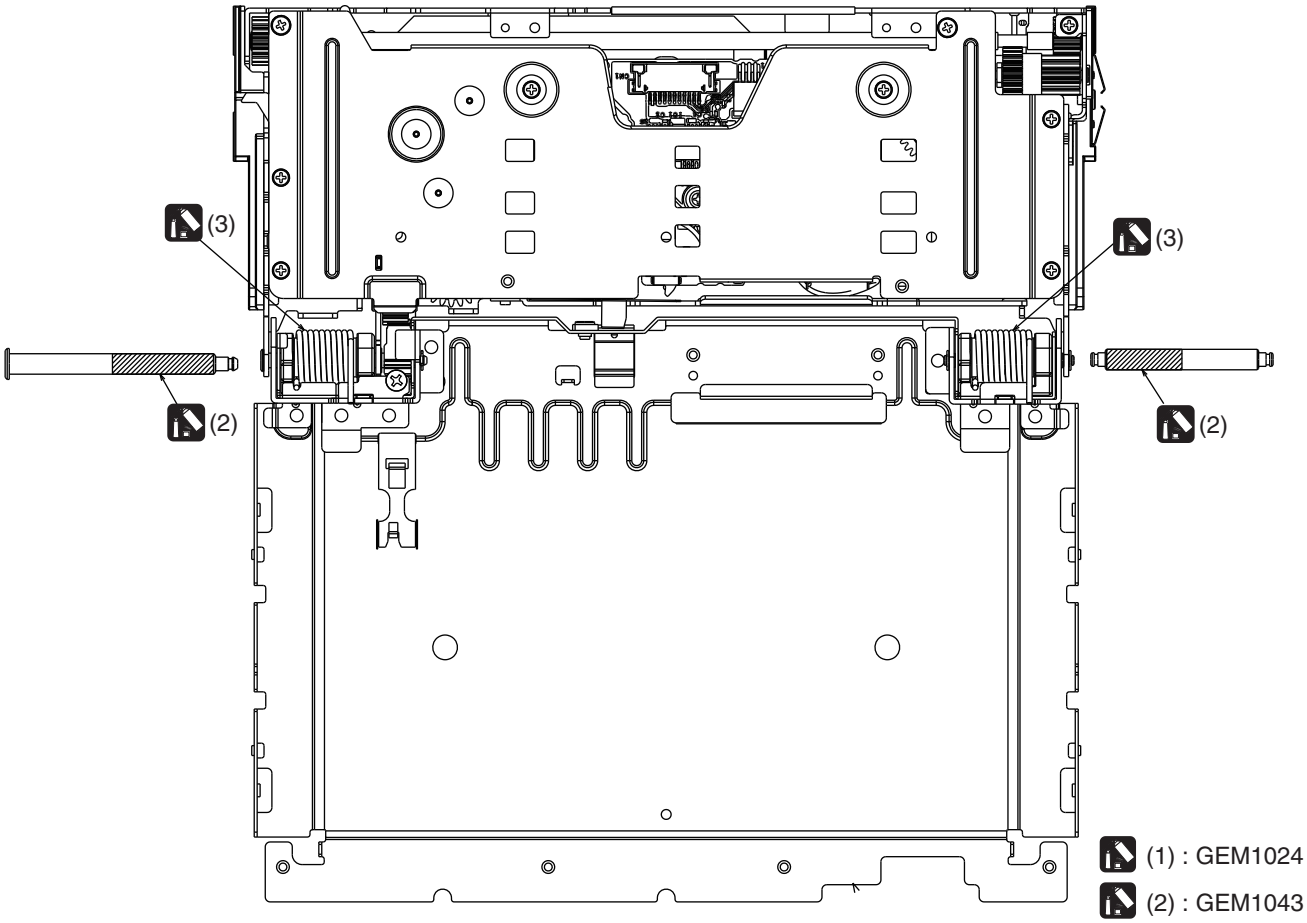

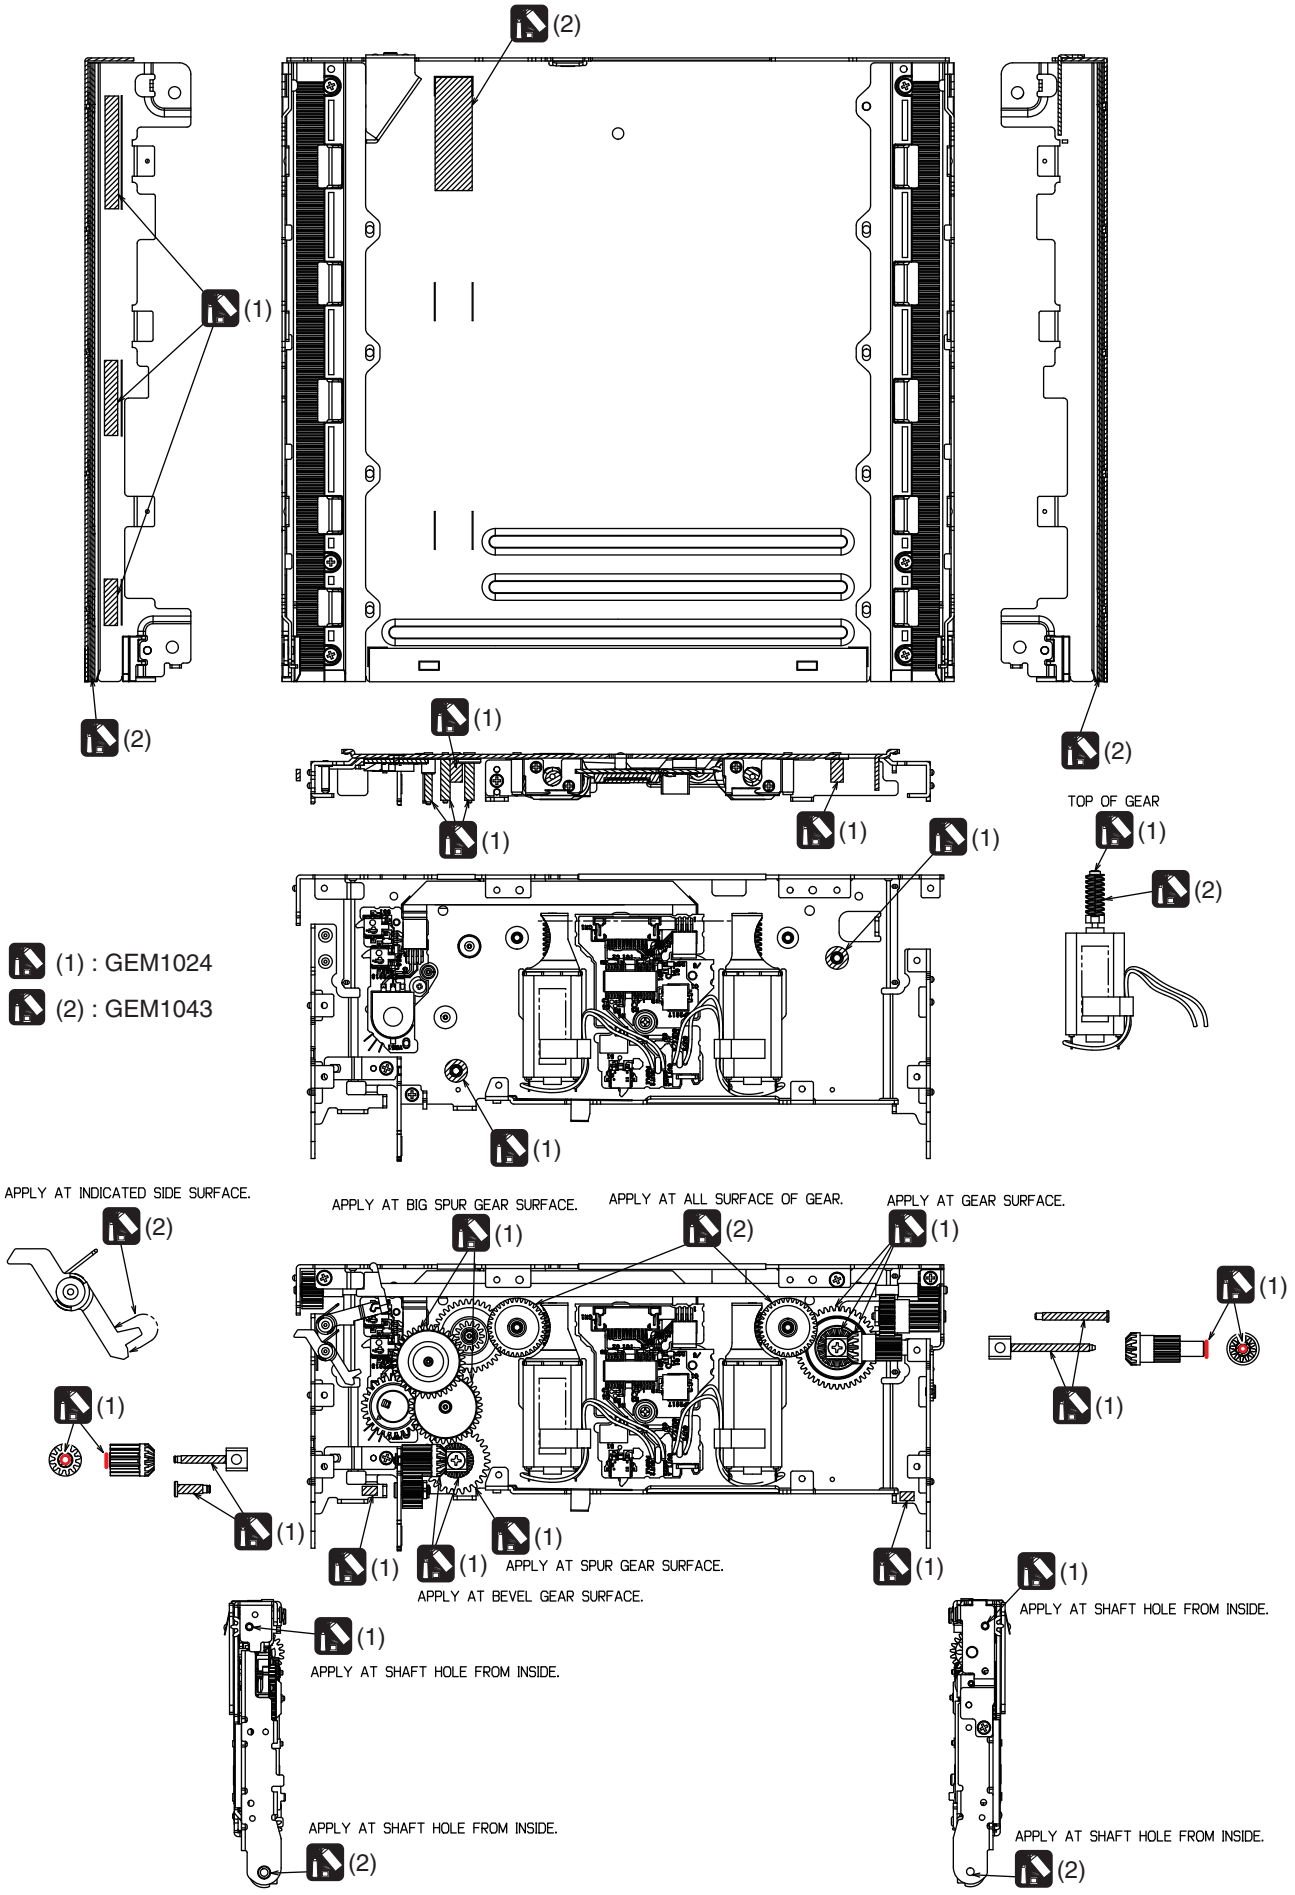
(1) : GEM1024
(2) : GEM1043
TOP OF GEAR
APPLY AT INDICATED SIDE SURFACE.
APPLY AT BIG SPUR GEAR SURFACE.
APPLY AT ALL SURFACE OF GEAR.
APPLY AT GEAR SURFACE.
APPLY AT SPUR GEAR SURFACE.
APPLY AT BEVEL GEAR SURFACE.
APPLY AT SHAFT HOLE FROM INSIDE.
APPLY AT SHAFT HOLE FROM INSIDE.
APPLY AT SHAFT HOLE FROM INSIDE.
APPLY AT SHAFT HOLE FROM INSIDE.

9.6 DVD MECHANISM MODULE

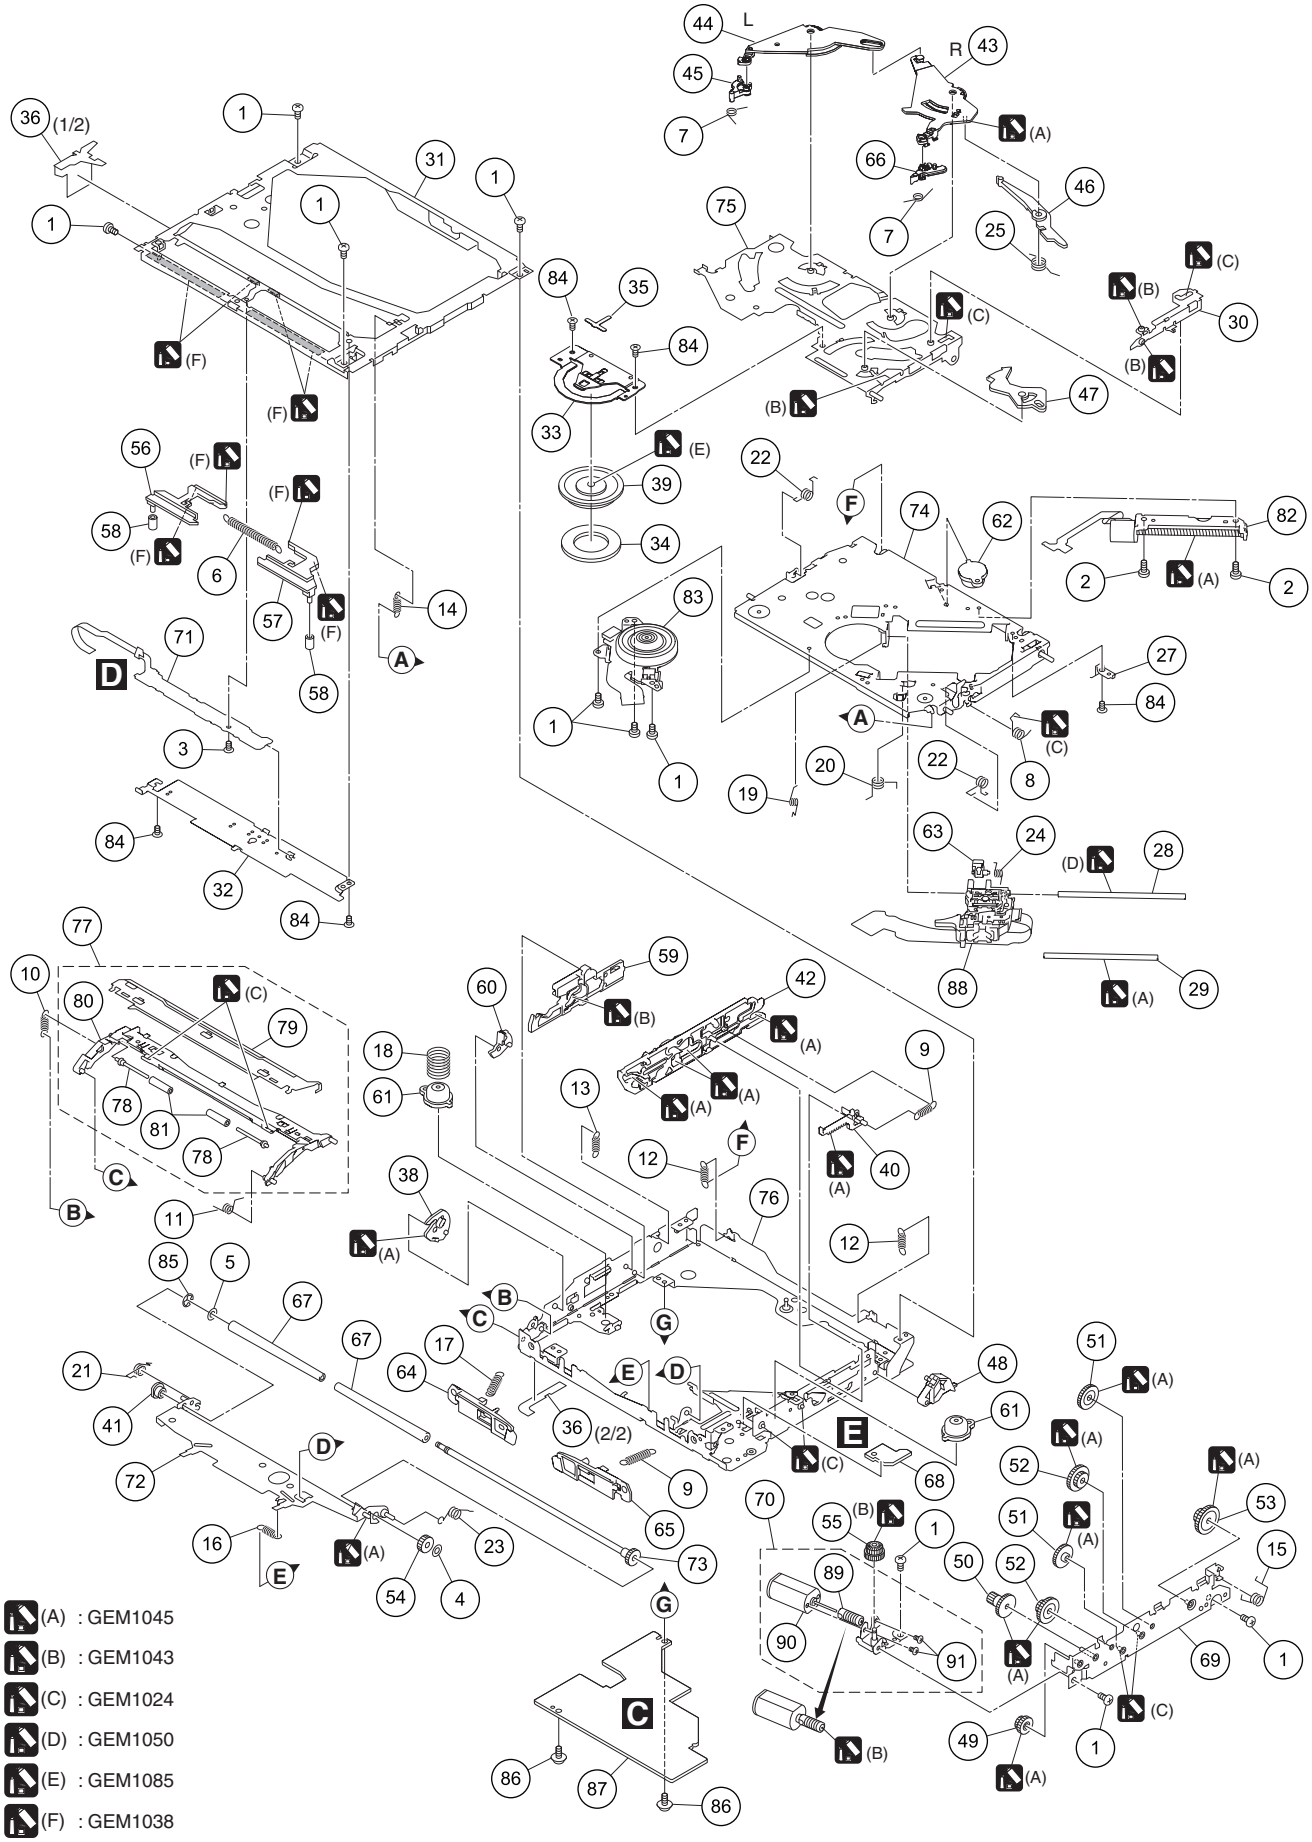

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FTC
	2	Screw	BMZ20P025FNI
	3	Screw	CBA1787
	4	Washer	CBF1038
	5	Washer	CBF1064
	6	Spring	CBH2589
	7	Spring	CBH2590
	8	Spring	CBH2592
	9	Spring	CBH2593
	10	Spring	CBH2596
	11	Spring	CBH2597
	12	Spring	CBH2599
	13	Spring	CBH2600
	14	Spring	CBH2601
	15	Spring	CBH2604
	16	Spring	CBH2605
	17	Spring	CBH2710
	18	Spring	CBH2711
	19	Spring	CBH2890
	20	Spring	CBH2935
	21	Spring	CBH2586
	22	Spring	CBH2588
	23	Spring	CBH2898
	24	Spring	CBH2926
	25	Spring	CBH2591
	26	•••••	
	27	Spring	CBL1726
	28	Shaft	CLA4918
	29	Shaft	CLA4919
	30	Lever	CND5494
	31	Frame	CND2250
	32	Holder	CND2251
	33	Holder	CNC9939
	34	Sheet	CNN4503
	35	Sheet	CNM8283
	36	Sheet	CNM9658
	37	•••••	
	38	Cam	CNV7156
	39	Clamper	CNV7158
	40	Rack	CNV7175
	41	Collar	CNV8845
	42	Lever	CNW1926
	43	Arm	CNV8867
	44	Arm	CNV8868
	45	Arm	CNW2081
	46	Arm	CNV8871
	47	Arm	CNV8872
	48	Arm	CNV8873
	49	Gear	CNV8874
	50	Gear	CNV8875
	51	Gear	CNV8876
	52	Gear	CNV8877
	53	Gear	CNV8878
	54	Gear	CNV8879
	55	Gear	CNV8880
	56	Lever	CNV8903
	57	Lever	CNV8904
	58	Roller	CNV8905
	59	Lever	CNV8908
	60	Arm	CNV8909
	61	Damper	CNV9061
	62	Damper	CNV9062
	63	Rack	CNV9063
	64	Arm	CNV9116
	65	Arm	CNV9117
	66	Arm	CNW2082
	67	Roller	CNV7165
	68	Compound Unit(B)	CWX3394
	69	Bracket Unit	CXB8685
	70	Brush Motor Unit(LOAD)(M1)	CXE4539
	71	Compound Unit(A)	CWX4034
	72	Arm Unit	CXC5486
	73	Roller Unit	CXC5708
	74	Chassis Unit	CXC6443
	75	Arm Unit	CXC7872
*	76	Frame Unit	CXE2486
	77	Guide Unit	CXC8572
	78	Shaft	CLA4771
	79	Holder	CND5456
	80	Guide	CNV9569
	81	Collar	CNV9570
	82	Motor(STEPPING)(M2)	CXM1364
	83	Motor(SPDL)(M3)	CXM1435
	84	Screw	JFZ20P018FTC
	85	Washer	YE20FTC
	86	Screw	IMS20P030FTC
	87	DVD Core Unit(MS7.2)	CWX4606
	88	Pickup Unit(Service)	CXX2558
	89	Gear	CNW2264
	90	Motor	CXM1321
	91	Screw	JFZ14P020FTC

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.*

Circuit Symbol and No. **Part No.**

A:AVH-X7700BT/XNUC

B:AVH-X7700BT/XNEW5

C:AVH-X7700BT/XNUW5

D:AVH-X7750BT/XNRC

E:AVH-X7750BT/XNRD

F:AVH-X7750TV/XNRD

G:AVH-X7750BT/XNRI

Unit Number : CWN8784(A)
Unit Number : CWN8782(B)
Unit Number : CWN8783(C)
Unit Number : CWN8785(D)
Unit Number : CWN8787(E)
Unit Number : CWN8786(F)
Unit Number : CWN8788(G)
Unit Name : Mother Unit
Unit Number : CWN9246
Unit Name : Monitor Unit
Unit Number : CWX4606
Unit Name : DVD Core Unit(MS7.2)
Unit Number : CWX4034
Unit Name : Compound Unit(A)
Unit Number : CWX3394
Unit Name : Compound Unit(B)
Unit Number : CWN8792
Unit Name : Keyboard Unit
Unit Number : EWX2008

Circuit Symbol and No. **Part No.**

Unit Name : Main PCB Unit
Unit Number : EWX2009
Unit Name : SW PCB Unit

A

Unit Number : CWN8784(A)
Unit Number : CWN8782(B)
Unit Number : CWN8783(C)
Unit Number : CWN8785(D)
Unit Number : CWN8787(E)
Unit Number : CWN8786(F)
Unit Number : CWN8788(G)
Unit Name : Mother Unit

MISCELLANEOUS

IC 101	(B,165,22) Regulator IC	NJW4181U3-33B
IC 111	(A,82,110) Regulator IC	NJW4184DL3-08A
IC 141	(B,162,30) Regulator IC	MM3479A33P
IC 160	(A,157,26) Regulator IC	RP132J001B-AE
IC 211	(B,40,109) IC	BA00DD0WHFP
IC 231	(B,159,37) Regulator IC	MM1856A50N
IC 241	(B,105,24) Regulator IC	MM3479A18P
IC 271	(A,76,91) Regulator IC	MM1856A58N
IC 301	(B,149,76) IC	AN33012UA
IC 351	(B,129,51) DC/DC CONV IC	KBD9876EFJ
IC 401	(A,134,28) Flash Blank UC IC	MN103LF15RXW
IC 601	(A,91,65) AS IC	MN1AA9010Z
IC 603	(B,160,99) And Logic IC	MC74VHC1GT08DFG
IC 851	(B,81,50) RAM IC	M12L2561616A-5TG2S
IC 871	(B,109,55)Serial Flash Memory IC	MX25L1606EM2I-12G
IC 881	(B,111,65) FLASH Memory IC	S99-50389P
IC 891	(B,113,44) IC	337S3959
IC 901	(A,107,35) IC	AK8814VQ
IC 1101	(B,116,105) IC	AK4223VQ
IC 1201	(B,51,86) AUD DSP SYS LSI	PM9014A

Circuit Symbol and No.		Part No.
IC 1271	(B,75,108) OP AMP IC	NJW1240V
IC 1301	(A,31,134) Power AMP IC	PA2032A
IC 2004	(B,59,33) Regulator IC	MM3479A33P
IC 2201	(A,39,24) Tuner IC	TEF6686HN
IC 2401	(B,146,102) DC/DC CONV IC	AN33014UA
IC 2551	(B,34,44) Logic IC	TC7SZ32FUS1
IC 2601	(A,58,77) Interface IC	BU8254KVT
IC 3001	(A,18,79) Logic IC	74VHCT08AFT
IC 3101	(B,155,119) Interface IC	STCC2540IQ
IC 3221	(A,141,118) Comparator IC	TC75S57FU
IC 3231	(A,145,124) V AMP IC	BH7673G
IC 3232	(A,148,124) V AMP IC	BH7673G
IC 3233	(A,152,124) V AMP IC	BH7673G
IC 3234	(A,155,124) V AMP IC	BH7673G
Q 11	(A,107,141) Chip Transistor	HN1C01FU
Q 21	(B,93,124) Resistor Built-IN TR	LTC014EEB
Q 31	(B,73,153) Resistor Built-IN TR	LTC014EEB
Q 51	(B,93,141) Bipolar TR	LSAR523UB
Q 61	(B,93,146) Bipolar TR	LSAR523UB
Q 131	(B,30,111) Transistor	2SAR293PGZE
Q 136	(B,25,111) Bipolar TR	LSCR523UB
Q 221	(B,24,84) Transistor	UMF5N
Q 301	(A,154,78) Power MOS FET	ATP112-H
Q 302	(A,143,75) Power MOS FET	ATP112-H
Q 401	(B,132,23) Bipolar TR	LSCR523UB
Q 402	(B,129,28) Chip Transistor(D,E,F,G)	RN4982
Q 403	(B,132,28) Chip Transistor(D,E,F,G)	RN4982
Q 404	(B,134,33) Chip Transistor(D,E,F,G)	RN4982
Q 405	(B,131,33) Chip Transistor(D,E,F,G)	RN4982
Q 821	(A,117,72) Bipolar TR	LSCR523UB
Q 892	(B,105,46) Bipolar TR	LSAR523UB
Q 931	(A,121,64) Bipolar TR	LSCR523UB
Q 932	(A,119,67) Bipolar TR	LSCR523UB
Q 933	(A,118,69) Bipolar TR	LSCR523UB
Q 1271	(A,75,103) Resistor Built-IN TR	LTC014EEB
Q 1301	(B,27,120) Chip Transistor	RN1903
Q 1303	(B,31,117) Bipolar TR	LSCR523UB
Q 3091	(A,98,112) Chip Transistor	2SD2114K
Q 3092	(A,92,111) Transistor	RN4984
Q 3093	(A,94,111) Transistor	RN4984
Q 3141	(A,135,122) Chip Transistor	HN1B04FU
D 1	(B,77,150) Diode	1SR154-400
D 2	(B,77,153) Diode	1SR154-400
D 3	(A,136,92) Diode	RB080L-30
D 11	(A,101,142) Diode	DZ2J062M0
D 12	(A,98,138) Diode	DZ2J068M0
D 21	(B,90,123) Diode	DA2J101
D 32	(B,71,153) Diode	DZ2J056M0
D 41	(B,49,118) Diode	CRG03
D 51	(B,89,140) Diode	DA2J101
D 61	(B,89,147) Diode	DA2J101
D 101	(A,159,41) Diode	D1F60-5053
D 211	(B,54,112) Diode	1SR154-400
D 301	(A,153,71) Diode	RB056L-40
D 302	(A,143,67) Diode	RB056L-40
D 351	(A,134,50) Diode	RB056L-40
D 401	(A,120,16) Diode	DB2J31400
D 403	(B,124,26) Diode	DB2J31400
D 1301	(B,24,116) Diode	DA2J101
D 1302	(B,35,119) Diode	DZ2J082M0

Circuit Symbol and No.		Part No.
D 2201	(A,11,34) Diode	EZAEG2A50AX
D 2202	(A,18,25) Diode	EZAEG2A50AX
D 2203	(A,27,18) Diode	EZAEG2A50AX
D 2204	(A,44,24) Diode	DZ2S068C
D 2401	(B,141,104) Diode	RB060M-30
D 2402	(B,144,113) Diode	1SR154-400
D 3052	(B,100,119) Diode	DZ2S180C
D 3053	(B,106,121) Diode	DZ2S180C
D 3054	(B,106,124) Diode	DZ2S180C
D 3055	(B,105,125) Diode	DZ2S180C
D 3056	(B,106,128) Diode	DZ2S180C
D 3057	(B,99,128) Diode	DZ2S180C
D 3058	(B,100,125) Diode	DZ2S180C
D 3091	(A,90,113) Diode	DZ2J039M0
D 3101	(A,164,123) Diode	EZAEG2A50AX
D 3102	(A,166,123) Diode	EZAEG2A50AX
D 3271	(A,116,127) Diode	DZ2S068C
D 3272	(A,115,127) Diode	DZ2S068C
L 1	(A,89,133) Choke Coil 600 uH	CTH1221
L 2	(A,144,89) Choke Coil 10 uH	CTH1486
L 301	(A,155,62) Choke Coil 7 uH	CTH1381
L 302	(A,142,60) SMD SPL Inductor	CTH1519
L 351	(A,134,56) SMD SPL Inductor	CTH1524
L 700	(A,76,80) Chip Beads	VTL1127
L 701	(A,73,77) Chip Beads	VTL1126
L 702	(A,71,77) Chip Beads	VTL1126
L 703	(A,73,76) Chip Beads	VTL1126
L 704	(A,71,75) Chip Beads	VTL1126
L 705	(A,73,75) Chip Beads	VTL1126
L 706	(A,71,74) Chip Beads	VTL1126
L 707	(A,73,74) Chip Beads	VTL1126
L 708	(A,71,73) Chip Beads	VTL1126
L 709	(A,73,72) Chip Beads	VTL1126
L 710	(A,71,72) Chip Beads	VTL1126
L 711	(A,73,71) Chip Beads	VTL1126
L 712	(A,71,71) Chip Beads	VTL1126
L 713	(A,73,70) Chip Beads	VTL1126
L 714	(A,71,69) Chip Beads	VTL1126
L 715	(A,73,69) Chip Beads	VTL1126
L 716	(A,71,68) Chip Beads	VTL1126
L 717	(A,73,68) Chip Beads	VTL1126
L 718	(A,71,67) Chip Beads	VTL1126
L 719	(A,73,66) Chip Beads	VTL1126
L 750	(A,79,45) Chip Beads	VTL1128
L 851	(B,70,60) Inductor	CTF1786
L 852	(A,81,44) Chip Beads	VTL1128
L 871	(B,102,58) Inductor	CTF1786
L 881	(B,104,59) Inductor	CTF1786
L 882	(A,110,62) Inductor	CTF1740
L 901	(A,114,38) Inductor	ATL7039
L 902	(B,115,37) Inductor	ATL7039
L 903	(A,108,57) Chip Beads	VTL1126
L 904	(A,99,44) Chip Beads	VTL1126
L 905	(A,99,46) Chip Beads	VTL1126
L 906	(A,98,44) Chip Beads	VTL1126
L 907	(A,97,46) Chip Beads	VTL1126
L 908	(A,97,44) Chip Beads	VTL1126
L 909	(A,96,46) Chip Beads	VTL1126
L 910	(A,96,44) Chip Beads	VTL1126

Circuit Symbol and No.		Part No.
L 911	(A,95,43) Chip Beads	VTL1126
L 1201	(B,60,86) Ferrite Bead	CTF1528
L 1202	(B,43,86) Ferrite Bead	CTF1528
L 2201	(A,45,32) Inductor	CTF1749
L 2202	(A,49,27) Inductor	CTF1786
L 2203	(A,30,17) Inductor	LCYC150K1608
L 2204	(A,25,17) Inductor	CTF1389
L 2205	(A,20,25) Inductor	LCMAR27J1608
L 2207	(A,23,24) Chip Coil	LCTAWR22J2520
L 2401	(A,141,102) SMD SPL Inductor	CTH1524
L 2402	(B,141,100) Inductor	CTF1793
L 2601	(B,52,60) Chip Ferrite Bead	BTX1047
L 2602	(A,55,87) Chip Solid Inductor	XTL3010
L 2603	(B,54,68) Chip Solid Inductor	XTL3010
L 3101	(B,162,121) Coil	ATH7015
L 3231	(A,155,117) Inductor	ATL7015
L 3236	(A,106,136) Ferrite Bead	CTF1528
L 3237	(A,99,136) Ferrite Bead	CTF1528
L 3238	(A,107,132) Ferrite Bead	CTF1528
L 3239	(A,98,132) Ferrite Bead	CTF1528
L 3240	(A,107,130) Ferrite Bead	CTF1528
L 3241	(A,97,130) Ferrite Bead	CTF1528
L 3242	(A,107,127) Ferrite Bead	CTF1528
L 3243	(A,97,127) Ferrite Bead	CTF1528
L 3244	(A,107,126) Ferrite Bead	CTF1528
L 3245	(A,98,126) Ferrite Bead	CTF1528
L 3246	(A,107,125) Ferrite Bead	CTF1528
L 3247	(A,98,124) Ferrite Bead	CTF1528
L 3248	(A,98,123) Ferrite Bead	CTF1528
L 3249	(A,107,123) Ferrite Bead	CTF1528
L 3250	(A,98,122) Ferrite Bead	CTF1528
L 3251	(A,107,122) Ferrite Bead	CTF1528
L 3252	(A,107,121) Ferrite Bead	CTF1528
L 3253	(A,99,119) Ferrite Bead	CTF1528
L 3271	(A,115,124) Chip Beads	VTL1126
L 3272	(A,116,124) Chip Beads	VTL1126
X 401	(A,135,13) Crystal Resonator 12.500 MHz	CSS1839
X 601	(A,110,79) Resonator 24 MHz	CSS1773
X 2201	(A,38,34) Crystal Resonator 9.216 MHz	CSS1867
⚠ P131	(A,12,111) Fuse 0.75 A	CEK1380
P 2201	(A,11,36) Variable Coil	IMSA-6803-01Y900
⚠ P3001	(A,37,89) Fuse 0.75 A	CEK1380
P 3052	(A,96,117) Poly Switch	FSMD075-24R
P 3054	(A,110,127) Poly Switch	FSMD075-24R
P 3055	(B,136,127) Poly Switch	FSMD075-24R
P 3281	(A,132,127) Poly Switch	FSMD075-24R
CN131	(A,13,105) Connector	CKS4822
CN2201	(A,7,85) Clamper	CEF1046
CN2551	(A,24,57) Connector	CKS6025
CN2901	(A,91,26) B TO B Connector	CKS6346
CN3001	(A,34,93) FFC/FPC Connector	CKS6672
CN3051	(A,102,127) Plug	CKM1599
CN3121	(B,120,19) FFC/FPC Connector	CKS6638
CN3141	(A,147,138) Connector	CKS4497
CN3201	(A,122,109) FFC/FPC Connector(F)	CKS4497
JA1	(A,65,147) Connector	CKM1613
JA3101	(A,165,127) USB Jack	CKN1097
JA3271	(A,117,139) Jack	CKN1101
JA3281	(A,128,138) 3.5 DIA Jack	CKS6437
VL2201	(A,29,24) Variable Coil	CTC1216

Circuit Symbol and No.		Part No.
RESISTORS		
R 11	(A,104,142)	RS1/16SS103J
R 12	(A,104,141)	RS1/16SS473J
R 13	(A,98,142)	RS1/16SS472J
R 16	(A,103,138)	RS1/16SS104J
R 17	(A,102,138)	RS1/16SS473J
R 18	(A,89,147)	RS1/4SA102J
R 21	(B,91,122)	RS1/16SS103J
R 22	(B,87,122)	RS1/16SS472J
R 23	(B,85,122)	RS1/4SA102J
R 31	(B,69,150)	RS1/4SA102J
R 32	(B,69,154)	RS1/16SS103J
R 51	(B,96,140)	RS1/16SS102J
R 52	(B,94,140)	RS1/16SS473J
R 53	(B,91,143)	RS1/16SS223J
R 54	(B,88,143)	RS1/16SS103J
R 61	(B,93,148)	RS1/16SS223J
R 62	(B,95,142)	RS1/16SS102J
R 63	(B,94,142)	RS1/16SS473J
R 64	(B,88,144)	RS1/16SS103J
R 131	(B,23,112)	RS1/16SS273J
R 132	(B,25,108)	RS1/8SQ122J
R 133	(B,22,111)	RS1/16SS272J
R 139	(B,33,111)	RS1/16SS102J
R 160	(A,154,35)	RS1/16SS5601D
R 161	(A,153,33)	RS1/16SS1202D
R 211	(B,48,107)	RS1/16SS2201D
R 212	(B,49,106)	RS1/16SS2702D
R 213	(B,50,106)	RS1/16SS4701D
R 221	(B,24,81)	RS1/16SS473J
R 222	(B,23,82)	RS1/16SS102J
R 301	(B,140,74)	RS1/16SS561J
R 302	(B,141,75)	RS1/16SS3302D
R 303	(B,141,73)	RS1/16SS4301D
R 304	(B,141,72)	RS1/16SS3601D
R 305	(B,141,76)	RS1/16SS273J
R 306	(B,153,71)	RS1/16SS103J
R 308	(B,151,82) 11 mohm	CCN1341
R 309	(B,151,71)	RS1/16SS204J
R 310	(B,152,71)	RS1/16SS394J
R 311	(B,142,81) 12 mohm	CCN1321
R 312	(B,147,71)	RS1/16SS224J
R 313	(B,156,75)	RS1/16SS472J
R 314	(B,156,72)	RS1/16SS1101D
R 315	(B,158,72)	RS1/16SS3000D
R 316	(B,156,74)	RS1/16SS1002D
R 317	(B,157,73)	RS1/16SS511J
R 322	(B,149,71)	RS1/16SS473J
R 323	(B,155,71)	RS1/16SS473J
R 351	(B,122,49)	RS1/16SS4701D
R 352	(B,124,49)	RS1/16SS4702D
R 353	(B,124,48)	RS1/16SS2202D
R 354	(B,123,48)	RS1/16SS332J
R 360	(A,120,56)	RS1/8SQ331J
R 401	(A,122,16)	RS1/16SS472J
R 402	(A,123,17)	RS1/16SS102J
R 403	(A,122,15)	RS1/16SS103J
R 405	(A,126,15)	RS1/16SS471J
R 406	(A,128,15)	RS1/16SS473J

Circuit Symbol and No.		Part No.
R 407	(A,127,15)	RS1/16SS471J
R 408	(B,130,21)	RS1/16SS473J
R 409	(A,118,25)	RS1/16SS105J
R 410	(A,121,24)	RS1/16SS471J
R 411	(A,131,9)	RS1/16SS472J
R 412	(A,131,10)	RS1/16SS472J
R 413	(B,145,33)	RS1/16SS473J
R 414	(B,133,25)	RS1/16SS473J
R 415	(B,130,15)	RS1/16SS473J
R 417	(B,133,18)	RS1/16SS104J
R 418	(B,134,18)	RS1/16SS102J
R 419	(A,135,15)	RS1/16SS0R0J
R 420	(B,136,24)	RS1/16SS102J
R 421	(B,137,26)	RS1/16SS104J
R 422	(A,141,15)	RS1/16SS473J
R 423	(B,139,17)	RS1/16SS473J
R 424	(A,141,13)	RS1/16SS121J
R 425	(A,142,15)	RS1/16SS104J
R 426	(A,142,14)	RS1/16SS121J
R 430	(A,151,20)	RS1/16SS102J
R 431	(A,150,21)	RS1/16SS473J
R 433	(A,147,23) (F)	RS1/16SS104J
R 435	(B,144,16)	RS1/16SS473J
R 436	(A,151,32)	RS1/16SS182J
R 437	(A,147,24)	RS1/16SS0R0J
R 439	(A,151,30)	RS1/16SS182J
R 440	(A,147,31)	RS1/16SS104J
R 441	(A,147,25)	RS1/16SS0R0J
R 442	(A,147,28) (F)	RS1/16SS471J
R 443	(A,147,29) (F)	RS1/16SS471J
R 444	(A,150,28) (F)	RS1/16SS473J
R 445	(A,147,32)	RS1/16SS104J
R 447	(B,126,27) (A,B,C)	RS1/16SS102J
	(B,126,27) (D,E,F,G)	RS1/16SS1001D
R 448	(B,126,28) (D,E,F,G)	RS1/16SS6800D
R 450	(A,130,14)	RS1/16SS0R0J
R 453	(A,148,33)	RS1/16SS101J
R 457	(A,144,42)	RS1/16SS822J
R 458	(A,143,41)	RS1/16SS471J
R 460	(A,139,43)	RS1/16SS473J
R 463	(B,135,39)	RS1/16SS104J
R 464	(B,134,39)	RS1/16SS473J
R 465	(A,137,42)	RS1/16SS473J
R 466	(A,147,26)	RS1/16SS222J
R 467	(A,130,43)	RS1/16SS104J
R 468	(B,132,39)	RS1/16SS473J
R 471	(B,130,36)	RS1/16SS221J
R 472	(B,129,36)	RS1/16SS221J
R 474	(B,128,36)	RS1/16SS221J
R 475	(A,126,42)	RS1/16SS221J
R 476	(A,125,42)	RS1/16SS221J
R 477	(B,127,39)	RS1/16SS104J
R 478	(A,124,41)	RS1/16SS221J
R 479	(A,124,40)	RS1/16SS104J
R 480	(A,119,40) (F,G)	RS1/16SS104J
R 481	(A,121,40) (B,C,D,E)	RS1/16SS104J
R 482	(A,118,39) (D,E,F)	RS1/16SS104J
R 483	(A,120,39) (B,C,G)	RS1/16SS104J
R 484	(A,117,38) (C,E,F)	RS1/16SS104J
R 485	(A,119,38) (B,D,G)	RS1/16SS104J

Circuit Symbol and No.		Part No.
R 486	(A,117,37)	RS1/16SS104J
R 493	(A,118,34)	RS1/16SS103J
R 494	(A,121,33)	RS1/16SS221J
R 495	(B,126,30)	RS1/16SS104J
R 496	(A,118,32)	RS1/16SS103J
R 497	(A,121,32)	RS1/16SS221J
R 499	(B,123,30)	RS1/16SS104J
R 500	(B,123,29)	RS1/16SS104J
R 501	(A,121,30)	RS1/16SS101J
R 502	(A,121,28)	RS1/16SS221J
R 503	(A,121,27)	RS1/16SS221J
R 504	(A,121,25)	RS1/16SS221J
R 506	(A,131,41)	RS1/16SS0R0J
R 507	(A,118,30)	RS1/16SS473J
R 508	(B,123,28)	RS1/16SS103J
R 509	(A,121,26)	RS1/16SS104J
R 510	(A,121,37)	RS1/16SS473J
R 511	(B,115,27)	RS1/16SS471J
R 512	(B,115,26)	RS1/16SS472J
R 513	(B,115,24)	RS1/16SS471J
R 514	(B,115,25)	RS1/16SS472J
R 515	(B,127,21)	RS1/16SS221J
R 518	(A,148,18)	RS1/16SS0R0J
R 519	(B,130,25) (D,E,F,G)	RS1/16SS6800D
R 524	(B,130,31) (D,E,F,G)	RS1/16SS8201D
R 525	(B,129,33) (D,E,F,G)	RS1/16SS8201D
R 526	(B,129,25) (A,B,C)	RS1/16SS102J
	(B,129,25) (D,E,F,G)	RS1/16SS1001D
R 602	(B,117,51)	RS1/10SR0R0J
R 603	(A,107,51)	RS1/16SS473J
R 605	(A,108,50)	RS1/16SS473J
R 611	(A,112,54) (F)	RS1/16SS0R0J
R 612	(A,112,56) (F)	RS1/16SS0R0J
R 613	(A,112,55) (F)	RS1/16SS473J
R 616	(B,100,57)	RS1/16SS473J
R 619	(B,109,73)	RS1/16SS0R0J
R 620	(B,103,68)	RS1/16SS1R0J
R 621	(B,100,72)	RS1/16SS1R0J
R 622	(A,109,73)	RS1/16SS0R0J
R 623	(A,110,75)	RS1/16SS0R0J
R 625	(B,104,77)	RS1/16SS473J
R 627	(B,105,77)	RS1/16SS473J
R 628	(B,107,75)	RS1/16SS0R0J
R 629	(A,108,78)	RS1/16SS105J
R 630	(A,110,77)	RS1/16SS102J
R 631	(A,111,85)	RS1/16SS102J
R 632	(A,105,84)	RS1/16SS0R0J
R 633	(A,103,84)	RS1/16SS0R0J
R 636	(A,111,87)	RS1/16SS104J
R 637	(A,107,84)	RS1/16SS473J
R 639	(A,106,84)	RS1/16SS473J
R 641	(B,102,79)	RS1/16SS103J
R 642	(B,102,82)	RS1/16SS103J
R 643	(A,98,84)	RS1/16SS4701D
R 644	(A,97,85)	RS1/16SS1201D
R 645	(A,97,86)	RS1/16SS0R0J
R 646	(B,161,95)	RS1/16SS0R0J
R 651	(B,93,74)	RS1/16SS0R0J
R 653	(B,95,72)	RS1/16SS101J
R 654	(B,94,72)	RS1/16SS101J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 685	(B,119,56)	RS1/10SR0R0J	R 860	(B,85,42)	RS1/16SS181J
R 686	(B,162,97)	RS1/16SS473J	R 861	(B,81,60)	RS1/16SS101J
R 687	(B,159,101)	RS1/16SS103J	R 862	(B,87,42)	RAB4CQ181J
R 688	(B,161,101)	RS1/16SS473J	R 863	(B,90,42)	RAB4CQ181J
R 701	(A,73,80)	RS1/16SS241J	R 872	(A,111,60)	RS1/16SS0R0J
R 703	(A,75,78)	RS1/16SS473J	R 873	(A,112,58)	RS1/16SS0R0J
R 704	(A,70,77)	RS1/16SS271J	R 877	(B,103,54)	RS1/16SS101J
R 705	(A,68,77)	RS1/16SS271J	R 878	(B,103,53)	RS1/16SS101J
R 706	(A,70,76)	RS1/16SS271J	R 882	(B,104,61)	RS1/16SS101J
R 707	(A,68,75)	RS1/16SS271J	R 883	(B,104,62)	RS1/16SS0R0J
R 708	(A,70,75)	RS1/16SS271J	R 884	(B,104,65)	RS1/16SS101J
R 709	(A,68,74)	RS1/16SS271J	R 885	(B,104,66)	RS1/16SS101J
R 710	(A,70,74)	RS1/16SS271J	R 886	(A,111,62)	RS1/16SS271J
R 711	(A,68,73)	RS1/16SS271J	R 887	(A,110,63)	RS1/16SS101J
R 712	(A,70,72)	RS1/16SS271J	R 888	(B,118,67)	RS1/16SS101J
R 713	(A,68,72)	RS1/16SS271J	R 892	(B,102,47)	RS1/16SS473J
R 714	(A,70,71)	RS1/16SS271J	R 893	(B,104,43)	RS1/16SS183J
R 715	(A,68,71)	RS1/16SS271J	R 895	(B,116,45)	RS1/16SS222J
R 716	(A,70,70)	RS1/16SS271J	R 896	(B,110,42)	RS1/16SS222J
R 717	(A,68,69)	RS1/16SS271J	R 897	(B,108,44)	RS1/16SS220J
R 718	(A,70,69)	RS1/16SS271J	R 898	(B,110,44)	RS1/16SS222J
R 719	(A,68,68)	RS1/16SS271J	R 902	(A,110,57)	RS1/16SS820J
R 720	(A,70,68)	RS1/16SS271J	R 904	(A,102,40)	RS1/16SS103J
R 721	(A,68,67)	RS1/16SS271J	R 906	(A,99,41)	RS1/16SS561J
R 726	(A,70,64)	RS1/16SS0R0J	R 908	(A,99,43)	RS1/16SS561J
R 727	(A,72,63)	RS1/16SS0R0J	R 910	(A,98,41)	RS1/16SS561J
R 729	(A,70,66)	RS1/16SS271J	R 912	(A,97,43)	RS1/16SS561J
R 736	(B,82,63)	RS1/16SS472J	R 914	(A,97,41)	RS1/16SS561J
R 739	(A,80,45)	RS1/16SS330J	R 916	(A,96,43)	RS1/16SS561J
R 741	(A,73,64)	RS1/16SS0R0J	R 918	(A,96,41)	RS1/16SS561J
R 792	(A,81,46)	RS1/16SS330J	R 920	(A,95,41)	RS1/16SS561J
R 793	(A,79,41)	RS1/16SS472J	R 921	(A,104,30)	RS1/16SS103J
R 794	(B,82,61)	RS1/16SS472J	R 922	(A,104,29)	RS1/16SS271J
R 795	(B,83,61)	RS1/16SS472J	R 923	(A,104,28)	RS1/16SS271J
R 797	(B,84,61)	RS1/16SS472J	R 924	(A,107,28)	RS1/16SS181J
R 798	(B,85,61)	RS1/16SS472J	R 925	(A,106,28)	RS1/16SS103J
R 805	(A,92,40)	RS1/16SS473J	R 926	(A,107,29)	RS1/16SS103J
R 806	(A,94,46)	RS1/16SS473J	R 930	(A,114,30)	RS1/10SR0R0J
R 813	(B,102,46)	RS1/16SS472J	R 931	(A,115,35)	RS1/16SS6801D
R 814	(A,102,45)	RS1/16SS0R0J	R 932	(B,107,39)	RS1/16SS104J
R 815	(A,103,43)	RS1/16SS473J	R 933	(B,106,39)	RS1/16SS104J
R 816	(A,103,45)	RS1/16SS0R0J	R 934	(A,112,28)	RS1/16SS0R0J
R 821	(A,117,74)	RS1/16SS103J	R 935	(A,127,64)	RS1/16SS0R0J
R 822	(A,120,73)	RS1/16SS0R0J	R 936	(A,127,66)	RS1/16SS0R0J
R 823	(A,123,75)	RS1/16SS104J	R 937	(A,125,71)	RS1/16SS0R0J
R 824	(A,120,75)	RS1/16SS153J	R 938	(B,120,62)	RS1/16SS0R0J
R 825	(A,115,73)	RS1/16SS471J	R 941	(A,117,65)	RS1/16SS471J
R 827	(B,95,60)	RS1/16SS0R0J	R 944	(A,117,67)	RS1/16SS471J
R 828	(B,94,54)	RS1/16SS0R0J	R 947	(A,116,69)	RS1/16SS471J
R 829	(A,117,75)	RS1/16SS0R0J	R 950	(A,114,64)	RS1/16SS0R0J
R 841	(B,136,29)	RAB4CQ103J	R 951	(A,114,66)	RS1/16SS0R0J
R 851	(B,75,60)	RAB4CQ101J	R 952	(A,113,69)	RS1/16SS0R0J
R 852	(B,79,60)	RAB4CQ101J	R 960	(A,117,41)	RS1/16SS0R0J
R 853	(B,83,58)	RAB4CQ181J	R 970	(A,102,31)	RS1/16SS222J
R 854	(B,86,58)	RAB4CQ181J	R 971	(A,102,28)	RS1/16SS222J
R 855	(B,90,58)	RAB4CQ181J	R 1111	(B,122,96) (F)	RS1/16SS75R0D
R 856	(B,73,42)	RAB4CQ101J	R 1112	(B,120,93)	RS1/16SS75R0D
R 857	(B,78,42)	RAB4CQ101J	R 1113	(B,118,93)	RS1/16SS75R0D
R 858	(B,80,41)	RS1/16SS121J	R 1114	(B,116,95)	RS1/16SS104J
R 859	(B,84,42)	RS1/16SS181J	R 1115	(B,114,94)	RS1/16SS75R0D

Circuit Symbol and No.	Part No.
R 1116 (B,112,94)	RS1/16SS2200D
R 1117 (B,110,101)	RS1/16SS0R0J
R 1118 (B,111,99)	RS1/16SS75R0D
R 1119 (B,115,95)	RS1/16SS101J
R 1120 (B,114,95)	RS1/16SS101J
R 1121 (B,117,90)	RS1/16SS0R0J
R 1122 (B,118,94)	RS1/16SS101J
R 1123 (B,117,94)	RS1/16SS101J
R 1124 (B,120,95)	RS1/16SS101J
R 1125 (B,119,95)	RS1/16SS101J
R 1131 (B,126,106)	RS1/16SS101J
R 1132 (B,126,108)	RS1/16SS101J
R 1133 (B,126,109)	RS1/16SS101J
R 1134 (B,118,114)	RS1/16SS101J
R 1135 (B,117,114)	RS1/16SS101J
R 1136 (B,115,114)	RS1/16SS101J
R 1141 (B,122,100) (C,D,E,G)	RS1/16SS0R0J
R 1142 (B,112,95)	RS1/10SR0R0J
R 1143 (B,110,100)	RS1/16SS470J
R 1144 (B,122,98) (C,D,E,G)	RS1/16SS104J
R 1145 (B,122,97) (C,D,E,G)	RS1/16SS101J
R 1146 (B,123,98) (F)	RS1/16SS0R0J
R 1147 (B,120,97) (F)	RS1/16SS0R0J
R 1148 (B,120,99) (A,B)	RS1/16SS0R0J
R 1149 (B,122,101) (A,B)	RS1/16SS0R0J
R 1214 (B,49,100)	RS1/16SS0R0J
R 1215 (B,50,101)	RS1/16SS0R0J
R 1228 (B,53,78)	RS1/16SS0R0J
R 1271 (A,73,104)	RS1/16SS103J
R 1272 (B,70,110)	RS1/16SS684J
R 1286 (B,64,110)	RS1/16SS100J
R 1287 (B,68,109)	RS1/16SS102J
R 1301 (B,25,117)	RS1/16SS683J
R 1302 (B,25,119)	RS1/16SS683J
R 1303 (B,29,121)	RS1/16SS152J
R 1304 (B,29,122)	RS1/16SS101J
R 1306 (B,23,120)	RS1/16SS103J
R 1308 (B,27,117)	RS1/16SS103J
R 1309 (B,34,117)	RS1/16SS104J
R 1310 (B,35,117)	RS1/16SS473J
R 1314 (B,19,120)	RS1/16SS473J
R 1315 (B,17,118)	RS1/16SS102J
R 1316 (B,21,120)	RS1/16SS0R0J
R 2009 (B,57,36)	RS1/16SS102J
R 2204 (A,41,30)	RS1/16SS103J
R 2206 (A,41,29)	RS1/16SS103J
R 2207 (A,45,29)	RS1/16SS272J
R 2208 (A,46,28)	RS1/16SS272J
R 2209 (A,42,27)	RS1/16SS0R0J
R 2210 (A,43,26)	RS1/16SS0R0J
R 2212 (A,30,15)	RS1/16SS391J
R 2213 (A,20,18)	RS1/16SS105J
R 2214 (A,23,18)	RS1/16SS105J
R 2242 (B,40,31)	RS1/16SS0R0J
R 2243 (A,34,24)	RS1/16SS0R0J
R 2244 (A,34,23)	RS1/16SS0R0J
R 2401 (B,150,109)	RS1/16SS752J
R 2402 (A,154,110)	RS1/16SS102J
R 2403 (A,154,111)	RS1/16SS102J
R 2404 (A,154,108)	RS1/16SS102J

Circuit Symbol and No.	Part No.
R 2405 (B,152,96)	RS1/16SS224J
R 2406 (B,147,94)	RS1/16SS1202D
R 2407 (B,154,108)	RS1/16SS152J
R 2408 (B,154,107)	RS1/16SS3302D
R 2409 (B,151,104)	RS1/16SS8201D
R 2410 (A,154,109)	RS1/16SS102J
R 2413 (B,146,94)	RS1/16SS394J
R 2414 (B,145,96)	RS1/16SS204J
R 2416 (B,147,96)	RS1/16SS0R0J
R 2420 (B,149,95)	RS1/16SS104J
R 2421 (A,150,105) 0.039 ohm	CCN1325
R 2552 (B,23,47)	RS1/10SR0R0J
R 2556 (B,23,49)	RS1/10SR0R0J
R 2557 (B,23,46)	RS1/10SR0R0J
R 2560 (B,23,45)	RS1/10SR0R0J
R 2564 (B,25,65)	RS1/16SS471J
R 2565 (B,28,64)	RS1/16SS102J
R 2566 (B,28,63)	RS1/16SS221J
R 2567 (B,28,62)	RS1/16SS221J
R 2568 (B,25,61)	RS1/16SS221J
R 2569 (B,25,60)	RS1/16SS221J
R 2571 (B,26,56)	RS1/16SS0R0J
R 2572 (B,29,52)	RS1/8SQ221J
R 2601 (A,67,79)	RS1/16SS0R0J
R 2602 (A,66,80)	RS1/16SS0R0J
R 2607 (B,52,68)	RS1/16SS153J
R 2609 (B,64,76)	RS1/16SS473J
R 2901 (B,90,29)	RS1/16SS102J
R 2906 (B,87,22)	RS1/16SS101J
R 2908 (B,85,27)	RS1/16SS102J
R 2912 (A,97,21)	RS1/16SS271J
R 2913 (A,96,22)	RS1/16SS271J
R 2915 (A,96,24)	RS1/16SS271J
R 2917 (A,97,26)	RS1/16SS0R0J
R 2918 (A,98,29)	RS1/16SS222J
R 2919 (A,98,26)	RS1/16SS0R0J
R 2920 (A,96,31)	RS1/16SS102J
R 2921 (A,96,32)	RS1/16SS102J
R 3004 (A,26,83)	RS1/16SS0R0J
R 3059 (B,103,132)	RS1/16SS223J
R 3060 (B,106,133)	RS1/16SS223J
R 3061 (B,103,130)	RS1/16SS223J
R 3062 (B,108,129)	RS1/16SS223J
R 3063 (A,107,138)	RS1/16SS223J
R 3064 (A,107,136)	RS1/16SS223J
R 3071 (B,109,127)	RS1/16SS223J
R 3072 (B,107,126)	RS1/16SS223J
R 3073 (B,107,123)	RS1/16SS223J
R 3074 (B,107,121)	RS1/16SS223J
R 3076 (B,94,121)	RS1/10SR0R0J
R 3091 (A,97,109)	RS1/16SS152J
R 3092 (A,96,112)	RS1/16SS103J
R 3093 (A,89,110)	RS1/16SS122J
R 3105 (B,152,118)	RS1/16SS102J
R 3106 (B,152,122)	RS1/16SS103J
R 3107 (B,152,120)	RS1/16SS103J
R 3108 (B,152,119)	RS1/16SS103J
R 3109 (B,158,118)	RS1/16SS2402D
R 3122 (B,117,24)	RS1/16SS272J
R 3141 (B,153,134)	RAB4CQ750J

Circuit Symbol and No.		Part No.
R 3142	(A,138,123)	RS1/16SS562J
R 3143	(A,138,121)	RS1/16SS332J
R 3144	(A,133,122)	RS1/16SS103J
R 3145	(A,131,122)	RS1/16SS103J
R 3146	(A,132,121)	RS1/10SR222J
R 3147	(B,121,124)	RS1/16SS223J
R 3148	(B,120,123)	RS1/16SS223J
R 3149	(B,120,121)	RS1/16SS562J
R 3150	(A,144,128)	RS1/16SS102J
R 3151	(A,140,128)	RS1/16SS102J
R 3152	(A,137,128)	RS1/16SS471J
R 3153	(A,135,128)	RS1/16SS471J
R 3157	(B,121,121)	RS1/16SS272J
R 3158	(B,121,120)	RS1/16SS272J
R 3168	(B,152,128)	RS1/16SS103J
R 3204	(A,119,98) (F)	RS1/16SS473J
R 3205	(A,129,102) (F)	RS1/16SS101J
R 3207	(A,124,98) (F)	RS1/16SS0R0J
R 3211	(A,121,101) (F)	RS1/16SS0R0J
R 3212	(A,119,97) (F)	RS1/16SS0R0J
R 3213	(A,116,100) (F)	RS1/16SS0R0J
R 3214	(A,116,101) (F)	RS1/16SS0R0J
R 3217	(A,117,101) (F)	RS1/16SS473J
R 3221	(A,145,118)	RS1/16SS0R0J
R 3222	(A,140,123)	RS1/16SS271J
R 3223	(A,140,122)	RS1/16SS684J
R 3224	(A,143,118)	RS1/16SS1802D
R 3225	(A,142,120)	RS1/16SS1302D
R 3226	(A,139,118)	RS1/16SS682J
R 3227	(A,139,120)	RS1/16SS103J
R 3229	(B,149,129)	RS1/16SS0R0J
R 3231	(A,154,121)	RS1/16SS101J
R 3232	(A,151,121)	RS1/16SS101J
R 3233	(A,147,121)	RS1/16SS101J
R 3289	(A,109,132)	RS1/10SR0R0J
R 3300	(A,97,121)	RS1/10SR0R0J

CAPACITORS

C 1	(B,73,151)	CKSRYB104K50
C 4	(A,169,69) 3300 u/16 V	CCH2027
C 5	(B,160,87) 10 uF	CCG1236
C 6	(B,158,87)	CKSSYB102K50
C 9	(A,169,65)	XCEAT102M16
C 12	(B,60,149)	CCSSCH102J50
C 13	(B,55,132)	CCSSCH102J50
C 14	(B,58,149)	CCSSCH102J50
C 15	(B,54,132)	CCSSCH102J50
C 16	(B,55,149)	CCSSCH102J50
C 17	(B,53,132)	CCSSCH102J50
C 18	(B,53,149)	CCSSCH102J50
C 19	(B,52,132)	CCSSCH102J50
C 21	(B,92,124)	CKSRYB105K10
C 41	(B,56,118)	CKSSYB104K16
C 101	(A,169,42)	XCEAT331M16
C 102	(B,166,26)	CKSRYB104K50
C 103	(B,162,26)	CKSSYB104K10
C 104	(A,156,11)	CEVW470M16
C 111	(A,72,112)	CKSQYB105K25
C 112	(A,73,108)	CKSSYB104K16
C 114	(A,70,112)	CKSRYB104K50
C 115	(A,72,108) 4.7 uF	CCG1222
C 131	(B,21,113)	CKSSYB103K16
C 132	(A,15,114)	CEVW100M16
C 133	(B,22,113)	CKSSYB103K16
C 141	(B,159,31)	CKSRYB105K10
C 142	(B,158,29)	CKSRYB105K10
C 143	(B,166,29)	CKSSYB104K10
C 160	(A,157,33) 2.2 uF	CCG1218
C 161	(A,156,35) 2.2 uF	CCG1218
C 211	(B,48,110) 1 uF	CCG1393
C 212	(A,55,111)	CEVW101M16
C 221	(B,24,87)	CKSSYB104K10
C 231	(B,162,37)	CKSRYB105K10
C 232	(B,158,41)	CKSRYB105K10
C 241	(B,105,20)	CKSRYB105K10
C 242	(B,103,20)	CKSRYB105K10
C 243	(B,105,27)	CKSSYB104K10
C 271	(A,76,88)	CKSRYB105K16
C 272	(A,78,93)	CKSRYB105K16
C 301	(B,141,74)	CCSSCH471J50
C 302	(B,141,77)	CKSSYB472K50
C 303	(B,143,76)	CCSSCH8R0D50
C 304	(B,155,75)	CCSSCH8R0D50
C 305	(B,156,76)	CKSSYB103K16
C 306	(B,156,73)	CCSSCH102J50
C 307	(A,149,56)	CKSSYB102K50
C 308	(A,149,55)	CKSSYB104K10
C 309	(A,149,51) 10 uF	CCG1236
C 310	(A,149,53) 10 uF	CCG1236
C 311	(A,155,54) 47 uF	CCG1229
C 316	(B,154,71)	CKSSYB104K10
C 319	(B,155,77)	CKSSYB104K16
C 320	(B,142,78)	CKSSYB104K16
C 321	(B,144,71)	CKSSYB104K10
C 322	(B,143,74)	CKSRYB105K10
C 324	(A,143,49) 47 uF	CCG1229
C 325	(A,143,54) 10 uF	CCG1192
C 326	(A,143,52) 10 uF	CCG1192
C 327	(A,143,55)	CKSSYB104K10
C 328	(A,143,56)	CKSSYB102K50
C 330	(B,147,82)	CKSRYB473K50
C 331	(B,148,81)	CKSSYB102K50
C 334	(B,151,87) 10 uF	CCG1236
C 351	(A,127,54)	CEVLW470M16
C 352	(A,118,56)	CKSSYB103K16
C 353	(A,122,56) 10 uF	CCG1192
C 356	(B,124,47)	CKSSYB682K25
C 357	(B,129,56)	CKSSYB103K16
C 358	(B,134,52) 10 uF	CCG1236
C 359	(B,132,54)	CKSRYB103K50
C 401	(A,132,12)	CCSSCH100D50
C 402	(A,136,15)	CCSSCH120J50
C 403	(A,139,14)	CKSRYB105K10
C 404	(A,139,15)	CKSSYB104K10
C 405	(B,135,22)	CKSRYB105K10
C 406	(B,135,20)	CKSSYB104K10
C 407	(B,134,23)	CKSSYB102K50
C 408	(A,149,21)	CKSSYB104K10
C 409	(A,147,35)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 410	(A,148,35)	CKSRYB105K10
C 414	(A,133,40)	CKSSYB104K10
C 415	(A,133,41)	CKSRYB105K10
C 419	(B,159,24) 0.1 uF	CCG1321
C 420	(B,158,24)	CKSSYB103K16
C 421	(B,157,24)	CCSSCH102J50
C 422	(A,121,22)	CKSSYB104K10
C 423	(A,120,22)	CKSRYB105K10
C 424	(B,127,23)	CKSSYB104K10
C 425	(A,121,19)	CKSSYB104K10
C 427	(B,126,16)	CKSSYB104K10
C 429	(B,113,23)	CKSSYB104K10
C 430	(B,114,23)	CKSSYB104K10
C 432	(B,127,25)	CKSSYB104K10
C 433	(B,127,26)	CKSSYB104K10
C 436	(B,127,24)	CKSSYB104K10
C 437	(A,150,31)	CKSSYB104K10
C 438	(A,149,30)	CKSSYB104K10
C 601	(A,108,55)	CKSSYB104K10
C 602	(A,109,55)	CKSRYB104K16
C 603	(A,108,58)	CKSSYB104K10
C 604	(A,108,60)	CKSSYB104K10
C 605	(A,107,62)	CKSSYB104K10
C 606	(A,107,67)	CKSSYB104K10
C 607	(B,102,69)	CKSRYB105K10
C 608	(A,107,71)	CKSSYB104K10
C 609	(B,102,72)	CKSRYB105K10
C 610	(A,107,74)	CKSSYB104K10
C 611	(A,108,75)	CKSSYB104K10
C 612	(A,109,76)	CKSSYB104K10
C 613	(A,112,77)	CCSSCH120J50
C 614	(A,108,81)	CCSSCH100D50
C 616	(A,110,87)	CKSSYB104K10
C 617	(A,103,82)	CKSSYB104K10
C 618	(A,102,82)	CKSSYB104K10
C 619	(B,99,76) 1 uF	DCH1246
C 620	(B,97,76) 1 uF	DCH1246
C 621	(A,97,82)	CKSSYB104K10
C 622	(A,96,82)	CKSSYB104K10
C 624	(A,94,82)	CKSSYB104K10
C 625	(A,93,81)	CKSSYB104K10
C 626	(A,88,82)	CKSSYB104K10
C 627	(A,87,82)	CKSSYB104K10
C 628	(A,81,81)	CKSSYB104K10
C 629	(A,80,82)	CKSSYB104K10
C 631	(B,79,75)	CKSSYB104K10
C 632	(B,79,72)	CKSSYB104K10
C 633	(B,79,71)	CKSSYB104K10
C 634	(A,75,63)	CKSSYB104K10
C 635	(B,79,67)	CKSSYB104K10
C 636	(A,74,59)	CKSSYB104K10
C 637	(A,73,57)	CKSRYB104K16
C 638	(A,74,53)	CKSRYB104K16
C 639	(A,79,48)	CKSRYB104K16
C 641	(A,82,48)	CKSRYB104K16
C 642	(A,85,48)	CKSRYB104K16
C 643	(A,86,47)	CKSSYB104K10
C 644	(A,88,47)	CKSRYB104K16
C 645	(A,91,48)	CKSRYB104K16
C 646	(A,94,48)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 647	(A,95,47)	CKSSYB104K10
C 648	(A,99,48)	CKSSYB104K10
C 649	(A,103,48)	CKSSYB104K10
C 651	(B,111,50) 0.1 uF	CCG1321
C 654	(B,159,102)	CKSRYB105K10
C 655	(B,159,97)	CKSSYB104K10
C 656	(B,113,50)	CCSRCH102J50
C 657	(B,122,53) 0.1 uF	CCG1321
C 658	(B,122,52)	CCSRCH102J50
C 661	(B,122,56) 10 uF	DCH1201
C 664	(B,114,50) 10 uF	DCH1201
C 700	(A,79,47)	CCSSCH120J50
C 821	(A,121,73) 10 uF	CCG1192
C 823	(A,111,72)	CKSRYB105K10
C 824	(A,111,73)	CKSRYB105K10
C 851	(B,70,57)	CKSSYB104K10
C 852	(B,70,58)	CKSSYB104K10
C 853	(B,77,58)	CKSSYB104K10
C 854	(B,81,58)	CKSSYB104K10
C 855	(B,92,58)	CKSSYB104K10
C 856	(A,78,43)	CKSSYB104K10
C 857	(A,76,47)	CKSSYB104K10
C 858	(A,81,43)	CCSSCH8R0D50
C 871	(B,103,57)	CKSSYB104K10
C 882	(B,108,59)	CKSSYB104K10
C 891	(B,105,43)	CKSSYB104K10
C 892	(B,111,46)	CKSSYB104K10
C 893	(B,109,44)	CKSSYB103K16
C 901	(A,116,55)	CCSSCH560J50
C 902	(A,113,40) 10 uF	CCG1192
C 903	(A,101,36)	CKSSYB104K10
C 904	(A,109,29)	CKSSYB103K16
C 905	(A,113,32)	CKSSYB103K16
C 906	(A,115,34) 10 uF	CCG1192
C 907	(A,113,34)	CKSSYB103K16
C 908	(A,115,32) 10 uF	CCG1192
C 909	(A,113,36)	CKSSYB103K16
C 910	(A,108,41)	CKSSYB104K10
C 912	(A,106,41)	CKSSYB104K10
C 938	(A,111,64)	CKSRYB105K10
C 939	(A,111,65)	CKSRYB105K10
C 940	(A,111,67)	CKSRYB105K10
C 941	(A,111,68)	CKSRYB105K10
C 942	(A,111,69)	CKSRYB105K10
C 943	(A,111,71)	CKSRYB105K10
C 1101	(B,124,105)	CKSRYB105K10
C 1102	(B,123,104)	CKSSYB104K10
C 1106	(B,119,97)	CKSSYB104K10
C 1108	(B,119,98)	CKSSYB104K10
C 1110	(B,118,97)	CKSSYB104K10
C 1112	(B,117,98) (A,B,C,D,E,F,G)	CKSSYB104K10
	(B,117,98) (F)	CKSRYB105K10
C 1114	(B,116,97)	CKSSYB104K10
C 1115	(B,118,112)	CKSRYB105K10
C 1116	(B,116,98)	CKSSYB104K10
C 1117	(B,117,112)	CKSRYB105K10
C 1118	(B,115,97)	CKSSYB104K10
C 1119	(B,115,112)	CKSRYB105K10
C 1120	(B,114,98)	CKSSYB104K10
C 1121	(B,114,112) (F)	CKSRYB105K10

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
C 1122 (B,114,97)	CKSSYB104K10		
C 1123 (B,112,112) (F)	CKSRYB105K10	C 1304 (A,29,123)	CKSRYB474K16
C 1124 (B,113,98)	CKSSYB104K10	C 1305 (A,37,124)	CKSRYB474K16
C 1125 (B,111,112) (F)	CKSRYB105K10	C 1306 (A,21,118)	CKSQYB225K16
C 1126 (B,112,97)	CKSSYB104K10	C 1307 (A,20,121)	CCG1291
C 1127 (B,105,100) 10 uF	CCG1192	C 1308 (B,54,121)	CKSRYB104K50
C 1128 (B,109,102)	CKSSYB104K10	C 1313 (A,68,126) 4700 uF/16 V	CCH2085
C 1129 (B,108,100)	CKSSYB104K10	C 1315 (A,20,125) 0.1 uF	CCG1311
C 1132 (B,107,106) 10 uF	CCG1192	C 1316 (B,24,114) 10 uF	CCG1192
C 1133 (B,105,102) 10 uF	CCG1192	C 1318 (A,26,123)	CKSQYB474K25
C 1134 (B,123,101) (C,D,E,F,G)	CKSSYB104K10	C 1319 (A,32,124)	CKSQYB474K25
C 1135 (B,110,99)	CCSSCH271J50	C 1320 (A,19,123) 4.7 uF	CCG1291
C 1136 (B,124,109)	CKSRYB105K10	C 2010 (B,62,32)	CKSRYB105K10
C 1137 (B,124,108)	CKSRYB105K10	C 2011 (B,55,30)	CKSRYB105K10
C 1138 (B,124,106)	CKSRYB105K10	C 2017 (B,62,35)	CKSSYB104K10
C 1202 (A,69,100)	CEVW470M16	C 2202 (A,47,34)	CKSSYB104K10
C 1203 (A,66,93)	CKSSYB104K10	C 2203 (A,43,34)	CKSSYB104K10
C 1206 (A,55,101)	CEVW470M16	C 2204 (A,44,35) 10 uF	DCH1201
C 1208 (B,42,95)	CKSRYB105K10	C 2205 (A,48,25) 10 uF	DCH1201
C 1209 (B,44,95)	CKSRYB105K10	C 2206 (A,35,27)	CKSSYB104K10
C 1210 (B,44,98)	CKSRYB105K10	C 2208 (A,35,26)	CKSSYB224K6R3
C 1211 (B,46,98)	CKSRYB105K10	C 2209 (A,34,26)	CKSSYB102K50
C 1212 (B,47,98)	CKSRYB105K10	C 2210 (A,35,22)	CKSSYB104K10
C 1213 (B,48,98)	CKSRYB105K10	C 2212 (A,22,25)	CCSSCH220J50
C 1214 (B,50,98)	CKSRYB105K10	C 2213 (A,21,22)	CCSSCH271J50
C 1215 (B,51,98)	CKSRYB105K10	C 2216 (A,43,24)	CKSSYB104K10
C 1216 (B,52,98)	CKSRYB105K10	C 2219 (A,33,17)	CCSSCH102J50
C 1217 (B,53,98)	CKSRYB105K10	C 2220 (A,22,17)	CCSSCH471J50
C 1218 (B,53,95)	CKSRYB105K10	C 2224 (A,38,19)	CKSSYB152K50
C 1219 (B,55,95)	CKSRYB105K10	C 2234 (A,17,25)	CCSSCH100D50
C 1220 (B,56,95)	CKSRYB105K10	C 2238 (B,46,28)	CCSSCH101J50
C 1223 (A,62,103)	CEVW470M16	C 2239 (B,47,26)	CCSSCH101J50
C 1224 (B,57,73) 10 uF	CCG1332	C 2401 (B,149,109)	CKSSYB222K50
C 1225 (A,67,89)	CKSSYB104K10	C 2402 (B,150,107)	CCSSCH270J50
C 1226 (A,71,91)	CEVW470M16	C 2403 (B,143,96)	CKSSYB104K16
C 1228 (B,55,78)	CKSSYB104K10	C 2404 (A,143,110)	CEVLW470M16
C 1229 (B,48,78)	CKSSYB104K10	C 2405 (A,153,99)	CEVW101M16
C 1231 (B,42,87)	CCSSCH151J50	C 2406 (B,151,101)	CKSRYB105K10
C 1234 (B,61,89)	CCSSCH151J50	C 2407 (B,152,95)	CKSSYB102K50
C 1235 (B,42,89)	CKSSYB102K50	C 2408 (B,152,97)	CKSSYB472K25
C 1236 (B,60,89)	CKSSYB102K50	C 2409 (B,152,98)	CKSSYB104K16
C 1237 (A,75,96) 0.1 uF	CCG1311	C 2410 (B,152,108)	CCSSCH681J50
C 1238 (A,82,92) 0.1 uF	CCG1311	C 2412 (B,147,107) 0.1 uF	CCG1286
C 1271 (A,82,102) 1 uF	CCG1255	C 2414 (A,154,107)	CKSSYB104K10
C 1272 (B,67,102) 1 uF	CCG1325	C 2415 (A,146,103) 22 uF	CCG1254
C 1273 (B,63,103) 1 uF	CCG1325	C 2551 (B,34,45)	CKSSYB104K10
C 1274 (B,67,104) 1 uF	CCG1325	C 2601 (B,51,62) 10 uF	DCH1201
C 1275 (B,63,106) 1 uF	CCG1325	C 2604 (B,53,71)	CKSSYB103K16
C 1276 (B,67,107) 1 uF	CCG1325	C 2605 (B,53,72)	CKSSYB104K10
C 1277 (B,68,115) 1 uF	CCG1255	C 2606 (B,51,65)	CKSSYB104K10
C 1278 (B,64,113) 1 uF	CCG1255	C 2607 (B,51,66)	CKSSYB103K16
C 1279 (B,62,113) 1 uF	CCG1255	C 2608 (B,58,79)	CKSSYB103K16
C 1280 (B,76,115) 1 uF	CCG1255	C 2609 (B,58,80)	CKSSYB104K10
C 1281 (A,78,102)	CKSRYB683K50	C 2610 (A,55,84)	CKSSYB104K10
C 1282 (A,80,102) 1 uF	CCG1255	C 2611 (A,55,85)	CKSSYB103K16
C 1283 (B,61,109) 1 uF	CCG1325	C 2902 (B,90,23) 4.7 uF	CCG1201
C 1284 (B,44,86)	CKSSYB103K16	C 2904 (B,91,26) 4.7 uF	CCG1201
C 1285 (B,59,86)	CKSSYB103K16	C 2905 (B,88,25)	CKSSYB104K10
C 1301 (B,30,119) 4.7 uF	CCG1201	C 2906 (B,86,29)	CKSSYB104K10
C 1302 (A,24,123)	CKSRYB103K50	C 2909 (A,97,28)	CKSRYB105K10
C 1303 (A,34,124)	CKSRYB103K50	C 2916 (A,111,22)	CEVLW221M4

Circuit Symbol and No.			Part No.
C 3001	(B,35,90)	10 uF	CCG1192
C 3003	(A,61,93)		CEVW101M16
C 3006	(A,20,74)		CKSSYB104K10
C 3051	(A,110,131)		CCSSCH101J50
C 3052	(B,100,126)		CKSRYB104K50
C 3053	(B,101,122)	(A,B,C,D,E,G)	CKSRYB104K50
	(B,101,122)	(F)	CKSRYB105K16
C 3054	(B,105,126)	2.2 uF	CCG1218
C 3055	(B,86,119)	4.7 uF	CCG1201
C 3056	(B,86,113)	4.7 uF	CCG1201
C 3057	(B,89,118)	4.7 uF	CCG1201
C 3058	(B,89,112)	4.7 uF	CCG1201
C 3059	(B,86,116)	4.7 uF	CCG1201
C 3060	(B,89,114)	4.7 uF	CCG1201
C 3061	(B,106,122)	2.2 uF	CCG1218
C 3062	(B,101,120)		CCSSCH101J50
C 3063	(B,98,129)		CCSSCH101J50
C 3064	(B,101,123)		CCSSCH101J50
C 3065	(B,100,115)		CCSSCH101J50
C 3066	(B,98,118)		CCSSCH560J50
C 3067	(A,113,125)		CCSSCH560J50
C 3091	(A,90,111)		CKSRYB471K50
C 3101	(B,168,121)	10 uF	DCH1201
C 3102	(B,157,116)		CKSSYB104K10
C 3147	(A,132,119)		CKSSYB102K50
C 3148	(A,140,126)		CKSSYB102K50
C 3149	(A,142,124)		CKSSYB102K50
C 3150	(A,137,126)		CCSSCH180J50
C 3151	(A,135,126)		CCSSCH180J50
C 3153	(A,142,129)		CKSSYB102K50
C 3154	(B,155,133)		CCSSCH101J50
C 3221	(A,142,118)		CKSSYB104K10
C 3222	(A,143,120)		CKSSYB104K10
C 3231	(A,149,121)		CKSSYB104K10
C 3232	(A,156,119)	10 uF	CCG1192
C 3233	(A,156,121)		CKSSYB104K10
C 3234	(A,152,121)		CKSSYB104K10
C 3235	(A,145,121)		CKSSYB104K10
C 3236	(A,145,127)		CKSRYB105K10
C 3237	(A,146,127)		CKSRYB105K10
C 3238	(A,148,127)		CKSRYB105K10
C 3239	(A,149,127)		CKSRYB105K10
C 3240	(A,151,127)		CKSRYB105K10
C 3241	(A,153,127)		CKSRYB105K10
C 3242	(A,154,127)		CKSRYB105K10
C 3243	(A,156,127)		CKSRYB105K10
C 3271	(A,115,122)		CCSSCH221J50
C 3272	(A,116,121)		CCSSCH221J50
C 3281	(A,128,127)		CCSRCH101J50
C 3282	(A,129,125)		CCSRCH101J50

B

Unit Number : CWN9246
Unit Name : Monitor Unit

MISCELLANEOUS

IC 5001	(A,130,47)	Interface IC	AK4187VN
IC 5101	(A,118,73)	Display IC	OZ527ILN
IC 5201	(A,83,101)	C/DC CONV IC	R1290K103A
IC 5301	(A,39,55)	IC	TC7SH08FUS1
IC 5401	(A,51,65)	Interface IC	BU90R104
Q 5201	(A,75,105)	Resistor Built-IN TR	LTC024EEB
Q 5202	(A,66,98)	Transistor	2SAR502UB
Q 5301	(A,98,74)	Bipolar TR	LSAR523UB
Q 5302	(A,100,78)	Bipolar TR	LSCR523UB
D 5101	(A,118,82)	Diode	RB060M-30
D 5102	(A,103,59)	Diode	CRG03
D 5201	(A,81,94)	Schottky Diode	RB162M-40
D 5202	(A,69,100)	Schottky Diode	DB3S308F0
D 5203	(A,72,100)	Schottky Diode	DB3S308F0
D 5204	(A,71,106)	Schottky Diode	DB3S308F0
L 5102	(A,112,79)	Inductor	ATH7068
L 5201	(A,86,95)	Choke Coil 22 uH	CTH1426
L 5301	(A,57,36)	Inductor	CTF1635
L 5303	(A,40,51)	Ferrite Bead	CTF1528
L 5304	(A,38,52)	Chip Beads	VTL1126
L 5401	(A,41,52)	Chip Beads	VTL1126
L 5402	(A,42,57)	Chip Beads	VTL1126
L 5403	(A,42,52)	Chip Beads	VTL1126
L 5404	(A,43,57)	Chip Beads	VTL1126
L 5405	(A,44,53)	Chip Beads	VTL1126
L 5406	(A,44,57)	Chip Beads	VTL1126
L 5407	(A,43,60)	Chip Beads	VTL1127
L 5408	(A,45,52)	Chip Beads	VTL1126
L 5409	(A,46,56)	Chip Beads	VTL1126
L 5410	(A,47,53)	Chip Beads	VTL1126
L 5411	(A,47,56)	Chip Beads	VTL1126
L 5412	(A,48,53)	Chip Beads	VTL1126
L 5413	(A,49,53)	Chip Beads	VTL1126
L 5414	(A,51,54)	Chip Beads	VTL1126
L 5415	(A,51,57)	Chip Beads	VTL1126
L 5416	(A,52,54)	Chip Beads	VTL1126
L 5417	(A,53,57)	Chip Beads	VTL1126
L 5418	(A,53,54)	Chip Beads	VTL1126
L 5419	(A,54,57)	Chip Beads	VTL1126
L 5420	(A,60,73)	Chip Solid	XTL3010
L 5421	(A,58,73)	Chip Solid	XTL3010
L 5422	(A,62,76)	Chip Ferrite Bead	BTX1047
L 5428	(A,42,67)	Chip Beads	VTL1126
TH5001	(A,123,22)	Thermistor	CCX1084
CN5001	(A,131,32)	FFC/FPC Connerctor	CKS6625
CN5002	(A,132,88)	Connector	CKS4428
CN5003	(A,99,52)	FFC/FPC Connerctor	CKS6514
CN5301	(A,37,42)	FFC/FPC Connerctor	CKS6672

RESISTORS

R 5006	(A,128,46)	RS1/16SS221J
R 5010	(A,129,44)	RS1/16SS621J
R 5011	(A,131,44)	RS1/16SS181J
R 5012	(A,133,46)	RS1/16SS620J
R 5033	(A,125,23)	RS1/16SS183J
R 5104	(A,117,65)	RS1/16SS104J
R 5105	(A,115,65)	RS1/16SS104J
R 5106	(A,117,77)	RS1/16SS102J
R 5107	(A,115,70)	RS1/16SS223J
R 5109	(A,116,68)	RS1/16SS563J
R 5110	(A,119,68)	RS1/16SS104J
R 5111	(A,120,68)	RS1/16SS101J

Circuit Symbol and No.		Part No.
R 5112	(A,123,75)	RS1/16SS102J
R 5113	(A,123,74)	RS1/16SS1202D
R 5114	(A,124,74)	RS1/16SS1202D
R 5119	(A,128,75)	RS1/16SS105J
R 5121	(A,126,74)	RS1/16SS154J
R 5123	(A,117,79)	RS1/8SQ2R2J
R 5201	(A,75,104)	RS1/16SS8201D
R 5202	(A,79,104)	RS1/16SS6800D
R 5203	(A,77,104)	RS1/16SS1502D
R 5206	(A,78,102)	RS1/16SS9102D
R 5207	(A,78,101)	RS1/16SS1802D
R 5208	(A,90,103)	RS1/16SS203J
R 5209	(A,91,102)	RS1/16SS104J
R 5210	(A,64,97)	RS1/16SS103J
R 5211	(A,80,105)	RS1/16SS472J
R 5212	(A,78,99)	RS1/16SS1003D
R 5213	(A,79,99)	RS1/16SS9101D
R 5214	(A,82,92)	RS1/8SQ2R2J
R 5216	(A,88,105)	RS1/16SS3303D
R 5217	(A,86,105)	RS1/16SS5601D
R 5218	(A,86,107)	RS1/16SS3902D
R 5219	(A,88,104)	RS1/10SR472J
R 5231	(A,76,99)	RS1/16SS103J
R 5232	(A,71,110)	RS1/16SS332J
R 5301	(A,26,65)	RS1/16SS39R0D
R 5302	(A,26,63)	RS1/16SS2R2J
R 5303	(A,27,63)	RS1/16SS1300D
R 5304	(A,28,65)	RS1/16SS47R0D
R 5305	(A,28,66)	RS1/16SS51R0D
R 5307	(A,29,65)	RS1/16SS39R0D
R 5308	(A,30,64)	RS1/16SS1R2J
R 5309	(A,31,65)	RS1/16SS75R0D
R 5310	(A,32,65)	RS1/16SS1R5J
R 5311	(A,31,62)	RS1/16SS1300D
R 5312	(A,32,61)	RS1/16SS75R0D
R 5313	(A,31,59)	RS1/16SS82R0D
R 5314	(A,31,57)	RS1/16SS200J
R 5315	(A,32,57)	RS1/16SS47R0D
R 5317	(A,32,54)	RS1/16SS56R0D
R 5319	(A,30,52)	RS1/16SS1800D
R 5321	(A,30,50)	RS1/16SS82R0D
R 5323	(A,17,45)	RS1/16SS473J
R 5325	(A,52,48)	RS1/16SS473J
R 5331	(A,101,71)	RS1/16SS153J
R 5333	(A,98,72)	RS1/16SS105J
R 5335	(A,100,75)	RS1/16SS153J
R 5336	(A,99,76)	RS1/16SS472J
R 5337	(A,98,78)	RS1/16SS101J
R 5340	(A,101,76)	RS1/16SS273J
R 5341	(A,99,75)	RS1/16SS334J
R 5342	(A,38,50)	RS1/16SS470J
R 5344	(A,17,43)	RS1/16SS473J
R 5345	(A,17,44)	RS1/16SS473J
R 5346	(A,35,48)	RS1/16SS473J
R 5349	(A,34,48)	RS1/16SS473J
R 5401	(A,41,51)	RS1/16SS221J
R 5402	(A,42,55)	RS1/16SS221J
R 5403	(A,42,51)	RS1/16SS221J
R 5404	(A,43,55)	RS1/16SS221J
R 5405	(A,44,51)	RS1/16SS221J

Circuit Symbol and No.		Part No.
R 5406	(A,44,55)	RS1/16SS221J
R 5407	(A,40,60)	RS1/16SS101J
R 5408	(A,45,51)	RS1/16SS221J
R 5409	(A,46,55)	RS1/16SS221J
R 5410	(A,47,51)	RS1/16SS221J
R 5411	(A,47,55)	RS1/16SS221J
R 5412	(A,48,51)	RS1/16SS221J
R 5413	(A,49,51)	RS1/16SS221J
R 5414	(A,51,52)	RS1/16SS221J
R 5415	(A,51,56)	RS1/16SS221J
R 5416	(A,52,52)	RS1/16SS221J
R 5417	(A,53,56)	RS1/16SS221J
R 5418	(A,53,52)	RS1/16SS221J
R 5419	(A,54,56)	RS1/16SS221J
R 5420	(A,53,74)	RS1/16SS103J
R 5422	(A,60,68)	RS1/16SS1000D
R 5423	(A,61,66)	RS1/16SS1000D
R 5424	(A,60,64)	RS1/16SS1000D
R 5425	(A,62,61)	RS1/16SS1000D
R 5426	(A,59,60)	RS1/16SS1000D
R 5433	(A,40,67)	RS1/16SS221J
R 5434	(A,54,77)	RS1/16SS473J
R 5435	(A,56,73)	RS1/16SS103J
R 5436	(A,55,75)	RS1/16SS221J
R 5437	(A,54,76)	RS1/16SS103J

CAPACITORS

C 5001	(A,135,38)		CKSSYB103K16
C 5002	(A,134,41)		CKSSYB103K16
C 5003	(A,128,41)		CKSSYB103K16
C 5004	(A,126,38)		CKSSYB103K16
C 5005	(A,127,48)	10 uF	CCG1244
C 5006	(A,129,52)	10 uF	CCG1244
C 5007	(A,130,51)		CKSSYB104K10
C 5008	(A,128,48)		CKSSYB104K10
C 5015	(A,123,21)		CKSSYB104K10
C 5016	(A,123,23)		CKSSYB104K10
C 5101	(A,106,61)	10 uF	CCG1236
C 5103	(A,110,70)	10 uF	CCG1236
C 5104	(A,110,72)	10 uF	CCG1236
C 5105	(A,115,66)		CKSRYB105K16
C 5106	(A,114,72)		CKSRYB105K16
C 5108	(A,117,68)		CKSRYB105K10
C 5109	(A,118,68)		CCSSCH101J50
C 5110	(A,122,80)	10 uF	CCG1236
C 5113	(A,125,75)		CKSRYB224K16
C 5120	(A,119,79)		CKSSYB332K50
C 5121	(A,125,98)		CCSRCH101J50
C 5201	(A,84,106)		CKSSYB224K6R3
C 5203	(A,81,106)		CKSRYB105K10
C 5204	(A,82,106)		CKSSYB224K6R3
C 5205	(A,75,100)		CKSSYB104K10
C 5206	(A,79,91)		CKSSYB472K50
C 5207	(A,87,101)		CKSSYB102K50
C 5208	(A,71,108)		CKSRYB105K16
C 5209	(A,90,101)		CKSRYB105K10
C 5210	(A,70,97)		CKSQYB105K25
C 5212	(A,72,97)		CKSQYB105K25
C 5213	(A,73,106)		CKSRYB104K50

Circuit Symbol and No.			Part No.
C 5214	(A,69,102)		CKSRYB104K50
C 5215	(A,72,102)		CKSRYB104K50
C 5217	(A,68,94)		CKSYB475K16
C 5218	(A,80,107)		CKSSYB682K25
C 5219	(A,88,99)	4.7 uF	CCG1212
C 5220	(A,75,102)		CKSSYB103K16
C 5221	(A,78,100)		CKSSYB561K50
C 5222	(A,77,95)		CKSYB475K16
C 5224	(A,86,104)		CKSSYB681K50
C 5302	(A,25,61)	4.7 uF	CCG1222
C 5304	(A,28,68)		CKSSYB104K16
C 5306	(A,30,68)		CKSSYB104K16
C 5308	(A,32,68)		CKSSYB104K16
C 5309	(A,33,64)		CKSSYB102K50
C 5310	(A,33,63)		CKSRYB105K16
C 5311	(A,34,61)		CKSSYB102K50
C 5312	(A,34,60)		CKSSYB104K10
C 5314	(A,32,58)		CKSSYB104K10
C 5316	(A,34,55)		CKSSYB104K10
C 5318	(A,34,53)		CKSSYB104K10
C 5320	(A,32,50)		CKSRYB105K10
C 5321	(A,57,46)		CKSSYB102K50
C 5323	(A,57,45)		CKSSYB104K16
C 5325	(A,58,43)	10 uF	CCG1236
C 5326	(A,57,33)		CKSSYB102K50
C 5329	(A,56,49)		CKSSYB102K50
C 5330	(A,57,49)		CKSSYB104K10
C 5331	(A,59,49)	10 uF	CCG1192
C 5334	(A,22,48)		CKSSYB104K16
C 5335	(A,20,49)	4.7 uF	CCG1222
C 5337	(A,20,56)		CKSQYB225K16
C 5340	(A,23,51)		CKSQYB334K50
C 5342	(A,30,47)	2.2 uF	CCG1218
C 5343	(A,98,71)		CKSSYB104K10
C 5344	(A,100,81)	10 uF	CCG1236
C 5345	(A,39,48)		CCSSCH330J50
C 5346	(A,39,52)		CKSSYB104K10
C 5347	(A,32,48)		CKSSYB102K50
C 5348	(A,53,47)		CKSSYB102K50
C 5349	(A,15,45)		CKSRYB105K10
C 5401	(A,39,61)		CCSSCH270J50
C 5403	(A,49,57)		CKSSYB104K10
C 5404	(A,49,58)		CKSSYB103K16
C 5405	(A,55,58)		CKSSYB103K16
C 5406	(A,55,57)		CKSSYB104K10
C 5407	(A,59,71)		CKSSYB103K16
C 5408	(A,60,71)		CKSSYB104K10
C 5409	(A,57,59)		CKSSYB104K10
C 5410	(A,57,60)		CKSSYB103K16
C 5414	(A,58,78)		CKSSYB103K16
C 5416	(A,61,79)	10 uF	DCH1201
C 5417	(A,41,66)		CKSSYB104K10
C 5418	(A,43,66)		CKSSYB103K16
C 5419	(A,51,73)		CKSSYB103K16
C 5420	(A,51,74)		CKSSYB104K10
C 5421	(A,56,74)	2.2 uF	CCG1205

C

Unit Number : CWX4606

Circuit Symbol and No.			Part No.

Unit Name : DVD Core Unit(MS7.2)

MISCELLANEOUS

IC 1004	(B,85,53)	IC	NJM2885DL1-33
IC 1005	(B,88,63)	IC	R1232D121B
IC 1201	(A,27,14)	IC	BD8217EFV
IC 1401	(B,64,34)	Flash ROM Unit	CWW8456
IC 1402	(A,86,19)	Flash ROM Unit	CWW8457
IC 1480	(B,63,12)	RAM IC	M12L64164A-5TG2Y
IC 1501	(A,62,20)	IC	MN2DS0018MA
IC 1801	(B,44,16)	D/A Converter	PCM1753DBQ
IC 1900	(B,38,9)	IC	S-1200B50-M5
IC 1901	(B,73,58)	Regulator IC	S-1133B50-U5
Q 1101	(B,64,50)	Transistor	LSCR523UB
Q 1102	(B,68,48)	Transistor	LSCR523UB
Q 1103	(B,64,55)	Transistor	2SB1132
Q 1104	(B,64,43)	Transistor	2SB1132
L 1003	(B,83,60)	Inductor	CTF1757
L 1004	(B,85,69)	Inductor	CTF1295
L 1500	(A,45,14)	Inductor	CTF1387
L 1512	(A,59,5)	Inductor	CTF1743
L 1900	(A,92,69)	Inductor	CTF1487
L 1901	(A,84,69)	Inductor	CTF1558
L 1902	(A,78,67)	Inductor	CTF1734
X 1501	(A,45,10)	Resonator 27.000 MHz	CSS1768
F 1900	(A,89,70)	Chip EMI Filter	DTF1106
F 1901	(A,85,71)	Chip EMI Filter	DTL1106
CN1101	(A,41,43)	Connector	CKS6628
CN1201	(A,25,35)	Connector	CKS6640
CN1301	(B,91,11)	Connector	CKS5705
CN1901	(A,74,56)	Connector	CKS6025

RESISTORS

R 1101	(B,61,49)	RS1/16SS104J
R 1102	(B,67,50)	RS1/16SS104J
R 1103	(B,67,52)	RS1/16SS391J
R 1104	(B,62,51)	RS1/16SS511J
R 1105	(B,70,48)	RS1/16SS4300F
R 1106	(B,69,50)	RS1/16SS5600F
R 1109	(B,68,52)	RS1/16SS3R3J
R 1110	(B,60,47)	RS1/16SS3R3J
R 1111	(B,60,57)	RS1/10SR2R2J
R 1112	(B,60,53)	RS1/10SR2R2J
R 1113	(B,69,46)	RS1/10SR3R3J
R 1114	(B,67,43)	RS1/10SR3R9J
R 1115	(B,60,54)	RS1/10SR2R2J
R 1116	(B,60,56)	RS1/10SR2R2J
R 1117	(B,67,44)	RS1/10SR3R9J
R 1118	(B,67,46)	RS1/10SR3R9J
R 1200	(A,33,8)	RS1/16SS753J
R 1201	(A,33,6)	RS1/16SS753J
R 1205	(A,34,20)	RS1/16SS1R0J
R 1210	(B,19,16)	RS1/16SS101J
R 1211	(A,19,12)	RS1/16SS102J
R 1212	(A,20,11)	RS1/16SS102J
R 1213	(B,23,19)	RS1/10SR1R0J
R 1214	(B,22,19)	RS1/10SR1R0J
R 1215	(B,24,19)	RS1/10SR1R0J
R 1216	(B,27,19)	RS1/10SR1R0J

Circuit Symbol and No.		Part No.
R 1218	(A,17,10)	RS1/16SS1R0J
R 1219	(A,17,11)	RS1/16SS1R0J
R 1222	(A,19,8)	RS1/16SS1R0J
R 1223	(A,19,7)	RS1/16SS1R0J
R 1226	(A,22,26)	RS1/16SS101J
R 1303	(B,90,21)	RS1/16SS0R0J
R 1304	(B,89,22)	RS1/16SS563J
R 1305	(B,89,23)	RS1/16SS243J
R 1306	(B,90,23)	RS1/16SS683J
R 1307	(B,89,21)	RS1/16SS243J
R 1314	(B,86,22)	RAB4CQ822J
R 1401	(B,75,31)	RS1/16SS221J
R 1402	(B,53,29)	RS1/16SS104J
R 1405	(B,79,12)	RS1/16SS104J
R 1406	(B,80,10)	RS1/16SS472J
R 1480	(B,56,20)	RAB4CQ560J
R 1481	(B,61,21)	RAB4CQ560J
R 1482	(B,65,20)	RAB4CQ560J
R 1483	(B,68,20)	RAB4CQ560J
R 1484	(B,71,20)	RAB4CQ560J
R 1485	(B,54,4)	RAB4CQ560J
R 1486	(B,59,4)	RAB4CQ560J
R 1487	(B,68,4)	RAB4CQ560J
R 1488	(B,72,4)	RAB4CQ560J
R 1489	(B,63,5)	RS1/16SS560J
R 1490	(B,54,20)	RS1/16SS560J
R 1501	(A,47,9)	RS1/16SS122J
R 1503	(A,47,11)	RS1/16SS105J
R 1504	(A,43,14)	RS1/16SS100J
R 1505	(A,48,14)	RS1/16SS101J
R 1506	(A,41,15)	RS1/16SS101J
R 1507	(A,42,16)	RS1/16SS101J
R 1508	(A,46,16)	RS1/16SS221J
R 1509	(A,66,37)	RS1/16SS102J
R 1510	(A,66,35)	RS1/16SS102J
R 1512	(A,60,4)	RS1/16SS101J
R 1513	(A,68,42)	RS1/16SS103J
R 1514	(A,68,36)	RS1/16SS183J
R 1515	(A,71,38)	RS1/16SS472J
R 1516	(A,66,41)	RS1/16SS104J
R 1517	(A,78,16)	RS1/16SS103J
R 1518	(A,78,24)	RS1/16SS103J
R 1519	(A,77,27)	RS1/16SS102J
R 1522	(A,66,40)	RS1/16SS104J
R 1523	(A,67,38)	RS1/16SS221J
R 1524	(A,74,41)	RS1/16SS472J
R 1525	(A,69,36)	RS1/16SS223J
R 1526	(A,70,38)	RS1/16SS103J
R 1527	(A,69,34)	RS1/16SS223J
R 1528	(A,79,17)	RS1/16SS103J
R 1529	(A,77,18)	RS1/16SS103J
R 1530	(B,54,27)	RS1/16SS104J
R 1531	(A,67,40)	RS1/16SS391J
R 1534	(A,74,37)	RS1/16SS221J
R 1535	(A,78,28)	RS1/16SS101J
R 1536	(A,72,37)	RS1/16SS104J
R 1537	(A,73,40)	RS1/16SS104J
R 1538	(A,64,5)	RS1/16SS104J
R 1539	(A,79,30)	RS1/16SS101J
R 1540	(A,73,39)	RS1/16SS221J

Circuit Symbol and No.		Part No.
R 1541	(A,74,39)	RS1/16SS221J
R 1542	(A,76,32)	RS1/16SS104J
R 1543	(A,70,37)	RS1/16SS561J
R 1544	(A,77,32)	RS1/16SS104J
R 1545	(A,78,19)	RS1/16SS103J
R 1546	(A,78,22)	RS1/16SS103J
R 1548	(A,77,29)	RS1/16SS101J
R 1550	(B,48,25)	RS1/16SS6801F
R 1551	(B,50,25)	RS1/16SS4702F
R 1556	(A,61,46)	RS1/16SS472J
R 1600	(A,44,25)	RS1/16SS0R0J
R 1601	(A,47,23)	RS1/16SS123J
R 1602	(A,43,23)	RS1/16SS123J
R 1603	(A,42,26)	RN1/16SE1002D
R 1604	(A,54,37)	RS1/16SS105J
R 1605	(A,54,35)	RS1/16SS105J
R 1611	(A,47,24)	RS1/16SS105J
R 1702	(A,48,20)	RS1/16SS3002D
R 1704	(A,42,20)	RS1/16SS2402D
R 1705	(A,41,18)	RS1/16SS1002D
R 1706	(A,42,19)	RS1/16SS101J
R 1708	(B,52,22)	RS1/16SS2000D
R 1801	(B,35,11)	RS1/10SR0R0J
R 1803	(B,38,19)	RS1/16SS821J
R 1804	(B,38,18)	RS1/16SS821J
R 1805	(B,32,15)	RS1/16SS104J
R 1806	(B,36,15)	RS1/16SS104J
R 1905	(A,81,65)	RS1/16SS101J
R 1910	(A,79,68)	RS1/16SS101J
R 1911	(A,69,48)	RS1/16SS101J
R 1915	(A,64,47)	RS1/16SS0R0J

CAPACITORS

C 1008	(B,79,61)	10 uF	DCH1201
C 1009	(B,79,63)	10 uF	DCH1201
C 1010	(B,79,54)		CKSQYB225K10
C 1011	(B,78,51)		CKSRYB105K10
C 1013	(B,84,65)	10 uF	DCH1201
C 1014	(B,83,66)	10 uF	DCH1201
C 1101	(B,70,53)	10 uF	CCG1192
C 1104	(B,61,52)		CKSSYB104K10
C 1105	(B,61,47)		CKSSYB104K10
C 1106	(B,62,58)		CKSSYB103K16
C 1107	(B,65,41)		CKSSYB103K16
C 1108	(A,37,34)		CKSSYB103K16
C 1109	(A,39,32)		CKSRYB224K16
C 1110	(A,37,36)		CKSSYB103K16
C 1111	(A,40,34)		CKSRYB224K16
C 1112	(B,60,43)		CKSYB226K6R3
C 1113	(B,68,56)		CKSYB226K6R3
C 1201	(B,27,15)		CKSYB475K16
C 1202	(B,28,18)		CKSSYB104K16
C 1205	(A,33,22)		CKSSYB103K16
C 1206	(A,36,22)		CKSRYB104K16
C 1207	(A,33,18)		CKSRYB104K16
C 1208	(A,33,14)		CKSSYB104K16
C 1212	(A,32,24)		CKSSYB104K16
C 1213	(B,22,25)		CKSSYB222K50
C 1214	(B,22,26)		CKSRYB104K16

Circuit Symbol and No.		Part No.
C 1218	(A,19,9)	CKSRYB104K16
C 1219	(A,21,7)	CKSRYB104K16
C 1220	(B,22,11)	CEVW101M16
C 1401	(B,76,30)	CKSSYB103K16
C 1403	(B,52,33)	CKSSYB104K10
C 1404	(B,51,35)	CKSQYB475K6R3
C 1408	(B,82,13)	CKSSYB104K10
C 1409	(B,79,14)	CKSQYB475K6R3
C 1480	(B,51,19)	CKSSYB104K10
C 1481	(B,51,20)	CKSSYB104K10
C 1482	(B,59,20)	CKSSYB104K10
C 1484	(B,63,20)	CKSSYB104K10
C 1485	(B,74,21)	CKSSYB104K10
C 1487	(B,62,5)	CKSSYB104K10
C 1488	(B,56,5)	CKSSYB104K10
C 1489	(B,75,16)	CKSQYB106K6R3
C 1501	(B,47,29)	CKSQYB106K6R3
C 1502	(B,83,18)	CKSQYB106K6R3
C 1503	(A,62,5)	CKSSYB104K10
C 1504	(A,53,5)	CKSSYB104K10
C 1505	(A,56,5)	CKSSYB104K10
C 1506	(A,57,5)	CKSSYB104K10
C 1507	(A,65,5)	CKSSYB104K10
C 1508	(A,69,5)	CKSSYB104K10
C 1509	(A,71,5)	CKSSYB104K10
C 1510	(A,47,8)	CCSSCH120J50
C 1511	(A,48,10)	CKSSYB104K10
C 1512	(A,45,12)	CCSSCH100D50
C 1513	(B,76,10)	CKSSYB104K10
C 1514	(A,48,13)	CKSSYB104K10
C 1515	(A,48,15)	CKSSYB104K10
C 1516	(B,75,14)	CKSSYB104K10
C 1517	(A,77,16)	CKSSYB104K10
C 1518	(B,77,21)	CKSSYB104K10
C 1519	(A,77,26)	CKSSYB104K10
C 1520	(A,77,30)	CKSSYB104K10
C 1521	(A,62,35)	CKSSYB104K10
C 1522	(A,67,34)	CKSSYB104K10
C 1523	(A,70,35)	CKSSYB471K50
C 1524	(A,68,38)	CKSSYB473K16
C 1525	(A,69,39)	CKSSYB103K16
C 1526	(A,67,36)	CKSSYB103K16
C 1528	(A,72,36)	CCSSCH471J50
C 1529	(A,69,41)	CKSSYB103K16
C 1530	(B,50,26)	CKSSYB104K10
C 1531	(A,71,40)	CKSSYB473K16
C 1601	(A,44,27)	CKSSYB103K16
C 1602	(A,48,22)	CCSSCH101J50
C 1603	(A,43,22)	CCSSCH101J50
C 1604	(A,45,22)	CCSSCH680J50
C 1605	(A,41,23)	CCSSCH680J50
C 1606	(A,40,27)	CKSSYB104K10
C 1607	(A,50,36)	CKSQYB106K6R3
C 1608	(A,47,32)	CKSRYB105K10
C 1609	(A,54,39)	CKSSYB104K10
C 1612	(A,55,38)	CKSSYB104K10
C 1613	(A,56,38)	CKSSYB104K10
C 1614	(A,57,38)	CKSSYB104K10
C 1615	(A,57,36)	CKSSYB104K10
C 1616	(A,57,34)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 1617	(A,58,35)	CKSSYB104K10
C 1618	(A,60,37)	CCSSCH101J50
C 1619	(A,59,35)	CKSSYB562K25
C 1620	(A,60,35)	CKSSYB224K6R3
C 1621	(A,61,37)	CKSSYB224K6R3
C 1622	(A,62,37)	CKSSYB333K16
C 1623	(A,48,32)	CKSRYB105K10
C 1624	(A,61,38)	CKSSYB104K10
C 1625	(A,60,38)	CKSSYB104K10
C 1628	(A,47,25)	CKSSYB103K16
C 1700	(A,48,19)	CKSSYB104K10
C 1701	(A,47,18)	CKSSYB104K10
C 1702	(A,41,21)	CKSRYB105K10
C 1703	(A,44,21)	CKSSYB104K10
C 1704	(A,40,20)	CKSSYB104K10
C 1801	(A,82,49)	CKSSYB104K10
C 1802	(B,50,14) 10 uF	CCG1192
C 1805	(B,38,14)	CKSSYB104K10
C 1808	(B,32,18)	CCSRCH182J50
C 1809	(B,35,18)	CCSRCH182J50
C 1810	(B,33,17)	CKSQYB475K6R3
C 1811	(B,36,17)	CKSQYB475K6R3
C 1901	(B,35,9)	CKSRYB105K10
C 1902	(B,39,6)	CKSRYB105K16
C 1903	(B,33,6)	CKSSYB104K10
C 1904	(A,70,45)	CCSSCH101J50
C 1905	(A,86,69)	CKSSYB102K50
C 1906	(B,75,62)	CKSSYB104K16
C 1907	(B,70,57) 4.7 uF	CCG1201
C 1908	(A,90,68)	CKSSYB102K50

D

Unit Number : CWX4034
Unit Name : Compound Unit(A)

MISCELLANEOUS

S 1201	Spring Switch(12cm)	CSN1080
S 1202	Spring Switch(8cm)	CSN1080
S 1203	Spring Switch(DISC SENS)	CSN1082
S 1204	Spring Switch(DISC SENS)	CSN1083
S 1205	Spring Switch(8cm)	CSN1081

E

Unit Number : CWX3394
Unit Name : Compound Unit(B)

MISCELLANEOUS

S 1206	Spring Switch(CLAMP)	CSN1080

F

Unit Number : CWN8792
Unit Name : Keyboard Unit

MISCELLANEOUS

IC 5501	(A,158,16) IR RC Rec Module	SIR8440B5
Q 5501	(B,51,11) Chip Transistor	HN1C01FU
Q 5502	(B,49,7) Bipolar TR	LSCR523UB

Circuit Symbol and No.		Part No.
Q 5503	(B,148,17) Chip Transistor	HN1C01FU
Q 5504	(B,143,16) Bipolar TR	LSCR523UB
D 5501	(A,149,10) LED	SMLVN6RGB2UK(B)
D 5502	(A,23,10) LED	SMLVN6RGB2UK(B)
S 5501	(A,66,15) Switch	CSN1057
S 5502	(A,102,15) Push Switch	CSG1155
S 5503	(A,142,15) Push Switch	CSG1155
S 5504	(A,120,6) Push Switch	CSG1155
S 5505	(A,13,11) Encoder	CSD1168
S 5506	(A,84,6) Push Switch	CSG1155
S 5507	(A,31,8) Push Switch	CSG1155
S 5508	(A,47,6) Push Switch	CSG1155
S 5509	(A,66,6) Push Switch	CSG1155
S 5510	(A,102,6) Push Switch	CSG1155
CN5501	(B,115,12) FFC/FPC Connector	CKS6638

RESISTORS

R 5501	(B,155,17)	RS1/10SR101J
R 5503	(B,55,11)	RS1/10SR272J
R 5505	(B,51,14)	RS1/10SR560J
R 5506	(B,53,14)	RS1/10SR680J
R 5507	(B,48,10)	RS1/10SR560J
R 5508	(B,44,11)	RS1/10SR680J
R 5509	(B,48,11)	RS1/10SR272J
R 5513	(B,53,8)	RS1/10SR272J
R 5514	(B,53,7)	RS1/10SR560J
R 5515	(B,56,7)	RS1/10SR680J
R 5516	(B,39,7)	RS1/10SR152J
R 5517	(B,39,6)	RS1/10SR222J
R 5518	(B,64,8)	RS1/10SR472J
R 5519	(B,94,6)	RS1/10SR123J
R 5520	(B,151,19)	RS1/10SR272J
R 5521	(B,150,20)	RS1/10SR560J
R 5522	(B,149,22)	RS1/10SR680J
R 5523	(B,140,13)	RS1/10SR272J
R 5524	(B,148,20)	RS1/10SR560J
R 5525	(B,147,21)	RS1/10SR680J
R 5526	(B,140,14)	RS1/10SR272J
R 5527	(B,143,19)	RS1/10SR560J
R 5528	(B,145,20)	RS1/10SR680J
R 5530	(B,104,8)	RS1/10SR392J
R 5531	(B,100,7)	RS1/10SR332J
R 5532	(B,32,7)	RS1/10SR153J

CAPACITORS

C 5502	(B,157,16) 10 uF	CCG1192

G

Unit Number : EWX2008
Unit Name : Main PCB Unit

MISCELLANEOUS

IC 1	(A,24,20) IC	BA6247FP
Q 1	(A,14,17) Transistor	LTC024EEB
D 1	(A,16,16) Diode	DZ2J056M0
S 1	(A,27,46) Spring Switch(DEG0)	CSN1081
CN1	(A,25,6) Connector	CKS6063

Circuit Symbol and No.		Part No.

RESISTORS

R 1	(A,17,13)	RS1/16SS272J
R 2	(A,19,15)	RS1/16SS471J
R 3	(A,23,25)	RS1/16SS102J
R 4	(A,27,26)	RS1/16SS102J
R 5	(A,27,25)	RS1/16SS102J
R 6	(A,16,13)	RS1/16SS183J

CAPACITORS

C 1	(A,12,24)	CEVW101M16
C 2	(A,27,15)	CKSSYB104K16
C 3	(A,21,15)	CKSRYB105K16
C 4	(A,31,25)	CKSSYB104K16
C 5	(A,20,36)	CKSSYB223K16
C 6	(A,14,35)	CKSSYB223K16
C 7	(A,15,11)	CKSSYB104K10

H

Unit Number : EWX2009
Unit Name : SW PCB Unit

MISCELLANEOUS

S 51	(A,17,7) Spring Switch(CLOSE)	CSN1080
S 52	(A,15,15) Spring Switch(OPEN)	CSN1080
VR51	(A,11,30) Variable Resistor 10 kohm	CCW1029

RESISTORS

R 51	(A,11,12)	RS1/16SS272J
R 52	(A,11,11)	RS1/16SS273J
R 53	(A,11,9)	RS1/16SS472J
R 54	(A,11,10)	RS1/16SS563J

CAPACITORS

C 51	(A,11,19)	CKSSYB104K10
C 52	(A,9,14)	CKSSYB104K10