

JVC

PARTS LIST

CD RECEIVER

KW-R600BTE

KW-R600BTEN

KW-R600BTEY

KW-R700BTU

KW-R800BTJ

■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

■ PRECAUTIONS ON PARTS LIST

- The parts identified by the $\triangle$ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

■ PRECAUTIONS ON SERVICE


Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND () and the ISOLATED (NEUTRAL) GND (.

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

■ DEVIATION TOLERANCE RANGE

DEVIATION TOLERANCE RANGE									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

EXPLODED VIEW (UNIT)

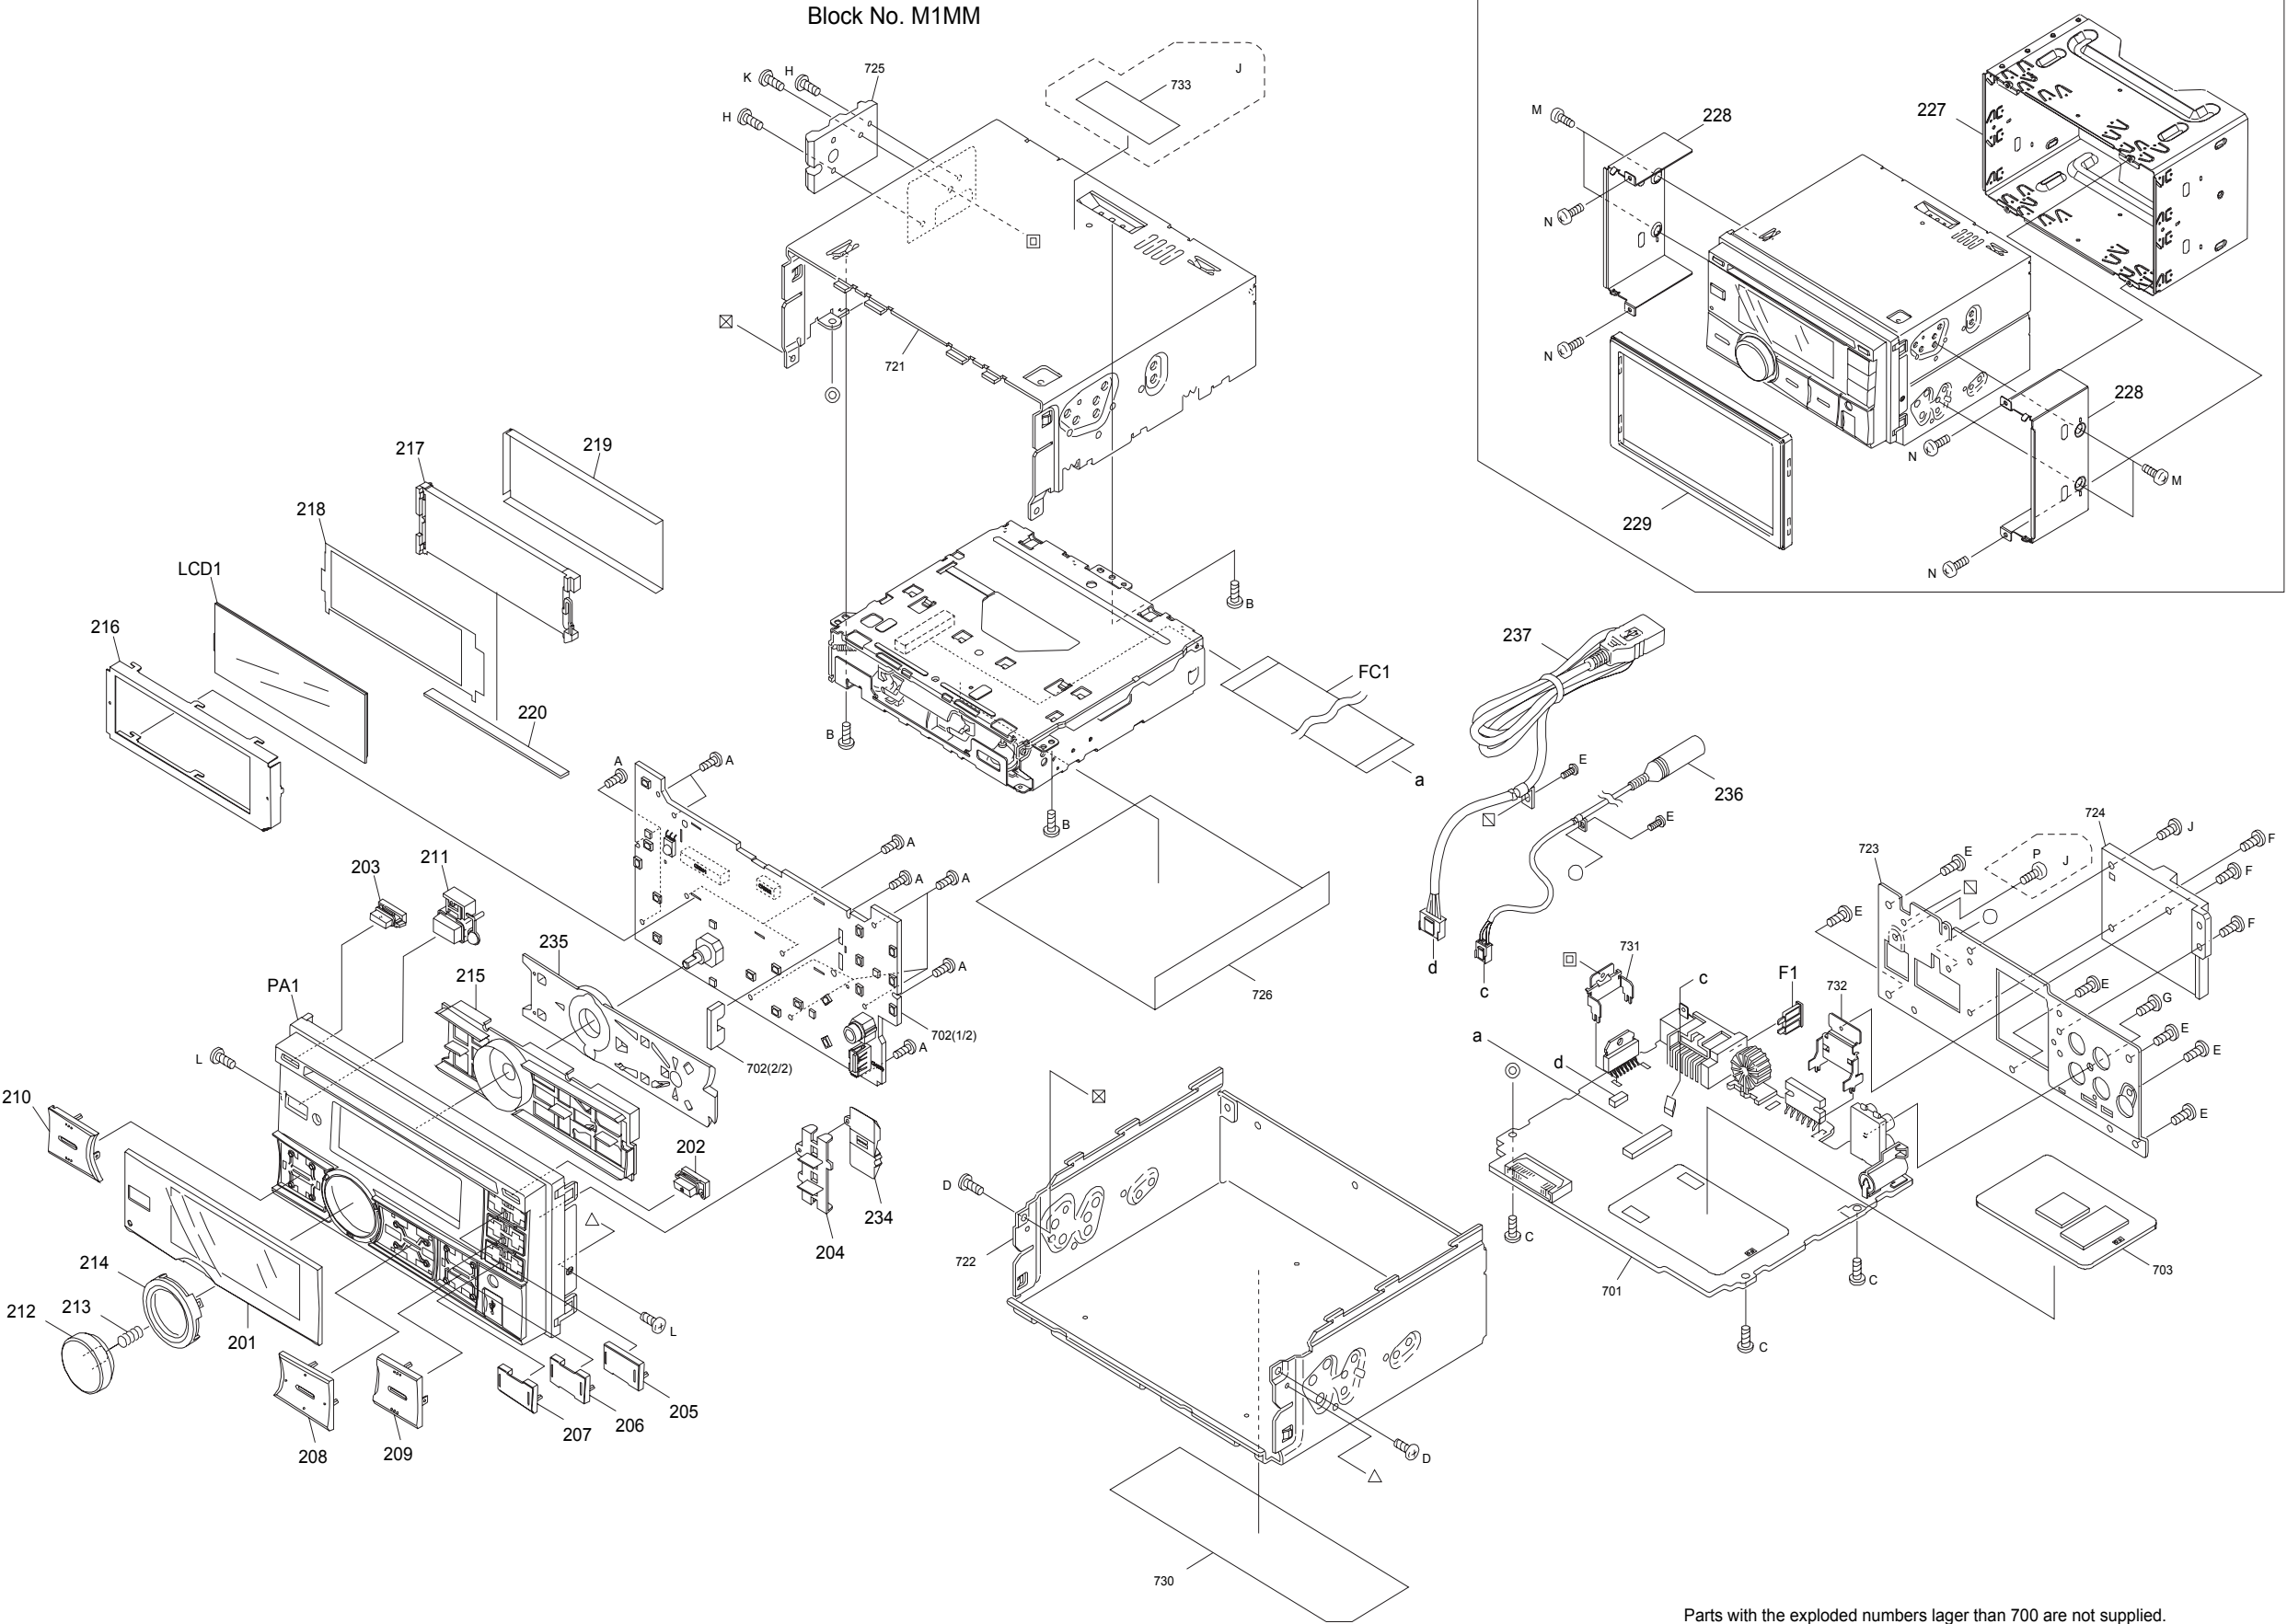

Parts with the exploded numbers larger than 700 are not supplied.


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

△	F1	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0294-001A-E	E-CARD WIRE		1	
	LCD1	QLD0700-001	LCD MODULE		1	
	PA1	GE34823-009A	FRONT PANEL ASSY		1	
	A	QYSDSF2006ZA	TAP SCREW	M2 x 6mm	13	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	GE40377-002A	SCREW		3	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	E	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	8	
	F	GE40377-001A	SCREW		3	
	G	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	GE40377-002A	SCREW		2	
	J	GE40377-003A	SPECIAL SCREW		1	
	K	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	L	QYSDST2004ZA	TAP SCREW	M2 x 4mm	2	
	M	QYSSSP5008ZA	SCREW	M5 x 8mm	4	A,B,C,E
	N	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	4	A,E
	P	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	E
	201	GE20304-004A	FINDER		1	A,B,C
	201	GE20304-005A	FINDER		1	D
	201	GE20304-008A	FINDER		1	E
	202	GE34802-001A	EJECT BUTTON		1	
	203	GE34803-001A	DISP. BUTTON		1	
	204	GE34804-001A	LIGHT STRIP		1	
	205	GE34806-001A	PRESET BTN 1 2		1	
	206	GE34807-002A	PRESET BTN 3 4		1	
	207	GE34808-001A	PRESET BTN 5 6		1	
	208	GE34812-001A	NAVI BUTTON		1	
	209	GE34815-003A	EQ BUTTON		1	
	210	GE34816-002A	MENU BUTTON		1	A,B,C
	210	GE34816-001A	MENU BUTTON		1	D,E
	211	GE40582-001A	SRC BTN ASSY		1	
	212	GE34820-002A	VOL KNOB		1	
	213	GE40127-005A	KNOB SPRING		1	
	214	GE34817-002A	RIM COVER		1	
	215	GE34813-001A	RIM LENS		1	
	216	GE34821-001A	LCD CASE		1	
	217	GE34822-001A	LCD LENS		1	
	218	GE40572-002A	LIGHT SHT(UNI)		1	
	219	GE40574-001A	REFL. SHT(UNI)		1	
	220	QNZ1077-001	RUBBER CONNE		1	
	227	LV22425-007A	SLEEVE ASSY		1	A,B,C,E
	228	LV37151-004A	SUPPORT BKT		2	A,B,C,E
	229	GE20225-001A	TRIM PLATE		1	A,B,C,E
	234	GE34805-001A	LIGHT GUIDE (T)		1	
	235	GE34818-001A	LIGHT GUIDE (B)		1	
	236	QAM1370-001	CAR CABLE		1	
	237	QAM1360-001	CAR CABLE		1	

EXPLODED VIEW (CD MECHANISM)

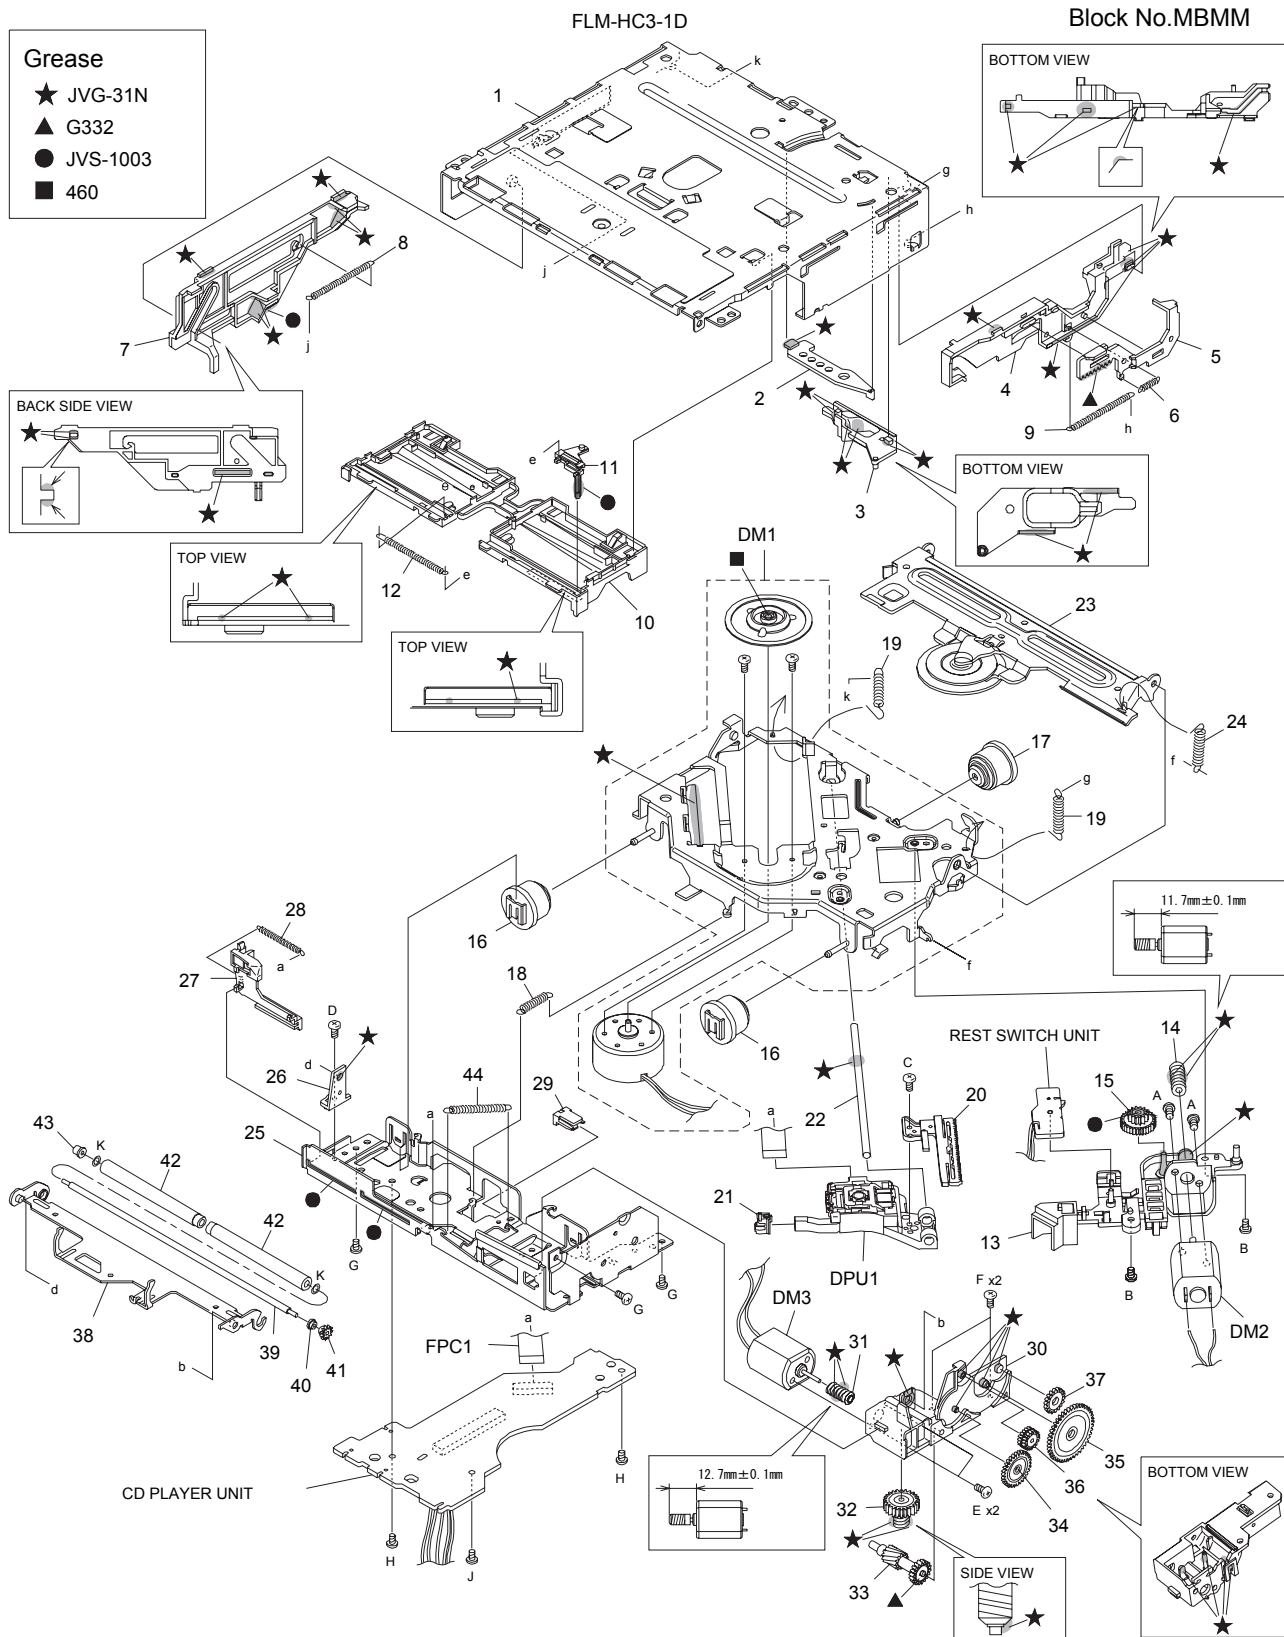

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM>						
	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
△	DPU1	QAL1226-001	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-001A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-002A	BOTTOM FRAME		1	
	26	LV38954-002A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	
ELECTRIC UNIT <01>						
△	IC1	TEF6614TV1S4-X	IC		1	
	IC90	NJM4565E-X	IC		1	
	IC161	TDA7718B-X	IC		1	A,B,C,E
	IC161	TDA7720-X	IC		1	D
△	IC301	TDA7851A	IC		1	
△	IC501	LA6565-X	IC		1	
△	IC541	MN6627553PA	IC		1	
	IC581	NJM4565E-X	IC		1	
△	IC701	JES231B	IC(MCU)		1	A,B,C
△	IC701	JES230B	IC(MCU)		1	D,E
	IC771	BR24T02FJ-W-X	IC		1	
	IC771 or	R1EX24002ASAA-X	IC		1	
	IC801	74AHCT126PW-X	IC		1	E
△	IC901	LV5680P	IC		1	
	IC902	XC6213B332NG-X	IC		1	
△	IC921	BD00GA3WEFJ-X	IC		1	
△	IC931	BD9673EFJ-X	IC		1	
	IC932	RT9715EGB-X	IC		1	
△	IC941	BD9673EFJ-X	IC		1	
	Q301	DRC2114E-X	DIGI TRANSISTOR		1	
	Q301 or	RT1N141C-X	DIGI TRANSISTOR		1	
	Q322	IMX9-W	PAIR TRANSISTOR		1	
	Q332	IMX9-W	PAIR TRANSISTOR		1	
	Q501	2SB1424/R/-W	TRANSISTOR		1	
	Q540	2SA2188/F/-X	TRANSISTOR		1	
	Q782	DRA2114E-X	DIGI TRANSISTOR		1	
	Q782 or	RT1P141C-X	DIGI TRANSISTOR		1	
	Q785	DRC2124E-X	DIGI TRANSISTOR		1	
	Q785 or	RT1N241C-X	DIGI TRANSISTOR		1	
	Q786	DRA2124E-X	DIGI TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q786	or	RT1P241C-X	TRANSISTOR	1	
	Q881		DRC2114E-X	DIGI TRANSISTOR	1	
	Q881	or	RT1N141C-X	DIGI TRANSISTOR	1	
	Q970		2SC1623A/5-6/-X	TRANSISTOR	1	
	Q970	or	2SC3928A/QR/-X	TRANSISTOR	1	
	Q971		2SC1623A/5-6/-X	TRANSISTOR	1	
	Q971	or	2SC3928A/QR/-X	TRANSISTOR	1	
	D3		NAF0029-001X	DIODE	1	
	D321		BAW56-TP-X	SI DIODE	1	
	D321	or	MC2836-X	DIODE	1	
	D331		BAW56-TP-X	SI DIODE	1	
	D331	or	MC2836-X	DIODE	1	
	D477		NAF0029-001X	DIODE	1	
	D478		NAF0029-001X	DIODE	1	
	D501		GS1J-LTP-X	DIODE	1	
	D501	or	1SR154-400-X	SI DIODE	1	
	D502		GS1J-LTP-X	DIODE	1	
	D502	or	1SR154-400-X	SI DIODE	1	
	D710		RKZ6.2B2KG-X	Z DIODE	1	
	D710	or	DZ2J062/M/-X	Z DIODE	1	
	D711		RKZ6.2B2KG-X	Z DIODE	1	
	D711	or	DZ2J062/M/-X	Z DIODE	1	
	D712		RKZ6.2B2KG-X	Z DIODE	1	
	D712	or	DZ2J062/M/-X	Z DIODE	1	
	D713		RKZ6.2B2KG-X	Z DIODE	1	
	D713	or	DZ2J062/M/-X	Z DIODE	1	
	D714		RKZ6.2B2KG-X	Z DIODE	1	
	D714	or	DZ2J062/M/-X	Z DIODE	1	
	D782		BAW56-TP-X	SI DIODE	1	
	D782	or	MC2836-X	DIODE	1	
	D783		RKS801KF-X	SI DIODE	1	
	D783	or	DA2J101-X	SI DIODE	1	
	D785		BAW56-TP-X	SI DIODE	1	
	D785	or	MC2836-X	DIODE	1	
	D786		RKS801KF-X	SI DIODE	1	
	D786	or	DA2J101-X	SI DIODE	1	
	D851		MBRX130-TP-X	SB DIODE	1	D
	D852		MBRX130-TP-X	SB DIODE	1	D
△	D901		1N5401-BPC04	SI DIODE	1	
	D931		RB051L-40-X	SB DIODE	1	
	D941		RB051L-40-X	SB DIODE	1	
	D970		RKZ6.8B2KG-X	Z DIODE	1	
	D970	or	DZ2J068/M/-X	Z DIODE	1	
	D971		RKZ6.8B2KG-X	Z DIODE	1	
	D971	or	DZ2J068/M/-X	Z DIODE	1	
	D981		MBRX130-TP-X	SB DIODE	1	
	D982		MBRX130-TP-X	SB DIODE	1	
	C1		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1
	C2		NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1
	C3		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1
	C4		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1
	C5		NDC31HJ-150X	C CAPACITOR	15pF 50V J	1
	C6		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1
	C7		NDC31HJ-471X	C CAPACITOR	470pF 50V J	1
	C8		NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1
	C9		NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1
	C10		NCB31AK-105X	C CAPACITOR	1uF 10V K	1
	C11		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C12		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C13		NCB31AK-105X	C CAPACITOR	1uF 10V K	1
	C14		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1
	C15		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1
	C16		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C17		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1
	C18		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C19		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1
	C22		NDC31HJ-120X	C CAPACITOR	12pF 50V J	1
	C23		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1
	C24		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C25		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
	C26		QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1
	C92		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1
	C93		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1
	C94		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1
	C95		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1
	C96		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1
	C97		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1
	C98		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1
	C99		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1
	C100		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1
	C101		NDC31HJ-220X	C CAPACITOR	22pF 50V J	1
	C102		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1
	C103		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1
	C104		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1
	C161		QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1
	C162		QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1
	C163		NCB31AK-105X	C CAPACITOR	1uF 10V K	1
	C165		NCB31AK-105X	C CAPACITOR	1uF 10V K	1
	C166		NCB31AK-105X	C CAPACITOR	1uF 10V K	1
	C167		NDC31HJ-681X	C CAPACITOR	680pF 50V J	1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C168	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	E
	C169	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	
	C171	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	
	C172	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C175	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C176	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C177	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C178	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C179	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	
	C180	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C181	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C182	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C183	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C191	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C192	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C303	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C304	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C305	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C306	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	
	C307	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C310	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C313	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C314	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C317	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	
	C318	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C319	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C320	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C326	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C327	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C335	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C336	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C337	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C338	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C365	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C366	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C385	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C386	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C477	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C478	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C501	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C503	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	
	C505	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C507	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C509	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C511	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C512	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C513	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C515	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C516	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C517	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C519	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C520	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C538	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C541	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C543	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C544	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C545	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C546	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C547	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	
	C548	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C549	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	
	C550	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C552	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C553	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C554	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C555	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	
	C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C557	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C558	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C559	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C560	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C561	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C562	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C563	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C565	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C566	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	1	
	C568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C569	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C571	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C574	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C575	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C576	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C577	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C578	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C579	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C583	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	
	C584	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	
	C585	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	
	C586	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	
	C591	QEKJ1AM-107Z-S	E CAPACITOR	100uF 10V M	1	
	C592	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C701	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C702	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C709	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C711	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C713	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C714	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C716	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C717	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C721	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C722	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C723	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C724	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C725	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C727	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C784	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C785	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C801	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	E
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C901	QEZ0936-278	E CAPACITOR	2700uF	1	
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C906	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C908	QERF1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C909	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C916	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C917	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1	
	C918	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C920	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C921	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C922	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C925	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C933	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C934	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C935	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C937	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C938	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C939	QEZ0850-157Z	E CAPACITOR	150uF	1	
	C941	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C942	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C943	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C944	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C945	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C947	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C948	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C949	QEZ0850-157Z	E CAPACITOR	150uF	1	
	C952	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C953	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C955	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C961	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C962	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C963	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C964	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C965	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C966	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C967	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C968	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C982	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C992	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C993	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R11	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R14	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R15	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R90	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R92	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R93	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R94	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R95	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	
	R96	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R97	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R98	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R99	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	
	R100	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R101	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R104	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R110	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R162	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E
	R165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R166	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R167	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R168	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	D
	R175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R176	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R189	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R195	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R305	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R309	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	A,B,C,E
	R309	NRSA02J-751X	MG RESISTOR	750Ω 1/10W J	1	D
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,E
	R310	NRSA63J-364X	MG RESISTOR	360kΩ 1/16W J	1	D
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R313	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R314	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R321	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,E
	R321	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	D
	R322	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R323	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R324	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R325	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D
	R326	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D
	R327	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D
	R328	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D
	R331	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,E
	R331	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	D
	R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R333	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R334	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E
	R335	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D
	R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E
	R336	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D
	R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E
	R337	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D
	R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E
	R338	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D
	R341	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,E
	R341	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	D
	R342	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R343	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R344	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R351	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,E
	R351	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	D
	R352	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R353	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R354	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R391	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R392	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R393	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R394	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R471	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R472	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R473	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R474	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R502	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R503	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R507	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R511	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R517	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R518	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R520	NRS124J-100X	MG RESISTOR	10Ω 1/2W J	1	
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R522	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	
	R523	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R524	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	
	R540	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R541	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R542	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	
	R544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R546	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R547	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R549	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R552	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R553	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R554	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R558	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R559	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R560	NQR0360-004X	FERRITE BEADS		1	
	R561	NQR0360-004X	FERRITE BEADS		1	
	R562	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R563	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R564	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R565	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R566	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R568	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R571	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R572	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R573	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R574	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R575	NQR0022-005X	FERRITE BEADS		1	
	R576	NQR0022-005X	FERRITE BEADS		1	
	R577	NQR0022-005X	FERRITE BEADS		1	
	R583	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R584	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R585	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R586	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R593	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R594	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R702	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	
	R703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R705	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R707	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R709	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	R710	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	R711	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R714	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R715	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R719	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R722	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R723	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R725	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R726	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R727	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R730	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R731	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R735	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R736	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R737	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R738	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R739	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R740	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R743	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R744	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R746	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R749	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R750	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D
	R751	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	E
	R754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R757	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R759	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	E
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R761	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R762	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E
	R764	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E
	R765	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	E
	R766	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R767	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R774	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R782	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R785	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R786	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R790	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R791	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R801	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	E
	R803	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E
	R804	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	E
	R805	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	E
	R806	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	E
	R807	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	E
	R808	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	E
	R809	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E
	R810	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	E
	R811	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	E
	R812	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	E
	R814	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	D
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R882	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R902	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R904	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	
	R905	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R906	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	
	R907	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R908	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R909	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R925	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	
	R926	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	
	R931	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R932	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	1	
	R933	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R934	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R935	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R936	NRSA63D-224X	MG RESISTOR	220kΩ 1/16W D	1	
	R938	NRS181J-271X	MG RESISTOR	270Ω 1/8W J	1	
	R941	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R942	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	1	
	R943	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R944	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R945	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R946	NRSA63D-224X	MG RESISTOR	220kΩ 1/16W D	1	
	R948	NRS181J-271X	MG RESISTOR	270Ω 1/8W J	1	
	R965	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R981	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R987	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R989	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R991	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C
	R991	NQR0360-004X	FERRITE BEADS		1	D,E
	R992	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R998	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R999	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L3	QQL232K-R27Z	COIL	0.27uH K	1	
	L4	QQR1872-001	RF COIL		1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	QQL244J-561Z	COIL	560uH J	1	
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	
	L9	NQL093K-R47X	P COIL	0.47uH K	1	
	L10	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
	L10	NQR0269-026X	FERRITE BEADS	10.500mA	1	E
	L11	NQL093K-R47X	P COIL	0.47uH K	1	
	L12	NQL093K-1R8X	P COIL	1.8uH K	1	
	L181	NQL79GM-4R7X	COIL	4.7uH M	1	D
	L182	NQL553J-27NX	COIL	27nH J	1	
	L191	NQL79GM-4R7X	COIL	4.7uH M	1	
	L521	NQL093K-1R8X	P COIL	1.8uH K	1	
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	
	L702	NQL79GM-4R7X	COIL	4.7uH M	1	
	L901	QQR1883-001	CHOKE COIL		1	
	L902	NQL79GM-101X	COIL	100uH M	1	
	L931	QQL92AK-220Z	COIL	22uH K	1	
	L932	NQLH25M-4R7X	COIL	4.7uH M	1	
	L941	QQL92AK-220Z	COIL	22uH K	1	
	L942	NQLH25M-4R7X	COIL	4.7uH M	1	
	CN90	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	
	CN472	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	
	CN502	QGF1049F1-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QGB1004K1-24	CONNECTOR	B-B (1-24)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0190-001	ANT TERMINAL		1	
	J1 or	QNB0348-001	ANT TERMINAL		1	
	J321	QNN0815-001	PIN JACK		1	
	J801	QNZ0095-001	CONNECTOR		1	E
	K581	NQR0022-005X	FERRITE BEADS		1	
	K706	NQR0022-005X	FERRITE BEADS		1	
	K707	NQR0022-005X	FERRITE BEADS		1	
	K708	NQR0022-005X	FERRITE BEADS		1	
	LF472	NQR0682-001X	CHOKE COIL		1	
	PP1	QZW0010-001	STYLE PIN		1	
	PP2	QZW0010-001	STYLE PIN		1	
	PP3	QZW0010-001	STYLE PIN		1	
	X11	QAX0952-001Z	CRYSTAL		1	
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	
	X701	NAX0647-001X	C RESONATOR	20.000MHz	1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	
PANEL UNIT <02>						
	IC601	PCA9624PW-X	IC		1	
	IC661	PTC6526LQ-L	IC		1	
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	
	Q627	LSCR523UB-X	TRANSISTOR		1	
	Q627 or	DSC5001/RS/-X	TRANSISTOR		1	
	D609	NSSM065T-X	LED		1	
	D610	NSSM065T-X	LED		1	
	D621	NSSM065T-X	LED		1	
	D622	NSSM065T-X	LED		1	
	D623	NSSM065T-X	LED		1	
	D625	NSSM065T-X	LED		1	
	D626	NSSM065T-X	LED		1	
	D627	DZ2J056/M/-X	Z DIODE		1	
	D633	SML-D12V8W-X	LED		1	
	D634	SML-D12V8W-X	LED		1	
	D661	RKS801KF-X	SI DIODE		1	
	D682	DZ2J033/M/-X	Z DIODE		1	
	D691	DZ2J051/M/-X	Z DIODE		1	
	D692	DZ2J051/M/-X	Z DIODE		1	
	C604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C622	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C623	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C625	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C662	NDC31HJ-121X	C CAPACITOR	120pF 50V J	1	
	C663	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C665	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C666	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C678	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C682	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C684	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C689	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C692	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C693	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	
	C695	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C696	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R606	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R608	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R609	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R610	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R613	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R614	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R615	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R616	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R617	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R622	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R628	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R629	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R630	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R631	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R632	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R633	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R634	NRS181J-182X	MG RESISTOR	1.8kΩ 1/8W J	1	
	R635	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R636	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R637	NRSA02J-152X	MG RESISTOR	1.5kΩ 1/10W J	1	
	R638	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R639	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R640	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R641	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R642	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R643	NRS181J-182X	MG RESISTOR	1.8kΩ 1/8W J	1	
	R644	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R645	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R647	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1	
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R664	NRSA63J-164X	MG RESISTOR	160kΩ 1/16W J	1	
	R665	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R668	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R678	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R682	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R683	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R684	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	L601	NQL79GM-4R7X	COIL	4.7uH M	1	
	L602	NQR0007-002X	FERRITE BEADS		1	
	L604	NQR0022-005X	FERRITE BEADS		1	
	L610	NQR0007-002X	FERRITE BEADS		1	
	L612	NQR0007-002X	FERRITE BEADS		1	
	B607	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	CN601	QGB1004J2-24X	CONNECTOR	B-B (1-24)	1	
	CN603	QNZ1076-001	USB CONNECTOR		1	
	CN603 or	QNZ1057-001	USB CONNECTOR		1	
	EN601	QSW1231-002	ROTARY ENCODER		1	
	LF691	NQR0682-001X	CHOKE COIL		1	
	PJ601	QNS0298-001	3.5 JACK		1	
	S601	NSW0246-001X	TACT SWITCH		1	
	S602	NSW0246-001X	TACT SWITCH		1	
	S603	NSW0246-001X	TACT SWITCH		1	
	S604	NSW0246-001X	TACT SWITCH		1	
	S605	NSW0246-001X	TACT SWITCH		1	
	S606	NSW0246-001X	TACT SWITCH		1	
	S607	NSW0246-001X	TACT SWITCH		1	
	S608	NSW0246-001X	TACT SWITCH		1	
	S609	NSW0246-001X	TACT SWITCH		1	
	S610	NSW0246-001X	TACT SWITCH		1	
	S611	NSW0246-001X	TACT SWITCH		1	
	S612	NSW0246-001X	TACT SWITCH		1	
	S613	NSW0246-001X	TACT SWITCH		1	
	S614	NSW0246-001X	TACT SWITCH		1	
	S615	NSW0246-001X	TACT SWITCH		1	
	S616	NSW0246-001X	TACT SWITCH		1	
	S617	NSW0246-001X	TACT SWITCH		1	
	S691	NSW0246-001X	TACT SWITCH		1	
USB UNIT <03>						
△	IC401	TCC8600	IC		1	
	IC402	R1EX24512ASAS-X	IC		1	
	IC402 or	M24512-WMN6-X	IC		1	
△	IC441	JVM546K	PROGRAMMED IC		1	
△	IC442	A3V28S40FTP-G6	IC		1	
	IC471	74LVC1G3157GW-X	IC		1	
	IC481	MFI341S2162-X	IC		1	
	IC491	NJM2878F4-18-X	IC		1	
	IC601	PCM1780-X	IC		1	
	Q401	LTC044EUB-X	DIGI TRANSISTOR		1	
	Q401 or	DRC5144E-X	DIGI TRANSISTOR		1	
	D601	RKZ5.1B2KG-X	SB DIODE		1	
	D601 or	DZ2J051M/-X	Z DIODE		1	
	C401	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C402	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C403	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C404	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C405	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C406	NDC31HJ-471W	C CAPACITOR	470pF 50V J	1	
	C407	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C408	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C409	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C410	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C414	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C415	NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	
	C416	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	
	C417	NDC31HJ-331W	C CAPACITOR	330pF 50V J	1	
	C418	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	
	C419	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C420	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C421	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C422	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C423	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C424	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C425	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C426	NDC31HJ-200W	C CAPACITOR	20pF 50V J	1	
	C430	NQR0450-001X	EMI FILTER	0.022uF 50V M	1	
	C441	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C442	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C443	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C444	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C445	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C446	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C447	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C448	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C449	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C450	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C451	NDC31HJ-471W	C CAPACITOR	470pF 50V J	1	
	C452	NDC31HJ-471W	C CAPACITOR	470pF 50V J	1	
	C453	NDC31HJ-471W	C CAPACITOR	470pF 50V J	1	
	C454	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C455	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C471	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C481	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C482	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C491	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	
	C492	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C493	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C494	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C495	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C497	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C601	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	
	C602	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	
	C603	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C604	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	
	C605	NDC31HJ-101W	C CAPACITOR	100pF 50V J	1	
	C606	NDC31HJ-101W	C CAPACITOR	100pF 50V J	1	
	R401	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R402	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R403	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R404	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R405	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R406	NQR0022-005X	FERRITE BEADS		1	
	R407	NQR0286-007X	FERRITE BEADS		1	
	R408	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R409	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R410	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R411	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R412	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R413	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R414	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R415	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R416	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R417	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R418	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R419	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R420	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R421	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R422	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R423	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R425	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R426	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R427	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R428	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R429	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R430	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R431	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R432	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R435	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R436	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R441	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R443	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R444	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R445	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R446	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R451	NQR0286-007X	FERRITE BEADS		1	
	R452	NQR0286-007X	FERRITE BEADS		1	
	R453	NQR0286-007X	FERRITE BEADS		1	
	R454	NQR0286-007X	FERRITE BEADS		1	
	R455	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R456	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R457	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R458	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R462	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R463	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R469	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R481	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R521	NQR0286-007X	FERRITE BEADS		1	
	R601	NQR0286-007X	FERRITE BEADS		1	
	R602	NQR0286-007X	FERRITE BEADS		1	
	R603	NQR0286-007X	FERRITE BEADS		1	
	R604	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R605	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R606	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R607	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R608	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	R609	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	L401	NQL093K-R12X	P COIL	0.12uH K	1	
	L402	NQL093K-R12X	P COIL	0.12uH K	1	
	L403	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L404	NQR0022-005X	FERRITE BEADS		1	
	L405	NQR0022-005X	FERRITE BEADS		1	
	L406	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	L407	NQR0022-005X	FERRITE BEADS		1	
	L491	NQL79GM-4R7X	COIL	4.7uH M	1	
	L601	NQL79GM-470X	COIL	47uH M	1	
	CN441	QGG2011M1-18X	CONNECTOR	(1-18)	1	
	CN442	QGG2011M1-18X	CONNECTOR	(1-18)	1	
	CN444	QGG2504M5-02	CONNECTOR	(1-2)	1	
	K441	NQR0502-001X	FERRITE BEADS		1	
	K442	NQR0286-007X	FERRITE BEADS		1	
	K443	NQR0286-007X	FERRITE BEADS		1	
	K444	NQR0286-007X	FERRITE BEADS		1	
	K445	NQR0286-007X	FERRITE BEADS		1	
	K446	NQR0286-007X	FERRITE BEADS		1	
	K447	NQR0286-007X	FERRITE BEADS		1	
	K448	NQR0286-007X	FERRITE BEADS		1	
	K451	NQR0022-005X	FERRITE BEADS		1	
	K452	NQR0286-007X	FERRITE BEADS		1	
	K453	NQR0286-007X	FERRITE BEADS		1	
	LF409	NQR0682-001X	CHOKE COIL		1	
	LF410	NQR0682-001X	CHOKE COIL		1	
	X401	NAX1168-001X	CRYSTAL		1	
CD PLYAER UNIT (FLM-HC3-1D) <04>						
	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW1 or	NSW0233-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW2 or	NSW0233-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW3 or	NSW0233-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	
	SW4 or	NSW0233-001X	DETECT SWITCH		1	

No additional / supplemental order of WARRANTY CARDS are available.

No additional / supplemental order of WARRANTY CARDS are available.



MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------


PACKING AND ACCESSORIES (EUROPE, US) <M3MM>

DC1	QAM1343-001	DC CORD			1	A,B,C
DC1	QAM1331-001	DC CORD			1	E
RC1	RM-RK52M	REMOCON UNIT			1	A,B,C,E
A1	GET0794-001A	INST BOOK	GER		1	A,B,C
A1	GET0792-001A	INST BOOK	ENG SPA FRE		1	E
A2	GET0794-003A	INST BOOK	ENG FRE		1	A,B
A2	GET0794-005A	INST BOOK	POL RUS GER UKR		1	C
A3	GET0794-002A	INST BOOK	DUT SPA ITA POR		1	A
A3	GET0794-004A	INST BOOK	SWE DAN FIN		1	B
A3	GET0794-006A	INST BOOK	RUM BUL CZE HUN		1	C
A4	GET0794-007A	INSTALL MANUAL	GER		1	A,B,C
A4	GET0792-002A	INSTALL MANUAL	ENG SPA FRE		1	E
A5	GET0794-009A	INSTALL MANUAL	ENG FRE		1	A,B
A5	GET0794-011A	INSTALL MANUAL	POL RUS GER UKR		1	C
A6	GET0794-008A	INSTALL MANUAL	DUT SPA ITA POR		1	A
A6	GET0794-010A	INSTALL MANUAL	SWE DAN FIN		1	B
A6	GET0794-012A	INSTALL MANUAL	RUM BUL CZE HUN		1	C
A7	-----	WARRANTY CARD	BT-54045-1		1	A,B,C
A7	-----	WARRANTY CARD	BT-51018-6		1	E
A8	-----	WARRANTY CARD	BT-52008-1		1	E
A9	BT-51044-1	REGISTRATION CARD	BT-51044-1		1	E
A11	QAN0109-001	MICROPHONE			1	A,B,C,E
A12	QAU0526-002	RF MODULE			1	A,B,C,E
A13	QYSDSP5008ZA	SCREW	M5 x 8mm		8	A,B,C,E
A14	QYSSSP5008ZA	SCREW	M5 x 8mm		4	A,B,C,E
A15	GET0713-001A	CAUTION SHEET			1	A,B,C
A16	LVT2328-001A	RUSSIAN SHEET			1	C
A17	GET0725-001A	BT DONGLE SHEET			1	E
A18	GET0617-001H	USB/BT ADP SHT			1	A,B,C,E
A19	GET0820-001A	BT COUNTRY LIST			1	A,B,C,E
P1	GE34894-001A	INNER CARTON			1	A,B,C
P1	GE34888-001A	INNER CARTON			1	E
P2	GE10280-003A	CUSHION L			1	A,B,C,E
P3	GE10281-001A	CUSHION R			1	A,B,C,E

PACKING AND ACCESSORIES (ASIA)

Block No.M4MM

No additional / supplemental order of WARRANTY CARDS are available.

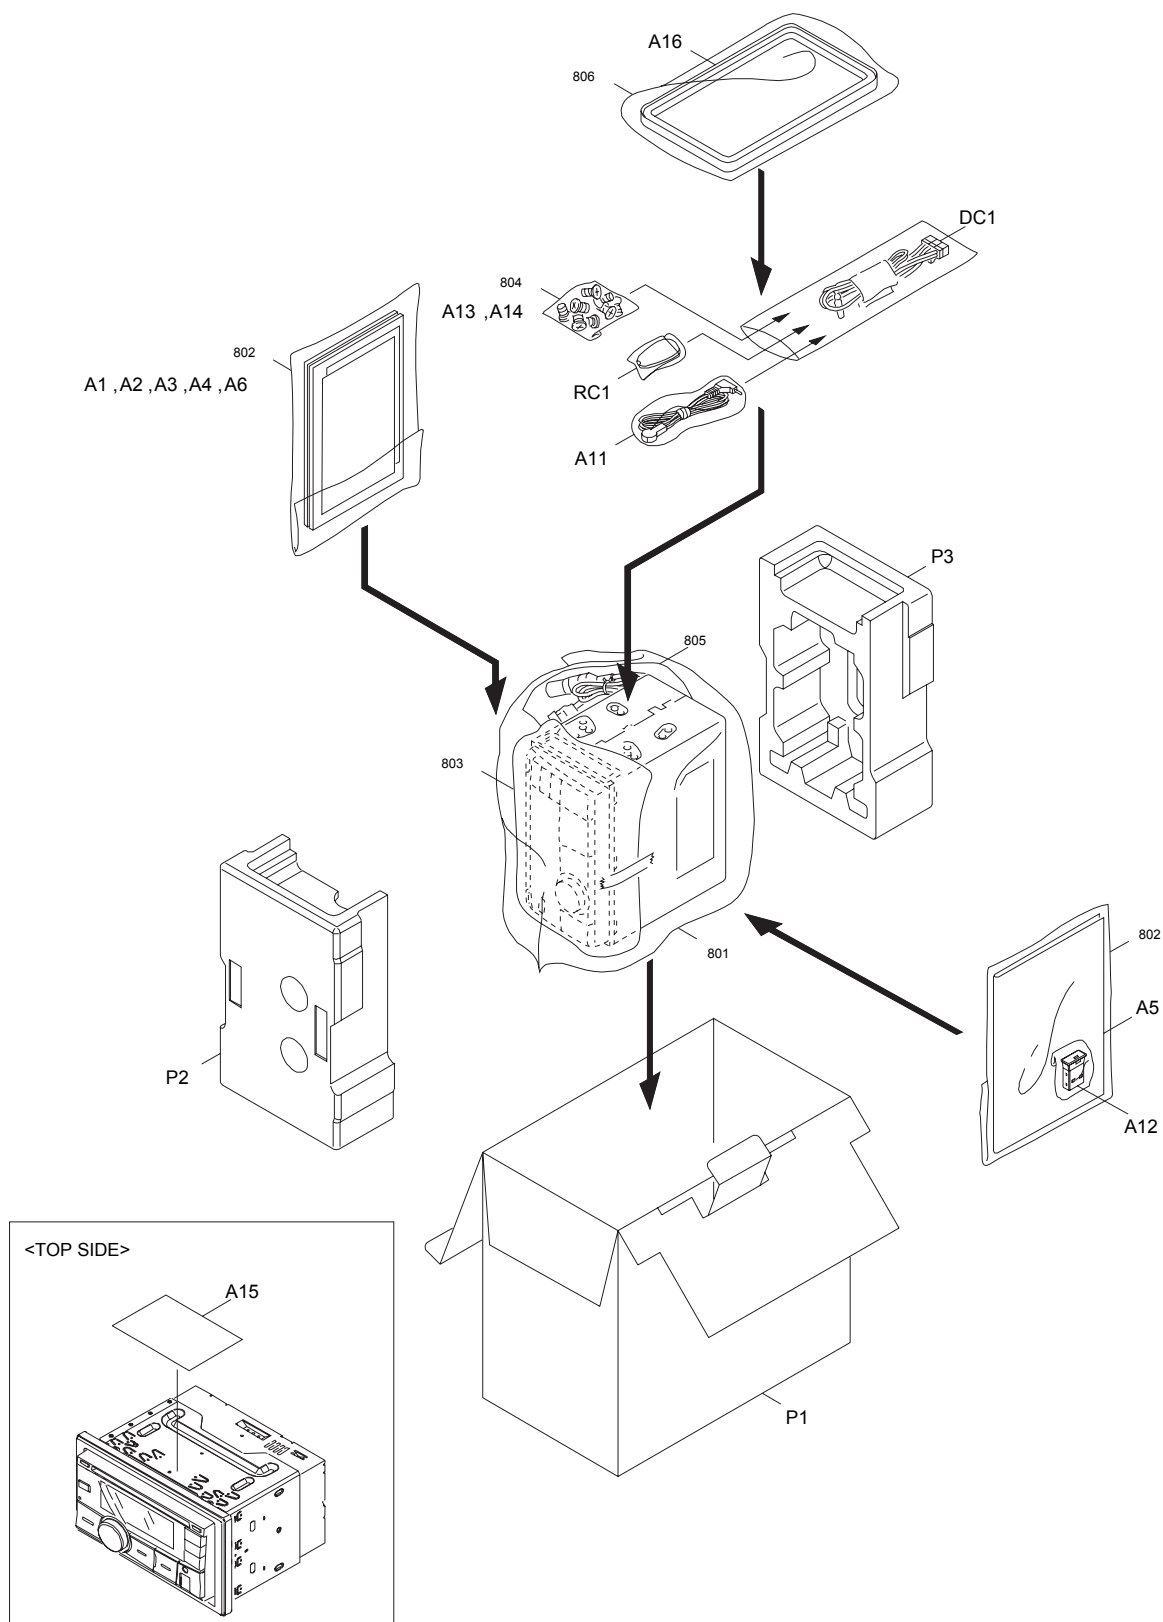

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R600BTE	A	KW-R600BTEN	B	KW-R600BTEY	C	KW-R700BTU	D
KW-R800BTJ	E						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
PACKING AND ACCESSORIES (ASIA) <M4MM>						
DC1		QAM1332-001	DC CORD		1	D
RC1		RM-RK52M	REMOCON UNIT		1	D
A1		GET0793-001A	INST BOOK	ENG CHI(TAIWAN)	1	D
A2		GET0793-002A	INST BOOK	RUS THA ARA PER	1	D
A3		GET0793-004A	INSTALL MANUAL	ENG CHI(TAIWAN)	1	D
A4		GET0793-005A	INSTALL MANUAL	RUS THA ARA PER	1	D
A5		GET0617-001H	USB/BT ADP SHT		1	D
A6		GET0820-001A	BT COUNTRY LIST		1	D
A11		QAN0109-001	MICROPHONE		1	D
A12		QAU0526-002	RF MODULE		1	D
A13		QYSDSP5008ZA	SCREW	M5 x 8mm	8	D
A14		QYSSSP5008ZA	SCREW	M5 x 8mm	8	D
A15		GET0713-001A	CAUTION SHEET		1	D
A16		GE20224-001A	TRIM PLATE		1	D
P1		GE34891-001A	INNER CARTON		1	D
P2		GE10332-001A	CUSHION F		1	D
P3		GE10333-001A	CUSHION R		1	D