


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to ▽ mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
- (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

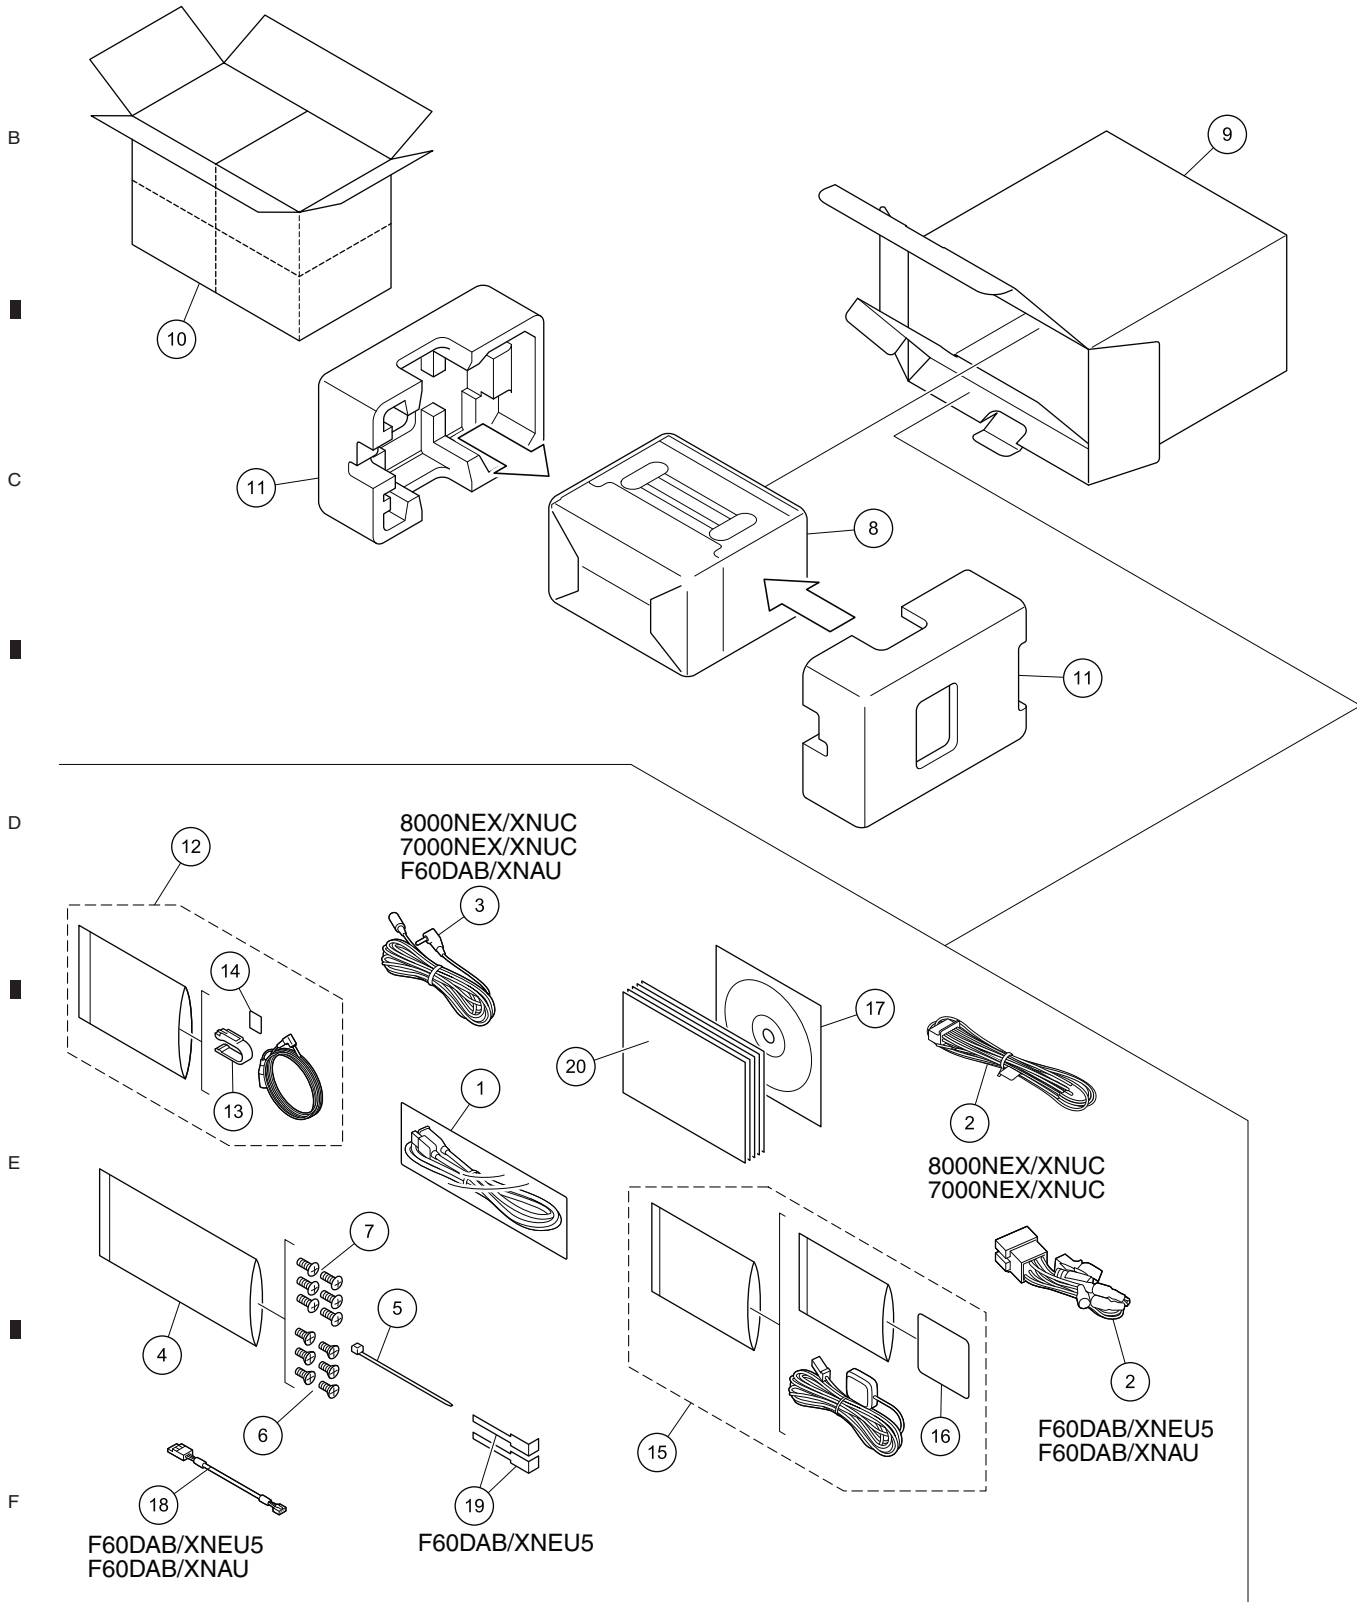

(1) PACKING SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	USB Extended Cable	See Contrast table (2)	15	GPS Antenna Assy	CXE3204
2	Cord Assy	See Contrast table (2)			
3	Cable Assy	See Contrast table (2)	16	Sheet	CZN8510
4	Polyethylene Bag	CEG1160	17	IM CD-ROM	CPJ1483
* 5	Lock Tie	CNW2429	18	MBL CMPX CONN-Cord	See Contrast table (2)
			19	Handle	See Contrast table (2)
6	Screw	CRZ50P090FTC	20-1	Quick Start Guide	See Contrast table (2)
7	Screw	TRZ50P080FTC			
8	Cover	See Contrast table (2)	20-2	Quick Start Guide	See Contrast table (2)
9	Unit Box	See Contrast table (2)	20-3	Quick Start Guide	See Contrast table (2)
10	Contain Box	See Contrast table (2)	20-4	Important Information for Users	See Contrast table (2)
			20-5	Installation Manual	See Contrast table (2)
11	Protector	See Contrast table (2)	* 20-6	Registration Card	See Contrast table (2)
12	Microphone Assy	CPM1083			
13	Holder	CZN7192	* 20-7	Warranty Card	See Contrast table (2)
14	Cushion	CZN7193			

(2) CONTRAST TABLE


AVIC-8000NEX/XNUC, AVIC-7000NEX/XNUC, AVIC-F60DAB/XNEU5 and AVIC-F60DAB/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-8000NEX/ XNUC	AVIC-7000NEX/ XNUC	AVIC-F60DAB/ XNEU5	AVIC-F60DAB/XNAU
	1	USB Extended Cable	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x2)	CDP1587 (x1)
	2	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	3	Cable Assy	CDP1396	CDP1396	Not used	CDP1396
	8	Cover	CEG1359	CEG1359	CEG1356	CEG1356
	9	Unit Box	CHG8530	CHG8528	CHG8532	CHG8531
	10	Contain Box	CHL8530	CHL8528	CHL8532	CHL8531
	11	Protector	CHP4863	CHP4863	CHP4864	CHP4863
	18	MBL CMPX CONN-Cord	Not used	Not used	CDP1669	CDP1669
	19	Handle	Not used	Not used	CND6289	Not used
	20-1	Quick Start Guide	CRB4337	CRB4337	CRD4770	CRB4346
	20-2	Quick Start Guide	CRB4338	CRB4338	CRD4771	Not used
	20-3	Quick Start Guide	Not used	Not used	CRD4772	Not used
	20-4	Important Information for Users	CRD4768	CRD4768	CRD4773	CRB4347
	20-5	Installation Manual	CRD4769	CRD4769	CRD4774	CRB4348
*	20-6	Registration Card	CRY1271	CRY1271	Not used	Not used
*	20-7	Warranty Card	QRY3001	QRY3001	CRY1376	Not used

Quick Start Guide, Important Information for Users, Installation Manual

Part No.	Language
CRD4768	English, French
CRD4769	English, French
CRD4770	English(Great Britain), French
CRD4771	Italian, Spanish(Espanol)
CRD4772	German, Dutch
CRD4773	English(Great Britain), French, Italian, Spanish(Espanol), German, Dutch
CRD4774	English(Great Britain), French, Italian, Spanish(Espanol), German, Dutch
CRB4337	English
CRB4338	French
CRB4346	English(Great Britain)
CRB4347	English(Great Britain)
CRB4348	English(Great Britain)

9.2 EXTERIOR (1)

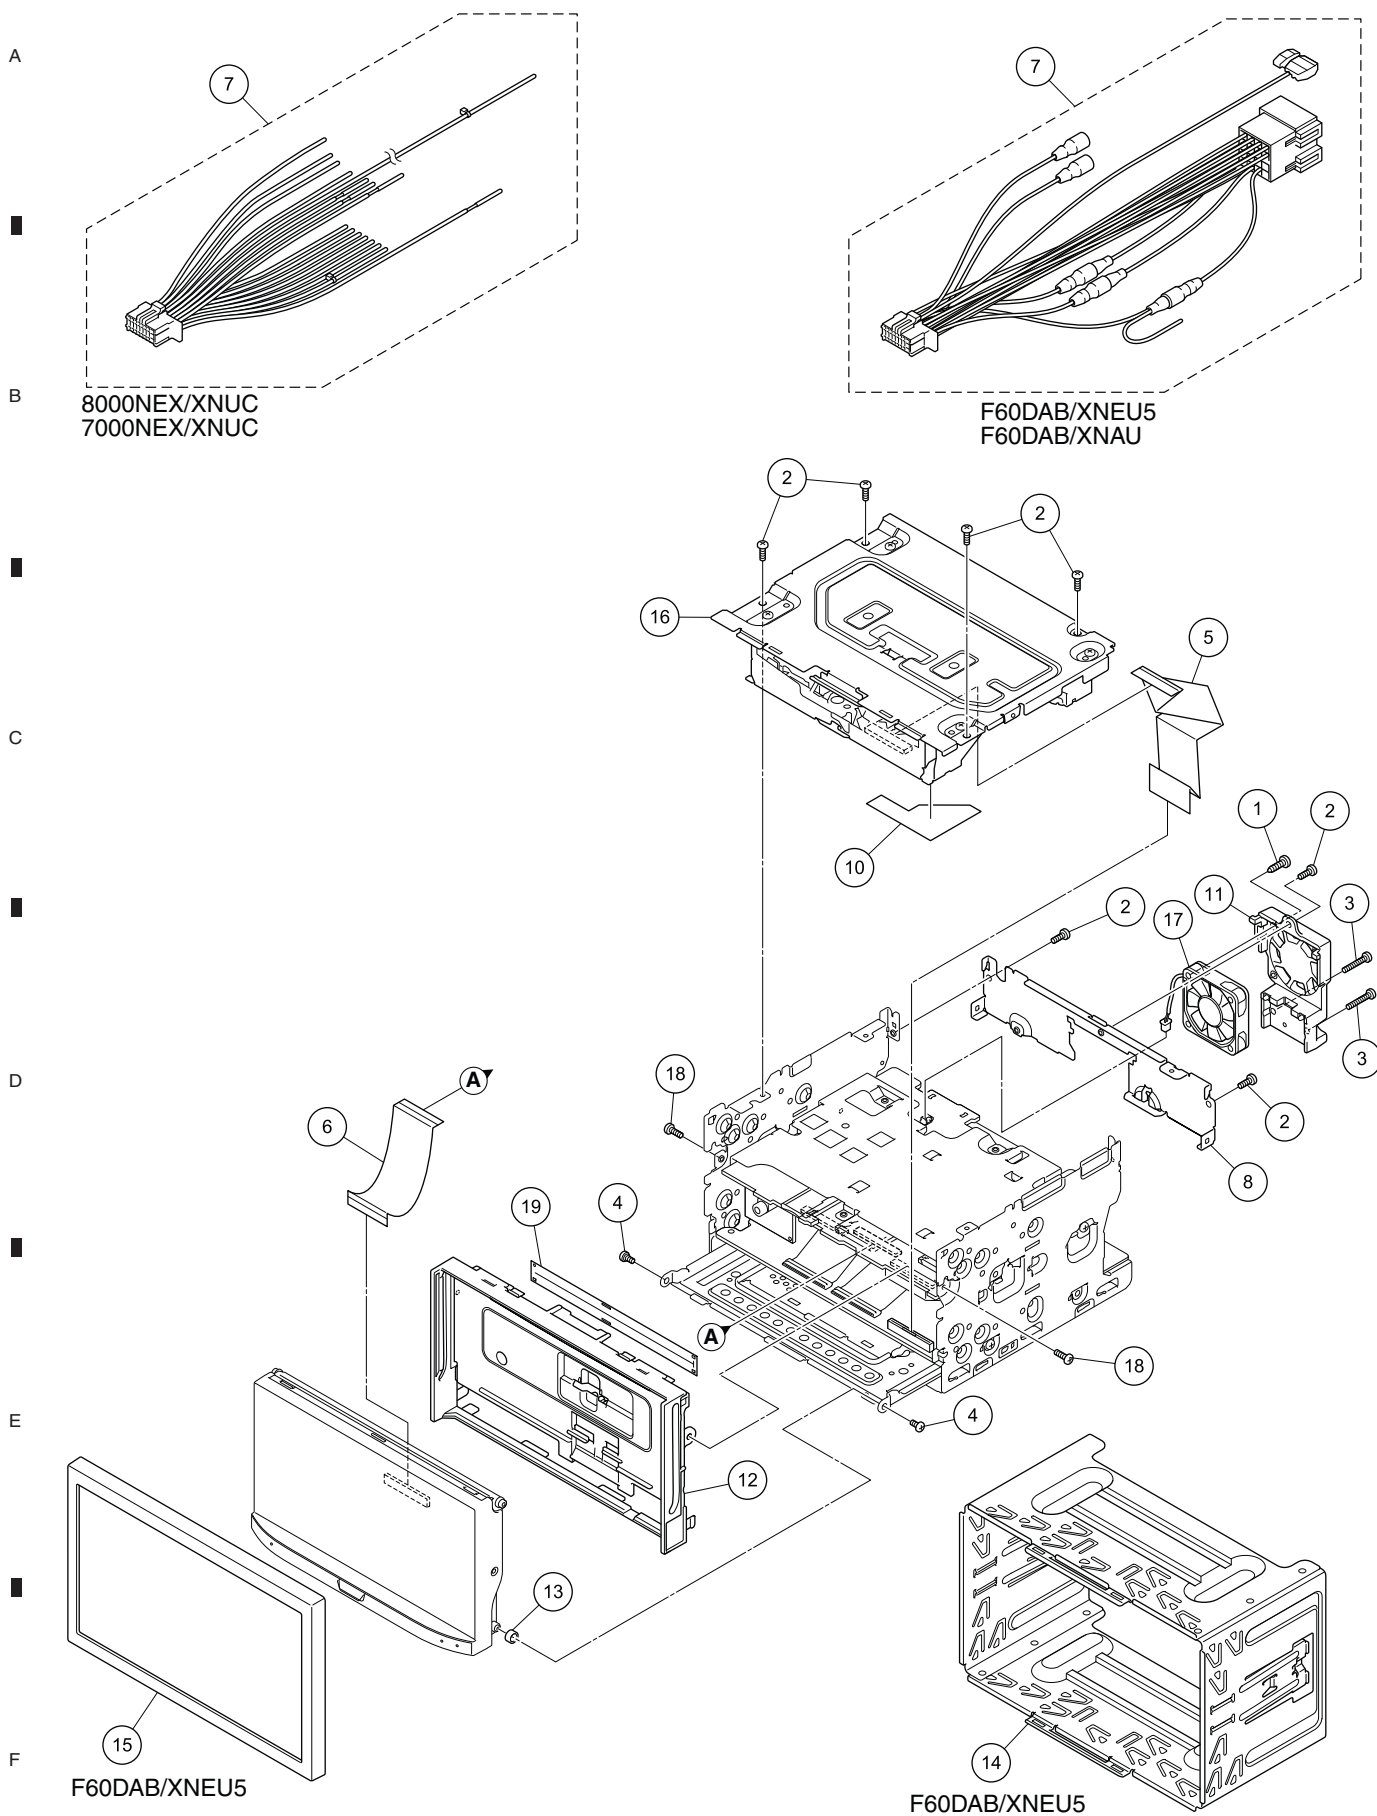

5

6

7

8

(1) EXTERIOR (1) SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BPZ30P080FTC	11	Heat Sink	CNR2165
2	Screw	BSZ26P060FTC	12	Panel	See Contrast table (2)
3	Screw	BSZ26P120FTC	13	Collar	CNW2038
4	Screw	CBA1735	14	Holder	See Contrast table (2)
5	FFC	CDD1033	15	Panel	See Contrast table (2)
6	FFC	CDD1039	16	DVD Mechanism Module(LS2)	CXK8014
7	Cord Assy	See Contrast table (2)	17	Fan Motor	CXM1446
8	Holder	CND6989	18	Screw	ISS26P055FTC
9			19	Cover	QNM3029
10	Insulator	CNN4613			

(2) CONTRAST TABLE

AVIC-8000NEX/XNUC, AVIC-7000NEX/XNUC, AVIC-F60DAB/XNEU5 and AVIC-F60DAB/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-8000NEX/ XNUC	AVIC-7000NEX/ XNUC	AVIC-F60DAB/ XNEU5	AVIC-F60DAB/XNAU
	7	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	12	Panel	CNU2641	CNU2641	CNU2655	CNU2655
	14	Holder	Not used	Not used	CND7102	Not used
	15	Panel	Not used	Not used	CNU2645	Not used

9.3 EXTERIOR (2)

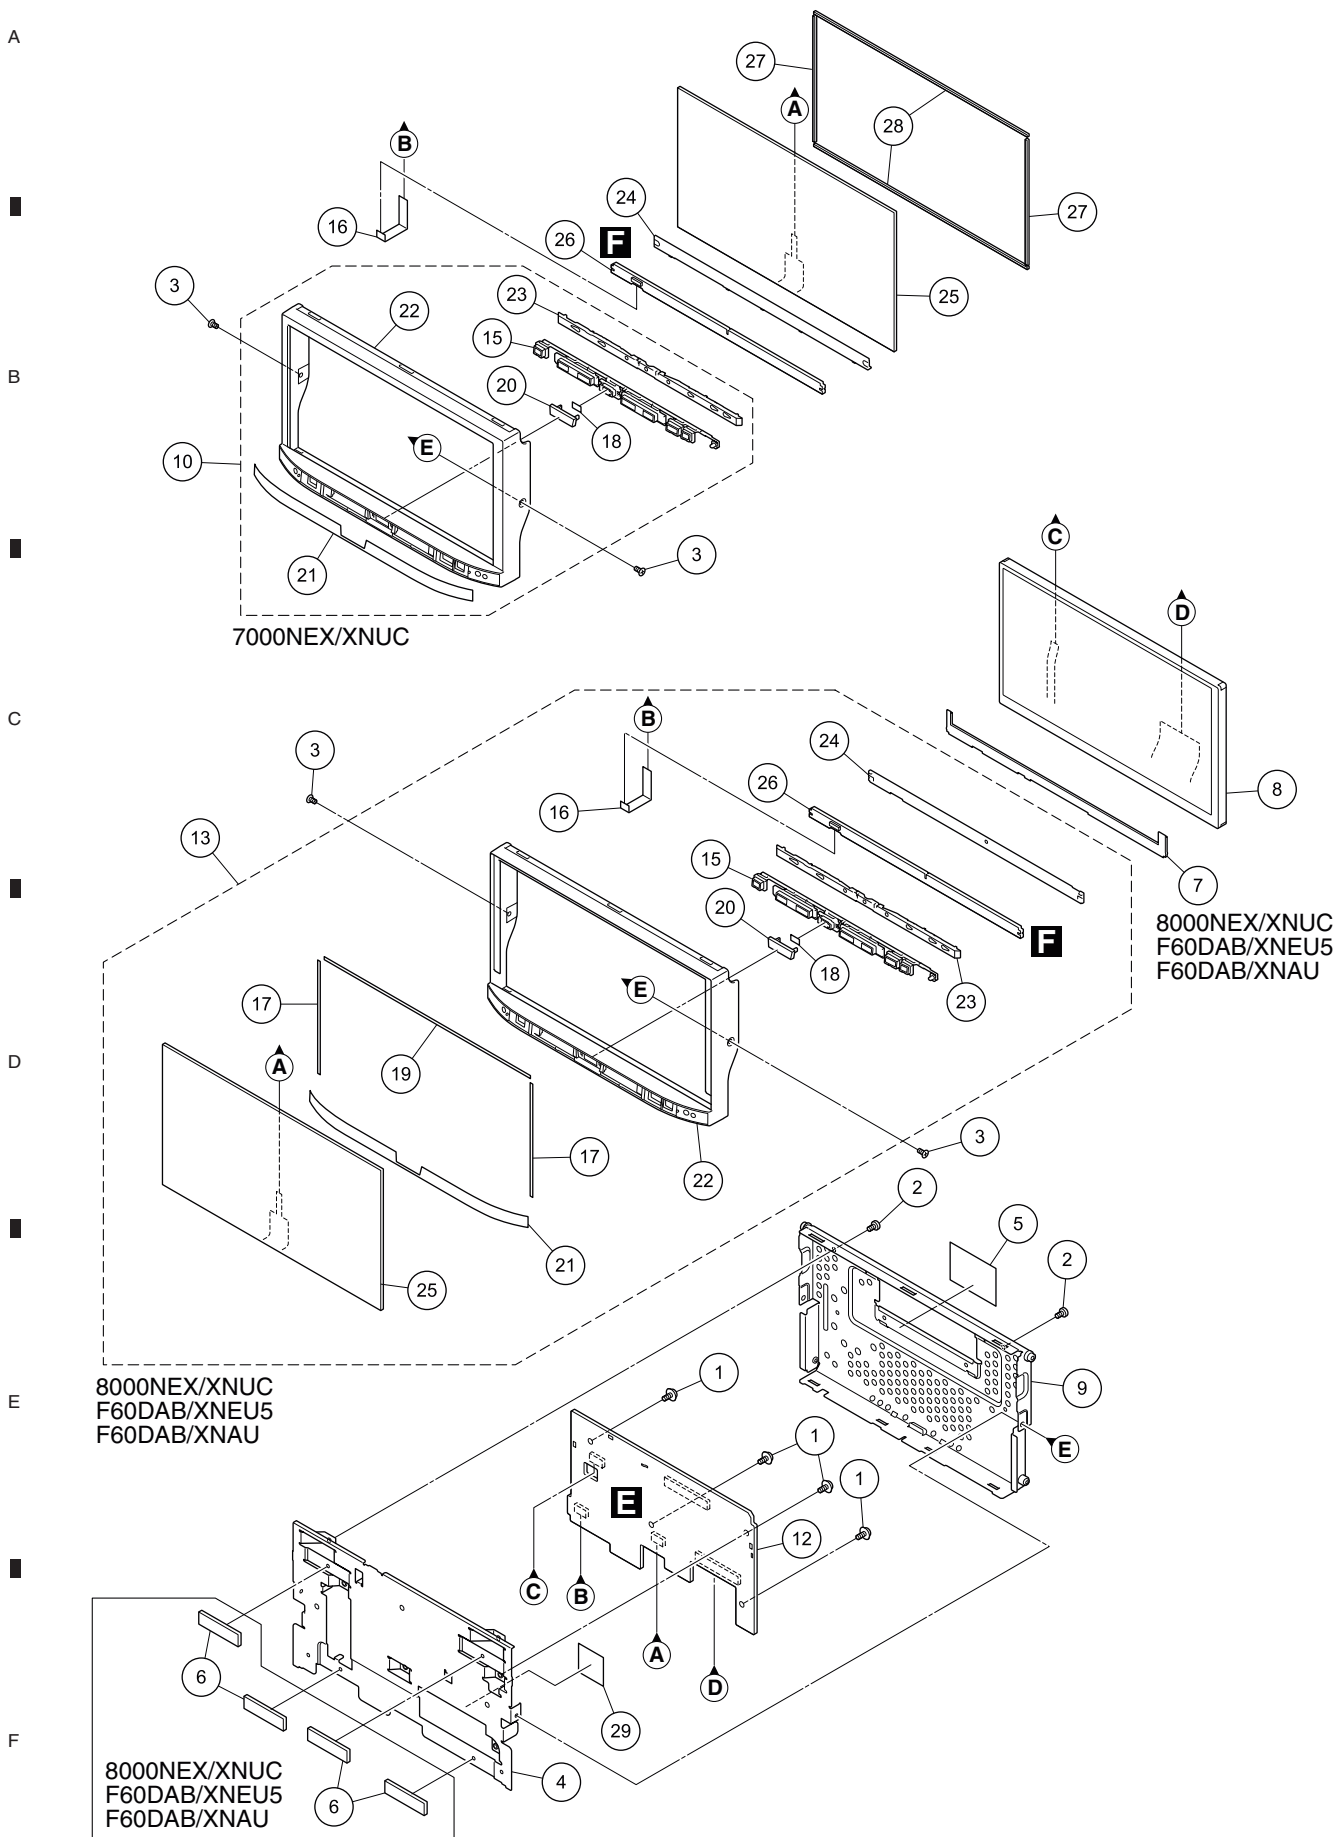


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	ASZ26P050FTC	16	FFC	CDD1038
2	Screw	BSZ26P050FTC	17	Double Side Tape	See Contrast table (2)
3	Screw	CBA2265	18	Double Side Tape	CNN4681
4	Holder	CND7007	19	Double Side Tape	See Contrast table (2)
5	Sheet	CNN4232	20	Cap (HOME)	CNU2650
6	Cushion	See Contrast table (2)	* 21	Plate	See Contrast table (2)
7	Holder	See Contrast table (2)	* 22	Grille	See Contrast table (2)
8	TFT LCD	CWX4182	23	Lighting Conductor	See Contrast table (2)
9	Case Unit	CXE4761	24	Spacer (Holder)	See Contrast table (2)
10	Grille Assy	See Contrast table (2)	25	Touch Panel	See Contrast table (2)
11	*****		26	Key Unit (Service)	CXX6351
12	Monitor Unit	See Contrast table (2)	27	Cushion	See Contrast table (2)
13	Service Grille Unit	See Contrast table (2)	28	Cushion	See Contrast table (2)
14	*****		29	Sheet	CNN4869
15	Button	CAI4322			

(2) CONTRAST TABLE

AVIC-8000NEX/XNUC, AVIC-7000NEX/XNUC, AVIC-F60DAB/XNEU5 and AVIC-F60DAB/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-8000NEX/ XNUC	AVIC-7000NEX/ XNUC	AVIC-F60DAB/ XNEU5	AVIC-F60DAB/XNAU
	6	Cushion	CNN4680	Not used	CNN4680	CNN4680
	7	Holder	CNW2507	Not used	CNW2507	CNW2507
	10	Grille Assy	Not used	CXE6969	Not used	Not used
	12	Monitor Unit	CWN8224	CWN8216	CWN8224	CWN8224
	13	Service Grille Unit	CXX6436	Not used	CXX6437	CXX6437
	17	Double Side Tape	CNN4004	Not used	CNN4004	CNN4004
	19	Double Side Tape	CNN4777	Not used	CNN4777	CNN4777
*	21	Plate	CNU2651	CNU2653	CNU2652	CNU2652
*	22	Grille	CNU2659	CNU2649	CNU2659	CNU2659
	23	Lighting Conductor	CNW3105	CNW3108	CNW3105	CNW3105
	24	Spacer (Holder)	CNW3107	CNW3104	CNW3107	CNW3107
	25	Touch Panel	CSX1219	CSX1194	CSX1213	CSX1213
	27	Cushion	Not used	CNN4272	Not used	Not used
	28	Cushion	Not used	CNN4271	Not used	Not used

9.4 EXTERIOR (3)

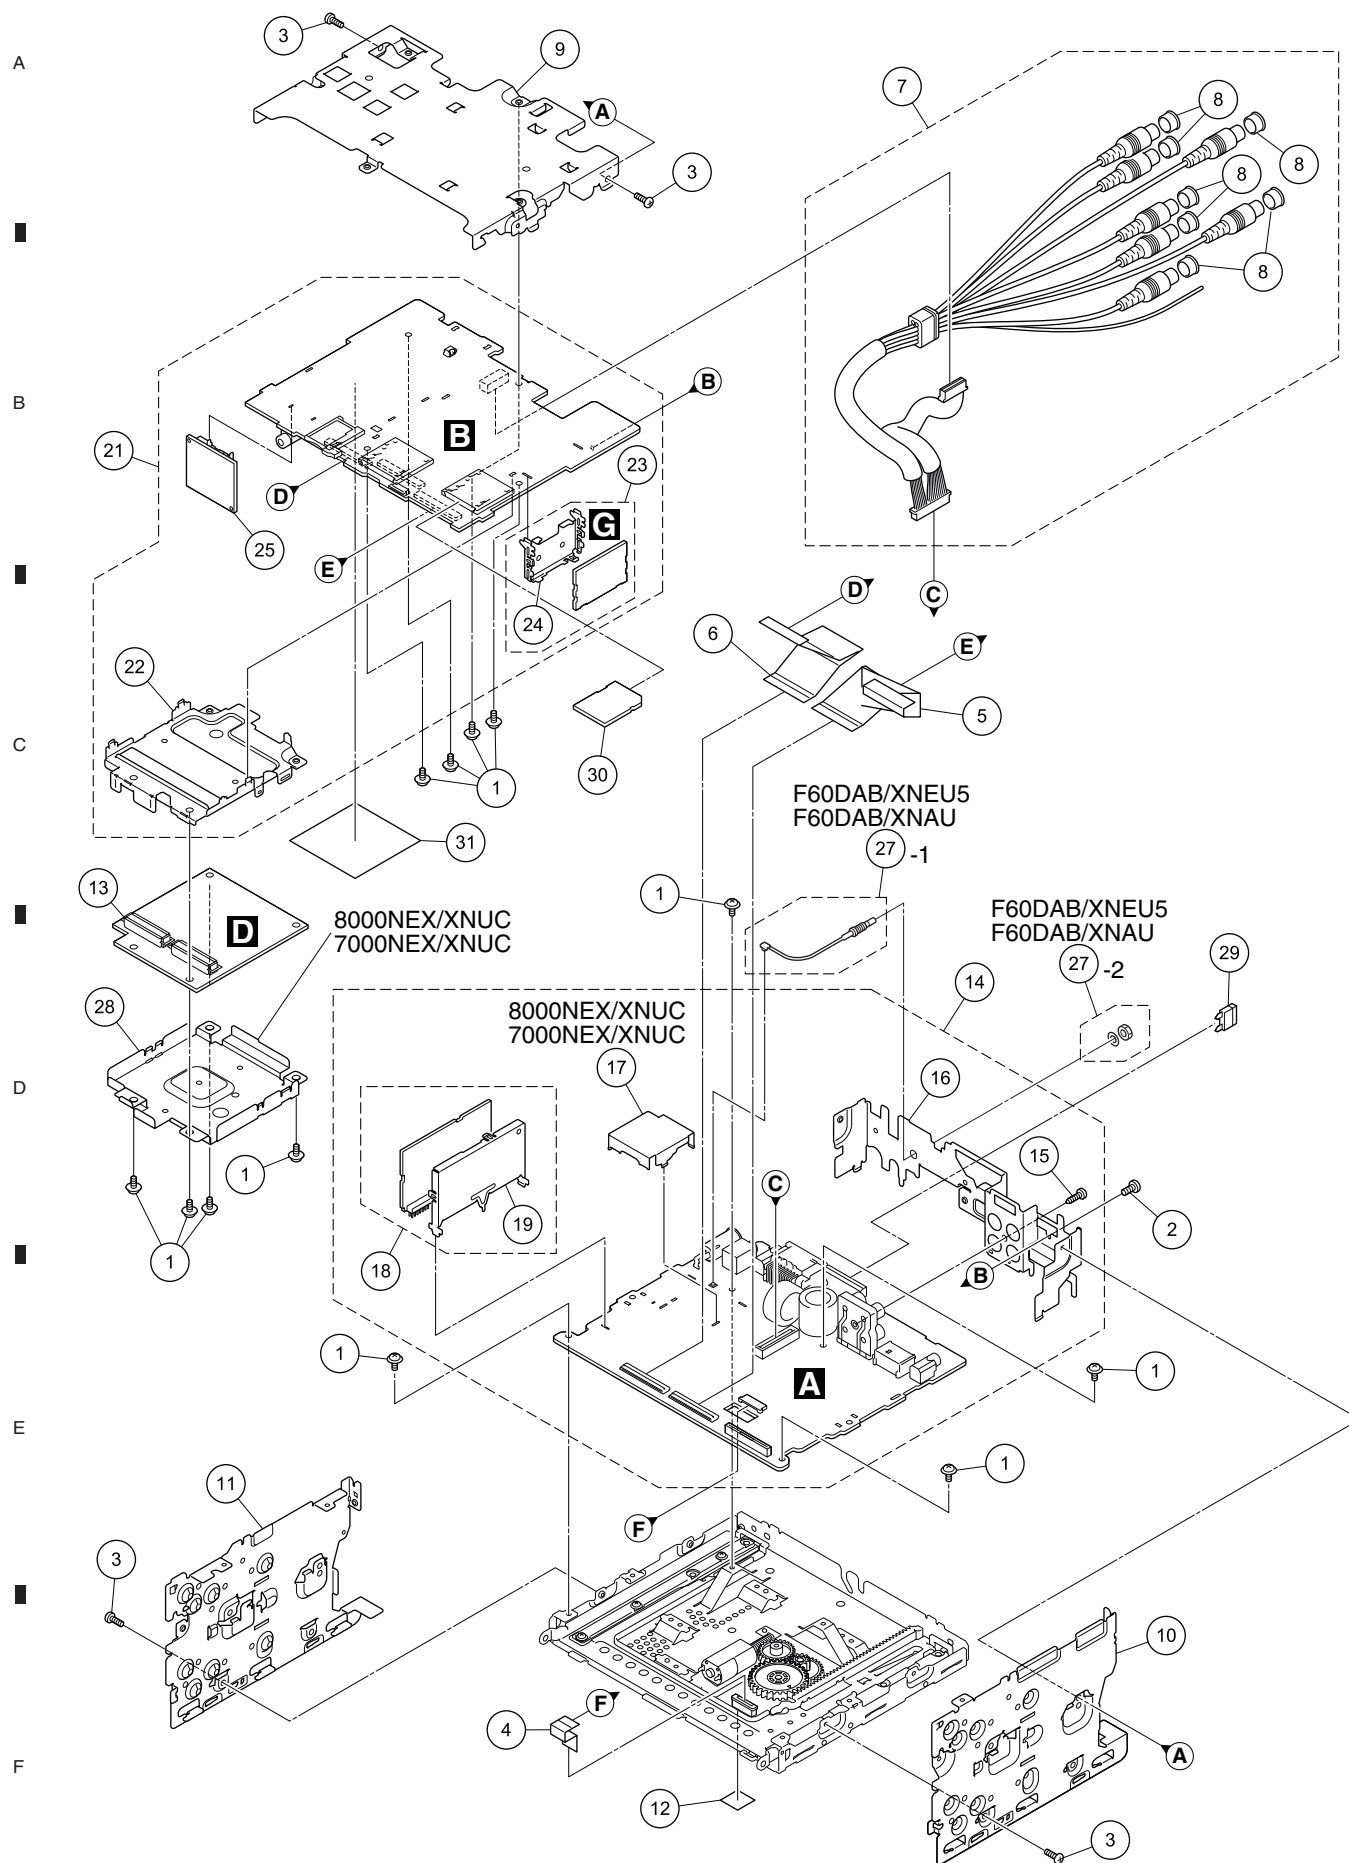


(1) EXTERIOR (3) SECTION PARTS LIST					
Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	ASZ26P050FTC	17	Shield Case	See Contrast table (2)
2	Screw	BMZ30P060FTC	18	Tuner Unit	See Contrast table (2)
3	Screw	BSZ26P060FTC	19	Holder	CND6449
4	FFC	CDD1034	20		
5	FFC	CDD1035			
6	FFC	CDD1036	21	IF Unit (Service)	See Contrast table (2)
7	Cable Assy	CDF1082	22	Holder	CND6987
8	Cap	CNV6727	23	Sensor Unit	CWX4472
9	Holder	CND6984	24	Holder	CND6958
10	Bracket	CND6985	25	BT Module	CWX4529
11	Bracket	CND6986	26		
12	Label	CNN3533	27	Antenna Cable Assy	See Contrast table (2)
13	SOC Dual Core Unit	CWN7890	28	Shield Case	See Contrast table (2)
14	AV Unit	See Contrast table (2)	29	Fuse (10 A)	YEK5001
15	Screw	BPZ26P080FTC	30	Service Strage SD	See Contrast table (2)
16	Holder	See Contrast table (2)	31	Sheet	CNN4830

(2) CONTRAST TABLE

AVIC-8000NEX/XNUC, AVIC-7000NEX/XNUC, AVIC-F60DAB/XNEU5 and AVIC-F60DAB/XNAU are constructed the same except for the following:

Mark	No.	Description	AVIC-8000NEX/ XNUC	AVIC-7000NEX/ XNUC	AVIC-F60DAB/ XNEU5	AVIC-F60DAB/XNAU
	14	AV Unit	CWN8436	CWN8175	CWN8174	CWN8176
	16	Holder	CND6992	CND6992	CND7002	CND7002
	17	Shield Case	CND7003	CND7003	Not used	Not used
	18	Tuner Unit	CWE2502	CWE2502	CWE2363 (WWR Core Tuner Unit)	CWE2363 (WWR Core Tuner Unit)
	21	IF Unit (Service)	CXX6334	CXX6336	CXX6333	CXX6335
	27	Antenna Cable Assy	Not used	Not used	QXA3732	QXA3732
	28	Shield Case	CND6988	CND6988	Not used	Not used
	30	Service Strage SD	CXX6302	CXX6855	CXX6854	CXX6303


9.5 EXTERIOR (4)

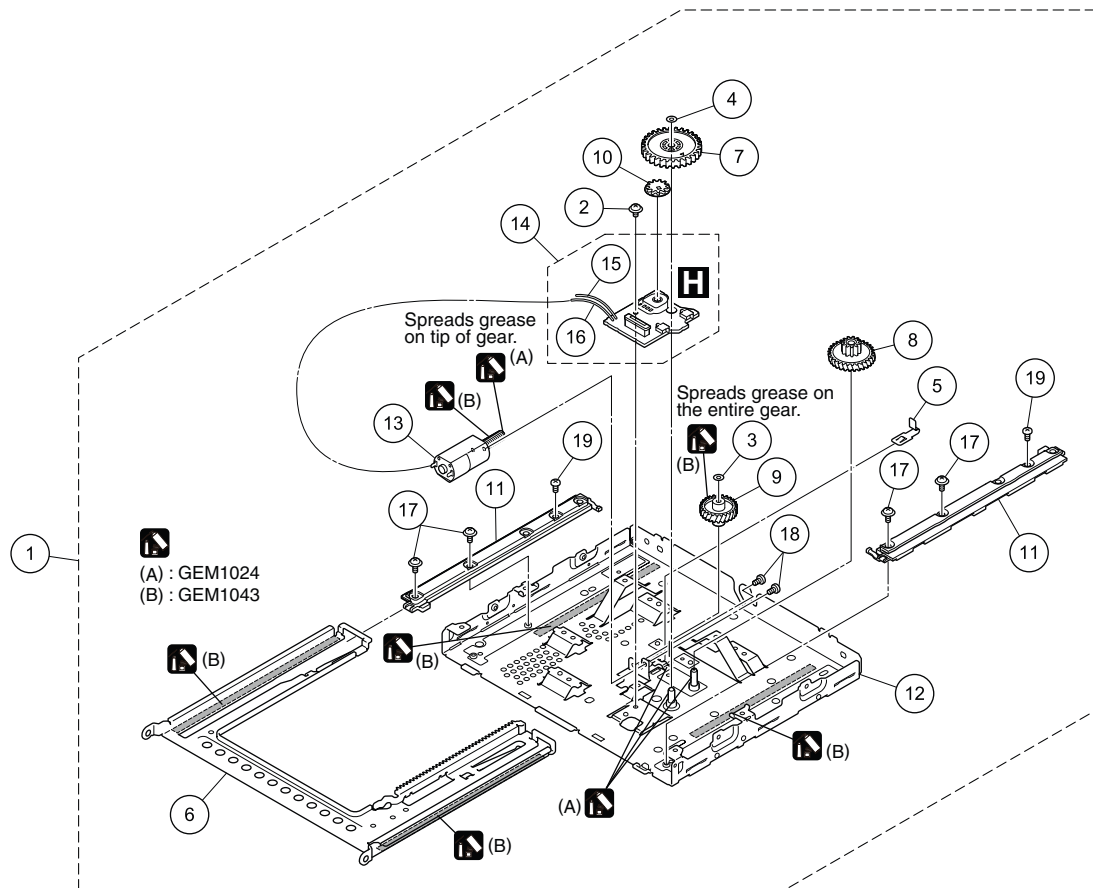

EXTERIOR (4) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Drive Unit	CXE7000	A
2	Screw	AMZ26P030FTC	
3	Washer	CBF1039	
4	Washer	CBF1064	
5	Spring	EBL1034	
6	Frame	ENC2001	B
7	Gear	ENV1630	
8	Gear	ENV1631	
9	Gear	ENV1632	
10	Gear	ENV1635	
11	Guide	ENV3001	C
* 12	Chassis Unit	EXA4027	
13	Motor Unit	EXA4003	
14	PCB Assy (Service)	EXX2001	
* 15	Cord (Green)	CDC1056	
* 16	Cord (White)	CDC1057	D
17	Screw	IMS26P060FTC	
18	Screw	JFZ20P025FTC	
19	Screw	EBA2002	
			E
			F

9.6 DVD MECHANISM MODULE (1)

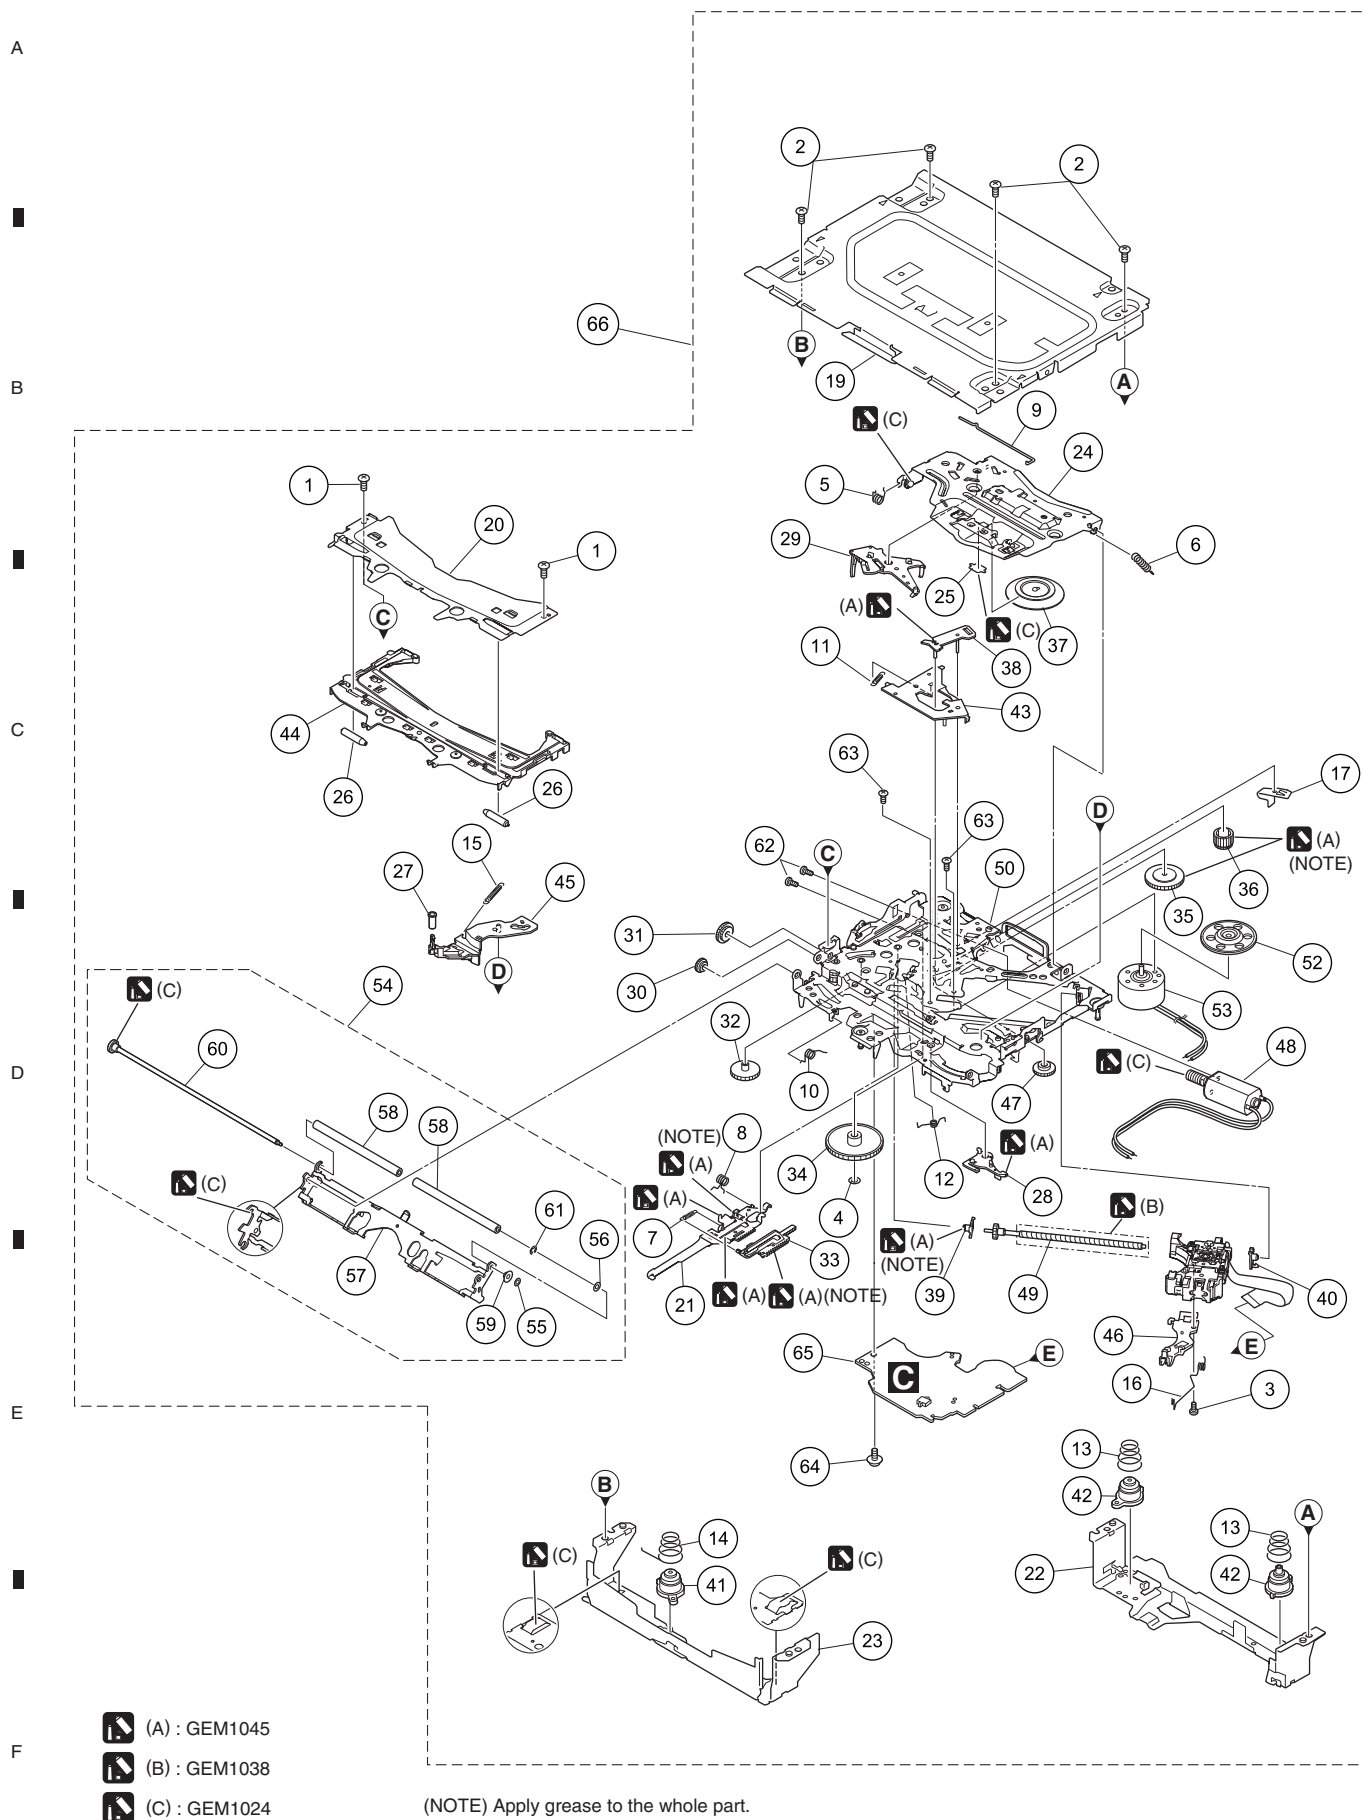

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Screw	BSZ20P040FTC	* 50	Chassis Unit	CXE6044	
2	Screw	BSZ26P060FTC				
3	Screw (M2 x 4)	CBA1835	51	*****		A
4	Washer	CBF1038	* 52	Support Wheel	CNW2052	
5	Spring	CBH2855	* 53	Spindle Motor(M2)	EXM2002	
			54	Arm Assy	CXE6232	
6	Spring	CBH2860	55	Washer	CBF1037	
7	Spring	CBH3010				
8	Spring	CBH3011	56	Washer	CBF1038	
9	Spring	CBH3014	57	Arm	CND6242	
10	Spring	CBH3015	58	Roller	CNW2500	
			59	Collar	CNW2444	
11	Spring	CBH3016	60	Gear Unit	CXE6225	B
12	Spring	CBH3017				
13	Spring	CBH3019	61	Washer	YE15FTC	
14	Spring	CBH3086	62	Screw	JFZ20P025FTC	
15	Spring	CBH3095	63	Screw	JGZ17P020FTC	
			64	Screw (M2 x 5)	EBA1028	
16	Spring	CBH3096	65	DVD Core Unit	CWX4496	
17	Plate Spring	CBL1824				
18	*****		66	Mechanism Unit(Service)	CXX6455	
19	Case	CNB3762				
20	Bracket	CND4553				
21	Lever	CND5398				
22	Bracket	CND5710				
23	Bracket	CND6127				
24	Arm	CND6406				
25	Sheet	CNN3678				
26	Roller	CNW1172				
27	Roller	CNW1175				
28	Arm	CNW1177				
29	Arm	CNW1178				
30	Gear	CNW1180				D
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				
36	Gear	CNW1187				
37	Clamper	CNW1190				
38	Arm	CNW1192				E
39	Holder	CNW1193				
40	Holder	CNW1194				
41	Damper	CNW2439				
42	Damper	CNW2440				
43	Arm	CNW1726				
44	Guide	CNW2240				
45	Arm	CNW2241				
46	Rack	CNW2265				
47	Gear	CNW2287				F
48	Motor Unit(M1)(CRG(L/E))	CXC4026				
49	Screw Unit	CXC8894				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J,RS1/○○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

Circuit Symbol and No.

Part No.

A:AVIC-8000NEX/XNUC

B:AVIC-7000NEX/XNUC

C:AVIC-F60DAB/XNEU5

D:AVIC-F60DAB/XNAU

Unit Number: CWN8436(A)

Unit Number: CWN8175(B)

Unit Number: CWN8174(C)

Unit Number: CWN8176(D)

Unit Name : AV Unit

Unit Number: CXX6334(A)

Unit Number: CXX6336(B)

Unit Number: CXX6333(C)

Unit Number: CXX6335(D)

Unit Name : IF Unit(Service)

Unit Number: CWX4496

Unit Name : DVD Core Unit

Unit Number: CWN7890

Unit Name : SOC Dual Core Unit

Unit Number: CWN8224(A,C,D)

Unit Number: CWN8216(B)

Unit Name : Monitor Unit

Unit Number: CXX6351

Unit Name : Key Unit(Service)

Unit Number: CWX4472

Unit Name : Sensor Unit

Unit Number: EXX2001

Circuit Symbol and No.

Part No.

Unit Name : PCB Assy(Service)

A

Unit Number: CWN8436(A)

Unit Number: CWN8175(B)

Unit Number: CWN8174(C)

Unit Number: CWN8176(D)

Unit Name : AV Unit

MISCELLANEOUS

IC 101	(A,55,103) IC	NJM2904V
IC 201	(A,95,135) IC	PA2032A
IC 302	(B,144,57) Regulator IC	MM3411A33N
IC 303	(B,160,47) IC	NJW4132U2-A
IC 304	(B,166,82) Regulator	BA00CC0WFP
IC 305	(B,151,45) Regulator IC	R1514S033B-AE
IC 501	(B,27,50) Regulator IC	MM3479A33P
IC 502	(B,30,57) Regulator IC	S-1172B12-E6
IC 503	(A,25,81) Regulator IC(C,D)	MM3479A33P
IC 504	(B,42,49) Regulator IC	MM3571A33P
IC 505	(B,38,42) Regulator IC	MM3571A33P
IC 601	(A,64,45) ROM IC	CAT93C66VI
IC 602	(A,86,34) IC(A,B)	PEQ315A8
	(A,86,34) IC(C,D)	PEQ316A8
IC 603	(B,114,17) Reset IC	PST8229N
IC 801	(B,71,61) IC	AK4223VQ
IC 901	(B,47,28) IC	AK4223VQ
IC 1002	(B,144,74) Dual OP-AMP	NJM4565V
IC 1003	(B,148,99) Dual OP-AMP	NJM4565V
IC 1005	(B,151,86) IC	TC4052BFT
IC 1101	(B,131,54) IC	AK7734XQ
IC 1201	(A,114,43) IC	WM8761BGED
IC 1202	(A,113,53) IC	WM8761BGED
IC 1203	(A,111,63) IC	WM8761BGED
IC 1301	(B,76,88) IC	PM9012A
IC 1501	(A,41,63) Tuner IC	TEF6688HN
IC 1601	(A,34,44) Tuner IC	TEF6686HN

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
Q 101	(B,64,105) Transistor	LSCR523UB		D 124	(B,101,122) Diode	CRG03	
Q 102	(B,128,77) Chip Transistor	HN1C01FU		D 201	(B,90,113) Diode	DA2J101	
Q 104	(B,63,107) Transistor	LTC014EEB		D 202	(B,72,115) Diode	DAN202UM	
Q 105	(B,48,103) Chip Transistor	HN1C01FU		D 203	(B,68,113) Diode	DAN202UM	A
Q 107	(B,60,105) Transistor	LSAR523UB		D 205	(B,89,110) Diode	DZ2J082M0	
Q 108	(B,54,105) Transistor	LSAR523UB					
Q 109	(A,49,105) Transistor	LTC014EEB		D 206	(B,81,109) Diode	DA2J101	
Q 110	(A,49,114) Transistor	LTC014EEB		D 303	(B,164,91) Diode	CRG03	
Q 111	(B,57,103) Transistor	LTC014EEB		D 305	(A,148,29) Diode	DZ2J062M0	
Q 201	(B,76,110) Transistor	RN4987		D 311	(B,167,43) Diode	RB551VM-30	
Q 202	(B,71,108) Transistor	RN4987		D 314	(B,163,95) Diode	CRG03	
				D 501	(B,33,53) Diode	CRG03	
				D 601	(B,112,18) Diode	DA2J101	
Q 203	(B,73,111) Transistor	LTA024EEB		D 602	(B,90,23) Diode	RB501VM-40	
Q 204	(B,81,112) Chip Transistor	RN1903		D 603	(B,90,30) Diode	DB2J31400	
Q 205	(B,85,110) Transistor	LSCR523UB		D 604	(B,70,22) Diode(A,B)	DB2J31400	B
Q 301	(B,156,38) Transistor	LTC014EEB		D 1401	(B,19,102) Diode	EZAEG2A50AX	
Q 302	(B,159,37) Transistor	LSAR523UB		D 1402	(B,55,82) Diode	DAN217UM	
Q 307	(A,142,28) Transistor	2SD1760F5		D 1404	(B,40,88) Diode	RN779F	
Q 308	(A,148,33) Transistor	LTC014EEB		D 1501	(A,39,81) Diode	EZAEG2A50AX	
Q 312	(A,148,45) Transistor	LSCR523UB		D 1502	(A,33,74) Diode	EZAEG2A50AX	
Q 314	(B,121,37) Chip Transistor	2SB1689		D 1701	(A,22,92) Diode(C,D)	EZAEG2A50AX	
Q 315	(B,120,34) Transistor	LSCR523UB		D 1702	(B,31,77) Diode(C,D)	DZ2J160M0	
Q 602	(A,63,38) Transistor	LSCR523UB		L 101	(A,81,103) Choke Coil 600 uH	CTH1221	
Q 1001	(B,151,81) Chip Transistor	RN1907		L 303	(A,166,39) Choke Coil 22 uH	CTH1561	
Q 1401	(A,46,89) Transistor	2SC3357		L 901	(B,43,40) Inductor	CTF1786	
Q 1402	(B,47,88) Transistor	LSAR523UB		L 902	(B,44,40) Inductor	CTF1786	C
Q 1403	(B,48,85) Transistor	LSCR523UB		L 1101	(A,126,53) Ferrite Bead	CTF1528	
Q 1404	(B,56,89) Transistor	2SC4083		L 1102	(A,140,51) Ferrite Bead	CTF1528	
Q 1405	(B,54,87) Transistor	2SC4083		L 1201	(A,109,48) Inductor	CTF1786	
Q 1501	(A,27,57) Transistor(A,B)	MMBT2369L		L 1202	(A,106,58) Inductor	CTF1786	
Q 1502	(A,27,54) Transistor(A,B)	MMBT2369L		L 1203	(A,110,69) Inductor	CTF1786	
Q 1503	(A,34,57) Transistor(A,B)	MMBT2369L		L 1204	(B,137,50) Chip Beads	VTL1132	
Q 1504	(A,33,54) Transistor(A,B)	MMBT2369L		L 1405	(A,43,92) Inductor	CTF1794	
Q 1701	(B,21,78) Transistor(C,D)	DRC9A14E0		L 1406	(A,38,92) Inductor	LCTAW101J2520	
Q 1702	(B,23,87) Transistor(C,D)	2SB1132		L 1407	(A,43,86) Inductor	LCYB47NJ1608	
Q 1703	(B,30,84) Transistor(C,D)	2SD1664		L 1408	(A,50,90) Inductor	LCYB22NJ1608	
				L 1409	(A,50,77) Coil	CTC1213	D
Q 1801	(B,149,19) Chip Transistor	RN4982					
Q 1802	(B,145,19) Chip Transistor	RN1910		L 1411	(A,59,82) Inductor	CTF1786	
Q 1804	(B,155,17) Transistor	2SB1260		L 1501	(A,49,53) Inductor	CTF1749	
Q 1805	(B,151,15) Transistor	LTC014EEB		L 1503	(A,33,72) Chip Coil	LCTAW3R3J2520	
				L 1504	(B,25,95) Inductor	ATL7033	
Q 1806	(A,149,23) IC	RZQ050P01		L 1505	(A,41,81) Inductor	LCMAR27J1608	
Q 1807	(A,149,19) Transistor	LSCR523UB					
Q 2201	(A,77,80) Chip Transistor	HN1C03FU		L 1506	(A,29,72) Chip Coil	LCTAWR27J2520	
Q 2202	(A,74,84) Chip Transistor	HN1C03FU		L 1601	(A,30,32) Inductor	CTF1749	
Q 2203	(B,168,105) Chip Transistor	HN1C03FU		L 1603	(A,52,44) Inductor	LCMAR27J1608	
				L 1701	(A,21,90) Inductor(C,D)	LCYBR18J1608	
Q 2204	(B,127,92) Chip Transistor	HN1C03FU		L 2201	(A,90,71) Ferrite Bead	CTF1528	
D 103	(B,68,109) Diode	UDZV6R2(B)					E
D 105	(B,126,80) Diode	DZ2J200M0		L 2202	(A,100,71) Ferrite Bead	CTF1528	
D 106	(B,125,75) Diode	UDZV7R5(B)		L 2203	(A,90,72) Ferrite Bead	CTF1528	
D 107	(B,123,78) Diode	DAN202UM		L 2204	(A,101,73) Ferrite Bead	CTF1528	
				L 2205	(A,102,75) Ferrite Bead	CTF1528	
D 109	(B,60,111) Diode	DA2J101		L 2206	(A,90,75) Ferrite Bead	CTF1528	
D 110	(B,75,135) Diode	1SR154-400					
D 111	(B,72,135) Diode	1SR154-400		L 2207	(A,100,75) Ferrite Bead	CTF1528	
D 112	(B,47,107) Diode	DZ2J056M0		L 2208	(A,90,76) Ferrite Bead	CTF1528	
D 113	(B,48,110) Diode	DZ2J180M0		L 2209	(A,100,77) Ferrite Bead	CTF1528	
				L 2210	(A,97,67) Ferrite Bead	CTF1528	
D 116	(B,57,106) Diode	DA2J101		L 2211	(A,107,81) Chip Ferrite Bead	BTX1047	
D 118	(B,52,105) Diode	DA2J101					
D 120	(A,54,111) Diode	DA2J101		X 601	(A,106,30) Resonator 3.932 16 MHz	CSS1772	F
D 122	(A,49,109) Diode	1SR154-400		X 1101	(B,132,64) Resonator 12.288 MHz	CSS1811	
D 123	(B,86,94) Diode	RB080L-30		X 1501	(A,50,59) Crystal Transducer 9.216 MHz	CSS1863	
				X 1601	(A,35,36) Crystal Transducer 9.216 MHz	CSS1863	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	⚠ P301 (A,152,29) Fuse 1.5 A	CEK1282	R 133 (A,54,106)	RS1/16SS513J
	⚠ P302 (B,166,96) Fuse 1.0 A	CEK1338	R 134 (A,61,103)	RS1/16SS104J
A	P 1401 (B,20,102) Surge Absorber	IMSA-6803-01Y900	R 135 (A,62,103)	RS1/16SS513J
	P 1701 (B,68,99) Poly Switch(C,D)	FSMD075-24R	R 136 (A,60,102)	RS1/16SS513J
	P 2201 (A,109,77) Poly Switch	FSMD075-24R	R 137 (A,56,109)	RS1/16SS102J
	P 2202 (B,160,124) Poly Switch	FSMD075-24R	R 138 (A,60,105)	RS1/16SS102J
			R 139 (A,62,106)	RS1/16SS564J
	P 2203 (B,131,98) Poly Switch	FSMD075-24R		
	P 2206 (B,137,97) Poly Switch	FSMD075-24R	R 140 (A,51,112)	RS1/16SS822J
■	⚠ P2207 (A,90,100) Fuse 3.5 A	CEK1343	R 141 (A,53,111)	RS1/16SS202J
	⚠ P2208 (A,103,88) Fuse 5.0 A	CEK1346	R 142 (A,52,113)	RS1/16SS203J
	U 2201 (B,149,27) Remote Receiver Unit(D)	RS-470	R 143 (A,51,111)	RS1/16SS333J
			R 144 (A,45,111)	RS1/10SR0R0J
	BZ601 (A,162,28) Buzzer	CPV1062		
	CN1701 (A,27,102) Connector(C,D)	CKS6508	R 145 (B,46,115)	RS1/4SA102J
B	CN1801 (A,149,7) Connector	VKN1620	R 149 (A,50,118)	RS1/10SR0R0J
	CN1901 (A,125,34) Connector	CKS6095	R 150 (B,50,115)	RS1/10SR0R0J
	CN2001 (A,104,10) Connector	CKS6646	R 201 (B,79,109)	RS1/16SS683J
			R 202 (B,88,113)	RS1/16SS102J
	CN2002 (A,67,10) Connector	CKS6646		
	CN2101 (A,153,115) Connector	CKS4497	R 205 (B,82,119)	RS1/16SS0R0J
	CN2201 (A,95,82) Connector	CKS6600	R 207 (A,82,120)	RS1/16SS0R0J
■	JA 101 (A,61,131) Connector	CKM1613	R 210 (A,105,125)	RS1/16SS0R0J
	JA 1401 (A,12,119) Antenna Jack	YKS5041	R 213 (B,83,108)	RS1/16SS683J
			R 214 (B,80,119)	RS1/16SS152J
	JA2202 (A,171,118) Jack	CKS6437		
	JA2203 (A,127,112) RCA Jack	CKB1112	R 215 (B,81,119)	RS1/16SS101J
	JA2204 (A,27,130) Jack	AKN1073	R 217 (B,86,113)	RS1/16SS473J
C	JA2205 (A,40,129) Jack	CKS6437	R 218 (B,86,112)	RS1/16SS104J
	VL1501 (A,40,73) Variable Coil	CTE1172	R 219 (B,84,112)	RS1/16SS472J
			R 223 (B,101,57)	RS1/10SR0R0J
	VL1601 (A,44,44) Variable Coil	CTE1172		
	Tuner Unit(A,B)	CWE2502	R 224 (B,82,120)	RS1/16SS473J
	WWR C-TUN Unit(C,D)	CWE2363	R 311 (B,159,40)	RS1/16SS222J
			R 312 (B,157,39)	RS1/16SS222J
			R 313 (B,157,34)	RS1/16SS473J
	<u>RESISTORS</u>			
	R 102 (B,124,86)	RS1/10SR224J	R 314 (B,170,86)	RS1/16SS6800D
	R 105 (B,67,106)	RS1/16SS473J	R 315 (B,170,85)	RS1/16SS3901D
	R 106 (B,66,107)	RS1/16SS473J	R 316 (B,170,87)	RS1/16SS2702D
	R 107 (B,65,110)	RS1/16SS432J	R 320 (B,160,86)	RS1/10SR0R0J
D	R 108 (B,65,114) 1 kohm	CCN1326		
			R 323 (A,147,51)	RS1/10SR102J
	R 109 (B,127,76)	RS1/16SS473J	R 324 (A,141,52)	RS1/10SR0R0J
	R 110 (B,128,79)	RS1/16SS103J	R 327 (A,148,28)	RS1/10SR121J
	R 111 (B,126,78)	RS1/16SS103J	R 328 (A,132,42)	RS1/16SS473J
	R 113 (B,128,74)	RS1/16SS473J	R 329 (A,149,32)	RS1/16SS220J
■	R 114 (B,62,111)	RS1/16SS103J		
			R 341 (A,146,47)	RS1/16SS471J
	R 115 (B,62,113)	RS1/16SS472J	R 342 (A,151,43)	RS1/16SS103J
	R 116 (B,60,115)	RS1/4SA102J	R 343 (A,148,43)	RS1/16SS682J
	R 117 (B,50,103)	RS1/16SS473J	R 346 (B,159,42)	RS1/16SS1303D
	R 118 (B,48,105)	RS1/16SS473J	R 347 (B,157,43)	RS1/16SS1002D
E	R 119 (B,49,105)	RS1/16SS104J		
			R 354 (A,165,46)	RS1/10SR0R0J
	R 120 (B,50,108)	RS1/16SS472J	R 355 (B,158,56)	RS1/16SS0R0J
	R 121 (B,47,112)	RS1/10SR102J	R 358 (B,152,39)	RS1/10SR0R0J
	R 122 (B,58,109)	RS1/16SS102J	R 359 (B,155,41)	RS1/10SR0R0J
	R 123 (B,61,107)	RS1/16SS103J	R 361 (B,152,51)	RS1/10SR0R0J
	R 124 (B,61,103)	RS1/16SS223J		
■			R 362 (B,119,37)	RS1/10SR103J
	R 125 (B,54,111)	RS1/16SS103J	R 363 (B,117,34)	RS1/10SR331J
	R 126 (B,53,103)	RS1/16SS223J	R 364 (B,123,33)	RS1/16SS103J
	R 127 (B,56,107)	RS1/16SS102J	R 365 (B,123,36)	RS1/16SS103J
	R 128 (B,54,108)	RS1/16SS103J	R 366 (B,125,32)	RS1/16SS103J
	R 129 (B,51,112)	RS1/16SS103J		
F			R 505 (B,24,50)	RS1/16SS102J
	R 130 (A,51,103)	RS1/16SS104J	R 508 (A,21,81) (C,D)	RS1/16SS102J
	R 131 (A,50,103)	RS1/16SS473J	R 509 (B,31,61)	RS1/16SS102J
	R 132 (A,50,102)	RS1/16SS563J	R 511 (B,37,46)	RS1/16SS102J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 513	(B,25,32)	RS1/16SS102J		R 687	(A,103,23)	RS1/16SS0R0J	A
R 518	(A,71,70)	RS1/8SQ0R0J		R 688	(A,68,26)	RS1/16SS0R0J	
R 604	(A,71,40)	RS1/16SS104J		R 689	(B,102,23) (D)	RS1/16SS101J	
R 605	(B,81,43)	RS1/16SS121J		R 690	(A,101,22)	RS1/16SS0R0J	
R 607	(B,109,15)	RS1/16SS104J		R 691	(B,98,27)	RS1/16SS0R0J	
R 608	(B,99,33)	RS1/16SS104J		R 693	(B,114,14)	RS1/16SS102J	
R 609	(B,99,34)	RS1/16SS104J		R 694	(B,99,32)	RS1/16SS104J	
R 610	(A,101,31)	RS1/16SS100J		R 695	(B,99,35)	RS1/16SS104J	
R 611	(B,95,27)	RS1/16SS104J		R 697	(A,102,38)	RS1/16SS471J	
R 612	(B,109,16)	RS1/16SS102J					
R 613	(A,101,34)	RS1/16SS473J		R 698	(A,104,41)	RS1/16SS473J	
R 614	(A,95,53)	RS1/16SS681J		R 699	(A,73,48)	RS1/16SS102J	
R 615	(A,93,50)	RS1/16SS681J		R 700	(A,68,50)	RS1/16SS472J	
R 616	(B,98,25)	RS1/16SS101J		R 701	(A,74,47)	RS1/16SS102J	
R 617	(B,98,24)	RS1/16SS101J		R 702	(A,62,40)	RS1/16SS473J	B
R 618	(A,101,45)	RS1/16SS473J		R 703	(A,71,47)	RS1/16SS102J	
R 620	(B,99,22)	RS1/16SS472J		R 704	(A,69,46)	RS1/16SS473J	
R 621	(B,99,21)	RS1/16SS471J		R 705	(A,71,48)	RS1/16SS473J	
R 622	(A,97,50)	RS1/16SS473J		R 706	(B,92,52)	RS1/16SS473J	
R 623	(A,96,50)	RS1/16SS473J		R 707	(A,91,49)	RS1/16SS101J	
R 624	(A,95,50)	RS1/16SS473J		R 708	(A,90,51)	RS1/16SS681J	
R 625	(B,99,26)	RS1/16SS182J		R 709	(B,88,40)	RS1/16SS222J	
R 627	(A,67,32)	RS1/16SS104J		R 712	(A,81,52)	RS1/16SS221J	
R 630	(B,90,19)	RS1/16SS102J		R 713	(A,79,53)	RS1/16SS182J	
R 632	(B,100,26)	RS1/16SS182J					
R 633	(B,98,40)	RS1/16SS0R0J		R 714	(A,80,52)	RS1/16SS221J	C
R 634	(A,69,45)	RS1/16SS0R0J		R 715	(A,79,52)	RS1/16SS182J	
R 637	(B,88,15)	RS1/16SS101J		R 716	(B,77,23) (B)	RS1/16SS104J	
R 639	(B,100,46)	RS1/16SS182J		R 717	(A,78,19) (A,C,D)	RS1/16SS104J	
R 640	(A,85,50)	RS1/16SS0R0J		R 720	(A,86,50)	RS1/16SS101J	
R 641	(A,89,53)	RS1/16SS101J		R 722	(B,79,43)	RS1/16SS121J	
R 642	(A,82,50) (A,B)	RS1/16SS102J		R 723	(A,79,50)	RS1/16SS104J	
R 645	(B,98,46)	RS1/16SS182J		R 724	(A,76,49)	RS1/16SS102J	
R 646	(B,75,19)	RS1/16SS104J		R 725	(A,71,49)	RS1/16SS102J	
R 647	(A,104,38)	RS1/16SS473J		R 726	(A,71,44)	RS1/16SS471J	
R 648	(A,69,33)	RS1/16SS104J		R 727	(B,73,44)	RS1/16SS104J	
R 649	(A,71,32)	RS1/16SS104J		R 728	(A,69,43)	RS1/16SS101J	D
R 651	(B,68,32)	RS1/16SS104J		R 729	(A,71,43)	RS1/16SS101J	
R 654	(A,71,24)	RS1/16SS101J		R 730	(B,81,24) (A,B)	RS1/16SS104J	
R 655	(A,70,24)	RS1/16SS101J		R 733	(B,82,22) (A,D)	RS1/16SS104J	
R 656	(A,70,27)	RS1/16SS0R0J		R 738	(A,66,38)	RS1/16SS104J	
R 657	(B,94,41)	RS1/16SS103J		R 739	(A,66,40)	RS1/16SS473J	
R 659	(B,69,28)	RS1/16SS104J		R 740	(B,89,22)	RS1/16SS103J	
R 660	(A,88,53)	RS1/16SS101J		R 741	(B,83,21) (B,C)	RS1/16SS104J	
R 661	(B,82,44)	RS1/16SS681J		R 746	(B,71,18) (A,B)	RS1/16SS0R0J	
R 662	(A,87,50)	RS1/16SS101J		R 748	(B,83,22) (C,D)	RS1/16SS104J	
R 663	(A,98,52)	RS1/16SS0R0J		R 750	(B,83,23)	RS1/16SS0R0J	
R 665	(B,99,38)	RS1/16SS471J		R 751	(B,82,32)	RS1/16SS0R0J	E
R 670	(B,98,22)	RS1/16SS472J		R 752	(B,71,34)	RS1/16SS223J	
R 671	(A,92,50)	RS1/16SS681J		R 754	(B,70,33)	RS1/16SS223J	
R 673	(B,99,42)	RS1/16SS221J		R 755	(B,108,15)	RS1/16SS0R0J	
R 675	(B,98,21)	RS1/16SS471J		R 757	(A,68,24)	RS1/16SS101J	
R 677	(A,102,44)	RS1/16SS0R0J		R 758	(B,77,29)	RS1/16SS471J	
R 678	(B,80,43)	RS1/16SS121J		R 761	(A,71,22)	RS1/16SS101J	
R 679	(B,101,45)	RS1/16SS101J		R 762	(A,72,24)	RS1/16SS101J	
R 680	(B,98,44)	RS1/16SS101J		R 763	(A,74,21)	RS1/16SS101J	
R 682	(A,102,40)	RS1/16SS680J		R 767	(B,101,23) (D)	RS1/16SS105J	
R 684	(B,95,13)	RS1/16SS102J		R 769	(B,96,42)	RS1/16SS104J	F
R 685	(A,100,49)	RS1/16SS102J		R 772	(A,81,19)	RS1/16SS471J	
R 686	(A,102,23)	RS1/16SS681J		R 773	(A,82,19)	RS1/16SS471J	
				R 774	(B,81,22)	RS1/16SS104J	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.R 775 (A,67,39)
R 776 (B,76,22)RS1/16SS473J
RS1/16SS104JR 1013 (B,153,100)
R 1014 (B,154,100)RS1/16SS473J
RS1/16SS473J

A

R 779 (B,86,55)
R 780 (B,92,16) (C,D)
R 782 (B,90,33)
R 787 (B,78,29)RS1/16SS472J
RS1/16SS0R0J
RS1/16SS1002D
RS1/16SS104JR 1015 (B,145,71)
R 1016 (B,148,102)
R 1017 (B,141,70)RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS473JR 789 (B,104,19)
R 790 (B,105,19)
R 792 (B,102,19)
R 793 (B,75,27)RS1/16SS473J
RS1/16SS473J
RS1/16SS103J
RS1/16SS104JR 1018 (B,150,102)
R 1019 (B,148,70)
R 1020 (B,146,102)
R 1023 (B,139,74)
R 1024 (B,154,98)
R 1025 (B,150,74)RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473JR 796 (B,90,34)
R 797 (B,91,26)
R 798 (A,104,60)
R 801 (A,69,62)RS1/16SS1001D
RS1/16SS102J
RS1/10SR0R0J
RS1/16SS0R0JR 1026 (B,143,98)
R 1027 (B,141,79)
R 1028 (B,151,94)
R 1040 (B,147,92)
R 1044 (B,148,81)
R 1047 (B,143,87)RS1/16SS473J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS473J
RS1/16SS473J

B

R 802 (A,71,62)
R 803 (B,75,69)
R 804 (B,75,70)
R 805 (B,77,66)
R 806 (B,79,65)RS1/16SS0R0J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101JR 1048 (B,142,87)
R 1057 (B,153,92)
R 1058 (B,148,82)
R 1061 (B,149,77)
R 1062 (B,140,77)RS1/16SS473J
RS1/16SS0R0J
RS1/16SS473J
RS1/10SR0R0J
RS1/10SR0R0JR 811 (B,60,55)
R 812 (B,60,53)
R 813 (B,59,60)
R 814 (B,59,58)
R 817 (B,64,74)RS1/16SS223J
RS1/16SS223J
RS1/16SS223J
RS1/16SS223J
RS1/16SS223JR 1063 (B,143,95)
R 1064 (B,153,95)
R 1065 (B,150,67)
R 1066 (B,140,66)
R 1067 (B,147,64)RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J

C

R 818 (B,61,68)
R 821 (B,72,54) (C,D)
R 823 (B,69,53)
R 824 (B,77,68)
R 825 (B,78,66)RS1/16SS223J
RS1/16SS470J
RS1/16SS104J
RS1/16SS75R0D
RS1/16SS75R0DR 1068 (B,142,64)
R 1101 (B,127,60)
R 1102 (B,132,61)
R 1103 (B,122,52)
R 1104 (B,136,57)RS1/10SR0R0J
RS1/16SS473J
RS1/16SS222J
RS1/16SS473J
RS1/16SS220JR 827 (B,79,57)
R 829 (B,73,54)
R 831 (B,80,63)
R 844 (B,66,73)
R 845 (B,62,72)RS1/16SS2200D
RS1/16SS750J
RS1/16SS104J
RS1/16SS101J
RS1/16SS101JR 1106 (B,134,46)
R 1107 (B,140,55)
R 1109 (B,132,42)
R 1110 (B,133,46)
R 1111 (B,131,46)RS1/16SS470J
RS1/16SS101J
RS1/8SQ102J
RS1/8SQ102J
RS1/8SQ102J

D

R 846 (B,63,68)
R 850 (B,61,61)
R 851 (B,61,59)
R 852 (B,61,58)
R 853 (B,59,56)RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101JR 1112 (B,137,57)
R 1113 (B,140,57)
R 1115 (B,127,47)
R 1119 (B,138,55)RS1/16SS220J
RS1/8SQ220J
RS1/16SS0R0J
RS1/16SS104JR 854 (B,61,54)
R 855 (B,61,53)
R 859 (B,79,55)
R 901 (A,46,29)RS1/16SS101J
RS1/16SS101J
RS1/16SS75R0D
RS1/16SS0R0JR 1120 (B,124,60)
R 1121 (B,122,60)
R 1122 (B,121,57)
R 1123 (B,121,55)
R 1124 (A,118,58)RS1/8SQ222J
RS1/8SQ222J
RS1/16SS472J
RS1/16SS472J
RS1/8SQ0R0J

E

R 910 (B,54,30)
R 920 (B,47,15) (A,B)
R 921 (B,46,13) (A,B)
R 922 (B,46,15) (A,B)RS1/16SS104J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101JR 1205 (A,132,46)
R 1206 (A,132,48)
R 1207 (B,138,48)
R 1208 (B,139,51)
R 1209 (B,138,52)RS1/10SR470J
RS1/10SR470J
RS1/10SR820J
RS1/10SR470J
RS1/10SR470JR 923 (A,45,27)
R 944 (B,29,23)
R 945 (B,52,13)
R 946 (B,52,15)
R 953 (B,35,10)RS1/16SS0R0J
RS1/10SR0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0JR 1210 (A,132,49)
R 1212 (B,113,44)
R 1213 (B,117,46)
R 1214 (B,110,56)
R 1215 (B,111,54)RS1/10SR470J
RS1/8SQ821J
RS1/8SQ821J
RS1/10SR821J
RS1/10SR821J

F

R 954 (B,29,25)
R 1007 (B,150,72)
R 1008 (B,149,72)
R 1009 (B,140,72)
R 1010 (B,139,72)
R 1011 (B,143,100)RS1/10SR0R0J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473JR 1217 (B,112,65)
R 1218 (A,121,48)
R 1219 (A,121,47)
R 1220 (B,111,49)
R 1221 (B,116,53)RS1/10SR821J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 1012 (B,144,100)

RS1/16SS473J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1222	(B,113,59)	RS1/16SS0R0J		R 1528	(A,37,57) (A,B)	RS1/16SS182J	A
R 1301	(A,76,78)	RS1/10SR0R0J		R 1529	(A,32,56) (A,B)	RS1/16SS332J	
R 1305	(B,90,118)	RS1/8SQ362J		R 1530	(A,36,53) (A,B)	RS1/16SS121J	
R 1306	(B,87,117)	RS1/8SQ362J		R 1531	(A,31,55) (A,B)	RS1/16SS102J	
R 1307	(B,95,122)	RS1/8SQ362J		R 1532	(A,31,62) (A,B)	RS1/16SS0R0J	
R 1308	(B,85,117)	RS1/8SQ362J		R 1533	(A,31,59) (A,B)	RS1/16SS0R0J	B
R 1309	(B,94,119)	RS1/16SS562J		R 1534	(A,29,62) (A,B)	RS1/16SS0R0J	
R 1310	(B,88,119)	RS1/16SS562J		R 1535	(A,29,61) (A,B)	RS1/16SS0R0J	
R 1311	(B,94,120)	RS1/16SS562J		R 1536	(A,29,53) (A,B)	RS1/16SS0R0J	
R 1312	(B,86,119)	RS1/16SS562J		R 1537	(A,31,53) (A,B)	RS1/16SS0R0J	
R 1402	(B,28,99)	RS1/16SS0R0J		R 1538	(A,30,58) (A,B)	RS1/16SS0R0J	C
R 1403	(A,42,91)	RS1/16SS103J		R 1539	(A,37,59) (A,B)	RS1/16SS0R0J	
R 1404	(A,39,89)	RS1/4SA181J		R 1540	(A,41,51)	RS1/10SR0R0J	
R 1405	(A,40,86)	RS1/10SR0R0J		R 1542	(A,39,51)	RS1/10SR0R0J	
R 1406	(A,50,92)	RS1/10SR220J		R 1543	(A,29,66)	RS1/10SR0R0J	
R 1407	(A,50,73)	RS1/16SS101J		R 1545	(A,44,57)	RS1/16SS0R0J	D
R 1408	(A,39,83)	RS1/16SS0R0J		R 1546	(A,43,57)	RS1/16SS0R0J	
R 1409	(A,51,72)	RS1/16SS0R0J		R 1547	(A,47,55)	RS1/8SQ0R0J	
R 1415	(B,23,102)	RS1/16SS0R0J		R 1548	(A,31,66)	RS1/10SR0R0J	
R 1417	(B,47,86)	RS1/16SS472J		R 1549	(B,48,62)	RS1/16SS0R0J	
R 1418	(B,49,83)	RS1/16SS271J		R 1550	(A,41,68)	RS1/16SS0R0J	E
R 1420	(B,50,87)	RS1/16SS220J		R 1551	(A,40,68)	RS1/16SS0R0J	
R 1421	(B,50,89)	RS1/16SS472J		R 1552	(A,22,49) (A,B)	RS1/16SS0R0J	
R 1422	(B,51,85)	RS1/16SS223J		R 1602	(A,39,37)	RS1/16SS0R0J	
R 1423	(B,50,83)	RS1/16SS474J		R 1603	(A,40,48)	RS1/16SS0R0J	
R 1425	(B,56,86)	RS1/16SS681J		R 1604	(A,31,37)	RS1/16SS103J	F
R 1426	(B,58,91)	RS1/16SS271J		R 1606	(A,29,39)	RS1/16SS103J	
R 1427	(B,56,91)	RS1/16SS561J		R 1608	(A,28,38)	RS1/16SS472J	
R 1437	(B,35,90)	RS1/16SS0R0J		R 1609	(A,27,39)	RS1/16SS472J	
R 1439	(A,50,82)	RS1/16SS0R0J		R 1610	(A,30,41)	RS1/16SS101J	
R 1441	(B,51,91)	RS1/16SS471J		R 1611	(A,30,42)	RS1/16SS101J	A
R 1444	(B,44,87)	RS1/10SR821J		R 1612	(A,26,39)	RS1/16SS0R0J	
R 1445	(B,43,86)	RS1/16SS473J		R 1613	(A,36,40)	RS1/16SS0R0J	
R 1447	(B,52,89)	RS1/16SS0R0J		R 1615	(A,28,41)	RS1/16SS0R0J	
R 1448	(B,51,87)	RS1/16SS132J		R 1616	(A,28,42)	RS1/16SS0R0J	
R 1449	(B,49,90)	RS1/16SS751J		R 1617	(A,33,29)	RS1/8SQ0R0J	B
R 1453	(B,56,85)	RS1/16SS0R0J		R 1701	(B,22,91) (C,D)	RS1/16SS103J	
R 1502	(A,47,67)	RS1/16SS0R0J		R 1702	(B,23,83) (C,D)	RS1/4SA471J	
R 1503	(A,36,69)	RS1/16SS0R0J		R 1703	(B,24,80) (C,D)	RS1/4SA471J	
R 1505	(A,47,61)	RS1/16SS103J		R 1704	(B,23,81) (C,D)	RS1/16SS1003D	
R 1507	(A,46,61)	RS1/16SS103J		R 1705	(B,21,81) (C,D)	RS1/16SS1802D	C
R 1508	(A,45,57)	RS1/16SS472J		R 1706	(A,21,76) (C,D)	RAB4CQ221J	
R 1509	(A,44,55)	RS1/16SS472J		R 1709	(A,21,53) (A,B)	RAB4CQ221J	
R 1510	(A,44,59)	RS1/16SS101J		R 1715	(A,21,39) (A,B)	RAB4CQ0R0J	
R 1511	(A,43,59)	RS1/16SS101J		R 1716	(B,22,81) (C,D)	RS1/16SS0R0J	
R 1512	(A,42,56)	RS1/16SS0R0J		R 1717	(B,31,80) (C,D)	RS1/16SS911J	D
R 1513	(A,32,71)	RS1/16SS101J		R 1724	(A,9,82)	RS1/10SR0R0J	
R 1514	(B,26,101)	RS1/16SS105J		R 1725	(A,11,82)	RS1/10SR0R0J	
R 1515	(B,25,97)	RS1/16SS105J		R 1728	(A,23,91) (C,D)	RS1/16SS0R0J	
R 1516	(A,40,56)	RS1/16SS0R0J		R 1729	(A,22,23) (A,B)	RAB4CQ0R0J	
R 1517	(A,39,58)	RS1/16SS0R0J		R 1730	(A,23,25) (A,B)	RS1/16SS103J	E
R 1518	(A,38,56)	RS1/16SS0R0J		R 1732	(A,43,112)	RS1/10SR0R0J	
R 1519	(A,38,58)	RS1/16SS0R0J		R 1733	(A,41,112)	RS1/10SR0R0J	
R 1520	(A,45,65)	RS1/16SS0R0J		R 1734	(A,15,23)	RS1/10SR0R0J	
R 1522	(A,27,59) (A,B)	RS1/16SS182J		R 1735	(A,16,23)	RS1/10SR0R0J	
R 1523	(A,29,57) (A,B)	RS1/16SS332J		R 1736	(B,35,64)	RS1/10SR0R0J	F
R 1524	(A,26,50) (A,B)	RS1/16SS121J		R 1737	(B,37,63)	RS1/10SR0R0J	
R 1525	(A,29,55) (A,B)	RS1/16SS102J		R 1746	(B,19,12)	RS1/10SR0R0J	
R 1526	(A,36,62) (A,B)	RS1/16SS0R0J		R 1747	(B,20,12)	RS1/10SR0R0J	
R 1527	(A,34,60) (A,B)	RS1/16SS0R0J					

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

R 1760 (B,56,31)
R 1761 (B,58,30)

RS1/10SR0R0J
RS1/10SR0R0J

R 2265 (A,108,88)
R 2266 (A,90,95)
R 2304 (B,146,121) (A,C,D)
R 2305 (B,148,121) (B)
R 2308 (B,116,131) (A,B)

RS1/4SA0R0J
RS1/4SA0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 2309 (B,117,131) (C)
R 2310 (B,118,131) (D)

RS1/16SS471J
RS1/16SS0R0J

CAPACITORS

C 101 (B,125,86)
C 104 (A,115,88) 15 000 uF/16 V
C 106 (B,63,109)
C 108 (B,48,108)
C 110 (B,99,119)

CKSRYB104K50
CCH1980
CKSRYB105K10
CKSSYB102K50
CKSSYB104K16

C 113 (A,56,107)
C 114 (A,60,103)
C 115 (A,56,111)
C 116 (A,56,113)
C 117 (A,52,114)

CKSSYB104K10
CKSSYB102K50
CKSSYB104K16
CKSSYB123K16
CKSRYB823K16

C 201 (B,92,121)
C 202 (B,89,121)
C 203 (B,97,121)
C 204 (B,86,122)
C 205 (A,100,124) 2.2 uF

CKSQYB474K25
CKSQYB474K25
CKSQYB474K25
CKSQYB474K25
DCH1229

C 206 (A,88,121)
C 207 (B,115,126)
C 212 (B,79,112) 4.7 uF
C 216 (A,99,110) 4 700 uF/16 V

XCEVW100M16
CKSRYB104K16
CCG1201
CCH2085

C 217 (A,65,111)
C 218 (A,107,124)
C 219 (B,85,114)
C 220 (A,86,125) 0.1 uF
C 312 (A,168,84)

XCEVW101M16
CKSRYB104K50
CKSQYB105K16
CCG1357
XCEVW101M16

C 313 (B,165,89)
C 314 (B,157,35)
C 317 (B,141,60)
C 318 (B,146,55)
C 320 (A,146,55)

CKSRYB105K16
CKSSYB104K10
CKSQYB104K25
CKSQYB104K25
XCEVW101M16

C 321 (A,150,28)
C 322 (A,133,43)
C 323 (A,139,39)
C 324 (A,148,31)
C 327 (A,145,44)

CKSSYB102K50
CKSRYB105K10
XCEVW101M16
CKSSYB104K10
CKSSYB104K16

C 328 (A,148,47) 0.1 uF
C 329 (A,151,44)
C 335 (B,160,42)
C 336 (B,167,45) 10 uF

CCG1266
CKSSYB102K50
CCSSCH101J50
CCG1236

C 337 (B,163,53) 10 uF
C 339 (B,167,47) 10 uF
C 342 (B,152,41)
C 343 (B,150,50)

CCG1236
CCG1236
CKSSYB104K16
CKSRYB104K50

C 344 (B,144,60)
C 345 (B,148,55)
C 347 (B,123,35)
C 348 (B,150,38) 47 uF
C 349 (A,148,39)

CKSRYB105K10
CKSRYB105K10
CKSSYB104K10
CCG1251
XCEVW101M16

C 502 (B,26,45)
C 503 (B,25,56) 4.7 uF

CKSRYB105K10
CCG1201

R 1801 (B,151,21)
R 1805 (B,155,12)
R 1806 (A,156,12)
R 1807 (A,155,12)

RS1/16SS102J
RS1/16SS471J
RS1/16SS221J
RS1/16SS221J

R 1808 (A,154,12)
R 1809 (B,152,9)
R 1810 (A,152,11)
R 1814 (B,159,17)
R 1815 (A,161,19)

RS1/16SS221J
RS1/16SS221J
RS1/16SS221J
RS1/10SR0R0J
RS1/4SA0R0J

R 1816 (B,139,12)
R 1822 (B,152,17)
R 1823 (B,153,14)
R 1826 (B,137,14)

RS1/16SS0R0J
RS1/16SS473J
RS1/8SQ561J
RS1/16SS0R0J

R 1827 (A,152,21)
R 1828 (A,147,17)
R 1829 (A,147,19)
R 1901 (A,128,40)
R 1904 (B,129,35)

RS1/10SR103J
RS1/16SS683J
RS1/16SS683J
RS1/16SS303J
RS1/16SS471J

R 1905 (B,128,37)
R 1906 (B,123,43)
R 2105 (A,150,105)
R 2107 (B,145,110)
R 2110 (A,160,106)

RS1/16SS681J
RS1/10SR103J
RS1/10SR102J
RS1/16SS103J
RS1/16SS0R0J

R 2111 (A,160,105)
R 2112 (A,160,103)
R 2113 (A,160,101)
R 2201 (A,75,80)
R 2202 (A,81,82)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS820J
RS1/16SS820J

R 2203 (A,76,86)
R 2204 (A,80,86)
R 2205 (A,72,81)
R 2206 (A,81,81)
R 2207 (A,76,85)

RS1/16SS820J
RS1/16SS820J
RS1/16SS223J
RS1/16SS223J
RS1/16SS223J

R 2208 (A,79,85)
R 2209 (A,75,82)
R 2210 (A,73,82)
R 2211 (A,79,83)
R 2212 (A,78,83)

RS1/16SS223J
RS1/16SS472J
RS1/16SS472J
RS1/16SS472J
RS1/16SS472J

R 2213 (B,166,105)
R 2214 (B,168,102)
R 2215 (B,167,106)
R 2216 (B,169,102)
R 2217 (B,169,106)

RS1/16SS821J
RS1/16SS472J
RS1/16SS223J
RS1/16SS472J
RS1/16SS223J

R 2218 (B,171,106)
R 2225 (B,22,107)
R 2226 (B,28,108)
R 2227 (B,30,128)
R 2228 (B,31,128)

RS1/16SS821J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 2229 (B,25,129)
R 2230 (B,42,116)
R 2231 (B,38,116)
R 2232 (B,125,89)
R 2233 (B,130,94)

RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS820J
RS1/16SS820J

R 2234 (B,127,91)
R 2235 (B,127,94)
R 2236 (B,130,92)
R 2237 (B,124,95)
R 2244 (B,146,27) (D)

RS1/16SS223J
RS1/16SS223J
RS1/16SS472J
RS1/16SS472J
RS1/16SS470J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 504	(B,28,46)	CKSRYB105K10		C 838	(A,69,57) 10 uF	CCG1192		
C 505	(B,34,56) 4.7 uF	CCG1201		C 839	(A,74,59) 10 uF	CCG1192		
C 506	(A,29,81) (C,D)	CKSRYB105K10		C 840	(B,75,67)	CKSSYB104K10		A
C 507	(A,22,81) (C,D)	CKSSYB104K16		C 841	(B,70,69)	CKSRYB105K10		
C 508	(A,24,85) (C,D)	CKSRYB105K10		C 842	(B,71,69)	CKSRYB105K10		
C 510	(B,38,50)	CKSRYB105K10		C 843	(B,73,69)	CKSRYB105K10		
C 511	(B,47,50)	CKSRYB105K10		C 901	(A,43,26)	CKSRYB105K10		
C 513	(B,39,45)	CKSRYB105K10		C 902	(B,39,26)	CKSRYB105K10		
C 514	(B,39,37)	CKSRYB105K10		C 903	(B,37,27)	CKSRYB105K10		
C 516	(B,27,54)	CKSSYB104K16		C 904	(B,39,27)	CKSRYB105K10		
C 602	(B,112,21)	CKSRYB105K10		C 905	(B,37,28)	CKSRYB105K10		
C 603	(A,103,30)	CCSRCH220J50		C 906	(B,39,29)	CKSRYB105K10		
C 604	(A,101,29)	CCSSCH220J50		C 907	(B,37,30)	CKSRYB105K10		
C 605	(A,103,43)	CKSSYB104K10		C 908	(A,44,26)	CKSSYB104K10		B
C 606	(A,101,23)	CKSSYB104K10		C 909	(B,43,20)	CKSRYB105K10		
C 607	(B,99,28)	CKSSYB104K10		C 910	(B,44,17)	CKSRYB105K10		
C 608	(B,94,31) 4.7 uF	CCG1331		C 911	(B,45,20)	CKSRYB105K10		
C 611	(B,83,24)	CKSSYB104K10		C 912	(B,46,17) (A,B)	CKSRYB105K10		
C 612	(A,85,49)	CKSSYB104K10		C 913	(B,46,20) (A,B)	CKSRYB105K10		
C 613	(A,71,28)	CKSSYB104K10		C 914	(B,47,17) (A,B)	CKSRYB105K10		
C 615	(A,101,51)	CKSSYB104K10		C 915	(A,52,31) 10 uF	CCG1192		
C 616	(A,101,53) 10 uF	CCG1192		C 916	(B,53,30)	CKSSYB104K10		
C 618	(B,99,40)	CCSSCH101J50		C 917	(A,51,30)	CKSSYB104K10		
C 620	(A,66,41)	CKSSYB104K10		C 918	(A,49,26)	CKSQYB104K25		
C 625	(B,114,12)	CKSSYB102K50		C 919	(A,49,29)	CKSQYB104K25		C
C 801	(B,77,57)	CKSSYB104K10		C 920	(A,47,26) 10 uF	CCG1192		
C 802	(B,76,54)	CKSSYB104K10		C 921	(A,47,29) 10 uF	CCG1192		
C 803	(A,68,66)	CKSRYB105K10		C 927	(B,50,17)	CKSRYB105K10		
C 804	(B,66,69)	CKSRYB105K10		C 928	(B,51,20)	CKSRYB105K10		
C 805	(B,67,69)	CKSRYB105K10		C 939	(B,48,20)	CKSRYB105K10		
C 806	(B,69,69)	CKSRYB105K10		C 940	(B,49,17)	CKSRYB105K10		
C 807	(B,73,52) (C,D)	CCSSCH271J50		C 941	(B,50,20)	CKSRYB105K10		
C 810	(A,68,65)	CKSSYB104K10		C 1003	(B,148,67)	CKSQYB105K16		
C 811	(B,66,66)	CKSRYB105K10		C 1004	(B,146,67)	CKSQYB105K16		
C 812	(B,76,67)	CKSSYB104K10		C 1005	(B,143,67)	CKSQYB105K16		
C 813	(B,63,71)	CKSRYB105K10		C 1006	(B,142,67)	CKSQYB105K16		D
C 814	(B,77,65)	CKSSYB104K10		C 1007	(B,145,105)	CKSQYB105K16		
C 815	(B,63,69)	CKSRYB105K10		C 1008	(B,147,105)	CKSQYB105K16		
C 816	(B,77,64)	CKSSYB104K10		C 1009	(B,150,105)	CKSQYB105K16		
C 817	(B,62,66)	CKSQYB105K16		C 1010	(B,151,105)	CKSQYB105K16		
C 818	(B,77,63)	CKSSYB104K10		C 1011	(B,141,71)	CCSSCH330J50		
C 819	(B,62,65)	CKSQYB105K16		C 1012	(B,150,101)	CCSSCH330J50		
C 820	(B,77,62)	CKSSYB104K10		C 1013	(B,148,71)	CCSSCH330J50		
C 821	(B,62,63)	CKSQYB105K16		C 1014	(B,146,101)	CCSSCH330J50		
C 822	(B,78,61)	CKSSYB104K10		C 1015	(B,140,74)	CCSSCH330J50		
C 823	(B,63,61)	CKSRYB105K10		C 1016	(B,153,98)	CCSSCH330J50		
C 824	(B,78,60)	CKSSYB104K10		C 1017	(B,149,74)	CCSSCH330J50		E
C 825	(B,63,60)	CKSRYB105K10		C 1018	(B,144,98)	CCSSCH330J50		
C 826	(B,78,59)	CKSSYB104K10		C 1019	(B,142,77)	CKSRYB105K16		
C 827	(B,63,58)	CKSRYB105K10		C 1020	(B,151,96)	CKSRYB105K16		
C 828	(B,78,58)	CKSSYB104K10		C 1021	(B,141,76)	CKSSYB104K16		
C 829	(B,64,57)	CKSRYB105K10		C 1022	(B,151,97)	CKSSYB104K16		
C 830	(B,63,56)	CKSRYB105K10		C 1028	(B,147,89)	CKSSYB104K16		
C 831	(B,64,54)	CKSRYB105K10		C 1039	(B,152,90) 10 uF	CCG1234		
C 832	(B,75,56)	CKSSYB104K10		C 1040	(B,146,80) 10 uF	CCG1192		
C 833	(A,73,57) 10 uF	CCG1192		C 1041	(B,154,91) 10 uF	CCG1192		
C 834	(B,71,53)	CKSSYB104K10		C 1042	(B,153,93)	CKSRYB105K10		F
C 835	(A,72,55)	CKSSYB104K10		C 1043	(B,145,89)	CKSRYB105K10		
C 836	(A,69,60)	CKSQYB104K25		C 1101	(B,130,62)	CCSSCH120J50		
C 837	(A,74,60)	CKSQYB104K25		C 1102	(B,134,62)	CCSSCH120J50		

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 1103 (B,125,49) CKSRYB105K16

C 1104 (B,126,58) CKSSYB123K16

C 1105 (A,129,58) CKSSYB104K16

C 1106 (A,126,58) CKSQYB225K10

C 1107 (B,127,49) CKSRYB105K16

C 1108 (A,135,55) CKSQYB104K25

C 1109 (A,131,52) CKSQYB104K25

C 1110 (A,130,54) CKSQYB104K25

C 1111 (B,137,55) CKSSYB103K16

C 1112 (A,127,56) CKSQYB104K25

C 1113 (A,133,58) CKSQYB104K25

C 1114 (B,123,57) 10 uF CCG1192

C 1115 (A,125,56) 10 uF CCG1192

C 1116 (A,138,52) 10 uF CCG1192

C 1117 (B,123,55) 10 uF CCG1192

C 1118 (B,124,63) 10 uF CCG1192

C 1119 (B,122,63) 10 uF CCG1192

C 1120 (A,136,52) CKSQYB104K25

C 1123 (B,135,59) CCSSCH121J50

C 1125 (B,136,61) CCSSCH121J50

C 1126 (B,137,62) CCSSCH121J50

C 1201 (A,119,45) CKSSYB104K16

C 1202 (A,120,45) 10 uF CCG1192

C 1205 (B,112,48) 10 uF CCG1192

C 1207 (B,137,48) CCSSCH470J50

C 1208 (B,142,51) CCSSCH121J50

C 1209 (B,140,52) CCSSCH121J50

C 1210 (A,117,56) CKSSYB104K16

C 1211 (A,119,56) 10 uF CCG1192

C 1216 (A,116,65) CKSSYB104K16

C 1217 (A,118,66) 10 uF CCG1192

C 1222 (B,115,45) CKSRYB182K50

C 1223 (B,117,48) CKSRYB182K50

C 1224 (B,105,57) CKSRYB182K50

C 1225 (B,109,54) CKSRYB182K50

C 1227 (B,113,67) CKSRYB182K50

C 1229 (A,111,48) CKSSYB104K16

C 1230 (A,107,56) 10 uF CCG1192

C 1231 (A,108,58) CKSSYB104K16

C 1232 (A,106,64) 10 uF CCG1192

C 1233 (A,110,68) CKSSYB104K16

C 1301 (B,82,89) 2.2 uF CCG1218

C 1302 (B,82,87) 2.2 uF CCG1218

C 1303 (B,89,81) 10 uF CCG1192

C 1304 (B,83,80) 10 uF CCG1192

C 1305 (B,81,92) CKSRYB105K10

C 1306 (B,82,90) CKSRYB105K10

C 1307 (B,69,92) CKSRYB105K10

C 1308 (B,69,91) CKSRYB105K10

C 1314 (A,70,98) XCEVW100M16

C 1315 (B,69,89) 2.2 uF CCG1218

C 1317 (A,70,91) XCEVW100M16

C 1319 (B,85,80) CKSQYB104K25

C 1321 (B,82,80) CKSQYB104K25

C 1322 (A,81,75) XCEVW470M16

C 1323 (A,70,76) Capacitor CEVW470M25

C 1410 (A,51,91) CKSSYB103K16

C 1412 (A,47,86) CCSSCH270J50

C 1413 (A,37,87) CKSSYB103K16

C 1424 (B,39,92) CKSSYB103K16

C 1428 (B,52,83)

C 1430 (B,53,83)

C 1431 (B,57,84)

C 1432 (B,57,91)

C 1435 (B,55,85)

C 1443 (B,42,86)

C 1444 (B,40,91)

C 1445 (B,51,90)

C 1447 (B,28,102)

C 1501 (A,50,53)

C 1502 (A,51,55)

C 1503 (A,52,54) 10 uF

C 1504 (A,42,54) 10 uF

C 1505 (A,44,66)

C 1507 (A,43,67)

C 1508 (A,43,68)

C 1509 (A,39,66)

C 1511 (A,43,78)

C 1512 (A,38,78)

C 1515 (A,41,59)

C 1518 (A,33,69)

C 1519 (B,24,100)

C 1520 (B,27,95)

C 1521 (B,28,95)

C 1522 (A,29,70)

C 1523 (A,36,64)

C 1531 (A,30,70)

C 1533 (A,38,82)

C 1601 (A,32,31)

C 1602 (A,32,33)

C 1603 (A,34,32) 10 uF

C 1604 (A,26,36) 10 uF

C 1605 (A,38,40)

C 1607 (A,38,42)

C 1608 (A,39,42)

C 1609 (A,38,46)

C 1611 (A,49,42)

C 1612 (A,49,47)

C 1613 (A,30,44)

C 1617 (A,53,46)

C 1701 (A,21,88) (C,D)

C 1702 (A,22,88) (C,D)

C 1703 (A,21,85) (C,D)

C 1705 (A,22,56) 10 uF

C 1706 (A,21,56)

C 1707 (A,22,45) 10 uF

C 1708 (A,21,45)

C 1710 (B,31,79) (C,D)

C 1711 (B,16,15)

C 1720 (A,23,89) (C,D)

C 1801 (B,158,12)

C 1804 (B,162,15)

C 1805 (A,162,13)

C 1806 (B,153,9)

C 1813 (B,154,10)

C 1814 (B,157,7)

C 1815 (A,145,12)

C 1824 (B,87,82)

C 1901 (B,127,40)

C 2201 (A,72,87) 10 uF

CKSRYB105K16

CKSSYB222K50

CCSSCH220J50

CKSSYB102K50

CKSSYB103K25

CKSSYB472K25

CKSSYB391K50

CCSSCH220J50

CCSSCH100D50

CKSSYB104K16

CKSSYB104K16

CCG1192

CCG1192

CKSSYB104K16

CKSSYB224K6R3

CKSSYB102K50

CKSSYB104K16

CCSSCH220J50

CCSSCH820J50

CKSSYB104K16

CCSSCH102J50

CCSSCH471J50

CCSSCK2R0C50

CCSSCK1R0C50

CCSSCH120J50

CKSSYB152K50

CCSSCK1R0C50

CCSSCH100D50

CKSSYB104K16

CKSSYB104K16

CCG1192

CCG1192

CKSSYB104K16

CKSSYB224K6R3

CKSSYB102K50

CKSSYB104K16

CCSSCH220J50

CCSSCH820J50

CKSSYB104K16

CCSSCH100D50

CCSSCH101J50

CKSRYB104K50

CKSSYB104K10

CCG1192

CKSSYB104K10

CCG1192

CKSSYB104K10

CKSSYB104K16

CKSSYB104K16

CCSSCH270J50

CKSSYB104K10

CKSSYB104K16

CKSSYB104K16

CCSSCH101J50

CCSSCH101J50

CCSSCH270J50

CCSSCH270J50

CKSQYB104K25

CKSSYB104K10

CCG1192

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 2202	(A,81,83)	10 uF	CCG1192			IC 8506	(A,26,128)	IC(A,B)	TC7SH08FUS1		
C 2203	(A,77,87)	10 uF	CCG1192			IC 8507	(A,26,124)	L-MOS And Gate(A,B)	TC7SET08FUS1		
C 2204	(A,82,87)	10 uF	CCG1192			IC 8601	(A,21,9)	Dual OP-AMP	NJM4565V		
C 2205	(B,160,127)		CCSSCH101J50			Q 7002	(A,72,110)	Transistor	LTC014EEB		A
C 2210	(B,124,93)	10 uF	CCG1192								
C 2211	(B,132,92)	10 uF	CCG1192			Q 7011	(A,108,47)	IC	RZQ050P01		
C 2220	(B,166,102)	4.7 uF	CCG1201			Q 7012	(A,114,48)	Transistor	LSCR523UB		
C 2221	(B,171,103)	4.7 uF	CCG1201			Q 7013	(A,22,68)	Power MOS FET	SFT1342		
C 2222	(B,153,26)	(D)	CKSSYB104K10			Q 7014	(A,13,75)	Chip Transistor	2SB1689		
C 2225	(B,21,112)		CCSSCH270J50			Q 7015	(A,9,79)	Transistor	LSCR523UB		
C 2226	(B,27,131)		CCSSCH270J50			Q 7016	(A,64,86)	IC	RZQ050P01		
						Q 7017	(A,67,89)	Transistor	LSCR523UB		
C 2227	(B,109,78)		CCSSCH270J50			Q 7101	(A,42,79)	FET	FK8V03040		
C 2228	(A,104,74)		CCSSCH270J50								
B						Q 7102	(A,42,63)	FET	FK8V03040		
						Q 7103	(A,39,79)	FET	FK8V03050		B
						Q 7104	(A,39,63)	FET	FK8V03050		
						Q 7201	(A,140,72)	Transistor	LTC014EEB		
						Q 7202	(A,145,69)	Transistor	LSAR523UB		
Unit Number : CXX6334(A)											
Unit Number : CXX6336(B)						Q 7203	(A,142,74)	Transistor	LTC014EEB		
Unit Number : CXX6333(C)						Q 7204	(A,147,73)	Transistor	LSAR523UB		
Unit Number : CXX6335(D)						Q 7703	(B,28,37)	Transistor	LSCR523UB		
Unit Name : IF Unit(Service)						Q 7704	(A,30,31)	Transistor	LTC044EEB		
						Q 7705	(A,29,35)	Transistor	LTC044EEB		
<u>MISCELLANEOUS</u>											
IC 7003	(A,69,120)	IC	NJM2387ADL3			Q 7901	(B,64,50)	Transistor	LSCR523UB		
IC 7004	(A,13,35)	Regulator IC	MM3479A18P			Q 7902	(B,68,50)	Transistor	LSCR523UB		
IC 7008	(A,119,48)	Regulator IC	MM3479A12P			Q 7903	(A,66,50)	Transistor	LSCR523UB		C
IC 7009	(B,141,75)	Regulator IC	MM3479A33P			Q 7904	(A,62,51)	Transistor	LSCR523UB		
IC 7010	(A,83,45)	Regulator IC	MM3411A15N			Q 7905	(B,60,54)	Transistor	LSCR523UB		
IC 7011	(B,27,79)	IC	AN33012UA								
IC 7101	(B,53,71)	IC	LTC3858EGN-1			Q 8001	(A,120,92)	Transistor	LTC023EEB		
IC 7202	(A,98,108)	IC	AN33014UA			Q 8002	(A,118,96)	Transistor	LSAR523UB		
IC 7203	(A,92,87)	IC	AN33014UA			Q 8003	(A,118,74)	Chip Transistor	RN4982		
IC 7601	(B,163,30)	IC	WM8761BGED			Q 8101	(A,148,85)	Transistor	2SB1132		
						Q 8501	(A,139,98)	Transistor	LSAR523UB		
IC 7602	(B,141,26)	IC	WM8761BGED								
IC 7603	(B,139,55)	IC	WM8761BGED			Q 8601	(A,29,13)	Chip Transistor	RN4983		
IC 7701	(B,43,38)	Dual OP-AMP	NJM4565V			D 7006	(A,27,72)	Diode	RB080L-30		
IC 7702	(A,13,20)	IC	WM8761BGED			D 7101	(B,46,68)	Diode	DB2J41100		
IC 7703	(B,144,66)	AD Convtr IC	AK5357VT			D 7102	(B,46,66)	Diode	DB2J41100		D
IC 7704	(A,23,36)	IC	TC4066BFT								
IC 7705	(A,8,106)	IC	NJU7043V			D 7201	(B,99,113)	Diode	RB060M-30		
IC 7706	(A,45,42)	IC	ML7247-001TBZ0			D 7202	(B,93,92)	Diode	RB060M-30		
IC 7709	(B,43,33)	IC	NJU7043V			D 7501	(B,128,30)	Diode	RB501VM-40		
IC 7901	(B,64,44)	IC	BH7673G			D 7502	(A,128,26)	Diode	RB501VM-40		
IC 7902	(B,68,44)	IC	BH7673G								
IC 7903	(A,66,44)	IC	BH7673G			D 7512	(B,90,27)	Diode	DZ2J039M0		
IC 7904	(A,62,45)	IC	BH7673G			D 8001	(B,132,101)	Diode	EZAEG2A50AX		
IC 7905	(A,82,62)	LSI	ML86V7675TBZA3A			D 8002	(B,130,101)	Diode	EZAEG2A50AX		
IC 7906	(A,95,60)	IC	TC74LCX541FK			D 8003	(B,130,99)	Diode	EZAEG2A50AX		
						D 8004	(B,128,99)	Diode	EZAEG2A50AX		
IC 7907	(A,95,67)	IC	TC7SZ125FU								
IC 7909	(A,91,52)	IC	TC7SZ125FU			D 8005	(B,128,101)	Diode	EZAEG2A50AX		E
IC 8001	(B,114,65)	IC	MN864779KT			D 8006	(B,126,101)	Diode	EZAEG2A50AX		
IC 8003	(A,125,67)	IC	WM8761BGED			D 8007	(B,125,99)	Diode	EZAEG2A50AX		
IC 8103	(A,147,78)	IC	NJM2115V			D 8008	(B,124,99)	Diode	EZAEG2A50AX		
						D 8011	(B,117,99)	Diode	EZAEG2A50AX		
IC 8202	(B,49,25)	IC(A,B)	TC7WZ34FK								
IC 8501	(A,14,90)	IC	TC7SH08FUS1			D 8012	(B,116,101)	Diode	EZAEG2A50AX		
IC 8502	(B,141,93)	IC	MAX14644ETA			D 8013	(A,114,77)	Diode	DA2J101		
IC 8504	(A,8,90)	L-MOS And Gate	TC7SET08FUS1			D 8014	(B,123,102)	Diode	EZAEG2A50AX		
IC 8505	(A,25,120)	L-MOS And Gate(A,B)	TC7SET08FUS1			D 8015	(A,124,79)	Diode	DAN202UM		
						D 8016	(B,120,103)	Diode	EZAEG2A50AX		
						D 8501	(A,11,87)	Diode	DA2J101		F
						D 8506	(B,144,101)	Diode	EZAEG2A50AX		
						D 8507	(B,142,105)	Diode	EZAEG2A50AX		
						D 8508	(B,144,103)	Diode	EZAEG2A50AX		
						D 8509	(B,142,104)	Diode	EZAEG2A50AX		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	D 8601	(A,46,14) Diode	DZ2S068C
	D 8602	(A,33,11) Diode	DZ2S068C
	L 7003	(A,31,63) Inductor	CTH1544
	L 7101	(A,51,61) Inductor	CTH1482
	L 7102	(A,51,82) Choke Coil 3.6 uH	CTH1479

L 8006	(B,121,68) Chip Beads	VTL1127
L 8007	(B,121,66) Chip Beads	VTL1127
L 8008	(B,121,65) Chip Beads	VTL1127
L 8009	(B,121,63) Chip Beads	VTL1126
L 8011	(A,124,75) Inductor	CTF1786
L 8012	(A,110,80) Inductor	CTF1795
L 8101	(A,158,84) Inductor	LCYC1R0K2125
L 8102	(A,153,85) Chip Ferrite Bead	OTL8019
L 8103	(B,153,76) Inductor	CTF1547

L 7103	(B,35,77) Inductor	CTF1738
L 7201	(B,110,110) Inductor	CTH1524
L 7202	(B,104,90) Inductor	CTH1524
L 7203	(B,103,113) Inductor	CTF1793
L 7204	(B,97,93) Inductor	CTF1793

L 8104	(B,153,78) Inductor	CTF1547
L 8201	(B,56,19) Ferrite Bead	CTF1528
L 8202	(B,55,19) Ferrite Bead	CTF1528
L 8203	(B,54,19) Ferrite Bead	CTF1528
L 8204	(B,133,16) Ferrite Bead	CTF1528

B	L 7301	(B,84,45) Chip Ferrite Bead	BTX1046
	L 7302	(B,89,45) Chip Ferrite Bead	VTL1183
	L 7303	(B,144,34) Inductor(A,B)	CTF1795
	L 7304	(B,146,33) Inductor(A,B)	CTF1795
	L 7305	(B,149,31) Inductor	CTF1795

L 8205	(B,70,23) Ferrite Bead	CTF1528
L 8401	(B,105,31) Inductor	CTF1731
L 8402	(B,103,31) Inductor	CTF1731
L 8403	(B,102,31) Inductor	CTF1731
L 8404	(B,100,31) Inductor	CTF1731
L 8405	(B,98,31) Inductor	CTF1731

L 7306	(B,151,31) Inductor	CTF1795
L 7307	(B,153,32) Inductor	CTF1795
L 7308	(B,151,32) Inductor	CTF1795
L 7309	(B,139,45) Inductor	CTF1795
L 7310	(B,95,44) Inductor	CTF1795

L 8501	(B,141,98) Choke Coil 90 ohm	CTH1319
L 8502	(B,138,98) Choke Coil 90 ohm	CTH1319
X 7701	(A,40,51) Resonator 12.288 MHz	CSS1811
X 7901	(A,87,75) Crystal Resonator 32 MHz	CSS1818
X 8001	(B,105,74) Resonator 27.000 MHz	CSS1768

C	L 7311	(B,96,46) Inductor	CTF1795
	L 7312	(B,97,48) Inductor	CTF1795
	L 7313	(B,97,45) Inductor	CTF1795
	L 7314	(B,98,47) Inductor	CTF1795
	L 7315	(B,98,48) Inductor	CTF1795

P 7001	(B,62,122) Poly Switch(A,B)	MINISMDC150F/24
CN7001	(A,52,115) Connector	CKS4977
CN7301	(B,100,39) Connector	CKS6547
CN7302	(B,137,39) Connector	CKS6549
CN7701	(B,21,21) Connector	CKS6346

L 7501	(A,102,40) Inductor	CTF1736
L 7502	(A,152,50) Inductor	CTF1736
L 7601	(B,167,22) Inductor	CTF1786
L 7602	(B,137,20) Inductor	CTF1786
L 7603	(B,148,50) Inductor	CTF1786

CN8101	(B,162,82) Connector	CKS6599
CN8201	(B,66,12) Connector	CKS6646
CN8202	(B,84,118) Plug	CKM1599
CN8203	(B,148,10) Connector	CKS6646
CN8401	(B,110,15) Connector	CKS6646

L 7702	(A,21,17) Inductor	CTF1787
L 7704	(B,153,65) Inductor	CTF1558
L 7705	(B,150,61) Inductor	CTF1558
L 7706	(B,46,43) Ferrite Bead	CTF1528
L 7707	(B,29,26) Chip Ferrite Bead	BTX1047

CN8502	(B,59,128) Connector	CKS6603
JA7501	(A,104,22) Connector	CKS6282
JA7502	(A,156,33) Connector	CKS6438
JA8001	(B,126,110) Connector	CKS6560
JA8102	(B,165,124) Connector	CKS5702

D	L 7708	(B,22,30) Resistor	RS1/10SR0R0J
	L 7709	(A,11,11) Inductor	CTF1786
	L 7902	(A,70,66) Chip Ferrite Bead	BTX1047
	L 7903	(A,80,75) Chip Ferrite Bead	BTX1047
	L 7904	(A,87,48) Chip Ferrite Bead	BTX1047

JA8501	(B,148,117) Connector	DKN1417
JA8502	(B,42,128) Connector(A,B)	CKS6495
JA8503	(B,11,128) Jack	CKN1040
JA8601	(B,39,11) Jack	CKS6437

L 7905	(A,79,42) Chip Ferrite Bead	BTX1047
L 7906	(A,98,70) Chip Ferrite Bead	BTX1047
L 7907	(A,97,64) Chip Ferrite Bead	BTX1047
L 7908	(A,95,55) Chip Ferrite Bead	BTX1047

E	L 7909	(A,97,66) Chip Beads	VTL1126
	L 7915	(A,86,52) Inductor	CTF1787
	L 7916	(A,83,52) Inductor	CTF1787
	L 7917	(A,91,66) Inductor	CTF1787
	L 7918	(A,91,63) Inductor	CTF1787

RESISTORS

R 7001	(B,69,124) (A,B)	RS1/4SA0R0J
R 7008	(A,69,111)	RS1/16SS473J
R 7011	(A,70,111)	RS1/16SS2401D
R 7017	(A,70,113)	RS1/16SS8201D
R 7018	(A,72,112)	RS1/16SS2201D

L 7919	(A,81,53) Inductor	CTF1787
L 7920	(A,80,54) Inductor	CTF1787
L 7921	(A,78,52) Inductor	CTF1787
L 7922	(A,82,72) Inductor	CTF1787
L 7923	(A,84,71) Inductor	CTF1787

R 7029	(A,17,33)	RS1/16SS102J
R 7032	(A,14,39)	RS1/8SQ0R0J
R 7035	(B,137,72)	RS1/16SS102J
R 7041	(A,114,45)	RS1/16SS683J
R 7049	(A,108,50)	RS1/10SR103J

F	L 8001	(B,131,97) Filter	CTF1834
	L 8002	(B,124,97) Filter	CTF1834
	L 8003	(B,127,97) Filter	CTF1834
	L 8004	(B,129,97) Filter	CTF1834

R 7050	(A,112,47)	RS1/16SS683J
R 7056	(A,100,48)	RS1/8SQ0R0J
R 7057	(A,103,46)	RS1/10SR331J

L 8005	(B,111,74) Ferrite Bead	CTF1528
--------	-------------------------	---------

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 7066	(B,29,70)	RS1/16SS2702D		R 7217	(A,103,98)	RS1/16SS102J	
R 7067	(B,29,71)	RS1/16SS1101D		R 7218	(A,94,102)	RS1/16SS152J	
				R 7219	(A,95,77)	RS1/16SS102J	
R 7068	(B,30,72)	RS1/16SS2701D		R 7220	(A,88,81)	RS1/16SS152J	A
R 7071	(A,19,78) 0.011 ohm	CCN1341					
R 7077	(B,31,73)	RS1/16SS1103D		R 7221	(A,103,97)	RS1/16SS102J	
R 7078	(B,27,70)	RS1/16SS562J		R 7222	(A,95,76)	RS1/16SS102J	
R 7079	(B,29,69)	RS1/16SS0R0J		R 7224	(A,94,103)	RS1/16SS3002D	
				R 7225	(A,92,103)	RS1/16SS2701D	
R 7082	(B,31,70)	RS1/16SS0R0J		R 7227	(A,89,105)	RS1/16SS8201D	
R 7086	(A,10,75)	RS1/16SS102J					
R 7087	(A,9,76)	RS1/16SS102J		R 7229	(A,88,82)	RS1/16SS3002D	
R 7088	(A,11,82)	RS1/16SS103J		R 7230	(A,86,82)	RS1/16SS2701D	
R 7091	(B,25,73)	RS1/16SS0R0J		R 7232	(A,84,85)	RS1/16SS8201D	
				R 7233	(A,95,114)	RS1/16SS0R0J	
R 7092	(A,71,86)	RS1/16SS683J		R 7234	(A,89,93)	RS1/16SS0R0J	
R 7093	(A,70,89)	RS1/16SS683J		R 7235	(A,91,104)	RS1/16SS752J	B
R 7094	(A,64,88)	RS1/10SR103J					
R 7098	(A,9,81)	RS1/16SS103J		R 7236	(A,85,83)	RS1/16SS103J	
R 7099	(B,62,116) (A,B)	RS1/4SA0R0J		R 7237	(B,108,104) 0.047 ohm	CCN1167	
R 7101	(B,50,56)	RS1/16SS0R0J		R 7238	(B,102,84) 0.047 ohm	CCN1167	
				R 7245	(A,104,105)	RS1/16SS1001D	
R 7102	(B,54,56)	RS1/16SS0R0J		R 7246	(A,98,85)	RS1/16SS0R0J	
R 7103	(B,57,77)	RS1/16SS0R0J					
R 7104	(B,58,79)	RS1/16SS1502D		R 7247	(A,103,102)	RS1/16SS224J	
R 7105	(B,59,78)	RS1/16SS4303D		R 7248	(A,97,82)	RS1/16SS224J	
R 7106	(B,59,76)	RS1/16SS8202D		R 7249	(A,105,105)	RS1/16SS1202D	
R 7107	(B,57,56)	RS1/16SS104J		R 7250	(A,99,85)	RS1/16SS2202D	
				R 7251	(A,105,104)	RS1/16SS104J	
R 7109	(B,57,66)	RS1/16SS0R0J					C
R 7110	(B,58,65)	RS1/16SS1802D		R 7252	(A,99,83)	RS1/16SS104J	
R 7111	(B,59,65)	RS1/16SS4703D		R 7253	(A,112,104)	RS1/16SS0R0J	
R 7112	(B,59,67)	RS1/16SS1503D		R 7254	(A,106,84)	RS1/16SS0R0J	
R 7113	(B,61,76)	RS1/16SS562J		R 7302	(A,127,44)	RS1/10SR0R0J	
				R 7303	(A,124,43)	RS1/10SR0R0J	
R 7114	(B,57,57)	RS1/16SS0R0J		R 7306	(B,126,44)	RS1/16SS0R0J	
R 7115	(B,60,73)	RS1/10SR0R0J					
R 7116	(B,61,67)	RS1/16SS392J		R 7307	(B,91,49)	RS1/10SR0R0J	
R 7117	(B,60,75)	RS1/10SR0R0J		R 7308	(B,127,46)	RS1/16SS0R0J	
R 7118	(B,59,70)	RS1/10SR0R0J		R 7309	(B,92,46)	RS1/16SS0R0J	
				R 7310	(B,127,44)	RS1/16SS0R0J	
R 7119	(B,59,69)	RS1/10SR0R0J		R 7311	(B,128,46)	RS1/16SS0R0J	
R 7120	(B,56,58)	RS1/10SR334J					D
R 7121	(B,59,58)	RS1/10SR274J		R 7315	(B,129,46)	RS1/16SS0R0J	
R 7122	(B,58,72)	RS1/16SS104J		R 7317	(B,130,44)	RS1/16SS0R0J	
R 7123	(B,46,76)	RS1/10SR120J		R 7323	(B,130,46)	RS1/16SS0R0J	
				R 7325	(B,131,44)	RS1/16SS0R0J	
R 7124	(B,47,64)	RS1/10SR100J		R 7327	(B,132,48)	RS1/16SS0R0J	
R 7125	(B,45,75)	RS1/10SR2R2J					
R 7128	(A,59,79) 15 mohm	CCN1328		R 7329	(B,132,44)	RS1/16SS0R0J	
R 7129	(A,60,79) 15 mohm	CCN1328		R 7330	(B,132,46)	RS1/16SS0R0J	
R 7130	(A,60,63) 12 mohm	CCN1321		R 7331	(B,134,44)	RS1/16SS0R0J	
				R 7332	(B,133,48)	RS1/16SS0R0J	
R 7131	(A,59,63) 12 mohm	CCN1321		R 7333	(B,133,44)	RS1/16SS0R0J	
R 7132	(A,62,73)	RS1/4SA0R0J					
R 7133	(A,62,70)	RS1/4SA0R0J		R 7335	(B,133,33)	RS1/16SS0R0J	E
R 7134	(B,57,65)	RS1/16SS0R0J		R 7338	(B,131,30)	RS1/16SS0R0J	
R 7135	(B,50,66)	RS1/16SS6R8J		R 7340	(B,131,27)	RS1/16SS0R0J	
				R 7341	(B,137,46)	RS1/16SS0R0J	
R 7136	(B,49,77)	RS1/16SS6R8J		R 7342	(B,132,28)	RS1/16SS0R0J	
R 7202	(A,143,70)	RS1/16SS222J					
R 7203	(A,142,71)	RS1/16SS222J		R 7343	(B,138,45)	RS1/16SS0R0J	
R 7206	(A,144,72)	RS1/16SS222J		R 7344	(B,134,32)	RS1/16SS0R0J	
R 7207	(A,144,74)	RS1/16SS222J		R 7345	(B,138,46)	RS1/16SS0R0J	
				R 7350	(B,130,28)	RS1/16SS0R0J	
R 7211	(B,87,93)	RS1/8SQ0R0J		R 7356	(B,96,33)	RS1/16SS0R0J	
R 7212	(B,92,112)	RS1/8SQ0R0J					
R 7213	(A,103,100)	RS1/16SS102J		R 7357	(B,130,30)	RS1/16SS0R0J	F
R 7214	(A,95,79)	RS1/16SS102J		R 7362	(B,111,31)	RS1/16SS0R0J	
R 7215	(A,103,99)	RS1/16SS102J		R 7364	(B,110,33)	RS1/16SS0R0J	
				R 7376	(B,118,44)	RS1/10SR0R0J	
R 7216	(A,95,78)	RS1/16SS102J		R 7385	(B,113,28)	RS1/16SS0R0J	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	R 7386 (B,84,33)	RS1/16SS0R0J	R 7518 (A,124,31)	RS1/16SS0R0J
	R 7387 (B,107,33)	RS1/16SS0R0J	R 7519 (A,125,31)	RS1/16SS0R0J
	R 7388 (B,87,33)	RS1/16SS0R0J	R 7520 (A,126,31)	RS1/16SS0R0J
	R 7389 (B,110,30)	RS1/16SS0R0J	R 7521 (A,127,30)	RS1/16SS0R0J
	R 7390 (B,85,32)	RS1/16SS0R0J	R 7522 (A,115,40)	RS1/16SS680J
■	R 7391 (B,108,33)	RS1/16SS0R0J	R 7523 (A,96,40)	RS1/16SS680J
	R 7392 (B,88,32)	RS1/16SS101J	R 7524 (A,92,40)	RS1/16SS330J
	R 7393 (B,94,46)	RS1/16SS0R0J	R 7525 (B,164,47)	RS1/16SS680J
	R 7394 (B,87,31)	RS1/16SS0R0J	R 7526 (B,159,47)	RS1/16SS680J
	R 7397 (B,129,33)	RS1/16SS0R0J	R 7527 (A,147,49)	RS1/16SS680J
B	R 7398 (B,93,32)	RS1/16SS0R0J	R 7528 (B,91,11)	RS1/16SS221J
	R 7399 (B,130,33)	RS1/16SS0R0J	R 7530 (B,90,15)	RS1/16SS330J
	R 7400 (B,92,32)	RS1/16SS0R0J	R 7531 (A,115,39)	RS1/16SS680J
	R 7401 (B,91,32)	RS1/16SS0R0J	R 7532 (A,108,40)	RS1/16SS680J
	R 7403 (B,92,44)	RS1/16SS0R0J	R 7533 (A,94,40)	RS1/16SS680J
■	R 7405 (B,93,46)	RS1/16SS0R0J	R 7534 (B,162,47)	RS1/16SS680J
	R 7407 (B,131,33)	RS1/16SS0R0J	R 7535 (A,145,49)	RS1/16SS680J
	R 7408 (B,94,44)	RS1/16SS0R0J	R 7537 (B,163,48)	RS1/16SS103J
	R 7415 (B,94,33)	RS1/16SS0R0J	R 7538 (B,161,48)	RS1/16SS103J
	R 7416 (B,95,33)	RS1/16SS0R0J	R 7539 (B,158,48)	RS1/16SS103J
C	R 7419 (B,141,48)	RS1/16SS0R0J	R 7540 (A,146,51)	RS1/16SS103J
	R 7420 (B,140,45)	RS1/16SS0R0J	R 7541 (A,145,51)	RS1/16SS103J
	R 7425 (B,142,45) (A,B)	RS1/16SS221J	R 7544 (A,142,51)	RS1/16SS0R0J
	R 7426 (B,143,45) (A,B)	RS1/16SS221J	R 7545 (A,89,42)	RS1/16SS0R0J
	R 7428 (B,144,44) (A,B)	RS1/16SS0R0J		
■	R 7430 (B,144,46) (A,B)	RS1/16SS221J	R 7601 (B,154,28)	RS1/16SS221J
	R 7433 (B,146,46)	RS1/16SS0R0J	R 7603 (B,158,27)	RS1/16SS0R0J
	R 7435 (B,147,47)	RS1/16SS0R0J	R 7604 (B,153,29)	RS1/16SS102J
	R 7437 (B,149,47)	RS1/16SS0R0J	R 7605 (B,155,29)	RS1/16SS102J
	R 7439 (B,119,32)	RS1/16SS103J	R 7606 (B,151,29)	RS1/16SS102J
D	R 7440 (B,151,45)	RS1/16SS0R0J	R 7609 (B,137,30)	RS1/16SS0R0J
	R 7441 (B,151,44)	RS1/16SS0R0J	R 7610 (B,142,31)	RS1/16SS330J
	R 7442 (B,120,33)	RS1/16SS0R0J	R 7611 (B,139,33)	RS1/16SS330J
	R 7443 (B,127,32)	RS1/16SS0R0J	R 7612 (B,146,29)	RS1/16SS330J
	R 7444 (B,126,31)	RS1/16SS0R0J	R 7613 (B,141,50)	RS1/16SS221J
■	R 7445 (B,125,31)	RS1/16SS0R0J	R 7614 (B,136,49)	RS1/16SS0R0J
	R 7446 (B,124,31)	RS1/16SS0R0J	R 7615 (B,133,55)	RS1/16SS330J
	R 7447 (B,122,31)	RS1/16SS0R0J	R 7616 (B,133,53)	RS1/16SS330J
	R 7448 (B,122,32)	RS1/16SS0R0J	R 7617 (B,134,51)	RS1/16SS330J
	R 7449 (B,121,31)	RS1/16SS0R0J	R 7621 (B,161,24)	RS1/16SS821J
E	R 7456 (B,83,30)	RS1/16SS103J	R 7622 (B,164,24)	RS1/16SS821J
	R 7457 (B,113,30)	RS1/16SS103J	R 7623 (B,144,20)	RS1/16SS821J
	R 7458 (B,114,31)	RS1/16SS103J	R 7624 (B,148,20)	RS1/16SS821J
	R 7459 (B,115,31)	RS1/16SS103J	R 7625 (B,150,52)	RS1/16SS821J
	R 7460 (B,116,32)	RS1/16SS103J	R 7626 (B,150,57)	RS1/16SS821J
F	R 7461 (B,117,32)	RS1/16SS103J	R 7628 (B,162,23)	RS1/16SS0R0J
	R 7463 (B,150,46)	RS1/16SS0R0J	R 7631 (B,145,19)	RS1/16SS0R0J
	R 7470 (B,112,32)	RS1/16SS0R0J	R 7634 (B,151,55)	RS1/16SS0R0J
	R 7482 (B,54,114) (A,B)	RS1/16SS0R0J	R 7639 (B,137,32)	RS1/16SS0R0J
	R 7483 (B,59,114) (A,B)	RS1/16SS0R0J	R 7640 (B,158,22)	RS1/16SS0R0J
■	R 7484 (B,128,25)	RS1/16SS104J	R 7702 (B,49,38)	RS1/16SS753J
	R 7485 (B,95,30)	RS1/16SS473J	R 7703 (B,49,40)	RS1/16SS753J
	R 7503 (B,126,28)	RS1/16SS103J	R 7707 (A,6,115)	RS1/16SS0R0J
	R 7504 (B,125,28)	RS1/16SS103J	R 7708 (B,29,23)	RS1/16SS101J
	R 7505 (B,122,28)	RS1/16SS103J		
F	R 7506 (B,121,28)	RS1/16SS103J	R 7710 (B,30,26)	RS1/16SS101J
	R 7507 (B,120,28)	RS1/16SS103J	R 7714 (B,27,41)	RS1/16SS102J
	R 7515 (A,120,33)	RS1/16SS0R0J	R 7715 (B,27,34)	RS1/16SS0R0J
	R 7516 (A,121,31)	RS1/16SS0R0J	R 7716 (A,44,51)	RS1/16SS222J
	R 7517 (A,122,31)	RS1/16SS0R0J	R 7717 (B,14,15)	RS1/16SS102J
			R 7718 (B,13,15)	RS1/16SS102J

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 7719 (A,43,50)	RS1/16SS105J	R 7805 (A,13,110)	RS1/16SS102J	
R 7720 (A,21,21)	RS1/16SS0R0J	R 7806 (A,12,114)	RS1/16SS102J	
R 7721 (A,21,19)	RS1/16SS0R0J	R 7813 (B,53,36)	RS1/16SS0R0J	
R 7722 (A,19,23)	RS1/16SS681J			A
		R 7820 (A,15,29)	RS1/16SS0R0J	
R 7723 (B,16,24)	RS1/16SS0R0J	R 7821 (A,25,43)	RS1/16SS0R0J	
R 7725 (A,19,26)	RS1/16SS681J	R 7822 (B,27,42)	RS1/16SS0R0J	
R 7726 (A,20,20)	RS1/16SS681J	R 7823 (B,36,36)	RS1/16SS273J	
R 7727 (A,19,16)	RS1/16SS331J	R 7826 (B,41,42)	RS1/16SS0R0J	
R 7728 (A,46,50)	RS1/16SS0R0J			
		R 7827 (A,49,49)	RS1/16SS472J	
R 7729 (B,13,24)	RS1/16SS0R0J	R 7828 (A,49,52)	RS1/16SS472J	
R 7730 (A,46,51)	RS1/16SS0R0J	R 7829 (A,14,26)	RS1/16SS0R0J	
R 7731 (B,37,41)	RS1/16SS0R0J	R 7832 (A,49,23)	RS1/10SR0R0J	
R 7733 (A,35,48)	RS1/16SS0R0J			
R 7734 (A,27,36)	RS1/16SS223J	R 7833 (A,46,30)	RS1/10SR0R0J	
		R 7834 (B,48,34)	RS1/16SS682J	B
		R 7904 (B,77,68)	RS1/16SS0R0J	
		R 7905 (B,77,62)	RS1/16SS0R0J	
R 7735 (A,27,37)	RS1/16SS223J			
R 7737 (B,26,36)	RS1/16SS222J	R 7906 (B,76,59)	RS1/16SS0R0J	
R 7738 (B,24,36)	RS1/16SS332J	R 7907 (B,64,55)	RS1/16SS151J	
R 7740 (A,34,40)	RS1/16SS0R0J	R 7908 (B,66,55)	RS1/16SS151J	
R 7744 (A,27,33)	RS1/16SS223J	R 7909 (B,67,55)	RS1/16SS151J	
		R 7910 (A,67,57)	RS1/16SS151J	
R 7745 (B,38,37)	RS1/16SS333J			
R 7746 (B,38,38)	RS1/16SS473J	R 7911 (B,82,64)	RS1/4SA0R0J	
R 7747 (A,15,27)	RS1/16SS821J	R 7912 (B,82,62)	RS1/4SA0R0J	
R 7748 (A,15,31)	RS1/16SS821J	R 7913 (B,82,60)	RS1/4SA0R0J	
R 7749 (B,50,41)	RS1/16SS101J	R 7916 (B,80,74)	RS1/16SS1500D	C
		R 7919 (B,80,68)	RS1/16SS1500D	
R 7756 (B,140,71)	RS1/16SS103J			
R 7757 (B,138,65)	RS1/16SS220J	R 7920 (B,83,70)	RS1/16SS472J	
R 7758 (B,142,62)	RS1/16SS220J	R 7921 (B,83,56)	RS1/16SS473J	
R 7761 (A,55,37)	RS1/16SS0R0J	R 7923 (B,83,68)	RS1/16SS101J	
R 7762 (B,31,23)	RS1/16SS222J	R 7924 (B,84,68)	RS1/16SS101J	
		R 7925 (A,85,72)	RS1/16SS821J	
R 7766 (A,43,32)	RS1/16SS103J			
R 7767 (A,44,32)	RS1/16SS0R0J	R 7926 (A,85,70)	RS1/16SS105J	
R 7768 (A,52,33)	RS1/16SS0R0J	R 7930 (A,93,69)	RS1/16SS221J	
R 7769 (A,51,33)	RS1/16SS0R0J	R 7931 (A,89,53)	RS1/16SS221J	
		R 7942 (B,59,52)	RS1/16SS273J	
R 7770 (A,50,33)	RS1/16SS0R0J	R 7943 (B,59,51)	RS1/16SS273J	D
R 7771 (A,49,33)	RS1/16SS331J			
R 7772 (A,52,30)	RS1/16SS103J	R 7945 (A,91,68)	RS1/16SS103J	
R 7773 (A,51,31)	RS1/16SS103J	R 7951 (A,91,70)	RS1/16SS101J	
R 7774 (A,50,31)	RS1/16SS103J	R 7955 (A,99,63)	RS1/16SS104J	
		R 7956 (A,100,60)	RAB4CQ151J	
R 7775 (B,55,42)	RS1/10SR0R0J	R 7957 (A,100,58)	RAB4CQ151J	
R 7776 (A,34,43)	RS1/16SS0R0J			
R 7778 (B,51,35)	RS1/16SS153J	R 7958 (A,102,60)	RAB4CQ0R0J	
R 7780 (B,48,32)	RS1/16SS223J	R 7959 (A,102,58)	RAB4CQ0R0J	
		R 7967 (A,94,52)	RS1/16SS331J	
R 7781 (B,43,30)	RS1/16SS223J	R 7968 (A,99,62)	RS1/16SS221J	
R 7782 (B,48,31)	RS1/16SS0R0J	R 7977 (A,101,66)	RS1/16SS181J	E
R 7783 (B,36,32)	RS1/16SS163J			
R 7784 (B,38,32)	RS1/16SS163J	R 7981 (A,96,52)	RS1/16SS0R0J	
R 7785 (B,35,32)	RS1/16SS101J	R 7982 (B,63,47)	RS1/16SS101J	
		R 7983 (B,67,47)	RS1/16SS101J	
R 7786 (B,46,30)	RS1/16SS0R0J	R 7984 (A,67,48)	RS1/16SS101J	
R 7787 (A,9,112)	RS1/16SS153J	R 7985 (A,63,48)	RS1/16SS101J	
R 7788 (A,6,111)	RS1/16SS683J			
R 7789 (A,5,104)	RS1/16SS562J	R 7986 (B,64,35)	RS1/16SS75R0D	
R 7790 (B,48,35)	RS1/10SR623J	R 7987 (B,67,35)	RS1/16SS75R0D	
		R 7988 (A,66,36)	RS1/16SS75R0D	
		R 7989 (A,62,36)	RS1/16SS75R0D	
R 7791 (A,5,101)	RS1/16SS104J			
R 7792 (A,8,101)	RS1/16SS274J	R 7991 (B,58,26)	RS1/16SS0R0J	F
R 7793 (B,31,41)	RS1/16SS0R0J	R 7992 (B,58,47)	RS1/16SS0R0J	
R 7794 (A,12,106)	RS1/16SS0R0J	R 8001 (B,117,104)	RS1/16SS0R0J	
R 7795 (A,9,114)	RS1/16SS0R0J	R 8002 (B,119,104)	RS1/16SS0R0J	
		R 8003 (B,120,102)	RS1/16SS151J	
R 7797 (B,46,35)	RS1/16SS153J			
R 7798 (A,28,30)	RS1/16SS223J			
R 7804 (A,27,32)	RS1/16SS0R0J			

	1		2	3		4
	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	R 8004	(B,118,101)	RS1/16SS151J	R 8129	(B,156,83)	RS1/16SS0R0J
	R 8006	(A,118,94)	RS1/16SS103J	R 8130	(B,156,84)	RS1/16SS0R0J
	R 8007	(A,118,93)	RS1/16SS102J	R 8132	(A,157,77)	RS1/16SS0R0J
	R 8008	(B,116,104)	RS1/16SS102J	R 8133	(A,156,77)	RS1/16SS0R0J
	R 8009	(B,115,99)	RS1/16SS473J	R 8134	(A,155,77)	RS1/16SS1002D
■	R 8010	(B,115,100)	RS1/16SS473J	R 8135	(A,153,78)	RS1/16SS2202D
	R 8011	(A,109,82)	RS1/16SS223J	R 8136	(A,152,77)	RS1/16SS3302D
	R 8012	(A,109,80)	RS1/16SS433J	R 8137	(A,156,81)	RS1/16SS102J
	R 8013	(A,122,58)	RS1/16SS0R0J	R 8138	(B,146,87)	RS1/16SS103J
	R 8014	(A,117,57)	RS1/16SS0R0J	R 8139	(A,152,79)	RS1/16SS103J
B	R 8015	(B,121,71)	RS1/16SS0R0J	R 8140	(A,151,81)	RS1/10SR0R0J
	R 8016	(A,122,54)	RS1/16SS0R0J	R 8141	(A,156,80)	RS1/16SS102J
	R 8017	(A,114,80)	RS1/16SS273J	R 8142	(A,160,84)	RS1/16SS0R0J
	R 8018	(B,107,71)	RS1/16SS102J	R 8143	(A,167,80)	RS1/16SS4702D
	R 8019	(B,121,70)	RS1/16SS271J	R 8144	(A,167,79)	RS1/16SS4702D
■	R 8021	(B,121,69)	RS1/16SS0R0J	R 8145	(A,167,78)	RS1/16SS4702D
	R 8022	(B,107,69)	RS1/16SS105J	R 8146	(B,149,76)	RS1/10SR0R0J
	R 8024	(A,119,68)	RS1/16SS333J	R 8148	(A,156,82)	RS1/16SS102J
	R 8025	(A,120,68)	RS1/16SS333J	R 8149	(A,156,79)	RS1/16SS102J
	R 8026	(B,123,68)	RS1/16SS330J	R 8150	(B,152,86)	RS1/16SS0R0J
C	R 8027	(A,118,63)	RS1/16SS333J	R 8201	(B,76,23)	RS1/16SS0R0J
	R 8028	(A,119,65)	RS1/16SS333J	R 8202	(B,141,16)	RS1/16SS0R0J
	R 8029	(B,123,66)	RS1/16SS330J	R 8203	(B,75,24)	RS1/16SS0R0J
	R 8031	(A,109,61)	RS1/16SS103J	R 8205	(B,74,23)	RS1/16SS0R0J
	R 8032	(A,108,63)	RS1/16SS0R0J	R 8209	(B,89,126)	RS1/10SR0R0J
■	R 8033	(B,123,65)	RS1/16SS330J	R 8210	(B,78,124)	RS1/10SR0R0J
	R 8035	(B,121,64)	RS1/16SS0R0J	R 8216	(B,73,17)	RS1/16SS0R0J
	R 8036	(A,106,63)	RS1/16SS472J	R 8218	(B,72,20)	RS1/16SS0R0J
	R 8037	(B,123,63)	RS1/16SS101J	R 8220	(B,71,17)	RS1/16SS0R0J
				R 8222	(B,69,20)	RS1/16SS0R0J
D	R 8038	(A,125,53)	RS1/16SS473J			
	R 8040	(A,124,53)	RS1/16SS473J	R 8223	(B,69,18)	RS1/16SS0R0J
	R 8041	(A,126,53)	RS1/16SS473J	R 8227	(B,67,17)	RS1/16SS0R0J
	R 8042	(B,107,63)	RAB4CQ220J	R 8228	(B,66,19)	RS1/16SS0R0J
	R 8043	(B,107,60)	RAB4CQ220J	R 8229	(B,66,17)	RS1/16SS0R0J
■				R 8231	(B,65,19)	RS1/16SS0R0J
	R 8044	(B,112,58)	RAB4CQ220J			
	R 8045	(B,115,58)	RAB4CQ220J	R 8232	(B,65,17)	RS1/16SS0R0J
	R 8046	(A,122,76)	RS1/16SS472J	R 8233	(B,64,19)	RS1/16SS0R0J
	R 8048	(B,105,63)	RAB4CQ0R0J	R 8235	(B,63,17)	RS1/16SS0R0J
E	R 8049	(B,105,60)	RAB4CQ0R0J	R 8236	(B,63,19)	RS1/16SS0R0J
				R 8237	(B,62,17)	RS1/16SS0R0J
	R 8050	(B,112,56)	RAB4CQ0R0J			
	R 8051	(B,115,56)	RAB4CQ0R0J	R 8239	(B,61,20)	RS1/16SS0R0J
	R 8052	(B,105,66)	RS1/16SS100J	R 8240	(B,60,19)	RS1/16SS0R0J
■	R 8057	(A,129,75)	RS1/16SS821J	R 8241	(B,60,20)	RS1/16SS0R0J
				R 8242	(B,59,18)	RS1/16SS0R0J
				R 8243	(B,58,21)	RS1/16SS0R0J
	R 8058	(A,129,74)	RS1/16SS0R0J			
	R 8059	(A,129,72)	RS1/16SS821J			
F	R 8061	(B,122,59)	RAB4CQ221J	R 8244	(B,57,19)	RS1/16SS0R0J
	R 8062	(B,122,57)	RAB4CQ0R0J	R 8245	(B,57,21)	RS1/16SS0R0J
	R 8065	(B,124,73)	RS1/16SS0R0J	R 8249	(B,54,23) (A,B)	RS1/16SS0R0J
				R 8250	(B,53,21) (A,B)	RS1/16SS0R0J
	R 8066	(B,128,69)	RS1/16SS0R0J	R 8251	(B,52,23) (A,B)	RS1/16SS0R0J
■	R 8070	(A,118,72)	RS1/16SS222J	R 8254	(B,51,20) (A,B)	RS1/16SS0R0J
	R 8071	(A,113,80)	RS1/16SS0R0J	R 8255	(B,50,20) (A,B)	RS1/16SS0R0J
	R 8114	(A,144,87)	RS1/16SS10R0D			
	R 8115	(A,141,81)	RS1/16SS1501D	R 8304	(B,157,16)	RS1/16SS471J
	R 8116	(A,141,79)	RS1/16SS2402D	R 8305	(B,156,18)	RS1/16SS471J
F	R 8117	(A,141,77)	RS1/16SS3302D	R 8306	(B,156,16)	RS1/16SS0R0J
				R 8307	(B,165,19)	RS1/16SS0R0J
	R 8119	(B,144,82)	RS1/16SS4702D	R 8308	(B,164,19)	RS1/16SS0R0J
	R 8120	(A,142,77)	RS1/16SS4702D			
	R 8121	(A,142,81)	RS1/16SS432J	R 8309	(B,162,18)	RS1/16SS0R0J
	R 8127	(B,153,80)	RS1/16SS471J	R 8310	(B,161,18)	RS1/16SS0R0J
	R 8128	(B,153,81)	RS1/16SS0R0J	R 8311	(B,160,19)	RS1/16SS0R0J

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 7060 (A,23,77) 10 uF
 C 7061 (A,23,75) 10 uF
 C 7074 (A,71,89)

CCG1236
 CCG1236
 CKSRYB105K10

C 7306 (A,128,41)
 C 7501 (B,128,27)
 C 7502 (B,87,14)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

A

C 7085 (B,137,76)
 C 7086 (A,68,86) 10 uF
 C 7101 (B,58,77)
 C 7102 (B,60,76)
 C 7103 (B,61,78)

CKSSYB104K10
 CCG1192
 CCSSCH150J50
 CCSSCH220J50
 CKSSYB152K50

C 7503 (A,104,39) 10 uF
 C 7504 (A,156,50) 10 uF
 C 7505 (A,104,38)
 C 7506 (A,156,49)
 C 7601 (B,165,36) 10 uF

CCG1192
 CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CCG1192

C 7104 (B,58,66)
 C 7105 (B,60,67)
 C 7106 (B,57,74)
 C 7107 (B,61,66)
 C 7108 (B,57,69)

CCSSCH150J50
 CCSSCH220J50
 CCSSCH102J50
 CKSSYB472K50
 CCSSCH102J50

C 7602 (B,147,24) 10 uF
 C 7603 (B,142,60) 10 uF
 C 7604 (B,165,34)
 C 7605 (B,146,24)
 C 7606 (B,141,59)

CCG1192
 CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

B

C 7109 (B,59,57)
 C 7110 (B,52,77)
 C 7111 (B,55,66)
 C 7112 (B,48,72)
 C 7113 (B,46,78)

CKSSYB103K16
 CKSSYB222K50
 CKSSYB153K16
 CKSRYB104K50
 CKSRYB104K50

C 7607 (B,167,25)
 C 7608 (B,138,21)
 C 7609 (B,143,50)
 C 7610 (B,167,24) 10 uF
 C 7611 (B,139,19) 10 uF

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CCG1192

C 7114 (B,47,63)
 C 7115 (B,46,71) 4.7 uF
 C 7116 (A,40,76) 10 uF
 C 7117 (A,41,67) 10 uF
 C 7121 (A,57,76) 47 uF

CKSRYB104K50
 CCG1201
 CCG1236
 CCG1236
 CCG1229

C 7612 (B,145,51) 10 uF
 C 7613 (B,161,23)
 C 7614 (B,164,23)
 C 7615 (B,144,19)
 C 7616 (B,147,19)

CCG1192
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50

C

C 7122 (A,57,70) 47 uF
 C 7124 (A,57,73) 47 uF
 C 7125 (A,57,67) 47 uF
 C 7201 (A,143,67)
 C 7202 (A,146,67)

CCG1229
 CCG1229
 CCG1229
 CKSSYB104K10
 CKSSYB104K10

C 7617 (B,150,54)
 C 7618 (B,150,56)
 C 7701 (B,48,40)
 C 7705 (B,26,27) 10 uF
 C 7707 (A,43,52)

CKSSYB102K50
 CKSSYB102K50
 CCSSCH680J50
 CCG1192
 CCSSCH120J50

C 7204 (A,147,71)
 C 7207 (B,89,88) 10 uF
 C 7208 (B,89,90) 10 uF
 C 7209 (B,95,110) 10 uF
 C 7210 (B,95,108) 10 uF

CKSSYB104K10
 CCG1236
 CCG1236
 CCG1236
 CCG1236

C 7708 (B,23,27) 10 uF
 C 7710 (B,24,25)
 C 7711 (B,28,23)
 C 7713 (A,40,48)
 C 7714 (A,20,29)

CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CCSSCH120J50
 CKSRYB105K10

D

C 7211 (A,92,102)
 C 7212 (A,86,81)
 C 7213 (B,103,100)
 C 7214 (B,95,79)
 C 7215 (A,92,104)

CCSSCH471J50
 CCSSCH471J50
 CEVW101M16
 CEVW101M16
 CCSSCH270J50

C 7715 (B,11,25)
 C 7717 (A,34,47) 10 uF
 C 7718 (A,37,46)
 C 7719 (A,18,16)

CKSRYB105K10
 CCG1192
 CKSSYB104K10
 CCSSCH470J50

C 7216 (A,87,84)
 C 7217 (B,106,104)
 C 7218 (B,100,83)
 C 7219 (A,91,105)
 C 7220 (A,85,84)

CCSSCH270J50
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB222K50
 CCSSCH821J50

C 7720 (A,19,20)
 C 7721 (A,18,26)
 C 7722 (A,19,24)
 C 7723 (A,34,45) 10 uF

CCSSCH220J50
 CCSSCH220J50
 CCSSCH220J50
 CCG1192

E

C 7221 (A,96,113)
 C 7222 (A,90,92)
 C 7223 (A,91,107)
 C 7224 (A,85,86)
 C 7225 (B,104,105) 22 uF

CKSRYB104K50
 CKSRYB104K50
 CKSRYB105K10
 CKSRYB105K10
 CCG1254

C 7724 (B,24,38) 10 uF
 C 7725 (A,10,26) 10 uF
 C 7726 (A,12,24)
 C 7727 (B,26,35)
 C 7728 (B,27,40)

CCG1192
 CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CKSRYB105K10

C 7226 (B,98,85) 22 uF
 C 7229 (A,104,110)
 C 7230 (A,104,107)
 C 7231 (A,104,102)
 C 7232 (A,102,102)

CCG1254
 CKSSYB104K16
 CKSSYB104K16
 CKSSYB102K50
 CKSSYB472K50

C 7729 (A,9,15)
 C 7730 (A,36,45)
 C 7731 (A,11,13) 10 uF
 C 7732 (B,38,36)
 C 7733 (B,39,38)

CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CCSSCH561J50
 CCSSCH680J50

F

C 7233 (A,98,90)
 C 7234 (A,98,87)
 C 7235 (A,98,82)
 C 7236 (A,96,82)
 C 7301 (B,80,45) 22 uF

CKSSYB104K16
 CKSSYB104K16
 CKSSYB102K50
 CKSSYB472K50
 DCH1256

C 7734 (A,15,28)
 C 7735 (A,15,30)
 C 7736 (B,149,70)
 C 7737 (B,150,67) 4.7 uF
 C 7738 (B,148,66)

CKSSYB102K50
 CKSSYB102K50
 CKSQYB225K10
 CCG1201
 CKSSYB104K10

C 7303 (A,125,39)
 C 7305 (B,86,48) 22 uF

CKSSYB104K10
 DCH1256

C 7739 (B,150,64) 10 uF
 C 7740 (B,46,41)
 C 7741 (B,147,62) 10 uF
 C 7742 (B,154,67)

CCG1192
 CKSSYB104K10
 CCG1192
 CKSSYB104K10

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 7743	(B,147,61)	CKSSYB104K10		C 7935	(A,68,59)	CKSRYB105K16	
C 7744	(A,37,44)	CCSSCH151J50		C 7936	(A,72,67) 10 uF	CCG1192	
C 7745	(A,24,42)	CKSRYB105K10		C 7937	(A,74,62)	CKSSYB474K6R3	A
C 7747	(A,33,39)	CKSRYB105K10		C 7939	(A,78,70)	CKSSYB104K10	
C 7748	(A,55,40) 10 uF	CCG1192		C 7940	(A,78,69)	CCSSCH102J50	
C 7749	(A,53,39)	CKSSYB104K10					
C 7751	(A,53,37)	CKSSYB104K10		C 7941	(A,78,54)	CKSSYB104K10	
C 7754	(A,42,34)	CKSSYB104K10		C 7942	(A,79,54)	CKSSYB104K10	
C 7755	(A,37,33) 10 uF	CCG1192		C 7944	(B,81,71)	CKSRYB105K16	
C 7756	(A,41,32) 10 uF	CCG1192		C 7945	(A,79,73) 10 uF	CCG1192	
				C 7946	(A,81,70)	CKSSYB104K10	
C 7757	(A,37,35) 10 uF	CCG1192		C 7947	(A,82,54)	CKSSYB104K10	
C 7758	(A,37,37)	CKSSYB104K10		C 7948	(A,82,71)	CKSSYB104K10	
C 7759	(A,49,31)	CCSSCH220J50		C 7949	(A,84,49) 10 uF	CCG1192	
C 7761	(B,36,39)	CKSRYB105K10		C 7950	(A,83,70)	CKSSYB104K10	B
C 7762	(A,32,42)	CKSRYB105K10		C 7951	(A,84,54)	CKSSYB104K10	
C 7763	(B,54,35) 2.2 uF	CCG1218					
C 7765	(B,44,29) 0.47 uF	CCG1339		C 7952	(A,85,54)	CKSSYB104K10	
C 7766	(B,37,34)	CCSSCH101J50		C 7953	(A,78,44) 10 uF	CCG1192	
C 7767	(B,37,32)	CCSSCH101J50		C 7954	(A,87,72)	CCSSCH5R0C50	
C 7768	(B,46,31)	CKSSYB104K10		C 7955	(A,86,72)	CCSSCH6R0D50	
				C 7956	(A,90,65)	CKSSYB104K10	
C 7769	(A,8,114)	CKSSYB683K10		C 7957	(A,90,64)	CKSSYB104K10	
C 7770	(A,7,112)	CKSRYB474K16		C 7958	(A,90,68)	CKSSYB103K16	
C 7771	(A,5,106) 4.7 uF	CCG1331		C 7963	(A,95,64) 1 uF	DCH1246	
C 7772	(A,5,102)	CCSSCH180J50		C 7964	(A,93,55) 1 uF	DCH1246	
C 7773	(A,7,101)	CCSSCH6R0D50		C 7965	(A,95,63)	CKSSYB103K16	C
C 7774	(A,11,105)	CKSSYB104K10		C 7966	(A,93,54)	CKSSYB103K16	
C 7775	(A,20,30)	CKSRYB105K10		C 7970	(B,65,51)	CKSSYB104K10	
C 7779	(A,26,32)	CKSSYB104K10		C 7971	(B,68,51)	CKSSYB104K10	
C 7780	(A,12,109) 22 uF	DCH1256		C 7972	(A,65,52)	CKSSYB104K10	
C 7783	(B,41,41)	CKSSYB104K10		C 7973	(A,61,53)	CKSSYB104K10	
C 7785	(B,136,64)	CCSSCH101J50		C 7974	(A,96,70) 1 uF	DCH1246	
C 7786	(B,22,25)	CKSSYB104K10		C 7975	(A,96,69)	CKSSYB103K16	
C 7789	(B,50,34) 2.2 uF	CCG1218		C 7979	(B,62,56)	CKSSYB104K10	
C 7852	(B,65,108)	CKSSYB103K16		C 7980	(B,57,49) 10 uF	CCG1192	
C 7878	(B,67,110)	CKSSYB104K10		C 8004	(B,110,72) 10 uF	CCG1192	
C 7879	(B,52,107)	CKSSYB104K10		C 8007	(B,117,102)	CCSSCH270J50	D
C 7880	(B,47,107)	CKSSYB104K10		C 8008	(B,111,71)	CKSSYB104K10	
C 7909	(B,65,40)	CKSRYB105K10		C 8009	(B,117,98)	CCSSCH270J50	
C 7910	(B,63,40)	CKSRYB105K10		C 8012	(A,113,67)	CKSSYB104K10	
C 7911	(B,68,40)	CKSRYB105K10		C 8013	(A,115,67)	CKSSYB104K10	
C 7912	(B,67,40)	CKSRYB105K10		C 8014	(A,117,66)	CKSSYB104K10	
C 7913	(A,65,41)	CKSRYB105K10		C 8016	(B,106,71)	CCSSCH120J50	
C 7914	(A,67,41)	CKSRYB105K10		C 8017	(B,105,71)	CCSSCH150J50	
C 7915	(A,61,42)	CKSRYB105K10		C 8019	(A,112,66)	CKSSYB104K10	
C 7916	(A,63,41)	CKSRYB105K10		C 8023	(B,126,63)	CCSSCH470J50	
C 7917	(A,65,58) 10 uF	CCG1192		C 8024	(A,112,63)	CKSSYB104K10	E
C 7921	(B,65,46)	CKSSYB104K10		C 8025	(A,115,62)	CKSSYB104K10	
C 7922	(B,68,46)	CKSSYB104K10		C 8026	(A,117,64)	CKSSYB104K10	
C 7923	(A,66,47)	CKSSYB104K10		C 8028	(A,131,69) 10 uF	CCG1192	
C 7924	(A,62,48)	CKSSYB104K10		C 8029	(A,130,69)	CKSSYB104K10	
C 7925	(B,72,61)	CKSRYB105K16		C 8031	(A,125,72)	CKSSYB104K10	
C 7926	(A,74,65)	CCSSCH102J50		C 8032	(A,125,73) 10 uF	CCG1192	
C 7927	(A,73,65)	CKSSYB104K10		C 8033	(A,131,75)	CKSSYB102K50	
C 7928	(B,73,59)	CKSRYB105K16		C 8034	(A,131,73)	CKSSYB102K50	
C 7929	(A,73,63)	CKSSYB103K16		C 8101	(A,157,86)	CKSSYB102K50	
C 7930	(A,73,62)	CKSSYB474K6R3		C 8102	(A,156,86)	CKSSYB103K16	F
C 7931	(A,73,61)	CKSSYB474K6R3		C 8103	(A,145,87)	CKSSYB104K10	
C 7932	(B,74,57)	CKSRYB105K16		C 8104	(A,155,86)	CKSSYB104K10	
C 7933	(A,73,59)	CKSSYB104K10		C 8105	(A,152,86)	CKSSYB103K16	
C 7934	(A,74,59)	CCSSCH102J50		C 8108	(A,142,79)	CCSSCH101J50	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 8109 (A,148,81) CKSSYB104K10
 C 8110 (A,148,80) CKSSYB104K10
 C 8111 (B,158,76) CKSRYB104K16
 C 8112 (B,158,78) CKSRYB104K16
 C 8113 (A,160,87) CKSRYB104K16

C 8205 (A,81,116) 10 uF CCG1236
 C 8208 (B,51,28) (A,B) CKSSYB104K10
 C 8501 (A,17,91) CKSSYB104K10
 C 8503 (B,142,92) CKSSYB104K10
 C 8505 (A,6,91) CKSSYB104K10

C 8506 (A,24,120) CKSSYB104K10
 C 8507 (A,26,125) CKSSYB104K10
 C 8508 (A,23,127) CKSSYB104K10
 C 8517 (A,54,122) (A,B) CKSRYB104K50

C 8601 (A,15,9) CCSSCH100D50
 C 8602 (A,18,7) CKSSYB104K16
 C 8604 (A,27,7) 2.2 uF CCG1218
 C 8606 (A,29,10) CKSSYB104K10
 C 8607 (A,30,15) CKSSYB104K10

C 8608 (A,14,10) 10 uF CCG1192

R 1004 (B,12,20)
 R 1007 (B,12,21)
 R 1019 (B,33,7)
 R 1025 (B,36,6)
 R 1027 (A,40,18)

R 1101 (B,15,57)
 R 1102 (B,10,56)
 R 1103 (B,14,61)
 R 1104 (B,11,59)
 R 1105 (B,17,54)

R 1106 (B,10,57)
 R 1109 (B,6,57)
 R 1110 (B,16,54)
 R 1111 (B,6,63)
 R 1112 (B,5,58)

R 1113 (B,15,59)
 R 1114 (B,19,57)
 R 1115 (B,6,61)
 R 1116 (B,6,62)
 R 1117 (B,17,59)

R 1118 (B,16,59)
 R 1223 (A,42,50)
 R 1225 (B,29,8)
 R 1251 (A,5,48)
 R 1252 (A,5,47)

R 1253 (A,5,46)
 R 1254 (A,5,45)
 R 1255 (A,21,48)
 R 1256 (A,21,46)
 R 1257 (B,8,37)

R 1258 (A,19,39)
 R 1401 (B,34,28)
 R 1402 (B,34,47)
 R 1405 (B,55,35)
 R 1406 (B,39,45)

R 1480 (A,72,24)
 R 1481 (A,72,28)
 R 1482 (A,72,32)
 R 1483 (A,72,35)
 R 1484 (A,72,39)

R 1485 (A,55,22)
 R 1486 (A,55,28)
 R 1487 (A,56,37)
 R 1488 (A,55,40)
 R 1489 (A,54,30)

R 1490 (A,72,21)
 R 1501 (B,48,21)
 R 1503 (B,46,21)
 R 1504 (A,50,17)
 R 1505 (B,45,15)

R 1506 (B,45,14)
 R 1507 (B,43,17)
 R 1508 (B,42,18)
 R 1509 (A,20,34)
 R 1510 (A,11,29)

R 1512 (A,55,32)
 R 1513 (A,23,38)
 R 1514 (A,24,40)
 R 1516 (A,24,36)
 R 1517 (B,57,22)

RS1/16SS4702D
 RS1/16SS6801D
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J

RS1/16SS104J
 RS1/16SS104J
 RS1/16SS4300F
 RS1/16SS5100F
 RS1/16SS4300F

RS1/16SS5600F
 RS1/16SS3R3J
 RS1/16SS3R3J
 RS1/10SR3R3J
 RS1/10SR3R3J

RS1/10SR3R9J
 RS1/10SR3R3J
 RS1/10SR2R7J
 RS1/10SR2R7J
 RS1/10SR3R9J

RS1/10SR3R9J
 RS1/16SS561J
 RS1/16SS471J
 RS1/16SS333J
 RS1/16SS473J

RS1/16SS333J
 RS1/16SS473J
 RS1/16SS183J
 RS1/16SS752J
 RS1/16SS221J

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS472J

RAB4CQ560J
 RAB4CQ560J
 RAB4CQ560J
 RAB4CQ560J
 RAB4CQ560J

RAB4CQ560J
 RAB4CQ560J
 RAB4CQ560J
 RAB4CQ560J
 RS1/16SS560J

RS1/16SS560J
 RS1/16SS122J
 RS1/16SS105J
 RS1/16SS121J
 RS1/16SS101J

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS221J
 RS1/16SS102J
 RS1/16SS102J

RS1/16SS470J
 RS1/16SS103J
 RS1/16SS183J
 RS1/16SS104J
 RS1/16SS103J

C**Unit Number: CWX4496****Unit Name : DVD Core Unit****MISCELLANEOUS**

IC 1002 (B,15,13) Regulator IC S-1133B50-U5
 IC 1003 (B,37,11) IC S-1200B50-M5
 IC 1004 (B,64,28) IC NJM2855DL1-33
 IC 1251 (A,12,42) IC BA5839FP
 IC 1401 (B,27,41) Flash ROM Unit CWW7439

IC 1402 (B,45,28) Flash ROM Unit CWW7440
 IC 1480 (A,64,30) RAM IC M12L64164A-5TG2Y
 IC 1501 (A,39,33) IC MN2DS0018MA
 IC 1801 (B,34,16) D/A Converter PCM1753DBQ
 IC 1953 (B,57,17) IC S-1135D12-A6

Q 1101 (B,12,59) Transistor LSCR523UB
 Q 1102 (B,13,56) Transistor LSCR523UB
 Q 1103 (B,9,63) Transistor 2SB1132
 Q 1104 (B,22,54) Transistor 2SB1132
 L 1501 (A,54,31) Inductor CTF1743

L 1511 (A,48,17) Chip Beads VTL1126
 L 1902 (A,17,17) Inductor CTF1487
 L 1903 (B,63,16) Inductor CTF1558
 L 1904 (A,68,18) Ferrite Bead CTF1528
 X 1501 (B,48,18) Crystal Resonator 27.000 MHz CSS1823

F 1001 (A,14,19) Chip EMI Filter DTF1106
 F 1002 (B,63,18) Chip EMI Filter DTL1106
 S 1 (A,47,55) Spring Switch(HOME) CSN1080
 S 3 (B,25,13) Spring Switch(12EJ) CSN1081
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B) CCP1447

VR1102 (A,7,60) Semi-fixed 15 kohm(B) CCP1449
 CN1101 (A,21,63) Connector CKS6331
 CN1952 (A,42,11) Connector CKS6025

RESISTORS

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1518	(B,33,31)	RS1/16SS103J		C 1108	(A,19,57)	CKSSYB103K16	
R 1519	(A,24,43)	RS1/16SS102J		C 1109	(A,7,57)	CKSRYB224K16	
R 1522	(A,21,37)	RS1/16SS104J		C 1110	(A,17,58)	CKSSYB103K16	
R 1523	(A,22,37)	RS1/16SS221J					
R 1524	(B,29,33)	RS1/16SS472J		C 1111	(A,9,66)	CKSRYB224K16	A
				C 1112	(B,17,52) 22 uF	DCH1256	
R 1525	(A,24,44)	RS1/16SS103J		C 1113	(B,8,58) 22 uF	DCH1256	
R 1526	(A,22,40)	RS1/16SS103J		C 1210	(B,76,34)	CKSSYB104K16	
R 1527	(A,35,49)	RS1/16SS682J		C 1251	(B,12,41)	CEVW101M16	
R 1528	(B,19,34)	RS1/16SS103J					
R 1529	(B,35,21)	RS1/16SS103J		C 1252	(B,7,41) 4.7 uF	CCG1222	
				C 1253	(B,7,39)	CKSSYB104K16	
R 1530	(B,17,34)	RS1/16SS103J		C 1254	(A,6,38)	CKSSYB104K16	
R 1531	(B,33,30)	RS1/16SS103J		C 1255	(A,18,37)	CKSSYB104K16	
R 1532	(A,24,42)	RS1/16SS101J		C 1401	(B,34,27)	CKSSYB104K16	
R 1533	(A,29,47)	RS1/16SS104J					
R 1534	(B,29,48)	RS1/16SS221J		C 1403	(B,39,40)	CKSSYB104K10	B
				C 1404	(B,40,40) 4.7 uF	CCG1201	
R 1535	(A,22,44)	RS1/16SS104J		C 1408	(B,57,27)	CKSSYB104K10	
R 1536	(B,32,48)	RS1/16SS104J		C 1409	(B,58,29) 4.7 uF	CCG1201	
R 1537	(A,24,46)	RS1/16SS104J		C 1410	(B,33,29)	CKSSYB104K16	
R 1538	(A,55,35)	RS1/16SS104J					
R 1539	(B,33,48)	RS1/16SS104J		C 1480	(A,71,19)	CKSSYB104K10	
				C 1481	(A,72,22)	CKSSYB104K10	
R 1540	(A,26,46)	RS1/16SS221J		C 1482	(A,72,26)	CKSSYB104K10	
R 1541	(A,26,45)	RS1/16SS221J		C 1484	(A,72,30)	CKSSYB104K10	
R 1542	(B,26,34)	RS1/16SS103J		C 1485	(A,72,41)	CKSSYB104K10	
R 1546	(A,33,49)	RS1/16SS682J					
R 1601	(A,32,17)	RS1/16SS123J		C 1487	(A,57,29)	CKSSYB104K10	
				C 1488	(A,57,25)	CKSSYB104K10	
R 1602	(A,32,18)	RS1/16SS123J		C 1489	(A,64,17) 10 uF	CCG1192	C
R 1603	(B,31,21)	RS1/16SS1002D		C 1490	(A,66,18)	CKSSYB102K50	
R 1604	(A,23,21)	RS1/16SS105J		C 1501	(B,61,20) 10 uF	CCG1192	
R 1605	(A,22,23)	RS1/16SS105J					
R 1670	(B,40,21)	RS1/16SS1002D		C 1502	(B,54,20) 10 uF	CCG1192	
				C 1503	(A,54,33)	CKSSYB104K10	
R 1671	(B,42,19)	RS1/16SS2402D		C 1504	(A,53,24)	CKSSYB104K10	
R 1672	(A,39,18)	RS1/16SS2000D		C 1505	(A,53,27)	CKSSYB104K10	
R 1674	(A,36,17)	RS1/16SS3002D		C 1506	(B,52,35)	CKSSYB104K10	
R 1801	(B,41,8)	RS1/16SS104J					
R 1802	(B,43,8)	RS1/16SS104J		C 1507	(A,53,36)	CKSSYB104K10	
				C 1508	(A,53,39)	CKSSYB104K10	
R 1803	(B,37,13)	RS1/16SS821J		C 1509	(A,53,42)	CKSSYB104K10	D
R 1804	(B,39,14)	RS1/16SS821J		C 1510	(B,51,18)	CCSSCH100D50	
R 1982	(A,10,62)	RS1/16SS822J		C 1511	(A,48,18)	CKSSYB104K10	
R 1983	(B,40,20)	RS1/16SS1000D					
R 1987	(B,43,21)	RS1/16SS0R0J		C 1512	(B,45,18)	CCSSCH100D50	
				C 1513	(A,48,48)	CKSSYB104K10	
				C 1514	(B,44,21)	CKSSYB104K10	
				C 1515	(A,45,18)	CKSSYB104K10	
				C 1516	(A,43,48)	CKSSYB104K10	
				C 1517	(A,42,48)	CKSSYB104K10	
				C 1518	(A,38,48)	CKSSYB104K10	
				C 1519	(A,34,47)	CKSSYB104K10	
				C 1520	(A,27,47)	CKSSYB104K10	E
				C 1521	(A,24,34)	CKSSYB104K10	
				C 1522	(A,25,38)	CKSSYB104K10	
				C 1523	(A,20,46)	CKSSYB224K6R3	
				C 1524	(A,20,48)	CKSSYB473K16	
				C 1526	(A,24,37)	CKSSYB103K16	
				C 1528	(B,30,48)	CCSSCH471J50	
				C 1601	(A,32,19)	CKSSYB103K16	
				C 1602	(A,34,17)	CCSSCH101J50	
				C 1603	(A,33,18)	CCSSCH101J50	
				C 1604	(A,30,17)	CCSSCH680J50	
				C 1605	(A,30,18)	CCSSCH680J50	F
C 1106	(B,7,66)	CKSSYB103K16		C 1606	(A,35,19)	CKSSYB104K10	
C 1107	(B,25,53)	CKSSYB103K16		C 1607	(A,20,24) 10 uF	CCG1192	

CAPACITORS

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 1608 (A,28,18) 4.7 uF
C 1609 (A,26,22)
C 1612 (A,24,24)

CCG1201
CKSSYB104K10
CKSSYB104K10

L 4502 (B,9,31) Inductor
L 4701 (A,71,60) Inductor
L 4721 (A,65,35) Inductor

ATL7039
CTH1500
CTH1499

A

C 1613 (A,24,25)
C 1614 (A,22,24)
C 1615 (A,23,26)
C 1616 (A,24,27)
C 1617 (B,26,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

L 4741 (A,70,48) Inductor
L 4901 (B,58,43) Ferrite Bead
L 4909 (A,57,39) Inductor
L 5001 (A,72,23) Chip Ferrite Bead
L 5002 (A,68,20) Chip Ferrite Bead

CTH1499
CTF1528
CTF1787
BTX1046
VTL1183

C 1618 (A,22,29)
C 1619 (A,23,30)
C 1620 (B,27,30)
C 1621 (A,22,31)
C 1622 (A,24,31)

CCSSCH101J50
CKSSYB562K25
CKSSYB224K6R3
CKSSYB224K6R3
CKSSYB333K16

TH4381 (A,26,73) Thermistor
X 4001 (A,50,29) Resonator 24 MHz
X 4002 (A,45,29) Resonator 32.768 kHz
X 4401 (B,31,56) Crystal Resonator 14.745 6 MHz
X 4901 (B,61,44) VCXO 11.289 6 MHz

CCX1084
CSS1773
CSS1807
CSS1835
CWX4566

B

C 1623 (A,27,20)
C 1624 (A,24,32)
C 1625 (A,24,29)
C 1671 (A,41,18)
C 1673 (A,37,19)

CKSRYB105K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CN5001 (B,58,21) Connector
CN5002 (B,21,21) Connector

CKS6499
CKS6556

RESISTORS

C 1674 (B,42,20)
C 1676 (B,38,21)
C 1801 (B,42,10) 4.7 uF
C 1802 (B,46,10) 4.7 uF
C 1803 (B,42,12)

CKSSYB104K10
CKSRYB105K10
CCG1201
CCG1201
CCSRCH182J50

R 4001 (A,28,55)
R 4002 (A,28,52)
R 4003 (A,28,49)
R 4004 (A,28,47)
R 4005 (A,28,44)

RAB4CQ470J
RAB4CQ470J
RAB4CQ470J
RAB4CQ470J
RAB4CQ470J

C

C 1804 (B,45,12)
C 1805 (B,34,13)
C 1806 (B,32,13) 10 uF
C 1809 (B,39,16)
C 1953 (B,60,17)

CCSRCH182J50
CKSSYB104K10
CCG1192
CKSSYB104K10
CKSRYB105K10

R 4006 (A,28,42)
R 4007 (A,51,32)
R 4008 (A,5,24)
R 4010 (A,35,59)
R 4011 (A,25,47)

RS1/16SS470J
RS1/16SS470J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J

C 1954 (B,54,17)
C 1955 (B,77,40)

CKSRYB105K10
CKSSYB104K16

R 4012 (A,26,53)
R 4015 (A,46,32)
R 4017 (A,25,56)
R 4018 (B,51,42)
R 4022 (B,19,44)

RS1/16SS103J
RS1/16SS102J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS330J

D**Unit Number : CWN7890****Unit Name : SOC Dual Core Unit**

D

MISCELLANEOUS

IC 4001 (A,44,44) IC
IC 4301 (A,55,73) RAM IC
IC 4302 (A,36,73) RAM IC
IC 4401 (A,11,61) Flash Software Unit
IC 4402 (B,22,66) IC

MCIMX6U6AVM08AB
H5TQ4G63AFR-PBC
H5TQ4G63AFR-PBC
CWW7906
PE1029B

R 4058 (A,25,45)
R 4059 (A,25,45)
R 4060 (A,26,45)
R 4063 (A,24,50)
R 4064 (A,25,50)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

E

IC 4403 (B,25,57) IC
IC 4501 (B,12,40) IC
IC 4701 (B,70,63) IC
IC 4721 (B,69,36) IC
IC 4741 (B,69,51) IC

TC7WU04FU
AK8814VQ
LTC3612EUDC
LTC3612EUDC
LTC3612EUDC

R 4066 (A,26,50)
R 4067 (A,24,53)
R 4068 (A,25,53)
R 4070 (A,24,56)
R 4073 (A,25,47)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

IC 4766 (A,31,18) Regulator IC
IC 4791 (A,48,24) IC
IC 4792 (A,48,19) Reset IC
IC 4793 (A,46,16) IC
IC 4794 (A,43,21) IC

MM3479A30P
TC7SH08FUS1
PST8429N
TC7SH08FUS1
TC7SH08FUS1

R 4074 (A,26,47)
R 4081 (A,5,36)
R 4084 (A,5,30)
R 4091 (A,48,29)
R 4095 (A,44,25)

RS1/16SS103J
RS1/10SR0R0J
RS1/16SS102J
RS1/16SS225J
RS1/16SS0R0J

F

IC 4796 (A,24,60) Regulator IC
IC 4901 (A,69,27) IC
IC 4903 (A,30,26) IC
Q 4776 (A,64,24) Chip Transistor
Q 4777 (A,63,30) Transistor

MM3479A12P
337S3959
TC7WBL125AFK
2SB1689
LTC044EEB

R 4100 (B,21,43)
R 4101 (B,54,42)
R 4103 (B,14,69)
R 4105 (A,26,56)
R 4111 (B,16,66)

RS1/16SS470J
RS1/16SS0R0J
RS1/16SS220J
RS1/16SS103J
RS1/16SS472J

Q 4778 (A,28,24) Transistor
L 4501 (B,7,50) Inductor

LTC044EEB
ATL7039

R 4141 (B,58,84)
R 4151 (A,30,29)

RS1/16SS103J
RS1/16SS0R0J

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 4154 (B,67,28)	RS1/16SS0R0J	R 4297 (B,64,10)	RS1/16SS103J	A
R 4155 (B,68,28)	RS1/16SS0R0J	R 4300 (B,25,14)	RS1/16SS103J	
R 4157 (A,31,29)	RS1/16SS0R0J	R 4302 (B,47,11)	RS1/16SS104J	
		R 4303 (A,22,53)	RS1/16SS101J	
R 4158 (B,31,39)	RAB4CQ471J			
R 4159 (B,31,42)	RAB4CQ471J	R 4307 (B,55,74)	RS1/16SS1200D	
R 4160 (B,32,44)	RAB4CQ471J	R 4308 (B,36,74)	RS1/16SS1200D	
R 4162 (B,32,47)	RAB4CQ471J	R 4309 (B,52,74)	RS1/16SS2400F	
R 4163 (A,31,41)	RS1/16SS470J	R 4310 (B,33,74)	RS1/16SS2400F	
		R 4314 (B,58,83)	RS1/16SS102J	
R 4164 (B,21,44)	RS1/16SS470J			
R 4165 (A,30,41)	RS1/16SS470J	R 4315 (B,40,83)	RS1/16SS102J	
R 4186 (A,27,40)	RS1/16SS101J	R 4317 (B,20,5)	RS1/16SS0R0J	
R 4209 (A,25,56)	RS1/16SS103J	R 4381 (A,26,74)	RS1/16SS1802D	
R 4213 (A,25,50)	RS1/16SS103J	R 4401 (A,8,48)	RS1/16SS102J	
		R 4402 (A,12,73)	RS1/16SS0R0J	
R 4216 (A,24,47)	RS1/16SS103J			B
R 4220 (A,22,42)	RS1/16SS103J	R 4403 (A,11,49)	RS1/16SS0R0J	
R 4222 (A,24,42)	RS1/16SS103J	R 4404 (B,29,58)	RS1/16SS102J	
R 4224 (A,22,40)	RS1/16SS103J	R 4405 (B,29,56)	RS1/16SS105J	
R 4226 (A,25,42)	RS1/16SS103J	R 4407 (B,16,64)	RS1/16SS471J	
		R 4411 (B,21,58)	RS1/16SS220J	
R 4228 (A,23,42)	RS1/16SS103J			
R 4230 (A,21,40)	RS1/16SS222J	R 4412 (B,25,59)	RS1/16SS102J	
R 4232 (A,21,40)	RS1/16SS222J	R 4413 (A,16,73)	RS1/16SS0R0J	
R 4236 (B,25,40)	RS1/16SS103J	R 4415 (A,27,63)	RS1/16SS0R0J	
R 4237 (B,23,45)	RS1/16SS103J	R 4416 (A,18,58)	RS1/16SS0R0J	
R 4238 (A,57,41)	RS1/16SS0R0J	R 4417 (A,17,74)	RS1/16SS472J	
R 4242 (A,5,26)	RS1/16SS101J	R 4418 (A,17,75)	RS1/16SS472J	C
R 4244 (A,21,42)	RS1/16SS103J	R 4420 (A,21,68)	RS1/16SS101J	
R 4260 (B,52,14)	RS1/16SS103J	R 4421 (A,22,64)	RS1/16SS101J	
R 4261 (B,54,14)	RS1/16SS103J	R 4445 (B,19,47)	RAB4CQ101J	
R 4262 (B,63,10)	RS1/16SS103J	R 4446 (B,19,50)	RAB4CQ101J	
R 4263 (B,25,31)	RS1/16SS103J	R 4447 (B,14,71)	RS1/16SS103J	
R 4264 (B,13,28)	RS1/16SS103J	R 4448 (A,25,70)	RS1/16SS0R0J	
R 4265 (A,14,20)	RS1/16SS103J	R 4449 (B,7,70)	RS1/16SS0R0J	
R 4266 (A,15,20)	RS1/16SS103J	R 4450 (B,6,67)	RS1/16SS330J	
R 4268 (B,24,31)	RS1/16SS103J	R 4451 (B,16,65)	RS1/16SS0R0J	
R 4270 (B,51,33)	RS1/16SS103J	R 4452 (B,14,65)	RS1/16SS561J	D
R 4271 (B,51,32)	RS1/16SS103J	R 4453 (B,6,64)	RS1/16SS561J	
R 4272 (A,28,41)	RS1/16SS470J	R 4454 (B,6,66)	RS1/16SS561J	
R 4273 (A,39,57)	RS1/16SS2400F	R 4455 (B,14,58)	RS1/16SS220J	
R 4274 (B,57,56)	RS1/16SS1001D	R 4456 (B,6,56)	RS1/16SS220J	
R 4275 (B,55,56)	RS1/16SS1001D	R 4457 (B,12,52)	RS1/16SS220J	
R 4276 (B,34,11)	RS1/16SS103J	R 4458 (B,13,52)	RS1/16SS220J	
R 4277 (B,55,48)	RS1/16SS103J	R 4459 (B,15,56)	RS1/16SS220J	
R 4278 (B,64,30)	RS1/16SS103J	R 4460 (B,15,55)	RS1/16SS220J	
R 4279 (B,25,12)	RS1/16SS103J	R 4461 (B,15,53)	RS1/16SS220J	
R 4280 (B,31,31)	RS1/16SS103J	R 4462 (B,14,53)	RS1/16SS220J	E
R 4281 (B,33,12)	RS1/16SS103J	R 4463 (B,28,50)	RS1/16SS0R0J	
R 4282 (B,27,11)	RS1/16SS103J	R 4464 (B,28,49)	RS1/16SS0R0J	
R 4283 (B,30,31)	RS1/16SS103J	R 4465 (B,28,49)	RS1/16SS0R0J	
R 4284 (B,47,12)	RS1/16SS103J	R 4466 (B,28,48)	RS1/16SS0R0J	
R 4285 (B,61,14)	RS1/16SS103J	R 4467 (B,27,47)	RS1/16SS0R0J	
R 4286 (A,44,57)	RS1/16SS0R0J	R 4468 (B,27,46)	RS1/16SS0R0J	
R 4287 (A,43,57)	RS1/16SS0R0J	R 4469 (B,27,45)	RS1/16SS0R0J	
R 4288 (B,66,28)	RS1/16SS103J	R 4470 (B,27,44)	RS1/16SS0R0J	
R 4289 (B,42,8)	RS1/16SS103J	R 4473 (B,25,71)	RS1/16SS0R0J	
R 4290 (B,52,44)	RS1/16SS0R0J	R 4474 (B,23,71)	RS1/16SS0R0J	F
R 4291 (A,42,57)	RS1/16SS0R0J	R 4475 (B,29,63)	RS1/16SS0R0J	
R 4292 (A,41,57)	RS1/16SS0R0J	R 4476 (B,29,62)	RS1/16SS0R0J	
R 4293 (B,45,11)	RS1/16SS104J	R 4477 (B,21,71)	RS1/16SS0R0J	
R 4295 (B,27,14)	RS1/16SS103J	R 4479 (B,18,71)	RS1/16SS0R0J	
R 4296 (B,65,10)	RS1/16SS222J	R 4480 (B,22,73)	RS1/16SS0R0J	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 4481	(B,17,63)	RS1/16SS0R0J	R 4744	(B,69,47)	RS1/16SS220J
	R 4502	(B,17,43)	RS1/16SS103J	R 4745	(B,64,48)	RS1/16SS105J
	R 4503	(B,23,35)	RS1/16SS101J	R 4746	(B,63,48)	RS1/16SS105J
	R 4504	(B,22,35)	RS1/16SS101J	R 4747	(B,63,49)	RS1/16SS2702D
				R 4749	(B,62,53)	RS1/16SS1503D
	R 4505	(B,18,42)	RS1/16SS103J			
	R 4507	(B,18,40)	RS1/16SS221J	R 4750	(B,67,55)	RS1/16SS1002D
	R 4508	(B,18,38)	RS1/16SS221J	R 4751	(B,65,55)	RS1/16SS1503D
	R 4510	(B,12,33)	RS1/16SS6801D	R 4752	(B,65,50)	RS1/16SS1203D
	R 4511	(B,21,41)	RS1/16SS101J	R 4753	(A,64,52)	RS1/16SS0R0J
	R 4512	(B,6,43)	RS1/16SS103J	R 4754	(B,65,52)	RS1/16SS223J
	R 4513	(B,17,35)	RS1/10SR0R0J	R 4755	(A,63,54)	RS1/10SR102J
	R 4514	(B,17,31)	RS1/10SR0R0J			
	R 4515	(B,17,34)	RS1/10SR0R0J	R 4756	(B,66,48)	RS1/16SS0R0J
	R 4525	(B,6,68)	RS1/16SS0R0J	R 4757	(B,63,51)	RS1/16SS4703D
B				R 4758	(B,72,40)	RS1/16SS0R0J
	R 4529	(B,6,47)	RS1/16SS0R0J	R 4759	(B,61,53)	RS1/16SS0R0J
	R 4540	(B,7,69)	RS1/16SS220J	R 4767	(A,38,18)	RS1/10SR0R0J
	R 4543	(A,15,34)	RS1/16SS101J			
	R 4544	(A,14,34)	RS1/16SS101J	R 4768	(B,37,11)	RS1/10SR0R0J
	R 4545	(A,13,34)	RS1/16SS101J	R 4769	(A,26,17)	RS1/16SS0R0J
				R 4772	(A,41,13)	RS1/16SS103J
	R 4546	(A,12,34)	RS1/16SS101J	R 4773	(A,33,7)	RS1/10SR0R0J
	R 4547	(A,9,38)	RS1/16SS101J	R 4775	(A,40,14)	RS1/16SS0R0J
	R 4548	(A,9,37)	RS1/16SS101J			
	R 4549	(A,9,37)	RS1/16SS101J	R 4776	(A,64,28)	RS1/10SR332J
	R 4550	(A,9,36)	RS1/16SS101J	R 4777	(A,64,27)	RS1/10SR332J
				R 4778	(A,27,19)	RS1/16SS103J
				R 4779	(A,28,28)	RS1/16SS103J
				R 4780	(A,28,27)	RS1/16SS101J
C	R 4702	(A,75,65)	RS1/8SQ0R0J			
	R 4704	(A,66,61)	RS1/8SQ0R0J			
	R 4705	(B,70,60)	RS1/16SS220J	R 4790	(A,51,24)	RS1/16SS101J
	R 4706	(B,66,60)	RS1/16SS105J	R 4791	(A,47,26)	RS1/16SS101J
	R 4707	(B,65,60)	RS1/16SS105J	R 4792	(A,50,18)	RS1/16SS0R0J
	R 4708	(B,65,62)	RS1/16SS2201D	R 4793	(A,42,17)	RS1/16SS0R0J
	R 4709	(B,68,66)	RS1/16SS0R0J	R 4794	(A,50,16)	RS1/16SS103J
	R 4710	(B,65,64)	RS1/16SS1003D			
	R 4711	(B,66,64)	RS1/16SS183J	R 4795	(A,47,22)	RS1/16SS683J
	R 4713	(B,68,67)	RS1/16SS1002D	R 4798	(A,43,18)	RS1/16SS104J
D				R 4799	(A,45,22)	RS1/16SS0R0J
	R 4714	(B,66,67)	RS1/16SS1503D	R 4800	(A,45,21)	RS1/16SS0R0J
	R 4715	(B,66,63)	RS1/16SS1503D	R 4801	(A,44,14)	RS1/16SS0R0J
	R 4716	(A,65,63)	RS1/16SS0R0J			
	R 4717	(B,68,60)	RS1/16SS0R0J	R 4802	(A,44,24)	RS1/16SS0R0J
	R 4721	(A,67,40)	RS1/8SQ0R0J	R 4803	(A,52,26)	RS1/16SS101J
				R 4804	(A,51,25)	RS1/16SS103J
	R 4722	(A,71,31)	RS1/8SQ0R0J	R 4805	(A,45,26)	RS1/16SS103J
	R 4723	(A,65,40)	RS1/8SQ0R0J	R 4845	(A,66,60)	RS1/8SQ0R0J
	R 4724	(B,65,36)	RS1/16SS220J			
	R 4725	(B,66,40)	RS1/16SS105J	R 4901	(A,40,32)	RS1/16SS103J
	R 4726	(B,66,42)	RS1/16SS105J	R 4902	(A,72,27)	RS1/16SS222J
				R 4903	(A,38,32)	RS1/16SS470J
				R 4904	(A,66,29)	RS1/16SS222J
				R 4905	(A,66,28)	RS1/16SS221J
E	R 4727	(B,67,41)	RS1/16SS2702D			
	R 4728	(B,72,38)	RS1/16SS105J			
	R 4729	(B,71,42)	RS1/16SS1503D	R 4906	(A,66,27)	RS1/16SS103J
	R 4730	(B,73,38)	RS1/16SS1002D	R 4907	(A,66,25)	RS1/16SS0R0J
	R 4731	(B,73,40)	RS1/16SS1503D	R 4911	(A,57,38)	RS1/16SS151J
				R 4912	(B,63,42)	RS1/16SS0R0J
	R 4732	(B,68,40)	RS1/16SS1203D	R 4913	(B,61,42)	RS1/16SS0R0J
	R 4733	(A,69,41)	RS1/16SS0R0J			
	R 4734	(B,70,40)	RS1/16SS223J	R 4914	(A,37,32)	RS1/16SS750J
	R 4735	(A,72,41)	RS1/10SR102J	R 4915	(A,41,25)	RS1/16SS0R0J
	R 4736	(B,65,38)	RS1/16SS0R0J	R 4916	(B,36,7)	RS1/16SS0R0J
	R 4737	(B,69,41)	RS1/16SS4703D	R 4918	(A,33,26)	RS1/16SS0R0J
				R 4934	(B,33,50)	RS1/16SS0R0J
F	R 4738	(B,63,28)	RS1/16SS103J			
	R 4739	(B,71,45)	RS1/16SS0R0J	R 4937	(A,25,13)	RS1/16SS103J
	R 4741	(A,64,50)	RS1/8SQ0R0J	R 4938	(A,24,13)	RS1/16SS103J
	R 4742	(A,73,53)	RS1/8SQ0R0J	R 4939	(A,23,13)	RS1/16SS103J
	R 4743	(A,64,48)	RS1/8SQ0R0J	R 4941	(B,55,41)	RS1/16SS431J
				R 4942	(B,54,45)	RS1/16SS102J

1

2

3

4

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	C 4016	(B,47,41)	CKSSYB104K10	C 4305	(B,51,68)	CKSSYB104K10
	C 4017	(B,47,44)	CKSSYB104K10	C 4306	(A,50,68)	CKSSYB104K10
	C 4018	(B,47,45)	CKSSYB104K10	C 4307	(A,50,70)	CKSSYB104K10
	C 4019	(B,45,40)	CKSSYB104K10	C 4308	(A,50,72)	CKSSYB104K10
	C 4020	(B,43,42)	CKSSYB104K10	C 4309	(B,53,68) 4.7 uF	CCG1201
■	C 4021	(B,43,43)	CKSSYB104K10	C 4310	(B,53,71)	CKSSYB104K10
	C 4022	(B,43,44)	CKSSYB104K10	C 4311	(A,60,69)	CKSSYB104K10
	C 4023	(B,39,39)	CKSSYB104K10	C 4312	(B,59,71)	CKSSYB104K10
	C 4024	(B,38,42)	CKSSYB104K10	C 4313	(B,57,72)	CKSSYB104K10
	C 4025	(B,39,45)	CKSSYB104K10	C 4314	(A,60,76)	CKSSYB104K10
B	C 4026	(B,50,39)	CKSSYB104K10	C 4315	(A,60,78)	CKSSYB104K10
	C 4027	(B,50,41)	CKSSYB104K10	C 4316	(B,60,78)	CKSSYB104K10
	C 4029	(B,41,42)	CKSSYB104K10	C 4317	(B,59,78) 4.7 uF	CCG1201
	C 4030	(B,48,43) 1 uF	DCH1246	C 4318	(A,50,76)	CKSSYB104K10
	C 4031	(B,41,46)	CKSSYB104K10	C 4319	(B,51,76)	CKSSYB104K10
■	C 4034	(B,49,44)	CKSSYB104K10	C 4320	(A,50,79)	CKSSYB104K10
	C 4037	(B,41,39)	CKSSYB104K10	C 4321	(B,60,69)	CKSSYB104K10
	C 4038	(B,40,44) 1 uF	DCH1246	C 4322	(B,60,71)	CKSSYB104K10
	C 4039	(B,37,47)	CKSSYB104K10	C 4323	(B,57,74)	CKSSYB104K10
	C 4040	(B,45,47)	CKSSYB104K10	C 4324	(B,60,76)	CKSSYB104K10
C	C 4041	(B,37,45)	CKSSYB104K10	C 4325	(A,42,67)	CKSSYB104K10
	C 4042	(B,49,47)	CKSSYB104K10	C 4326	(B,41,67)	CKSSYB104K10
	C 4043	(B,47,47)	CKSSYB104K10	C 4327	(B,34,64)	CKSSYB104K10
	C 4044	(B,41,47)	CKSSYB104K10	C 4328	(B,34,65)	CKSSYB104K10
	C 4045	(B,40,48)	CKSSYB104K10	C 4329	(A,31,68)	CKSSYB104K10
■	C 4047	(B,50,49)	CKSSYB104K10	C 4330	(B,31,68)	CKSSYB104K10
	C 4048	(B,45,49)	CKSSYB104K10	C 4331	(A,31,70)	CKSSYB104K10
	C 4050	(B,42,49)	CKSSYB104K10	C 4332	(A,31,72)	CKSSYB104K10
	C 4051	(B,45,43) 22 uF	DCH1256	C 4333	(B,29,70) 4.7 uF	CCG1201
	C 4052	(B,44,47) 22 uF	CCG1254	C 4334	(B,34,72)	CKSSYB104K10
D	C 4053	(B,37,37) 22 uF	CCG1254	C 4335	(A,42,69)	CKSSYB104K10
	C 4054	(B,53,34) 10 uF	CCG1192	C 4336	(A,42,71)	CKSSYB104K10
	C 4055	(B,51,36)	CKSSYB104K10	C 4337	(B,39,72)	CKSSYB104K10
	C 4056	(A,37,15) 10 uF	CCG1192	C 4338	(B,51,70)	CKSSYB104K10
	C 4057	(B,36,50) 10 uF	CCG1192	C 4339	(B,51,72)	CKSSYB104K10
■	C 4058	(B,39,47)	CKSSYB104K10	C 4340	(A,44,72)	CKSSYB104K10
	C 4059	(B,48,49)	CKSSYB104K10	C 4341	(B,53,76)	CKSSYB104K10
	C 4062	(B,57,55)	CKSSYB104K10	C 4342	(B,51,79)	CKSSYB104K10
	C 4063	(B,55,55)	CKSSYB104K10	C 4343	(B,41,69)	CKSSYB104K10
	C 4064	(B,45,37) 10 uF	CCG1192	C 4344	(B,40,71)	CKSSYB104K10
E	C 4065	(B,38,40)	CKSSYB104K10	C 4345	(B,34,76)	CKSSYB104K10
	C 4066	(B,49,41)	CKSSYB104K10	C 4346	(B,31,76)	CKSSYB104K10
	C 4067	(B,49,39)	CKSSYB104K10	C 4347	(A,31,76)	CKSSYB104K10
	C 4068	(B,41,40)	CKSSYB104K10	C 4348	(A,31,78)	CKSSYB104K10
	C 4069	(B,42,43) 1 uF	DCH1246	C 4349	(A,42,76)	CKSSYB104K10
■	C 4070	(B,46,38)	CKSSYB104K10	C 4350	(A,42,78)	CKSSYB104K10
	C 4071	(B,47,35)	CKSSYB104K10	C 4351	(B,41,78)	CKSSYB104K10
	C 4072	(B,40,33) 10 uF	CCG1192	C 4352	(B,39,77) 4.7 uF	CCG1201
	C 4073	(B,45,32) 10 uF	CCG1192	C 4353	(A,62,72)	CKSSYB104K10
	C 4075	(B,42,37)	CKSSYB104K10	C 4354	(B,41,76)	CKSSYB104K10
F	C 4076	(B,36,42) 10 uF	CCG1192	C 4355	(B,31,70)	CKSSYB104K10
	C 4077	(B,54,50) 10 uF	CCG1192	C 4356	(B,52,76)	CKSSYB104K10
	C 4078	(B,49,37)	CKSSYB104K10	C 4357	(B,40,82)	CKSSYB103K16
	C 4079	(A,44,26)	CCSSCH101J50	C 4358	(B,58,82)	CKSSYB103K16
	C 4080	(B,53,52)	CKSSYB104K10	C 4361	(B,31,72)	CKSSYB104K10
■	C 4087	(B,44,39) 22 uF	DCH1256	C 4362	(B,34,73)	CKSSYB104K10
	C 4301	(B,60,67)	CKSSYB104K10	C 4363	(B,31,78)	CKSSYB104K10
	C 4302	(A,60,67)	CKSSYB104K10	C 4364	(B,39,74)	CKSSYB104K10
	C 4303	(B,52,64)	CKSSYB104K10	C 4381	(A,27,74)	CKSSYB104K10
	C 4304	(B,52,66)	CKSSYB104K10	C 4382	(A,26,72)	CKSSYB104K10

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
C 4401 (A,10,49)	CKSSYB471K50	C 4742 (B,66,47)	CKSRYB105K10
C 4402 (A,6,72)	CKSSYB104K10	C 4744 (B,65,53)	CCSSCH470J50
C 4403 (A,10,72)	CKSSYB103K16	C 4745 (B,63,53)	CKSSYB471K50
C 4404 (B,31,53)	CCSSCH8R0D50	C 4746 (A,71,53) 47 uF	CCG1229
C 4405 (B,30,58)	CCSSCH8R0D50	C 4747 (A,68,53) 100 uF	CCG1232
C 4406 (B,23,59)	CKSSYB103K16	C 4749 (B,63,50)	CCSSCH220J50
C 4412 (A,23,66)	CKSSYB103K16	C 4750 (B,72,52)	CKSSYB103K16
C 4413 (A,20,69)	CKSSYB103K16	C 4766 (A,36,18) 4.7 uF	CCG1201
C 4414 (A,20,66)	CKSSYB103K16	C 4767 (A,34,18) 4.7 uF	CCG1201
C 4415 (A,21,65)	CKSSYB103K16	C 4768 (A,27,17)	CKSSYB473K16
C 4416 (A,21,68)	CKSSYB103K16	C 4776 (A,66,24)	CKSSYB104K10
C 4417 (A,20,64)	CKSSYB103K16	C 4778 (A,28,26)	CKSSYB473K16
C 4418 (A,18,64)	CKSSYB103K16	C 4790 (A,48,23)	CCSSCH101J50
C 4419 (A,18,65)	CKSSYB103K16	C 4791 (A,46,24)	CKSSYB104K10
C 4420 (A,18,66)	CKSSYB103K16	C 4792 (A,45,19)	CKSSYB104K10
C 4421 (A,18,67)	CKSSYB103K16	C 4793 (A,50,20)	CKSSYB222K50
C 4422 (A,20,68)	CKSSYB103K16	C 4794 (A,43,16)	CKSSYB104K10
C 4423 (A,27,66)	CKSSYB103K16	C 4796 (A,20,60) 4.7 uF	CCG1201
C 4424 (B,27,66)	CKSSYB103K16	C 4797 (A,21,57) 4.7 uF	CCG1201
C 4425 (A,26,68)	CKSSYB103K16	C 4798 (A,44,23)	CKSSYB104K10
C 4426 (A,19,68)	CKSSYB103K16	C 4799 (A,50,26)	CCSSCH101J50
C 4427 (A,18,61)	CKSSYB104K10	C 4800 (A,28,61)	CKSSYB473K16
C 4428 (A,18,60) 1 uF	DCH1246	C 4901 (A,41,24) 1 uF	DCH1246
C 4429 (A,27,64) 1 uF	DCH1246	C 4902 (B,59,44)	CKSSYB104K10
C 4430 (A,27,65)	CKSSYB104K10	C 4903 (A,68,25)	CKSSYB104K10
C 4431 (A,18,61)	CKSSYB103K16	C 4904 (A,66,26)	CKSSYB102K50
C 4432 (A,27,66)	CKSSYB103K16	C 4914 (B,60,46)	CKSSYB103K16
C 4433 (B,27,59)	CKSSYB471K50	C 4915 (A,32,26)	CKSSYB104K10
C 4435 (A,23,68)	CKSSYB104K10	C 4933 (A,57,36)	CCSSCH101J50
C 4436 (A,24,68) 10 uF	CCG1192	C 5001 (A,74,22) 22 uF	DCH1256
C 4437 (A,23,64)	CKSSYB104K10	C 5003 (A,68,17) 22 uF	DCH1256
C 4438 (A,25,64) 10 uF	CCG1192	C 5007 (B,41,12)	CKSRYB102K50
C 4439 (B,27,60)	CKSSYB103K16		
C 4501 (B,12,46)	CKSSYB104K10		
C 4502 (B,6,41)	CKSSYB104K10		
C 4503 (B,5,39)	CKSSYB104K10		
C 4504 (B,12,34)	CKSSYB103K16		
C 4505 (B,15,34)	CKSSYB103K16		
C 4506 (B,14,32) 10 uF	CCG1192		
C 4507 (B,14,33)	CKSSYB103K16		
C 4508 (B,19,38)	CKSSYB103K16		
C 4509 (B,9,33) 10 uF	CCG1192		
C 4510 (B,16,45)	CKSSYB102K50		
C 4511 (B,7,45) 10 uF	CCG1192		
C 4516 (B,18,41)	CCSSCH101J50		
C 4704 (B,68,59)	CKSRYB105K10		
C 4706 (B,66,65)	CCSSCH470J50		
C 4707 (B,65,65)	CKSSYB471K50		
C 4708 (A,72,65) 47 uF	CCG1229		
C 4709 (A,69,65) 100 uF	CCG1232		
C 4711 (B,65,63)	CCSSCH220J50		
C 4712 (B,74,64)	CKSSYB103K16		
C 4722 (B,64,38)	CKSRYB105K10		
C 4723 (B,72,40)	CKSSYB103K16		
C 4724 (B,71,40)	CCSSCH470J50		
C 4725 (B,71,41)	CKSSYB471K50		
C 4726 (A,70,34) 47 uF	CCG1229		
C 4727 (A,71,37) 100 uF	CCG1232		
C 4729 (B,68,41)	CCSSCH220J50		
C 4730 (B,69,32)	CKSSYB103K16		
		IC 2701 (A,100,46) IC(B)	AK4187VN
		IC 2801 (B,35,70) Regulator IC	MM3411A15N
		IC 2802 (B,35,75) Regulator IC	MM3411A25N
		IC 2803 (B,67,49) IC	BU16002KVT
		IC 2804 (B,56,74) Regulator IC	MM3411A33N
		IC 3001 (A,30,51) IC	TC90193SBG
		IC 3101 (A,106,72) IC	BD81A04EFV-M
		IC 3201 (A,104,17) IC	R1290K103A
		Q 2701 (B,109,47) Chip Transistor	HN1C01FU
		Q 2702 (B,112,52) Transistor	LSCR523UB
		Q 3001 (B,18,41) Transistor	LSAR523UB
		Q 3002 (A,16,39) Transistor	LSCR523UB
		Q 3201 (A,106,26) Transistor	2SA1577
		Q 3202 (A,110,13) Transistor	LTC024EEB
		Q 3301 (A,57,16) Transistor	LSAR523UB
		D 3101 (A,105,60) Diode	RB060M-30
		D 3201 (B,106,16) Diode	DB3S308F0
		D 3202 (B,100,23) Diode	DB3S308F0



Unit Number : CWN8224(A,C,D)

Unit Number : CWN8216(B)

Unit Name : Monitor Unit

MISCELLANEOUS

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

D 3203 (B,103,23) Diode DB3S308F0
D 3204 (A,95,22) Diode RB162M-40

L 3301 (A,68,19) Inductor ATL7054
L 3302 (B,42,35) Inductor CTF1635
TH3301 (A,131,20) Thermistor CCX1084
X 3001 (A,17,48) Resonator 27.000 MHz CSS1768
CN2701 (A,128,56) Connector CKS6601

CN2704 (A,58,69) Connector CKS6646
CN2705 (A,121,17) Connector(B) CKS6625
CN2706 (A,80,25) Connector(A,C,D) CKS6589
CN2707 (A,139,17) Connector CKS6635
CN3301 (A,34,31) Connector CKS6602

A L 2801 (B,66,37) Chip Beads VTL1127
L 2802 (B,65,37) Chip Beads VTL1127
L 2803 (B,64,36) Chip Beads VTL1127
L 2804 (B,62,37) Chip Beads VTL1127
L 2805 (B,63,38) Chip Beads VTL1127

L 2806 (B,62,38) Chip Beads VTL1127
L 2807 (B,60,42) Chip Beads VTL1127
L 2808 (B,63,40) Chip Beads VTL1127
L 2809 (B,59,43) Chip Beads VTL1127
L 2810 (B,59,44) Chip Beads VTL1127

B L 2811 (B,59,45) Chip Beads VTL1127
L 2812 (B,59,46) Chip Beads VTL1127
L 2813 (B,57,49) Chip Beads VTL1127
L 2814 (B,57,50) Chip Beads VTL1127
L 2815 (B,57,51) Chip Beads VTL1127

L 2816 (B,57,52) Chip Beads VTL1127
L 2817 (B,57,53) Chip Beads VTL1127
L 2818 (B,57,54) Chip Beads VTL1127
L 2819 (B,57,55) Chip Beads VTL1127
L 2820 (B,57,56) Chip Beads VTL1127

C L 2821 (B,57,57) Chip Beads VTL1127
L 2822 (A,72,53) Inductor XTL3010
L 2823 (A,65,51) Inductor XTL3010
L 2829 (A,72,56) Chip Ferrite Bead BTX1047
L 2830 (B,72,41) Chip Beads VTL1127

L 2831 (B,71,41) Chip Beads VTL1127
L 2832 (B,70,36) Chip Beads VTL1127
L 2833 (B,70,37) Chip Beads VTL1127
L 2834 (B,69,37) Chip Beads VTL1127
L 2835 (B,68,38) Chip Beads VTL1127

D L 3001 (A,39,45) Inductor CTF1734
L 3002 (A,41,45) Inductor CTF1734
L 3003 (A,39,46) Inductor CTF1734
L 3004 (A,39,48) Inductor CTF1734
L 3005 (A,41,50) Inductor CTF1734

L 3006 (A,39,51) Inductor CTF1734
L 3007 (A,46,46) Inductor CTF1734
L 3008 (A,46,44) Inductor CTF1734
L 3009 (A,47,49) Inductor CTF1734

L 3010 (A,48,47) Inductor CTF1734
L 3011 (A,48,49) Inductor CTF1734
L 3012 (A,40,55) Inductor CTF1734
L 3013 (A,40,44) Inductor CTF1734

E L 3014 (A,40,43) Inductor CTF1734
L 3015 (A,40,42) Inductor CTF1734
L 3016 (A,39,42) Inductor CTF1734
L 3017 (A,38,42) Inductor CTF1734
L 3018 (A,36,42) Inductor CTF1734

L 3019 (A,35,42) Inductor CTF1734
L 3020 (A,34,42) Inductor CTF1734
L 3021 (A,30,43) Inductor CTF1740
L 3022 (A,29,43) Inductor CTF1734
L 3023 (A,28,41) Inductor CTF1734

F L 3024 (A,27,41) Inductor CTF1734
L 3025 (B,9,44) Inductor CTF1545
L 3104 (A,105,65) Inductor CTF1545
L 3105 (A,99,62) Inductor CTH1558
L 3201 (A,102,23) Choke Coil 22 uH CTH1426

RESISTORS

R 2704 (A,97,55) RS1/16SS471J
R 2705 (A,97,56) RS1/16SS471J
R 2706 (A,97,57) RS1/16SS471J
R 2715 (A,100,41) (B) RS1/16SS0R0J

R 2716 (A,101,41) (B) RS1/16SS0R0J
R 2717 (A,100,42) (B) RS1/16SS621J
R 2718 (A,101,42) (B) RS1/16SS181J
R 2719 (A,98,43) (B) RS1/16SS201J

R 2720 (A,102,43) (B) RS1/16SS620J
R 2724 (A,97,49) (B) RS1/16SS121J
R 2725 (A,101,50) (B) RS1/16SS0R0J
R 2726 (A,104,49) (B) RS1/16SS0R0J
R 2727 (A,76,29) (A,C,D) RS1/16SS0R0J

R 2728 (A,88,25) (A,C,D) RS1/16SS0R0J
R 2729 (A,85,30) (A,C,D) RS1/16SS121J
R 2730 (A,86,26) (A,C,D) RS1/16SS0R0J
R 2731 (A,84,29) (A,C,D) RS1/16SS0R0J
R 2733 (B,114,52) RS1/16SS180J

R 2734 (B,115,52) RS1/16SS180J
R 2735 (B,116,52) RS1/16SS220J
R 2736 (B,110,44) RS1/16SS620J
R 2737 (B,111,44) RS1/16SS620J
R 2739 (B,108,50) RS1/16SS150J

R 2740 (B,107,50) RS1/16SS150J
R 2741 (B,107,48) RS1/16SS180J
R 2801 (B,66,36) RS1/16SS221J
R 2802 (B,58,36) RS1/16SS221J

R 2803 (B,60,36) RS1/16SS221J
R 2804 (B,59,37) RS1/16SS221J
R 2805 (B,60,37) RS1/16SS221J
R 2806 (B,59,38) RS1/16SS221J
R 2807 (B,58,42) RS1/16SS221J

R 2808 (B,61,40) RS1/16SS221J
R 2809 (B,57,43) RS1/16SS221J
R 2810 (B,57,45) RS1/16SS221J
R 2811 (B,57,46) RS1/16SS221J
R 2812 (B,56,47) RS1/16SS221J

R 2813 (B,55,49) RS1/16SS221J
R 2814 (B,55,50) RS1/16SS221J
R 2815 (B,55,51) RS1/16SS221J
R 2816 (B,55,52) RS1/16SS221J
R 2817 (B,55,53) RS1/16SS221J

R 2818 (B,55,54) RS1/16SS221J
R 2819 (B,55,55) RS1/16SS221J
R 2820 (B,55,56) RS1/16SS221J
R 2821 (B,55,57) RS1/16SS221J
R 2822 (B,74,49) RS1/16SS103J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 2824	(B,68,57)	RS1/16SS1000D		R 3060	(A,21,63)	RS1/16SS472J	
R 2825	(B,66,57)	RS1/16SS1000D		R 3061	(A,18,59)	RS1/16SS472J	
R 2826	(B,65,56)	RS1/16SS1000D		R 3064	(A,20,49)	RS1/16SS105J	A
R 2827	(B,63,57)	RS1/16SS1000D		R 3065	(A,18,51)	RS1/16SS471J	
				R 3073	(B,26,48)	RS1/16SS0R0J	
R 2828	(B,61,56)	RS1/16SS1000D		R 3074	(A,20,42)	RS1/16SS152J	
R 2834	(B,72,39)	RS1/16SS221J					
R 2835	(B,71,39)	RS1/16SS221J		R 3077	(A,16,56)	RS1/16SS470J	
R 2836	(B,69,34)	RS1/16SS221J		R 3078	(A,16,58)	RS1/16SS273J	
				R 3079	(A,16,57)	RS1/16SS470J	
R 2837	(B,69,36)	RS1/16SS221J		R 3080	(A,19,63)	RS1/16SS470J	
R 2838	(B,68,36)	RS1/16SS221J		R 3081	(A,20,63)	RS1/16SS470J	
R 2839	(B,67,36)	RS1/16SS221J		R 3083	(A,15,42)	RS1/16SS122J	
R 2857	(B,76,49)	RS1/16SS103J					
				R 3089	(B,13,47)	RS1/10SR0R0J	
R 2858	(B,79,48)	RS1/16SS103J		R 3091	(A,17,59)	RS1/16SS472J	B
R 2859	(B,74,52)	RS1/16SS103J		R 3094	(A,17,56)	RS1/16SS472J	
R 2862	(B,65,75)	RS1/16SS0R0J		R 3095	(A,15,59)	RS1/16SS273J	
R 2863	(B,61,73)	RS1/10SR0R0J		R 3100	(B,25,70)	RS1/16SS0R0J	
R 2864	(B,52,72)	RS1/10SR0R0J					
R 2865	(B,79,49)	RS1/16SS221J		R 3103	(B,107,68)	RS1/16SS104J	
R 3001	(A,43,43)	RS1/16SS151J		R 3104	(B,106,68)	RS1/16SS154J	
				R 3105	(A,108,77)	RS1/16SS273J	
R 3002	(A,43,45)	RS1/16SS151J		R 3106	(A,109,77)	RS1/16SS511J	
R 3003	(A,43,46)	RS1/16SS151J					
R 3004	(A,44,46)	RS1/16SS151J		R 3108	(B,98,68)	RS1/16SS1203D	
R 3005	(A,43,50)	RS1/16SS151J		R 3110	(B,96,68)	RS1/16SS1003D	
R 3006	(A,43,51)	RS1/16SS151J		R 3116	(A,122,64)	RS1/16SS3603D	
				R 3117	(A,121,65)	RS1/16SS2402D	C
R 3007	(A,45,43)	RS1/16SS151J					
R 3008	(A,46,42)	RS1/16SS151J		R 3120	(A,121,73)	RS1/16SS0R0J	
R 3009	(A,47,47)	RS1/16SS151J		R 3121	(A,121,74)	RS1/16SS0R0J	
R 3010	(A,47,42)	RS1/16SS151J		R 3202	(A,101,15)	RS1/16SS103J	
R 3011	(A,48,45)	RS1/16SS151J		R 3203	(B,103,16)	RS1/10SR9102D	
R 3012	(A,42,55)	RS1/16SS151J		R 3204	(B,103,19)	RS1/10SR1802D	
R 3017	(A,40,57)	RS1/16SS472J		R 3205	(B,102,14)	RS1/16SS203J	
R 3018	(A,40,59)	RS1/16SS472J		R 3206	(B,101,14)	RS1/16SS104J	
R 3019	(A,40,60)	RS1/16SS472J		R 3207	(A,105,24)	RS1/16SS103J	
R 3022	(A,42,43)	RS1/16SS151J		R 3208	(A,106,12)	RS1/16SS472J	
R 3023	(A,41,42)	RS1/16SS151J		R 3209	(B,105,24)	RS1/10SR1003D	D
R 3024	(A,40,40)	RS1/16SS151J		R 3210	(B,106,28)	RS1/10SR9101D	
R 3025	(A,39,40)	RS1/16SS151J		R 3211	(A,107,13)	RS1/16SS6800D	
R 3026	(A,38,40)	RS1/16SS151J		R 3212	(A,108,13)	RS1/16SS1502D	
				R 3213	(A,108,15)	RS1/16SS8201D	
R 3028	(A,36,40)	RS1/16SS151J					
R 3029	(A,35,40)	RS1/16SS151J		R 3214	(A,98,24)	RS1/10SR2R2J	
R 3031	(A,34,40)	RS1/16SS151J		R 3216	(A,99,14)	RS1/10SR1203D	
R 3038	(A,30,41)	RS1/16SS680J		R 3217	(A,102,14)	RS1/10SR3001D	
R 3040	(A,29,37)	RS1/16SS470J		R 3218	(A,102,11)	RS1/10SR1502D	
R 3041	(A,28,39)	RS1/16SS470J		R 3219	(A,99,12)	RS1/10SR472J	
R 3042	(B,11,57)	RS1/16SS0R0J		R 3301	(A,55,28)	RS1/10SR4R7J	
R 3043	(A,27,39)	RS1/16SS151J		R 3302	(A,53,33)	RS1/10SR56R0D	E
R 3044	(B,20,58)	RS1/16SS472J		R 3303	(A,55,35)	RS1/10SR1800D	
				R 3304	(A,57,34)	RS1/10SR2R2J	
R 3047	(B,14,41)	RS1/16SS912J					
R 3048	(B,22,60)	RS1/16SS472J		R 3305	(A,59,29)	RS1/10SR47R0D	
R 3049	(B,14,43)	RS1/16SS103J		R 3306	(A,59,31)	RS1/10SR0R0J	
R 3050	(B,15,40)	RS1/16SS103J		R 3307	(A,62,29)	RS1/10SR39R0D	
				R 3308	(A,63,31)	RS1/10SR4R7J	
R 3051	(B,15,43)	RS1/16SS391J		R 3309	(A,66,29)	RS1/10SR1000D	
R 3053	(A,22,63)	RS1/16SS472J					
R 3054	(A,24,63)	RS1/16SS472J		R 3310	(A,66,31)	RS1/10SR8R2J	
R 3055	(A,23,63)	RS1/16SS472J		R 3311	(A,69,29)	RS1/10SR1300D	
R 3056	(A,16,53)	RS1/16SS472J		R 3312	(A,70,31)	RS1/10SR0R0J	F
				R 3313	(A,68,25)	RS1/10SR1000D	
R 3057	(A,16,54)	RS1/16SS472J		R 3314	(A,67,23)	RS1/10SR8R2J	
R 3058	(B,19,55)	RS1/16SS472J					
R 3059	(A,16,55)	RS1/16SS472J		R 3315	(A,64,25)	RS1/10SR39R0D	

1

Circuit Symbol and No.

R 3316 (A,64,23)
R 3317 (A,61,25)
R 3318 (A,60,23)
R 3319 (A,57,25)

A

R 3320 (A,57,23)
R 3321 (A,55,23)
R 3322 (A,55,27)
R 3323 (B,30,31)

R 3324 (A,23,37)
R 3327 (A,27,37)
R 3328 (A,28,37)

R 3330 (A,54,20)
R 3332 (A,54,17)
R 3333 (A,59,20)
R 3334 (A,58,18)
R 3336 (A,61,15)

B

R 3339 (A,61,16)
R 3344 (A,131,17)

CAPACITORS

C 2705 (A,96,45) 10 uF(B)
C 2706 (A,97,46) (B)
C 2707 (A,100,49) (B)
C 2708 (A,99,51) 10 uF(B)
C 2709 (B,81,29) (A,C,D)

C

C 2803 (A,57,48)
C 2804 (B,56,48)
C 2805 (B,59,55)
C 2806 (A,61,53)

C 2807 (B,72,56)
C 2808 (B,73,56)
C 2809 (A,63,53)
C 2810 (A,63,52)
C 2814 (A,65,54)

D

C 2816 (A,70,53) 10 uF
C 2819 (B,38,70)
C 2820 (B,38,76)
C 2821 (B,32,75)
C 2822 (B,32,70)

C 2823 (B,67,39)
C 2824 (B,67,40)
C 2825 (B,76,48)
C 2826 (B,75,48)
C 2828 (B,53,73)
C 2829 (B,59,74)
C 2830 (B,79,51)

E

C 3002 (A,39,47)
C 3003 (A,39,49)
C 3004 (A,40,52)
C 3005 (A,40,53)
C 3006 (A,40,56)

C 3007 (A,37,42)
C 3008 (A,35,61)
C 3010 (A,32,43)
C 3011 (A,31,60)

F

C 3013 (A,31,42)
C 3014 (A,30,60)
C 3015 (A,29,41)
C 3019 (B,12,42) 10 uF

2

Part No.

RS1/10SR4R7J
RS1/10SR47R0D
RS1/10SR0R0J
RS1/10SR1800D

RS1/10SR2R2J
RS1/10SR33R0D
RS1/10SR2R4J
RS1/16SS473J

RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

RS1/16SS472J
RS1/16SS105J
RS1/16SS682J
RS1/16SS0R0J
RS1/16SS101J

RS1/16SS0R0J
RS1/16SS183J

DCH1201
CKSSYB104K10
CKSSYB104K10
DCH1201
CKSSYB104K10

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10

CKSSYB103K16
CKSSYB104K10
CKSSYB104K10
CKSSYB103K16
CKSSYB103K16

DCH1201
CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSRYB105K10

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CKSSYB104K10
CKSRYB474K10
CKSQYB225K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CCSSCH470J50
CCG1192

3

Circuit Symbol and No.

C 3021 (A,27,43)
C 3022 (A,27,60)
C 3023 (B,16,44)
C 3024 (A,23,40)
C 3025 (A,21,40)

C 3026 (A,23,41)
C 3027 (A,22,52)
C 3028 (A,21,54)
C 3029 (A,22,57)
C 3030 (A,19,44)

C 3031 (A,24,43)
C 3032 (A,22,43)
C 3033 (A,22,46)
C 3037 (A,20,47)
C 3038 (A,22,48)

C 3040 (A,18,42)
C 3041 (A,16,51)
C 3042 (A,25,73) 4.7 uF
C 3043 (A,21,48)
C 3044 (A,16,59)

C 3046 (B,9,45)
C 3101 (A,114,72) 10 uF
C 3102 (A,112,74)
C 3103 (A,109,79)
C 3104 (A,110,77)

C 3105 (A,84,65) 10 uF
C 3106 (A,98,68) 10 uF
C 3107 (A,107,67) 2.2 uF
C 3108 (A,95,68) 10 uF
C 3109 (A,110,63) 10 uF

C 3110 (A,112,63) 10 uF
C 3111 (A,115,63) 10 uF
C 3201 (A,101,17)
C 3202 (B,104,16)
C 3203 (B,101,17) 1 uF

C 3205 (B,102,29)
C 3206 (B,104,29)
C 3208 (B,108,17)
C 3209 (B,102,21)
C 3210 (B,103,21)

C 3211 (A,107,9)
C 3212 (A,106,9)
C 3214 (A,105,9) 1 uF
C 3215 (A,110,22)
C 3216 (A,104,11)

C 3217 (A,99,26) 4.7 uF
C 3218 (B,105,26)
C 3219 (A,108,16)
C 3220 (A,96,24)
C 3221 (A,110,18)

C 3222 (A,95,20)
C 3223 (A,95,18)
C 3224 (A,102,12)
C 3309 (A,68,30)
C 3310 (A,68,31)

C 3311 (A,69,24)
C 3312 (A,69,23)
C 3321 (B,32,34)
C 3322 (B,33,34)
C 3323 (B,36,35) 10 uF

4

Part No.

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSRYB474K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB152K50

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH120J50
CKSSYB103K16

CCSSCH4R0C50
CCSSCH120J50
CCG1201
CKSSYB104K10
CKSSYB103K16

CKSSYB104K10
CCG1236
CKSSYB104K16
CKSSYB104K10
CKSSYB104K10

CCG1236
CCG1236
CCG1218
CCG1236
CCG1236

CCG1236
CCG1236
CKSSYB102K50
CKSRYB105K16
DCH1246

CKSQYB105K25
CKSQYB105K25
CKSRYB104K50
CKSRYB104K50
CKSRYB104K50

CKSSYB224K6R3
CKSSYB224K6R3
DCH1246
CKSYB475K16
CKSRYB682K50

CCG1201
CCSRCH561J50
CCSSCH101J50
CKSRYB222K50
CKSRYB224K16

CKSYB475K16
CKSYB475K16
CCSRCH471J50
CKSSYB102K50
CKSSYB104K10

CKSSYB102K50
CKSSYB104K10
CKSSYB102K50
CKSSYB104K16
DCH1165

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
C 3326 (B,47,35)	CKSSYB102K50	IC 405 (B,6,7) IC	S-80827CNMC-B8M
C 3328 (B,29,34)	CKSSYB102K50	IC 406 (A,6,7) Regulator IC	S-1206B1C-I6U
C 3329 (B,29,35)	CKSSYB104K10	D 402 (B,7,22) Diode	DA2J101
C 3330 (B,29,38) 10 uF	DCH1201	L 401 (A,25,11) Inductor	LCYB10NJ1005
C 3333 (B,24,34)	CKSSYB104K16	L 402 (A,16,12) SMD Ferrite Bead	CTF1806
		L 403 (A,32,21) Chip Ferrite Bead	OTL8019
C 3334 (B,26,34) 4.7 uF	CCG1201	L 404 (A,38,14) Chip Ferrite Bead	OTL8019
C 3336 (B,26,31)	CKSQYB225K16	L 405 (A,39,13) Chip Ferrite Bead	OTL8019
C 3338 (B,17,31)	CKSQYB334K50	L 406 (A,10,8) Chip Ferrite Bead	OTL8019
C 3342 (A,18,36)	CKSSYB104K10	L 407 (A,15,9) Chip Ferrite Bead	OTL8019
C 3343 (A,55,17)	CKSSYB104K10	X 401 (A,13,13) Crystal Oscillator 26 MHz	CWX4552
C 3344 (A,65,18) 10 uF	CCG1236	X 402 (A,29,18) Resonator 32.768 kHz	CSS1807
C 3345 (A,130,17)	CKSSYB104K10	X 403 (B,8,17) Crystal Resonator 10 MHz	CSS1799
C 3346 (A,131,18)	CKSSYB104K10	F 401 (A,29,14) Filter	CTF1830
		GY401 (A,34,10) Sensor	CSX1209
		GY402 (A,35,21) Sensor	CSX1210
		CN401 (A,20,5) Connector	CKS5204

F

Unit Number : CXX6351

Unit Name : Key Unit(Service)

MISCELLANEOUS

D 3551 (A,14,5) LED	SMLVN6RGB2UK(B)
D 3552 (A,152,5) LED	SMLVN6RGB2UK(B)
S 3551 (A,99,5) Push Switch	CSG1196
S 3552 (A,115,5) Push Switch	CSG1196
S 3553 (A,133,5) Push Switch	CSG1196
S 3554 (A,142,5) Push Switch	CSG1196
S 3555 (A,30,5) Push Switch	CSG1196
S 3556 (A,50,5) Push Switch	CSG1196
S 3557 (A,67,5) Push Switch	CSG1196
S 3558 (A,82,5) Push Switch	CSG1196
S 3559 (A,158,5) Push Switch	CSG1196
CN3551 (A,22,6) Connector	CKS6421

RESISTORS

R 3551 (A,94,4)	RS1/16SS182J
R 3552 (A,111,5)	RS1/16SS222J
R 3553 (A,128,4)	RS1/16SS472J
R 3554 (A,138,3)	RS1/16SS123J
R 3555 (A,45,4)	RS1/16SS182J
R 3556 (A,63,4)	RS1/16SS222J
R 3557 (A,77,4)	RS1/16SS472J
R 3558 (A,138,6)	RS1/16SS390J
R 3559 (A,33,6)	RS1/16SS390J
R 3560 (A,35,6)	RS1/16SS150J
R 3561 (A,36,6)	RS1/16SS620J
R 3562 (A,136,4)	RS1/16SS150J
R 3563 (A,137,5)	RS1/16SS620J

G

Unit Number : CWX4472

Unit Name : Sensor Unit

MISCELLANEOUS

IC 401 (A,21,17) IC	UBX-G6010-ST
IC 402 (A,36,16) Sensor	S-5851AAA-I6U
IC 403 (B,23,15) IC	R5S726A0D216FP
IC 404 (A,7,18) Flash ROM Unit	CWW7785

RESISTORS

R 401 (A,14,16)	RS1/16SS0R0J
R 404 (A,37,18)	RS1/16SS221J
R 405 (A,33,24)	RS1/16SS101J
R 407 (A,34,16)	RS1/16SS221J
R 408 (A,38,10)	RS1/16SS101J
R 409 (A,26,12)	RS1/16SS473J
R 410 (A,15,16)	RS1/16SS101J
R 411 (A,27,16)	RS1/16SS105J
R 412 (A,20,23)	RS1/16SS0R0J
R 413 (A,29,22)	RS1/10SR101J
R 414 (A,19,24)	RS1/16SS103J
R 415 (A,21,23)	RS1/16SS0R0J
R 416 (A,22,23)	RS1/16SS101J
R 417 (B,36,19)	RS1/16SS103J
R 418 (B,35,18)	RS1/16SS103J
R 420 (B,34,21)	RS1/16SS101J
R 421 (B,34,20)	RS1/16SS151J
R 422 (B,32,3)	RS1/16SS101J
R 423 (A,10,24)	RS1/16SS473J
R 424 (A,8,24)	RS1/16SS473J
R 425 (A,6,24)	RS1/16SS473J
R 426 (A,8,11)	RS1/16SS101J
R 427 (B,24,3)	RS1/16SS101J
R 428 (B,25,3)	RS1/16SS103J
R 429 (B,7,24)	RS1/16SS101J
R 430 (B,8,25)	RS1/16SS101J
R 431 (A,27,10)	RS1/16SS103J
R 432 (A,5,11)	RS1/16SS101J
R 433 (B,11,25)	RS1/16SS101J
R 434 (A,20,10)	RS1/16SS101J
R 435 (B,21,25)	RS1/16SS101J
R 436 (B,16,3)	RS1/16SS103J
R 437 (A,29,10)	RAB4CQ473J
R 438 (A,4,12)	RS1/16SS473J
R 439 (A,8,12)	RS1/16SS473J
R 441 (B,15,25)	RS1/16SS473J
R 444 (B,11,21)	RS1/16SS473J
R 445 (B,12,15)	RS1/16SS392J
R 446 (B,11,9)	RS1/16SS104J

1

Circuit Symbol and No.

R 449 (B,37,21)
R 450 (B,34,22)

2

Part No.

RS1/16SS473J
RS1/16SS473J

3

Circuit Symbol and No.

C 450 (B,12,16)
C 452 (B,9,9) 1 uF

4

Part No.

CKSSYB104K10
DCH1246

A

R 451 (B,9,11)
R 452 (B,8,13)
R 453 (B,12,19)
R 454 (B,36,14)
R 455 (B,36,12)
R 456 (B,12,4)

RS1/16SS0R0J
RS1/16SS473J
RS1/16SS473J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

C 453 (B,8,19)
C 454 (B,8,15)
C 455 (A,8,7) 1 uF
C 456 (A,4,8) 1 uF
C 457 (A,27,12)

CCSSCH120J50
CCSSCH120J50
DCH1246
DCH1246
CCSSCH101J50

R 458 (B,12,6)

RS1/16SS101J

CAPACITORS

C 401 (A,13,15) 1 uF
C 402 (A,25,9)
C 403 (A,25,10)
C 404 (A,14,10)
C 405 (A,32,7)

DCH1246
CCSSCH470J50
CCSSCKR50C50
CKSSYB102K50
CKSSYB103K16

C 406 (A,35,18)
C 407 (A,19,11)
C 408 (A,22,11) 1 uF
C 409 (A,21,10) 1 uF
C 410 (A,23,11) 1 uF

CKSSYB104K10
CKSSYB104K10
DCH1246
DCH1246
DCH1246

C 411 (A,23,10) 1 uF
C 412 (A,34,5)
C 413 (A,33,19) 1 uF
C 414 (A,35,5) 1 uF
C 415 (A,36,14)

DCH1246
CKSSYB104K10
DCH1246
DCH1246
CKSSYB104K10

C 416 (A,36,6)
C 417 (A,38,19)
C 418 (A,16,13) 1 uF
C 419 (A,27,15)
C 420 (A,31,17)

CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10
CCSSCH120J50

C 421 (A,31,19)
C 422 (A,27,18) 1 uF
C 423 (A,15,18) 2.2 uF
C 424 (A,15,19) 1 uF
C 425 (A,16,21) 1 uF

CCSSCH100D50
DCH1246
CCG1205
DCH1246
DCH1246

C 426 (A,17,22) 1 uF
C 427 (A,19,23) 1 uF
C 428 (A,24,23) 2.2 uF
C 429 (A,26,21) 1 uF
C 431 (B,34,17)

DCH1246
DCH1246
CCG1205
DCH1246
CKSSYB104K10

C 432 (B,34,13)
C 433 (B,34,11)
C 434 (B,30,4)
C 435 (B,28,25)
C 436 (B,26,25)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 437 (B,25,4)
C 438 (B,24,25)
C 439 (B,22,4)
C 440 (B,21,3)
C 441 (B,19,25)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 442 (B,16,4)
C 443 (A,6,12)
C 444 (A,10,13)
C 445 (B,12,23)
C 446 (B,12,21)

CKSSYB104K10
CCSSCJ3R0C50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 447 (B,12,13)
C 448 (B,12,12)
C 449 (B,13,10)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

**Unit Number : EXX2001****Unit Name : PCB Assy(Service)****MISCELLANEOUS**

IC 101 Driver IC
VR101 Volume 10 kohm
S 101 Switch(HOME)
S 102 Switch(HOME)
CN101 Connector

BA6288FS
CCW1029
CSN1067
CSN1068
CKS4997

RESISTORS

R 101
R 102
R 103

RS1/16S221J
RS1/16S221J
RS1/16S0R0J

CAPACITORS

C 101
C 102

CEVW220M16
CKSRYB104K16