
# ■EXPLODED VIEW • PARTS LIST


## DCP section

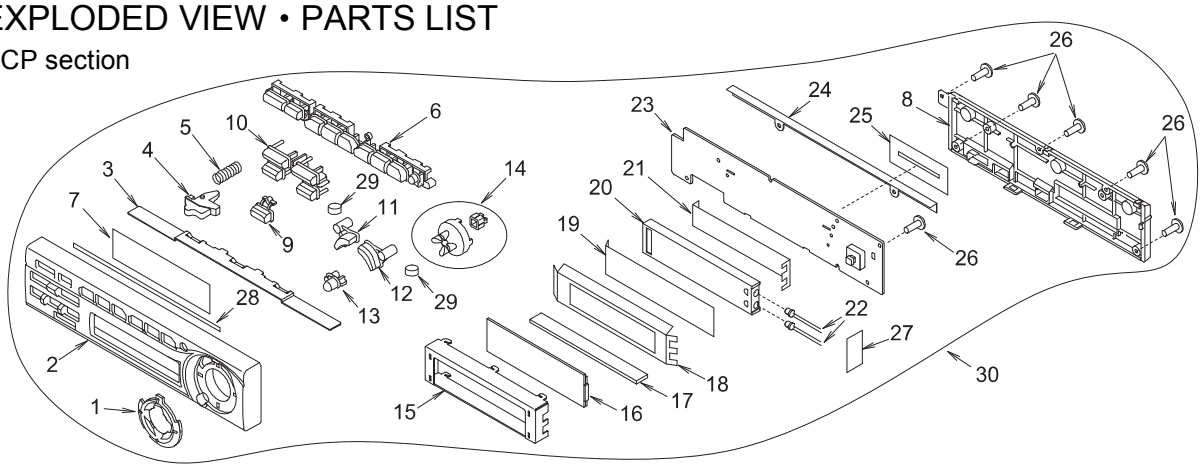



## LCD module section

Note:

Please refer to page 8 when you release the LCD module from the main unit.

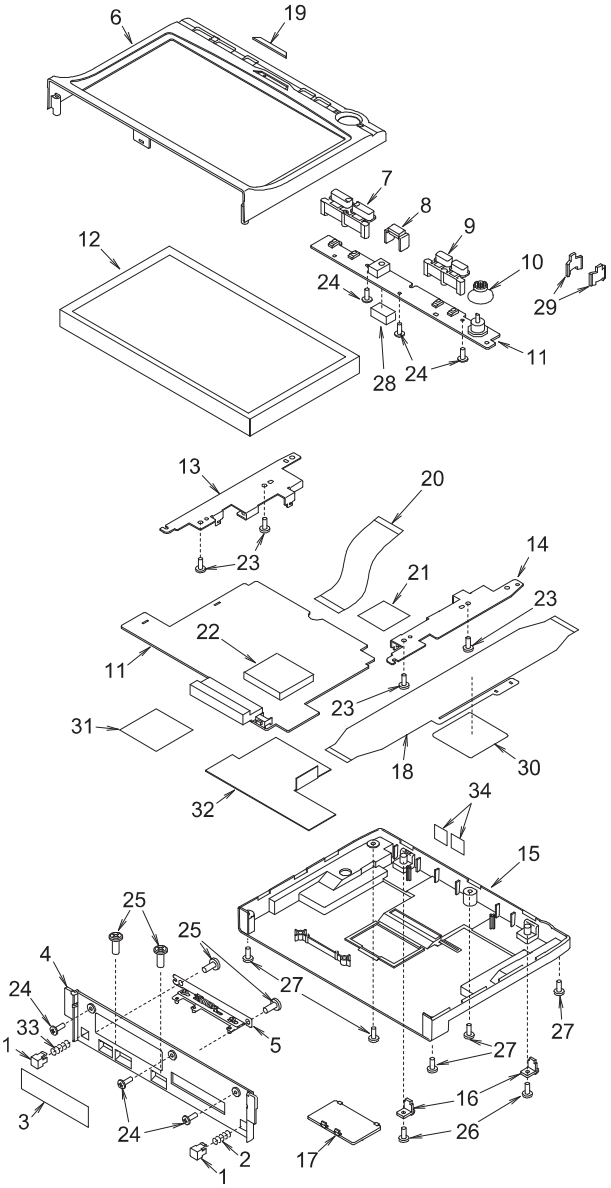


## Main section

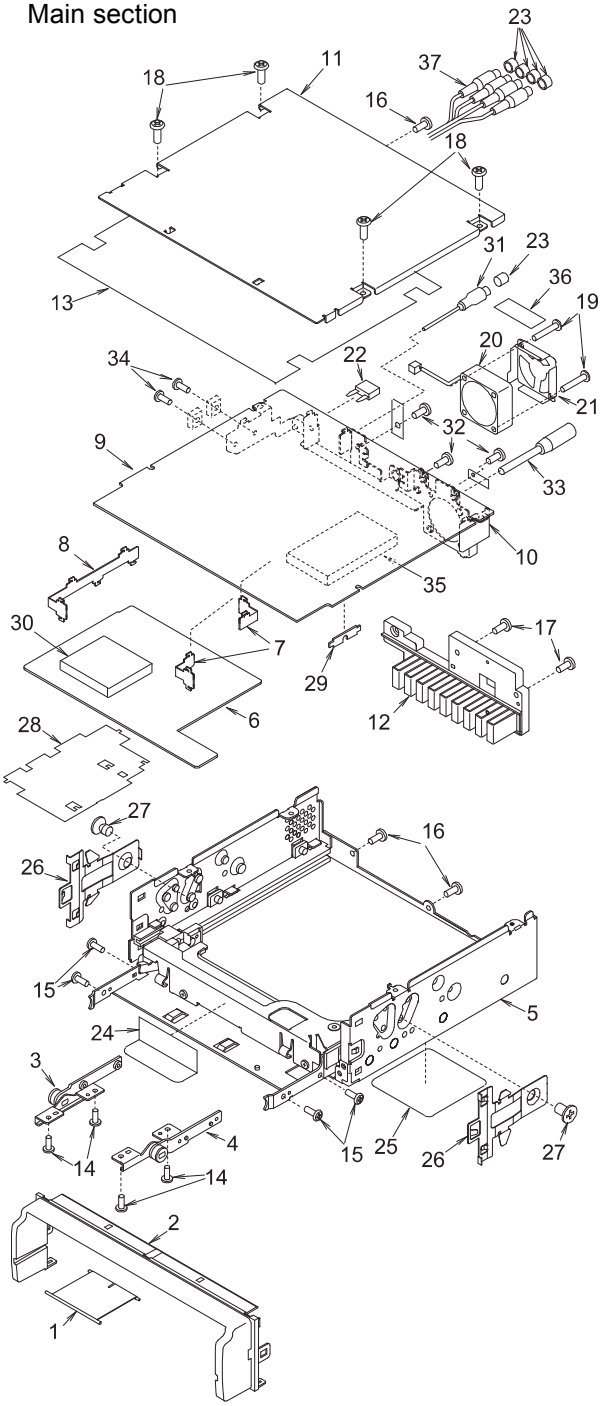

## DCP section

Note:Some parts depend on each model.The model name is specified in the description.

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | 335-6084-40 | ILLUMI PLATE | 1 |
| 2 | 370-5828-61<br>370-5828-80 | ECSUTCHEON(VRX610)<br>ESCUTCHEON(VRX610P) | 1 |
| 3 | 331-2770-00 | SPACER | 1 |
| 4 | 335-6082-00 | LEVER(Release) | 1 |
| 5 | 750-6696-20 | SPRING | 1 |
| 6 | 947-0495-41 | BUTTON ASSY | 1 |
| 7 | 371-3912-20 | TRIM PLATE | 1 |
| 8 | 335-6081-00 | BACK PLATE | 1 |
| 9 | 382-5455-40 | BUTTON(RPT) | 1 |
| 10 | 382-5470-40 | BUTTON(SCN/RDM/Z-E/TA) | 1 |
| 11 | 382-5468-30 | BUTTON(BAND) | 1 |
| 12 | 382-5467-30 | BUTTON(FUNC) | 1 |
| 13 | 382-5466-30 | BUTTON(PLAY/PAUSE) | 1 |
| 14 | 947-0498-00 | KNOB ASSY | 1 |
| 15 | 331-2771-00 | LCD COVER | 1 |

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 16 | 379-1162-41 | INDICATOR(FOR DCP) | 1 |
| 17 | 345-8389-20 | RUBBER CONNECTOR | 1 |
| 18 | 347-5336-00 | FILM | 1 |
| 19 | 347-6617-00 | CCS FILM | 1 |
| 20 | 335-5138-00 | ILLUMI PLATE | 1 |
| 21 | 347-5335-00 | REFLECTOR | 1 |
| 22 | 001-7046-01 | LED | 2 |
| 23 | 039-1528-20 | DCP PWB<br>(WITHOUT COMPONENT) | 1 |
| 24 | 347-6155-00 | INSULATOR | 1 |
| 25 | 347-6115-20 | SHADE | 1 |
| 26 | 716-0872-11 | PAD SCREW | 6 |
| 27 | 347-2061-00 | LABEL | 1 |
| 28 | 347-6463-00 | SPACER | 1 |
| 29 | 345-3957-20 | RUBBER SPACER | 2 |
| 30 | DCP-368-600 | DCP ASSY(VRX610) | 1 |

## LCD module section

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | 335-5147-00 | EJECTOR | 2 |
| 2 | 750-6697-20 | SPRING | 1 |
| 3 | 347-5187-21 | GUIDE LABEL | 1 |
| 4 | 335-6078-00 | DCP COVER | 1 |
| 5 | 948-0539-00 | HOOK-P-ASSY | 1 |
| 6 | 373-0909-41<br>373-0909-40 | DIAL COVER(VRX610)<br>DIAL COVER(VRX610P) | 1 |
| 7 | 382-5456-40 | BUTTON(IN/OUT) | 1 |
| 8 | 335-6077-00 | IR FILTER | 1 |
| 9 | 382-5457-40 | BUTTON(MENU/VIEW) | 1 |
| 10 | 380-5452-00 | KNOB(JOG) | 1 |
| 11 | 039-1545-20 | LCD PWB<br>(WITHOUT COMPONENT) | 1 |
| 12 | 379-4025-00 | INDICATOR(6.5inch) | 1 |
| 13 | 331-2710-00 | LCD BRACKET A | 1 |
| 14 | 331-2711-00 | LCD BRACKET B | 1 |
| 15 | 377-2613-30 | DIAL SUPPORT | 1 |
| 16 | 335-5161-00 | LOCK | 2 |
| 17 | 335-6089-00 | CONNECT COVER | 1 |

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 18 | 039-1521-00 | FLEXIBLE PWB | 1 |
| 19 | 378-0515-00 | BADGE(Clarion) | 1 |
| 20 | 816-2439-50 | FLAT WIRE | 1 |
| 21 | 347-6110-00 | INSULATOR | 1 |
| 22 | 331-2789-00 | SHIELD CASE | 1 |
| 23 | 702-2605-80 | TAP SCREW(2.6×5) | 4 |
| 24 | 716-0872-02 | PAD SCREW | 6 |
| 25 | 702-2606-87 | TAP SCREW(2.6×6) | 4 |
| 26 | 702-2006-89 | TAP SCREW(2.6×6) | 2 |
| 27 | 702-2010-87 | TAP SCREW(M2×10) | 5 |
| 28 | 345-8378-00 | SPACER | 1 |
| 29 | 335-6076-00 | REFLECTOR | 2 |
| 30 | 347-6114-00 | SHADE | 1 |
| 31 | 347-5422-00 | SHIELD SHEET | 1 |
| 32 | 347-6154-00 | SHIELD SHEET | 1 |
| 33 | 750-6701-00 | SPRING | 1 |
| 34 | 347-6371-00 | SPACER | 2 |

## Main section

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | 335-6075-00 | FLEXIBLE PWB COVER | 1 |
| 2 | 370-5829-30 | ESCUTCHEN | 1 |
| 3 | 948-0523-00 | TORQUE BUSH L | 1 |
| 4 | 948-0523-10 | TORQUE BUSH R | 1 |
| 5 | 948-0530-20 | SLIDE MECH ASSY(cf.p9) | 1 |
| 6 | 039-1911-00 | DIGITAL PWB<br>(WITHOUT COMPONENT) | 1 |
| 7 | 331-2712-00 | PWB HOLDER A | 2 |
| 8 | 331-2713-00 | PWB HOLDER B | 1 |
| 9 | 039-1910-00 | MAIN PWB<br>(WITHOUT COMPONENT) | 1 |
| 10 | 331-2714-10 | CONNECTOR PLATE | 1 |

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 11 | 311-1778-01 | LOWER CASE | 1 |
| 12 | 313-1761-00 | HEAT SINK | 1 |
| 13 | 347-6111-00 | INSULATOR | 1 |
| 14 | 780-2606-03 | IT SCREW(M2.6×6) | 4 |
| 15 | 780-2605-02 | MACHINE SCREW(M2.6×5) | 4 |
| 16 | 731-2605-80 | TAP SCREW(M2.6×5) | 3 |
| 17 | 714-2610-80 | MACHINE SCREW(M2.6×10) | 2 |
| 18 | 716-1494-00 | IT SCREW | 4 |
| 19 | 780-2615-00 | MACHINE SCREW(M2.6×15) | 2 |
| 20 | 020-3042-00 | FAN | 1 |
| 21 | 331-2727-00 | FAN COVER | 1 |


| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 22 | 060-8021-07 | AUTO FUSE(15A) | 1 |
| 23 | 345-3799-20 | CAP | 5 |
| 24 | 347-6136-00 | FLEXIBLE PWB GUIDE | 1 |
| 25 | 286-9601-00<br>286-9601-30<br>286-9601-31 | SETPLATE(VRX610)<br>SETPLATE(VRX610P/K-B)<br>SETPLATE(VRX610P/K-C) | 1 |
| 26 | 750-3137-00 | SPRING | 2 |
| 27 | 714-5008-41 | MACHINE SCREW(M5×8) | 2 |
| 28 | 347-6153-00 | SHIELD SHEET | 1 |
| 29 | 347-6113-00 | SHIELD SHEET | 1 |

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 30 | 331-2790-00 | SHIELD CASE | 1 |
| 31 | 855-5436-50 | RCA CORD(VIDEO) | 1 |
| 32 | 714-3005-80 | MACHINE SCREW(M3×5) | 3 |
| 33 | 092-0701-02 | ANTENNA RECEPTACLE | 1 |
| 34 | 714-2606-80 | MACHINE SCREW(M2.6×6) | 2 |
| 35 | 880-2084C | FM/AM TUNER PACK | 1 |
| 36 | 353-0249-00 | SHADE | 1 |
| 37 | 855-5427-51 | RCA CORD(AUDIO) | 1 |

## ■How to release LCD module

Refer to the exploded view of the main section on page 6.

1. Remove the machine screws(No.27x2) and the springs(No.26x2).
2. Remove the IT screws(No.18x4) and the tap screw(No.16x3) in order to release the lower case(No.11).
3. Remove the escutchen(No.2) and the main PWB assembly(No.9).
4. Pull out the LCD module,and release the flexible PWB of the LCD module from the motor of the slide mechanism assembly(No.5).(Fig.5)

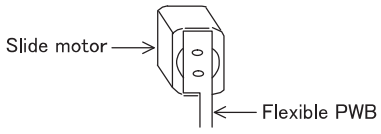



—Fig.5—

5. Release the hooks of the Flexible PWB cover(No.1) from the LCD module and the slide mechanism assembly(No.5).
6. Remove the flexible PWB cover(No.1) and the IT screws(No.14x4).

## ■EXPLODED VIEW • PARTS LIST

Slide mechanism section : 948-0530-20

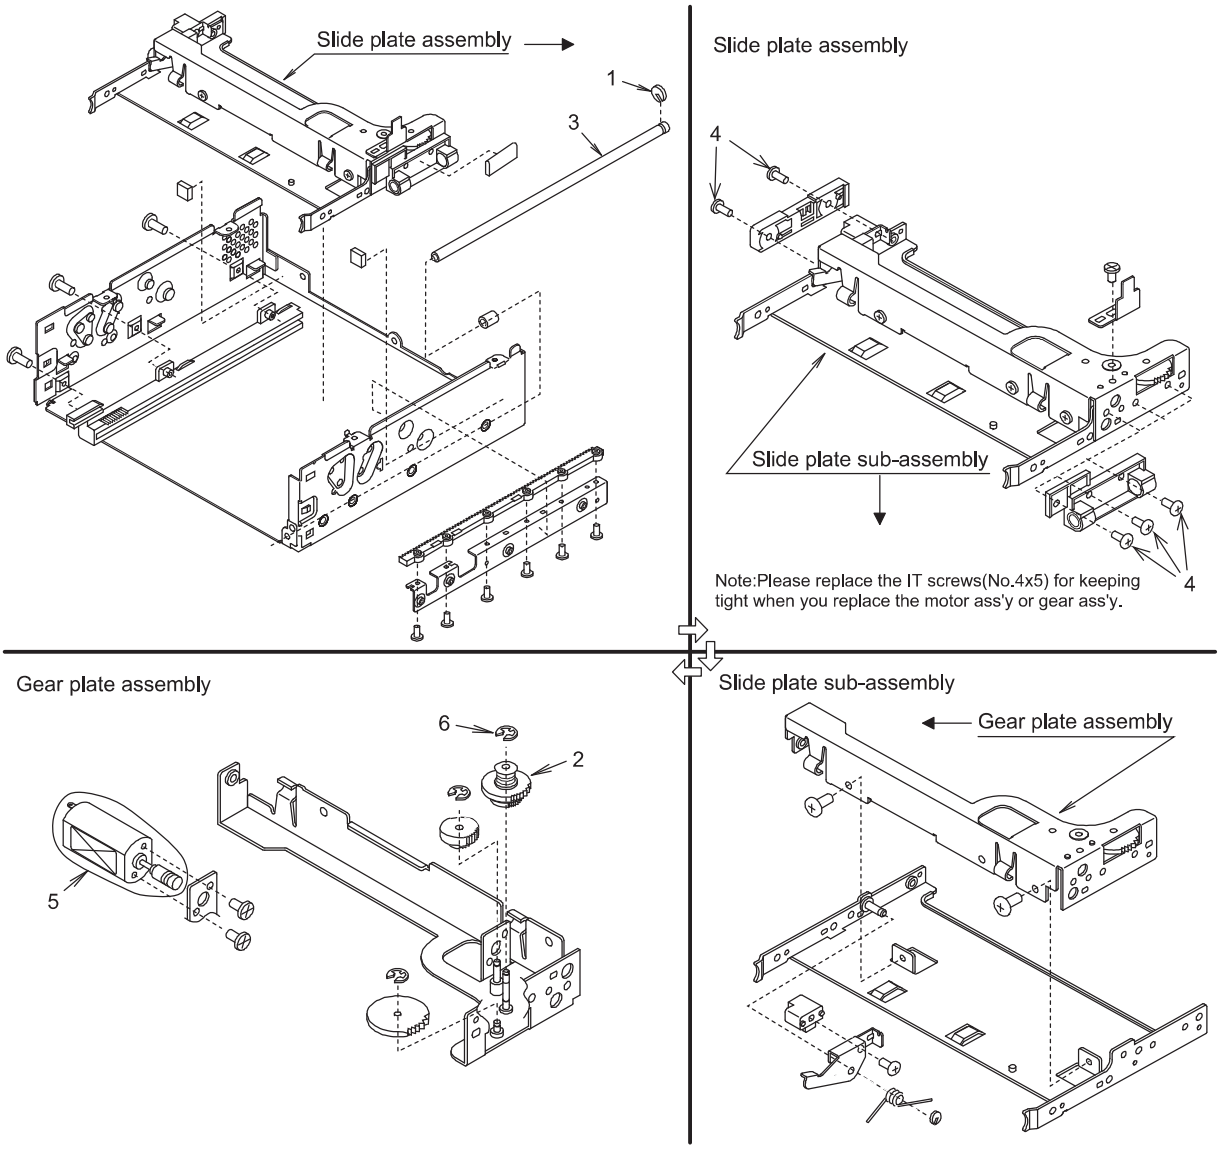


| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 1 | 744-0041-00 | E-RING | 1 |
| 2 | 634-0016-00 | GEAR ASSY | 1 |
| 3 | 612-0402-00 | SHAFT | 1 |

| NO. | PART NO. | DESCRIPTION | Q'TY |
|---|---|---|---|
| 4 | 780-2606-03 | IT SCREW | 5 |
| 5 | 634-0017-00 | MOTOR ASSY | 1 |
| 6 | 743-1500-01 | E-RING | 1 |

### Caution for the replacement of the motor assembly

After you replaced the motor assembly with new one,please make sure that the current of the motor assembly is 50mA or less when you input 8V as the power voltage.

If the current is over 50mA,loosen the screws, and adjust the position of the motor assembly.

Then tighten the screws,and check the current again.

# ■ELECTRICAL PARTS LIST

## Main PWB section(B1)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| BL1 | 880-2084C | AM/FM TUNER |
| C1 | 168-1032-55 | 0.01 μF |
| C2 | 042-0595-80 | 50V2.2 μF |
| C3 | 166-2201-50 | 22pF CH |
| C4 | 166-1801-50 | 18pF CH |
| C5 | 166-2201-50 | 22pF CH |
| C6 | 163-2263-35 | 16V22 μF |
| C9 | 168-3335-56 | 0.033 μF |
| C10 | 168-3335-56 | 0.033 μF |
| C11 | 178-3932-78 | 0.039 μF |
| C12 | 168-6822-55 | 6800pF |
| C13 | 168-2222-55 | 2200pF |
| C14 | 168-1022-55 | 1000pF |
| C15 | 168-2232-55 | 0.022 μF |
| C16 | 168-1022-55 | 1000pF |
| C18 | 168-2232-55 | 0.022 μF |
| C19 | 168-2232-55 | 0.022 μF |
| C20 | 168-2212-55 | 220pF |
| C25 | 166-1011-50 | 100pF CH |
| C26 | 166-1011-50 | 100pF CH |
| C27 | 166-1011-50 | 100pF CH |
| C29 | 042-0595-65 | 16V47 μF |
| C30 | 168-4735-56 | 0.047 μF |
| C32 | 042-0595-65 | 16V47 μF |
| C33 | 168-1045-56 | 0.1 μF |
| C34 | 042-0595-79 | 50V1 μF |
| C35 | 168-1045-56 | 0.1 μF |
| C36 | 168-2212-55 | 220pF |
| C37 | 168-8222-55 | 8200pF |
| C38 | 166-1011-50 | 100pF CH |
| C40 | 168-1222-55 | 1200pF |
| C41 | 166-1501-50 | 15pF CH |
| C42 | 166-1801-50 | 18pF CH |
| C43 | 042-0595-79 | 50V1 μF |
| C44 | 042-0595-79 | 50V1 μF |
| C48 | 168-1022-55 | 1000pF |
| C49 | 166-1011-50 | 100pF CH |
| C50 | 166-1011-50 | 100pF CH |
| C57 | 166-1011-50 | 100pF CH |
| C58 | 166-1011-50 | 100pF CH |
| C102 | 166-4701-50 | 47pF CH |
| C103 | 168-1045-56 | 0.1 μF |
| C104 | 042-0592-58 | 16V10 μF |
| C106 | 042-0592-58 | 16V10 μF |
| C107 | 042-0592-73 | 50V1 μF |
| C108 | 042-0592-74 | 50V 2.2 μF |
| C109 | 168-6822-55 | 6800pF |
| C110 | 166-2201-50 | 22pF CH |
| C112 | 168-6835-56 | 0.068 μF |
| C113 | 168-1022-55 | 1000pF |
| C114 | 168-2212-55 | 220pF |
| C115 | 168-1032-55 | 0.01 μF |
| C116 | 178-1055-79 | 1 μF |
| C118 | 042-0592-66 | 35V 4.7 μF |
| C119 | 042-0592-59 | 16V22 μF |
| C120 | 042-0592-58 | 16V10 μF |
| C121 | 042-0595-62 | 16V10 μF |
| C122 | 042-0592-70 | 50V0.22 μF |
| C123 | 042-0592-70 | 50V0.22 μF |
| C124 | 042-0592-70 | 50V0.22 μF |
| C125 | 042-0592-70 | 50V0.22 μF |
| C126 | 168-1045-56 | 0.1 μF |
| C127 | 168-3322-55 | 3300pF |
| C129 | 166-4701-50 | 47pF CH |
| C130 | 042-0592-58 | 16V10 μF |
| C132 | 042-0595-80 | 50V2.2 μF |
| C134 | 184-2283-32 | 16V2200 μF |
| C135 | 042-0595-79 | 50V1 μF |
| C137 | 168-1032-55 | 0.01 μF |
| C138 | 042-0595-62 | 16V10 μF |
| C139 | 042-0595-62 | 16V10 μF |
| C141 | 166-4701-50 | 47pF CH |
| C142 | 042-0592-58 | 16V10 μF |
| C143 | 042-0592-59 | 16V22 μF |
| C144 | 042-0592-66 | 35V 4.7 μF |
| C145 | 042-0595-66 | 25V4.7 μF |
| C146 | 042-0592-58 | 16V10 μF |
| C147 | 042-0592-74 | 50V 2.2 μF |
| C148 | 168-2212-55 | 220pF |
| C149 | 178-1055-79 | 1 μF |
| C150 | 166-2201-50 | 22pF CH |
| C152 | 168-6835-56 | 0.068 μF |
| C153 | 168-1022-55 | 1000pF |
| C154 | 042-0595-62 | 16V10 μF |
| C155 | 168-6822-55 | 6800pF |
| C156 | 042-0592-59 | 16V22 μF |
| C157 | 042-0592-58 | 16V10 μF |
| C158 | 168-1045-56 | 0.1 μF |
| C159 | 042-0592-73 | 50V1 μF |
| C160 | 166-4701-50 | 47pF CH |
| C161 | 042-0592-58 | 16V10 μF |
| C162 | 042-0592-58 | 16V10 μF |
| C165 | 168-1032-55 | 0.01 μF |
| C173 | 168-1032-55 | 0.01 μF |
| C174 | 178-1055-79 | 1 μF |
| C175 | 042-0595-84 | 10V100 μF |
| C176 | 042-0595-84 | 10V100 μF |
| C177 | 168-1032-55 | 0.01 μF |
| C180 | 042-0595-62 | 16V10 μF |
| C181 | 184-2283-32 | 16V2200 μF |
| C182 | 166-2201-50 | 22pF CH |
| C183 | 172-1041-11 | 0.1 μF |
| C184 | 042-0595-62 | 16V10 μF |
| C186 | 042-0592-58 | 16V10 μF |
| C187 | 042-0592-58 | 16V10 μF |
| C188 | 042-0592-58 | 16V10 μF |
| C189 | 166-2201-50 | 22pF CH |
| C190 | 042-0595-62 | 16V10 μF |
| C191 | 042-0592-58 | 16V10 μF |
| C192 | 168-1032-55 | 0.01 μF |
| C193 | 042-0595-62 | 16V10 μF |
| C194 | 168-1032-55 | 0.01 μF |
| C195 | 042-0592-58 | 16V10 μF |
| C196 | 042-0592-58 | 16V10 μF |
| C197 | 042-0592-58 | 16V10 μF |
| C198 | 042-0592-58 | 16V10 μF |
| C199 | 042-0592-58 | 16V10 μF |
| C200 | 042-0595-62 | 16V10 μF |
| C201 | 166-2201-50 | 22pF CH |
| C202 | 042-0592-66 | 35V 4.7 μF |
| C203 | 166-2201-50 | 22pF CH |
| C204 | 042-0595-62 | 16V10 μF |
| C205 | 168-1032-55 | 0.01 μF |
| C207 | 166-2201-50 | 22pF CH |
| C209 | 166-2201-50 | 22pF CH |
| C210 | 042-0595-62 | 16V10 μF |
| C211 | 168-1032-55 | 0.01 μF |
| C212 | 042-0592-58 | 16V10 μF |
| C213 | 042-0592-66 | 35V 4.7 μF |
| C214 | 166-2201-50 | 22pF CH |
| C215 | 042-0592-66 | 35V 4.7 μF |
| C216 | 166-2201-50 | 22pF CH |
| C217 | 042-0592-66 | 35V 4.7 μF |
| C218 | 168-1032-55 | 0.01 μF |
| C219 | 163-1073-35 | 16V100 μF |
| C220 | 168-1032-55 | 0.01 μF |
| C221 | 163-1073-35 | 16V100 μF |
| C222 | 168-1032-55 | 0.01 μF |
| C223 | 163-1073-35 | 16V100 μF |
| C224 | 042-0635-50 | 10V47 μF |
| C225 | 178-2232-78 | 0.022 μF |
| C226 | 168-1045-56 | 0.1 μF |
| C227 | 168-1045-56 | 0.1 μF |
| C228 | 172-1041-11 | 0.1 μF |
| C229 | 168-2212-55 | 220pF |
| C230 | 042-0595-62 | 16V10 μF |
| C231 | 042-0592-66 | 35V 4.7 μF |
| C232 | 042-0592-66 | 35V 4.7 μF |
| C235 | 168-1032-55 | 0.01 μF |
| C236 | 042-0595-62 | 16V10 μF |
| C237 | 168-2212-55 | 220pF |
| C238 | 168-1045-56 | 0.1 μF |
| C239 | 042-0595-62 | 16V10 μF |
| C240 | 168-1032-55 | 0.01 μF |
| C241 | 042-0595-62 | 16V10 μF |
| C242 | 042-0595-64 | 16V33 μF |
| C244 | 042-0595-62 | 16V10 μF |
| C251 | 168-1022-55 | 1000pF |
| C252 | 168-1022-55 | 1000pF |
| C253 | 168-1022-55 | 1000pF |
| C254 | 168-1022-55 | 1000pF |
| D101 | 001-0516-90 | MA111 |
| D102 | 001-0516-90 | MA111 |
| D103 | 001-2606-90 | M1FS4 |
| D104 | 001-2606-90 | M1FS4 |
| D105 | 001-2606-90 | M1FS4 |
| D106 | 001-2606-90 | M1FS4 |
| D111 | 001-0516-90 | MA111 |
| D112 | 001-0516-90 | MA111 |
| D113 | 001-0516-90 | MA111 |
| D114 | 001-0592-00 | RM4Z |
| D115 | 001-0516-90 | MA111 |
| D116 | 001-0356-91 | 1SS184 |
| D117 | 001-2403-90 | M1F60 |
| D118 | 001-0516-90 | MA111 |
| D119 | 001-0516-90 | MA111 |
| D120 | 001-0516-90 | MA111 |
| D121 | 001-0529-46 | MA8091-L |
| D122 | 001-0516-90 | MA111 |
| D123 | 001-2403-90 | M1F60 |
| D124 | 001-0529-48 | MA8091-H |
| D125 | 001-0516-90 | MA111 |
| D150 | 001-0529-25 | MA8047-L |
| F101 | 060-8023-58 | 3A |
| FAN | 020-3042-00 | |
| IC3 | 051-6201-90 | LC72146M |
| IC101 | 051-2023-01 | TA8260AH |
| IC102 | 051-0350-93 | NJM4558M |
| IC103 | 051-5008-90 | M62419FP |
| IC104 | 051-0350-93 | NJM4558M |
| IC105 | 051-0350-93 | NJM4558M |
| IC106 | 051-0350-93 | NJM4558M |
| IC108 | 051-0350-93 | NJM4558M |
| IC109 | 051-0350-93 | NJM4558M |
| IC110 | 051-0350-93 | NJM4558M |
| IC111 | 051-0350-93 | NJM4558M |
| IC112 | 051-3201-00 | AN77L06 |
| IC113 | 051-7232-08 | 74VHC4066M |
| IC114 | 051-6600-38 | CA0008AM |
| IC115 | 051-0350-93 | NJM4558M |
| IC116 | 051-5801-00 | GP1S53V |
| IC117 | 051-5801-00 | GP1S53V |
| J101 | 074-1238-00 | 16P |
| J102 | 074-1194-00 | 13P CE-NET |
| J103 | 074-1030-00 | MINI-DIN-8P |
| L1 | 010-2003-04 | COIL |
| L2 | 010-2199-54 | 0.22 μH J |
| L3 | 010-2174-78 | 220 μH |
| L5 | 010-2199-66 | 2.2 μH J |
| L6 | 010-2199-66 | 2.2 μH J |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| P1 | 074-0977-14 | 14P |
| P101 | 074-0977-19 | SOCKET-19P |
| P102 | 076-0349-02 | 2P |
| P103 | 074-0977-17 | SOCKET-17P |
| Q5 | 190-1162-00 | 2SA1162 |
| Q6 | 190-1298-00 | 2SA1298 |
| Q8 | 108-0669-00 | 2SK669 |
| Q101 | 190-1162-00 | 2SA1162 |
| Q102 | 190-1162-00 | 2SA1162 |
| Q103 | 193-1306-00 | 2SD1306 |
| Q104 | 193-1306-00 | 2SD1306 |
| Q105 | 193-1306-00 | 2SD1306 |
| Q106 | 193-1306-00 | 2SD1306 |
| Q107 | 193-1306-00 | 2SD1306 |
| Q108 | 193-1306-00 | 2SD1306 |
| Q109 | 193-1306-00 | 2SD1306 |
| Q110 | 193-1306-00 | 2SD1306 |
| Q113 | 191-1237-00 | 2SB1237 |
| Q114 | 125-0002-93 | RN2403 |
| Q115 | 190-1162-00 | 2SA1162 |
| Q116 | 190-1162-00 | 2SA1162 |
| Q117 | 125-2004-93 | RN1403 |
| Q118 | 125-2004-93 | RN1403 |
| Q119 | 125-2004-93 | RN1403 |
| Q120 | 192-2712-00 | 2SC2712 |
| Q121 | 190-1313-00 | 2SA1313O,Y |
| Q122 | 103-1683-00 | 2SD1683 |
| Q123 | 100-1428-00 | 2SA1428 |
| Q124 | 101-1143-00 | 2SB1143 |
| Q125 | 100-1428-00 | 2SA1428 |
| Q126 | 100-1428-00 | 2SA1428 |
| Q127 | 190-1213-00 | 2SA1213 |
| Q128 | 125-2004-93 | RN1403 |
| Q129 | 125-0002-93 | RN2403 |
| Q130 | 125-2004-97 | RN1407 |
| Q131 | 125-2004-93 | RN1403 |
| Q132 | 125-2004-93 | RN1403 |
| Q133 | 125-2004-93 | RN1403 |
| Q134 | 125-2004-91 | RN1401 |
| Q135 | 192-2873-00 | 2SC2873 |
| Q136 | 190-1162-00 | 2SA1162 |
| Q137 | 125-2004-93 | RN1403 |
| Q138 | 192-2712-00 | 2SC2712 |
| R8 | 032-0104-73 | 1/4W 330Ω |
| R9 | 119-3921-15 | 1/16W 3.9kΩ |
| R11 | 119-8221-15 | 1/16W 8.2kΩ |
| R14 | 119-2201-15 | 1/16W 22Ω |
| R15 | 119-1031-15 | 1/16W 10kΩ |
| R16 | 119-1031-15 | 1/16W 10kΩ |
| R17 | 119-1031-15 | 1/16W 10kΩ |
| R18 | 119-2221-15 | 1/16W 2.2kΩ |
| R19 | 119-1031-15 | 1/16W 10kΩ |
| R21 | 119-1031-15 | 1/16W 10kΩ |
| R22 | 119-1031-15 | 1/16W 10kΩ |
| R23 | 119-2721-15 | 1/16W 2.7kΩ |
| R24 | 119-2721-15 | 1/16W 2.7kΩ |
| R25 | 119-1231-15 | 1/16W 12kΩ |
| R26 | 119-1031-15 | 1/16W 10kΩ |
| R27 | 119-2711-15 | 1/16W 270Ω |
| R28 | 119-8211-15 | 1/16W 820Ω |
| R29 | 119-1021-15 | 1/16W 1kΩ |
| R30 | 119-2221-15 | 1/16W 2.2kΩ |
| R31 | 119-1021-15 | 1/16W 1kΩ |
| R32 | 119-1021-15 | 1/16W 1kΩ |
| R33 | 119-1011-15 | 1/16W 100Ω |
| R101 | 119-1021-15 | 1/16W 1kΩ |
| R102 | 119-2231-15 | 1/16W 22kΩ |
| R103 | 119-1031-15 | 1/16W 10kΩ |
| R104 | 119-3321-15 | 1/16W 3.3kΩ |
| R107 | 119-3331-15 | 1/16W 33kΩ |
| R108 | 119-2231-15 | 1/16W 22kΩ |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R109 | 119-2221-15 | 1/16W 2.2kΩ |
| R110 | 119-2721-15 | 1/16W 2.7kΩ |
| R111 | 119-4731-15 | 1/16W 47kΩ |
| R112 | 119-4721-15 | 1/16W 4.7kΩ |
| R113 | 119-6831-15 | 1/16W 68kΩ |
| R115 | 119-3331-15 | 1/16W 33kΩ |
| R116 | 119-1021-15 | 1/16W 1kΩ |
| R117 | 119-1031-15 | 1/16W 10kΩ |
| R118 | 119-2731-15 | 1/16W 27kΩ |
| R119 | 119-3331-15 | 1/16W 33kΩ |
| R120 | 119-2231-15 | 1/16W 22kΩ |
| R121 | 119-3331-15 | 1/16W 33kΩ |
| R122 | 119-3321-15 | 1/16W 3.3kΩ |
| R123 | 119-1031-15 | 1/16W 10kΩ |
| R124 | 119-1031-15 | 1/16W 10kΩ |
| R125 | 119-1831-15 | 1/16W 18kΩ |
| R126 | 119-1021-15 | 1/16W 1kΩ |
| R127 | 119-1831-15 | 1/16W 18kΩ |
| R128 | 119-3331-15 | 1/16W 33kΩ |
| R130 | 119-2231-15 | 1/16W 22kΩ |
| R131 | 119-3331-15 | 1/16W 33kΩ |
| R132 | 119-1031-15 | 1/16W 10kΩ |
| R134 | 119-3331-15 | 1/16W 33kΩ |
| R135 | 119-3331-15 | 1/16W 33kΩ |
| R137 | 119-2231-15 | 1/16W 22kΩ |
| R138 | 119-3311-15 | 1/16W 330Ω |
| R139 | 119-3331-15 | 1/16W 33kΩ |
| R140 | 119-1031-15 | 1/16W 10kΩ |
| R141 | 119-2231-15 | 1/16W 22kΩ |
| R142 | 119-3311-15 | 1/16W 330Ω |
| R143 | 119-2731-15 | 1/16W 27kΩ |
| R144 | 119-3331-15 | 1/16W 33kΩ |
| R145 | 119-3311-15 | 1/16W 330Ω |
| R146 | 119-3331-15 | 1/16W 33kΩ |
| R147 | 119-4721-15 | 1/16W 4.7kΩ |
| R148 | 119-2231-15 | 1/16W 22kΩ |
| R149 | 119-3311-15 | 1/16W 330Ω |
| R150 | 119-1031-15 | 1/16W 10kΩ |
| R151 | 119-2231-15 | 1/16W 22kΩ |
| R154 | 119-6831-15 | 1/16W 68kΩ |
| R155 | 119-1031-15 | 1/16W 10kΩ |
| R156 | 119-2221-15 | 1/16W 2.2kΩ |
| R157 | 119-2721-15 | 1/16W 2.7kΩ |
| R158 | 119-4731-15 | 1/16W 47kΩ |
| R159 | 119-2231-15 | 1/16W 22kΩ |
| R160 | 119-2231-15 | 1/16W 22kΩ |
| R161 | 119-2231-15 | 1/16W 22kΩ |
| R162 | 119-2231-15 | 1/16W 22kΩ |
| R163 | 119-1021-15 | 1/16W 1kΩ |
| R164 | 119-1021-15 | 1/16W 1kΩ |
| R165 | 119-1021-15 | 1/16W 1kΩ |
| R166 | 119-1021-15 | 1/16W 1kΩ |
| R167 | 119-2231-15 | 1/16W 22kΩ |
| R168 | 119-3331-15 | 1/16W 33kΩ |
| R170 | 119-3311-15 | 1/16W 330Ω |
| R172 | 119-1231-15 | 1/16W 12kΩ |
| R174 | 119-1231-15 | 1/16W 12kΩ |
| R183 | 114-1591-11 | 1W 1.5Ω |
| R186 | 119-1021-15 | 1/16W 1kΩ |
| R187 | 119-1031-15 | 1/16W 10kΩ |
| R188 | 119-1031-15 | 1/16W 10kΩ |
| R189 | 119-2231-15 | 1/16W 22kΩ |
| R191 | 119-1031-15 | 1/16W 10kΩ |
| R192 | 032-0104-61 | 1/4W 2.2kΩ |
| R194 | 032-0104-67 | 1/4W 1.2kΩ |
| R196 | 119-4721-15 | 1/16W 4.7kΩ |
| R197 | 119-3321-15 | 1/16W 3.3kΩ |
| R198 | 119-1031-15 | 1/16W 10kΩ |
| R199 | 119-2231-15 | 1/16W 22kΩ |
| R200 | 119-4731-15 | 1/16W 47kΩ |
| R201 | 119-4731-15 | 1/16W 47kΩ |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R202 | 119-2231-15 | 1/16W 22kΩ |
| R203 | 119-2231-15 | 1/16W 22kΩ |
| R204 | 119-4731-15 | 1/16W 47kΩ |
| R205 | 119-4731-15 | 1/16W 47kΩ |
| R206 | 119-2231-15 | 1/16W 22kΩ |
| R207 | 119-2231-15 | 1/16W 22kΩ |
| R208 | 119-1031-15 | 1/16W 10kΩ |
| R209 | 119-4731-15 | 1/16W 47kΩ |
| R210 | 119-1031-15 | 1/16W 10kΩ |
| R211 | 119-1531-15 | 1/16W 15kΩ |
| R212 | 119-4731-15 | 1/16W 47kΩ |
| R213 | 119-1041-15 | 1/16W 100kΩ |
| R214 | 119-2231-15 | 1/16W 22kΩ |
| R215 | 119-2231-15 | 1/16W 22kΩ |
| R216 | 119-2231-15 | 1/16W 22kΩ |
| R217 | 119-1011-15 | 1/16W 100Ω |
| R218 | 119-1011-15 | 1/16W 100Ω |
| R219 | 119-1011-15 | 1/16W 100Ω |
| R220 | 119-1011-15 | 1/16W 100Ω |
| R221 | 119-1031-15 | 1/16W 10kΩ |
| R223 | 119-1041-15 | 1/16W 100kΩ |
| R224 | 119-1041-15 | 1/16W 100kΩ |
| R225 | 119-1041-15 | 1/16W 100kΩ |
| R226 | 119-1041-15 | 1/16W 100kΩ |
| R227 | 119-2231-15 | 1/16W 22kΩ |
| R228 | 119-1531-15 | 1/16W 15kΩ |
| R229 | 119-2231-15 | 1/16W 22kΩ |
| R230 | 119-1031-15 | 1/16W 10kΩ |
| R231 | 119-5611-15 | 1/16W 560Ω |
| R232 | 119-1031-15 | 1/16W 10kΩ |
| R233 | 119-2231-15 | 1/16W 22kΩ |
| R234 | 119-2201-15 | 1/16W 22Ω |
| R235 | 119-1031-15 | 1/16W 10kΩ |
| R236 | 119-1031-15 | 1/16W 10kΩ |
| R237 | 119-1031-15 | 1/16W 10kΩ |
| R238 | 119-1031-15 | 1/16W 10kΩ |
| R239 | 111-6811-81 | 1/2WS 680Ω |
| R240 | 119-4721-15 | 1/16W 4.7kΩ |
| R241 | 111-6811-81 | 1/2WS 680Ω |
| R242 | 119-4711-15 | 1/16W 470Ω |
| R243 | 119-1041-15 | 1/16W 100kΩ |
| R244 | 032-0104-53 | 1/4W 1kΩ |
| R245 | 032-0104-64 | 1/4W 68Ω |
| R246 | 119-1021-15 | 1/16W 1kΩ |
| R247 | 119-4731-15 | 1/16W 47kΩ |
| R248 | 119-4731-15 | 1/16W 47kΩ |
| R249 | 119-2231-15 | 1/16W 22kΩ |
| R250 | 119-4731-15 | 1/16W 47kΩ |
| R251 | 119-4731-15 | 1/16W 47kΩ |
| R252 | 119-4731-15 | 1/16W 47kΩ |
| R253 | 119-4731-15 | 1/16W 47kΩ |
| R254 | 119-3321-15 | 1/16W 3.3kΩ |
| R255 | 119-2231-15 | 1/16W 22kΩ |
| R256 | 119-2231-15 | 1/16W 22kΩ |
| R257 | 119-4731-15 | 1/16W 47kΩ |
| R258 | 119-2231-15 | 1/16W 22kΩ |
| R259 | 119-1011-15 | 1/16W 100Ω |
| R260 | 119-4731-15 | 1/16W 47kΩ |
| R261 | 032-0104-50 | 1/4W 560Ω |
| R262 | 032-0104-50 | 1/4W 560Ω |
| R263 | 119-5611-15 | 1/16W 560Ω |
| R264 | 119-1031-15 | 1/16W 10kΩ |
| R265 | 119-2721-15 | 1/16W 2.7kΩ |
| R266 | 119-2231-15 | 1/16W 22kΩ |
| R267 | 119-2231-15 | 1/16W 22kΩ |
| R268 | 119-2231-15 | 1/16W 22kΩ |
| SUP1 | 060-0122-10 | DSP-201M-S00B |
| T101 | 009-0659-01 | 0.35mH |
| X2 | 061-1066-00 | 7.2MHz |

Digital PWB section(B2)

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C501 | 168-1022-55 | 1000pF |
| C502 | 042-0595-62 | 16V10μF |
| C503 | 166-2401-50 | 24pF CH |
| C504 | 166-2701-50 | 27pF CH |
| C505 | 168-1022-55 | 1000pF |
| C507 | 168-1032-55 | 0.01μF |
| C508 | 042-0595-56 | 6.3V47μF |
| C509 | 168-1022-55 | 1000pF |
| C510 | 043-0296-50 | 0.1μF |
| C511 | 168-1032-55 | 0.01μF |
| C512 | 168-4735-56 | 0.047μF |
| C513 | 168-1022-55 | 1000pF |
| C514 | 178-2242-78 | 0.22μF |
| C515 | 168-1045-56 | 0.1μF |
| C516 | 168-1032-55 | 0.01μF |
| C517 | 042-0595-65 | 16V47μF |
| C518 | 042-0559-00 | 5.5V0.1μF |
| C519 | 168-1032-55 | 0.01μF |
| C521 | 042-0595-65 | 16V47μF |
| C522 | 168-1022-55 | 1000pF |
| C523 | 168-1022-55 | 1000pF |
| C524 | 168-1022-55 | 1000pF |
| C525 | 168-1022-55 | 1000pF |
| C526 | 166-1011-50 | 100pF CH |
| C527 | 166-1011-50 | 100pF CH |
| C609 | 178-1055-79 | 1μF |
| C610 | 042-0472-90 | 10V47μF |
| C611 | 168-1045-56 | 0.1μF |
| C612 | 168-1045-56 | 0.1μF |
| C613 | 166-1007-50 | 10pF CH |
| C614 | 042-0472-90 | 10V47μF |
| C615 | 168-1032-55 | 0.01μF |
| C616 | 166-1007-50 | 10pF CH |
| C617 | 168-1045-56 | 0.1μF |
| C618 | 168-1045-56 | 0.1μF |
| C619 | 168-1045-56 | 0.1μF |
| C620 | 168-1045-56 | 0.1μF |
| C621 | 178-1055-79 | 1μF |
| C622 | 168-1045-56 | 0.1μF |
| C623 | 166-4701-50 | 47pF CH |
| C624 | 166-4701-50 | 47pF CH |
| C625 | 042-0595-66 | 25V4.7μF |
| C626 | 168-1045-56 | 0.1μF |
| C627 | 178-1055-79 | 1μF |
| C628 | 168-1032-55 | 0.01μF |
| C629 | 168-1022-55 | 1000pF |
| C630 | 168-1022-55 | 1000pF |
| C631 | 178-1055-79 | 1μF |
| C632 | 178-1055-79 | 1μF |
| C637 | 168-3312-55 | 330pF |
| CCT502 | 050-0122-58 | 1/16W470Ω×4 J |
| CCT601 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT602 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT603 | 050-0122-51 | 1/16W47kΩ×4 J |
| CCT604 | 050-0122-51 | 1/16W47kΩ×4 J |
| CCT605 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT606 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT607 | 050-0122-50 | 1/16W10kΩ×4 J |
| CCT608 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT609 | 050-0122-64 | 1/16W330Ω×4 J |
| CCT610 | 050-0122-64 | 1/16W330Ω×4 J |
| D501 | 001-0516-90 | MA111 |
| D504 | 001-0516-90 | MA111 |
| D505 | 001-0516-90 | MA111 |
| D506 | 001-0537-90 | SFPM-62 |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| D508 | 001-0537-90 | SFPM-62 |
| D509 | 001-0516-90 | MA111 |
| D511 | 001-0584-23 | MA8075 |
| D513 | 001-0529-57 | MA8120-H |
| D605 | 001-0367-91 | 1SS226 |
| D606 | 001-0367-91 | 1SS226 |
| D607 | 001-0516-90 | MA111 |
| IC501 | 051-1822-08 | S-80732AN-DW-X |
| IC502 | 052-6043-21 | M30624MG-D71GP |
| IC503 | 051-0869-58 | NJM2103M |
| IC504 | 051-1014-08 | TA7291F |
| IC601 | 051-1478-08 | TC74HC4053AF |
| IC602 | 052-6044-01 | MSM538002E-S8TS-AKF9 |
| IC603 | 051-7100-08 | TC4W66F-TE12L |
| IC607 | 051-1549-08 | TC7W32F |
| IC608 | 051-5306-90 | MM1117XF |
| IC609 | 051-6412-00 | MB90092PF-G-BND |
| IC610 | 051-5306-90 | MM1117XF |
| IC611 | 051-7229-08 | TC7W74FU |
| IC612 | 051-1855-08 | TC7W14F |
| IC613 | 051-0616-38 | MC14538BF |
| J501 | 074-1205-88 | 38P |
| L501 | 010-2199-62 | 1μH |
| L601 | 010-2279-50 | 4.7μH |
| L602 | 010-2279-50 | 4.7μH |
| L603 | 010-2329-50 | 5.6μH |
| P1 | 076-0621-14 | PLUG(14P) |
| P101 | 076-0621-19 | PLUG(19P) |
| P103 | 076-0621-17 | PLUG(17P) |
| P601 | 076-0313-02 | 2P |
| Q501 | 192-2712-00 | 2SC2712 |
| Q502 | 192-2712-00 | 2SC2712 |
| Q503 | 125-2004-92 | RN1402 |
| Q504 | 125-0021-97 | DTA113ZU |
| Q505 | 125-0021-97 | DTA113ZU |
| Q506 | 125-2004-93 | RN1403 |
| Q507 | 192-2712-00 | 2SC2712 |
| Q508 | 190-1162-00 | 2SA1162 |
| Q511 | 192-2873-00 | 2SC2873 |
| Q517 | 125-0002-92 | RN2402 |
| Q518 | 125-2004-91 | RN1401 |
| Q601 | 125-2004-93 | RN1403 |
| R501 | 119-1031-15 | 1/16W 10kΩ |
| R502 | 119-1231-15 | 1/16W 12kΩ |
| R503 | 119-4721-15 | 1/16W 4.7kΩ |
| R504 | 119-4721-15 | 1/16W 4.7kΩ |
| R505 | 119-4741-15 | 1/16W 470kΩ |
| R506 | 119-4741-15 | 1/16W 470kΩ |
| R507 | 119-1021-15 | 1/16W 1kΩ |
| R508 | 119-1021-15 | 1/16W 1kΩ |
| R509 | 119-1011-15 | 1/16W 100Ω |
| R510 | 119-5621-15 | 1/16W 5.6kΩ |
| R511 | 119-1021-15 | 1/16W 1kΩ |
| R512 | 119-4721-15 | 1/16W 4.7kΩ |
| R513 | 119-4731-15 | 1/16W 47kΩ |
| R514 | 119-1021-15 | 1/16W 1kΩ |
| R515 | 119-1021-15 | 1/16W 1kΩ |
| R516 | 119-1031-15 | 1/16W 10kΩ |
| R517 | 119-4721-15 | 1/16W 4.7kΩ |
| R518 | 119-4721-15 | 1/16W 4.7kΩ |
| R519 | 119-1021-15 | 1/16W 1kΩ |
| R520 | 119-4731-15 | 1/16W 47kΩ |
| R521 | 119-1011-15 | 1/16W 100Ω |
| R522 | 119-4731-15 | 1/16W 47kΩ |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R523 | 119-4731-15 | 1/16W 47kΩ |
| R524 | 119-1541-15 | 1/16W 150kΩ |
| R526 | 119-1241-15 | 1/16W 120kΩ |
| R527 | 119-1831-15 | 1/16W 18kΩ |
| R528 | 119-8221-15 | 1/16W 8.2kΩ |
| R529 | 117-4321-15 | 1/10W 4.3kΩ |
| R530 | 119-1031-15 | 1/16W 10kΩ |
| R531 | 119-4711-15 | 1/16W 470Ω |
| R532 | 119-4711-15 | 1/16W 470Ω |
| R533 | 119-4721-15 | 1/16W 4.7kΩ |
| R535 | 119-2231-15 | 1/16W 22kΩ |
| R536 | 119-1021-15 | 1/16W 1kΩ |
| R537 | 119-2231-15 | 1/16W 22kΩ |
| R540 | 119-4731-15 | 1/16W 47kΩ |
| R541 | 119-3311-15 | 1/16W 330Ω |
| R546 | 119-4711-15 | 1/16W 470Ω |
| R547 | 119-2231-15 | 1/16W 22kΩ |
| R548 | 119-2231-15 | 1/16W 22kΩ |
| R549 | 119-1041-15 | 1/16W 100kΩ |
| R551 | 119-4731-15 | 1/16W 47kΩ |
| R553 | 119-4731-15 | 1/16W 47kΩ |
| R565 | 119-0000-05 | 1/16W 0Ω JW |
| R567 | 119-0000-05 | 1/16W 0Ω JW |
| R568 | 119-1011-15 | 1/16W 100Ω |
| R605 | 119-1531-15 | 1/16W 15kΩ |
| R606 | 119-1531-15 | 1/16W 15kΩ |
| R607 | 119-1531-15 | 1/16W 15kΩ |
| R608 | 119-5631-15 | 1/16W 56kΩ |
| R609 | 119-5631-15 | 1/16W 56kΩ |
| R610 | 119-5631-15 | 1/16W 56kΩ |
| R611 | 119-1011-15 | 1/16W 100Ω |
| R612 | 119-1011-15 | 1/16W 100Ω |
| R613 | 119-1011-15 | 1/16W 100Ω |
| R614 | 119-4711-15 | 1/16W 470Ω |
| R615 | 119-1511-15 | 1/16W 150Ω |
| R616 | 119-3921-15 | 1/16W 3.9kΩ |
| R617 | 119-2211-15 | 1/16W 220Ω |
| R618 | 119-0000-05 | 1/16W 0Ω JW |
| R619 | 119-1031-15 | 1/16W 10kΩ |
| R620 | 119-5611-15 | 1/16W 560Ω |
| R621 | 119-4731-15 | 1/16W 47kΩ |
| R622 | 119-4731-15 | 1/16W 47kΩ |
| R623 | 119-4731-15 | 1/16W 47kΩ |
| R624 | 111-7501-91 | 1/4WS 75Ω |
| R625 | 119-3311-15 | 1/16W 330Ω |
| R626 | 119-1041-15 | 1/16W 100kΩ |
| R627 | 119-4731-15 | 1/16W 47kΩ |
| R628 | 119-1011-15 | 1/16W 100Ω |
| R629 | 119-2211-15 | 1/16W 220Ω |
| R630 | 119-1021-15 | 1/16W 1kΩ |
| R631 | 119-2221-15 | 1/16W 2.2kΩ |
| R632 | 111-7501-91 | 1/4WS 75Ω |
| R633 | 119-2021-15 | 1/16W 2kΩ |
| R634 | 119-2021-15 | 1/16W 2kΩ |
| R635 | 119-2021-15 | 1/16W 2kΩ |
| R637 | 119-4741-15 | 1/16W 470kΩ |
| R638 | 119-4741-15 | 1/16W 470kΩ |
| R639 | 119-4741-15 | 1/16W 470kΩ |
| R640 | 119-6821-15 | 1/16W 6.8kΩ |
| TC601 | 004-1583-52 | 20pF RED |
| X501 | 060-1505-50 | 10MHz |
| X502 | 061-1056-00 | 32.768kHz |
| X601 | 061-1086-50 | 14.31818MHz |
| X602 | 061-3042-00 | 17.734475MHz |

LCD PWB section(B3)

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C701 | 163-1063-55 | 35V10 μF |
| C702 | 168-1045-56 | 0.1 μF |
| C703 | 166-1011-50 | 100pF CH |
| C704 | 176-2221-50 | 2200pF CH |
| C705 | 163-4753-55 | 35V4.7 μF |
| C706 | 176-1021-50 | 1000pF CH |
| C707 | 166-1011-50 | 100pF CH |
| C708 | 168-1022-55 | 1000pF |
| C709 | 042-0595-65 | 16V47 μF |
| C710 | 042-0528-50 | 35V15 μF |
| C711 | 163-2273-25 | 10V 220 μF |
| C712 | 042-0528-50 | 35V15 μF |
| C713 | 042-0595-65 | 16V47 μF |
| C714 | 042-0528-50 | 35V15 μF |
| C715 | 168-1045-56 | 0.1 μF |
| C716 | 042-0452-00 | 6.3V330 μF |
| C717 | 163-3363-45 | 25V33 μF |
| C718 | 168-1045-56 | 0.1 μF |
| C719 | 042-0595-62 | 16V10 μF |
| C720 | 168-1045-56 | 0.1 μF |
| C721 | 168-1045-56 | 0.1 μF |
| C722 | 042-0595-62 | 16V10 μF |
| C723 | 168-1045-56 | 0.1 μF |
| C724 | 178-1055-79 | 1 μF |
| C725 | 178-3332-78 | 0.033 μF |
| C726 | 168-1022-55 | 1000pF |
| C728 | 042-0595-62 | 16V10 μF |
| C729 | 163-1073-35 | 16V100 μF |
| C730 | 168-1032-55 | 0.01 μF |
| C731 | 176-1521-50 | 1500pF CH |
| C732 | 178-1055-79 | 1 μF |
| C733 | 042-0595-81 | 50V3.3 μF |
| C734 | 042-0452-00 | 6.3V330 μF |
| C735 | 178-2242-78 | 0.22 μF |
| C736 | 168-2232-55 | 0.022 μF |
| C737 | 168-2222-55 | 2200pF |
| C738 | 042-0595-62 | 16V10 μF |
| C740 | 166-5601-50 | 56pF CH |
| C741 | 168-2222-55 | 2200pF |
| C742 | 168-1045-56 | 0.1 μF |
| C743 | 168-1032-55 | 0.01 μF |
| C744 | 168-1032-55 | 0.01 μF |
| C745 | 178-4742-78 | 0.47 μF |
| C746 | 178-4742-78 | 0.47 μF |
| C747 | 178-4742-78 | 0.47 μF |
| C748 | 168-1032-55 | 0.01 μF |
| C749 | 042-0595-79 | 50V1 μF |
| C750 | 166-1201-50 | 12pF CH |
| C751 | 168-8212-55 | 820pF |
| C752 | 166-2201-50 | 22pF CH |
| C753 | 043-0499-52 | 0.082 μF |
| C754 | 168-6812-55 | 680pF |
| C755 | 042-0397-50 | 16V1 μF TAN |
| C756 | 166-5601-52 | 56pF RH |
| C757 | 168-1032-55 | 0.01 μF |
| C758 | 168-1032-55 | 0.01 μF |
| C759 | 168-4735-56 | 0.047 μF |
| C760 | 168-1032-55 | 0.01 μF |
| C761 | 168-1032-55 | 0.01 μF |
| C762 | 168-1032-55 | 0.01 μF |
| C763 | 178-1055-79 | 1 μF |
| C764 | 166-8201-50 | 82pF CH |
| C765 | 168-1032-55 | 0.01 μF |
| C766 | 178-1055-79 | 1 μF |
| C767 | 168-1032-55 | 0.01 μF |
| C768 | 168-1032-55 | 0.01 μF |
| C769 | 178-1055-79 | 1 μF |
| C770 | 178-1055-79 | 1 μF |
| C771 | 178-1055-79 | 1 μF |
| C772 | 042-0595-65 | 16V47 μF |
| C774 | 178-1055-79 | 1 μF |
| C775 | 042-0595-77 | 50V0.47 μF |
| C776 | 168-1032-55 | 0.01 μF |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C777 | 166-8097-50 | 8pF CH |
| C778 | 166-8097-50 | 8pF CH |
| C779 | 168-1045-56 | 0.1 μF |
| C780 | 178-1055-79 | 1 μF |
| C781 | 042-0595-81 | 50V3.3 μF |
| C782 | 168-1032-55 | 0.01 μF |
| C783 | 178-2232-55 | 0.022 μF |
| C784 | 043-0499-52 | 0.082 μF |
| C785 | 178-1055-79 | 1 μF |
| C901 | 178-1055-79 | 1 μF |
| D701 | 001-2606-90 | M1FS4 |
| D702 | 001-2606-90 | M1FS4 |
| D703 | 001-0516-90 | MA111 |
| D704 | 001-0516-90 | MA111 |
| D706 | 001-2606-90 | M1FS4 |
| D707 | 001-0529-46 | MA8091-L |
| D708 | 001-0516-90 | MA111 |
| D709 | 001-0506-90 | DAN202K |
| D710 | 001-0506-90 | DAN202K |
| D711 | 001-0516-90 | MA111 |
| D712 | 001-0516-90 | MA111 |
| D713 | 001-0516-90 | MA111 |
| D714 | 001-0516-90 | MA111 |
| D715 | 001-0516-90 | MA111 |
| D716 | 001-0516-90 | MA111 |
| D717 | 001-0516-90 | MA111 |
| D719 | 001-0516-90 | MA111 |
| D726 | 001-0516-90 | MA111 |
| D901 | 001-7011-96 | CL-150SR-CD |
| D902 | 001-7011-96 | CL-150SR-CD |
| F701 | 060-8023-52 | 0.75A |
| IC701 | 051-7214-38 | MC74HC595AF |
| IC702 | 051-3903-90 | NJM2368M |
| IC703 | 051-7202-08 | TC7S32F |
| IC704 | 051-1292-90 | NJM4565M-D |
| IC705 | 051-0599-91 | NJM2903M |
| IC706 | 051-3601-91 | TL494CNS |
| IC707 | 051-5313-10 | IR3Y29BM |
| IC708 | 051-1250-08 | TC4S66F |
| IC709 | 051-1250-08 | TC4S66F |
| IC710 | 051-7232-08 | 74VHC4066M |
| IC711 | 051-1250-08 | TC4S66F |
| IR901 | 060-4005-02 | GP1U261X |
| J103 | 074-1136-00 | 15P |
| J701 | 074-1189-85 | 35P |
| J702 | 076-0624-80 | 30P |
| J704 | 074-1199-74 | 24P |
| J901 | 074-1242-80 | 30P |
| L701 | 010-3010-50 | 100 μH |
| L702 | 010-2174-74 | 100 μH |
| L703 | 010-3010-50 | 100 μH |
| L704 | 010-2174-74 | 100 μH |
| L705 | 010-2199-80 | 33 μH J |
| L706 | 010-3014-62 | 100 μH |
| L707 | 010-3014-62 | 100 μH |
| L708 | 010-2199-83 | 56 μH J |
| L709 | 010-4013-00 | 23.9 μH |
| L710 | 010-2199-80 | 33 μH J |
| P701 | 076-0529-02 | 2P |
| Q701 | 190-1213-00 | 2SA1213 |
| Q702 | 125-2004-92 | RN1402 |
| Q703 | 125-2036-90 | FB1J3P |
| Q704 | 192-2873-00 | 2SC2873 |
| Q705 | 190-1738-00 | 2SA1738 |
| Q706 | 125-0002-93 | RN2403 |
| Q707 | 125-2004-92 | RN1402 |
| Q708 | 125-2004-92 | RN1402 |
| Q709 | 125-2004-92 | RN1402 |
| Q710 | 125-2004-93 | RN1403 |
| Q711 | 125-2004-92 | RN1402 |
| Q712 | 192-3326-00 | 2SC3326 |
| Q713 | 197-0528-00 | 2SJ528(S)-TL |
| Q714 | 192-2712-00 | 2SC2712 |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| Q715 | 125-2004-92 | RN1402 |
| Q716 | 125-2004-92 | RN1402 |
| Q717 | 192-2873-00 | 2SC2873 |
| Q718 | 192-2873-00 | 2SC2873 |
| Q719 | 190-1738-00 | 2SA1738 |
| Q720 | 125-2004-92 | RN1402 |
| Q721 | 125-2004-93 | RN1403 |
| Q722 | 125-2004-93 | RN1403 |
| Q723 | 125-0002-92 | RN2402 |
| Q726 | 192-2712-00 | 2SC2712 |
| R701 | 032-0104-53 | 1/4W 1kΩ |
| R702 | 119-2221-15 | 1/16W 2.2kΩ |
| R703 | 119-1001-15 | 1/16W 10Ω |
| R704 | 119-6841-15 | 1/16W 680kΩ |
| R705 | 119-3931-15 | 1/16W 39kΩ |
| R706 | 119-6841-15 | 1/16W 680kΩ |
| R707 | 119-2231-15 | 1/16W 22kΩ |
| R708 | 119-1841-15 | 1/16W 180kΩ |
| R709 | 119-3311-15 | 1/16W 330Ω |
| R710 | 119-1031-15 | 1/16W 10kΩ |
| R711 | 119-2231-15 | 1/16W 22kΩ |
| R712 | 119-2211-15 | 1/16W 220Ω |
| R713 | 119-4731-15 | 1/16W 47kΩ |
| R714 | 119-4711-15 | 1/16W 470Ω |
| R715 | 119-1031-15 | 1/16W 10kΩ |
| R716 | 119-1031-15 | 1/16W 10kΩ |
| R717 | 119-4701-15 | 1/16W 47Ω |
| R718 | 119-1031-15 | 1/16W 10kΩ |
| R719 | 119-1531-15 | 1/16W 15kΩ |
| R720 | 119-1031-15 | 1/16W 10kΩ |
| R721 | 119-2221-15 | 1/16W 2.2kΩ |
| R722 | 119-4721-15 | 1/16W 4.7kΩ |
| R723 | 119-2731-15 | 1/16W 27kΩ |
| R724 | 119-2231-15 | 1/16W 22kΩ |
| R725 | 119-2231-15 | 1/16W 22kΩ |
| R726 | 119-1041-15 | 1/16W 100kΩ |
| R727 | 119-4731-15 | 1/16W 47kΩ |
| R728 | 119-2231-15 | 1/16W 22kΩ |
| R729 | 119-2231-15 | 1/16W 22kΩ |
| R730 | 119-4731-15 | 1/16W 47kΩ |
| R731 | 119-1021-15 | 1/16W 1kΩ |
| R732 | 119-3301-15 | 1/16W 33Ω |
| R733 | 119-3321-15 | 1/16W 3.3kΩ |
| R734 | 119-1021-15 | 1/16W 1kΩ |
| R735 | 119-1031-15 | 1/16W 10kΩ |
| R736 | 119-4721-15 | 1/16W 4.7kΩ |
| R737 | 119-2221-15 | 1/16W 2.2kΩ |
| R738 | 119-5621-15 | 1/16W 5.6kΩ |
| R739 | 119-5621-15 | 1/16W 5.6kΩ |
| R740 | 119-1021-15 | 1/16W 1kΩ |
| R741 | 119-1021-15 | 1/16W 1kΩ |
| R742 | 119-3321-15 | 1/16W 3.3kΩ |
| R743 | 119-1831-15 | 1/16W 18kΩ |
| R744 | 119-6821-15 | 1/16W 6.8kΩ |
| R745 | 119-3341-15 | 1/16W 330kΩ |
| R746 | 119-5621-15 | 1/16W 5.6kΩ |
| R747 | 119-5621-15 | 1/16W 5.6kΩ |
| R748 | 119-4721-15 | 1/16W 4.7kΩ |
| R749 | 119-3021-15 | 1/16W 3kΩ |
| R750 | 119-2021-15 | 1/16W 2kΩ |
| R751 | 119-1521-15 | 1/16W 1.5kΩ |
| R752 | 119-2221-15 | 1/16W 2.2kΩ |
| R753 | 119-1041-15 | 1/16W 100kΩ |
| R755 | 119-4791-15 | 1/16W 4.7Ω J |
| R756 | 119-2431-15 | 1/16W 24kΩ |
| R757 | 119-4711-15 | 1/16W 470Ω |
| R758 | 119-4711-15 | 1/16W 470Ω |
| R759 | 119-4711-15 | 1/16W 470Ω |
| R760 | 119-4711-15 | 1/16W 470Ω |
| R761 | 119-3341-15 | 1/16W 330kΩ |
| R762 | 119-2231-15 | 1/16W 22kΩ |
| R763 | 119-2231-15 | 1/16W 22kΩ |
| R764 | 119-2231-15 | 1/16W 22kΩ |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R765 | 119-2731-15 | 1/16W 27kΩ |
| R766 | 032-0098-93 | 1/10W 18kΩ±2% |
| R767 | 119-5631-15 | 1/16W 56kΩ |
| R768 | 119-3931-15 | 1/16W 39kΩ |
| R769 | 119-5611-15 | 1/16W 560Ω |
| R770 | 119-1021-15 | 1/16W 1kΩ |
| R771 | 117-3351-15 | 1/10W 3.3MΩ |
| R772 | 119-1011-15 | 1/16W 100Ω |
| R773 | 119-1011-15 | 1/16W 100Ω |
| R774 | 119-1011-15 | 1/16W 100Ω |
| R775 | 032-0104-53 | 1/4W 1kΩ |
| R776 | 119-3931-15 | 1/16W 39kΩ |
| R777 | 119-2231-15 | 1/16W 22kΩ |
| R778 | 032-0104-53 | 1/4W 1kΩ |
| R779 | 119-3931-15 | 1/16W 39kΩ |
| R780 | 119-2231-15 | 1/16W 22kΩ |
| R781 | 119-6821-15 | 1/16W 6.8kΩ |
| R782 | 119-4731-15 | 1/16W 47kΩ |
| R783 | 119-2231-15 | 1/16W 22kΩ |
| R784 | 119-1051-15 | 1/16W 1MΩ |
| R785 | 032-0092-99 | 1/10W 47kΩ±1% |
| R786 | 119-0000-05 | 1/16W 0Ω JW |
| R787 | 117-2731-15 | 1/10W 27kΩ |
| R788 | 119-5621-15 | 1/16W 5.6kΩ |
| R789 | 119-1521-15 | 1/16W 1.5kΩ |
| R790 | 032-0092-99 | 1/10W 47kΩ±1% |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R791 | 119-1821-15 | 1/16W 1.8kΩ |
| R792 | 032-0092-91 | 1/10W 33kΩ±1% |
| R793 | 119-1011-15 | 1/16W 100Ω |
| R794 | 119-1021-15 | 1/16W 1kΩ |
| R795 | 119-2221-15 | 1/16W 2.2kΩ |
| R796 | 119-3311-15 | 1/16W 330Ω |
| R797 | 119-1011-15 | 1/16W 100Ω |
| R798 | 119-6811-15 | 1/16W 680Ω |
| R799 | 119-1011-15 | 1/16W 100Ω |
| R800 | 119-5621-15 | 1/16W 5.6kΩ |
| R801 | 119-8221-15 | 1/16W 8.2kΩ |
| R802 | 119-1521-15 | 1/16W 1.5kΩ |
| R803 | 119-4741-15 | 1/16W 470kΩ |
| R804 | 119-4741-15 | 1/16W 470kΩ |
| R805 | 119-4741-15 | 1/16W 470kΩ |
| R806 | 119-4741-15 | 1/16W 470kΩ |
| R807 | 119-4741-15 | 1/16W 470kΩ |
| R808 | 119-6831-15 | 1/16W 68kΩ |
| R809 | 119-2221-15 | 1/16W 2.2kΩ |
| R810 | 119-1031-15 | 1/16W 10kΩ |
| R811 | 117-2211-15 | 1/10W 220Ω |
| R812 | 119-1021-15 | 1/16W 1kΩ |
| R813 | 032-0092-43 | 1/10W 3.0kΩ±1% |
| R814 | 032-0092-43 | 1/10W 3.0kΩ±1% |
| R815 | 119-0000-05 | 1/16W 0Ω JW |
| R816 | 119-1011-15 | 1/16W 100Ω |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R817 | 119-1011-15 | 1/16W 100Ω |
| R818 | 119-1011-15 | 1/16W 100Ω |
| R901 | 119-2711-15 | 1/16W 270Ω |
| R902 | 119-2711-15 | 1/16W 270Ω |
| R903 | 119-2711-15 | 1/16W 270Ω |
| R904 | 119-2711-15 | 1/16W 270Ω |
| S701 | 013-6100-00 | SKHLLB |
| S702 | 013-7205-50 | SPVE1-3 |
| S902 | 013-6511-50 | LS9J2M-1SR |
| S903 | 013-6511-50 | LS9J2M-1SR |
| S904 | 013-6511-50 | LS9J2M-1SR |
| S905 | 013-6511-50 | LS9J2M-1SR |
| S906 | 013-9907-00 | RKJXM1012 |
| T701 | 007-1151-90 | OUTPUT TRANS |
| T702 | 007-1152-00 | BLC216HP |
| TH601 | 002-0216-95 | DTN-T203K103KS |
| VR701 | 012-6009-52 | 1kΩ |
| VR702 | 012-5123-56 | 10kΩ |
| VR703 | 012-6009-58 | 33kΩ |
| VR704 | 012-6009-58 | 33kΩ |
| VR705 | 012-6009-58 | 33kΩ |
| VR706 | 012-6009-58 | 33kΩ |
| VR707 | 012-6009-58 | 33kΩ |
| VR708 | 012-6009-52 | 1kΩ |
| X701 | 061-1078-00 | 3.5795MHz |
| X702 | 061-3036-00 | 4.433619MHz |

## DCP PWB section(B4)

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| C901 | 178-1055-79 | 1μF |
| C902 | 178-1055-79 | 1μF |
| D901 | 001-7011-96 | CL-150SR-CD |
| D902 | 001-7011-96 | CL-150SR-CD |
| D903 | 001-7011-96 | CL-150SR-CD |
| D904 | 001-0525-90 | IMN10 |
| D905 | 001-0525-90 | IMN10 |
| D906 | 001-7011-96 | CL-150SR-CD |
| D907 | 001-7046-01 | NSPW310BS-A,RS |
| D908 | 001-7046-01 | NSPW310BS-A,RS |
| D909 | 001-2601-90 | MA728-TX |
| D910 | 001-2601-90 | MA728-TX |
| D911 | 001-2601-90 | MA728-TX |
| IC901 | 051-6001-01 | μPD16431AGC-7ET |
| J901 | 076-0531-00 | 15P |
| L901 | 010-2323-71 | 33μH |
| LCD2 | 379-1162-41 | INDICATOR |
| Q901 | 125-0002-92 | RN2402 |
| Q902 | 125-2017-97 | RN1427 |
| Q903 | 125-0002-92 | RN2402 |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| Q904 | 125-2017-97 | RN1427 |
| R902 | 032-0104-54 | 1/4W 680Ω |
| R903 | 032-0104-54 | 1/4W 680Ω |
| R906 | 032-0104-54 | 1/4W 680Ω |
| R907 | 032-0104-54 | 1/4W 680Ω |
| R909 | 032-0104-54 | 1/4W 680Ω |
| R911 | 032-0104-54 | 1/4W 680Ω |
| R914 | 119-1021-15 | 1/16W 1kΩ |
| R915 | 119-1021-15 | 1/16W 1kΩ |
| R916 | 119-4711-15 | 1/16W 470Ω |
| R917 | 119-1021-15 | 1/16W 1kΩ |
| R918 | 119-1041-15 | 1/16W 100kΩ |
| R919 | 119-1021-15 | 1/16W 1kΩ |
| R920 | 119-1021-15 | 1/16W 1kΩ |
| R921 | 119-1021-15 | 1/16W 1kΩ |
| R922 | 119-1021-15 | 1/16W 1kΩ |
| R923 | 119-1031-15 | 1/16W 10kΩ |
| R924 | 119-1041-15 | 1/16W 100kΩ |
| R925 | 117-7501-15 | 1/10W 75Ω |
| R926 | 117-7501-15 | 1/10W 75Ω |

| REF No. | PART No. | DESCRIPTION |
|---|---|---|
| R927 | 032-0104-54 | 1/4W 680Ω |
| S901 | 013-6511-50 | LS9J2M-1SR |
| S902 | 013-6511-50 | LS9J2M-1SR |
| S903 | 013-6511-50 | LS9J2M-1SR |
| S904 | 013-6511-50 | LS9J2M-1SR |
| S905 | 013-6511-50 | LS9J2M-1SR |
| S906 | 013-6511-50 | LS9J2M-1SR |
| S907 | 013-6511-50 | LS9J2M-1SR |
| S908 | 013-6511-50 | LS9J2M-1SR |
| S909 | 013-9901-00 | SKQUAA 1-4 |
| S910 | 013-6511-50 | LS9J2M-1SR |
| S911 | 013-6511-50 | LS9J2M-1SR |
| S912 | 013-6511-50 | LS9J2M-1SR |
| S913 | 013-6511-50 | LS9J2M-1SR |
| S914 | 013-6511-50 | LS9J2M-1SR |
| S915 | 013-6511-50 | LS9J2M-1SR |
| S916 | 013-6511-50 | LS9J2M-1SR |
| S917 | 013-6511-50 | LS9J2M-1SR |
| S918 | 013-6511-50 | LS9J2M-1SR |