
2. EXPLODED VIEWS AND PARTS LIST

*NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• Screw adjacent to ▽ mark on the product are used for disassembly.
• For the applying amount of lobricants or glue, follow the instructions in this manual.
(In the case of no amount instructions,apply as you think it appropriate.)

2.1 PACKING(DEH-P940MP,P9400MP)

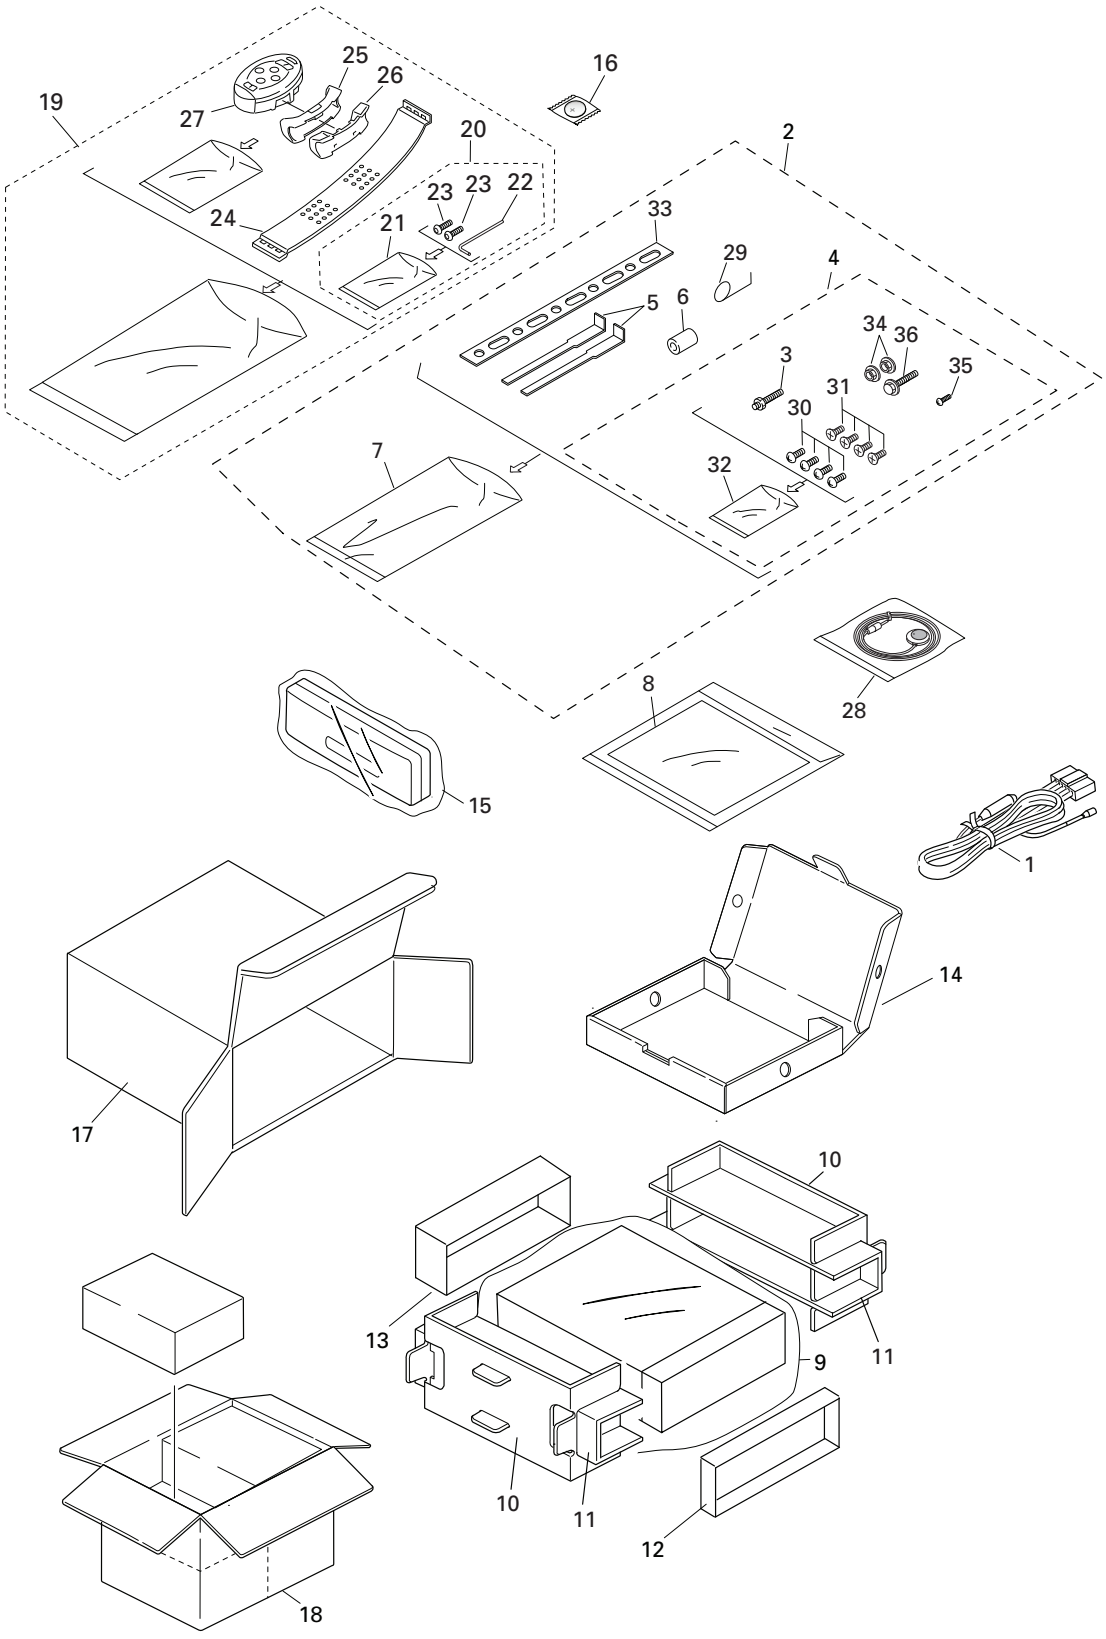


PACKING(DEH-P940MP,P9400MP) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE6563
*	2	Accessory Assy	CEA2430
	3	Screw	CBA1002
*	4	Screw Assy	CEA2433
	5	Handle	CNC5395
	6	Bush	CNV1917
*	7	Polyethylene Bag	CEG-158
	8-1	Polyethylene Bag	CEG1116
	8-2	Owner's Manual(P940MP)	CRD3588
		Owner's Manual(P9400MP)	CRD3590
	8-3	Installation Manual(P940MP)	CRD3589
		Installation Manual(P9400MP)	CRD3591
*	8-4	Caution Card	CRP1244
*	8-5	Warranty Card(P940MP)	CRY1070
*	8-6	Card(P9400MP)	ARY1048
	9	Polyethylene Bag	CEG1185
	10	Protector	CHP2383
	11	Protector	CHP2384
	12	Protector	CHP2430
	13	Protector	CHP2386
	14	Sub Carton	CHA3167
	15	Case Assy	CXB3520
*	16	Battery	CEX1030
	17	Carton(P940MP)	CHG4675
		Carton(P9400MP)	CHG4673
	18	Contain Box(P940MP)	CHL4675
		Contain Box(P9400MP)	CHL4673
	19	Remote Control Assy	CXB9202
	20	Screw Assy	CZE3169
*	21	Polyethylene Bag	CEG-127
*	22	Hexagonal Wrench	CZE3176
*	23	Screw	RMZ30H060FBK
	24	Belt	CZN7661
	25	Holder Assy	CZX3172
	26	Holder Assy	CZX3173
	27	Remote Control Assy	CZX3257
	28	Microphone Assy	CPM1054
	29	Spring	CBH-865
	30	Screw	BMZ50P060FMC
	31	Screw	CMZ50P060FMC
*	32	Polyethylene Bag	CEG-127
	33	Strap	CNC5402
	34	Nut	NF50FMC
	35	Screw(M2x6)	CBA1120
	36	Screw	CBA-102

Owner's Manual,Installation Manual

Part No.	Language
CRD3588	English,French
CRD3589	English,French
CRD3590	English,French
CRD3591	English,French

2.2 PACKING(DEH-P9450MP)

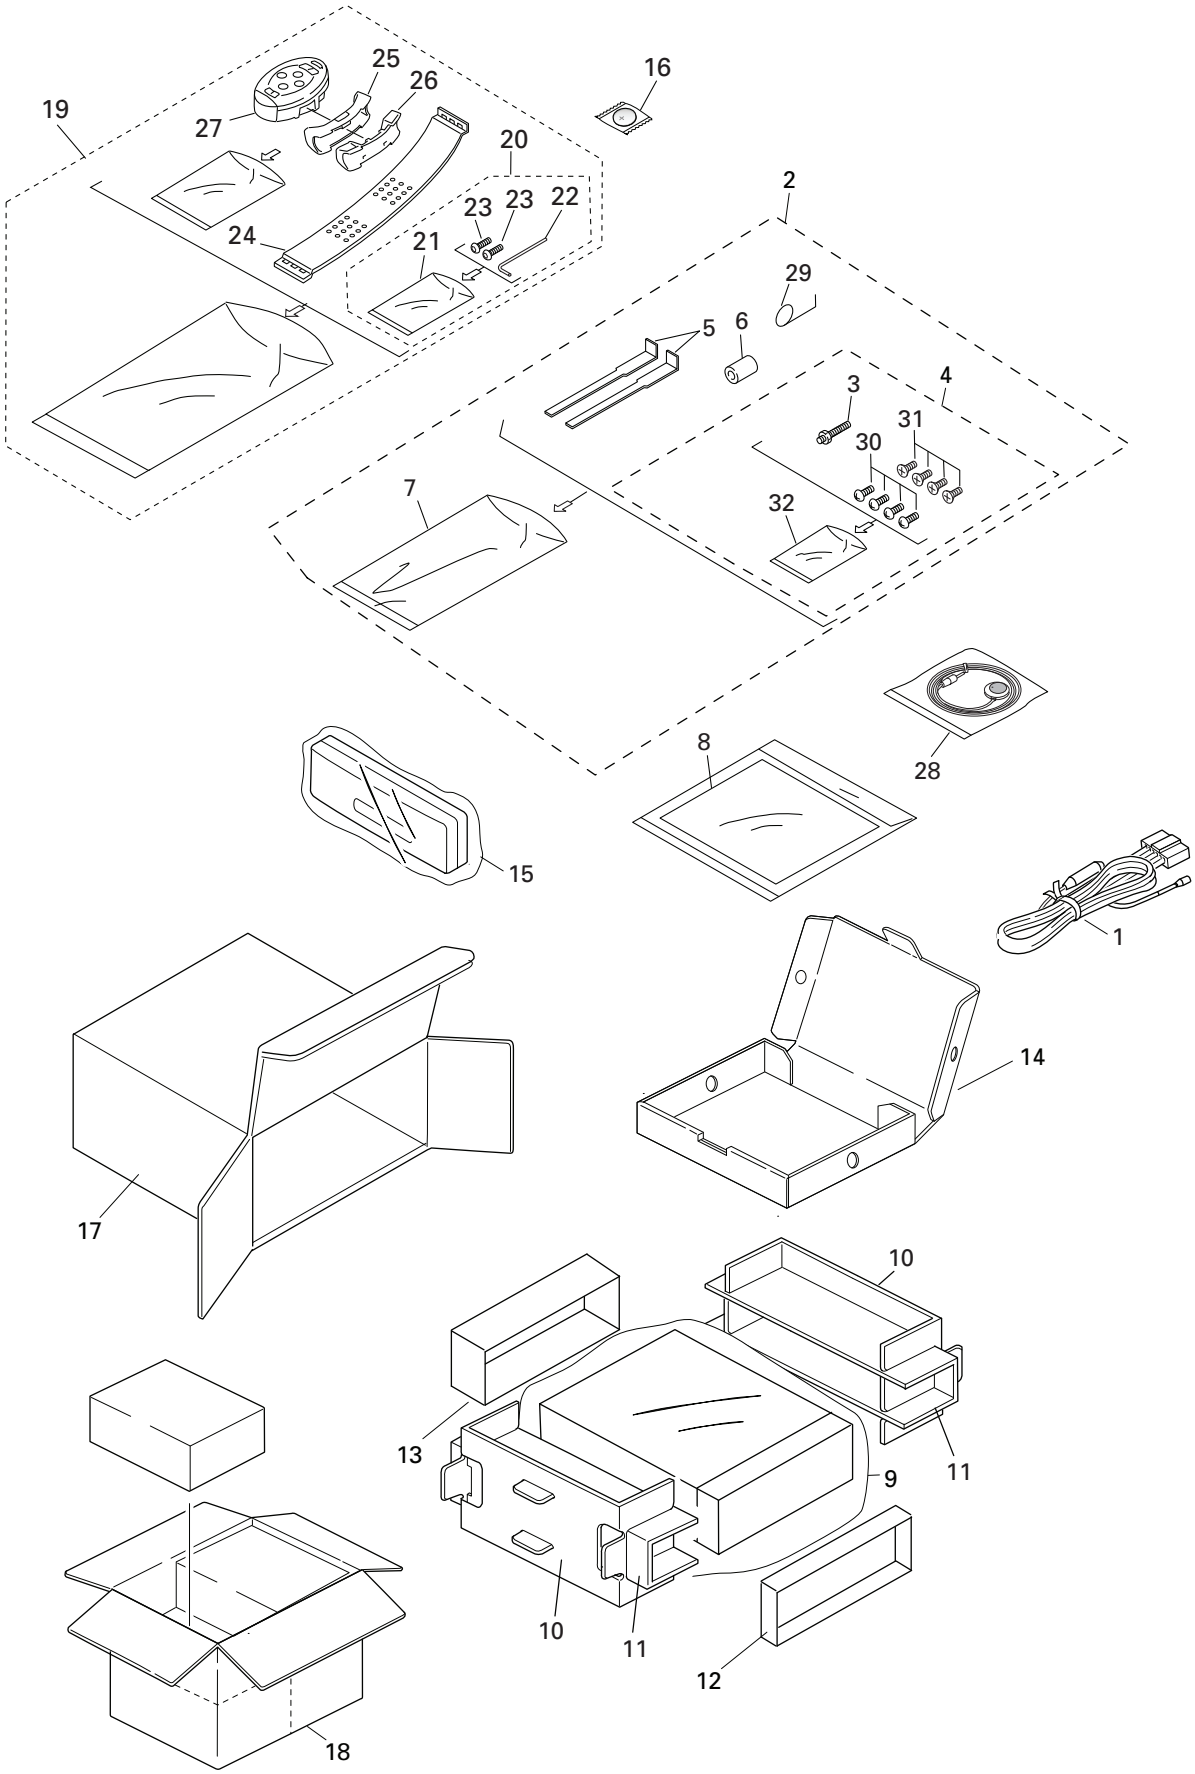


PACKING(DEH-P9450MP) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE6563
	2	Accessory Assy	CEA2948
	3	Screw	CBA1002
	4	Screw Assy	CEA2941
	5	Handle	CNC5395
	6	Bush	CNV1917
*	7	Polyethylene Bag	CEG-158
	8-1	Polyethylene Bag	CEG1116
	8-2	Owner's Manual	CRB1754
	8-3	Owner's Manual	CRD3592
	8-4	Owner's Manual	CRD3593
	8-5	Installation Manual	CRD3594
*	8-6	Caution Card	CRP1244
*	9	Polyethylene Bag	CEG1305
	10	Protector	CHP2383
	11	Protector	CHP2384
	12	Protector	CHP2430
	13	Protector	CHP2386
	14	Sub Carton	CHA3167
	15	Case Assy	CXB3520
*	16	Battery	CEX1030
	17	Carton	CHG4674
	18	Contain Box	CHL4674
	19	Remote Control Assy	CXB9202
	20	Screw Assy	CZE3169
*	21	Polyethylene Bag	CEG-127
*	22	Hexagonal Wrench	CZE3176
*	23	Screw	RMZ30H060FBK
	24	Belt	CZN7661
	25	Holder Assy	CZX3172
	26	Holder Assy	CZX3173
	27	Remote Control Assy	CZX3257
	28	Microphone Assy	CPM1054
	29	Spring	CBH-865
	30	Screw	BMZ50P060FMC
	31	Screw	CMZ50P060FMC
*	32	Polyethylene Bag	CEG-127

Owner's Manual,Installation Manual

Part No.	Language
CRB1754	English
CRD3592	English,Spanish
CRD3593	Portuguese(B),Arabic
CRD3594	English,Spanish,Portuguese(B),Arabic

2.3 EXTERIOR(1)(DEH-P940MP,P9400MP)

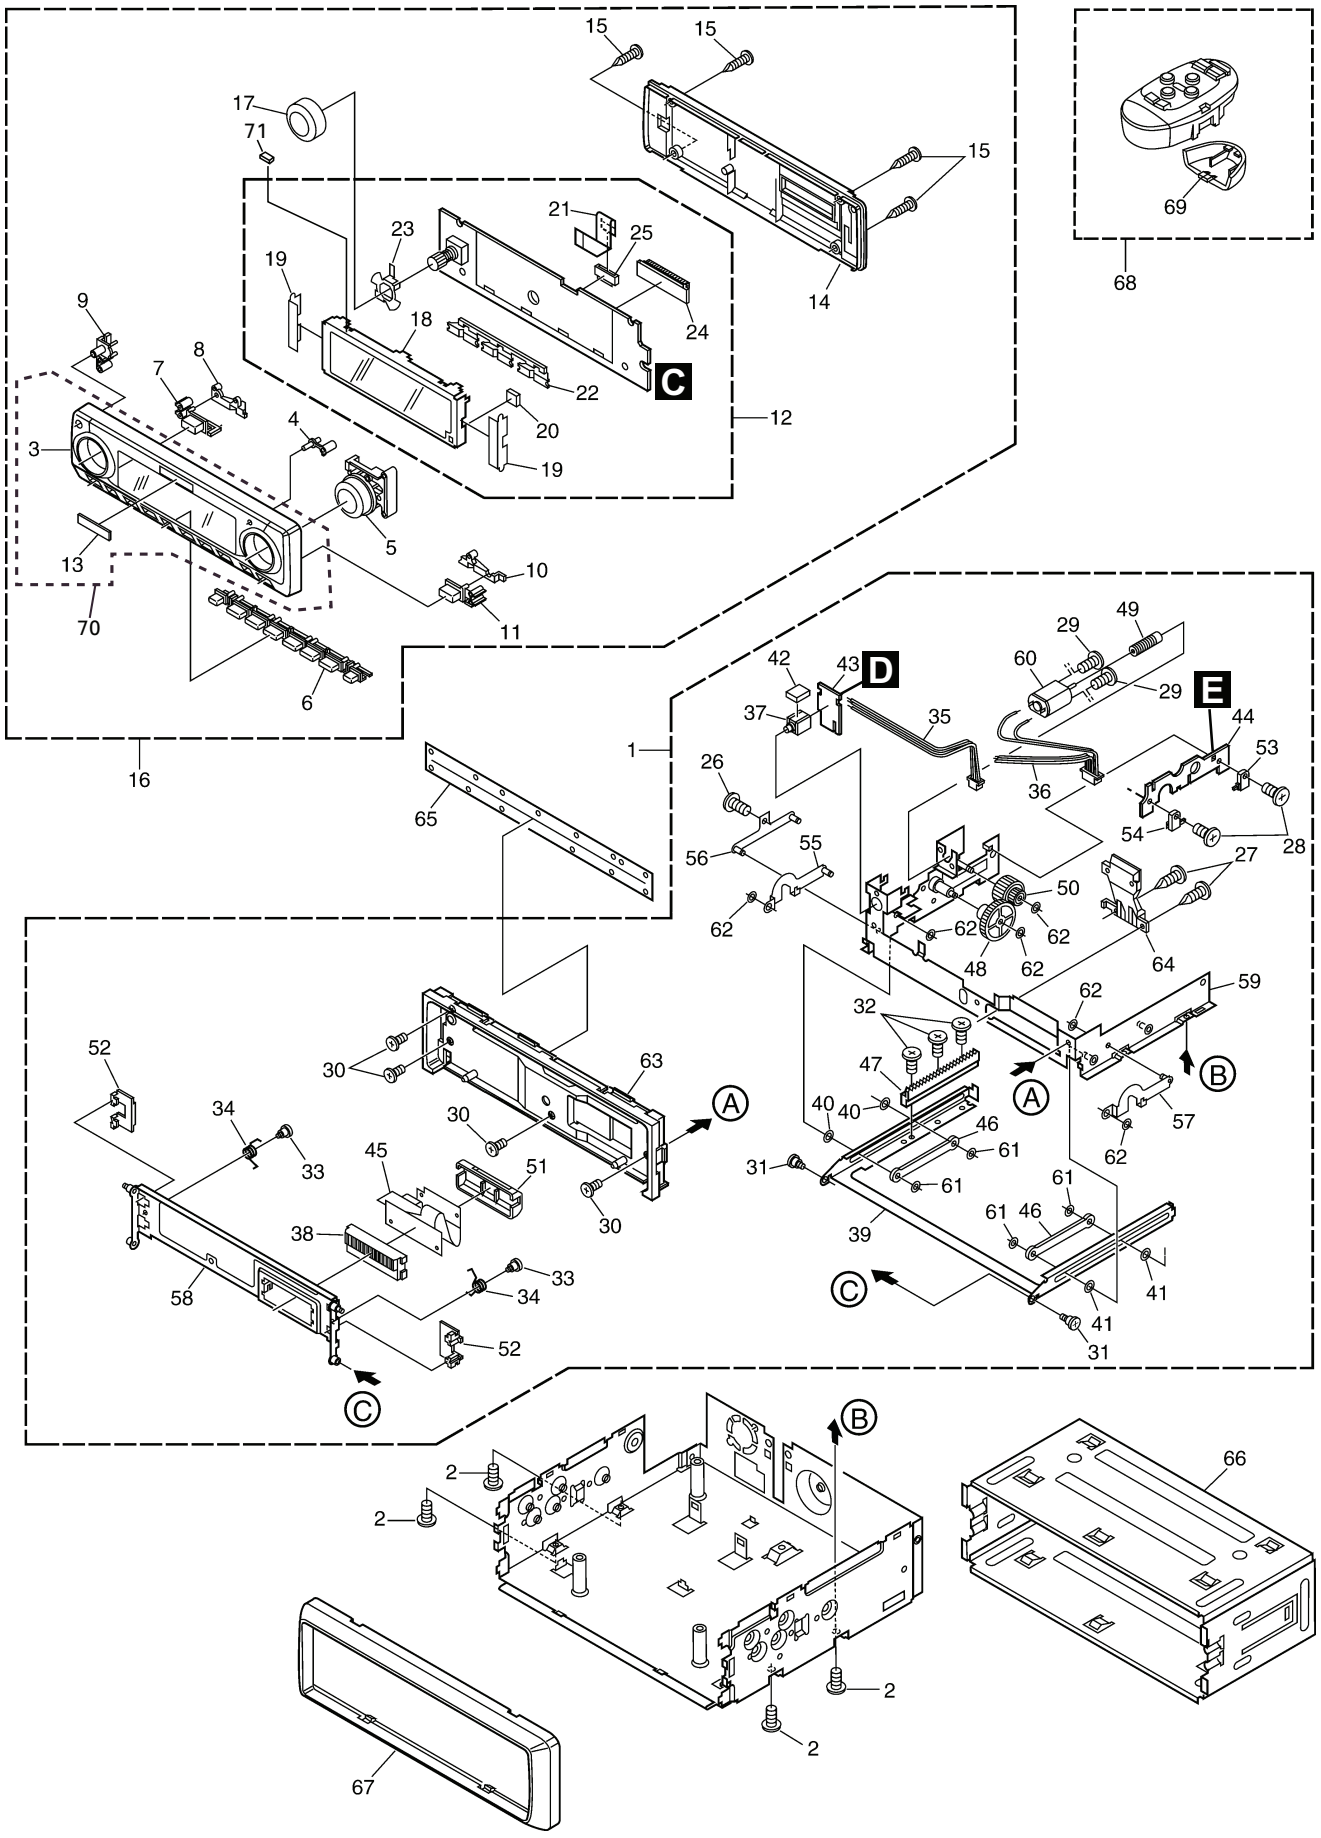

(1) EXTERIOR(1)(DEH-P940MP,P9400MP) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Panel Assy	CXB6738
	2	Screw(M2x2.5)	CBA1447
	3	Grille Unit	See Contrast table(2)
	4	Button(RESET)	CAC7493
	5	Button Unit	See Contrast table(2)
	6	Button(PRESET)	See Contrast table(2)
	7	Button(SRC)	CAC7491
	8	Lighting Conductor	CNV7051
	9	Button(EJECT)	See Contrast table(2)
	10	Lighting Conductor	CNV7050
	11	Button(BAND)	CAC7492
	12	Keyboard Unit	CWM8231
*	13	Badge	See Contrast table(2)
	14	Cover Unit	CXB9308
	15	Screw	BPZ20P080FZK
	16	Detach Grille Assy	See Contrast table(2)
	17	Knob Unit	See Contrast table(2)
	18	OEL Module	MXK8019
	19	Spacer	CNM7529
	20	Cushion	CNM7809
	21	Connector	CDE6741
	22	Lighting Conductor	CNV7052
	23	Spacer	CNM7409
	24	Connector(CN1901)	CKS4435
	25	Connector(CN1902)	CKS3995
	26	Screw	BMZ20P030FMC
	27	Screw	BPZ20P060FMC
	28	Screw(M2x7)	CBA1060
	29	Screw(M2x3)	CBA1061
	30	Screw(M2x3)	CBA1154
	31	Screw(M2x1.5)	CBA1430
	32	Screw(M1.4x4)	CBA1454
	33	Screw(M2x1.5)	CBA1528
	34	Spring	CBH2445
	35	Cord	CDE5856
	36	Cord	CDE5960
	37	Mini-Jack	CKN1015
	38	Connector	CKS4436
	39	Frame	CNC8201
	40	Spacer	CNM6155
	41	Spacer	CNM6156
	42	Spacer	CNM7427
	43	PCB	CNP5341
	44	PCB	CNP5941
	45	PCB	CNP6124
	46	Guide	CNV5696
	47	Rack	CNV5697
	48	Gear	CNV5698
	49	Gear	CNV5761
	50	Gear Unit	CNV5762
	51	Cover	CNV6573
	52	Holder	CNV6575
	53	Switch(S951)	CSN1012
	54	Switch(S952)	CSN1022
	55	Arm Unit	CXB3574
	56	Bracket Unit	CXB3577
	57	Arm Unit	CXB3866
	58	Holder Unit	CXB6726
	59	Frame Unit	CXB6727
	60	Motor	CXM1085
	61	Washer	2-1816-0035-D2-00
	62	Washer	2-1821-0045-D2-00
	63	Panel	CNS6397
	64	Lighting Conductor	CNV6574
	65	Cover	CNM6489
	66	Holder	CNC8659
	67	Panel	See Contrast table(2)
	68	Remote Control Assy	CZX3257
	69	Cover	CZN7655
	70	Grille Unit(Service)	See Contrast table(2)
	71	Spacet	CNM7959

(2) CONTRAST TABLE

DEH-P940MP/UC and DEH-P9400MP/UC are constructed the same except for the following:

Mark	NO	Symbol and Description	DEH-P940MP/UC	DEH-P9400MP/UC
	3	Grille Unit	CXB8550	CXB9470
	5	Button Unit	CXB9378	CXB9385
	6	Button(PRESET)	CAC7497	CAC7495
	9	Button(EJECT)	CAC7496	CAC7494
*	13	Badge	CAH1755	CAH1754
	16	Detach Grille Assy	CXB8488	CXB8489
	17	Knob Unit	CXB9377	CXB8551
	67	Panel	CNS6360	CNS6989
	70	Grille Unit(Service)	CXX1618	CXX1617


2.4 EXTERIOR(2)(DEH-P940MP,P9400MP)

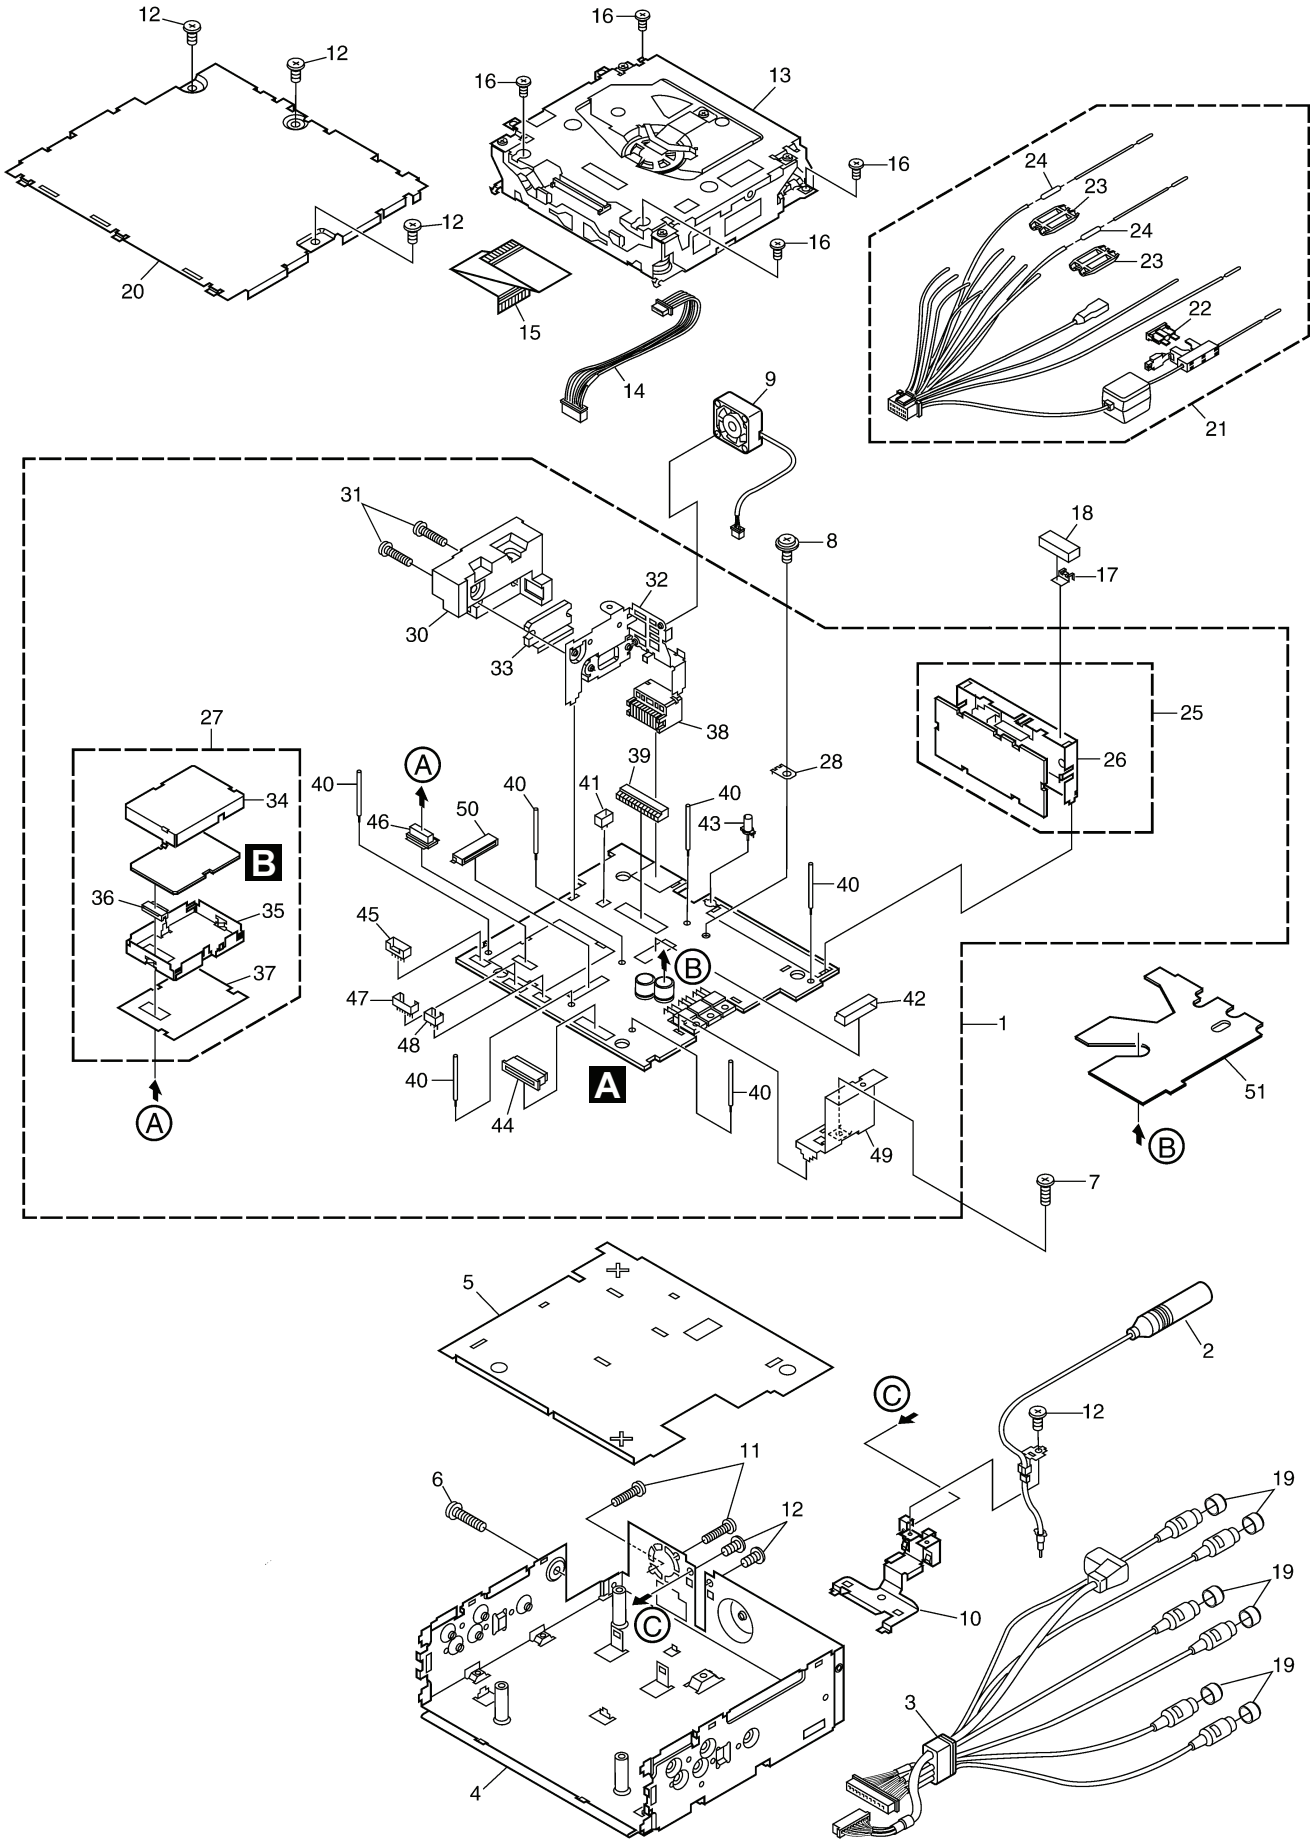

EXTERIOR(2)(DEH-P940MP,P9400MP) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Tuner Amp Unit(P940)	CWM8223
		Tuner Amp Unit(P9400)	CWM8224
	2	Antenna Cable	CDH1308
	3	Cord Assy	CDE6784
	4	Chassis Unit	CXB9285
	5	Insulator	CNM7773
	6	Screw	BSZ30P200FMC
	7	Screw	BMZ26P080FMC
	8	Screw	ISS26P055FUC
	9	Fan Motor	CXM1194
	10	Holder	CNC9299
	11	Screw(M2.6x14)	CBA1384
	12	Screw	BSZ30P050FMC
	13	CD Mechanism Module(S9MP3)	CXK5557
	14	Cord Assy	CDE7019
	15	Connector	CDE6556
	16	Screw	BSZ26P060FMC
	17	Holder	CNC6469
	18	Cushion	CNM4870
	19	Cap	CNV6727
	20	Case Unit	CXB8974
	21	Cord Assy	CDE6563
	22	Fuse(10A)	CEK1136
	23	Cap	CNS1472
	24	Resistor	RS1/2PMF102J
	25	FM/AM Tuner Unit	CWE1563
	26	Holder	CNC8815
	27	DSP Unit	CWM8229
	28	Terminal(CN452)	CKF1059
	29	•••••	
	30	Heat Sink	CNR1590
	31	Screw	BMZ26P160FMC
	32	Holder	CNC9291
	33	IC(IC301)	PAL007A
	34	Holder	CNC9295
	35	Holder	CNC9296
	36	Connector(CN1501)	CKS4452
	37	Insulator	CNM7181
	38	Plug(CN901)	CKM1278
	39	Connector(CN351)	CKS3606
	40	Clamper	CEF1008
	41	Connector(CN591)	CKS4571
*	42	Plug(CN101)	CKS1058
	43	Pinjack(CN451)	CKX1046
	44	Connector(CN801)	CKS1536
	45	Plug(CN851)	CKS-786
	46	Connector(CN251)	CKS4453
	47	Plug(CN702)	CKS-787
	48	Plug(CN131)	CKS-784
	49	Holder	CND1075
	50	Connector(CN701)	CKS3918
	51	Sheet	CNM7910


2.5 EXTERIOR(1)(DEH-P9450MP)

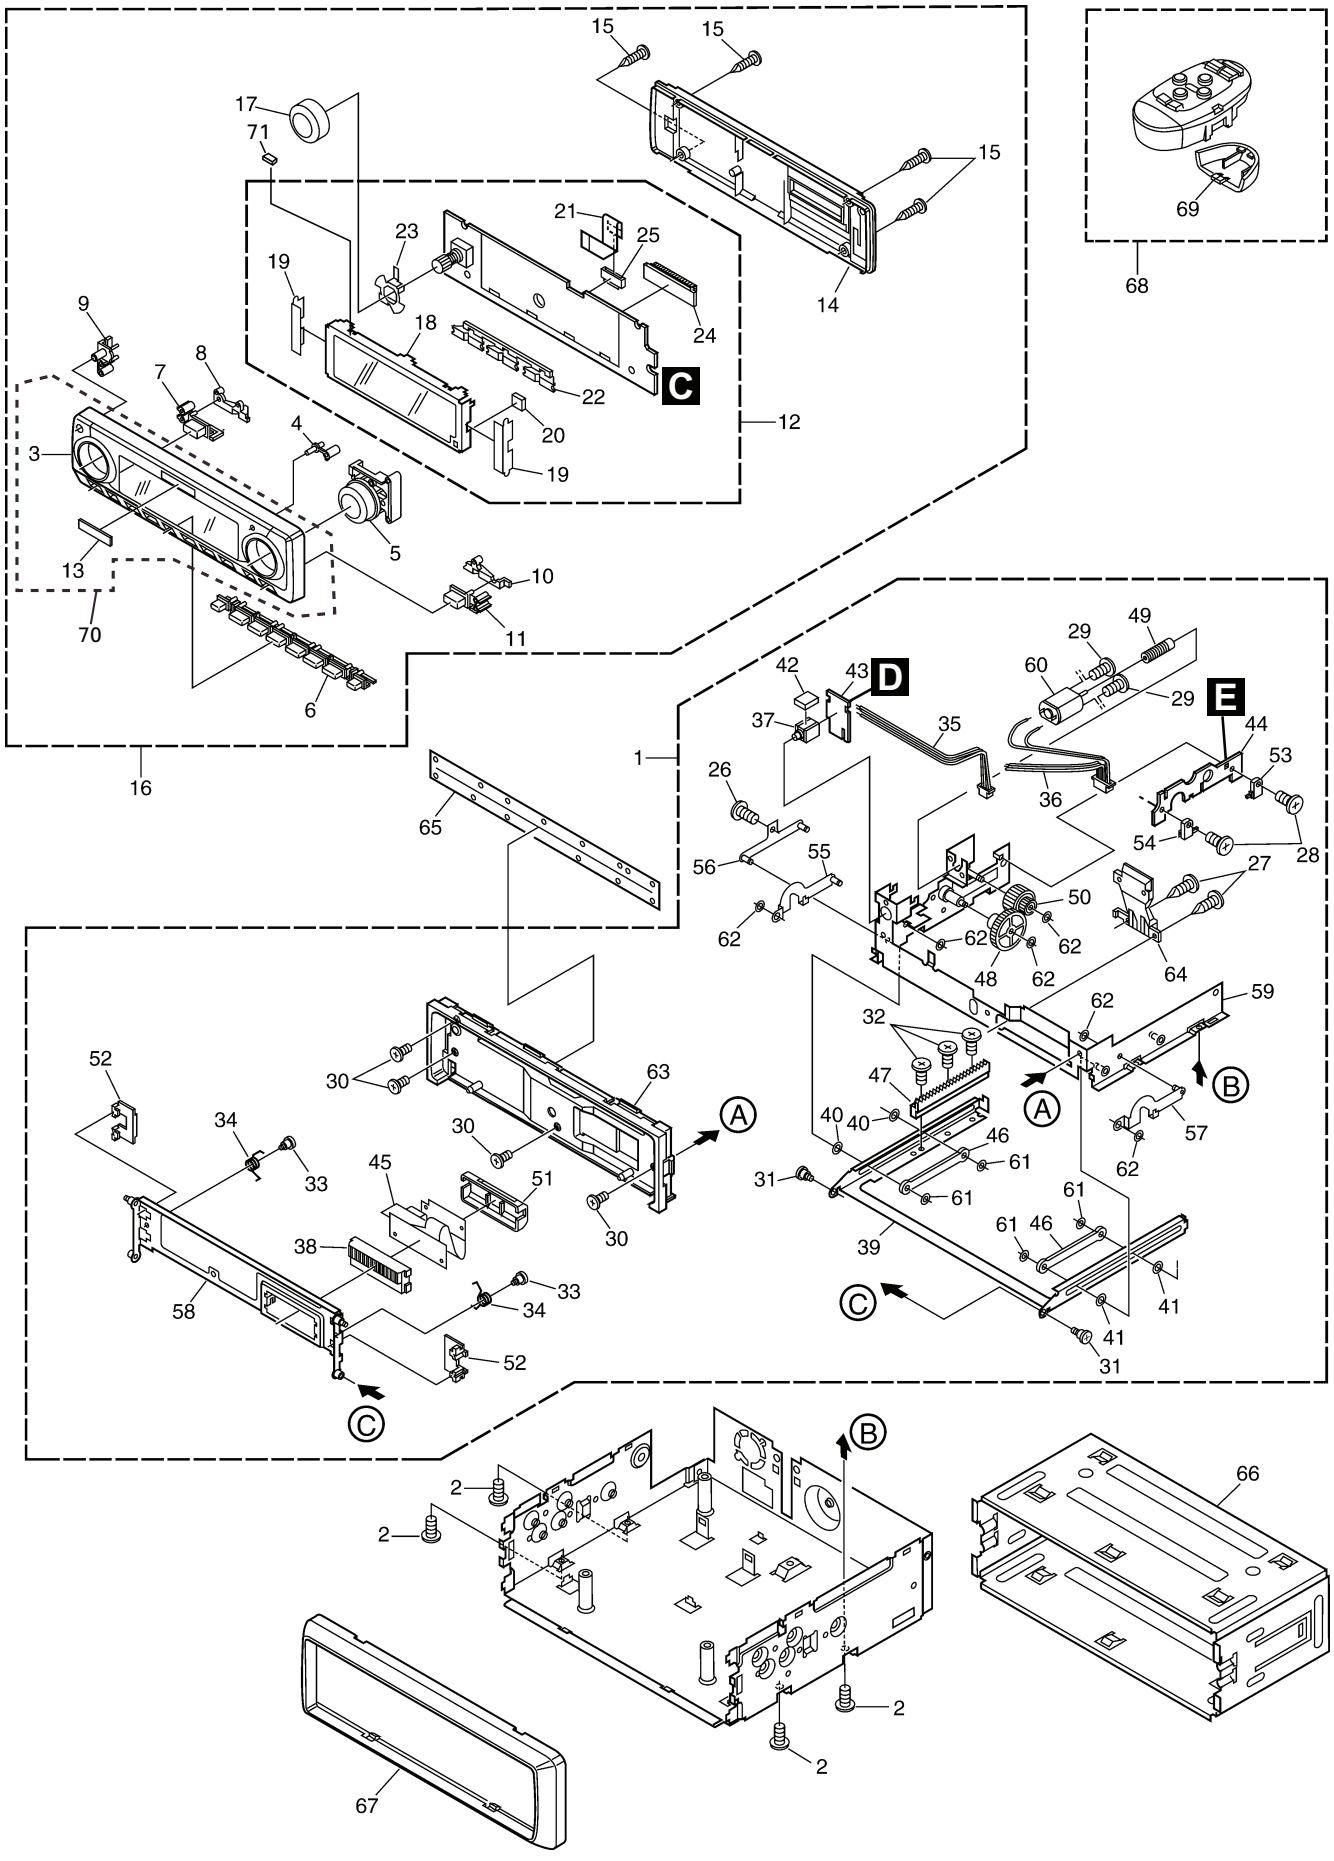

EXTERIOR(1)(DEH-P9450MP) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Panel Assy	CXB6738
	2	Screw(M2x2.5)	CBA1447
	3	Grille Unit	CXB8547
	4	Button(RESET)	CAC7493
	5	Button Unit	CXB9378
	6	Button(PRESET)	CAC7497
	7	Button(SRC)	CAC7491
	8	Lighting Conductor	CNV7051
	9	Button(EJECT)	CAC7496
	10	Lighting Conductor	CNV7050
	11	Button(BAND)	CAC7492
	12	Keyboard Unit	CWM8231
*	13	Badge	CAH1754
	14	Cover Unit	CXB9308
	15	Screw	BPZ20P080FZK
	16	Detach Grille Assy	CXB8490
	17	Knob Unit	CXB9377
	18	OEL Module	MXK8019
	19	Spacer	CNM7529
	20	Cushion	CNM7809
	21	Connector	CDE6741
	22	Lighting Conductor	CNV7052
	23	Spacer	CNM7409
	24	Connector(CN1901)	CKS4435
	25	Connector(CN1902)	CKS3995
	26	Screw	BMZ20P030FMC
	27	Screw	BPZ20P060FMC
	28	Screw(M2x7)	CBA1060
	29	Screw(M2x3)	CBA1061
	30	Screw(M2x3)	CBA1154
	31	Screw(M2x1.5)	CBA1430
	32	Screw(M1.4x4)	CBA1454
	33	Screw(M2x1.5)	CBA1528
	34	Spring	CBH2445
	35	Cord	CDE5856
	36	Cord	CDE5960
	37	Mini-Jack	CKN1015
	38	Connector	CKS4436
	39	Frame	CNC8201
	40	Spacer	CNM6155
	41	Spacer	CNM6156
	42	Spacer	CNM7427
	43	PCB	CNP5341
	44	PCB	CNP5941
	45	PCB	CNP6124
	46	Guide	CNV5696
	47	Rack	CNV5697
	48	Gear	CNV5698
	49	Gear	CNV5761
	50	Gear Unit	CNV5762
	51	Cover	CNV6573
	52	Holder	CNV6575
	53	Switch(S951)	CSN1012
	54	Switch(S952)	CSN1022
	55	Arm Unit	CXB3574
	56	Bracket Unit	CXB3577
	57	Arm Unit	CXB3866
	58	Holder Unit	CXB6726
	59	Frame Unit	CXB6727
	60	Motor	CXM1085
	61	Washer	2-1816-0035-D2-00
	62	Washer	2-1821-0045-D2-00
	63	Panel	CNS6397
	64	Lighting Conductor	CNV6574
	65	Cover	CNM6489
	66	Holder	CNC8659
	67	Panel	CNS6360
	68	Remote Control Assy	CZX3257
	69	Cover	CZN7655
	70	Grille Unit(Service)	CXX1615
	71	Spacer	CNM7959


2.6 EXTERIOR(2)(DEH-P9450MP)

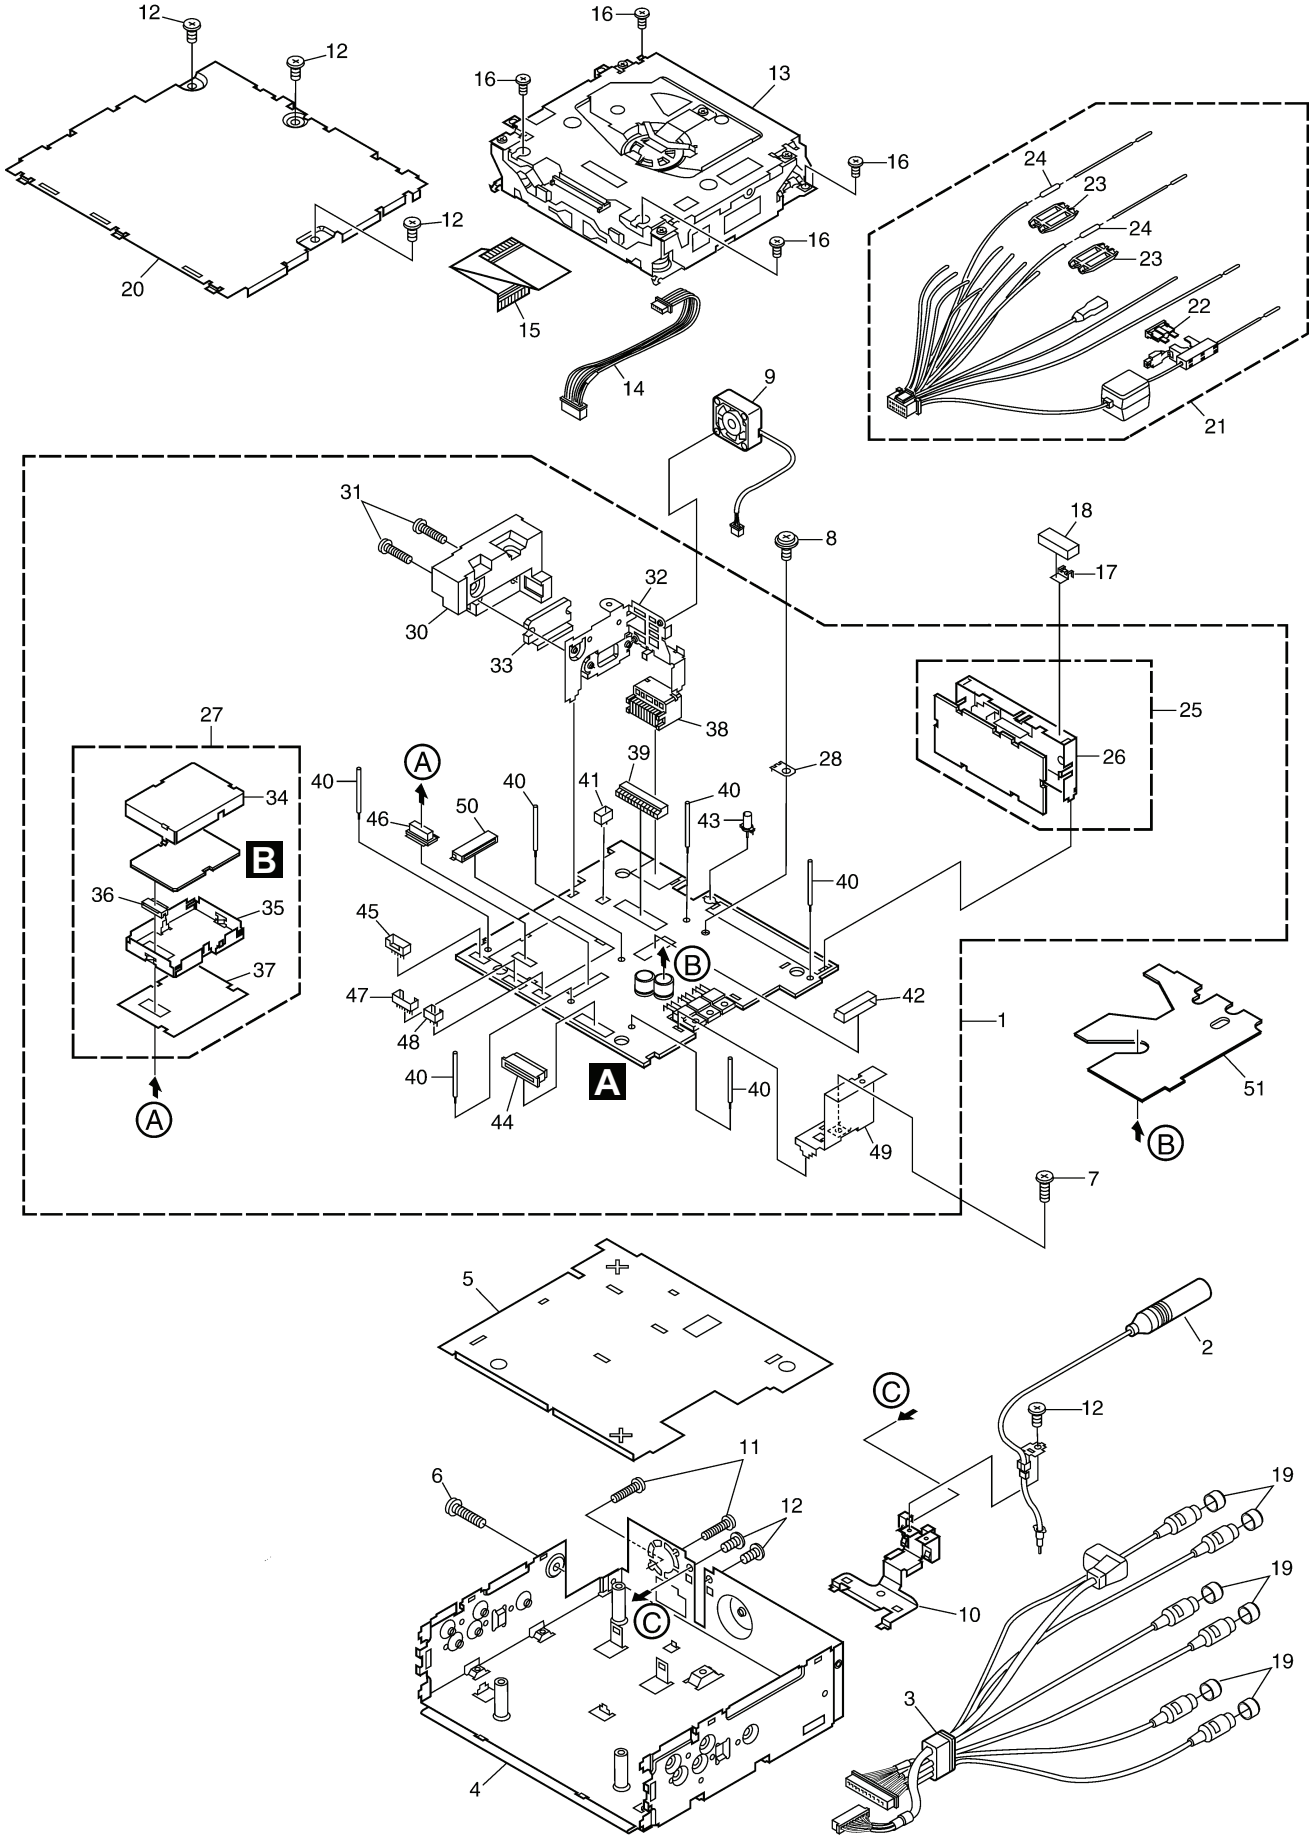

EXTERIOR(2)(DEH-P9450MP) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Tuner Amp Unit	CWM8225
	2	Antenna Cable	CDH1308
	3	Cord Assy	CDE6784
	4	Chassis Unit	CXB9285
	5	Insulator	CNM7773
	6	Screw	BSZ30P200FMC
	7	Screw	BMZ26P080FMC
	8	Screw	ISS26P055FUC
	9	Fan Motor	CXM1194
	10	Holder	CNC9299
	11	Screw(M2.6x14)	CBA1384
	12	Screw	BSZ30P050FMC
	13	CD Mechanism Module(S9MP3)	CXK5557
	14	Cord Assy	CDE7019
	15	Connector	CDE6556
	16	Screw	BSZ26P060FMC
	17	Holder	CNC6469
	18	Cushion	CNM4870
	19	Cap	CNV6727
	20	Case Unit	CXB8974
	21	Cord Assy	CDE6563
	22	Fuse(10A)	CEK1136
	23	Cap	CNS1472
	24	Resistor	RS1/2PMF102J
	25	FM/AM Tuner Unit	CWE1563
	26	Holder	CNC8815
	27	DSP Unit	CWM8229
	28	Terminal(CN452)	CKF1059
	29	•••••	
	30	Heat Sink	CNR1590
	31	Screw	BMZ26P160FMC
	32	Holder	CNC9291
	33	IC(IC301)	PAL007A
	34	Holder	CNC9295
	35	Holder	CNC9296
	36	Connector(CN1501)	CKS4452
	37	Insulator	CNM7181
	38	Plug(CN901)	CKM1278
	39	Connector(CN351)	CKS3606
	40	Clamper	CEF1008
	41	Connector(CN591)	CKS4571
*	42	Plug(CN101)	CKS1058
	43	Pinjack(CN451)	CKX1046
	44	Connector(CN801)	CKS1536
	45	Plug(CN851)	CKS-786
	46	Connector(CN251)	CKS4453
	47	Plug(CN702)	CKS-787
	48	Plug(CN131)	CKS-784
	49	Holder	CND1075
	50	Connector(CN701)	CKS3918
	51	Sheet	CNM7910

2.7 CD MECHANISM MODULE

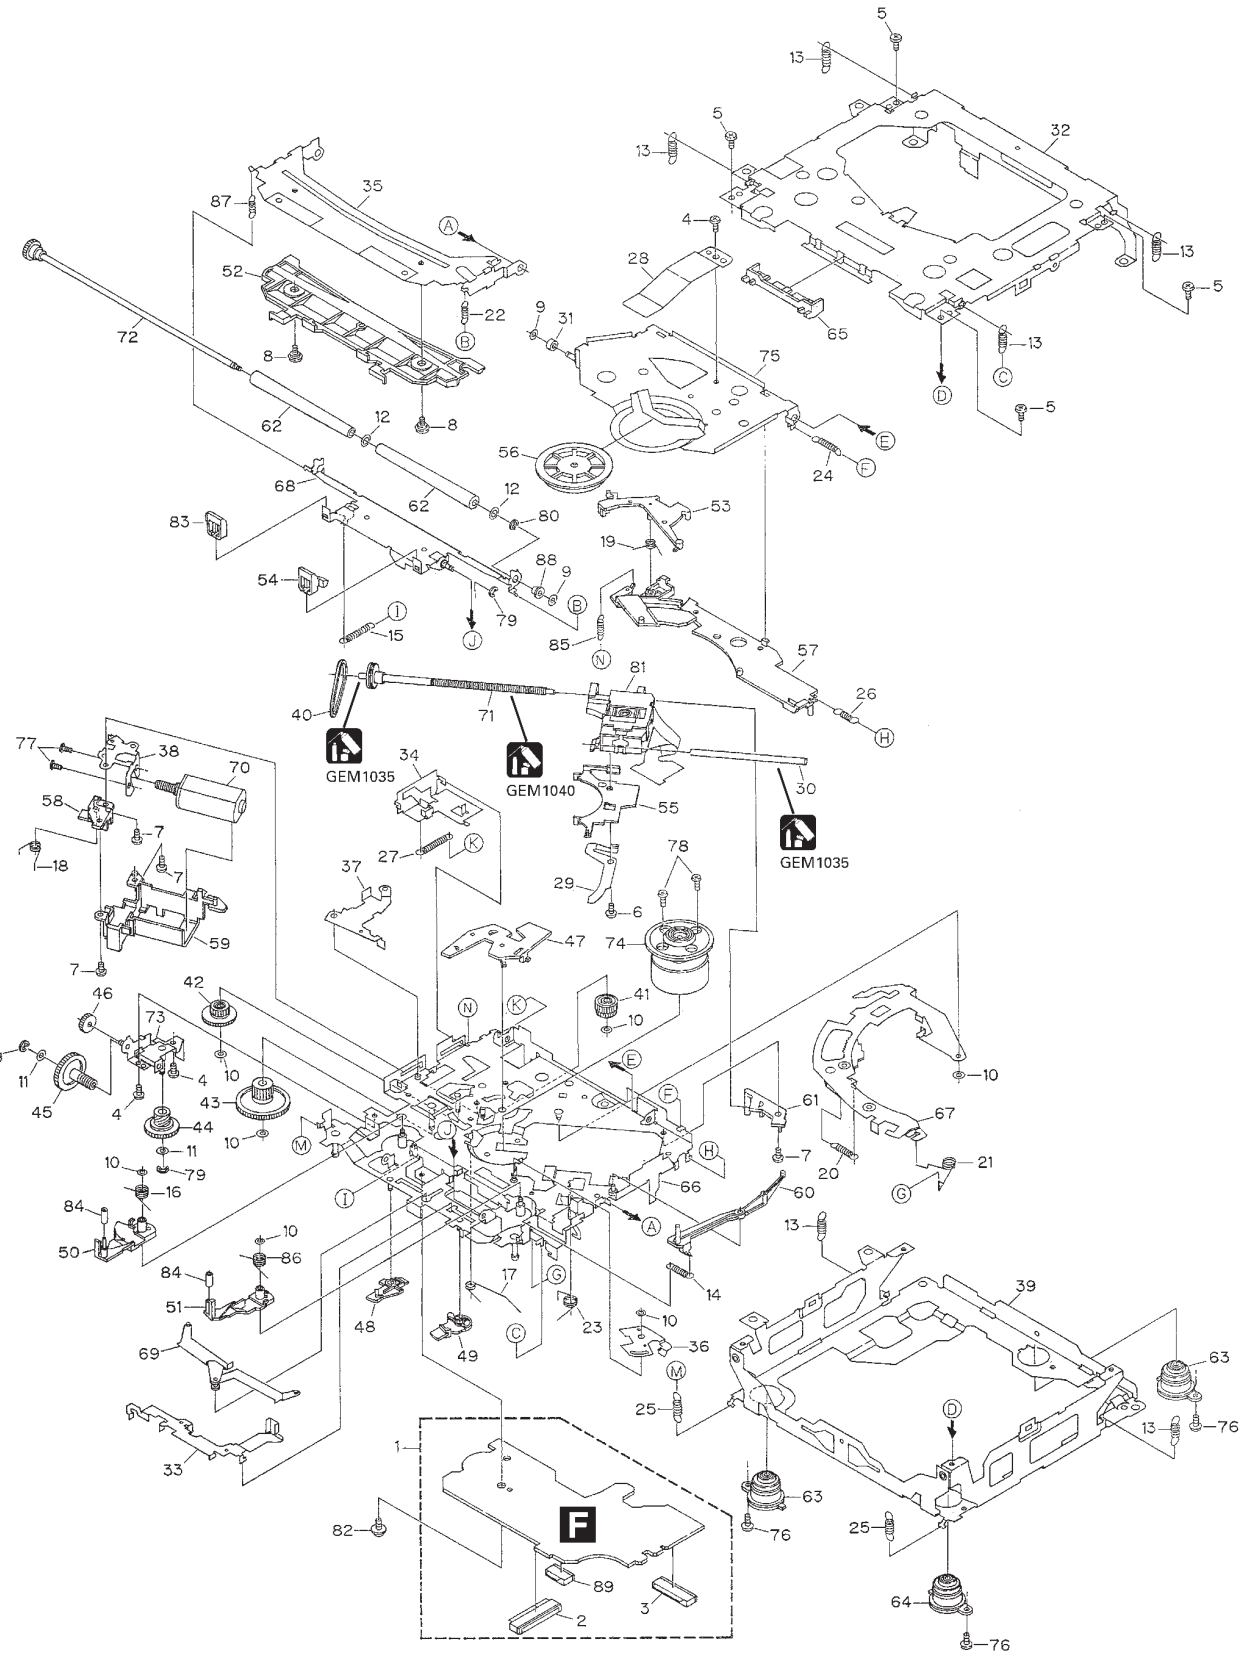

CD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	CD Core Unit(S9MP3)	CWX2619
	2	Connector(CN901)	CKS4190
	3	Connector(CN101)	CKS3486
	4	Screw	BMZ20P025FMC
	5	Screw	BSZ20P040FMC
	6	Screw(M2x4)	CBA1362
	7	Screw(M2x3)	CBA1527
	8	Screw	CBA1545
	9	Washer	CBF1037
	10	Washer	CBF1038
	11	Washer	CBF1039
	12	Washer	CBF1060
	13	Spring	CBH2378
	14	Spring	CBH2379
	15	Spring	CBH2514
	16	Spring	CBH2533
	17	Spring	CBH2382
	18	Spring	CBH2383
	19	Spring	CBH2384
	20	Spring	CBH2527
	21	Spring	CBH2386
	22	Spring	CBH2537
	23	Spring	CBH2390
	24	Spring	CBH2391
	25	Spring	CBH2523
	26	Spring	CBH2426
	27	Spring	CBH2444
	28	Spring	CBL1561
	29	Spring	CBL1553
	30	Shaft	CLA3845
	31	Roller	CLA3910
	32	Frame	CNC9654
	33	Lever	CNC9664
	34	Lever	CNC8949
	35	Arm	CNC9661
	36	Arm	CNC9016
	37	Arm	CNC9017
	38	Bracket	CNC9123
	39	Frame	CNC9656
	40	Belt	CNT1086
	41	Gear	CNV6886
	42	Gear	CNV6316
	43	Gear	CNV6317
	44	Gear	CNV6318
	45	Gear	CNV6319
	46	Gear	CNV6320
	47	Arm	CNV6322
	48	Arm	CNV6323
	49	Arm	CNV6324
	50	Arm	CNV6888
	51	Arm	CNV6889
	52	Guide	CNV6327
	53	Arm	CNV6924
	54	Guide	CNV6921
	55	Rack	CNV6923
	56	Clamper	CNV6331
	57	Arm	CNV6332
	58	Guide	CNV6333
	59	Cover	CNV6334
	60	Arm	CNV6335
	61	Guide	CNV6336
	62	Roller	CNV6338
	63	Damper	CNV6175
	64	Damper	CNV6662
	65	Guide	CNV6925
	66	Chassis Unit	CXB7980
*	67	Arm Unit	CXB7983
	68	Arm Unit	CXB7984
	69	Arm Unit	CXB7985
	70	Motor Unit(M2)	CXB5903
	71	Screw Unit	CXB5904
	72	Gear Unit	CXB8076
	73	Bracket Unit	CXB7982
	74	Motor Unit(M1)	CXB6007
	75	Arm Unit	CXB8504
	76	Screw(M2x5)	EBA1028
	77	Screw	JFZ20P020FMC
	78	Screw	JGZ17P020FZK
	79	Washer	YE15FUC
	80	Washer	YE20FUC
	81	Pickup Unit(Service)(P9MP3)	CXX1550
	82	Screw	IMS26P030FMC
	83	Guide	CNV6922
	84	Roller	CNV6887
	85	Spring	CBH2509
	86	Spring	CBH2512
	87	Spring	CBH2536
	88	Collar	CNV6906
	89	Connector(CN902)	CKS2195

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A Unit Number:CWM8223(P940MP/UC) Unit Name:Tuner Amp Unit

MISCELLANEOUS

Circuit Symbol and No.	Part Name	Part No.
IC 101	IC	HA12187FP
IC 141	IC	NJM4558MD
IC 142	IC	NJM4558MD
IC 251	IC	BA033FP
IC 271	IC	PA2028A
IC 301	IC	PAL007A
IC 601	IC	PD5750A
IC 801	IC	NJU7223DL1-33
IC 851	IC	BA6288FS
IC 961	IC	S-80835ANUP-EDZ
Q 101	Transistor	2SA1235A-12
Q 102	Transistor	RT1N241C-12
Q 131	Transistor	2SC3052-12
Q 132	Transistor	IMD2A
Q 133	Transistor	2SC3052-12
Q 251	Transistor	RT1N141C-12
Q 253	Transistor	2SB1198K
Q 301	Transistor	RT1N241C-12
Q 351	Transistor	HN1C03F
Q 352	Transistor	HN1C03F
Q 353	Transistor	HN1C03F
Q 401	Transistor	2SC3052-12
Q 591	Transistor	IMD2A
Q 593	Transistor	2SD1859
Q 721	Transistor	IMD2A
Q 722	Transistor	2SD2375
Q 751	Transistor	2SD2375
Q 752	Transistor	IMD2A
Q 801	Transistor	2SB808
Q 802	Transistor	RT1N141C-12
Q 803	Transistor	2SD2318F5
Q 804	Transistor	IMD2A
Q 805	Transistor	2SC3052-12
Q 806	Transistor	2SD1859
Q 807	Transistor	IMD2A
Q 851	Transistor	2SD1760F5
Q 852	Transistor	RT1P141C-12
Q 853	Transistor	RT1N241C-12
Q 911	Transistor	2SD1760F5
Q 912	Transistor	IMD2A
Q 921	Transistor	2SD2375
Q 922	Transistor	2SB1238
Q 923	Transistor	RT1N141C-12
Q 931	Transistor	IMX1
Q 932	Transistor	RT1N141C-12
Q 951	Transistor	2SA1235A-12
Q 962	Transistor	2SC3052-12
Q 980	Transistor	IMD2A
Q 981	Transistor	2SC3052-12
D 131	Diode	MA3039(L)
D 141	Diode	UDZS3R9(B)
D 142	Diode	RB706F-40
D 271	Diode	1SS396
D 272	Diode	1SS396
D 591	Diode	HZS11L(C3)
D 601	Diode Network	DA204U
D 602	Diode Network	DA204U
D 721	Diode	HZS9L(B1)
D 752	Diode	HZS6L(B3)
D 801	Diode Network	DA204U
D 802	Diode Network	DA204U
D 803	Diode Network	DA204U
D 804	Diode Network	DA204U
D 805	Diode	MA3062(M)
D 810	Diode	HZS9L(C2)
D 811	Diode Network	DA204U
D 814	Diode Network	DA204U
D 815	Diode	HZS11L(A1)
D 851	Diode	HZS7L(C3)
D 852	Diode	1SS133
D 853	Diode	1SS133
D 901	Diode	MPG06G-6415G50
D 902	Diode	MPG06G-6415G50
D 903	Diode	MPG06G-6415G50
D 904	Diode	MPG06G-6415G50
D 911	Diode	MPG06G-6415G50
D 912	Diode	HZS6L(B1)
D 921	Diode	HZS9L(B3)
D 931	Diode	HZS7L(A1)
D 932	Diode	HZS7L(C3)
D 933	Diode	MPG06G-6415G50
D 951	Diode	DAN202U
D 961	Diode	DAN202U
D 971	Diode	DAN202U
D 981	Diode	DAN202U
D 982	Diode	HZS9L(A2)
D 983	Diode	DAN202U
ZNR451	Surge Protector	RCCA-201Q43UA-PI
L 101	Inductor	LCTB3R3K2125
L 251	Inductor	LAU1R0K
L 252	Ferri-Inductor	LAU2R2K
L 253	Inductor	CTF1531

Circuit Symbol and No.	Part Name	Part No.
L 254	Inductor	CTF1529
L 255	Inductor	CTF1388
L 271	Ferri-Inductor	LAU101K
L 401	Inductor	LAU100K
L 402	Inductor	LCTB4R7K2125
L 404	Ferri-Inductor	LAU2R2K
L 601	Inductor	LAU100K
L 661	Inductor	LAU100K
L 801	Inductor	LAU100K
L 802	Inductor	CTF1489
L 841	Inductor	LAU100K
L 951	Inductor	CTF1530
X 601	Radiator 10.000MHz	CSS1599
S 601	Switch(DSP MODE)	CSH1055
IL 801	Lamp 14V 60mA	CEL1690
VR141	Semi-fixed 10kΩ(B)	CCP1448
MIC141	Microphone	CPM1011
SP641	Buzzer	CPV1050
	FM/AM Tuner Unit	CWE1563
	DSP Unit	CWM8229

RESISTORS

Circuit Symbol and No.	Part Name	Part No.
R 101		RS1/16S101J
R 102		RS1/16S470J
R 103		RS1/16S101J
R 104		RS1/16S222J
R 105		RS1/16S103J
R 106		RS1/16S0R0J
R 107		RS1/16S332J
R 108		RS1/16S181J
R 109		RS1/16S181J
R 110		RS1/16S223J
R 111		RS1/16S223J
R 112		RS1/16S102J
R 113		RS1/16S102J
R 115		RS1/16S562J
R 116		RS1/16S150J
R 117		RS1/16S0R0J
R 118		RS1/16S0R0J
R 119		RS1/16S0R0J
R 120		RS1/16S0R0J
R 128		RS1/16S0R0J
R 130		RS1/16S0R0J
R 131		RS1/16S104J
R 132		RS1/16S222J
R 133		RS1/16S103J
R 134		RS1/16S561J
R 135		RS1/16S223J
R 136		RS1/16S473J
R 137		RS1/16S153J
R 138		RS1/16S683J
R 139		RS1/16S682J
R 140		RS1/16S152J
R 141		RS1/16S222J
R 142		RS1/16S104J
R 143		RS1/16S152J
R 144		RS1/16S102J
R 145		RS1/16S101J
R 146		RS1/16S563J
R 147		RS1/16S103J
R 148		RS1/16S103J
R 149		RS1/16S153J
R 150		RS1/16S153J
R 151		RS1/16S223J
R 152		RN1/16SE4702D
R 154		RN1/16SE4702D
R 155		RS1/16S152J
R 161		RS1/16S272J
R 162		RS1/16S272J
R 163		RS1/16S162J
R 164		RS1/16S162J
R 171		RS1/16S0R0J
R 172		RS1/16S0R0J
R 251		RS1/16S472J
R 252		RS1/16S122J
R 271		RS1/16S103J
R 277		RS1/16S103J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 351		RS1/16S820J
R 352		RS1/16S820J
R 353		RS1/16S820J
R 354		RS1/16S820J
R 355		RS1/16S820J
R 356		RS1/16S820J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 363		RS1/16S103J
R 364		RS1/16S103J
R 365		RS1/16S103J
R 366		RS1/16S103J
R 367		RS1/16S103J
R 368		RS1/16S103J
R 369		RS1/16S471J
R 370		RS1/16S471J
R 371		RS1/16S471J
R 372		RS1/16S471J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S0R0J
R 377		RS1/16S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 424		RS1/16S393J
R 429		RS1/16S0R0J
R 515		RS1/16S0R0J
R 593		RS1/16S391J
R 594		RS1/16S1R0J
R 601		RS1/16S104J
R 602		RS1/16S102J
R 603		RS1/16S104J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J
R 611		RS1/16S104J
R 612		RS1/16S104J
R 613		RS1/16S104J
R 614		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S104J
R 624		RS1/16S104J
R 625		RS1/16S473J
R 627		RS1/16S104J
R 628		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J
R 641		RS1/16S102J
R 651		RS1/16S473J
R 713		RS1/16S102J
R 715		RS1/16S0R0J
R 716		RS1/16S0R0J
R 717		RS1/16S0R0J
R 718		RS1/16S0R0J
R 719		RS1/16S0R0J
R 721		RD1/4PU101J
R 722		RS1/16S221J
R 723		RD1/4PU101J
R 751		RS1/16S152J
R 752		RS1/16S221J
R 753		RS1/16S182J
R 754		RS1/16S0R0J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S103J
R 805		RS1/16S222J
R 807		RS1/16S1R0J

Circuit Symbol and No.	Part Name	Part No.
R 808		RS1/16S103J
R 809		RS1/16S103J
R 810		RD1/4PU561J
R 812		RS1/16S102J
R 814		RD1/4PU391J
R 817		RS1/16S473J
R 818		RS1/16S472J
R 823		RS1/16S222J
R 824		RS1/10S1R0J
R 825		RS1/16S0R0J
R 826		RS1/16S222J
R 851		RAB4C102J
R 852		RS1/16S102J
R 853		RS1/16S102J
R 861		RS1/16S102J
R 862		RS1/16S102J
R 911		RS1/16S0R0J
R 912		RS1/16S821J
R 913		RS1/16S153J
R 914		RS1/16S821J
R 922		RD1/4PU221J
R 923		RS1/16S223J
R 924		RD1/4PU272J
R 925		RS1/16S471J
R 926		RS1/16S561J
R 931		RS1/16S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 951		RS1/16S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J
R 964		RS1/16S183J
R 965		RS1/16S222J
R 981		RS1/16S223J
R 982		RS1/16S473J
R 983		RS1/16S103J
R 984		RS1/16S473J
R 985		RS1/16S102J

CAPACITORS

C 101		CKSRYB104K16
C 131		CKSRYB681K50
C 132		CEJQ101M6R3
C 133		CKSQYB225K10
C 141		CKSRYB105K10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CEJQNP4R7M16
C 146		CKSRYB105K10
C 147		CEJQNP4R7M16
C 148		CKSRYB105K10
C 149		CKSRYB104K16

Circuit Symbol and No.	Part Name	Part No.
C 150		CEJQNP100M10
C 152		CKSRYB474K10
C 155		CKSRYB105K10
C 161		CKSRYB183K25
C 162		CKSRYB183K25
C 245		CKSQYB225K10
C 246		CKSQYB225K10
C 247		CKSQYB225K10
C 248		CKSQYB225K10
C 249	470µF/10V	CCH1438
C 251		CEJQ220M25
C 252		CKSRYF105Z10
C 253		CKSQYB225K10
C 254		CKSRYF105Z10
C 256		CCSRCH101J50
C 258		CEJQ101M6R3
C 259		CEJQ221M6R3
C 260		CCSRCH101J50
C 263		CEJQ470M10
C 266		CKSQYB225K10
C 271		CEJQ4R7M35
C 272		CEJQ101M16
C 273		CASAQ3R3M16
C 274		CEJQ100M16
C 275		CKSYB684K16
C 276		CASA220M16
C 277		CKSRYF105Z10
C 278		CEJQ330M25
C 279		CEJQ330M25
C 280		CEJQ330M25
C 281		CEJQ330M25
C 283		CKSRYB105K10
C 284		CKSRYB105K10
C 285		CKSRYB105K10
C 286		CKSRYB105K10
C 287		CKSRYB105K10
C 288		CKSRYB105K10
C 301		CKSRYB474K10
C 302		CKSRYB474K10
C 303		CKSRYB474K10
C 304		CKSRYB474K10
C 306		CEJQ330M10
C 307	3300µF/16V	CCH1433
C 308		CKSRYB104K16
C 309		CEJQ100M16
C 310		CKSQYB225K10
C 311		CKSRYB474K10
C 312		CKSRYB474K10
C 313		CKSRYB474K10
C 314		CKSRYB474K10
C 315		CKSQYB225K10
C 351		CEJQ100M50
C 352		CEJQ100M50
C 353		CEJQ100M50
C 354		CEJQ100M50
C 355		CEJQ100M50
C 356		CEJQ100M50
C 357		CKSRYB222K50
C 358		CKSRYB222K50
C 359		CKSRYB222K50
C 360		CKSRYB222K50
C 361		CKSRYB222K50
C 362		CKSRYB222K50
C 403		CKSRYB473K50
C 404		CEJQ101M10
C 405		CKSRYB103K50
C 406		CEJQ220M10
C 408		CKSRYB223K50
C 409		CKSRYB223K50
C 411		CKSRYB472K50
C 513		CCSRCH101J50
C 591		CKSRYB103K50
C 593		CEJQ100M16
C 594		CKSRYB103K50
C 601		CCSRCH200J50
C 602		CCSRCH180J50
C 603		CKSRYB104K16
C 605		CEJQ4R7M35
C 606		CKSQYB225K10
C 701		CCSRCH101J50
C 702		CCSRCH101J50
C 703		CCSRCH101J50
C 705		CCSRCH101J50
C 706	470µF/10V	CCH1438
C 721		CKSRYB473K50
C 722		CKSRYB102K50
C 723	100µF/10V	CCH1450
C 751		CKSRYB472K50
C 752		CEAL470M10
C 805		CEJQ101M16
C 806		CKSRYB473K50
C 808		CKSRYB104K16
C 809		CKSRYB104K16
C 810		CEV470M6R3
C 812		CKSRYB103K50
C 815		CCSRCH101J50
C 816		CCSRCH101J50
C 818		CEJQ330M16
C 819		CCSRCH101J50
C 821		CCSRCH101J50
C 830		CKSRYB104K16
C 833		CCSRCH102J50
C 842		CEV470M6R3
C 843		CKSRYB104K16
C 844		CKSRYB104K16
C 851		CKSRYB224K10
C 852		CKSRYB104K16
C 853		CASAQ4R7M10
C 855		CKSRYB102K50
C 856		CCSRCH101J50
C 857		CCSRCH101J50
C 911	470µF/16V	CCH1331
C 912		CKSRYB472K50
C 913		CKSRYB103K50
C 914		CEAL470M10
C 915	470µF/16V	CCH1331
C 921		CEAT331M10
C 922		CKSRYB103K50
C 923		CEV101M16
C 931		CKSRYB105K10

Circuit Symbol and No.	Part Name	Part No.
C 932		CKSRYB104K25
C 962		CKSRYB104K16
C 963		CKSRYB105K10

A Unit Number:CWM8224(P9400MP/UC)
Unit Name:Tuner Amp Unit

MISCELLANEOUS

IC 101	IC	HA12187FP
IC 141	IC	NJM4558MD
IC 142	IC	NJM4558MD
IC 251	IC	BA033FP
IC 271	IC	PA2028A
IC 301	IC	PAL007A
IC 601	IC	PD5750A
IC 801	IC	NJU7223DL1-33
IC 851	IC	BA6288FS
IC 961	IC	S-80835ANUP-EDZ
Q 101	Transistor	2SA1235A-12
Q 102	Transistor	RT1N241C-12
Q 131	Transistor	2SC3052-12
Q 132	Transistor	IMD2A
Q 133	Transistor	2SC3052-12
Q 251	Transistor	RT1N141C-12
Q 253	Transistor	2SB1198K
Q 301	Transistor	RT1N241C-12
Q 351	Transistor	IMH3A
Q 352	Transistor	IMH3A
Q 353	Transistor	IMH3A
Q 401	Transistor	2SC3052-12
Q 591	Transistor	IMD2A
Q 593	Transistor	2SD1859
Q 721	Transistor	IMD2A
Q 722	Transistor	2SD2375
Q 751	Transistor	2SD2375
Q 752	Transistor	IMD2A
Q 801	Transistor	2SB808
Q 802	Transistor	RT1N141C-12
Q 803	Transistor	2SD2318F5
Q 804	Transistor	IMD2A
Q 805	Transistor	2SC3052-12
Q 806	Transistor	2SD1859
Q 807	Transistor	IMD2A
Q 851	Transistor	2SD1760F5
Q 852	Transistor	RT1P141C-12
Q 853	Transistor	RT1N241C-12
Q 911	Transistor	2SD1760F5
Q 912	Transistor	IMD2A
Q 921	Transistor	2SD2375
Q 922	Transistor	2SB1238
Q 923	Transistor	RT1N141C-12
Q 931	Transistor	IMX1
Q 932	Transistor	RT1N141C-12
Q 951	Transistor	2SA1235A-12
Q 962	Transistor	2SC3052-12
Q 980	Transistor	IMD2A
Q 981	Transistor	2SC3052-12
D 131	Diode	MA3039(L)

Circuit Symbol and No.	Part Name	Part No.
D 141	Diode	UDZS3R9(B)
D 142	Diode	RB706F-40
D 272	Diode	DA204K
D 591	Diode	HZS11L(C3)
D 601	Diode Network	DA204U
D 602	Diode Network	DA204U
D 721	Diode	HZS9L(B1)
D 752	Diode	HZS6L(B3)
D 801	Diode Network	DA204U
D 802	Diode Network	DA204U
D 803	Diode Network	DA204U
D 804	Diode Network	DA204U
D 805	Diode	MA3062(M)
D 810	Diode	HZS9L(C2)
D 811	Diode Network	DA204U
D 814	Diode Network	DA204U
D 815	Diode	HZS11L(A1)
D 851	Diode	HZS7L(C3)
D 852	Diode	1SS133
D 853	Diode	1SS133
D 901	Diode	MPG06G-6415G50
D 902	Diode	MPG06G-6415G50
D 903	Diode	MPG06G-6415G50
D 904	Diode	MPG06G-6415G50
D 911	Diode	MPG06G-6415G50
D 912	Diode	HZS6L(B1)
D 921	Diode	HZS9L(B3)
D 931	Diode	HZS7L(A1)
D 932	Diode	HZS7L(C3)
D 933	Diode	MPG06G-6415G50
D 951	Diode	DAN202U
D 961	Diode	DAN202U
D 971	Diode	DAN202U
D 981	Diode	DAN202U
D 982	Diode	HZS9L(A2)
D 983	Diode	DAN202U
ZNR451	Surge Protector	RCCA-201Q43UA-PI
L 101	Inductor	LCTB3R3K2125
L 251	Inductor	LAU1R0K
L 252	Ferri-Inductor	LAU2R2K
L 253	Inductor	CTF1531
L 254	Inductor	CTF1529
L 255	Inductor	CTF1388
L 271	Ferri-Inductor	LAU101K
L 401	Inductor	LAU100K
L 402	Inductor	LCTB4R7K2125
L 404	Ferri-Inductor	LAU2R2K
L 601	Inductor	LAU100K
L 661	Inductor	LAU100K
L 801	Inductor	LAU100K
L 802	Inductor	CTF1489
L 841	Inductor	LAU100K
L 951	Inductor	CTF1530
X 601	Radiator 10.000MHz	CSS1599
S 601	Switch(DSP MODE)	CSH1055
IL 801	Lamp 14V 60mA	CEL1690
VR141	Semi-fixed 10kΩ(B)	CCP1448
MIC141	Microphone	CPM1011
SP641	Buzzer	CPV1050
	FM/AM Tuner Unit	CWE1563

Circuit Symbol and No.	Part Name	Part No.
	DSP Unit	CWM8229
RESISTORS		
R 101		RS1/16S101J
R 102		RS1/16S470J
R 103		RS1/16S101J
R 104		RS1/16S222J
R 105		RS1/16S103J
R 106		RS1/16S0R0J
R 107		RS1/16S332J
R 108		RS1/16S181J
R 109		RS1/16S181J
R 110		RS1/16S223J
R 111		RS1/16S223J
R 112		RS1/16S102J
R 113		RS1/16S102J
R 115		RS1/16S562J
R 116		RS1/16S150J
R 117		RS1/16S0R0J
R 118		RS1/16S0R0J
R 119		RS1/16S0R0J
R 120		RS1/16S0R0J
R 128		RS1/16S0R0J
R 130		RS1/16S0R0J
R 131		RS1/16S104J
R 132		RS1/16S222J
R 133		RS1/16S103J
R 134		RS1/16S561J
R 135		RS1/16S223J
R 136		RS1/16S473J
R 137		RS1/16S153J
R 138		RS1/16S683J
R 139		RS1/16S682J
R 140		RS1/16S152J
R 141		RS1/16S222J
R 142		RS1/16S104J
R 143		RS1/16S152J
R 144		RS1/16S102J
R 145		RS1/16S101J
R 146		RS1/16S563J
R 147		RS1/16S103J
R 148		RS1/16S103J
R 149		RS1/16S153J
R 150		RS1/16S153J
R 151		RS1/16S223J
R 152		RN1/16SE4702D
R 154		RN1/16SE4702D
R 155		RS1/16S152J
R 161		RS1/16S272J
R 162		RS1/16S272J
R 163		RS1/16S162J
R 164		RS1/16S162J
R 171		RS1/16S0R0J
R 172		RS1/16S0R0J
R 251		RS1/16S472J
R 252		RS1/16S122J
R 271		RS1/16S103J
R 272		RS1/16S0R0J
R 277		RS1/16S103J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 351		RS1/16S820J
R 352		RS1/16S820J
R 353		RS1/16S820J
R 354		RS1/16S820J
R 355		RS1/16S820J
R 356		RS1/16S820J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 363		RS1/16S0R0J
R 364		RS1/16S0R0J
R 365		RS1/16S0R0J
R 366		RS1/16S0R0J
R 367		RS1/16S0R0J
R 368		RS1/16S0R0J
R 369		RS1/16S471J
R 370		RS1/16S471J
R 371		RS1/16S471J
R 372		RS1/16S471J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S0R0J
R 377		RS1/16S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 424		RS1/16S393J
R 429		RS1/16S0R0J
R 515		RS1/16S0R0J
R 593		RS1/16S391J
R 594		RS1/16S1R0J
R 601		RS1/16S104J
R 602		RS1/16S102J
R 603		RS1/16S104J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J

Circuit Symbol and No.	Part Name	Part No.
R 611		RS1/16S104J
R 612		RS1/16S104J
R 613		RS1/16S104J
R 614		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S104J
R 624		RS1/16S104J
R 625		RS1/16S473J
R 627		RS1/16S104J
R 628		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J
R 641		RS1/16S102J
R 651		RS1/16S473J
R 713		RS1/16S102J
R 715		RS1/16S0R0J
R 716		RS1/16S0R0J
R 717		RS1/16S0R0J
R 718		RS1/16S0R0J
R 719		RS1/16S0R0J
R 721		RD1/4PU101J
R 722		RS1/16S221J
R 723		RD1/4PU101J
R 751		RS1/16S152J
R 752		RS1/16S221J
R 753		RS1/16S182J
R 754		RS1/16S0R0J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S103J
R 805		RS1/16S222J
R 807		RS1/16S1R0J
R 808		RS1/16S103J
R 809		RS1/16S103J
R 810		RD1/4PU561J
R 812		RS1/16S102J
R 814		RD1/4PU391J
R 817		RS1/16S473J
R 818		RS1/16S472J
R 823		RS1/16S222J
R 824		RS1/10S1R0J
R 825		RS1/16S0R0J
R 826		RS1/16S222J
R 851		RAB4C102J
R 852		RS1/16S102J
R 853		RS1/16S102J
R 861		RS1/16S102J
R 862		RS1/16S102J
R 911		RS1/16S0R0J
R 912		RS1/16S821J
R 913		RS1/16S153J
R 914		RS1/16S821J
R 922		RD1/4PU221J
R 923		RS1/16S223J
R 924		RD1/4PU272J
R 925		RS1/16S471J
R 926		RS1/16S561J
R 931		RS1/16S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 951		RS1/16S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J
R 964		RS1/16S183J
R 965		RS1/16S222J
R 981		RS1/16S223J
R 982		RS1/16S473J
R 983		RS1/16S103J
R 984		RS1/16S473J
R 985		RS1/16S102J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSRYB104K16
C 131		CKSRYB681K50
C 132		CEJQ101M6R3
C 133		CKSQYB225K10
C 141		CKSRYB105K10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CEJQNP4R7M16
C 146		CKSRYB105K10
C 147		CEJQNP4R7M16
C 148		CKSRYB105K10
C 149		CKSRYB104K16
C 150		CEJQNP100M10
C 152		CKSRYB474K10
C 155		CKSRYB105K10
C 161		CKSRYB183K25
C 162		CKSRYB183K25
C 245		CKSQYB225K10
C 246		CKSQYB225K10
C 247		CKSQYB225K10
C 248		CKSQYB225K10
C 249	470µF/10V	CCH1438
C 251		CEJQ220M25
C 252		CKSRYF105Z10
C 253		CKSQYB225K10
C 254		CKSRYF105Z10
C 256		CCSRCH101J50
C 258		CEJQ101M6R3
C 259		CEJQ221M6R3
C 260		CCSRCH101J50

Circuit Symbol and No.	Part Name	Part No.
C 263		CEJQ470M10
C 266		CKSQYB225K10
C 271		CEJQ4R7M35
C 272		CEJQ101M16
C 273		CASAQ3R3M16
C 274		CEJQ100M16
C 275		CKSYB684K16
C 276		CASA220M16
C 277		CKSRYF105Z10
C 278		CEJQ330M25
C 279		CEJQ330M25
C 283		CKSRYB105K10
C 284		CKSRYB105K10
C 285		CKSRYB105K10
C 286		CKSRYB105K10
C 287		CKSRYB105K10
C 288		CKSRYB105K10
C 301		CKSRYB474K10
C 302		CKSRYB474K10
C 303		CKSRYB474K10
C 304		CKSRYB474K10
C 306		CEJQ330M10
C 307	3300µF/16V	CCH1433
C 308		CKSRYB104K16
C 309		CEJQ100M16
C 310		CKSQYB225K10
C 311		CKSRYB474K10
C 312		CKSRYB474K10
C 313		CKSRYB474K10
C 314		CKSRYB474K10
C 315		CKSQYB225K10
C 351		CEJQ100M50
C 352		CEJQ100M50
C 353		CEJQ100M50
C 354		CEJQ100M50
C 355		CEJQ100M50
C 356		CEJQ100M50
C 357		CKSRYB222K50
C 358		CKSRYB222K50
C 359		CKSRYB222K50
C 360		CKSRYB222K50
C 361		CKSRYB222K50
C 362		CKSRYB222K50
C 403		CKSRYB473K50
C 404		CEJQ101M10
C 405		CKSRYB103K50
C 406		CEJQ220M10
C 408		CKSRYB223K50
C 409		CKSRYB223K50
C 411		CKSRYB472K50
C 513		CCSRCH101J50
C 591		CKSRYB103K50
C 593		CEJQ100M16
C 594		CKSRYB103K50
C 601		CCSRCH200J50
C 602		CCSRCH180J50
C 603		CKSRYB104K16
C 605		CEJQ4R7M35
C 606		CKSQYB225K10
C 701		CCSRCH101J50
C 702		CCSRCH101J50
C 703		CCSRCH101J50
C 705		CCSRCH101J50
C 706	470µF/10V	CCH1438
C 721		CKSRYB473K50
C 722		CKSRYB102K50
C 723	100µF/10V	CCH1450
C 751		CKSRYB472K50
C 752		CEAL470M10
C 805		CEJQ101M16
C 806		CKSRYB473K50
C 808		CKSRYB104K16
C 809		CKSRYB104K16
C 810		CEV470M6R3
C 812		CKSRYB103K50
C 815		CCSRCH101J50
C 816		CCSRCH101J50
C 818		CEJQ330M16
C 819		CCSRCH101J50
C 821		CCSRCH101J50
C 830		CKSRYB104K16
C 833		CCSRCH102J50
C 842		CEV470M6R3
C 843		CKSRYB104K16
C 844		CKSRYB104K16
C 851		CKSRYB224K10
C 852		CKSRYB104K16
C 853		CASAQ4R7M10
C 855		CKSRYB102K50
C 856		CCSRCH101J50
C 857		CCSRCH101J50
C 911	470µF/16V	CCH1331
C 912		CKSRYB472K50
C 913		CKSRYB103K50
C 914		CEAL470M10
C 915	470µF/16V	CCH1331
C 921		CEAT331M10
C 922		CKSRYB103K50
C 923		CEV101M16
C 931		CKSRYB105K10
C 932		CKSRYB104K25
C 962		CKSRYB104K16
C 963		CKSRYB105K10

A Unit Number:CWM8225(P9450MP/ES)
Unit Name:Tuner Amp Unit

MISCELLANEOUS

IC 101	IC	HA12187FP
IC 141	IC	NJM4558MD
IC 142	IC	NJM4558MD
IC 251	IC	BA033FP
IC 271	IC	PA2028A
IC 301	IC	PAL007A
IC 601	IC	PD5750A
IC 801	IC	NJU7223DL1-33
IC 851	IC	BA6288FS
IC 961	IC	S-80835ANUP-EDZ
Q 101	Transistor	2SA1235A-12

Circuit Symbol and No.	Part Name	Part No.
Q 102	Transistor	RT1N241C-12
Q 131	Transistor	2SC3052-12
Q 132	Transistor	IMD2A
Q 133	Transistor	2SC3052-12
Q 251	Transistor	RT1N141C-12
Q 253	Transistor	2SB1198K
Q 301	Transistor	RT1N241C-12
Q 351	Transistor	HN1C03F
Q 352	Transistor	HN1C03F
Q 353	Transistor	HN1C03F
Q 401	Transistor	2SC3052-12
Q 591	Transistor	IMD2A
Q 593	Transistor	2SD1859
Q 721	Transistor	IMD2A
Q 722	Transistor	2SD2375
Q 751	Transistor	2SD2375
Q 752	Transistor	IMD2A
Q 801	Transistor	2SB808
Q 802	Transistor	RT1N141C-12
Q 803	Transistor	2SD2318F5
Q 804	Transistor	IMD2A
Q 805	Transistor	2SC3052-12
Q 806	Transistor	2SD1859
Q 807	Transistor	IMD2A
Q 851	Transistor	2SD1760F5
Q 852	Transistor	RT1P141C-12
Q 853	Transistor	RT1N241C-12
Q 911	Transistor	2SD1760F5
Q 912	Transistor	IMD2A
Q 921	Transistor	2SD2375
Q 922	Transistor	2SB1238
Q 923	Transistor	RT1N141C-12
Q 931	Transistor	IMX1
Q 932	Transistor	RT1N141C-12
Q 951	Transistor	2SA1235A-12
Q 962	Transistor	2SC3052-12
Q 980	Transistor	IMD2A
Q 981	Transistor	2SC3052-12
D 131	Diode	MA3039(L)
D 141	Diode	UDZS3R9(B)
D 142	Diode	RB706F-40
D 271	Diode	1SS396
D 272	Diode	1SS396
D 591	Diode	HZS11L(C3)
D 601	Diode Network	DA204U
D 602	Diode Network	DA204U
D 721	Diode	HZS9L(B1)
D 752	Diode	HZS6L(B3)
D 801	Diode Network	DA204U
D 802	Diode Network	DA204U
D 803	Diode Network	DA204U
D 804	Diode Network	DA204U
D 805	Diode	MA3062(M)
D 810	Diode	HZS9L(C2)
D 811	Diode Network	DA204U
D 814	Diode Network	DA204U
D 815	Diode	HZS11L(A1)
D 851	Diode	HZS7L(C3)
D 852	Diode	1SS133
D 853	Diode	1SS133

Circuit Symbol and No.	Part Name	Part No.
D 901	Diode	MPG06G-6415G50
D 902	Diode	MPG06G-6415G50
D 903	Diode	MPG06G-6415G50
D 904	Diode	MPG06G-6415G50
D 911	Diode	MPG06G-6415G50
D 912	Diode	HZS6L(B1)
D 921	Diode	HZS9L(B3)
D 931	Diode	HZS7L(A1)
D 932	Diode	HZS7L(C3)
D 933	Diode	MPG06G-6415G50
D 951	Diode	DAN202U
D 961	Diode	DAN202U
D 971	Diode	DAN202U
D 981	Diode	DAN202U
D 982	Diode	HZS9L(A2)
D 983	Diode	DAN202U
ZNR451	Surge Protector	RCCA-201Q43UA-PI
L 101	Inductor	LCTB3R3K2125
L 251	Inductor	LAU1R0K
L 252	Ferri-Inductor	LAU2R2K
L 253	Inductor	CTF1531
L 254	Inductor	CTF1529
L 255	Inductor	CTF1388
L 271	Ferri-Inductor	LAU101K
L 401	Inductor	LAU100K
L 402	Inductor	LCTB4R7K2125
L 404	Ferri-Inductor	LAU2R2K
L 601	Inductor	LAU100K
L 661	Inductor	LAU100K
L 801	Inductor	LAU100K
L 802	Inductor	CTF1489
L 841	Inductor	LAU100K
L 951	Inductor	CTF1530
X 601	Radiator 10.000MHz	CSS1599
S 601	Switch(DSP MODE)	CSH1055
IL 801	Lamp 14V 60mA	CEL1690
VR141	Semi-fixed 10kΩ(B)	CCP1448
MIC141	Microphone	CPM1011
	DSP Unit	CWM8229
SP641	Buzzer	CPV1050
	FM/AM Tuner Unit	CWE1563

RESISTORS

R 101		RS1/16S101J
R 102		RS1/16S470J
R 103		RS1/16S101J
R 104		RS1/16S222J
R 105		RS1/16S103J
R 106		RS1/16S0R0J
R 107		RS1/16S332J
R 108		RS1/16S181J
R 109		RS1/16S181J
R 110		RS1/16S223J
R 111		RS1/16S223J
R 112		RS1/16S102J
R 113		RS1/16S102J
R 115		RS1/16S562J
R 116		RS1/16S150J
R 117		RS1/16S0R0J
R 118		RS1/16S0R0J

Circuit Symbol and No.	Part Name	Part No.
R 119		RS1/16S0R0J
R 120		RS1/16S0R0J
R 128		RS1/16S0R0J
R 130		RS1/16S0R0J
R 131		RS1/16S104J
R 132		RS1/16S222J
R 133		RS1/16S103J
R 134		RS1/16S561J
R 135		RS1/16S223J
R 136		RS1/16S473J
R 137		RS1/16S153J
R 138		RS1/16S683J
R 139		RS1/16S682J
R 140		RS1/16S152J
R 141		RS1/16S222J
R 142		RS1/16S104J
R 143		RS1/16S152J
R 144		RS1/16S102J
R 145		RS1/16S101J
R 146		RS1/16S563J
R 147		RS1/16S103J
R 148		RS1/16S103J
R 149		RS1/16S153J
R 150		RS1/16S153J
R 151		RS1/16S223J
R 152		RN1/16SE4702D
R 154		RN1/16SE4702D
R 155		RS1/16S152J
R 161		RS1/16S272J
R 162		RS1/16S272J
R 163		RS1/16S162J
R 164		RS1/16S162J
R 171		RS1/16S0R0J
R 172		RS1/16S0R0J
R 251		RS1/16S472J
R 252		RS1/16S122J
R 271		RS1/16S103J
R 277		RS1/16S103J
R 301		RS1/16S103J
R 302		RS1/16S103J
R 303		RS1/16S103J
R 304		RS1/16S331J
R 351		RS1/16S820J
R 352		RS1/16S820J
R 353		RS1/16S820J
R 354		RS1/16S820J
R 355		RS1/16S820J
R 356		RS1/16S820J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 363		RS1/16S103J
R 364		RS1/16S103J
R 365		RS1/16S103J
R 366		RS1/16S103J
R 367		RS1/16S103J
R 368		RS1/16S103J

Circuit Symbol and No.	Part Name	Part No.
R 369		RS1/16S471J
R 370		RS1/16S471J
R 371		RS1/16S471J
R 372		RS1/16S471J
R 373		RS1/16S471J
R 374		RS1/16S471J
R 375		RS1/16S0R0J
R 377		RS1/16S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 424		RS1/16S393J
R 429		RS1/16S0R0J
R 515		RS1/16S0R0J
R 593		RS1/16S391J
R 594		RS1/16S1R0J
R 601		RS1/16S104J
R 602		RS1/16S102J
R 603		RS1/16S104J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J
R 611		RS1/16S104J
R 612		RS1/16S104J
R 613		RS1/16S104J
R 614		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S104J
R 624		RS1/16S104J
R 625		RS1/16S473J
R 626		RS1/16S104J
R 628		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J

Circuit Symbol and No.	Part Name	Part No.
R 641		RS1/16S102J
R 651		RS1/16S473J
R 713		RS1/16S102J
R 715		RS1/16S0R0J
R 716		RS1/16S0R0J
R 717		RS1/16S0R0J
R 718		RS1/16S0R0J
R 719		RS1/16S0R0J
R 721		RD1/4PU101J
R 722		RS1/16S221J
R 723		RD1/4PU101J
R 751		RS1/16S152J
R 752		RS1/16S221J
R 753		RS1/16S182J
R 754		RS1/16S0R0J
R 801		RS1/16S222J
R 802		RS1/16S222J
R 803		RS1/16S222J
R 804		RS1/16S103J
R 805		RS1/16S222J
R 807		RS1/16S1R0J
R 808		RS1/16S103J
R 809		RS1/16S103J
R 810		RD1/4PU561J
R 812		RS1/16S102J
R 814		RD1/4PU391J
R 817		RS1/16S473J
R 818		RS1/16S472J
R 823		RS1/16S222J
R 824		RS1/10S1R0J
R 825		RS1/16S0R0J
R 826		RS1/16S222J
R 851		RAB4C102J
R 852		RS1/16S102J
R 853		RS1/16S102J
R 861		RS1/16S102J
R 862		RS1/16S102J
R 911		RS1/16S0R0J
R 912		RS1/16S821J
R 913		RS1/16S153J
R 914		RS1/16S821J
R 922		RD1/4PU221J
R 923		RS1/16S223J
R 924		RD1/4PU272J
R 925		RS1/16S471J
R 926		RS1/16S561J
R 931		RS1/16S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 951		RS1/16S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J
R 964		RS1/16S183J
R 965		RS1/16S222J
R 981		RS1/16S223J
R 982		RS1/16S473J
R 983		RS1/16S103J
R 984		RS1/16S473J
R 985		RS1/16S102J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSRYB104K16
C 131		CKSRYB681K50
C 132		CEJQ101M6R3
C 133		CKSQYB225K10
C 141		CKSRYB105K10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CEJQNP4R7M16
C 146		CKSRYB105K10
C 147		CEJQNP4R7M16
C 148		CKSRYB105K10
C 149		CKSRYB104K16
C 150		CEJQNP100M10
C 152		CKSRYB474K10
C 155		CKSRYB105K10
C 161		CKSRYB183K25
C 162		CKSRYB183K25
C 245		CKSQYB225K10
C 246		CKSQYB225K10
C 247		CKSQYB225K10
C 248		CKSQYB225K10
C 249	470µF/10V	CCH1438
C 251		CEJQ220M25
C 252		CKSRYF105Z10
C 253		CKSQYB225K10
C 254		CKSRYF105Z10
C 256		CCSRCH101J50
C 258		CEJQ101M6R3
C 259		CEJQ221M6R3
C 260		CCSRCH101J50
C 263		CEJQ470M10
C 266		CKSQYB225K10
C 271		CEJQ4R7M35
C 272		CEJQ101M16
C 273		CASAQ3R3M16
C 274		CEJQ100M16
C 275		CKSYB684K16
C 276		CASA220M16
C 277		CKSRYF105Z10
C 278		CEJQ330M25
C 279		CEJQ330M25
C 280		CEJQ330M25
C 281		CEJQ330M25
C 283		CKSRYB105K10
C 284		CKSRYB105K10
C 285		CKSRYB105K10
C 286		CKSRYB105K10
C 287		CKSRYB105K10
C 288		CKSRYB105K10
C 301		CKSRYB474K10
C 302		CKSRYB474K10

Circuit Symbol and No.	Part Name	Part No.
C 303		CKSRYB474K10
C 304		CKSRYB474K10
C 306		CEJQ330M10
C 307	3300µF/16V	CCH1433
C 308		CKSRYB104K16
C 309		CEJQ100M16
C 310		CKSQYB225K10
C 311		CKSRYB474K10
C 312		CKSRYB474K10
C 313		CKSRYB474K10
C 314		CKSRYB474K10
C 315		CKSQYB225K10
C 351		CEJQ100M50
C 352		CEJQ100M50
C 353		CEJQ100M50
C 354		CEJQ100M50
C 355		CEJQ100M50
C 356		CEJQ100M50
C 357		CKSRYB222K50
C 358		CKSRYB222K50
C 359		CKSRYB222K50
C 360		CKSRYB222K50
C 361		CKSRYB222K50
C 362		CKSRYB222K50
C 403		CKSRYB473K50
C 404		CEJQ101M10
C 405		CKSRYB103K50
C 406		CEJQ220M10
C 408		CKSRYB223K50
C 409		CKSRYB223K50
C 411		CKSRYB472K50
C 513		CCSRCH101J50
C 591		CKSRYB103K50
C 593		CEJQ100M16
C 594		CKSRYB103K50
C 601		CCSRCH200J50
C 602		CCSRCH180J50
C 603		CKSRYB104K16
C 605		CEJQ4R7M35
C 606		CKSQYB225K10
C 701		CCSRCH101J50
C 702		CCSRCH101J50
C 703		CCSRCH101J50
C 705		CCSRCH101J50
C 706	470µF/10V	CCH1438
C 721		CKSRYB473K50
C 722		CKSRYB102K50
C 723	100µF/10V	CCH1450
C 751		CKSRYB472K50
C 752		CEAL470M10
C 805		CEJQ101M16
C 806		CKSRYB473K50
C 808		CKSRYB104K16
C 809		CKSRYB104K16
C 810		CEV470M6R3
C 812		CKSRYB103K50
C 815		CCSRCH101J50
C 816		CCSRCH101J50
C 818		CEJQ330M16
C 819		CCSRCH101J50

Circuit Symbol and No.	Part Name	Part No.
C 821		CCSRCH101J50
C 830		CKSRYB104K16
C 833		CCSRCH102J50
C 842		CEV470M6R3
C 843		CKSRYB104K16
C 844		CKSRYB104K16
C 851		CKSRYB224K10
C 852		CKSRYB104K16
C 853		CASAQ4R7M10
C 855		CKSRYB102K50
C 856		CCSRCH101J50
C 857		CCSRCH101J50
C 911	470µF/16V	CCH1331
C 912		CKSRYB472K50
C 913		CKSRYB103K50
C 914		CEAL470M10
C 915	470µF/16V	CCH1331
C 921		CEAT331M10
C 922		CKSRYB103K50
C 923		CEV101M16
C 931		CKSRYB105K10
C 932		CKSRYB104K25
C 962		CKSRYB104K16
C 963		CKSRYB105K10

F Unit Number:CWX2619
Unit Name:CD Core Unit(S9MP3)

MISCELLANEOUS

IC 201	IC	UPD63760GJ
IC 202	IC	MSM51V4265EP-70TS
IC 203	IC	BA033SFP
IC 301	IC	BA5996FM
IC 501	IC	UPD61002GC
IC 502	IC	BA25BC0WFP
IC 701	IC	PE5269A
IC 702	IC	TC74VHCT08AFT
IC 703	IC	S-818A33AUC-BGN
IC 704	IC	PD9023A
Q 101	Transistor	2SB1132
Q 601	Transistor	DTC323TK
Q 602	Transistor	DTC323TK
Q 603	Transistor	2SB709A
Q 701	Transistor	UN2111
D 101	Diode	1SS355
D 201	Diode	1SR154-400
D 202	Diode	1SR154-400
D 203	Diode	1SR154-400
D 501	Diode	1SR154-400
D 502	Diode	1SR154-400
D 503	Diode	1SR154-400
D 504	Diode	1SR154-400
D 601	Chip Diode	MA151WA
L 201	Inductor	CTF1546
L 202	Inductor	CTF1546
L 204	Inductor	CTF1546
L 701	Inductor	CTF1546
L 702	Inductor	LCYBR22J1608
L 901	Inductor	CTF1306

Circuit Symbol and No.	Part Name	Part No.
L 902	Inductor	CTF1306
L 903	Inductor	CTF1306
X 202	Ceramic Resonator 24.57MHz	CSS1570
X 701	Ceramic Resonator 16.00MHz	CSS1576
S 901	Spring Switch(HOME)	CSN1051
S 902	Spring Switch(CLAMP)	CSN1052
S 903	Spring Switch(DSCSNS)	CSN1051
S 904	Spring Switch(12EJ)	CSN1052
S 905	Spring Switch(8EJ)	CSN1051

RESISTORS

Circuit Symbol and No.	Part No.
R 101	RS1/10S1R5J
R 102	RS1/10S1R5J
R 103	RS1/10S1R5J
R 104	RS1/10S1R5J
R 105	RS1/10S1R5J
R 201	RS1/16SS102J
R 202	RS1/16SS333J
R 203	RS1/16SS333J
R 204	RS1/16SS333J
R 206	RS1/16SS221J
R 208	RS1/16SS221J
R 210	RS1/16SS221J
R 212	RS1/16SS221J
R 213	RS1/16SS1002D
R 214	RS1/16SS1002D
R 215	RS1/16SS1002D
R 216	RS1/16SS1002D
R 217	RS1/16SS1002D
R 218	RS1/16SS1002D
R 219	RS1/16SS1002D
R 220	RS1/16SS1002D
R 221	RS1/16SS103J
R 222	RS1/16SS103J
R 223	RS1/16SS103J
R 224	RS1/16SS103J
R 225	RS1/16SS103J
R 226	RS1/16SS393J
R 227	RS1/16SS103J
R 228	RS1/16SS182J
R 229	RS1/16SS103J
R 231	RS1/16SS0R0J
R 233	RS1/16SS183J
R 237	RS1/16SS104J
R 238	RS1/16SS0R0J
R 239	RS1/16SS473J
R 301	RS1/16SS183J
R 302	RS1/16SS822J
R 303	RS1/16SS0R0J
R 304	RS1/16SS183J
R 305	RS1/16SS822J
R 306	RS1/16SS0R0J
R 307	RS1/16SS183J
R 308	RS1/16SS822J
R 309	RS1/16SS183J
R 310	RS1/16SS822J
R 311	RS1/16SS0R0J
R 501	RS1/16SS221J
R 502	RS1/16SS221J
R 503	RS1/16SS221J

Circuit Symbol and No.	Part No.
R 504	RAB4CQ223J
R 505	RAB4CQ223J
R 506	RAB4CQ223J
R 507	RS1/16SS223J
R 508	RS1/16SS223J
R 509	RS1/16SS102J
R 510	RS1/16SS223J
R 511	RS1/16SS223J
R 512	RS1/16SS223J
R 513	RS1/16SS221J
R 601	RS1/16S101J
R 602	RS1/16S101J
R 603	RS1/16S223J
R 604	RS1/16S223J
R 605	RS1/16SS103J
R 701	RS1/16SS0R0J
R 707	RS1/16SS0R0J
R 708	RS1/16SS102J
R 709	RS1/16SS102J
R 710	RS1/16SS102J
R 711	RS1/16SS102J
R 712	RS1/16SS102J
R 713	RS1/16SS102J
R 714	RS1/16SS473J
R 715	RAB4CQ221J
R 716	RAB4CQ221J
R 717	RAB4CQ221J
R 718	RAB4CQ221J
R 719	RAB4CQ221J
R 720	RS1/16SS471J
R 721	RS1/16SS471J
R 722	RAB4CQ221J
R 723	RS1/16SS102J
R 724	RN1/16SE1302D
R 725	RS1/16SS473J
R 726	RS1/16SS103J
R 727	RS1/16SS473J
R 728	RS1/16SS473J
R 729	RS1/16SS223J
R 730	RS1/16SS473J
R 731	RS1/16SS104J
R 732	RS1/16SS104J
R 733	RS1/16SS104J
R 734	RS1/16SS472J
R 735	RS1/16SS473J
R 737	RAB4CQ473J
R 739	RAB4CQ473J
R 740	RS1/16SS473J
R 741	RS1/16SS104J
R 743	RS1/16SS104J
R 745	RS1/16SS473J
R 746	RS1/16SS104J
R 747	RS1/16SS104J
R 748	RS1/16SS102J
R 749	RS1/16SS102J
R 750	RS1/16SS104J
R 752	RS1/16SS473J
R 801	RS1/16SS104J
R 802	RS1/16SS473J
R 803	RS1/16SS273J

Circuit Symbol and No.	Part Name	Part No.
R 901		RS1/16SS221J
R 902		RS1/16SS221J
R 903		RS1/16SS221J
R 904		RS1/16SS221J
R 905		RS1/16SS221J
R 906		RS1/16SS221J
R 908		RS1/16SS221J
R 909		RS1/16SS221J

CAPACITORS

C 101		CKSSYB104K10
C 102		CKSSYB104K10
C 103		CEV101M16
C 104		CEV101M4
C 105		CKSSYB104K10
C 106		CKSRYB102K50
C 108		CKSSYB104K10
C 109		CEV100M16
C 201		CKSSYB471K50
C 202		CKSSYB104K10
C 203		CKSSYB104K10
C 204		CEV220M6R3
C 205		CKSSYB103K16
C 206		CKSSYB103K16
C 207		CEV221M4
C 208		CKSSYB104K10
C 209		CKSSYB104K10
C 210		CKSSYB104K10
C 211		CKSSYB104K10
C 216		CKSSYB332K50
C 217		CKSSYB104K10
C 218		CKSSYB223K16
C 219		CKSSYB104K10
C 220		CKSSYB103K16
C 221		CKSSYB104K10
C 222		CCSSCH270J50
C 223		CCSSCJ3R0C50
C 224		CKSSYB104K10
C 225		CKSSYB103K16
C 226		CCSSCH680J50
C 227		CCSSCH470J50
C 228		CKSSYB682K25
C 230		CKSSYB104K10
C 231		CKSSYB221K50
C 232		CKSSYB104K10
C 233	47µF/6.3V	CCH1436
C 234		CEV221M4
C 235		CKSRYB224K16
C 237		CKSSYB104K10
C 238		CKSSYB104K10
C 240		CCSSCH100D50
C 301		CKSSYB331K50
C 302		CKSSYB331K50
C 303		CKSSYB472K25
C 304		CKSSYB472K25
C 305		CEV101M16
C 306		CKSRYB224K16
C 501		CKSSYB104K10
C 502		CKSSYB471K50
C 503		CKSSYB104K10
C 504	47µF/6.3V	CCH1436
C 505		CKSRYB224K16
C 506		CKSSYB104K10
C 508		CKSSYB104K10
C 509		CKSSYB104K10
C 510		CKSSYB104K10
C 511		CKSSYB104K10
C 601		CCSRCH102J50
C 602		CCSRCH102J50
C 603		CSZS4R7M10
C 604		CSZS4R7M10
C 701		CKSSYB104K10
C 702		CKSSYB471K50
C 703		CKSSYB103K16
C 704		CEV1R0M50
C 705		CKSSYB104K10
C 706		CKSSYB471K50
C 707		CKSSYB104K10
C 708		CKSSYB104K10
C 709		CKSSYB103K16
C 710		CKSSYB104K10
C 711	10µF/10V	CCH1349
C 712		CKSRYB224K16
C 713		CKSSYB104K10
C 714		CKSSYB104K10
C 715		CKSSYB103K16
C 716		CKSSYB103K16
C 901		CKSSYB104K10
C 903		CCSRCH101J50

B Unit Number:CWM8229
Unit Name:DSP Unit

MISCELLANEOUS

IC 1501	IC	PD5762A
IC 1502	IC	PDG267A
IC 1503	IC	TC7S08FU
IC 1504	IC	TC74VHC126FT
IC 1601	IC	PML011A
IC 1602	IC	NJM4558MD
IC 1603	IC	NJM4558MD
IC 1604	IC	NJM4558MD
IC 1605	IC	NJM4558MD
Q 1601	Transistor	DTC124EU
L 1501	Inductor	CTF1379
L 1531	Inductor	CTF1379
L 1532	Inductor	CTF1379
L 1533	Inductor	CTF1379
L 1534	Inductor	CTF1379
L 1535	Inductor	CTF1379
L 1536	Inductor	CTF1379
L 1537	Inductor	CTF1379
L 1538	Inductor	CTF1379
L 1539	Inductor	CTF1379
L 1541	Inductor	LCTA151J3225
L 1571	Inductor	CTF1389
L 1572	Inductor	CTF1379
L 1573	Inductor	CTF1409
L 1574	Inductor	CTF1379

Circuit Symbol and No.	Part Name	Part No.
X 1501	Radiator 10.00MHz	CSS1428
X 1502	Radiator 16.9344MHz	CSS1463

RESISTORS

R 1501	RS1/16S473J
R 1504	RAB4C681J
R 1505	RS1/16S102J
R 1506	RS1/16S102J
R 1507	RS1/16S105J
R 1508	RS1/16S102J
R 1510	RS1/16S471J
R 1511	RS1/16S102J
R 1512	RAB4C473J
R 1513	RS1/16S222J
R 1514	RAB4C681J
R 1515	RS1/16S104J
R 1516	RAB4C471J
R 1517	RS1/16S473J
R 1518	RS1/16S102J
R 1519	RS1/16S473J
R 1520	RS1/16S102J
R 1521	RS1/16S222J
R 1522	RS1/16S222J
R 1523	RS1/16S104J
R 1524	RS1/16S102J
R 1525	RS1/16S102J
R 1526	RS1/16S102J
R 1527	RS1/16S221J
R 1528	RS1/16S102J
R 1530	RS1/16S473J
R 1531	RS1/16S225J
R 1532	RS1/16S331J
R 1533	RS1/16S155J
R 1534	RAB4C221J
R 1535	RS1/16S221J
R 1536	RS1/16S221J
R 1539	RS1/16S473J
R 1571	RS1/16S221J
R 1572	RS1/16S473J
R 1573	RS1/16S473J
R 1574	RS1/16S473J
R 1575	RS1/16S473J
R 1576	RS1/16S102J
R 1577	RS1/16S102J
R 1578	RS1/16S102J
R 1579	RS1/16S0R0J
R 1581	RS1/16S0R0J
R 1603	RS1/16S103J
R 1606	RS1/16S103J
R 1607	RS1/16S153J
R 1608	RS1/16S682J
R 1609	RAB4C0R0J
R 1610	RS1/16S0R0J
R 1611	RS1/16S0R0J
R 1621	RS1/16S223J
R 1622	RS1/16S472J
R 1623	RS1/16S223J
R 1624	RS1/16S472J
R 1625	RS1/16S103J

Circuit Symbol and No.	Part Name	Part No.
R 1626		RS1/16S103J
R 1627		RS1/16S103J
R 1628		RS1/16S103J
R 1629		RS1/16S474J
R 1630		RS1/16S474J
R 1631		RS1/16S474J
R 1632		RS1/16S222J
R 1633		RS1/16S333J
R 1634		RS1/16S273J
R 1635		RS1/16S183J
R 1636		RS1/16S273J
R 1637		RS1/16S474J
R 1638		RS1/16S222J
R 1639		RS1/16S333J
R 1640		RS1/16S273J
R 1641		RS1/16S183J
R 1642		RS1/16S273J
R 1643		RS1/16S474J
R 1644		RS1/16S222J
R 1645		RS1/16S333J
R 1646		RS1/16S273J
R 1647		RS1/16S183J
R 1648		RS1/16S273J
R 1649		RS1/16S474J
R 1650		RS1/16S222J
R 1651		RS1/16S333J
R 1652		RS1/16S273J
R 1653		RS1/16S183J
R 1654		RS1/16S273J
R 1655		RS1/16S474J
R 1656		RS1/16S222J
R 1657		RS1/16S333J
R 1658		RS1/16S273J
R 1659		RS1/16S183J
R 1660		RS1/16S273J
R 1661		RS1/16S474J
R 1662		RS1/16S222J
R 1663		RS1/16S333J
R 1664		RS1/16S273J
R 1665		RS1/16S183J
R 1666		RS1/16S273J
R 1667		RS1/16S472J
R 1668		RS1/16S104J
R 1669		RS1/16S102J
R 1670		RS1/16S473J
R 1671		RS1/16S0R0J
R 1672		RS1/16S102J
R 1673		RS1/16S473J

CAPACITORS

C 1532	CKSRYB102K50
C 1533	CSZSQ4R7M10
C 1534	CKSRYB104K16
C 1535	CKSQYB225K10
C 1537	CKSQYB225K10
C 1539	CKSRYB105K10
C 1540	CKSRYB105K10
C 1541	CKSRYB105K10
C 1542	CKSRYB105K10
C 1543	CKSRYB105K10

Circuit Symbol and No.	Part Name	Part No.
C 1544		CKSRYB105K10
C 1545		CKSRYB104K16
C 1546		CKSRYB104K16
C 1547		CKSRYB104K16
C 1548		CKSRYB104K16
C 1549		CKSRYB104K16
C 1550		CKSRYB104K16
C 1551		CKSRYB104K16
C 1552		CKSRYB104K16
C 1553		CKSRYB104K16
C 1554		CKSRYB104K16
C 1555		CKSRYB104K16
C 1556		CCSRCH180J50
C 1557		CCSRCH180J50
C 1558		CSZSQ4R7M10
C 1560		CKSRYB104K16
C 1561		CKSRYB104K16
C 1562		CSZSQ4R7M10
C 1563		CKSRYB104K16
C 1564		CKSRYB104K16
C 1571		CKSRYB103K25
C 1572		CCSRCH220J50
C 1573		CCSRCH220J50
C 1574		CKSRYB103K50
C 1575		CCSRCH101J50
C 1601		CKSRYB104K16
C 1602		CSZSR100M10
C 1603		CKSRYB105K10
C 1604		CKSRYB105K10
C 1611		CKSRYF105Z10
C 1612		CKSRYF105Z10
C 1613		CKSQYB225K10
C 1614		CKSRYB104K16
C 1616		CKSRYB472K50
C 1617		CKSRYB472K50
C 1618		CSZSR100M10
C 1619		CKSRYF105Z10
C 1621		CKSRYB102K50
C 1622		CCSRCH221J50
C 1623		CKSRYB102K50
C 1624		CCSRCH221J50
C 1625		CKSRYB105K10
C 1626		CKSRYB105K10
C 1627		CKSYB475K10
C 1628		CSZSR100M16
C 1629		CSZSR100M16
C 1631		CCSRCH221J50
C 1632		CCSRCH151J50
C 1633		CCSRCH151J50
C 1634		CKSQYB225K10
C 1635		CCSRCH221J50
C 1636		CCSRCH151J50
C 1637		CCSRCH151J50
C 1638		CKSQYB225K10
C 1639		CKSQYB225K10
C 1640		CKSQYB225K10
C 1641		CCSRCH221J50
C 1642		CCSRCH151J50
C 1643		CCSRCH151J50
C 1644		CKSQYB225K10

Circuit Symbol and No.	Part Name	Part No.
C 1645		CCSRCH221J50
C 1646		CCSRCH151J50
C 1647		CCSRCH151J50
C 1648		CKSQYB225K10
C 1649		CKSQYB225K10
C 1650		CKSQYB225K10
C 1651		CCSRCH221J50
C 1652		CCSRCH151J50
C 1653		CCSRCH151J50
C 1654		CKSQYB225K10
C 1655		CCSRCH221J50
C 1656		CCSRCH151J50
C 1657		CCSRCH151J50
C 1658		CKSQYB225K10
C 1659		CKSQYB225K10
C 1660		CKSQYB225K10

C Unit Number:CWM8231
Unit Name:Keyboard Unit

MISCELLANEOUS

IC 1901	HIC Module	RS-140
IC 1902	IC	PD5758A
IC 1903	IC	S-80826ANUP-EDP
IC 1905	IC	PD8093A
IC 1906	IC	PD6380A
IC 1907	IC	PD3430A
IC 1908	IC	TC7S08FU
IC 1909	IC	TC7SET08FU
Q 1901	Transistor	IMD2A
Q 1902	Transistor	IMD2A
Q 1903	Transistor	2SC4154-11
D 1901	Diode	DAP202U
D 1902	Diode	DAN202U
D 1905	Diode	MA110
D 1906	Diode	DAN202U
D 1907	Diode	UDZS13(B)
D 1909	LED	CL190UBX
D 1910	LED	CL190UBX
D 1911	LED	CL190UBX
D 1912	LED	CL190UBX
D 1913	LED	CL190UBX
D 1914	LED	CL190UBX
D 1915	LED	CL190UBX
D 1916	LED	CL190UBX
D 1917	LED	CL190UBX
D 1919	LED	CL190UBX
L 1901	Inductor	CTF1295
L 1902	Inductor	CTF1484
L 1903	Inductor	LCYC4R7K1608
L 1904	Inductor	LCTC2R2K2125
L 1905	Inductor	LCTC2R2K2125
L 1906	Inductor	LCTC2R2K2125
L 1907	Inductor-Array	CTF1421
L 1908	Inductor-Array	CTF1421
L 1909	Inductor-Array	CTF1421
L 1910	Inductor-Array	CTF1421
L 1911	Inductor	LCTC2R2K2125
L 1912	Inductor	CTF1530

Circuit Symbol and No.	Part Name	Part No.
L 1913	Inductor-Array	CTF1421
L 1914	Inductor-Array	CTF1421
L 1915	Inductor-Array	CTF1421
L 1916	Inductor-Array	CTF1421
L 1917	Inductor-Array	CTF1421
L 1918	Inductor-Array	CTF1421
L 1919	Inductor-Array	CTF1421
L 1920	Inductor-Array	CTF1421
L 1922	Inductor	CTF1409
L 1923	Inductor	CTF1379
L 1924	Inductor	CTF1379
L 1925	Inductor	CTF1295
L 1926	Inductor	CTF1295
L 1927	Inductor	CTF1295
L 1929	Inductor	CTF1388
L 1930	Inductor	CTF1295
X 1901	Ceramic Resonator 20MHz	CSS1491
S 1901	Push Switch	CSG1111
S 1902	Push Switch	CSG1111
S 1903	Push Switch	CSG1111
S 1904	Push Switch	CSG1111
S 1905	Push Switch	CSG1111
S 1906	Push Switch	CSG1111
S 1907	Push Switch	CSG1111
S 1908	Push Switch	CSG1111
S 1909	Push Switch	CSG1111
S 1910	Push Switch	CSG1111
S 1911	Push Switch	CSG1111
S 1912	Push Switch	CSG1111
S 1913	Push Switch	CSG1111
S 1914	Push Switch	CSG1111
S 1916	Push Switch	CSG1111
S 1917	Push Switch	CSG1111
S 1918	Encoder(VOLUME)	CSD1086

RESISTORS

R 1901		RS1/16S222J
R 1902		RS1/16S222J
R 1905		RS1/16S103J
R 1906		RS1/16S121J
R 1907		RS1/16S2R2J
R 1908		RS1/16S222J
R 1909		RS1/16S184J
R 1913		RAB4C102J
R 1915		RS1/16S473J
R 1916		RS1/16S102J
R 1917		RS1/16S104J
R 1918		RS1/16S0R0J
R 1919		RS1/16S101J
R 1920		RS1/16S101J
R 1923		RS1/16S101J
R 1924		RS1/16S473J
R 1925		RS1/16S101J
R 1927		RS1/16S101J
R 1933		RAB4C102J
R 1934		RAB4C473J
R 1936		RS1/16S473J
R 1937		RS1/16S473J
R 1938		RS1/16S473J
R 1939		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 1940		RS1/16S102J
R 1943		RS1/16S223J
R 1945		RS1/16S470J
R 1947		RS1/16S470J
R 1949		RS1/16S470J
R 1951		RS1/16S470J
R 1955		RS1/16S470J
R 1960		RS1/16S560J
R 1961		RS1/16S560J
R 1962		RS1/16S560J
R 1963		RS1/16S560J
R 1966		RS1/16S560J
R 1967		RS1/16S0R0J
R 1969		RS1/16S472J
R 1970		RS1/16S472J
R 1973		RS1/16S223J
R 1975		RS1/16S223J
R 1976		RS1/16S222J
R 1977		RS1/16S0R0J
R 1978		RS1/16S0R0J

CAPACITORS

C 1901		CSZSR100M16
C 1902		CKSRYB105K10
C 1904		CSZSR100M10
C 1906		CKSYB475K16
C 1908	10µF/16V	CCG1138
C 1909		CKSRYB105K10
C 1911		CKSRYB104K25
C 1915		CCSRCH102J50
C 1917		CSZSR100M10
C 1918		CKSRYB103K50
C 1920		CKSRYB224K16
C 1921		CSZSR1R0M35
C 1924		CCSRCH101J50
C 1925		CCSRCH102J50
C 1926	10µF/16V	CCG1138
C 1931		CCSRCH101J50
C 1932		CKSRYB104K16
C 1933		CKSRYB104K16
C 1934		CKSRYB104K16
C 1935		CKSRYB104K16
C 1936		CKSRYB104K16
C 1937		CKSRYB104K16
C 1938		CKSRYB104K16
C 1939		CKSRYB104K16
C 1940		CKSRYB104K16
C 1943		CKSRYB104K16
C 1949		CKSRYB104K16
C 1952		CCSRCH101J50
C 1953		CCSRCH101J50
C 1957		CCSRCH101J50
C 1963		CCSRCH101J50
C 1964		CKSRYB104K16
C 1965		CKSRYB104K25

E Unit Number:
Unit Name:Switch PCB

Circuit Symbol and No.	Part Name	Part No.
S 951	Switch(CLOSE)	CSN1012
S 952	Switch(OPEN)	CSN1022

Miscellaneous Parts List

	Pickup Unit(Service)(P9MP3)	CXX1550
M 1	Motor Unit(SPINDLE)	CXB6007
M 2	Motor Unit(LOADING/CARRIAGE)	CXB5903
	Fan Motor	CXM1194
M 951	Motor(AUTOMATIC FLAP)	CXM1085