
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on the product are used for disassembly.*

2.1 PACKING

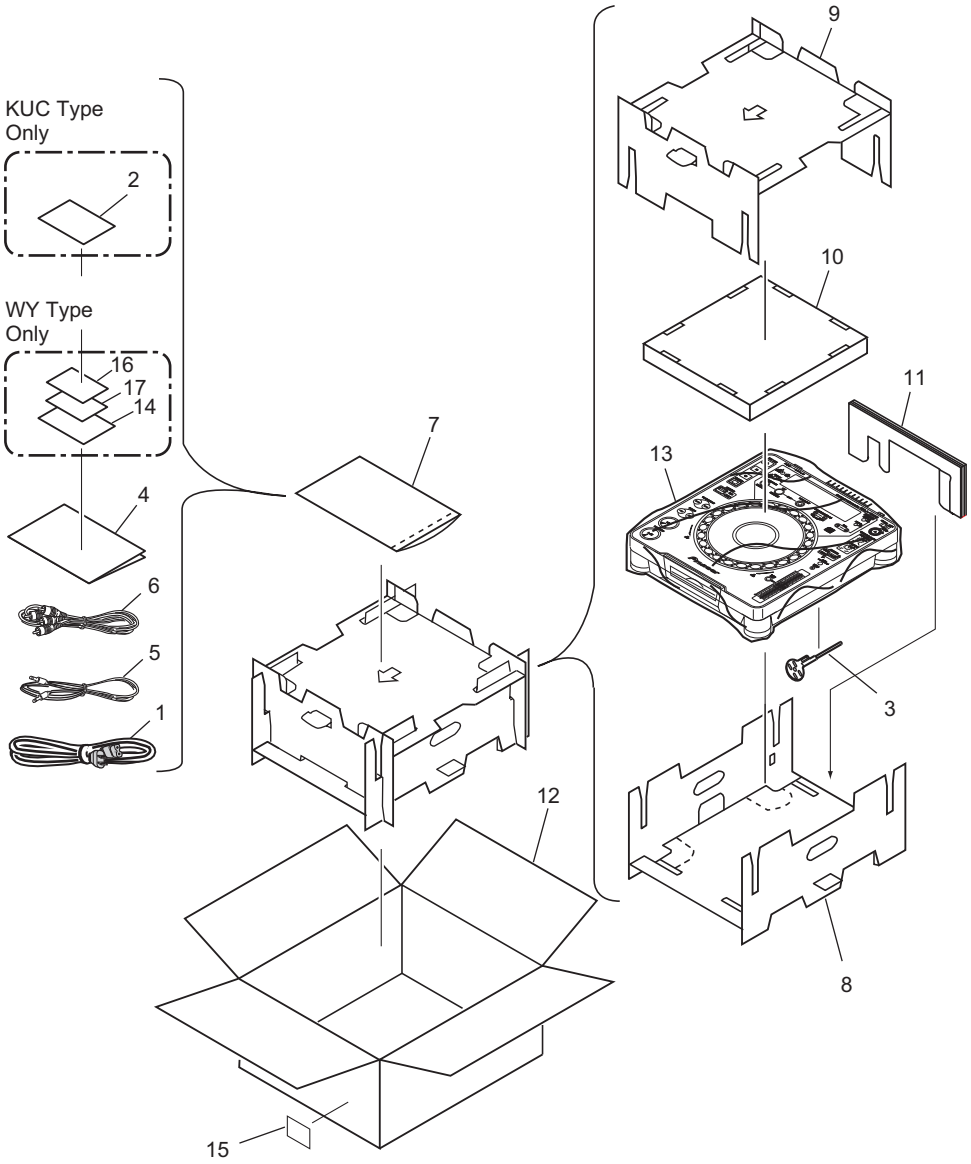

(1) PACKING PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power Cord	See Contrast table (2)
NSP	2	Warranty Card	See Contrast table (2)
	3	Forced Eject Pin	DEX1013
	4	Operating Instructions	See Contrast table (2)
	5	Control Cord (L= 1m)	PDE1247
	6	Audio Cable (L = 1.5m)	VDE1033
NSP	7	Polyethylene Bag (0.03 × 230 × 340)	Z21-038
	8	Pad (A)	DHA1518
	9	Pad (B)	DHA1519
	10	Pad (C)	DHA1523
	11	Pad (D)	DHA1524
	12	Packing Case	See Contrast table (2)
	13	Sheet	RHX1006
NSP	14	Mini Catalogue	See Contrast table (2)
NSP	15	Label	See Contrast table (2)
NSP	16	Pamphlet	See Contrast table (2)
NSP	17	MMC Catalog	See Contrast table (2)

(2) CONTRAST TABLE

CDJ-1000/KUC, TL and WY types are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.			Remarks
			KUC Type	TL Type	WY Type	
⚠	1	Power Cord	ADG7021	ADG1154	ADG1154	
NSP	2	Warranty Card	ARY7043	Not used	Not used	
	4	Operating Instructions (English)	DRB1297	Not used	Not used	
	4	Operating Instructions (English/ Spanish)	Not used	DRB1299	Not used	
	4	Operating Instructions (English/ French /German/ Italian/ Dutch/ Spanish)	Not used	Not used	DRB1298	
	12	Packing Case	DHG2145	DHG2146	DHG2129	
NSP	14	Mini Catalogue	Not used	Not used	DRY1194	
NSP	15	Label	VRW1629	Not used	Not used	
NSP	16	Pamphlet	Not used	Not used	DRY1188	
NSP	17	MMC Catalog	Not used	Not used	DRY1195	

2.2 EXTERIOR (1/2) SECTION

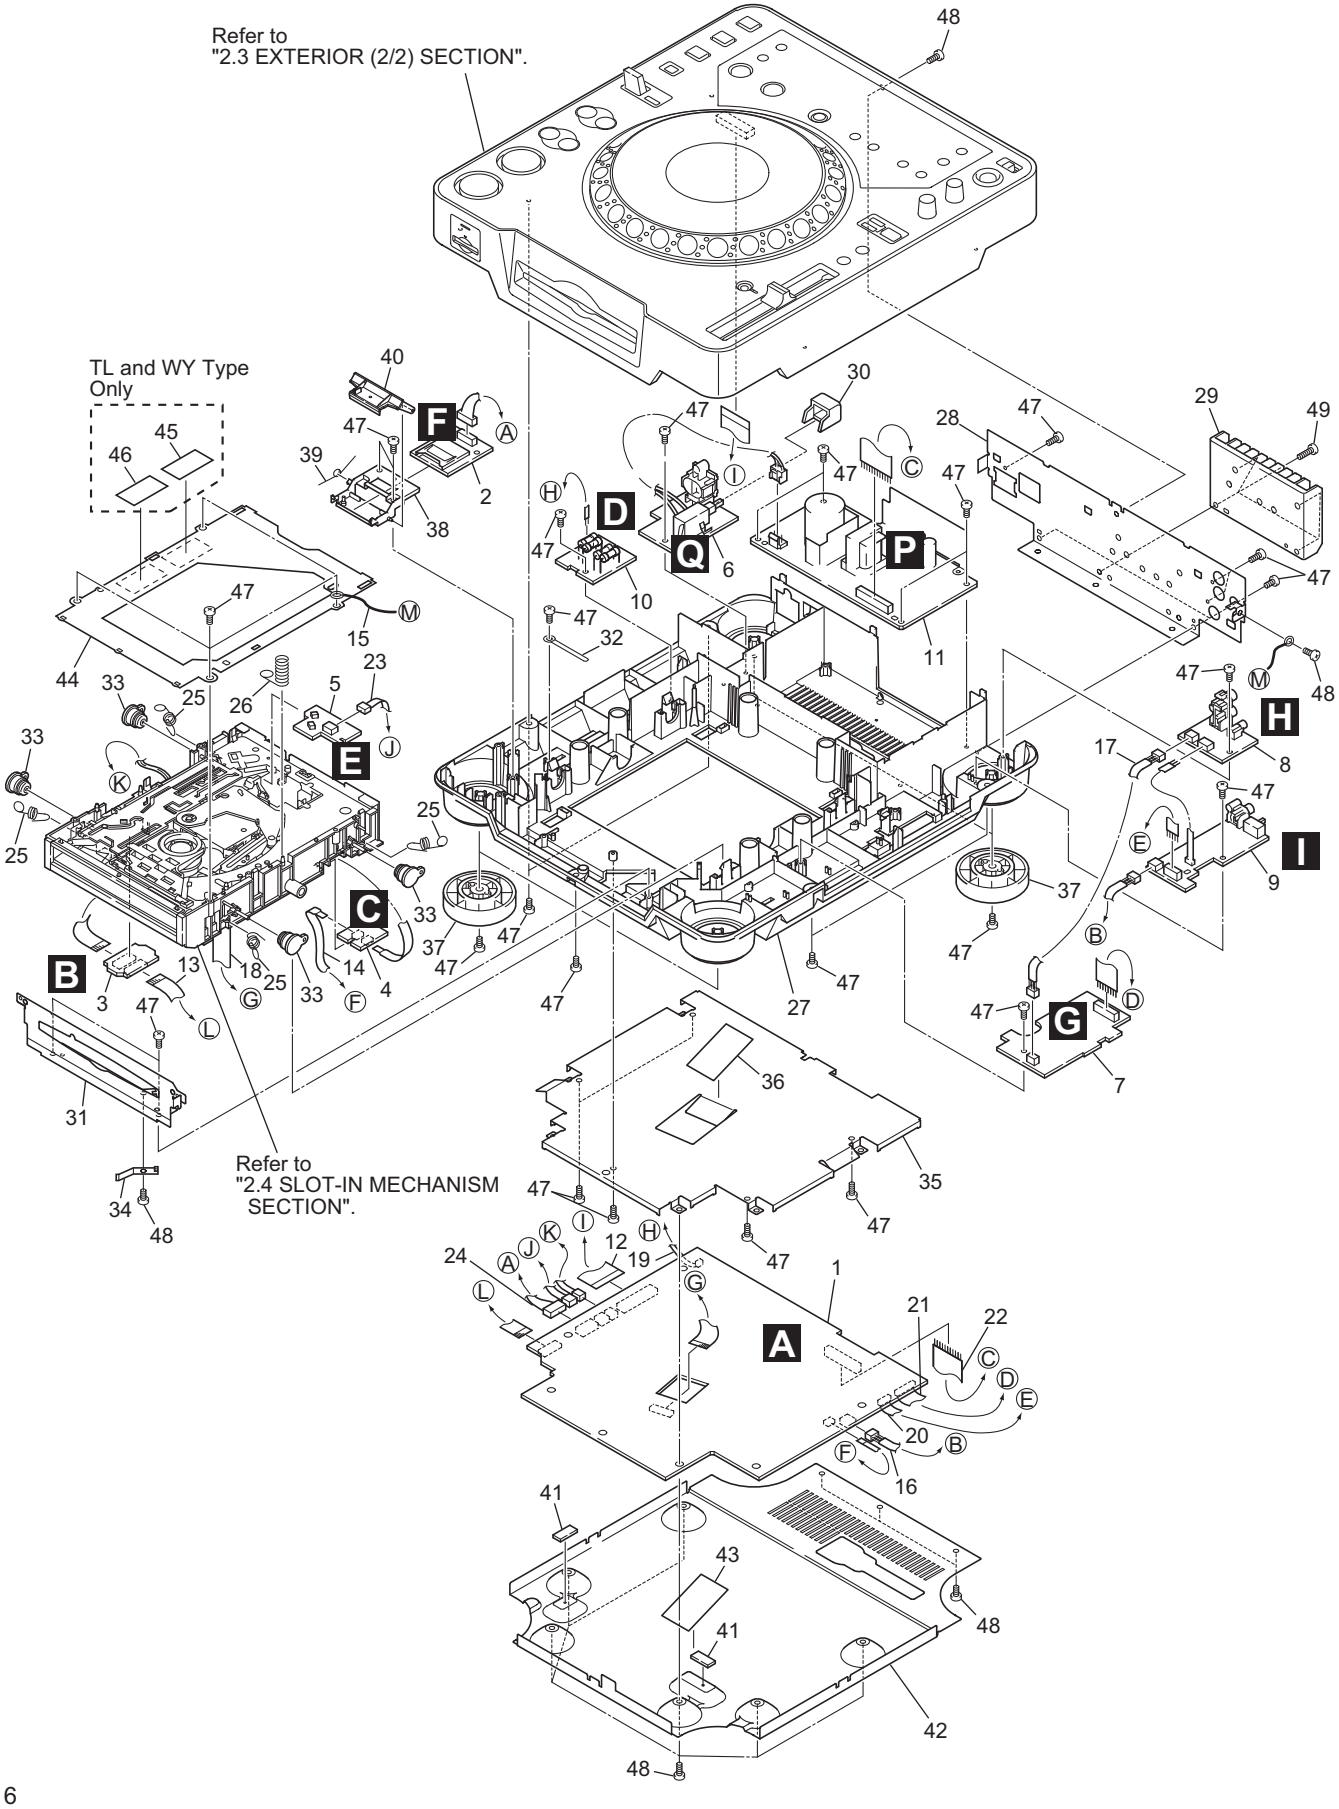

(1) EXTERIOR (1/2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	MAIN Assy	DWX2161
	2	MMCB Assy	DWX2169
	3	SPCN Assy	DWX2170
	4	STCN Assy	DWX2171
	5	SLMB Assy	DWX1309
	6	PSWB Assy	See Contrast table (2)
	7	DABB Assy	DWX2162
	8	JACB Assy	DWX2163
	9	DOUT Assy	DWX2164
	10	FLRB Assy	DWX2166
⚠	11	SW POWER SUPPLY Assy	DWR1344
	12	25P Flexible Cable/60V	DDD1189
	13	12P Flexible Cable/60V	DDD1190
	14	4P Flexible Cable/60V	DDD1191
	15	Earth Lead Unit/300V	DDF1015
	16	Connector Assy 3P	DKP3546
	17	Connector Assy 3P	DKP3548
	18	FPC D5 Slot	DNP1951
	19	Jumper Wire 03P	D20PYY0310E
	20	Jumper Wire 05P	D20PYY0510E
	21	Jumper Wire 09P	D20PYY0910E
	22	Jumper Wire 15P	D20PYY1510E
	23	Connector Assy	PF03PP-B30
	24	Connector Assy	PG07KK-F15
	25	Float Spring (G5)	DBH1485
	26	Earth Spring	DBH1398
	27	Chassis	DNK3869
NSP	28	Rear Panel	See Contrast table (2)
	29	Heat Sink	DNG1081
	30	Power Knob	DAC1895
	31	Front Plate	DNH2480
	32	Cord Clamper	RNH-184
	33	Damper	CNV6011
	34	Earth Plate (CU)	VBK1070
	35	Shield Case	DNH2481
	36	Shield Cushion	DEC2445
	37	Insulator Assy	DXA1904
	38	Memory Holder	DNK3884
	39	Flap Spring	DBH1487
	40	SD Flap	DNK3883
NSP	41	Silicone Rubber D5L	DEB1456
	42	Bottom Plate	DNH2479
	43	Bottom Cushion	DEC2444
	44	Mecha Plate	DNH2339
	45	Caution Label	See Contrast table (2)
NSP	46	Caution Label HE	See Contrast table (2)
	47	Screw	BPZ30P080FZK
	48	Screw	BBZ30P060FZK
	49	Screw	BBZ30P120FZK

(2) CONTRAST TABLE

CDJ-1000/KUC, TL and WY types are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.			Remarks
			KUC Type	TL Type	WY Type	
	6	PSWB Assy	DWS1312	DWS1311	DWS1311	
NSP	28	Rear Panel	DNC1576	DNC1577	DNC1567	
	45	Caution Label	Not used	VRW1094	VRW1094	
NSP	46	Caution Label HE	Not used	VRW1297	VRW1297	


2.3 EXTERIOR (2/2) SECTION

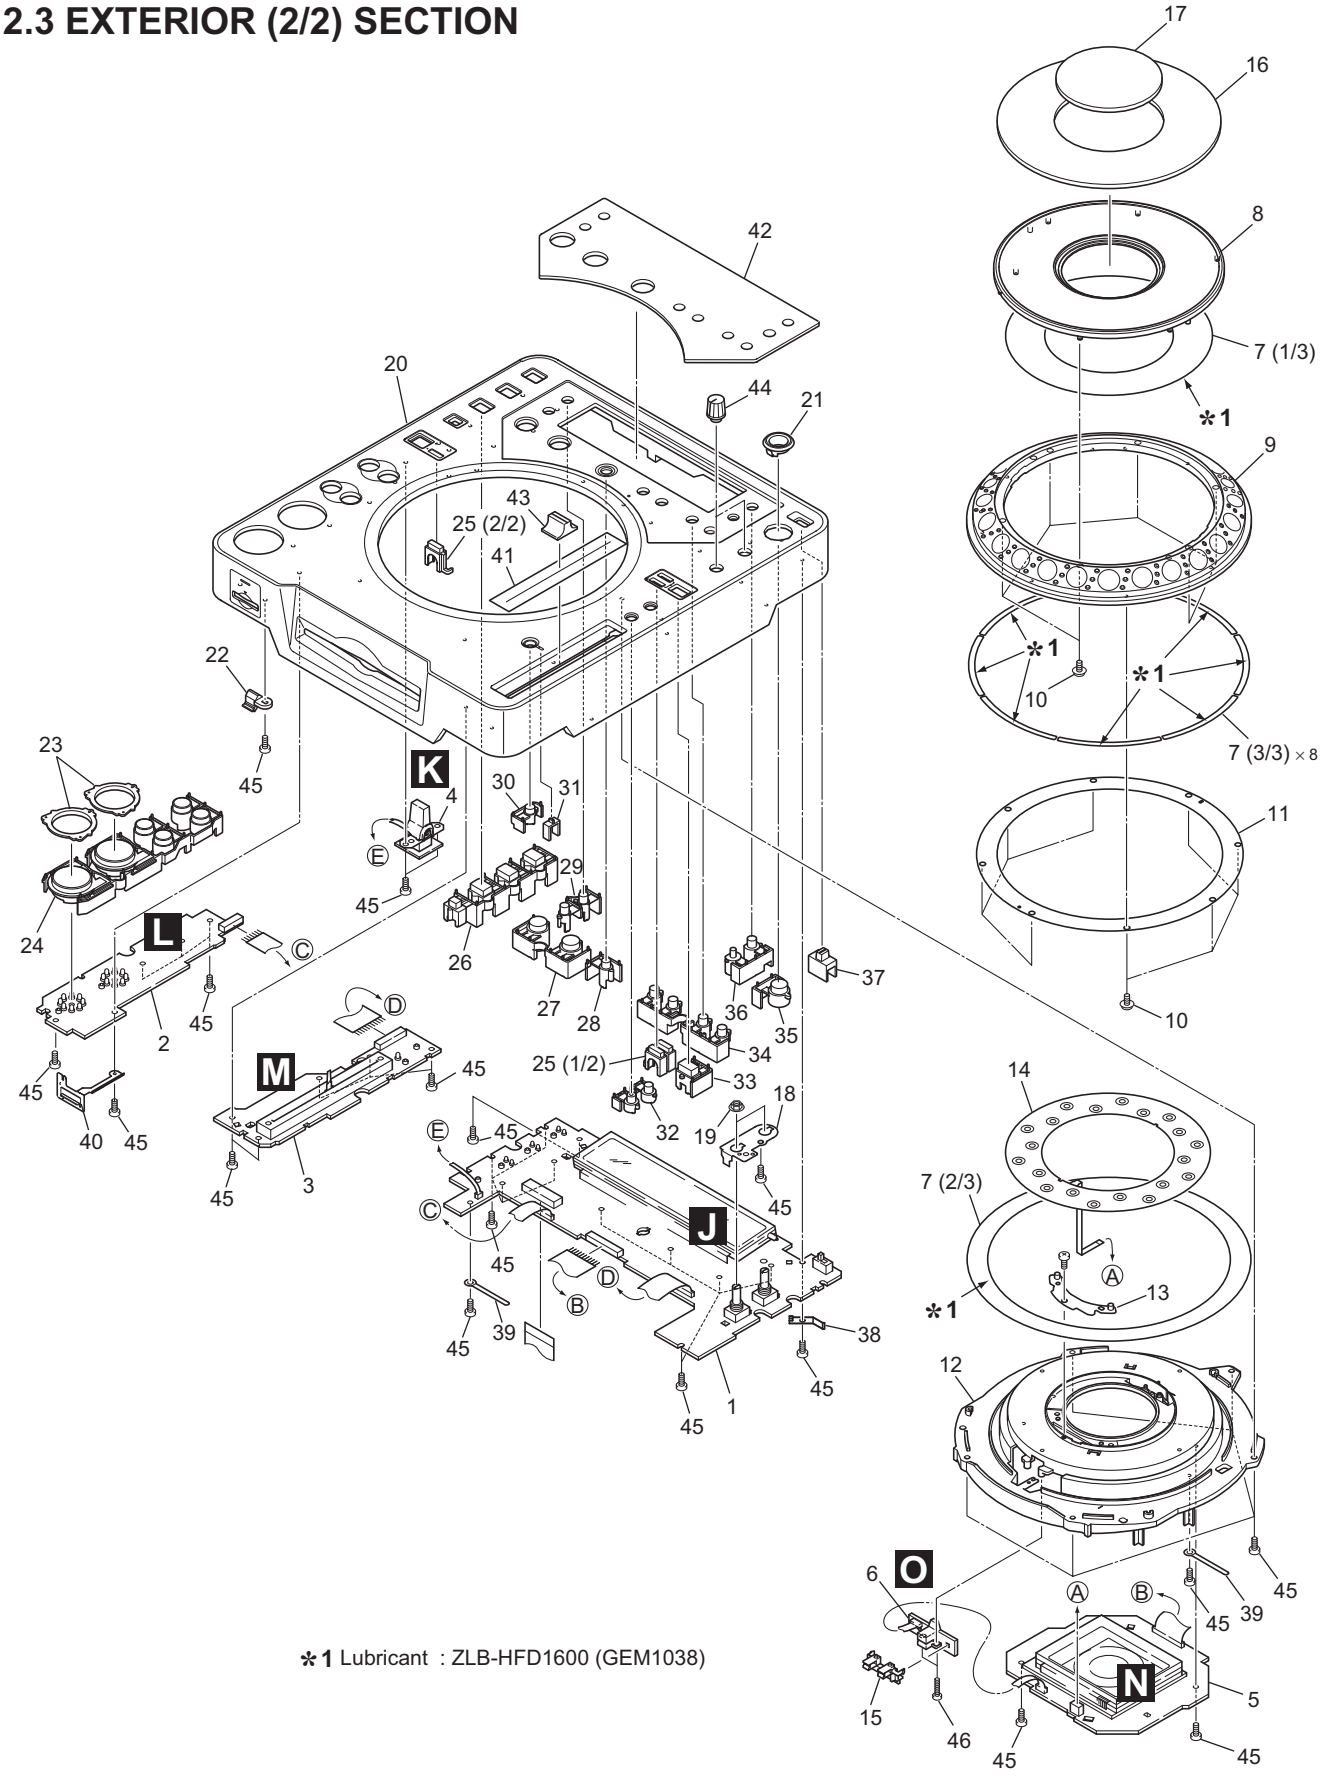


● EXTERIOR (2/2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MFLB Assy	DWG1548
	2	KSWB Assy	DWS1307
	3	SLDB Assy	DWS1308
	4	RSWB Assy	DWS1310
	5	JFLB Assy	DWG1549
	6	JOGB Assy	DWG1550
	7	JOG Sheet Assy	DXB1757
	8	JOG Dial A	DNK3870
	9	JOG Dial B	DNK3871
	10	Screw	PBA1062
	11	Encoder Plate	DEC2425
	12	JOG Holder	DNK3872
	13	JOG Stay Assy	DXB1760
	14	Sheet SW	DSX1057
	15	Encoder Guide	DNK3873
	16	JOG Plate	DAH2052
	17	JOG Panel	DAH2051
	18	VR Stay	DNF1663
	19	Flange Nut (M9)	DBN1004
	20	Control Panel	DNK3875
	21	Eject Guard	DNK3958
	22	Card Lens	DNK3885
	23	Ring Lens	DNK3880
	24	Set Knob (PLAY) Assy	DXB1750
	25	Mode Lens	DNK3881
	26	Set Knob (HS)	DAC1986
	27	Set Knob (LOOP)	DAC1995
	28	Re-loop Knob	DAC1992
	29	Set Knob (TIME)	DAC1991
	30	Tempo Reset Knob	DAC1993
	31	Tempo Lens	DNK3882
	32	Set Knob (MT)	DAC1987
	33	Mode Select Knob	DAC1989
	34	Set Knob (SC)	DAC1988
	35	Eject Knob	DAC1990
	36	Set Knob (MEMO)	DAC1994
	37	Slide SW Knob	DAC1926
	38	Earth Plate (CU)	VBK1070
NSP	39	Cord Clamper	Z09-061
	40	Card Plate	DBK1212
	41	Slide Sheet 1C	DAH1988
	42	Display Panel	DAH2022
	43	Slide Knob	DNK2936
	44	Rotary Knob C	DAA1143
	45	Screw	BPZ30P080FZK
	46	Screw	BPZ20P120FMC

2.4 SLOT-IN MECHANISM SECTION

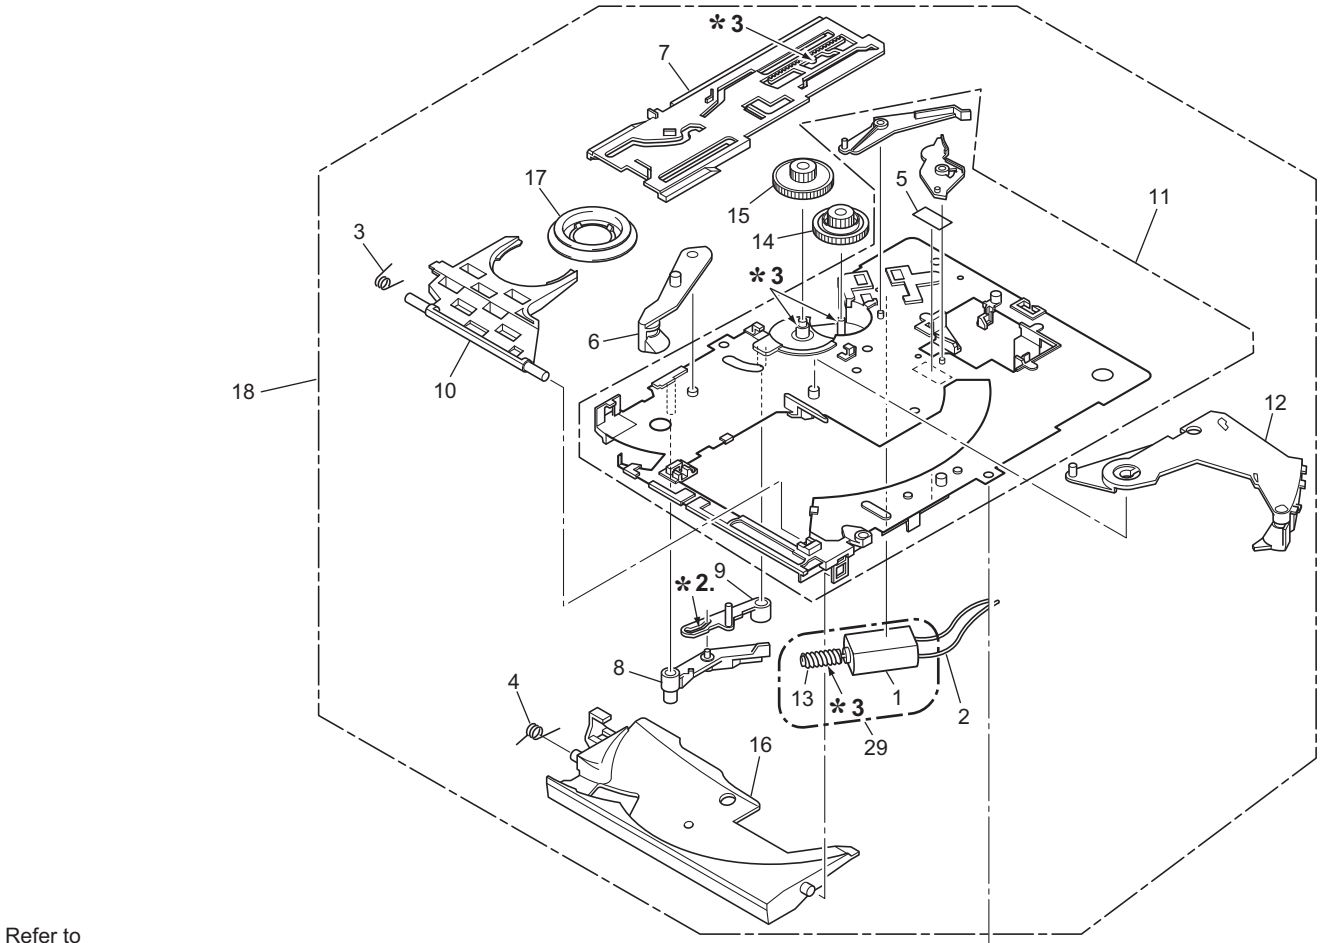

Refer to
"2.5 TRAVERSE MECHANISM ASSY-S".

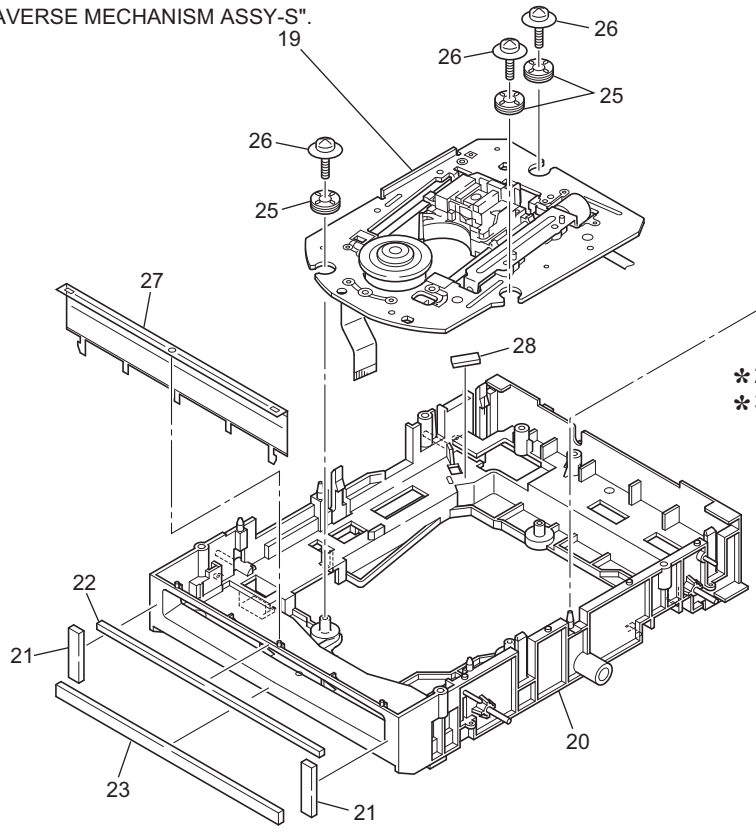


✻2. Dyefree : ME-913A (ZLX-ME413A)
✻3. Grease : ZLB-PN397B

● SLOT-IN MECHANISM SECTION PARTS LIST

Mark	No.	Description	Part No.
NSP	1	DC Motor	DXM1093
	2	Connector Assy	PF02PY-B32
	3	Clamp Spring	DBH1374
	4	Guide Spring	DBH1375
	5	SW Lever Spacer (PET)	DEC2420
	6	Loading Lever	DNK3406
	7	Main Cam	DNK3407
	8	Lever B	DNK3558
	9	Lever A	DNK3564
	10	Clamp Arm	DNK3576
	11	Loading Base Assy-S	DEA1022
	12	Eject Lever	DNK3684
NSP	13	Worm Gear	DNK3910
	14	Loading Gear	DNK3911
	15	Drive Gear	DNK3912
	16	Disc Guide	DNK3914
	17	Clamper D4 Assy	DXA1881
NSP	18	Slot-in Mechanism G5 Assy	DXA1906
	19	Traverse Mechanism Assy-S	DXX2502
	20	Float Base (G5) Assy	DXB1748
	21	Vessel Cushion C	DEC2424
	22	Vessel Cushion A	DEC2257
	23	Vessel Cushion B	DEC2258
	24	• • • • •	
	25	Float Rubber D3	DEB1404
	26	Float Fastener	DBA1139
	27	Front Sheet	DED1132
	28	Spacer POR (T3)	DEB1467
	29	Loading Motor Assy-S	DEA1008

2.5 TRAVERSE MECHANISM ASSY-S

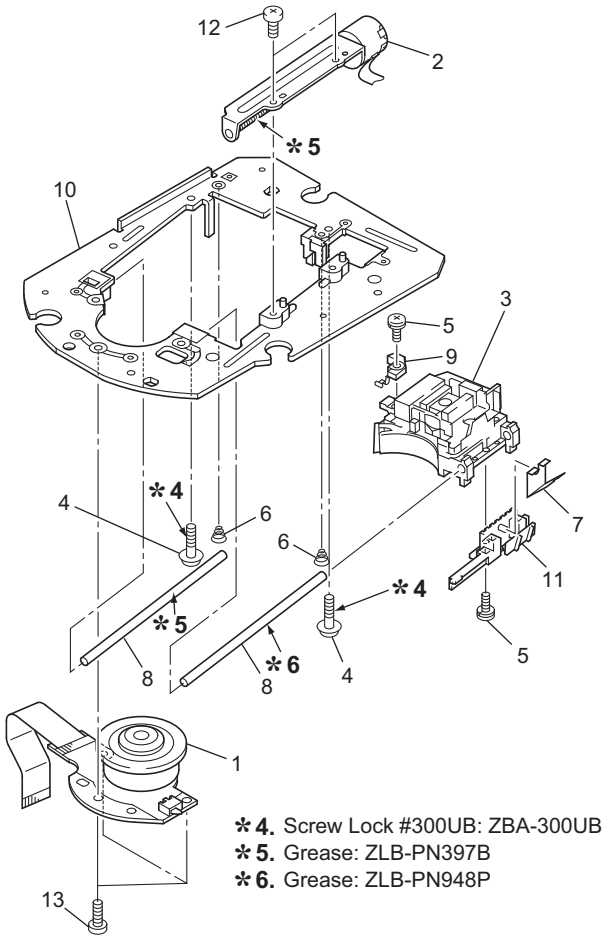

✻4. Screw Lock #300UB: ZBA-300UB
✻5. Grease: ZLB-PN397B
✻6. Grease: ZLB-PN948P

● TRAVERSE MECHANISM ASSY-S PARTS LIST

Mark	No.	Description	Part No.
NSP	1	Spindle Motor	DXM1138
NSP	2	Stepping Motor	DXM1142
NSP	3	Pickup Assy	VWY1069
NSP	4	Adjust Screw	DBA1119
NSP	5	Precision Screw	DBA1124
NSP	6	Skew Spring	DBH1437
NSP	7	Joint Spring	DBK1188
NSP	8	Guide Shaft	DLA1840
NSP	9	Slider G4	DNK3733
NSP	10	Mechanism Frame G5	DNK3776
NSP	11	Joint	DNK3777
	12	Screw	BPZ20P080FMC
	13	Screw	BPZ26P080FMC

5. PCB PARTS LIST

NOTES: ●*Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
●*The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
●*When ordering resistors, first convert resistance values into code form as shown in the following examples.*
Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).
560 Ω → 56 × 10¹ → 561 ..... RD1/4PU 5 6 1 J
47k Ω → 47 × 10³ → 473 ..... RD1/4PU 4 7 3 J
0.5 Ω → R50 ..... RN2H R 5 0 K
1 Ω → 1R0 ..... RS1P 1 R 0 K
Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).
5.62k Ω → 562 × 10¹ → 5621 ..... RN1/4PC 5 6 2 1 F

• LIST OF WHOLE PCB ASSEMBLIES

Mark	Symbol and Description	Part No.			Remarks
		CDJ-1000/ KUC	CDJ-1000/ TL	CDJ-1000/ WY	
NSP	MOTHER ASSY	DWM2123	DWM2123	DWM2123	
	├ MAIN ASSY	DWX2161	DWX2161	DWX2161	
	├ MMCB ASSY	DWX2169	DWX2169	DWX2169	
	├ SPCN ASSY	DWX2170	DWX2170	DWX2170	
	└ STCN ASSY	DWX2171	DWX2171	DWX2171	
NSP	DISP ASSY	DWM2126	DWM2124	DWM2124	
	├ MFLB ASSY	DWG1548	DWG1548	DWG1548	
	├ KSWB ASSY	DWS1307	DWS1307	DWS1307	
	├ SLDB ASSY	DWS1308	DWS1308	DWS1308	
	├ SLMB ASSY	DWS1309	DWS1309	DWS1309	
	├ RSWB ASSY	DWS1310	DWS1310	DWS1310	
	└ PSWB ASSY	DWS1312	DWS1311	DWS1311	∗1
NSP	SUB ASSY	DWM2125	DWM2125	DWM2125	
	├ JFLB ASSY	DWG1549	DWG1549	DWG1549	
	├ JOGB ASSY	DWG1550	DWG1550	DWG1550	
	├ DABB ASSY	DWX2162	DWX2162	DWX2162	
	├ JACB ASSY	DWX2163	DWX2163	DWX2163	
	├ DOUT ASSY	DWX2164	DWX2164	DWX2164	
	└ FLRB ASSY	DWX2166	DWX2166	DWX2166	
⚠	SW POWER SUPPLY ASSY	DWR1344	DWR1344	DWR1344	

∗1: For PSWB ASSY , Refer to " CONTRAST OF PCB ASSEMBLIES " and " PARTS LIST FOR CDJ-1000/KUC ".

• CONTRAST OF PCB ASSEMBLIES

P PSWB ASSY

DWS1312 and DWS1311 are constructed the same except for the following:

Mark	Symbol and Description	Part No.		Remarks
		DWS1312	DWS1311	
	AN 1 (AC SOCKET) AN 1 (1P AC INLET)	AKP7032 Not used	Not used BKP1046	

• PARTS LIST FOR CDJ-1000/KUC

Mark	No.	Description	Part No.

A MAIN ASSY

SEMICONDUCTORS

	IC800	AN8702NFH
	IC850	BA10358F
	IC10	BA178M05FP
	IC202	BR24C64F
⚠	IC106 (I = 0.4A)	ICP-N10
⚠	IC102, IC103 (I = 0.6A)	ICP-N15
⚠	IC101, IC104 (I = 0.8A)	ICP-N20
⚠	IC105 (I = 1A)	ICP-N25
	IC606	K4S641632D-TL1L
	IC950	LA6562
	IC900	LB11975
	IC600	M51957BFP-TFB
	IC404	MM1561JF
	IC700	MN677061ZY
	IC609	NJM78L05UA
	IC300	PD3431A9
	IC201	PD3432A9
	IC11	PE8001A
	IC602	PE9012A
	IC150, IC206	PQ1R33
	IC100, IC607	PQ2TZ15
	IC203	TC74HC4053AFT
	IC12	TC74HCT7007AF
	IC205	TC74VHC08FT
	IC405	TC74VHC541FT
	IC407	TC7S04FU
	IC204, IC403, IC710	TC7SET08FU
	IC711	TC7SET32FU
	IC610	TC7SH08FU
	IC406, IC506	TC7SU04F
	IC611	TC7SU04FU
	IC605	TC7WT241FU
	IC13, IC402, IC608, IC612, IC701	TC7WU04FU
	IC604	TLC2932IPW
	IC601	XC2S50-5PQ208C
	IC401, IC501	XCA56367PV150
	Q 600	2SA1577
	Q 204	2SC4081
	Q 11, Q 202	DTA124EUA
	Q 201, Q 203, Q 301, Q 701, Q800	DTC124EUA
	Q 950	DTC124EUA
	D 11, D 203–D 232	1SS355

COILS AND FILTERS

	L 401, L 402, L 601, L 602	ATL7002
	L 11, L 13, L 200	DTL1024
	L 404, L 504	LCTA1R0J2520
	L 10, L 101, L 111, L 15, L 152	PTL1014
	L 201, L 600, L 603–L 611	PTL1014
	L 701–L 705	PTL1014

Mark	No.	Description	Part No.

CAPACITORS

	C 417, C 418, C 517, C 518, C 638	CCSRCH100D50
	C 831	CCSRCH100D50
	C 221, C 223, C 38–C 40, C 405	CCSRCH101J50
	C 411, C 413, C 415, C 421, C 423	CCSRCH101J50
	C 425, C 427, C 429, C 435, C 437	CCSRCH101J50
	C 439, C 445, C 469, C 505, C 511	CCSRCH101J50
	C 513, C 515, C 521, C 523, C 525	CCSRCH101J50
	C 527, C 529, C 535, C 537, C 539	CCSRCH101J50
	C 545, C 569, C 700	CCSRCH101J50
	C 635, C 637	CCSRCH120J50
	C 603, C 633	CCSRCH121J50
	C 464, C 634	CCSRCH150J50
	C 463	CCSRCH180J50
	C 803	CCSRCH181J50
	C 957	CCSRCH220J50
	C 407, C 431, C 441, C 461, C 507	CCSRCH221J50
	C 531, C 541, C 614	CCSRCH221J50
	C 959	CCSRCH270J50
	C 649	CCSRCH271J50
	C 914	CCSRCH331J50
	C 807	CCSRCH390J50
	C 467, C 468, C 567, C 568, C 707	CCSRCH470J50
	C 713	CCSRCH470J50
	C 453	CCSRCH471J50
	C 723, C 818, C 819	CCSRCH561J50
	C 724	CCSRCH681J50
	C 103, C 108, C 110, C 121, C 155	CEHAR101M10
	C 17, C 20, C 201, C 21, C 211	CEHAR101M10
	C 22, C 29, C 401, C 452, C 499	CEHAR101M10
	C 501, C 502, C 599, C 602, C 622	CEHAR101M10
	C 624, C 625, C 901, C 951	CEHAR101M10
	C 101, C 105, C 25–C 28, C 828	CEHAR470M16
	C 900	CEHAR470M16
	C 33, C 704, C 708, C 712, C 806	CKSRYB102K50
	C 811–C 813	CKSRYB102K50
	C 10, C 102, C 104, C 106, C 109	CKSRYB103K50
	C 11, C 112, C 122, C 123, C 154	CKSRYB103K50
	C 157, C 158, C 16, C 200	CKSRYB103K50
	C 202, C 203, C 205–C 210	CKSRYB103K50
	C 217, C 218, C 225, C 226	CKSRYB103K50
	C 230–C 233, C 31, C 32	CKSRYB103K50
	C 331–C 333, C 400, C 402, C 406	CKSRYB103K50
	C 408, C 412, C 414, C 416, C 422	CKSRYB103K50
	C 424, C 426, C 428, C 430, C 432	CKSRYB103K50
	C 436, C 438, C 440, C 442	CKSRYB103K50
	C 446–C 451, C 456, C 457, C 462	CKSRYB103K50
	C 466, C 500, C 506, C 508, C 512	CKSRYB103K50
	C 514, C 516, C 522, C 524, C 526	CKSRYB103K50
	C 528, C 530, C 532, C 536, C 538	CKSRYB103K50
	C 540, C 542, C 546–C 551	CKSRYB103K50
	C 556, C 557, C 6001,C 6002,C 601	CKSRYB103K50
	C 604, C 607, C 613, C 615, C 616	CKSRYB103K50
	C 618, C 623, C 626–C 632, C 636	CKSRYB103K50
	C 641–C 644, C 651–C 683, C 714	CKSRYB103K50
	C 726, C 730, C 733, C 751–C 755	CKSRYB103K50

Mark	No.	Description	Part No.
	C 800, C 857, C 910, C 964		CKSRYB103K50
	C 159, C 18, C 204, C 213, C 215		CKSRYB104K16
	C 228, C 23, C 24, C 30, C 300		CKSRYB104K16
	C 306, C 605, C 608–C 610, C 612		CKSRYB104K16
	C 620, C 621, C 715, C 716, C 725		CKSRYB104K16
	C 902, C 904, C 905		CKSRYB104K16
	C 229, C 600, C 640, C 648		CKSRYB105K6R3
	C 911		CKSRYB222K50
	C 606, C 639, C 833, C 903		CKSRYB224K10
	C 820		CKSRYB273K16
	C 470, C 570		CKSRYB472K50
	C 706, C 802, C 821		CKSRYB473K25
	C 703		CKSRYB562K50
	C 834, C 835		CKSRYB682K50
	C 301, C 303, C 305, C 702, C 705		CKSRYF104Z25
	C 709–C 711, C 717–C 722, C 732		CKSRYF104Z25
	C 801, C 804, C 805, C 808–C 810		CKSRYF104Z25
	C 815, C 822, C 825, C 826, C 830		CKSRYF104Z25
	C 832, C 950, C 952–C 956		CKSRYF104Z25
	C 455, C 940		CKSRYF105Z10
	C 454 (2.2µF/ 10V)		VCG1031
RESISTORS			
	R 825 (47Ω)		DCN1133
	R 900, R 901 (4.7Ω)		DCN1141
	R 323, R 324, R 419, R 654–R 657		RAB4C101J
	R 681, R 682		RAB4C101J
	R 828		RAB4C123J
	R 453		RAB4C220J
	R 800, R801		RAB4C273J
	R 834		RAB4C303J
	R 218, R 401, R 420, R421, R501		RAB4C473J
	R 829		RAB4C822J
	R 1–R 7		RS1/10S0R0J
	R 604		RS1/16S1502F
	R 806		RS1/16S2202F
	R 605		RS1/16S8202F
	VR601 (4.7KΩ)		VCP1172
	Other Resistors		RS1/16S□□□ J
OTHERS			
	X 401	20.000MHz	ASS7023
	X 701	33.8688MHz	DSS1126
	X 201, X 300	20MHz	DSS1127
	X 601	33.8688MHz	RSS1055
	X 602	27.0MHz	VSS1086
	CN13	5P JUMPER CONNECTOR	52147-0510
	CN11	9P JUMPER CONNECTOR	52147-0910
	CN101	15P JUMPER CONNECTOR	52147-1510
	CN102	3P JUMPER CONNECTOR	52151-0310
	CN201, CN301	KR CONNECTOR	B6B-PH-K
	CN900	12P FFC CONNECTOR	DKN1205
	CN950	4P FFC CONNECTOR	DKN1223
	CN203	25P CONNECTOR	HLEM25R-1
	CN302	CONNECTOR POST	S2B-PH-K
	CN12, CN303	CONNECTOR POST	S3B-PH-K
	CN202	CONNECTOR POST	S7B-PH-K

Mark	No.	Description	Part No.
B SPCN ASSY			
OTHERS			
	CN911, CN912	12P CONNECTOR	DKN1205
C STCN ASSY			
OTHERS			
	CN913, CN914	4P CONNECTOR	DKN1223
D FLRB ASSY			
RESISTORS			
	R 1504-R 1508		RS3LMF300J
OTHERS			
	CN1501	3P JUMPER CONNECTOR	52147-0310
E SLMB ASSY			
SWITCHES			
	S 1501,S 1502		DSG1017
OTHERS			
	CN1501	KR CONNECTOR POST	S3B-PH-K
F MMCB ASSY			
CAPACITORS			
	C 91		CCSRCH221J50
	C 99		CKSRYB103K50
	C 97		CKSRYB104K16
RESISTORS			
	Other Resistors		RS1/16S□□□ J
OTHERS			
	CN99	CONNECTOR POST	B7B-PH-K
	CN999	SD CONNECTOR	DKN1231
G DABB ASSY			
SEMICONDUCTORS			
	IC1901		NJM4580D
	Q 1907		2SA1145
	Q 1906		DTA124EUA
	Q 1901 -Q 1904		2SD2144S
	Q 1905		DTC124EUA
	D 1906		1SR154-400
	D 1904,D 1905,D 1907		1SS355
	D 1918		UDZ13B
CAPACITORS			
	C 1906,C 1907		CEANP101M16
	C 1912		CEAT101M50
	C 1905,C 1908		CKSRYB104K16
	C 1915,C 1916		CQMBA102J50
	C 1909,C 1910,C 1913,C 1914		CQMBA152J50
RESISTORS			
	R 1908,R 1919		RD1/2VM103J
	R 1909,R 1918		RD1/2VM113J
	R 1907,R 1920,R 1938,R 1939		RD1/2VM182J
	R 1916,R 1917		RD1/2VM273J
	R 1906,R 1910,R 1913,R 1923		RD1/2VM471J

Mark	No.	Description	Part No.
	R 1936,R 1937		RD1/2VM471J
	Other Resistors		RS1/16S□□□ J
OTHERS			
	CN1901	9P JUMPER CONNECTOR	52147-0910
	CN1902	CONNECTOR POST	B3B-PH-K

H JACB ASSY

SEMICONDUCTORS

D 1902		1SS355
D 1901,D 1903		UDZS10B

CAPACITORS

C 1901		CKSRYB104K16
C 1903,C 1904		CQMBA102J50

RESISTORS

R 1903		RD1/2VM271J
R 1902,R 1911,R 1912		RD1/2VM471J

OTHERS

CN1904	3PJUMPER CONNECTOR	52151-0310
JA1902	2P PIN JACK	BKB1017
JA1901	REMOCON JACK	RKN1004
CN1903	CONNECTOR POST	S3B-PH-K

I DOUT ASSY

SEMICONDUCTORS

IC1801		TC74HCU04AF

COILS AND FILTERS

L 1802		PTL1003
L 1803		PTL1014
L 1801		PTL1017

SWITCHES AND RELAYS

S 1801		DSH1025

CAPACITORS

C 1810		CEAT101M6R3
C 1809		CEAT470M10
C 1808		CGCYX104M16
C 1802		CKSRYB102K50
C 1803,C 1804,C 1806,C 1807		CKSRYB104K16

RESISTORS

Other Resistors		RS1/16S□□□ J

OTHERS

0	3P CABLE HOLDER	51048-0300
J 1801	JUMPER WIRE	D20PYY0305E
JA1801	1P JACK	PKB1028
CN1801	CONNECTOR POST	S3B-PH-K

Mark	No.	Description	Part No.

J MFLB ASSY

SEMICONDUCTORS

⚠	IC1101		PE5243A
	Q 1007-Q 1017,Q 1113-Q 1118		2SC4081
	Q 1112		DTA124EUA
	Q 1101-Q 1104,Q 1106-Q 1111		DTC124EUA
	D 1117		BR5364X
	D 1104-D 1107		EMAY3864X-HM
	D 1108		NSPB500-0008
	D 1112,D 1114,D 1116		SLA570MT
	D 1101,D 1109		SLR-343MC
	D 1111,D 1113,D 1115		SLR-343VC

COILS AND FILTERS

L 1001,L 1002		PTL1014

SWITCHES

S 1104-S 1107,S 1109-S 1112		ASG7013
S 1116,S 1117,S 1119		ASG7013
S 1101-S 1103,S 1113-S 1115		DSG1063
S 1118		DSH1049

CAPACITORS

C 1143-C 1145		CCSRCH101J50
C 1112-C 1114,C 1138-C 1142		CCSRCH102J50
C 1121-C 1137		CCSRCH471J50
C 1108,C 1109,C 1116,C 1118		CEHAR470M16
C 1100-C 1107,C 1110,C 1111,C 1115		CKSRYB103K50
C 1117,C 1119,C 1120		CKSRYB103K50

RESISTORS

VR1101,VR1102 (10KΩ- B)		DCS1045
Other Resistors		RS1/16S□□□ J

OTHERS

X 1101	4.19MHz	DSS1130
0	2P CABLE HOLDER	51048-0200
0	9P CABLE HOLDER	51048-0900
0	12P CABLE HOLDER	51048-1200
CN1101	25P CONNECTOR	52492-2520
J 1103	9P JUMPER WIRE	D20PYY0915E
J 1101	12P JUMPER WIRE	D20PYY1215E
V 1101	FL INDICATOR TUBE	DEL1044
0	FL HOLDER	DNF1665

K RSWB ASSY

SWITCHES

S 1701		DSK1021

OTHERS

0	2P CABLE HOLDER	51048-0200
J 1701	2P JUMPER WIRE	D20PYY0210E

Mark	No.	Description	Part No.

L KSWB ASSY

SEMICONDUCTORS

	Q 1301-Q 1303		DTA124EUA
	D 1321-D 1328		1SS355
	D 1301-D 1304,D 1310,D 1311		EMAY3864X-HM
	D 1316,D 1317		EMAY3864X-HM
	D 1312-D 1315		SLR-342PC
	D 1305-D 1308		SLR-343MC
	D 1309		SLR-343VC

COILS AND FILTERS

	L 1304-L 1308		PTL1014

SWITCHES

	S 1303-S 1306		ASG7013
	S 1301,S 1302		DSG1063

CAPACITORS

	C 1302		CCSRCH101J50
	C 1301		CCSRCH102J50

RESISTORS

	Other Resistors		RS1/16S□□□ J

OTHERS

	CN1301	9P JUMPER CONNECTOR	52151-0910

M SLDB ASSY

SEMICONDUCTORS

	Q 1401,Q 1402		DTA124EUA
	D 1401-D 1404		1SS355
	D 1405		SLR-343MC
	D 1406		SLR-343VC

SWITCHES

	S 1401-S 1403		ASG7013

CAPACITORS

	C 1407		CCSRCH101J50
	C 1404		CCSRCH102J50
	C 1406		CEHAT100M50
	C 1401		CKSRYB103K50
	C 1402,C 1403		CKSRYB104K16

RESISTORS

	VR1401 (10kΩ-B)		DCV1012
	Other Resistors		RS1/16S□□□ J

N JFLB ASSY

SEMICONDUCTORS

	IC1202		NJM2903D
⚠	IC1201		UPD16306B
⚠	Q 1212		2SA933S
	Q 1201-Q 1207, Q 1214		2SC2412K
	Q 1208-Q 1211		2SJ209
	Q 1213, Q1215		2SB1237X
	D 1201-D 1208		1SS355
	D 1210		MTZJ30D
	D 1221		UDZ12B
	D 1219		UDZ4.3B

Mark	No.	Description	Part No.

COILS AND FILTERS

	L 1201		LRCA101J
	L 1202-L 1205		PTL1014

CAPACITORS

	C 1211,C 1213,C 1214,C 1216,C 1224		CEHAT100M50
	C 1201,C 1215		CEHAT101M16
	C 1225		CEHAT101M50
	C 1203		CKSRYB102K50
	C 1202,C 1204,C 1206,C 1207,C 1209		CKSRYB103K50
	C 1212,C 1218-C 1221,C 1223,C 1226		CKSRYB103K50

RESISTORS

	R 1269,R 1282		RD1/2VM221J
	R 9999		RS1/10S0R0J
	Other Resistors		RS1/16S□□□ J

OTHERS

	0	4P CABLE HOLDER	51048-0400
	CN1201	FPC CONNECTOR	5597-03CPB
	J 1202	15P JUMPER WIRE	D20PYY1505E
	V 1201	FL INDICATOR TUBE	DEL1043
	0	FL HOLDER	DNK3959

O JOGB ASSY

SEMICONDUCTORS

	D 1601		GP1A037RBK

CAPACITORS

	C 1601,C 1602		CKSRYB103K50

RESISTORS

	Other Resistors		RS1/16S□□□ J

OTHERS

	0	4P CABLE HOLDER	51048-0400
	J 1601	4P JUMPER WIRE	D20PYY0405E

P SW POWER SUPPLY ASSY

There is no service parts.

Q PSWB ASSY

SWITCHES

⚠	S 1		RSA1001

OTHERS

⚠	AN1	POWER SOCKET	AKP7032
⚠	J 1	CONNECTOR ASSY	DKP3545
	0	PCB BINDER	VEF1040