
EXPLODED VIEW/PARTS LIST

Main section

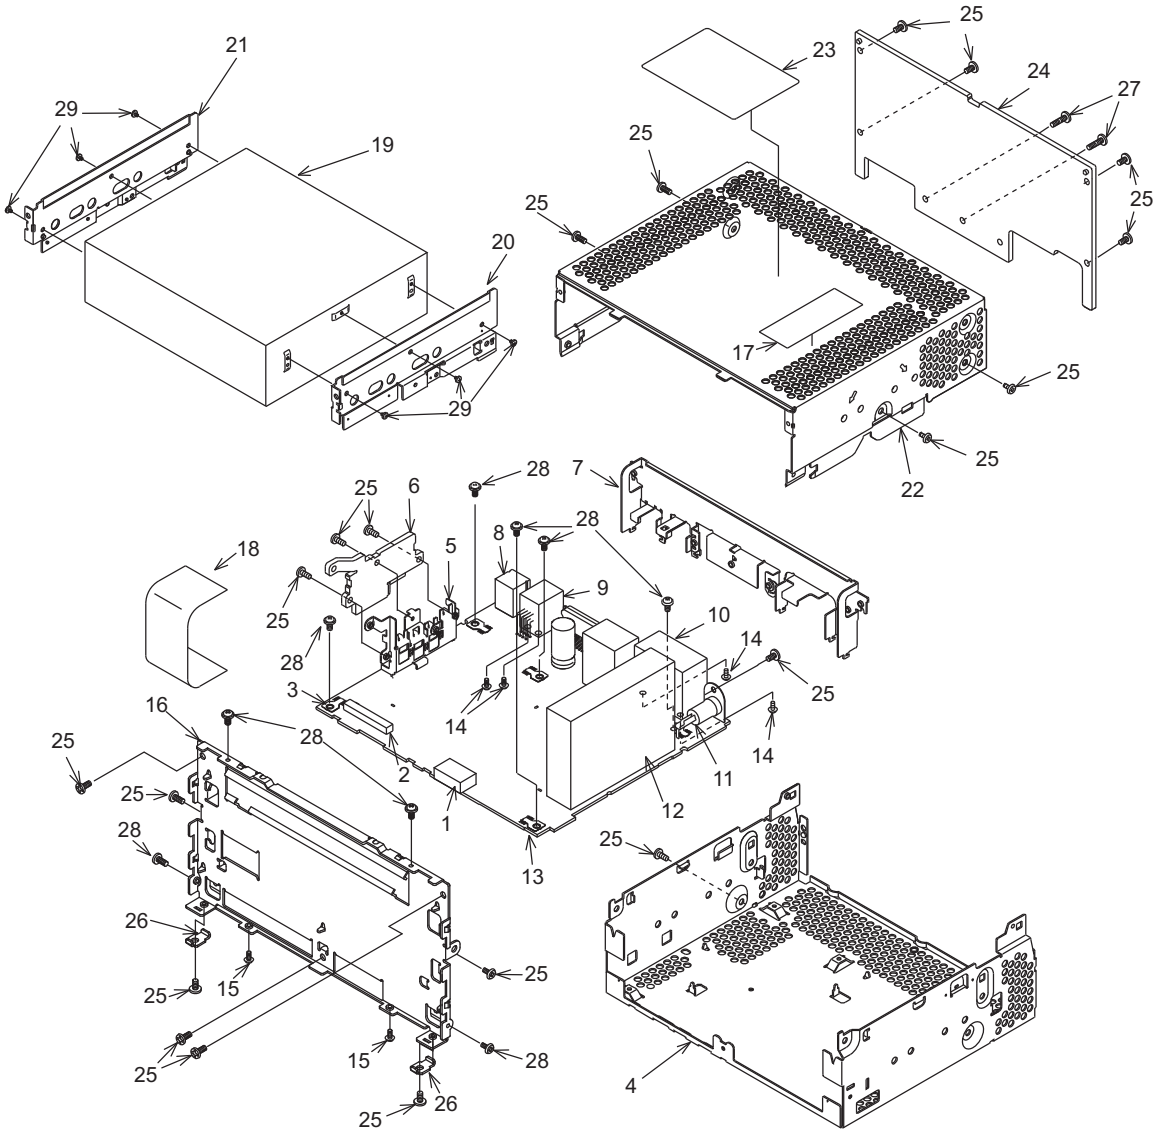


Clamping torque value of a screw is 0.4 +0.08/-0.08 Newton meter.

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	076-3011-74	PLUG(24P)	1
2	074-1237-69	OUTLET SOCKET	1
3	073-0762-90	TERMINAL	5
4	311-1919-30	LOWER CASE	1
5	331-4126-00	TR HOLDER	1
6	313-1966-00	SUB HEAT SINK	1
7	331-4127-00	REAR PLATE	1
8	074-1194-00	OUTLET SOCKET	1
9	074-1302-08	OUTLET SOCKET	1
10	074-4007-20	OUTLET SOCKET	1
11	092-0702-00	ANT-RECEPT	1
12	941-0221-80	TUNER PACK	1
13	----------	Main PWB	1
14	778-3006-00	TAP-SCREW(3x6)	4
15	780-2603-06	IT SCREW(M2.3x3.0)	2

NO.	PART NO.	DESCRIPTION	Q'TY
16	309-0836-11	ES PLATE	1
17	285-1960-00	GUIDE LABEL	1
18	816-4024-50	FLAT WIRE	1
19	929-0371-85	CD-MECH-MODULE	1
20	331-4091-10	CD BRKT(L)	1
21	331-4092-10	CD BRKT(R)	1
22	310-1826-60	UPPER CASE	1
23	286-6186-21	SETPLATE	1
24	313-1962-00	HEAT SINK	1
25	714-2606-8B	MACHINE SCREW(M2.6x6)	20
26	331-4193-20	SU-PLATE	2
27	714-2610-89	MACHINE SCREW(M2.6x10)	2
28	716-0878-50	IT SCREW(M2.6x5)	9
29	716-3552-00	IT SCREW(M2.3x2.5)	6

Escutcheon section

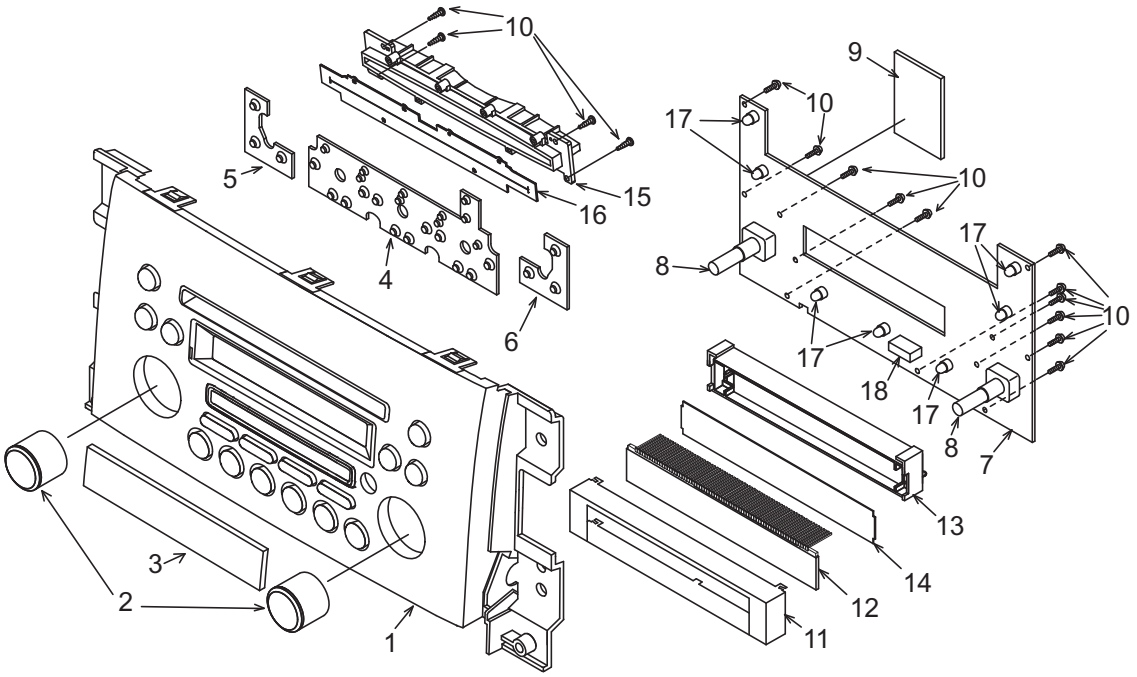

Clamping torque value of a screw is 0.2 +0.04/-0.04 Newton meter.

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8171-60	ESCUTCHEON ASSY	1
2	380-5610-00	KNOB	2
3	373-1047-00	DIAL COVER	1
4	345-5782-01	RUBBER SW (CENTER)	1
5	345-5783-00	RUBBER SW (LEFT)	1
6	345-5784-00	RUBBER SW (RIGHT)	1
7	----------	Switch PWB	1
8	016-0018-17	VR W/SHAFT	2
9	345-6006-00	PROTECTOR	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	716-0778-51	P-TITE SCREW (2x6)	15
11	331-3883-00	LCD COVER	1
12	379-1363-51	INDICATOR (LCD)	1
13	335-7956-00	LCD HOLDER	1
14	335-7929-00	COLOR FILTER	1
15	335-7946-00	DISC GUIDE(6CD)	1
16	346-0182-01	LEATHER SHEET	1
17	017-0420-43	PL LAMP (14V 40mA RED)	7
18	074-3013-74	OUTLETSOCKET	1

ELECTRICAL PARTS LIST

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION
ANT101	092-0702-00	ANT-RECEPT
BL101	941-0221-80	TUNER PACK
C101	168-1022-55	1000pF K
C103	168-1022-55	1000pF K
C104	188-1073-28	10V 100uF
C105	168-1042-78	16V 0.1uF
C106	168-1042-78	16V 0.1uF
C107	188-1073-28	10V 100uF
C108	168-1042-78	16V 0.1uF
C109	168-2232-55	0.022uF K
C112	168-4745-79	0.47uF Z
C113	168-6832-78	0.068uF K
C114	168-6832-78	0.068uF K
C121	166-1501-50	15pF CH
C123	168-1042-78	16V 0.1uF
C124	042-1458-90	50V 1uF LN
C125	166-1501-50	15pF CH
C126	166-1011-50	100pF CH
C127	166-1011-50	100pF CH
C128	166-1011-50	100pF CH
C129	166-1011-50	100pF CH
C130	168-2232-55	0.022uF K
C131	188-4763-38	16V 47uF
C134	166-1011-50	100pF CH

REF No.	PART No.	DESCRIPTION
C151	188-3363-27	10V 33uF
C152	178-1052-78	1uF
C153	188-4753-57	35V 4.7uF
C154	168-1042-78	16V 0.1uF
C155	168-2232-55	0.022uF K
C156	166-6811-50	680pF
C157	168-2232-55	0.022uF K
C158	166-8211-50	820pF
C159	168-1032-55	0.01uF K
C161	188-4763-18	6.3V 47uF
C162	168-1042-78	16V 0.1uF
C163	166-5611-50	560pF CH
C164	168-1032-55	0.01uF K
C165	166-3901-50	39pF CH
C166	166-3311-50	330pF CH
C167	188-2253-68	50V 2.2uF
C168	166-3901-50	39pF CH
C169	168-1822-55	1800pF K
C170	168-8222-55	8200pF K
C171	168-2232-55	0.022uF K
C212	188-4763-38	16V 47uF
C222	168-1042-78	16V 0.1uF
C241	168-2232-55	0.022uF K
C243	188-4763-38	16V 47uF

REF No.	PART No.	DESCRIPTION
C244	168-1042-78	16V 0.1uF
C245	168-1042-78	16V 0.1uF
C274	189-2273-29	10V 220uF
C276	043-0328-90	0.1uF
C301	178-1052-78	1uF
C302	178-1052-78	1uF
C305	178-1052-78	1uF
C306	178-1052-78	1uF
C309	168-1832-55	0.018uF K
C310	168-1832-55	0.018uF K
C311	188-2253-68	50V 2.2uF
C312	188-2253-68	50V 2.2uF
C313	188-2253-68	50V 2.2uF
C314	188-2253-68	50V 2.2uF
C318	168-1522-55	1500pF K
C319	168-1522-55	1500pF K
C334	166-4711-50	470pF CH
C335	166-4711-50	470pF CH
C346	188-1073-28	10V 100uF
C352	168-1042-78	16V 0.1uF
C353	042-1562-15	10V 220uF
C354	166-2201-50	22pF CH
C355	166-2201-50	22pF CH
C356	166-1007-50	10pF CH

REF No.	PART No.	DESCRIPTION
C357	166-1007-50	10pF CH
C358	188-1063-38	16V 10uF
C359	188-1063-38	16V 10uF
C360	188-1063-38	16V 10uF
C361	188-1063-38	16V 10uF
C391	168-1042-78	16V 0.1uF
C392	168-1042-78	16V 0.1uF
C393	168-1042-78	16V 0.1uF
C394	168-1042-78	16V 0.1uF
C395	168-1032-55	0.01uF K
C396	163-1053-65	50V 1uF
C397	042-1624-00	4700 16V
C398	163-1063-35	16V 10uF
C399	163-1053-65	50V 1uF
C400	166-2201-50	22pF CH
C401	166-3911-50	390pF CH
C402	043-0570-90	16V 2.2uF K
C403	168-5632-78	16V 0.056uF
C404	043-0570-90	16V 2.2uF K
C405	188-1063-38	16V 10uF
C406	188-1073-28	10V 100uF
C407	168-1042-78	16V 0.1uF
C408	166-3911-50	390pF CH
C409	043-0570-90	16V 2.2uF K
C410	168-5632-78	16V 0.056uF
C411	043-0570-90	16V 2.2uF K
C412	168-1042-78	16V 0.1uF
C417	178-4742-78	0.47uF
C418	168-4722-55	4700pF K
C419	178-4742-78	0.47uF
C420	168-4722-55	4700pF K
C421	178-4742-78	0.47uF
C422	168-4722-55	4700pF K
C423	178-4742-78	0.47uF
C424	168-4722-55	4700pF K
C501	168-1042-78	16V 0.1uF
C502	188-4763-18	6.3V 47uF
C503	168-1032-55	0.01uF K
C504	168-1032-55	0.01uF K
C505	168-1032-55	0.01uF K
C506	168-1042-78	16V 0.1uF
C507	188-1053-68	50V 1uF
C509	168-1022-55	1000pF K
C510	168-1022-55	1000pF K
C511	168-1042-78	16V 0.1uF
C512	168-1032-55	0.01uF K
C513	189-1073-29	10V 100uF
C514	168-1042-78	16V 0.1uF
C515	166-1011-50	100pF CH
C516	188-1063-38	16V 10uF
C517	042-0559-00	0.1F 5.5V
C722	168-1042-78	16V 0.1uF
C731	172-1041-15	0.1uF
C732	188-1053-68	50V 1uF
C741	043-0328-90	0.1uF
C744	188-1073-28	10V 100uF
C761	188-1063-38	16V 10uF
C762	188-1063-38	16V 10uF
C771	188-1073-28	10V 100uF
C772	188-1063-38	16V 10uF
C773	168-1042-78	16V 0.1uF
C774	178-4755-79	4.7uF
C811	172-1041-15	0.1uF
C821	188-1063-38	16V 10uF
CCT501	050-0140-54	1/32W 1k ohm x4J
CCT504	050-0140-54	1/32W 1k ohm x4J
CCT505	050-0140-54	1/32W 1k ohm x4J
D151	001-0580-90	1SS352
D152	001-0580-90	1SS352
D391	001-0580-90	1SS352
D504	001-0580-90	1SS352
D505	001-0580-90	1SS352
D506	001-2403-90	M1F60
D507	001-4301-25	HZU4.7B1
D508	001-0466-90	S5688B

REF No.	PART No.	DESCRIPTION
D509	001-0504-36	HZS7A1L
D701	001-0424-31	MA4180
D702	001-0424-31	MA4180
D703	001-0424-31	MA4180
D711	001-0466-90	S5688B
D712	001-0466-90	S5688B
D731	001-0466-90	S5688B
D761	001-0504-39	HZS7B2L
D771	001-0347-43	MA4082LTA
D772	001-0347-24	MA4043HTA
D801	001-0592-00	RM4Z
D851	001-4301-68	HZU18B1
IC121	051-6201-90	LC72146M
IC151	051-3034-90	NJM4558V
IC152	051-4607-90	SAA6581T
IC241	051-3367-90	NJU7780U1-33-TE2
IC272	051-3334-00	NJM2396F0
IC351	051-3034-90	NJM4558V
IC391	051-2040-00	TA8276H
IC401	051-5046-90	CL7639V20
IC501	052-3211-01	M30624MGP-D92GP
IC502	051-0869-58	NJM2103M
IC503	051-9400-29	BR93L46F-W
IC504	051-6600-58	HA12187FP
IC741	051-3369-00	NJM2388F8
J241	074-1237-69	19PIN
J701	074-1194-00	13PIN
J721	074-1302-08	8PIN
J801	074-4007-20	20PIN
L101	010-2003-04	30uH
L102	010-6009-76	22uH J
L103	010-6009-76	22uH J
L121	010-6009-76	22uH J
L151	010-6027-00	220uH
L501	010-6009-76	22uH J
L502	010-6009-76	22uH J
L801	010-8026-00	210uH
P501	076-3011-74	24P PLUG
P503	076-0717-09	9P
Q121	191-1197-50	2SB1197K Q,R
Q122	191-1197-50	2SB1197K Q,R
Q123	191-1197-50	2SB1197K Q,R
Q151	125-2041-92	RT1N141M
Q152	192-4155-51	2SC4155A S,T
Q153	125-0034-92	RT1P141M
Q154	125-2041-92	RT1N141M
Q155	198-0669-00	2SK669
Q156	125-0034-92	RT1P141M
Q157	125-2041-92	RT1N141M
Q158	125-2041-92	RT1N141M
Q159	125-2038-92	RN1902
Q241	125-0034-92	RT1P141M
Q242	125-2041-92	RT1N141M
Q243	193-0601-00	2SD601A
Q244	192-4155-51	2SC4155A S,T
Q245	125-2041-92	RT1N141M
Q246	125-0034-92	RT1P141M
Q247	125-2041-92	RT1N141M
Q248	198-3018-00	2SK3018
Q249	198-3018-00	2SK3018
Q391	125-2041-92	RT1N141M
Q392	192-4155-51	2SC4155A S,T
Q502	190-2071-00	2SA2071 T100
Q503	192-4155-51	2SC4155A S,T
Q504	192-4155-51	2SC4155A S,T
Q505	192-4155-51	2SC4155A S,T
Q506	193-2118-50	2SD2118F5 R,S
Q701	192-4155-51	2SC4155A S,T
Q711	190-2071-00	2SA2071 T100
Q712	192-4155-51	2SC4155A S,T
Q761	192-5810-00	2SC5810 TE12L
Q762	125-0034-92	RT1P141M
Q763	125-2041-92	RT1N141M
Q771	192-5886-00	2SC5886

REF No.	PART No.	DESCRIPTION
Q772	192-4155-51	2SC4155A S,T
Q773	192-4155-51	2SC4155A S,T
Q774	192-4155-51	2SC4155A S,T
Q775	192-4155-51	2SC4155A S,T
Q776	125-0034-92	RT1P141M
Q777	125-2041-92	RT1N141M
Q821	190-2071-00	2SA2071 T100
Q822	192-4155-51	2SC4155A S,T
R101	119-0000-05	1/10W 0 ohm JW
R102	119-0000-05	1/10W 0 ohm JW
R103	119-1041-15	1/10W 100k ohm
R104	119-0000-05	1/10W 0 ohm JW
R105	119-4711-15	1/10W 470 ohm
R106	119-2221-15	1/10W 2.2k ohm
R107	116-1001-15	1/4W 10 ohm
R108	119-2231-15	1/10W 22k ohm
R109	119-4731-15	1/10W 47k ohm
R111	166-8201-50	82pF CH
R122	119-2221-15	1/10W 2.2k ohm
R125	119-1021-15	1/10W 1k ohm
R127	119-5631-15	1/10W 56k ohm
R128	119-4731-15	1/10W 47k ohm
R130	119-2221-15	1/10W 2.2k ohm
R131	119-1031-15	1/10W 10k ohm
R132	119-1031-15	1/10W 10k ohm
R133	119-2221-15	1/10W 2.2k ohm
R134	119-2221-15	1/10W 2.2k ohm
R135	119-1031-15	1/10W 10k ohm
R151	119-1021-15	1/10W 1k ohm
R152	119-5621-15	1/10W 5.6k ohm
R153	119-3311-15	1/10W 330 ohm
R154	119-1021-15	1/10W 1k ohm
R155	119-3331-15	1/10W 33k ohm
R156	119-1031-15	1/10W 10k ohm
R157	119-1231-15	1/10W 12k ohm
R158	119-3321-15	1/10W 3.3k ohm
R159	119-1041-15	1/10W 100k ohm
R160	119-2211-15	1/10W 220 ohm
R161	119-0000-05	1/10W 0 ohm JW
R162	119-1021-15	1/10W 1k ohm
R163	119-1021-15	1/10W 1k ohm
R164	119-2221-15	1/10W 2.2k ohm
R165	119-5631-15	1/10W 56k ohm
R166	119-1231-15	1/10W 12k ohm
R167	116-3311-15	1/4W 330 ohm
R168	119-1031-15	1/10W 10k ohm
R169	119-2711-15	1/10W 270 ohm
R170	119-1021-15	1/10W 1k ohm
R171	119-0000-05	1/10W 0 ohm JW
R172	119-1021-15	1/10W 1k ohm
R173	119-1031-15	1/10W 10k ohm
R242	119-4731-15	1/10W 47k ohm
R243	119-1021-15	1/10W 1k ohm
R245	119-3331-15	1/10W 33k ohm
R246	119-4731-15	1/10W 47k ohm
R248	119-1041-15	1/10W 100k ohm
R250	119-3331-15	1/10W 33k ohm
R253	119-4731-15	1/10W 47k ohm
R255	119-3331-15	1/10W 33k ohm
R256	119-0000-05	1/10W 0 ohm JW
R258	119-4731-15	1/10W 47k ohm
R271	119-4731-15	1/10W 47k ohm
R273	119-0000-05	1/10W 0 ohm JW
R301	119-1021-15	1/10W 1k ohm
R302	119-1021-15	1/10W 1k ohm
R305	119-1021-15	1/10W 1k ohm
R306	119-1021-15	1/10W 1k ohm
R309	119-1021-15	1/10W 1k ohm
R310	119-1021-15	1/10W 1k ohm
R311	119-5631-15	1/10W 56k ohm
R312	119-5631-15	1/10W 56k ohm
R313	119-5631-15	1/10W 56k ohm
R314	119-5631-15	1/10W 56k ohm
R323	119-0000-05	1/10W 0 ohm JW
R324	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R325	119-0000-05	1/10W 0 ohm JW
R326	119-0000-05	1/10W 0 ohm JW
R351	119-8211-15	1/10W 820 ohm
R352	119-1021-15	1/10W 1k ohm
R353	032-0140-50	1/10W 10k ohm F
R354	032-0140-50	1/10W 10k ohm F
R355	032-0140-50	1/10W 10k ohm F
R356	032-0140-50	1/10W 10k ohm F
R357	032-0140-50	1/10W 10k ohm F
R358	032-0140-50	1/10W 10k ohm F
R359	032-0140-50	1/10W 10k ohm F
R360	032-0140-50	1/10W 10k ohm F
R391	119-5631-15	1/10W 56k ohm
R392	119-1221-15	1/10W 1.2k ohm
R393	119-2221-15	1/10W 2.2k ohm
R394	119-2221-15	1/10W 2.2k ohm
R395	119-2221-15	1/10W 2.2k ohm
R396	119-2221-15	1/10W 2.2k ohm
R397	119-1031-15	1/10W 10k ohm
R398	119-4731-15	1/10W 47k ohm
R399	119-4731-15	1/10W 47k ohm
R400	119-1031-15	1/10W 10k ohm
R401	119-2731-15	1/10W 27k ohm
R402	119-2021-15	1/10W 2k ohm
R403	119-2731-15	1/10W 27k ohm
R404	119-2021-15	1/10W 2k ohm
R405	119-0000-05	1/10W 0 ohm JW
R502	119-4721-15	1/10W 4.7k ohm
R503	119-4721-15	1/10W 4.7k ohm
R504	119-4721-15	1/10W 4.7k ohm
R510	119-4721-15	1/10W 4.7k ohm
R511	119-4721-15	1/10W 4.7k ohm
R512	119-4721-15	1/10W 4.7k ohm
R513	119-4721-15	1/10W 4.7k ohm
R514	119-1021-15	1/10W 1k ohm
R515	119-1041-15	1/10W 100k ohm
R516	119-1041-15	1/10W 100k ohm
R517	116-1001-15	1/4W 10 ohm
R520	119-4731-15	1/10W 47k ohm
R521	119-4731-15	1/10W 47k ohm
R522	119-4731-15	1/10W 47k ohm
R524	119-1521-15	1/10W 1.5k ohm
R525	119-1021-15	1/10W 1k ohm
R526	119-3311-15	1/10W 330 ohm
R527	119-4721-15	1/10W 4.7k ohm
R528	032-0140-66	1/10W 220 ohm F

REF No.	PART No.	DESCRIPTION
R529	119-1031-15	1/10W 10k ohm
R530	119-1041-15	1/10W 100k ohm
R531	119-1031-15	1/10W 10k ohm
R532	119-4721-15	1/10W 4.7k ohm
R533	119-4721-15	1/10W 4.7k ohm
R534	119-1021-15	1/10W 1k ohm
R535	119-1031-15	1/10W 10k ohm
R536	119-2221-15	1/10W 2.2k ohm
R537	119-1031-15	1/10W 10k ohm
R538	119-1031-15	1/10W 10k ohm
R539	119-1031-15	1/10W 10k ohm
R540	119-4731-15	1/10W 47k ohm
R541	119-5621-15	1/10W 5.6k ohm
R542	119-2231-15	1/10W 22k ohm
R544	119-4731-15	1/10W 47k ohm
R545	119-6831-15	1/10W 68k ohm
R546	119-1021-15	1/10W 1k ohm
R547	119-1021-15	1/10W 1k ohm
R548	119-1031-15	1/10W 10k ohm
R549	119-3341-15	1/10W 330k ohm
R550	032-0140-22	1/10W 68k ohm F
R551	032-0140-00	1/10W 56k ohm F
R552	117-6821-15	1/8W 6.8k ohm
R553	119-4731-15	1/10W 47k ohm
R554	119-4731-15	1/10W 47k ohm
R555	119-5621-15	1/10W 5.6k ohm
R556	119-1021-15	1/10W 1k ohm
R557	119-4731-15	1/10W 47k ohm
R558	119-1031-15	1/10W 10k ohm
R559	119-1021-15	1/10W 1k ohm
R560	119-1021-15	1/10W 1k ohm
R561	119-1021-15	1/10W 1k ohm
R562	119-1021-15	1/10W 1k ohm
R563	119-0000-05	1/10W 0 ohm JW
R564	119-1021-15	1/10W 1k ohm
R566	119-1021-15	1/10W 1k ohm
R568	119-4731-15	1/10W 47k ohm
R570	119-4731-15	1/10W 47k ohm
R572	119-4731-15	1/10W 47k ohm
R573	119-4731-15	1/10W 47k ohm
R576	119-0000-05	1/10W 0 ohm JW
R701	116-1211-15	1/4W 120 ohm
R702	116-6801-15	1/4W 68 ohm
R703	119-2231-15	1/10W 22k ohm
R704	119-2231-15	1/10W 22k ohm
R711	116-2221-15	1/4W 2.2k ohm

REF No.	PART No.	DESCRIPTION
R712	117-1031-15	1/8W 10k ohm
R713	116-2221-15	1/4W 2.2k ohm
R714	119-1031-15	1/10W 10k ohm
R715	119-3321-15	1/10W 3.3k ohm
R726	119-1021-15	1/10W 1k ohm
R731	116-5621-15	1/4W 5.6k ohm
R732	116-4721-15	1/4W 4.7k ohm
R761	032-0092-56	1/8W 22k ohm F
R762	119-1541-15	1/10W 150k ohm
R763	032-0092-51	1/8W 1k ohm F
R764	119-1221-15	1/10W 1.2k ohm
R771	119-0000-05	1/10W 0 ohm JW
R772	119-2231-15	1/10W 22k ohm
R773	116-1021-15	1/4W 1k ohm
R775	119-2231-15	1/10W 22k ohm
R776	119-2231-15	1/10W 22k ohm
R777	117-4731-15	1/8W 47k ohm
R778	119-1031-15	1/10W 10k ohm
R779	116-1821-15	1/4W 1.8k ohm
R780	117-1821-15	1/8W 1.8k ohm
R783	119-2231-15	1/10W 22k ohm
R793	119-0000-05	1/10W 0 ohm JW
R801	119-0000-05	1/10W 0 ohm JW
R802	119-0000-05	1/10W 0 ohm JW
R821	116-1031-15	1/4W 10k ohm
R822	119-3321-15	1/10W 3.3k ohm
R823	119-1031-15	1/10W 10k ohm
R824	116-2221-15	1/4W 2.2k ohm
R825	116-2221-15	1/4W 2.2k ohm
R826	119-8221-15	1/10W 8.2k ohm
R901	119-0000-05	1/10W 0 ohm JW
R902	119-0000-05	1/10W 0 ohm JW
R905	119-0000-05	1/10W 0 ohm JW
SUP101	060-0122-20	DSP-141N-S00B
TH711	002-0318-21	THERMISTOR
TM101	073-0762-90	TERMINAL
TM501	073-0762-90	TERMINAL
TM502	073-0762-90	TERMINAL
TM801	073-0762-90	TERMINAL
TM802	073-0762-90	TERMINAL
X121	061-1066-00	CRYSTAL 7.2MHZ
X151	061-3013-00	CRYSTAL 4.332MHZ
X501	060-1533-90	CSTCE10M0G52-RO
PWB	039-3108-00	PWB(WITHOUT COMPONENT)

Switch PWB section (B2)


REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF
C902	168-1042-78	16V 0.1uF
C903	168-1042-78	16V 0.1uF
C904	168-1042-78	16V 0.1uF
C905	168-1042-78	16V 0.1uF
C906	178-1052-78	1uF
D901	001-0580-90	1SS352
D902	001-0580-90	1SS352
D903	001-0580-90	1SS352
D904	001-0580-90	1SS352
D905	001-7048-91	RFR1112H-22 C,D RED
D906	001-7048-91	RFR1112H-22 C,D RED
D907	001-7048-91	RFR1112H-22 C,D RED
D908	001-7048-91	RFR1112H-22 C,D RED
D909	001-7048-91	RFR1112H-22 C,D RED
D910	001-7048-91	RFR1112H-22 C,D RED
D911	001-7048-91	RFR1112H-22 C,D RED
D912	001-7048-91	RFR1112H-22 C,D RED

REF No.	PART No.	DESCRIPTION
D913	001-7087-90	RBR1112H C,D,E RED
IC901	051-6084-00	NJU6625FG1-03
J901	074-3013-74	24P
L901	010-3406-66	22uH J
LCD901	379-1363-51	INDICATOR(LCD)
PL901	017-0420-43	14V 40mA RED
PL902	017-0420-43	14V 40mA RED
PL903	017-0420-43	14V 40mA RED
PL904	017-0420-43	14V 40mA RED
PL905	017-0420-43	14V 40mA RED
PL907	017-0420-43	14V 40mA RED
PL908	017-0420-43	14V 40mA RED
R901	119-0000-05	1/10W 0 ohm JW
R902	119-0000-05	1/10W 0 ohm JW
R907	119-0000-05	1/10W 0 ohm JW
R908	119-0000-05	1/10W 0 ohm JW
R909	119-0000-05	1/10W 0 ohm JW
R910	119-0000-05	1/10W 0 ohm JW
R914	119-0000-05	1/10W 0 ohm JW
R917	119-0000-05	1/10W 0 ohm JW
R918	119-4341-15	1/10W 430k ohm
R919	119-1021-15	1/10W 1k ohm
R920	119-1021-15	1/10W 1k ohm
R921	119-1841-15	1/10W 180k ohm
R922	119-1841-15	1/10W 180k ohm

REF No.	PART No.	DESCRIPTION
R923	119-1841-15	1/10W 180k ohm
R924	119-1841-15	1/10W 180k ohm
R925	119-1221-15	1/10W 1.2k ohm
R926	119-1221-15	1/10W 1.2k ohm
R927	119-1521-15	1/10W 1.5k ohm
R928	119-1221-15	1/10W 1.2k ohm
R929	119-1221-15	1/10W 1.2k ohm
R930	119-1521-15	1/10W 1.5k ohm
R931	119-1221-15	1/10W 1.2k ohm
R932	119-1221-15	1/10W 1.2k ohm
R933	119-1521-15	1/10W 1.5k ohm
R934	119-1221-15	1/10W 1.2k ohm
R935	119-1221-15	1/10W 1.2k ohm
R936	119-1521-15	1/10W 1.5k ohm
R937	119-1821-15	1/10W 1.8k ohm
R938	119-2221-15	1/10W 2.2k ohm
R939	119-2221-15	1/10W 2.2k ohm
R940	119-0000-05	1/10W 0 ohm JW
TH902	002-0306-90	SC20-3J153
VR901	016-0018-17	VR W/SHAFT
VR902	016-0018-17	VR W/SHAFT
PWB	039-2987-01	PWB(WITHOUT COMPONENT)

EXPLODED VIEW/PARTS LIST

Main section

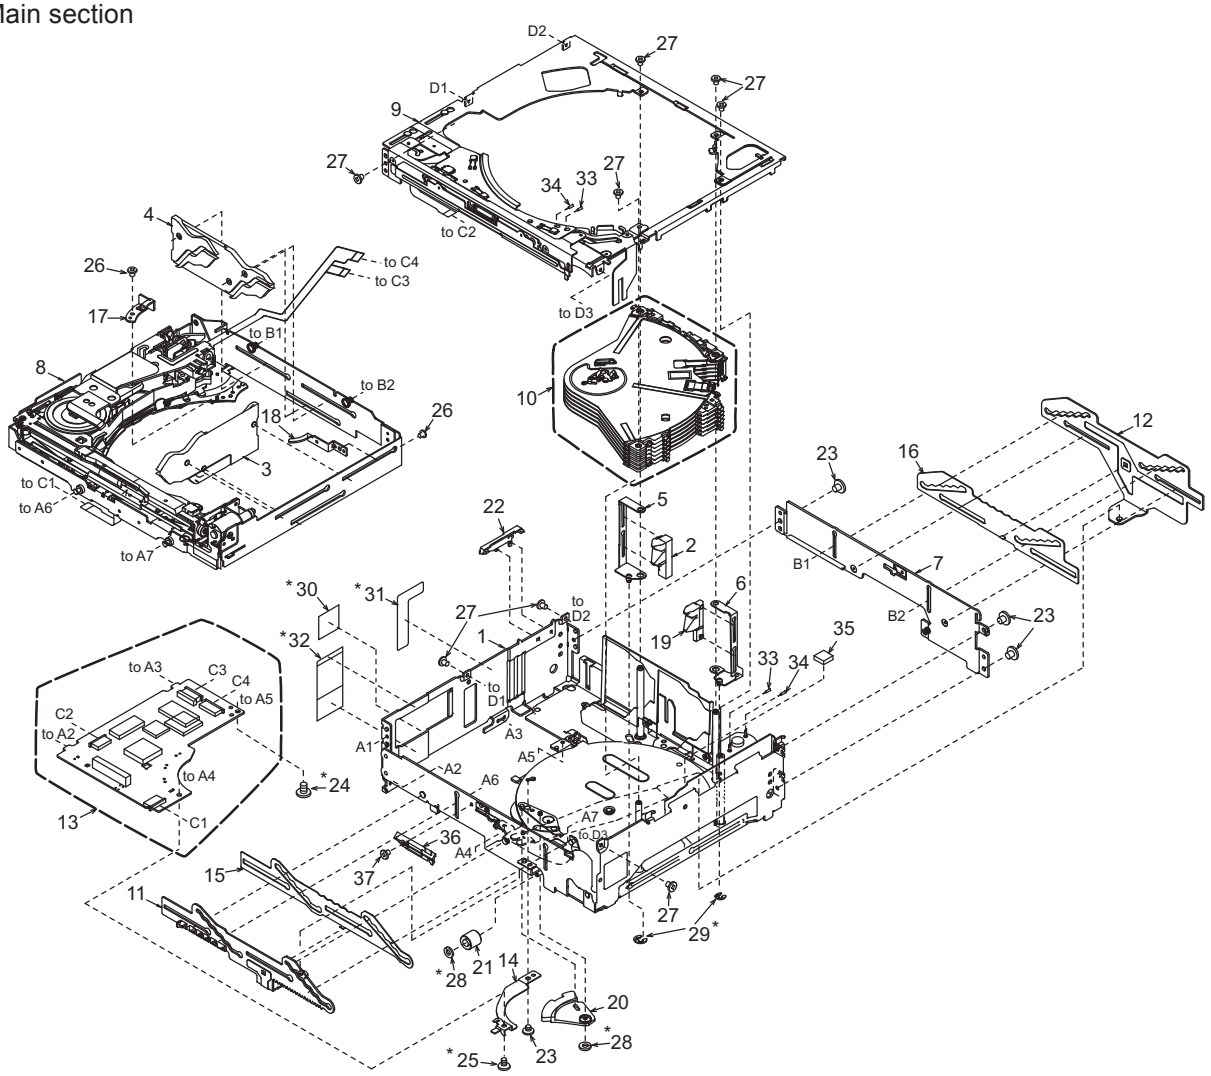


* Do not reuse the following parts.

(No.24,25,28,29,30,31,32)

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1756-28	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	HBS-586-100	DH-SEL-ASSY S	1
4	HBS-587-100	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-1760-21	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1753-22	S-DRIVE-CH UNIT	1
9	966-1764-21	UPPER UNIT ASSY	1
10	HBS-566-200	DISC HOLDER UNIT	1
11	966-1771-21	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY R	1
13	HBS-564-200	CD-PWB-ASSY	1
14	620-1640-20	SW-H-PLATE	1
15	620-1778-20	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1
19	621-1760-21	DISC STOPPER R	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	621-1636-24	SW LINK	1
21	621-1765-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW(M2.0x2.0)	4
24	716-1850-02	SCREW(M2.0x2.0)	1
25	716-1851-02	SCREW(M2.0x3.0)	1
26	716-3450-00	SCREW(M1.7x2.0)	2
27	716-3451-01	SCREW(M1.7x2.5)	8
28	746-0761-00	WASHER	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT-WIRE	1
34	802-4921-60	VINYL-COAT-WIRE	1
35	345-5824-00	RUBBER PART	1
36	621-1763-20	LOADING GUIDE B	1
37	716-1859-01	IT SCREW(M1.7 x 2) 1	

Lower unit assy section : 966-1756-28

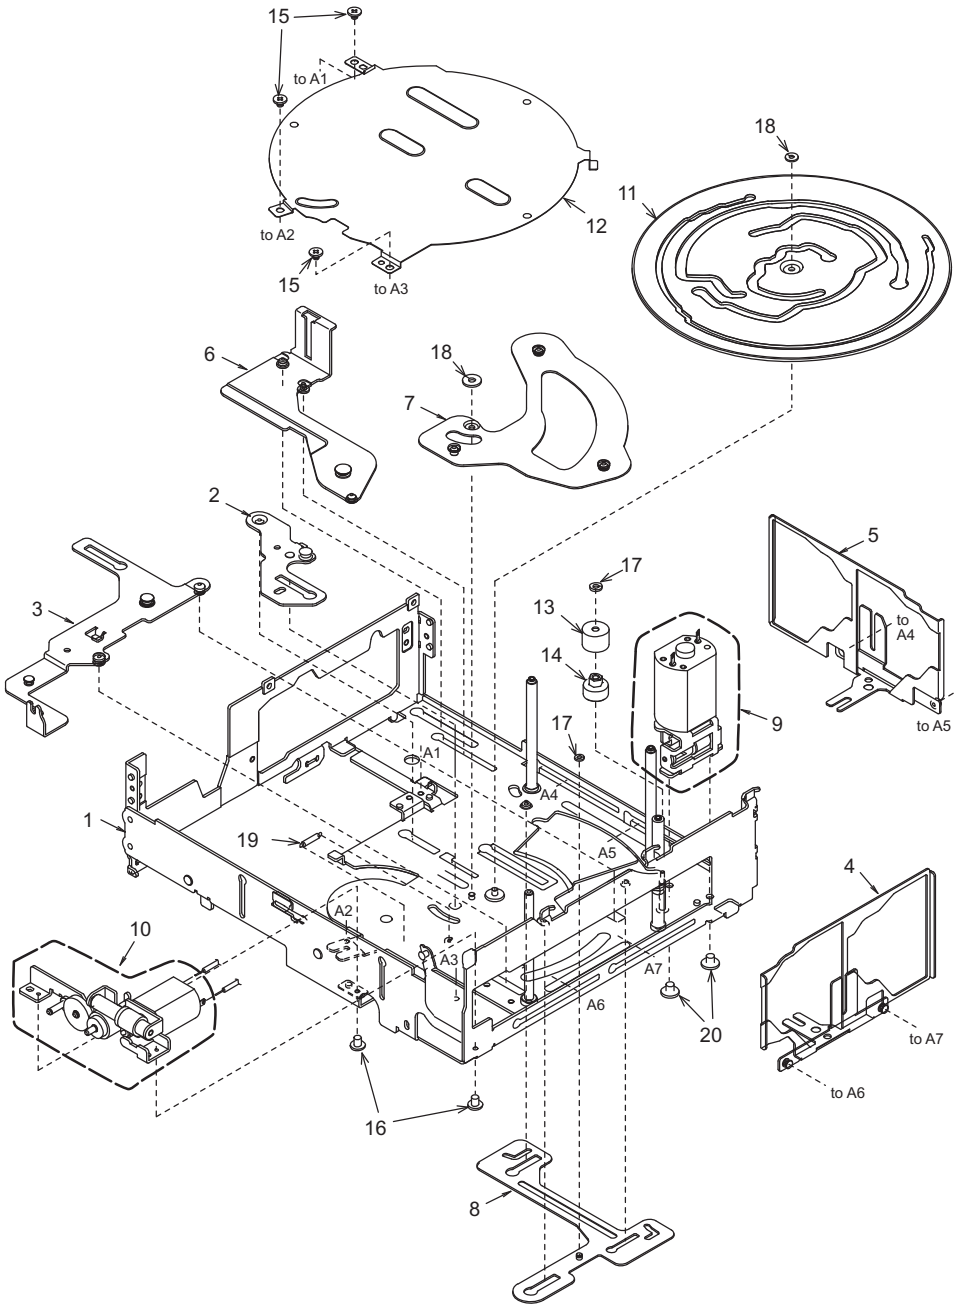


NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1757-25	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-1758-20	DS-SP-ASSY A	1
4	966-0660-22	DH-SP-ASSY S	1
5	966-0661-23	DH-SP-ASSY R	1
6	966-0677-23	D-SHT PL-B-ASSY	1
7	966-0659-22	DH-SP-ASSY B	1
8	966-1759-00	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-568-100	UD-MOTOR-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
11	620-1771-22	CAM GEAR	1
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	5
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	2
18	746-0768-00	WASHER	2
19	750-6756-20	SW-L-SPRING	1
20	716-1851-03	SCREW(M2.0x3.0)	2


[Grease Point]

* Grease: SANKOL FG-87HSR

Put grease on the surface	
Put grease on the reverse side	
Put grease on the both sides	
Put grease on the edge	

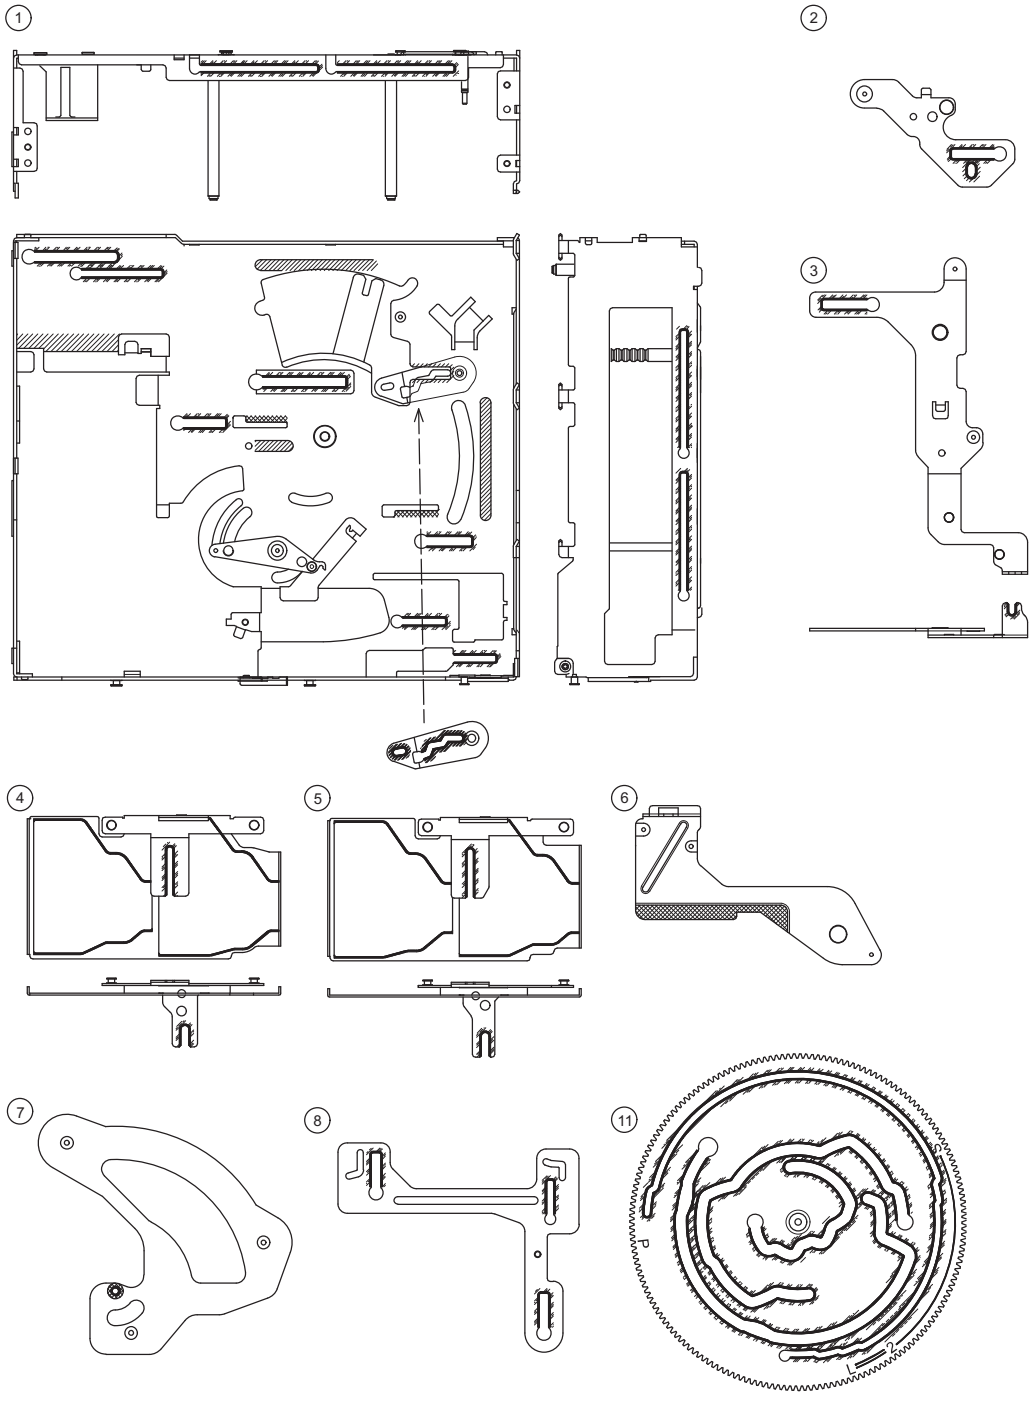

S-Drive-CH unit section : 966-1753-22

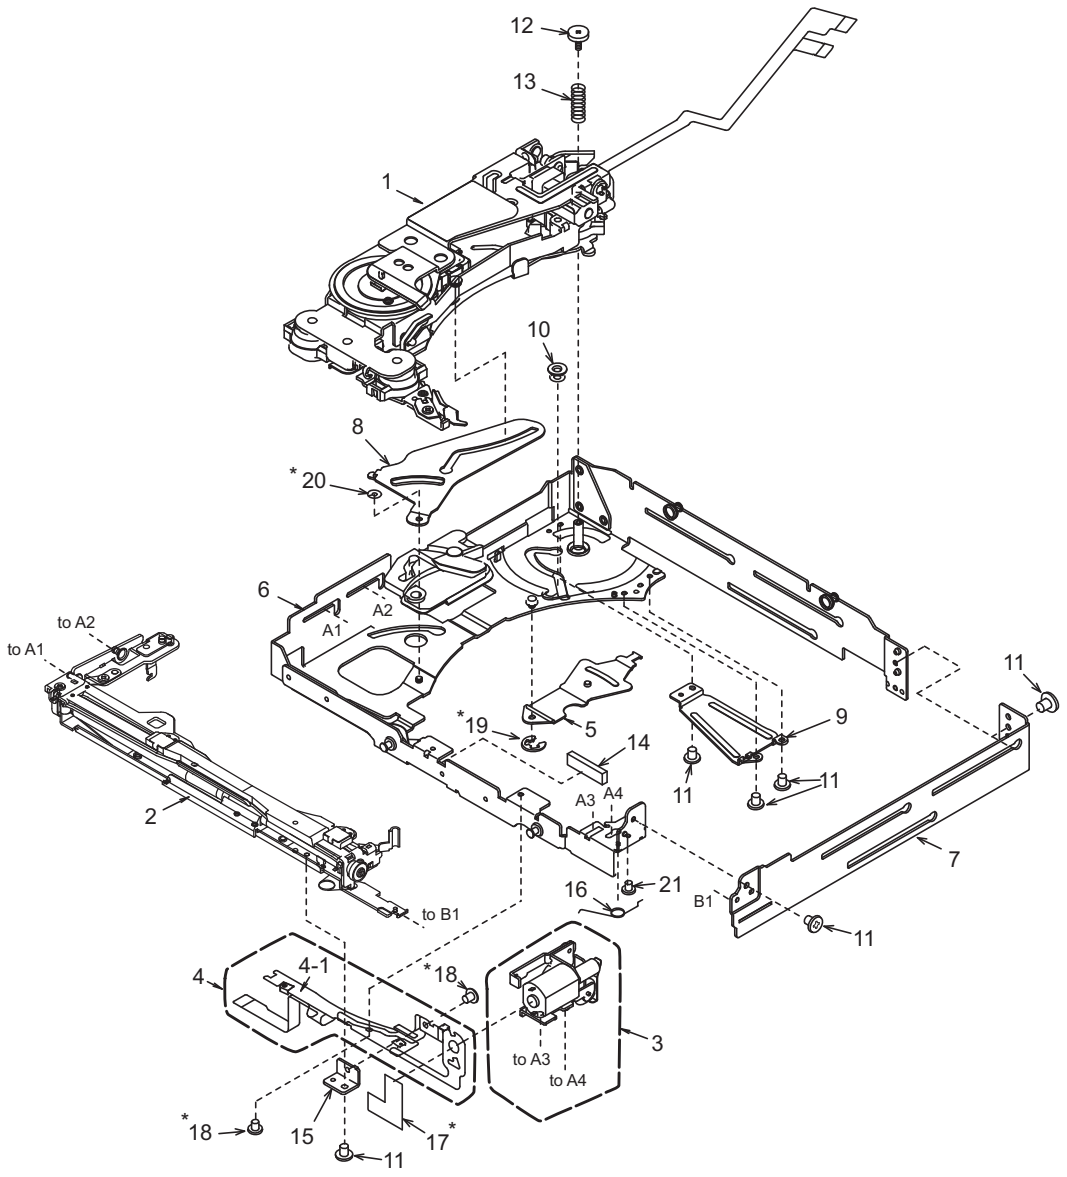

* Do not reuse the following parts.
(No.17,18,19,20)


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-565-200	N-DRIVE UNIT	1
2	HBS-567-200	LOADING-U-ASSY	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1
4	HBS-552-200	L-SENSOR-S-ASSY	1
4-1	----------	SENSOR-L-FPC	1
5	966-0676-21	D-SHT LK-A-ASSY	1
6	966-1755-22	DRIVE-CH A ASSY	1
7	620-1681-21	DRIVE CHASSIS B	1
8	620-1672-21	DR-SUPPORT-PL	1
9	620-1680-20	D-SHIFT COVER	1
10	622-1743-21	D-SHIFT ROLLER B	1


NO.	PART NO.	DESCRIPTION	Q'TY
11	716-3450-00	SCREW(M1.7x2.0)	6
12	716-3459-01	SCREW(M1.7x2.0)	1
13	750-6761-20	DRIVE SPRING A	1
14	345-5868-01	RUBBER PART	1
15	620-1651-21	S-PWB-PLATE	1
16	750-6754-20	LO-ES-SPRING B	1
17	345-5424-01	SEN-FPC GUIDE	1
18	716-1859-01	SCREW(M1.7x2.0)	2
19	744-0039-00	E-RING	1
20	746-0870-00	WASHER	1
21	716-3538-00	SCREW(M1.7x2.0)	1


[Grease Point]


* Grease **A**: SANKOL FG-87HSR
* Grease **B**: SANKOL CFD-006MBL


Put grease on the surface	
Put grease on the reverse side	
Put grease on the both sides	
Put grease on the edge	

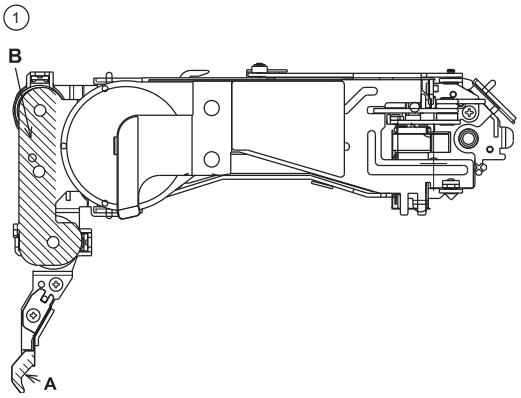





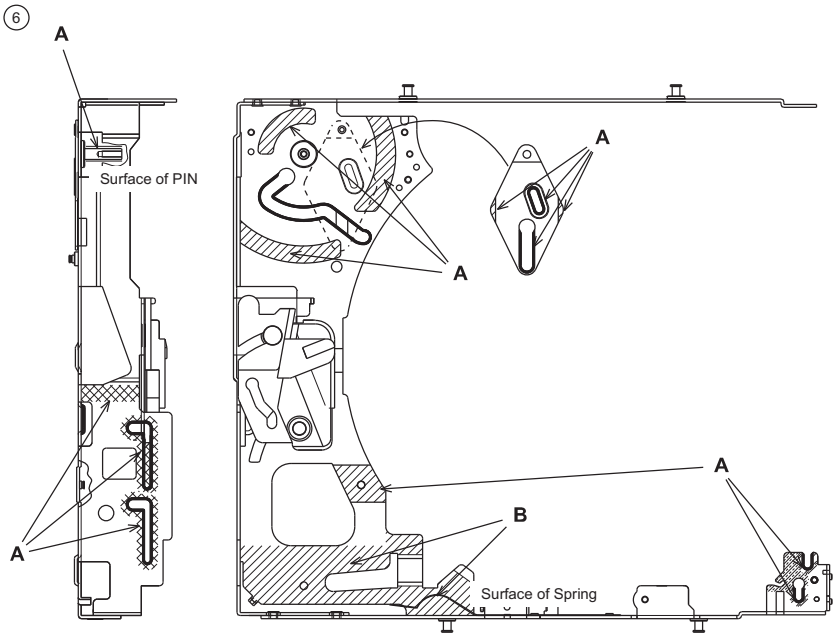

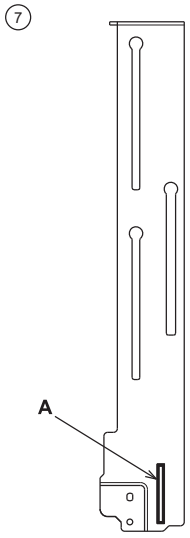








Upper unit assy section : 966-1764-21

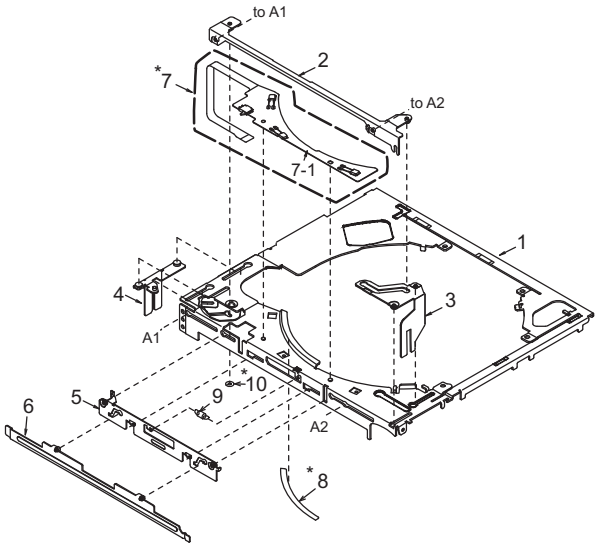


* Do not reuse the following parts.
(No.7,8,10)


NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1761-21	UPPER-CHA-ASSY	1
2	966-1765-20	LO-SHIFT A ASSY	1
3	966-0700-22	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-1766-20	SHUTTER-PL-ASSY	1
6	966-1763-20	SHUTTER ASSY	1
7	HBS-553-200	U-SENSOR-S-ASSY	1
7-1	----------	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

[Grease Point]

* Grease: SANKOL FG-87HSR

Put grease on the surface	
Put grease on the reverse side	
Put grease on the both sides	
Put grease on the edge	

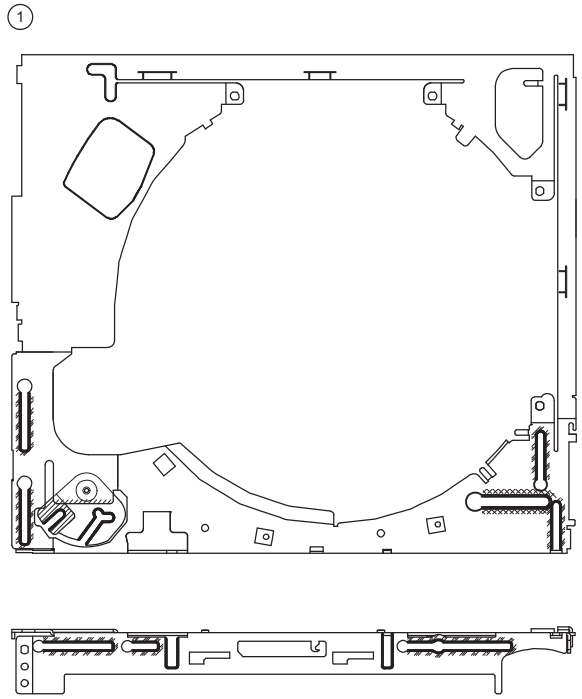

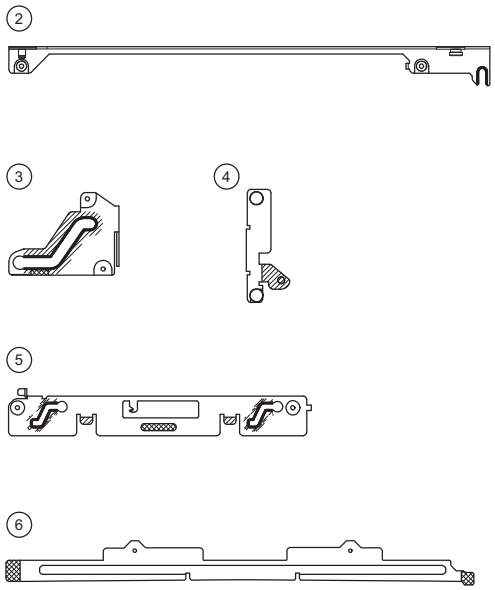

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION
C1	042-0672-00	25V 47uF TA
C2	166-1011-50	100pF CH
C3	168-1042-78	16V 0.1uF
C4	178-1052-78	1uF
C5	042-0671-01	10V 47uF TA
C6	168-1042-78	16V 0.1uF
C7	168-1032-55	0.01uF K
C8	168-1042-78	16V 0.1uF
C9	178-1052-78	1uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	178-1052-78	1uF
C13	178-1052-78	1uF
C14	042-0671-01	10V 47uF TA
C15	168-1032-55	0.01uF K
C20	178-1052-78	1uF
C21	168-1042-78	16V 0.1uF
C22	178-1052-78	1uF
C23	168-1042-78	16V 0.1uF
C24	042-0671-01	10V 47uF TA
C25	168-1042-78	16V 0.1uF
C26	168-1045-56	0.1uF Z
C27	168-4732-78	0.047uF K
C28	166-4701-50	47pF CH
C29	168-4732-78	0.047uF K
C30	166-4711-50	470pF CH
C31	168-1532-55	0.015uF K
C32	166-4711-50	470pF CH
C33	168-1042-78	16V 0.1uF
C34	168-6822-55	6800pF K
C35	168-1032-55	0.01uF K
C38	168-3332-78	0.033uF K
C39	168-4722-55	4700pF K
C40	168-1042-78	16V 0.1uF
C42	168-1042-78	16V 0.1uF
C43	168-1532-55	0.015uF K
C44	168-1042-78	16V 0.1uF
C45	168-1522-55	1500pF K
C46	168-1042-78	16V 0.1uF
C47	166-6811-50	680pF
C48	166-6801-50	68pF CH
C49	178-1052-78	1uF
C50	042-0671-01	10V 47uF TA
C51	042-0671-01	10V 47uF TA
C52	178-1052-78	1uF
C53	168-1042-78	16V 0.1uF
C54	178-1052-78	1uF
C55	178-1052-78	1uF
C56	042-0671-01	10V 47uF TA
C57	168-1042-78	16V 0.1uF
C59	168-1042-78	16V 0.1uF
C60	178-1052-78	1uF
C61	168-1032-55	0.01uF K
C62	168-1042-78	16V 0.1uF
C63	168-1042-78	16V 0.1uF
C64	168-1042-78	16V 0.1uF
C65	168-1042-78	16V 0.1uF
C66	168-1042-78	16V 0.1uF
C67	168-1042-78	16V 0.1uF
C68	168-1042-78	16V 0.1uF
C70	168-1042-78	16V 0.1uF
C71	168-1042-78	16V 0.1uF
C72	168-1042-78	16V 0.1uF
C73	178-1052-78	1uF
C74	168-1042-78	16V 0.1uF
C75	168-2222-55	2200pF K
C81	166-1007-50	10pF CH
C82	166-1007-50	10pF CH
C83	178-1052-78	1uF
C85	178-1052-78	1uF
C86	166-1201-50	12pF CH
C87	042-1702-90	6.3V 100uF
C91	168-1032-55	0.01uF K
CCT1	050-0145-59	1/16W 22 ohm x4
CCT2	050-0145-54	1/16W 47k ohm x4
CCT3	050-0145-54	1/16W 47k ohm x4
CCT4	050-0145-55	1/16W 10k ohm x4
D1	001-4301-14	HZU 3.0B1
D1	001-0529-14	MA8030-L
D2	001-0367-91	1SS226
D3	001-4301-16	HZU 3.3B1
D3	001-0529-16	MA8033-L
D4	001-4301-18	HZU 3.6B1
D4	001-0529-18	MA8036-L
IC1	051-6399-00	TC94A15F
IC2	052-5070-10	TMP91CY22IFG-6HE2
IC3	051-6711-20	TC94A34FG-004
IC4	051-6060-08	BD7961FM-E2
IC5	051-5452-90	BD5235G-TR
IC6	051-9318-10	GLT4160L04P-60TC
IC6	051-9318-00	MSM51V17400J-60T
IC8	051-9402-78	BR93L56RFVM-W
IC9	051-6072-08	BD7931FE2
IC10	051-5833-00	GP1S093HCZ
IC11	051-3364-90	NJU7771F15
IC12	051-3364-90	NJU7771F15
J1	074-1237-69	19PIN
J2	074-1201-65	15P
J3	074-1138-56	6P
J4	074-1100-61	SOCKET 11P
J5	074-1201-61	11P SOCKET
Q1	060-0252-01	PT4850F
Q2	125-0021-91	DTA114EUA
Q3	198-3018-00	2SK3018
Q6	131-1188-50	2SB1188PQR
Q7	125-2027-91	DTC114EUA
Q8	131-1427-00	2SB1427
Q9	131-1188-50	2SB1188PQR
Q10	125-2027-91	DTC114EUA
Q11	125-0021-91	DTA114EUA
Q12	125-2027-91	DTC114EUA
Q20	131-1427-00	2SB1427
R1	119-4731-15	1/10W 47k ohm
R2	119-2211-15	1/10W 220 ohm
R3	119-2211-15	1/10W 220 ohm
R4	119-1041-15	1/10W 100k ohm
R5	119-4731-15	1/10W 47k ohm
R6	119-2211-15	1/10W 220 ohm
R7	119-2211-15	1/10W 220 ohm
R8	119-2211-15	1/10W 220 ohm
R10	032-0140-16	1/10W 180k ohm F
R11	032-0140-96	1/10W 120k ohm F
R12	119-2231-15	1/10W 22k ohm
R13	119-4711-15	1/10W 470 ohm
R14	119-2221-15	1/10W 2.2k ohm
R15	119-1031-15	1/10W 10k ohm
R16	119-0000-05	1/10W 0 ohm JW
R17	119-4731-15	1/10W 47k ohm
R18	119-2231-15	1/10W 22k ohm
R19	119-2231-15	1/10W 22k ohm
R20	119-4721-15	1/10W 4.7k ohm
R21	119-4731-15	1/10W 47k ohm
R22	119-4731-15	1/10W 47k ohm
R23	119-4731-15	1/10W 47k ohm
R24	050-0145-58	1/16W 2.2k ohm x4
R25	119-4721-15	1/10W 4.7k ohm
R26	119-4721-15	1/10W 4.7k ohm
R27	117-7511-15	1/8W 750 ohm
R28	116-3391-15	1/4W 3.3 ohm
R29	032-0145-73	1/2W 6.8 ohm
R30	119-1041-15	1/10W 100k ohm
R31	119-6811-15	1/10W 680 ohm
R32	119-1041-15	1/10W 100k ohm
R33	119-6811-15	1/10W 680 ohm
R34	119-1041-15	1/10W 100k ohm
R35	117-5611-15	1/8W 560 ohm
R36	119-1041-15	1/10W 100k ohm
R37	119-1041-15	1/10W 100k ohm
R38	119-3321-15	1/10W 3.3k ohm
R39	119-1051-15	1/10W 1M ohm
R40	119-0000-05	1/10W 0 ohm JW
R41	119-1041-15	1/10W 100k ohm
R42	119-5621-15	1/10W 5.6k ohm
R43	119-4731-15	1/10W 47k ohm
R44	119-2231-15	1/10W 22k ohm
R45	119-8231-15	1/10W 82k ohm
R46	119-3341-15	1/10W 330k ohm
R48	119-2231-15	1/10W 22k ohm
R49	116-1001-15	1/4W 10 ohm
R50	119-1011-15	1/10W 100 ohm
R51	119-6811-15	1/10W 680 ohm
R52	117-7511-15	1/8W 750 ohm
R53	116-5611-15	1/4W 560 ohm
R54	119-1041-15	1/10W 100k ohm
R55	119-1041-15	1/10W 100k ohm
R56	119-1041-15	1/10W 100k ohm
R57	119-1041-15	1/10W 100k ohm
R58	119-1041-15	1/10W 100k ohm
R59	116-1511-15	1/4W 150 ohm
R60	119-4731-15	1/10W 47k ohm
R61	119-4731-15	1/10W 47k ohm
R62	119-1051-15	1/10W 1M ohm
R64	032-0140-62	1/10W 1.0k ohm F
R65	119-2211-15	1/10W 220 ohm
R66	032-0140-53	1/10W 2.2k ohm F
R71	119-1011-15	1/10W 100 ohm
R72	119-1011-15	1/10W 100 ohm
R73	119-1011-15	1/10W 100 ohm
R77	119-0000-05	1/10W 0 ohm JW
R82	119-1011-15	1/10W 100 ohm
R83	119-1031-15	1/10W 10k ohm
R85	119-1021-15	1/10W 1k ohm
R86	119-2231-15	1/10W 22k ohm
S1	013-7416-50	SW SPVL110200
S2	013-7416-50	SW SPVL110200
S3	013-7416-50	SW SPVL110200
S4	013-7415-50	SPVG110400
X1	061-3534-90	16.92MHz
X3	060-1545-90	20MHz
PWB	039-2747-21	PWB(WITHOUT COMPONENTS)

Sensor-L-PFC(BM2)

REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F
PT2	060-0252-01	PT14850F
PT3	051-5833-00	GP1S093HCZ
PWB	039-2467-21	PWB(WITHOUT COMPONENTS)

Sensor-U-PFC(BM3)

REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804
LED2	001-7077-00	GL4804
LED3	001-7077-00	GL4804
S5	013-7417-50	ABC1122P161
PWB	039-2466-20	PWB(WITHOUT COMPONENTS)