# EXPLODED VIEW (UNIT)

Block No.200

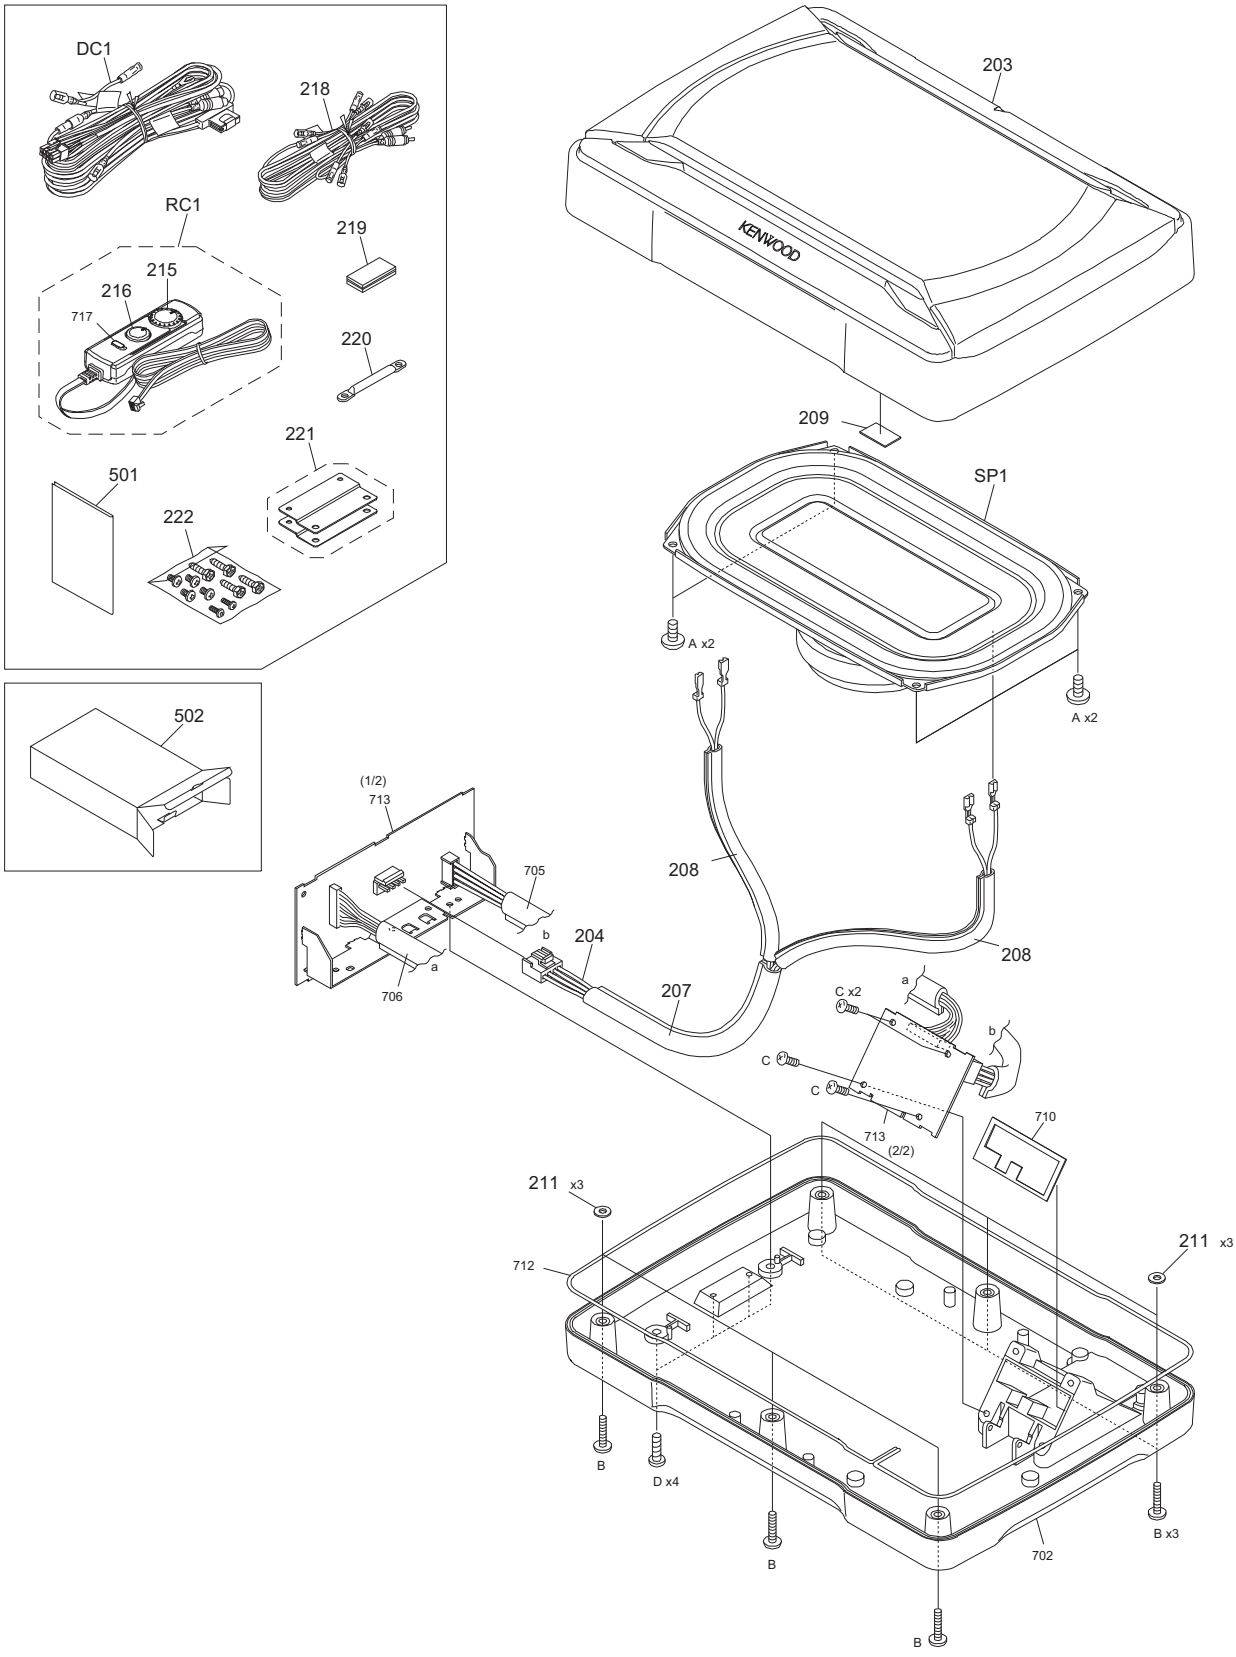


Parts with the exploded numbers larger than 700 are not supplied.

No.WA084

created date:2013-05-15

| MODEL | MARK |
|---|---|
| KSC-SW11 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| EXPLODED VIEW (UNIT) <200> | | | | | | |
| | DC1 | W01-2252-04 | DC CORD | | 1 | |
| | RC1 | A70-0421-04 | REMOCON ASSY | | 1 | |
| | SP1 | T10-1387-02 | WOOFER UNIT | | 1 | |
| | A | N82-4008-44 | BINDING HEAD TAPTITE SCREW | | 4 | |
| | B | N82-4016-43 | BINDING HEAD TAPTITE SCREW | | 6 | |
| | C | N09-3977-05 | MINI SCREW | M3X8 | 4 | |
| | D | N09-3972-05 | MINI SCREW | M3X12 | 4 | |
| | 203 | A02-4514-03 | CASE ASSY | | 1 | |
| | 204 | E30-8116-03 | CORD WITH CONNECTOR | | 1 | |
| | 207 | G13-3143-05 | CUSHION | | 1 | |
| | 208 | G13-3146-05 | CUSHION | | 2 | |
| | 209 | G53-2019-04 | PACKING | | 1 | |
| | 211 | G53-2021-04 | PACKING | | 6 | |
| | 215 | K28-0008-04 | KNOB (VOL) | | 1 | |
| | 216 | K28-0009-04 | KNOB (FREQUENCY) | | 1 | |
| | 218 | W01-2253-04 | SPEAKER CORD | | 1 | |
| | 219 | J69-0802-04 | LOOP FASTENER | | 1 | |
| | 220 | W01-2255-04 | CLAMPER | | 1 | |
| | 221 | W01-2254-04 | BRACKET SET | | 1 | |
| | 222 | N99-2437-04 | SCREW SET | | 1 | |
| | 501 | B61-1376-00 | INST BOOK | | 1 | |
| | 502 | H51-2652-03 | CARTON | | 1 | |

| MODEL | MARK |
|---|---|
| KSC-SW11 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| AUDIO UNIT (X09-9170-00) <X09> | | | | | | |
| | IC1 | NJM2794RB2ZB | ANALOGUE IC | TVSP10PIN LF | 1 | |
| | IC3 | NJM4565E-ZB | ANALOGUE IC | | 1 | |
| | IC4 | NJM2172V-ZBTE2 | ANALOGUE IC | | 1 | |
| | IC5 | BA10358F | ANALOGUE IC | | 1 | |
| | IC6 | BA10358F | ANALOGUE IC | | 1 | |
| | IC7 | E-TDA7850A | ANALOGUE IC | | 1 | |
| | IC8 | NJM2172V-ZBTE2 | ANALOGUE IC | | 1 | |
| | IC9 | NJM4565E-ZB | ANALOGUE IC | | 1 | |
| | Q1 | KTC3227-P | TRANSISTOR | | 1 | |
| | Q2 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q4 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q5 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q6 | KTB1241-P | TRANSISTOR | | 1 | |
| | Q7 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q8 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q9 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q10 | 2SA1576A | TRANSISTOR | | 1 | |
| | Q11 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q14 | RT1P141M-T111 | TRANSISTOR | | 1 | |
| | Q16 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | D5 | S2V60-5009F46 | DIODE | | 1 | |
| | D6 | RKZ9.1KG(B2) | ZENER DIODE | | 1 | |
| | D7 | LM1MA142WA-G | DIODE | | 1 | |
| | D8 | LM1MA142WA-G | DIODE | | 1 | |
| | D9 | LM1MA142WK-G | DIODE | | 1 | |
| | D10 | LM1MA142WK-G | DIODE | | 1 | |
| | D11 | RKZ5.6KG(B2) | ZENER DIODE | | 1 | |
| | D12 | HSU119TRF-E | DIODE | | 1 | |
| | D13 | HSU119TRF-E | DIODE | | 1 | |
| | D14 | RKZ15KG(B2) | ZENER DIODE | | 1 | |
| | D15 | RKZ5.6KG(B2) | ZENER DIODE | | 1 | |
| | D16 | HSU119TRF-E | DIODE | | 1 | |
| | D17 | RKZ6.2KG(B2) | ZENER DIODE | | 1 | |
| | D18 | UDZS4.3B | ZENER DIODE | | 1 | |
| | D19 | HSU119TRF-E | DIODE | | 1 | |
| | D20 | RKZ6.8KG(B2) | ZENER DIODE | | 1 | |
| | D21 | HSU119TRF-E | DIODE | | 1 | |
| | D22 | LM1MA142WK-G | DIODE | | 1 | |
| | D23 | LM1MA142WA-G | DIODE | | 1 | |
| | C1 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C2 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C3 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C4 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C6 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C8 | CD04AZ1V101M | ELECTRO | 100UF 35V M | 1 | |
| | C9 | CK73GB1H102K | CHIP C | 1000PF 50V K | 1 | |
| | C10 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C11 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C12 | CD04AZ1V101M | ELECTRO | 100UF 35V M | 1 | |
| | C13 | CK73EB1E105K | CHIP C | 1.0UF 25V K | 1 | |
| | C14 | CK73EB1E105K | CHIP C | 1.0UF 25V K | 1 | |
| | C15 | CK73EB1E105K | CHIP C | 1.0UF 25V K | 1 | |
| | C16 | CK73EB1E105K | CHIP C | 1.0UF 25V K | 1 | |
| | C17 | CD04BJ1C471M | ELECTRO | 470UF 16V M | 1 | |
| | C18 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C19 | C90-7033-05 | ALUMINIUM ELECTRO | 4700UF 16V | 1 | |
| | C20 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C22 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C23 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C24 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C25 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C28 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C29 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C31 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C32 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C33 | CD04AZ1V101M | ELECTRO | 100UF 35V M | 1 | |
| | C34 | CD04BN1C101M | ELECTRO | 100UF 16V M | 1 | |
| | C35 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C36 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C37 | CD04BN1H010M | ALUMINIUM ELECTRO | 1.0UF 50V M | 1 | |
| | C38 | CD04BN1C101M | ELECTRO | 100UF 16V M | 1 | |
| | C39 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C40 | CD04BN1H330M | ELECTRO | 33UF 50V M | 1 | |
| | C41 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C42 | CC73GCH1H102J | CHIP C | 1000PF J | 1 | |
| | C43 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C44 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C45 | CC73GCH1H102J | CHIP C | 1000PF J | 1 | |
| | C46 | CD04AZ1H010M | ELECTRO | 1.0UF 50V M | 1 | |
| | C47 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C48 | CC73GCH1H102J | CHIP C | 1000PF J | 1 | |
| | C50 | CK73EB1H225K | CHIP C | 2.2UF 50V K | 1 | |
| | C51 | CD04BN1C101M | ELECTRO | 100UF 16V M | 1 | |
| | C52 | CD04BN1H010M | ALUMINIUM ELECTRO | 1.0UF 50V M | 1 | |
| | C54 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C55 | CD04AZ1H330M | ELECTRO | 33UF 50V M | 1 | |
| | C56 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C57 | CD04BJ1H0R1M | ELECTRO | 0.1UF 50V M | 1 | |
| | C59 | CD04BN1H100M | ELECTRO | 10UF 50V M | 1 | |
| | C60 | CD04BJ1H0R1M | ELECTRO | 0.1UF 50V M | 1 | |
| | C61 | CD04BN1C101M | ELECTRO | 100UF 16V M | 1 | |

| MODEL | MARK |
|---|---|
| KSC-SW11 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C62 | CD04AZ1HR47M | ELECTRO | 0.47UF 50V M | 1 | |
| | C64 | CK73GB1E154K | CHIP C | 0.15UF 25V K | 1 | |
| | C66 | CK73EB1H225K | CHIP C | 2.2UF 50V K | 1 | |
| | C68 | CK73GB1H104K | CHIP C | 0.10UF 50V K | 1 | |
| | C69 | CC73GCH1H102J | CHIP C | 1000PF J | 1 | |
| | C70 | CK73GB1C333K | CHIP C | 0.15UF 25V K | 1 | |
| | C71 | CK73GB1H103K | CHIP C | 0.010UF 50V K | 1 | |
| | C73 | CK73FB1C105K | CHIP C | 0.15UF 25V K | 1 | |
| | C74 | CK73FB1C105K | CHIP C | 0.15UF 25V K | 1 | |
| | C75 | CD04BJ1H0R1M | ELECTRO | 0.1UF 50V M | 1 | |
| | C76 | CD04BJ1H0R1M | ELECTRO | 0.1UF 50V M | 1 | |
| | R1 | RK73EB2E101J | CHIP R | 100 J 1/4W | 1 | |
| | R2 | RK73EB2E101J | CHIP R | 100 J 1/4W | 1 | |
| | R3 | RK73EB2E101J | CHIP R | 100 J 1/4W | 1 | |
| | R6 | RK73EB2E101J | CHIP R | 100 J 1/4W | 1 | |
| | R7 | RK73EB2E510J | CHIP R | 51 J 1/4W | 1 | |
| | R8 | RK73EB2E510J | CHIP R | 51 J 1/4W | 1 | |
| | R11 | RK73GH2A471D | CHIP R | 470 D 1/10W | 1 | |
| | R12 | RK73GH2A471D | CHIP R | 470 D 1/10W | 1 | |
| | R13 | RK73GH2A471D | CHIP R | 470 D 1/10W | 1 | |
| | R14 | RK73GH2A471D | CHIP R | 470 D 1/10W | 1 | |
| | R15 | RK73GB2A471J | CHIP R | 470 J 1/10W | 1 | |
| | R16 | RK73GB2A303J | CHIP R | 30K J 1/10W | 1 | |
| | R17 | RK73GB2A303J | CHIP R | 30K J 1/10W | 1 | |
| | R18 | RK73GB2A471J | CHIP R | 470 J 1/10W | 1 | |
| | R19 | RK73EB2E162J | CHIP R | 1.6K J 1/4W | 1 | |
| | R20 | RK73EB2E162J | CHIP R | 1.6K J 1/4W | 1 | |
| | R24 | RK73GB2A102J | CHIP R | 1.0K J 1/10W | 1 | |
| | R26 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R27 | RK73GB2A472J | CHIP R | 4.7K J 1/10W | 1 | |
| | R28 | RK73GB2A472J | CHIP R | 4.7K J 1/10W | 1 | |
| | R30 | RK73GB2A392J | CHIP R | 3.9K J 1/10W | 1 | |
| | R35 | RK73GB2A472J | CHIP R | 4.7K J 1/10W | 1 | |
| | R38 | RK73GB2A152J | CHIP R | 1.5K J 1/10W | 1 | |
| | R39 | RK73GB2A102J | CHIP R | 1.0K J 1/10W | 1 | |
| | R42 | RK73GB2A332J | CHIP R | 3.3K J 1/10W | 1 | |
| | R43 | RK73GB2A162J | CHIP R | 1.6K J 1/10W | 1 | |
| | R44 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R45 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R46 | RK73GB2A332J | CHIP R | 3.3K J 1/10W | 1 | |
| | R47 | RK73GB2A102J | CHIP R | 1.0K J 1/10W | 1 | |
| | R48 | RK73GB2A222J | CHIP R | 2.2K J 1/10W | 1 | |
| | R49 | RK73EB2E152J | CHIP R | 1.5K J 1/4W | 1 | |
| | R50 | RK73GB2A272J | CHIP R | 2.7K J 1/10W | 1 | |
| | R51 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R52 | RK73GB2A223J | CHIP R | 22K J 1/10W | 1 | |
| | R53 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R54 | RK73GB2A102J | CHIP R | 1.0K J 1/10W | 1 | |
| | R55 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R56 | RK73GB2A223J | CHIP R | 22K J 1/10W | 1 | |
| | R57 | RK73GB2A104J | CHIP R | 100K J 1/10W | 1 | |
| | R58 | RK73EB2E100J | CHIP R | 10 J 1/4W | 1 | |
| | R59 | RK73GB2A333J | CHIP R | 33K J 1/10W | 1 | |
| | R60 | RK73GB2A223J | CHIP R | 22K J 1/10W | 1 | |
| | R61 | RK73GB2A242J | CHIP R | 2.4K J 1/10W | 1 | |
| | R62 | RK73GB2A203J | CHIP R | 20K J 1/10W | 1 | |
| | R63 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R64 | RK73GB2A562J | CHIP R | 5.6K J 1/10W | 1 | |
| | R65 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R66 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R67 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R69 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R70 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R71 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R72 | RK73GB2A123J | CHIP R | 12K J 1/10W | 1 | |
| | R73 | RK73GB2A113J | CHIP R | 11K J 1/10W | 1 | |
| | R74 | RK73GB2A203J | CHIP R | 20K J 1/10W | 1 | |
| | R75 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R80 | RK73GB2A104J | CHIP R | 100K J 1/10W | 1 | |
| | R83 | RK73GB2A472J | CHIP R | 4.7K J 1/10W | 1 | |
| | R84 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R87 | RK73GB2A473J | CHIP R | 47K J 1/10W | 1 | |
| | R88 | RK73GB2A622J | CHIP R | 6.2K J 1/10W | 1 | |
| | R89 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R90 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R91 | RK73GB2A622J | CHIP R | 6.2K J 1/10W | 1 | |
| | R92 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R96 | RK73GB2A622J | CHIP R | 6.2K J 1/10W | 1 | |
| | R97 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R98 | RK73GB2A152J | CHIP R | 1.5K J 1/10W | 1 | |
| | R99 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | R100 | RK73GB2A103J | CHIP R | 10K J 1/10W | 1 | |
| | L1 | L33-2518-05 | CHOCK COIL | | 1 | |
| | CN6 | E41-1734-05 | PIN ASSY | | 1 | |
| | J1 | E58-1015-05 | RECTANGULAR PLUG | 10PIN | 1 | |
| | J2 | E58-1014-05 | RECTANGULAR PLUG | 6PIN | 1 | |
| | TH1 | PRF18BE471QS2 | POSITIVE RESISTOR | PB-FREE | 1 | |