


# EXPLODED VIEW (UNIT)

Block No.M1MM

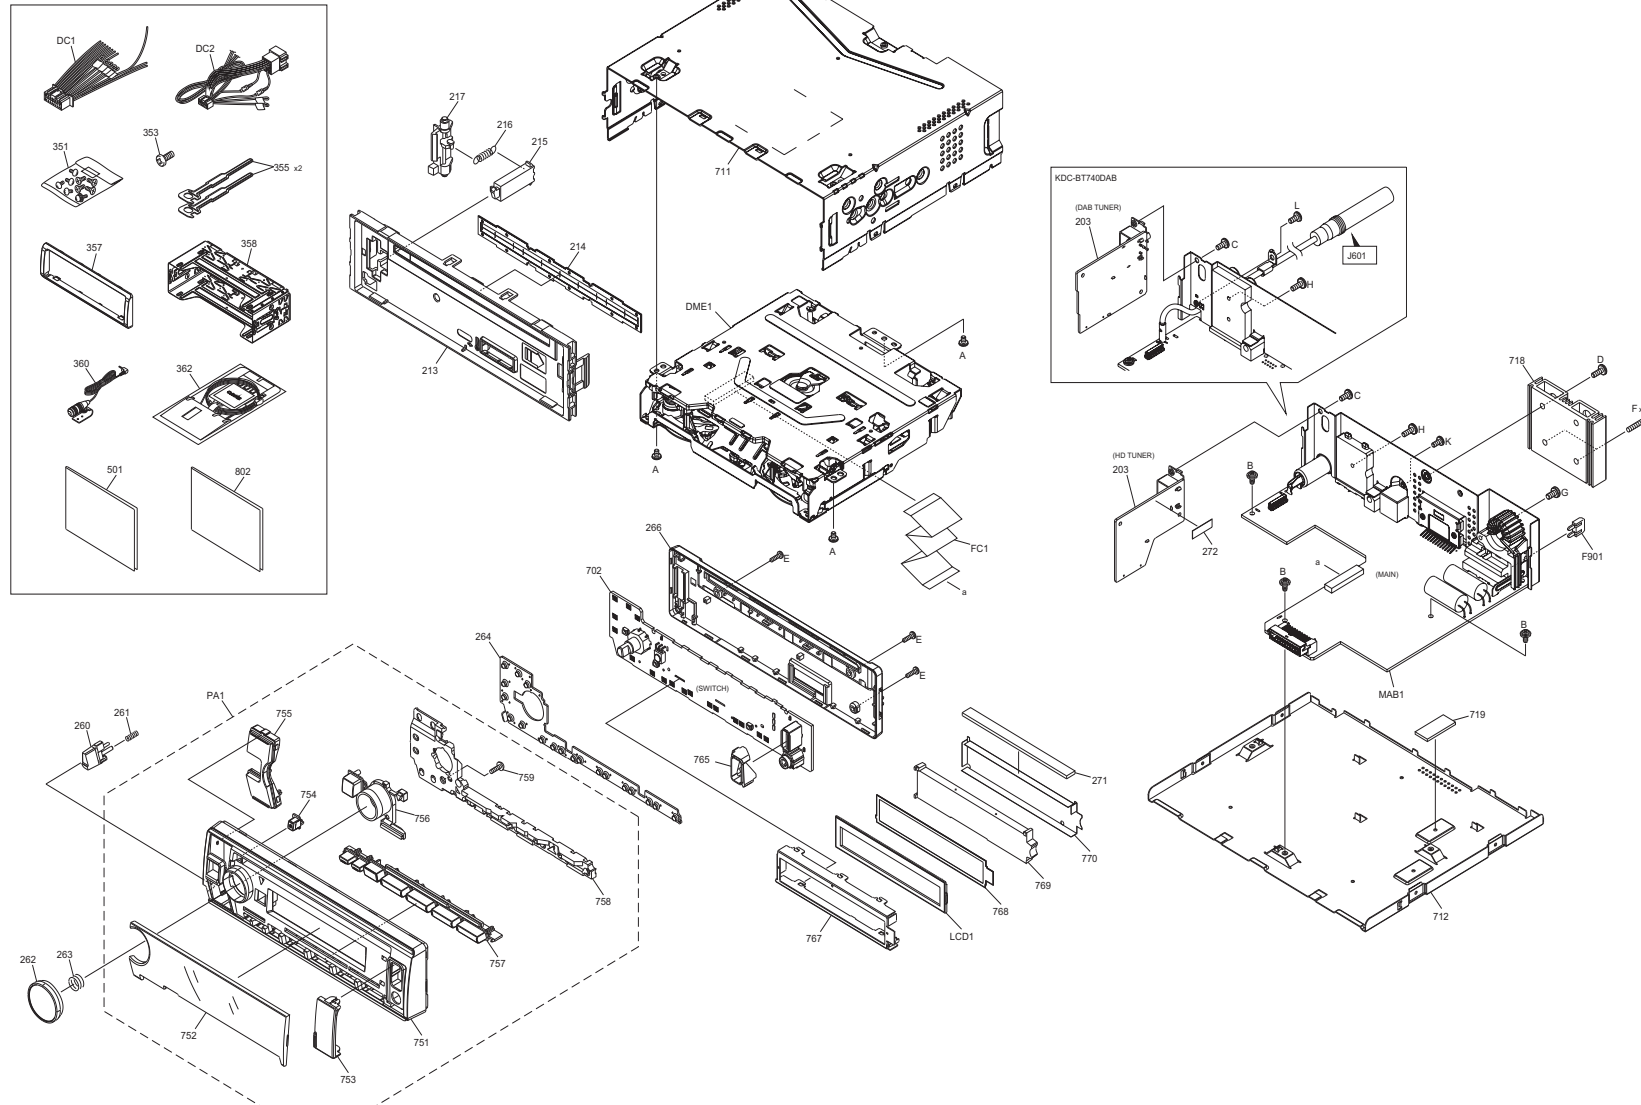

Parts with the exploded numbers larger than 700 are not supplied.

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe                        | Symbol No. | Parts No.     | Parts Name      | Description     | QTY | Local    |
|-----------------------------|------------|---------------|-----------------|-----------------|-----|----------|
| EXPLODED VIEW (UNIT) <M1MM> |            |               |                 |                 |     |          |
| △                           | DC1        | E3A-0324-00   | DC CORD         |                 | 1   | X1,K1,K0 |
| △                           | DC2        | E3A-0320-00   | DC CORD         |                 | 1   | E1       |
|                             | MAB1       | CB-XJ1282E01N | MAIN PWB        | XJ1-282E-01     | 1   | E1       |
|                             | MAB1       | CB-XJ1282X01N | MAIN PWB        | XJ1-282X-01     | 1   | X1       |
|                             | MAB1       | CB-XJ1282K01N | MAIN PWB        | XJ1-282K-01     | 1   | K1       |
|                             | MAB1       | CB-XJ1282K00N | MAIN PWB        | XJ1-282K-00     | 1   | K0       |
|                             | DME1       | XJJ-070W-00   | CD MECHANISM    |                 | 1   |          |
| △                           | F901       | FZB10BT-100   | BLADE FUSE      |                 | 1   |          |
|                             | FC1        | E3G-0112-00   | FFC WIRE        |                 | 1   |          |
|                             | LCD1       | B3H-0102-00   | LCD             |                 | 1   |          |
|                             | PA1        | A6D-0157-02   | PANEL ASSY      |                 | 1   | E1       |
|                             | PA1        | A6D-0157-03   | PANEL ASSY      |                 | 1   | X1       |
|                             | PA1        | A6D-0122-0Z   | PANEL ASSY      |                 | 1   | K1       |
|                             | PA1        | A6D-0122-0Y   | PANEL ASSY      |                 | 1   | K0       |
|                             | A          | QYSDST2604ZA  | TAP SCREW       | M2.6 x 4.0mm    | 3   |          |
|                             | B          | LV41200-004A  | SPECIAL SCREW   |                 | 3   |          |
|                             | C          | QYSDST2606ZA  | TAP SCREW       | M2.6 x 6.0mm    | 1   |          |
|                             | D          | QYSDST2608ZA  | TAP SCREW       | M2.6 x 8.0mm    | 1   |          |
|                             | E          | QYSDSF2008ZA  | TAP SCREW       | M2.0 x 8.0mm    | 3   |          |
|                             | F          | QYSDST2610ZA  | TAP SCREW       | M2.6 x 10.0mm   | 2   |          |
|                             | G          | QYSPSG3008ZA  | TAP SCREW       | M3.0 x 8.0mm    | 1   |          |
|                             | H          | QYSDSF2608ZA  | TAP SCREW       | M2.6 x 8.0mm    | 1   |          |
|                             | K          | QYSDST2606ZA  | TAP SCREW       | M2.6 x 6.0mm    | 1   | K1,K0    |
|                             | L          | QYSDST2606ZA  | TAP SCREW       | M2.6 x 6.0mm    | 1   | E1,X1    |
|                             | 203        | XJH-200K-00   | HD TUNER        | XJM-028K-00     | 1   | K1,K0    |
|                             | 203        | XJH-201E-00   | DAB TUNER       | XJM-029E-00     | 1   | E1,X1    |
|                             | 213        | A2C-0067-05   | SUB PANEL       |                 | 1   |          |
|                             | 214        | F1K-0050-00   | BLIND PLATE     |                 | 1   |          |
|                             | 215        | D1A-0023-00   | LEVER           |                 | 1   |          |
|                             | 216        | G0A-0027-00   | EXTEN.SPRING    |                 | 1   |          |
|                             | 217        | D1A-0022-00   | LEVER           |                 | 1   |          |
|                             | 260        | K2K-0388-00   | KNOB            |                 | 1   |          |
|                             | 261        | GE30999-013A  | COMP. SPRING    |                 | 1   |          |
|                             | 262        | K2K-0215-01   | KNOB BASE       |                 | 1   |          |
|                             | 263        | GE40127-005A  | KNOB SPRING     |                 | 1   |          |
|                             | 264        | E2K-0069-00   | CONDUCT RUBBER  |                 | 1   |          |
|                             | 266        | A4G-0095-00   | REAR COVER      |                 | 1   |          |
|                             | 271        | E2K-0029-00   | CONDUCT RUBBER  |                 | 1   |          |
|                             | 272        | F1C-0133-01   | SHIELDING SHEET |                 | 1   | K1,K0    |
|                             | 351        | GE40531-001A  | SCREW SET       |                 | 1   | K1,K0    |
|                             | 353        | QYSPSF2008ZA  | TAP SCREW       | M2.0 x 8.0mm    | 1   | K1,K0    |
|                             | 355        | GE40685-001A  | HOOK            |                 | 2   |          |
|                             | 357        | B0H-0013-06   | ESCUTCHEON      |                 | 1   | E1,X1,K0 |
|                             | 357        | B0H-0014-00   | ESCUTCHEON      |                 | 1   | K1       |
|                             | 358        | GE20362-002A  | MOUNTING SLEEVE |                 | 1   |          |
|                             | 360        | T9B-0073-00   | MICROPHONE      |                 | 1   |          |
|                             | 362        | T9A-0056-00   | ANTENNA ASSY    |                 | 1   | E1,X1    |
|                             | 501        | B5A-3138-00   | INST.MANUAL     |                 | 1   | X1       |
|                             | 702        | -----         | SWITCH PWB      | NO SERVICE PART | 1   | E1,X1    |
|                             | 702        | -----         | SWITCH PWB      | NO SERVICE PART | 1   | K1,K0    |
|                             | 711        | -----         | TOP COVER       | NO SERVICE PART | 1   | E1       |
|                             | 711        | -----         | TOP COVER       | NO SERVICE PART | 1   | X1,K1,K0 |
|                             | 712        | -----         | BOTTOM PLATE    | NO SERVICE PART | 1   |          |
|                             | 718        | -----         | HEAT SINK       | NO SERVICE PART | 1   |          |
|                             | 719        | -----         | COOL SHEET      | NO SERVICE PART | 1   |          |
|                             | 751        | -----         | PANEL           | NO SERVICE PART | 1   | E1,X1,K0 |
|                             | 751        | -----         | PANEL           | NO SERVICE PART | 1   | K1       |
|                             | 752        | -----         | FRONT GLASS     | NO SERVICE PART | 1   | E1       |
|                             | 752        | -----         | FRONT GLASS     | NO SERVICE PART | 1   | X1       |
|                             | 752        | -----         | FRONT GLASS     | NO SERVICE PART | 1   | K1       |
|                             | 752        | -----         | FRONT GLASS     | NO SERVICE PART | 1   | K0       |
|                             | 753        | -----         | COVER           | NO SERVICE PART | 1   |          |
|                             | 754        | -----         | PUSH KNOB       | NO SERVICE PART | 1   |          |
|                             | 755        | -----         | KNOB ASSY       | NO SERVICE PART | 1   | E1       |
|                             | 755        | -----         | KNOB ASSY       | NO SERVICE PART | 1   | X1,K1,K0 |
|                             | 756        | -----         | PUSH KNOB       | NO SERVICE PART | 1   |          |
|                             | 757        | -----         | PUSH KNOB       | NO SERVICE PART | 1   |          |
|                             | 758        | -----         | LIGHTING BOARD  | NO SERVICE PART | 1   |          |
|                             | 759        | -----         | TAP SCREW       | NO SERVICE PART | 1   |          |
|                             | 765        | -----         | LIGHTING BOARD  | NO SERVICE PART | 1   |          |
|                             | 767        | -----         | LCD CASE        | NO SERVICE PART | 1   |          |
|                             | 768        | -----         | OPTI.DIFFUSER   | NO SERVICE PART | 1   |          |
|                             | 769        | -----         | LIGHTING BOARD  | NO SERVICE PART | 1   |          |
|                             | 770        | -----         | REF.SHEET       | NO SERVICE PART | 1   |          |
|                             | 802        | -----         | SUB-INST.MANUAL | NO SERVICE PART | 1   | E1       |
|                             | 802        | -----         | SUB-INST.MANUAL | NO SERVICE PART | 1   | K1,K0    |


# EXPLODED VIEW (CD MECHANISM: XJJ-070W-00/FC2-3B00NXN)

Block No.MBMM

Grease

★W01-1738-08

●W01-2067-08

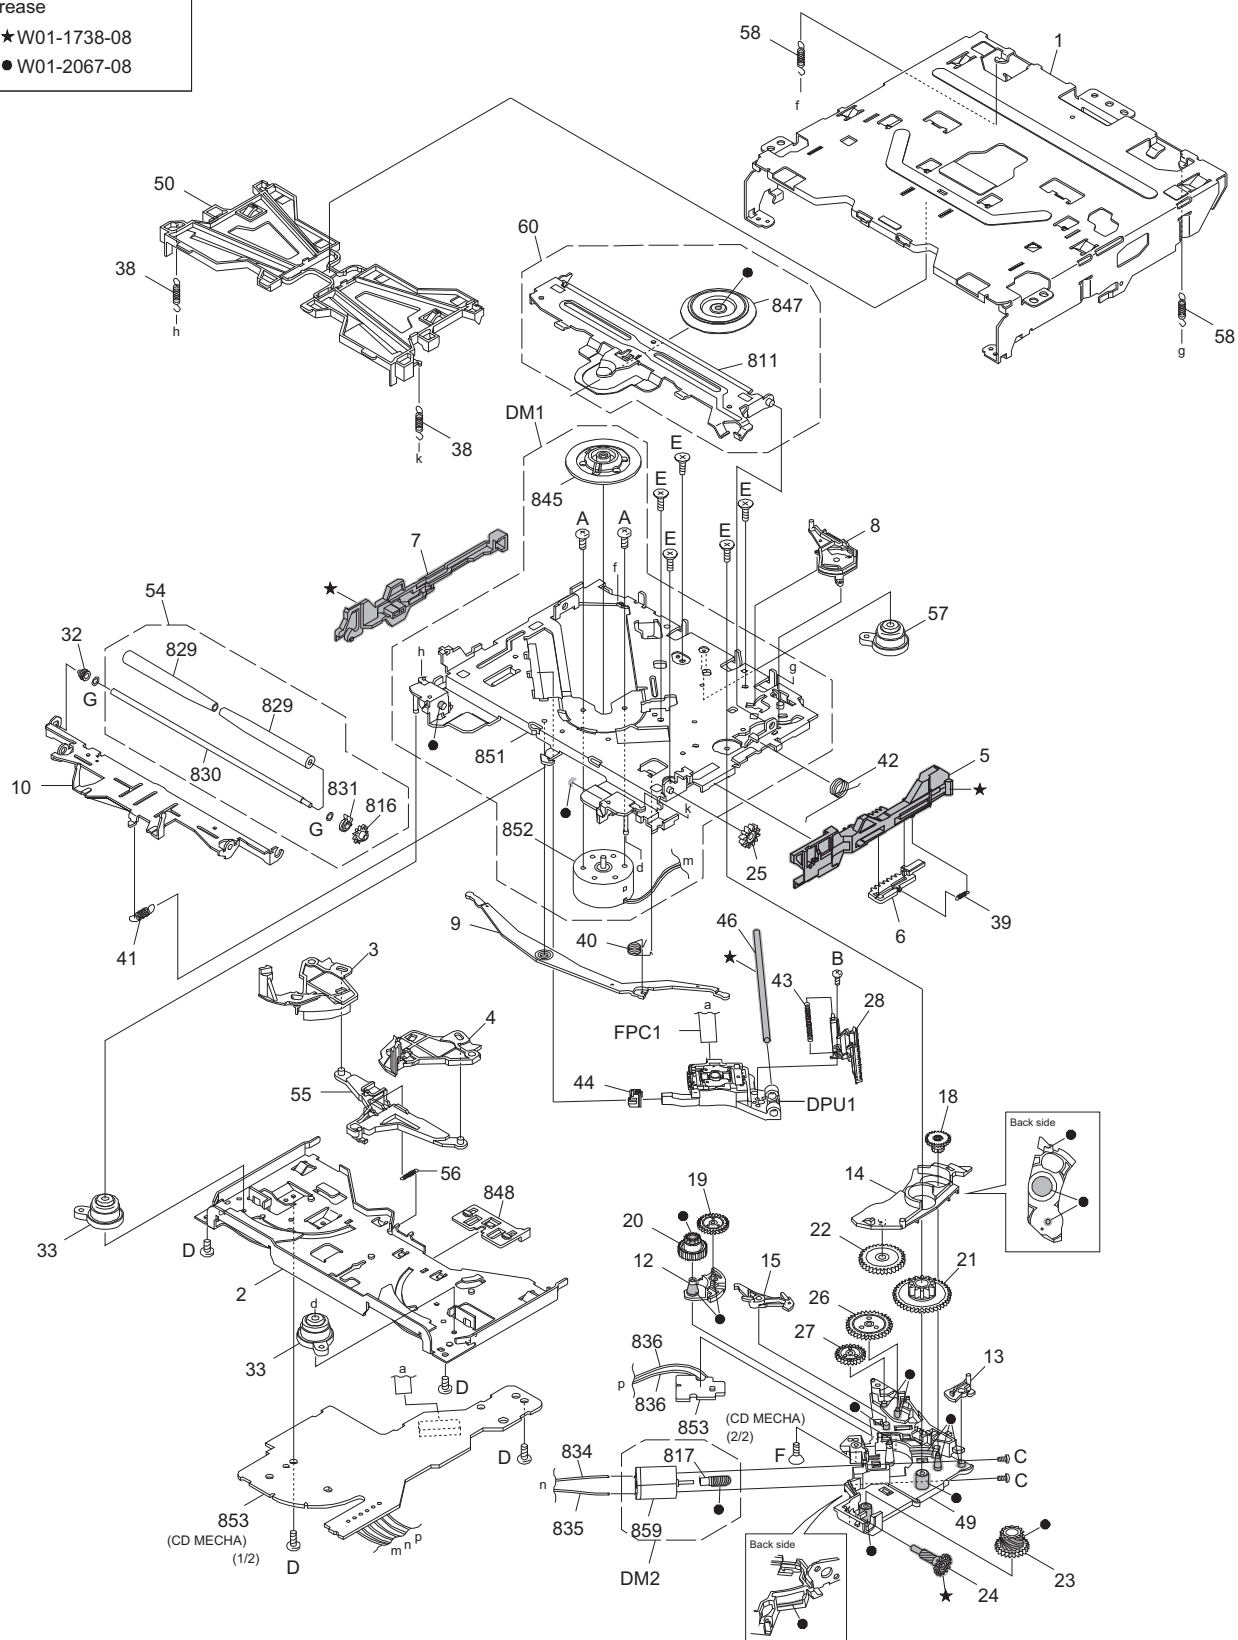

Parts with the exploded numbers larger than 800 are not supplied.

No.WA420

created date:2019-10-24

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe                                             | Symbol No. | Parts No.     | Parts Name      | Description     | QTY | Local |
|--------------------------------------------------|------------|---------------|-----------------|-----------------|-----|-------|
| EXPLODED VIEW (CD MECHANISM: XJJ-070W-00) <MBMM> |            |               |                 |                 |     |       |
|                                                  | DM1        | CM-FC2-MD     | MD CHASSIS ASSY |                 | 1   |       |
|                                                  | DM2        | CM-FC2-M      | LOAD MOTOR ASSY |                 | 1   |       |
|                                                  | DPU1       | T2F-0002-00   | CD OPT PICKUP   |                 | 1   |       |
|                                                  | FPC1       | QAL1465-001   | FPC             |                 | 1   |       |
|                                                  | A          | LV45568-001A  | MINI SCREW      |                 | 2   |       |
|                                                  | B          | QYSPSGT1745ZA | TAP SCREW       | M1.7 x 4.5mm    | 1   |       |
|                                                  | C          | QYSPSPT2025MA | SCREW           | M2.0 x 2.5mm    | 2   |       |
|                                                  | D          | VKZ4539-054   | MINI SCREW      |                 | 4   |       |
|                                                  | E          | LV45818-001A  | G.HOLDER SCREW  |                 | 5   |       |
|                                                  | F          | LV45815-001A  | M. SHAFT SCREW  |                 | 1   |       |
|                                                  | G          | LV45816-001A  | ROLLER WASHER   |                 | 2   |       |
|                                                  | 1          | LV11877-003A  | OUTER CHASSIS   |                 | 1   |       |
|                                                  | 2          | LV11878-006A  | LOWER CHASSIS   |                 | 1   |       |
|                                                  | 3          | LV3A174-002A  | DISC ARM L      |                 | 1   |       |
|                                                  | 4          | LV3A175-001A  | DISC ARM R      |                 | 1   |       |
|                                                  | 5          | LV23057-001A  | SLIDER R        |                 | 1   |       |
|                                                  | 6          | LV3A178-001A  | TRIGGER SLIDER  |                 | 1   |       |
|                                                  | 7          | LV23058-001A  | SLIDER L        |                 | 1   |       |
|                                                  | 8          | LV3A179-002A  | TRIGGER ARM     |                 | 1   |       |
|                                                  | 9          | LV3A173-001A  | JOINT LEVER     |                 | 1   |       |
|                                                  | 10         | LV23055-003A  | ROLLER LEVER    |                 | 1   |       |
|                                                  | 12         | LV3A181-002A  | TRANSFER ARM    |                 | 1   |       |
|                                                  | 13         | LV45797-002A  | SL LOCK CAM     |                 | 1   |       |
|                                                  | 14         | LV3A182-003A  | SL LOCK ARM     |                 | 1   |       |
|                                                  | 15         | LV3A183-001A  | PICK LOCK ARM   |                 | 1   |       |
|                                                  | 18         | LV3A187-002A  | HELICAL GEAR 1  |                 | 1   |       |
|                                                  | 19         | LV3A188-001A  | TRANSFER GEAR   |                 | 1   |       |
|                                                  | 20         | LV3A189-001A  | LOAD GEAR H     |                 | 1   |       |
|                                                  | 21         | LV3A190-001A  | DRIVE GEAR      |                 | 1   |       |
|                                                  | 22         | LV3A191-001A  | JOINT GEAR      |                 | 1   |       |
|                                                  | 23         | LV3A192-001A  | WORM GEAR 2     |                 | 1   |       |
|                                                  | 24         | LV3A193-001A  | HELICAL GEAR 2  |                 | 1   |       |
|                                                  | 25         | LV3A194-001A  | LOAD GEAR V     |                 | 1   |       |
|                                                  | 26         | LV3A195-001A  | PICK GEAR 1     |                 | 1   |       |
|                                                  | 27         | LV3A196-001A  | PICK GEAR 2     |                 | 1   |       |
|                                                  | 28         | LV3A197-001A  | RACK GEAR       |                 | 1   |       |
|                                                  | 32         | LV45796-001A  | R.RETAINER L    |                 | 1   |       |
|                                                  | 33         | D3K-0002-00   | DAMPER          |                 | 2   |       |
|                                                  | 38         | LV45809-001A  | FLOAT SPRING(F) |                 | 2   |       |
|                                                  | 39         | LV45810-001A  | TRIGGER SPRING  |                 | 1   |       |
|                                                  | 40         | LV45811-001A  | LOAD SPRING     |                 | 1   |       |
|                                                  | 41         | LV45812-001A  | ROLLER SPRING   |                 | 1   |       |
|                                                  | 42         | LV45813-002A  | CLAMP SPRING    |                 | 1   |       |
|                                                  | 43         | LV45814-001A  | PICK SPRING     |                 | 1   |       |
|                                                  | 44         | LV36813-302A  | SUB GUIDE CAP   |                 | 1   |       |
|                                                  | 46         | D2B-0037-00   | SHAFT           |                 | 1   |       |
|                                                  | 49         | LV11881-002A  | GEAR HOLDER     |                 | 1   |       |
|                                                  | 50         | LV11880-004A  | DISC GUIDE      |                 | 1   |       |
|                                                  | 54         | CM-FC2-R      | ROLLER ASSY     |                 | 1   |       |
|                                                  | 55         | D1A-0100-00   | ARM             |                 | 1   |       |
|                                                  | 56         | G0A-0138-00   | EXTEN.SPRING    |                 | 1   |       |
|                                                  | 57         | D3K-0003-00   | DAMPER          |                 | 1   |       |
|                                                  | 58         | LV45835-001A  | FLOAT SPRING(R) |                 | 2   |       |
|                                                  | 60         | LV3A271-002A  | CL BASE ASSY    |                 | 1   |       |
|                                                  | 811        | -----         | CLAMP ARM       | NO SERVICE PART | 1   |       |
|                                                  | 816        | -----         | ROLLER GEAR     | NO SERVICE PART | 1   |       |
|                                                  | 817        | -----         | WORM GEAR 1     | NO SERVICE PART | 1   |       |
|                                                  | 829        | -----         | ROLLER          | NO SERVICE PART | 2   |       |
|                                                  | 830        | -----         | ROLLER SHAFT    | NO SERVICE PART | 1   |       |
|                                                  | 831        | -----         | R.RETAINER R    | NO SERVICE PART | 1   |       |
|                                                  | 834        | -----         | SIN TWIST WIRE  | NO SERVICE PART | 1   |       |
|                                                  | 835        | -----         | SIN TWIST WIRE  | NO SERVICE PART | 1   |       |
|                                                  | 836        | -----         | SIN TWIST WIRE  | NO SERVICE PART | 2   |       |
|                                                  | 845        | -----         | HC TURN TABLE   | NO SERVICE PART | 1   |       |
|                                                  | 847        | -----         | CLAMPER         | NO SERVICE PART | 1   |       |
|                                                  | 848        | -----         | WIRE HOLDER     | NO SERVICE PART | 1   |       |
|                                                  | 851        | -----         | MD CHASSIS ASSY | NO SERVICE PART | 1   |       |
|                                                  | 852        | -----         | SPINDLE MOTOR   | NO SERVICE PART | 1   |       |
|                                                  | 853        | -----         | CD MECHA PWB    | NO SERVICE PART | 1   |       |
|                                                  | 859        | -----         | MOTOR           | NO SERVICE PART | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe                              | Symbol No. | Parts No.     | Parts Name      | Description    | QTY | Local |
|-----------------------------------|------------|---------------|-----------------|----------------|-----|-------|
| MAIN PWB ASSY (XJ1-282x-0x) <XJ1> |            |               |                 |                |     |       |
|                                   | IC161      | BD37069FV-M   | ANALOG IC       | BGA            | 1   | K1,K0 |
|                                   | IC162      | NJM111100F1   | ANALOG IC       |                | 1   |       |
|                                   | IC165      | NJW4190R-A    | ANALOG IC       |                | 1   |       |
|                                   | IC220      | NJM8065V      | ANALOG IC       |                | 1   |       |
|                                   | IC301      | JCV8034       | ANALOG IC       |                | 1   | K1,K0 |
|                                   | IC411      | MFI343S00177  | MCU IC          |                | 1   |       |
|                                   | IC470      | TC7SH08FUJC   | MOS IC          |                | 1   |       |
|                                   | IC540      | MP9943AGQ     | ANALOG IC       |                | 1   |       |
|                                   | IC701      | STA1080       | MPU IC          |                | 1   | E1,X1 |
|                                   | IC702      | TC7SH08FUJC   | MOS IC          |                | 1   |       |
|                                   | IC821      | W3F-0528-00   | ROM IC          |                | 1   |       |
|                                   | IC821      | W3F-0527-00   | ROM IC          |                | 1   |       |
|                                   | IC822      | W25Q16JVSSIM  | ROM IC          |                | 1   | K1,K0 |
|                                   | IC831      | IC-PST8428U   | MOS IC          |                | 1   |       |
|                                   | IC841      | IC-PST8428U   | MOS IC          |                | 1   |       |
|                                   | IC890      | TPS25221DBV   | MOS IC          |                | 1   |       |
|                                   | IC901      | BD49105RFS-M  | ANALOG IC       |                | 1   | E1,X1 |
|                                   | IC1901     | M12L2511A6BIS | DRAM IC         |                | 1   |       |
|                                   | Q220       | LSCR523UBFS8  | TRANSISTOR      |                | 1   |       |
|                                   | Q240       | IMX9          | DUAL TRANSISTOR |                | 1   |       |
|                                   | Q270       | LTA024EEBFS8  | DIGI TRANSISTOR | BGA            | 1   | K1,K0 |
|                                   | Q271       | LSAR523UBFS8  | TRANSISTOR      |                | 1   |       |
|                                   | Q272       | LTC024EEBFS8  | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q273       | LTA024EEBFS8  | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q274       | LTC024EEBFS8  | DIGI TRANSISTOR |                | 1   | K1,K0 |
|                                   | Q300       | IMX9          | DUAL TRANSISTOR |                | 1   |       |
|                                   | Q310       | IMX9          | DUAL TRANSISTOR |                | 1   |       |
|                                   | Q470       | LTC014EEBFS8  | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q471       | LTC043TEBFS8  | DIGI TRANSISTOR |                | 1   | E1,X1 |
|                                   | Q500       | LTC043EUBFS8  | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q901       | LTC014YEBFS8  | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q902       | RE1C002ZP     | FET             |                | 1   |       |
|                                   | Q903       | LTC014YEBFS8  | DIGI TRANSISTOR |                | 1   | K1,K0 |
|                                   | Q903       | KRC407E-P     | DIGI TRANSISTOR |                | 1   |       |
|                                   | Q904       | RE1C002ZP     | FET             |                | 1   |       |
|                                   | Q920       | LTA014YEBFS8  | DIGI TRANSISTOR |                | 1   | K1,K0 |
|                                   | Q960       | RQ6E030AT     | FET             |                | 1   |       |
|                                   | Q961       | KRC404P       | DIGI TRANSISTOR |                | 1   |       |
|                                   | D220       | UDZV6.8B      | ZENER DIODE     |                | 1   |       |
|                                   | D221       | UDZV6.8B      | ZENER DIODE     |                | 1   |       |
|                                   | D222       | UDZV5.6B      | ZENER DIODE     | BGA            | 1   | K1,K0 |
|                                   | D271       | BAW56-TP      | DIODE ARRAY     |                | 1   |       |
|                                   | D273       | 1SS355VM      | DIODE           |                | 1   |       |
|                                   | D370       | BAW56-TP      | DIODE ARRAY     |                | 1   |       |
|                                   | D390       | SM5818PL      | SCHOTTKY DIODE  |                | 1   | K1,K0 |
|                                   | D391       | MBR0530       | DIODE           |                | 1   |       |
|                                   | D400       | RB521SM-30    | DIODE           |                | 1   |       |
|                                   | D401       | UDZV5.1B      | ZENER DIODE     |                | 1   |       |
|                                   | D471       | RSB6.8SM      | ZENER DIODE     |                | 1   | K1,K0 |
|                                   | D472       | RSB6.8SM      | ZENER DIODE     |                | 1   |       |
|                                   | D473       | RSB6.8SM      | ZENER DIODE     |                | 1   |       |
|                                   | D474       | RSB6.8SM      | ZENER DIODE     |                | 1   |       |
|                                   | D475       | RSB6.8SM      | ZENER DIODE     |                | 1   | K1,K0 |
|                                   | D476       | RSB6.8SM      | ZENER DIODE     |                | 1   |       |
|                                   | D540       | SMD24PL       | SCHOTTKY DIODE  |                | 1   |       |
|                                   | D902       | SK34A-L       | SCHOTTKY DIODE  |                | 1   |       |
|                                   | D903       | SK34A-L       | SCHOTTKY DIODE  |                | 1   | E1,X1 |
|                                   | D904       | GS1J-LTP      | DIODE           |                | 1   |       |
|                                   | D905       | GS1J-LTP      | DIODE           |                | 1   |       |
|                                   | D906       | SK34A-L       | SCHOTTKY DIODE  |                | 1   |       |
|                                   | D907       | SK34A-L       | SCHOTTKY DIODE  | BGA            | 1   | K1,K0 |
|                                   | D908       | SK34A-L       | SCHOTTKY DIODE  |                | 1   |       |
|                                   | D911       | UDZV16B       | ZENER DIODE     |                | 1   |       |
|                                   | D991       | GN3XB         | DIODE           |                | 1   |       |
|                                   | C101       | CK73JXR1H332K | C CAPACITOR     | 3300pF 50V K   | 1   | K1,K0 |
|                                   | C102       | CK73JXR1H332K | C CAPACITOR     | 3300pF 50V K   | 1   |       |
|                                   | C103       | CK73GXR1C475K | C CAPACITOR     | 4.7uF 16V K    | 1   |       |
|                                   | C104       | CK73FXR1C106K | C CAPACITOR     | 10uF 16V K     | 1   |       |
|                                   | C105       | CK73GXR1C475K | C CAPACITOR     | 4.7uF 16V K    | 1   | K1,K0 |
|                                   | C106       | CK73HXR1A105K | C CAPACITOR     | 1uF 10V K      | 1   |       |
|                                   | C161       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   |       |
|                                   | C162       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   |       |
|                                   | C163       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   | K1,K0 |
|                                   | C164       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   |       |
|                                   | C165       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   |       |
|                                   | C166       | CE32BJ1V4R7M  | E CAPACITOR     | 4.7uF 35V M    | 1   |       |
|                                   | C167       | CK73GXR1C475K | C CAPACITOR     | 4.7uF 16V K    | 1   | K1,K0 |
|                                   | C168       | CK73GXR1C475K | C CAPACITOR     | 4.7uF 16V K    | 1   |       |
|                                   | C169       | CE32BY1C470M  | E CAPACITOR     | 47uF 16V M     | 1   |       |
|                                   | C170       | CE32CL1C100M  | E CAPACITOR     | 10uF 16V M     | 1   |       |
|                                   | C171       | CE32BM1E470M  | E CAPACITOR     | 47uF 25V M     | 1   | K1,K0 |
|                                   | C175       | CK73JXR1H103K | C CAPACITOR     | 0.01uF 50V K   | 1   |       |
|                                   | C177       | CK73GXR1A106K | C CAPACITOR     | 10uF 10V K     | 1   |       |
|                                   | C181       | CK73FXR1C106K | C CAPACITOR     | 10uF 16V K     | 1   |       |
|                                   | C183       | CK73GXR1C105K | C CAPACITOR     | 1uF 16V K      | 1   | K1,K0 |
|                                   | C187       | CK73HXR1C105K | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                                   | C188       | CK73GXR1E105K | C CAPACITOR     | 1uF 25V K      | 1   |       |
|                                   | C221       | CK73HXR1A105K | C CAPACITOR     | 1uF 10V K      | 1   |       |
|                                   | C222       | CK73JXR0J333K | C CAPACITOR     | 0.033uF 6.3V K | 1   | K1,K0 |
|                                   | C223       | CK73JXR0J333K | C CAPACITOR     | 0.033uF 6.3V K | 1   |       |
|                                   | C224       | CK73HXR1A105K | C CAPACITOR     | 1uF 10V K      | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
|      | C225       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C226       | CC73JCH1H220J | C CAPACITOR | 22pF 50V J    | 1   |       |
|      | C227       | CC73JCH1H151J | C CAPACITOR | 150pF 50V J   | 1   |       |
|      | C228       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C229       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C230       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C231       | CC73JCH1H151J | C CAPACITOR | 150pF 50V J   | 1   |       |
|      | C234       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C235       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C236       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C252       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C262       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | E1,X1 |
|      | C273       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C304       | CE32CL1E330M  | E CAPACITOR | 33uF 25V M    | 1   |       |
|      | C311       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C312       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C316       | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C317       | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C318       | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C319       | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C322       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C324       | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   |       |
|      | C332       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C342       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K0 |
|      | C352       | CK73EXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K0 |
|      | C370       | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C391       | CK73HXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C410       | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C411       | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C472       | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   | K1,K0 |
|      | C473       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | K1,K0 |
|      | C474       | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K   | 1   | K1,K0 |
|      | C475       | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K   | 1   | K1,K0 |
|      | C540       | CE32CC1A151M  | E CAPACITOR | 150uF 10V M   | 1   |       |
|      | C542       | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C543       | CK73HXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C544       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C545       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |       |
|      | C547       | CK73HXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C548       | CK73HXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C549       | CK73HXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C550       | CC73JCH1H150J | C CAPACITOR | 15pF 50V J    | 1   |       |
|      | C601       | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | K1,K0 |
|      | C625       | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C626       | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C627       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C628       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C680       | CK73GXR0J225K | C CAPACITOR | 2.2uF 6.3V K  | 1   |       |
|      | C701       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C702       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C703       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C704       | CC73JCH1H180J | C CAPACITOR | 18pF 50V J    | 1   |       |
|      | C705       | CC73JCH1H180J | C CAPACITOR | 18pF 50V J    | 1   |       |
|      | C706       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C707       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C708       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C710       | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   |       |
|      | C711       | CC73JCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |       |
|      | C713       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C714       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C715       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C716       | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C717       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C718       | CC73JCH1H470J | C CAPACITOR | 47pF 50V J    | 1   |       |
|      | C719       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C720       | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C721       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C722       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C723       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C724       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C725       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C726       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C727       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C728       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C729       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C730       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C731       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C733       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C735       | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C736       | CC73JCH1H070D | C CAPACITOR | 7pF 50V D     | 1   |       |
|      | C737       | CC73JCH1H080D | C CAPACITOR | 8pF 50V D     | 1   |       |
|      | C738       | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C740       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C741       | CC73JCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |       |
|      | C742       | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C745       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C746       | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C750       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C756       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C760       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C820       | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C821       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
|      | C824       | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C830       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C831       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C832       | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C841       | CK73HXR1A334K | C CAPACITOR | 0.33uF 10V K  | 1   |       |
|      | C842       | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C843       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C890       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C891       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C902       | CC73JCH1E391J | C CAPACITOR | 390pF 25V J   | 1   |       |
|      | C903       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C904       | CC73JCH1E271J | C CAPACITOR | 270pF 25V J   | 1   |       |
|      | C905       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C906       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C907       | CE32CC1A151M  | E CAPACITOR | 150uF 10V M   | 1   |       |
|      | C911       | CK73GXR1E105K | C CAPACITOR | 1uF 25V K     | 1   |       |
|      | C912       | CK73EXR1E106K | C CAPACITOR | 10uF 25V K    | 1   |       |
|      | C913       | CK73EXR1E106K | C CAPACITOR | 10uF 25V K    | 1   |       |
|      | C914       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C915       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C916       | CE32BY1C221M  | E CAPACITOR | 220uF 16V M   | 1   |       |
|      | C917       | CK73GXR1E105K | C CAPACITOR | 1uF 25V K     | 1   |       |
|      | C918       | CC73JCH1E391J | C CAPACITOR | 390pF 25V J   | 1   |       |
|      | C919       | CD040CZ1C222M | E CAPACITOR | 2200uF 16V M  | 1   |       |
|      | C935       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C943       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C944       | CE32CC1A151M  | E CAPACITOR | 150uF 10V M   | 1   |       |
|      | C945       | CC73JCH1E561J | C CAPACITOR | 560pF 25V J   | 1   |       |
|      | C946       | CK73GXR1E105K | C CAPACITOR | 1uF 25V K     | 1   |       |
|      | C947       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C948       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C949       | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K  | 1   |       |
|      | C950       | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C952       | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C954       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C960       | CK73HXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C990       | CD040CZ1C222M | E CAPACITOR | 2200uF 16V M  | 1   |       |
|      | C993       | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C1020      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1034      | CK73JXR0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C1301      | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C1305      | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C1306      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1902      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1903      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C1904      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1905      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1906      | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C1907      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1908      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1909      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C1910      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C2002      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C2008      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C2009      | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   |       |
|      | C2010      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C2025      | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C2027      | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C2037      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C2040      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C2041      | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C2048      | CK73HXR0J474K | C CAPACITOR | 0.47uF 6.3V K | 1   |       |
|      | C2075      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C2084      | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C2117      | CC73JCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C9001      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C9003      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   | K1,K0 |
|      | C9015      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C9020      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   | E1    |
|      | C9021      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   | E1    |
|      | C9022      | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C9023      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   | E1    |
|      | C9026      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9027      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C9028      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   | E1    |
|      | C9030      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C9033      | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K  | 1   |       |
|      | C9037      | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C9038      | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   |       |
|      | C9039      | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   |       |
|      | C9040      | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   | E1    |
|      | C9043      | CC73JCH1H100D | C CAPACITOR | 10pF 50V D    | 1   | K1,K0 |
|      | C9045      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9047      | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C9048      | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C9049      | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C9050      | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C9060      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   | E1    |
|      | C9061      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   | E1    |
|      | C9062      | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   | E1    |
|      | C9064      | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   | E1    |
|      | C9067      | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   | E1    |
|      | C9085      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
|      | C9086      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C9087      | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C9095      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | K1,K0 |
|      | C9101      | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K   | 1   |       |
|      | C9103      | CC73JCH1H220J | C CAPACITOR | 22pF 50V J    | 1   |       |
|      | C9120      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9130      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9131      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9132      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9201      | CC73JCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |       |
|      | C9202      | CC73JCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |       |
|      | C9203      | CC73JCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |       |
|      | C9204      | CC73JCH1H070D | C CAPACITOR | 7pF 50V D     | 1   |       |
|      | C9205      | CC73JCH1H070D | C CAPACITOR | 7pF 50V D     | 1   |       |
|      | C9518      | CK73JXR1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C9525      | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C9526      | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C9527      | CK73EXR1E106K | C CAPACITOR | 10uF 25V K    | 1   |       |
|      | C9530      | CC73JCH1H100D | C CAPACITOR | 10pF 50V D    | 1   | K1,K0 |
|      | C9531      | CC73JCH1H100D | C CAPACITOR | 10pF 50V D    | 1   | K1,K0 |
|      | C9532      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9533      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | R100       | RK73HB1J471J  | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R101       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R103       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R104       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R118       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R119       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R120       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R145       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R146       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R147       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R148       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R149       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R150       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R161       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R162       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R165       | RK73HH1J152D  | MG RESISTOR | 1.5kΩ 1/16W D | 1   |       |
|      | R166       | RK73HH1J822D  | MG RESISTOR | 8.2kΩ 1/16W D | 1   |       |
|      | R173       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R175       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   |       |
|      | R176       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   | K1,K0 |
|      | R177       | RK73HB1J562J  | MG RESISTOR | 5.6kΩ 1/16W J | 1   | K1,K0 |
|      | R178       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K0 |
|      | R179       | RK73HH1J102D  | MG RESISTOR | 1kΩ 1/16W D   | 1   | K1,K0 |
|      | R180       | RK73HH1J153D  | MG RESISTOR | 15kΩ 1/16W D  | 1   | K1,K0 |
|      | R181       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R188       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   | E1,X1 |
|      | R220       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R221       | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R222       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R223       | RK73HB1J822J  | MG RESISTOR | 8.2kΩ 1/16W J | 1   |       |
|      | R224       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R225       | RK73HB1J333J  | MG RESISTOR | 33kΩ 1/16W J  | 1   |       |
|      | R226       | RK73HB1J122J  | MG RESISTOR | 1.2kΩ 1/16W J | 1   |       |
|      | R227       | RK73HB1J124J  | MG RESISTOR | 120kΩ 1/16W J | 1   |       |
|      | R229       | RK73HB1J122J  | MG RESISTOR | 1.2kΩ 1/16W J | 1   |       |
|      | R230       | RK73HB1J124J  | MG RESISTOR | 120kΩ 1/16W J | 1   |       |
|      | R231       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R232       | RK73GB2A103J  | MG RESISTOR | 10kΩ 1/10W J  | 1   |       |
|      | R233       | RK73HB1J681J  | MG RESISTOR | 680Ω 1/16W J  | 1   |       |
|      | R234       | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R235       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R236       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R237       | RK73HB1J471J  | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R238       | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R250       | RK73HB1J181J  | MG RESISTOR | 180Ω 1/16W J  | 1   |       |
|      | R251       | RK73HB1J223J  | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R252       | RK73HB1J331J  | MG RESISTOR | 330Ω 1/16W J  | 1   |       |
|      | R253       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R254       | RK73HB1J472J  | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R260       | RK73HB1J181J  | MG RESISTOR | 180Ω 1/16W J  | 1   | E1,X1 |
|      | R261       | RK73HB1J223J  | MG RESISTOR | 22kΩ 1/16W J  | 1   | E1,X1 |
|      | R262       | RK73HB1J331J  | MG RESISTOR | 330Ω 1/16W J  | 1   | E1,X1 |
|      | R264       | RK73HB1J472J  | MG RESISTOR | 4.7kΩ 1/16W J | 1   | E1,X1 |
|      | R270       | RK73GB2A104J  | MG RESISTOR | 100kΩ 1/10W J | 1   |       |
|      | R271       | RK73HB1J331J  | MG RESISTOR | 330Ω 1/16W J  | 1   |       |
|      | R272       | RK73HB1J303J  | MG RESISTOR | 30kΩ 1/16W J  | 1   |       |
|      | R273       | RK73GB2A223J  | MG RESISTOR | 22kΩ 1/10W J  | 1   |       |
|      | R274       | RK73HB1J332J  | MG RESISTOR | 3.3kΩ 1/16W J | 1   |       |
|      | R302       | RK73HB1J432J  | MG RESISTOR | 4.3kΩ 1/16W J | 1   |       |
|      | R303       | RK73EB2E160J  | MG RESISTOR | 16Ω 1/4W J    | 1   |       |
|      | R304       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R305       | RK73EB2E1R0J  | MG RESISTOR | 1.0Ω 1/4W J   | 1   |       |
|      | R316       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R317       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R318       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R319       | RK73HB1J680J  | MG RESISTOR | 68Ω 1/16W J   | 1   |       |
|      | R320       | RK73HB1J181J  | MG RESISTOR | 180Ω 1/16W J  | 1   |       |
|      | R321       | RK73HB1J223J  | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R322       | RK73HB1J472J  | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R323       | RK73HB1J331J  | MG RESISTOR | 330Ω 1/16W J  | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
|      | R330       | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J  | 1   |       |
|      | R331       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R332       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R333       | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J  | 1   |       |
|      | R340       | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J  | 1   | K1,K0 |
|      | R341       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   | K1,K0 |
|      | R342       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   | K1,K0 |
|      | R343       | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J  | 1   | K1,K0 |
|      | R350       | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J  | 1   | K1,K0 |
|      | R351       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   | K1,K0 |
|      | R352       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   | K1,K0 |
|      | R353       | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J  | 1   | K1,K0 |
|      | R370       | RK73GB2A683J | MG RESISTOR | 68kΩ 1/10W J  | 1   |       |
|      | R371       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   |       |
|      | R372       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R373       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R390       | RK73EB2E472J | MG RESISTOR | 4.7kΩ 1/4W J  | 1   |       |
|      | R400       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R410       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R411       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R413       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R414       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R468       | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J   | 1   | K1,K0 |
|      | R469       | RK73GB2A4R7J | MG RESISTOR | 4.7Ω 1/10W J  | 1   | K1,K0 |
|      | R470       | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J   | 1   | K1,K0 |
|      | R471       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   | K1,K0 |
|      | R472       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   | K1,K0 |
|      | R473       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   | K1,K0 |
|      | R474       | RK73FB2B221J | MG RESISTOR | 220Ω 1/8W J   | 1   | K1,K0 |
|      | R475       | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J   | 1   | K1,K0 |
|      | R476       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   | K1,K0 |
|      | R477       | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1   | K1,K0 |
|      | R541       | RK73HB1J512J | MG RESISTOR | 5.1kΩ 1/16W J | 1   |       |
|      | R542       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R543       | RK73EB2E200J | MG RESISTOR | 20Ω 1/4W J    | 1   |       |
|      | R544       | RK73HB1J393J | MG RESISTOR | 39kΩ 1/16W J  | 1   |       |
|      | R545       | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D  | 1   |       |
|      | R546       | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D  | 1   |       |
|      | R548       | RK73HH1J683D | MG RESISTOR | 68kΩ 1/16W D  | 1   |       |
|      | R549       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R601       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R611       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R682       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R683       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R684       | RK73HB1J392J | MG RESISTOR | 3.9kΩ 1/16W J | 1   |       |
|      | R685       | RK73HB1J392J | MG RESISTOR | 3.9kΩ 1/16W J | 1   |       |
|      | R692       | RK73GB2A910J | MG RESISTOR | 91Ω 1/10W J   | 1   |       |
|      | R693       | RK73GB2A910J | MG RESISTOR | 91Ω 1/10W J   | 1   |       |
|      | R702       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R703       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R704       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R705       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R706       | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1   |       |
|      | R707       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R709       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R710       | RK73HB1J682J | MG RESISTOR | 6.8kΩ 1/16W J | 1   |       |
|      | R711       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R712       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R713       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R714       | RK73HB1J274J | MG RESISTOR | 270kΩ 1/16W J | 1   |       |
|      | R715       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R718       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R721       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R722       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R723       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R725       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R730       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R731       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R733       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R734       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R735       | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J  | 1   |       |
|      | R737       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R738       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R739       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R740       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R741       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   |       |
|      | R742       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R743       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R744       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R746       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R748       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R750       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R753       | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J  | 1   |       |
|      | R755       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R756       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R759       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R760       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R761       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R762       | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J   | 1   |       |
|      | R763       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R766       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R768       | RK73HB1J393J | MG RESISTOR | 39kΩ 1/16W J  | 1   | E1    |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local    |
|------|------------|--------------|-------------|---------------|-----|----------|
|      | R768       | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J  | 1   | X1       |
|      | R769       | RK73HB1J822J | MG RESISTOR | 8.2kΩ 1/16W J | 1   | E1       |
|      | R769       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | X1       |
|      | R769       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0    |
|      | R770       | RK73HB1J393J | MG RESISTOR | 39kΩ 1/16W J  | 1   | K1       |
|      | R771       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   | E1,X1,K0 |
|      | R771       | RK73HB1J822J | MG RESISTOR | 8.2kΩ 1/16W J | 1   | K1       |
|      | R772       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R777       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R778       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R782       | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J   | 1   |          |
|      | R785       | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J   | 1   |          |
|      | R788       | RK73HH1J823D | MG RESISTOR | 82kΩ 1/16W D  | 1   |          |
|      | R789       | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D  | 1   |          |
|      | R790       | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J  | 1   |          |
|      | R792       | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J  | 1   |          |
|      | R793       | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J  | 1   |          |
|      | R794       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R795       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R796       | RK73HH1J302D | MG RESISTOR | 3kΩ 1/16W D   | 1   |          |
|      | R797       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R798       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R799       | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J   | 1   |          |
|      | R800       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R801       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R802       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   | E1,X1    |
|      | R803       | RK73HB1J225J | MG RESISTOR | 2.2MΩ 1/16W J | 1   | K1,K0    |
|      | R804       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R805       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R806       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R808       | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J   | 1   |          |
|      | R809       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R811       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R813       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R814       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R815       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R819       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R820       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R823       | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J   | 1   |          |
|      | R824       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R827       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |          |
|      | R828       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |          |
|      | R829       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R830       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R831       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R833       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R834       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R835       | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |          |
|      | R836       | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J   | 1   |          |
|      | R844       | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1   |          |
|      | R845       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R846       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R848       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R870       | RK73HB1J562J | MG RESISTOR | 5.6kΩ 1/16W J | 1   |          |
|      | R889       | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1   |          |
|      | R891       | RK73HH1J243D | MG RESISTOR | 24kΩ 1/16W D  | 1   |          |
|      | R893       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R902       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   | E1,X1    |
|      | R903       | RK73HH1J394D | MG RESISTOR | 390kΩ 1/16W D | 1   | E1,X1    |
|      | R903       | RK73HH1J334D | MG RESISTOR | 330kΩ 1/16W D | 1   | K1,K0    |
|      | R904       | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D  | 1   | E1,X1    |
|      | R904       | RK73HH1J473D | MG RESISTOR | 47kΩ 1/16W D  | 1   | K1,K0    |
|      | R905       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R908       | RK73HH1J154D | MG RESISTOR | 150kΩ 1/16W D | 1   |          |
|      | R909       | RK73HH1J473D | MG RESISTOR | 47kΩ 1/16W D  | 1   |          |
|      | R910       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R911       | RK73HB1J683J | MG RESISTOR | 68kΩ 1/16W J  | 1   |          |
|      | R912       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R913       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R916       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   | E1,X1    |
|      | R917       | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D  | 1   |          |
|      | R920       | RK73HH1J124D | MG RESISTOR | 120kΩ 1/16W D | 1   |          |
|      | R921       | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D  | 1   |          |
|      | R922       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |          |
|      | R923       | RK73HH1J564D | MG RESISTOR | 560kΩ 1/16W D | 1   |          |
|      | R924       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R925       | RK73HH1J184D | MG RESISTOR | 180kΩ 1/16W D | 1   |          |
|      | R927       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |          |
|      | R928       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R929       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R933       | RK73HH1J684D | MG RESISTOR | 680kΩ 1/16W D | 1   |          |
|      | R934       | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D  | 1   |          |
|      | R939       | RK73HH1J433D | MG RESISTOR | 43kΩ 1/16W D  | 1   |          |
|      | R940       | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D  | 1   |          |
|      | R941       | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D  | 1   |          |
|      | R946       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R949       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |          |
|      | R950       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R951       | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J  | 1   |          |
|      | R952       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R954       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |          |
|      | R955       | RK73EB2E184J | MG RESISTOR | 180kΩ 1/4W J  | 1   |          |
|      | R960       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   |          |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.    | Parts Name    | Description   | QTY | Local |
|------|------------|--------------|---------------|---------------|-----|-------|
|      | R965       | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |       |
|      | R980       | RK73EB2E682J | MG RESISTOR   | 6.8kΩ 1/4W J  | 1   |       |
|      | R981       | RK73EB2E682J | MG RESISTOR   | 6.8kΩ 1/4W J  | 1   |       |
|      | R982       | RK73EB2E473J | MG RESISTOR   | 47kΩ 1/4W J   | 1   |       |
|      | R984       | RK73EB2E473J | MG RESISTOR   | 47kΩ 1/4W J   | 1   |       |
|      | R993       | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R1034      | RK73HB1J102J | MG RESISTOR   | 1kΩ 1/16W J   | 1   |       |
|      |            |              |               |               |     |       |
|      | R1070      | RK73HB1J102J | MG RESISTOR   | 1kΩ 1/16W J   | 1   |       |
|      | R1300      | RK73HB1J562J | MG RESISTOR   | 5.6kΩ 1/16W J | 1   |       |
|      | R1302      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R1303      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R1900      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1901      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1902      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1903      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1904      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1905      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1906      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1907      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1908      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1909      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1910      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1911      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1912      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1913      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1914      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1915      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      |            |              |               |               |     |       |
|      | R1920      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R1921      | RK73HB1J470J | MG RESISTOR   | 47Ω 1/16W J   | 1   |       |
|      | R1922      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1923      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1924      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1925      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1926      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1927      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1928      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1929      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1930      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1931      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1932      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R1933      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1934      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1935      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1936      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1937      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1938      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1939      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      |            |              |               |               |     |       |
|      | R1940      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1941      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1942      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1943      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R1944      | RK73HB1J330J | MG RESISTOR   | 33Ω 1/16W J   | 1   |       |
|      | R2002      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2003      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R2004      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R2006      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2007      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R2008      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2010      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R2011      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2012      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R2013      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2014      | RK73HB1J103J | MG RESISTOR   | 10kΩ 1/16W J  | 1   |       |
|      | R2016      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R2017      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R2018      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R2019      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      |            |              |               |               |     |       |
|      | R2021      | RK73HB1J220J | MG RESISTOR   | 22Ω 1/16W J   | 1   |       |
|      | R2023      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2026      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R2029      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R2033      | RK73HB1J222J | MG RESISTOR   | 2.2kΩ 1/16W J | 1   |       |
|      | R2034      | RK73HB1J222J | MG RESISTOR   | 2.2kΩ 1/16W J | 1   |       |
|      | R7571      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R7581      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R7641      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R7651      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R9001      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R9005      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R9011      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R9019      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R9029      | RK73HB1J272J | MG RESISTOR   | 2.7kΩ 1/16W J | 1   |       |
|      | R9030      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R9031      | RK73HB1J101J | MG RESISTOR   | 100Ω 1/16W J  | 1   |       |
|      | R9201      | RK73HB1J100D | MG RESISTOR   | 10Ω 1/16W D   | 1   |       |
|      | R9600      | RK73HB1J103J | MG RESISTOR   | 10kΩ 1/16W J  | 1   |       |
|      | R9611      | RK73HB1J151J | MG RESISTOR   | 150Ω 1/16W J  | 1   |       |
|      |            |              |               |               |     |       |
|      | R9710      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R9711      | RK73HB1J000J | MG RESISTOR   | 0Ω 1/16W J    | 1   |       |
|      | R9712      | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |       |
|      | R9713      | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |       |
|      | L165       | LR73Z0AD100M | CHIP INDUCTOR |               | 1   | K1,K0 |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe                                | Symbol No. | Parts No.     | Parts Name      | Description  | QTY | Local |
|-------------------------------------|------------|---------------|-----------------|--------------|-----|-------|
|                                     | L411       | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L540       | LK73Z0CA4R7M  | M.CHIP INDUCTOR |              | 1   |       |
|                                     | L541       | LR79Z0JM100M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L610       | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L701       | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L702       | LB73H0AY-004  | CHIP FERRITE    |              | 1   |       |
|                                     | L706       | LB73H0AY-004  | CHIP FERRITE    |              | 1   | K1,K0 |
|                                     | L707       | LB73H0AY-004  | CHIP FERRITE    |              | 1   | K1,K0 |
|                                     | L708       | LB73H0CT-002  | CHIP FERRITE    |              | 1   |       |
|                                     | L709       | LB73H0AY-004  | CHIP FERRITE    |              | 1   |       |
|                                     | L821       | LB73G0ED-002  | CHIP FERRITE    |              | 1   |       |
|                                     | L830       | LB73G0ED-002  | CHIP FERRITE    |              | 1   |       |
|                                     | L901       | LR79Z0JM330M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L902       | LR79Z0JM330M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L903       | LK73Z0CA4R7M  | M.CHIP INDUCTOR |              | 1   |       |
|                                     | L960       | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L962       | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | L990       | L3D-0043-00   | CHOKE COIL      |              | 1   |       |
|                                     | L2006      | RK73HH1J470D  | MG RESISTOR     |              | 1   |       |
|                                     | L9002      | RK73GB2A000J  | MG RESISTOR     |              | 1   |       |
|                                     | A1303      | W0C-0414-00   | CIRCUIT MODULE  |              | 1   |       |
|                                     | CN701      | E5J-0216-00   | R.RECEPTACLE    |              | 1   |       |
|                                     | CN704      | EB770BH-0830A | B TO B CONNE    |              | 1   |       |
|                                     | CN990      | E5J-0139-00   | R.RECEPTACLE    |              | 1   |       |
|                                     | CN3000     | EC720AE-1026B | FFC FPC CONNE   |              | 1   |       |
| △                                   | F321       | F53-0513-08   | PATTERN FUSE    | 4A           | 1   |       |
| △                                   | F322       | F53-0513-08   | PATTERN FUSE    | 4A           | 1   |       |
| △                                   | F540       | FZA10BH-2R5   | FUSE (CC)       |              | 1   |       |
| △                                   | F625       | FZA10BF-1R0   | FUSE (CC)       |              | 1   |       |
|                                     | J220       | E1B-0013-00   | 3.5D PHONE JACK |              | 1   |       |
|                                     | J321       | E6D-0015-10   | PIN JACK        |              | 1   | E1,X1 |
|                                     | J321       | E6D-0016-10   | PIN JACK        |              | 1   | K1,K0 |
|                                     | J470       | E5G-0029-00   | CYL.RECEPTACLE  |              | 1   | K1,K0 |
|                                     | J600       | E6J-0017-00   | JACK OTHERS     |              | 1   | K1,K0 |
|                                     | J601       | E3A-0527-00   | ANTENNA CABLE   |              | 1   | E1,X1 |
|                                     | K2005      | LR73Z0AD4R7M  | CHIP INDUCTOR   |              | 1   |       |
|                                     | S830       | S7A-0031-00   | TACTILE PUSH SW |              | 1   |       |
|                                     | VA360      | SDV1005E18//0 | VARIATOR        |              | 1   |       |
|                                     | VA390      | SDV1005E18//0 | VARIATOR        |              | 1   |       |
|                                     | VA601      | F0K-0265-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA701      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA702      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA703      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA704      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA705      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA706      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA707      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA709      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA710      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA711      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA714      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA716      | F0K-0282-00   | SURGE ABSORBER  |              | 1   | E1    |
|                                     | VA717      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA901      | SDV1005E18//0 | VARIATOR        |              | 1   |       |
|                                     | VA905      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA906      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | VA907      | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | X701       | L7J-0138-00   | QUARTZ CRYSTAL  |              | 1   |       |
|                                     | X702       | L7J-0123-00   | QUARTZ CRYSTAL  |              | 1   |       |
| SWITCH PWB ASSY (XJ6-148x-0x) <XJ6> |            |               |                 |              |     |       |
|                                     | IC1        | BU97550KV-M   | MOS IC          |              | 1   |       |
|                                     | IC3        | AS431AN-G1    | ANALOG IC       |              | 1   |       |
|                                     | IC90       | SIRD630B6T    | IR DETECT UNIT  |              | 1   | K1,K0 |
|                                     | Q50        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q51        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q52        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q53        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q54        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q55        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q57        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q58        | KTC4075EP/Y/  | TRANSISTOR      |              | 1   |       |
|                                     | Q90        | KRA302E-P     | DIGI TRANSISTOR |              | 1   | K1,K0 |
|                                     | Q91        | KRC402E-P     | DIGI TRANSISTOR |              | 1   | K1,K0 |
|                                     | D2         | SM5818PL      | SCHOTTKY DIODE  |              | 1   |       |
|                                     | D3         | SM5818PL      | SCHOTTKY DIODE  |              | 1   |       |
|                                     | D12        | QSMH-C199     | LED             |              | 1   |       |
|                                     | D13        | QSMH-C199     | LED             |              | 1   |       |
|                                     | D20        | QSMH-C199     | LED             |              | 1   |       |
|                                     | D21        | LRTBGVTG-U//0 | LED             |              | 1   |       |
|                                     | D22        | LRTBGVTG-U//0 | LED             |              | 1   |       |
|                                     | D23        | LRTBGVTG-U//0 | LED             |              | 1   |       |
|                                     | D25        | LRTBGVTG-U//0 | LED             |              | 1   |       |
|                                     | D49        | LRTBGVTG-U//0 | LED             |              | 1   |       |
|                                     | D82        | F0K-0282-00   | SURGE ABSORBER  |              | 1   |       |
|                                     | C1         | CK73GXR1A475K | C CAPACITOR     | 4.7uF 10V K  | 1   |       |
|                                     | C5         | CK73GXR1A475K | C CAPACITOR     | 4.7uF 10V K  | 1   |       |
|                                     | C6         | CK73EXR1C106K | C CAPACITOR     | 10uF 16V K   | 1   |       |
|                                     | C7         | CK73GBB1H472K | C CAPACITOR     | 4700pF 50V K | 1   |       |
|                                     | C60        | CK73GBB1H102K | C CAPACITOR     | 1000pF 50V K | 1   |       |
|                                     | C61        | CK73GBB1H102K | C CAPACITOR     | 1000pF 50V K | 1   |       |
|                                     | C82        | CK73EXR1E106K | C CAPACITOR     | 10uF 25V K   | 1   |       |
|                                     | C83        | CK73GBB1H471K | C CAPACITOR     | 470pF 50V K  | 1   |       |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name      | Description   | QTY | Local |
|------|------------|---------------|-----------------|---------------|-----|-------|
|      | C84        | CK73GBB1H472K | C CAPACITOR     | 4700pF 50V K  | 1   |       |
|      | C85        | CK73GBB1H471K | C CAPACITOR     | 470pF 50V K   | 1   |       |
|      | C86        | CK73GBB1H472K | C CAPACITOR     | 4700pF 50V K  | 1   |       |
|      | C91        | CK73GXR1A105K | C CAPACITOR     | 1uF 10V K     | 1   | K1,K0 |
|      | R1         | RK73GH2A473D  | MG RESISTOR     | 47kΩ 1/10W D  | 1   |       |
|      | R2         | RK73GH2A473D  | MG RESISTOR     | 47kΩ 1/10W D  | 1   |       |
|      | R3         | RK73GB2A471J  | MG RESISTOR     | 470Ω 1/10W J  | 1   |       |
|      | R4         | RK73GB2A101J  | MG RESISTOR     | 100Ω 1/10W J  | 1   |       |
|      | R6         | RK73EB2E151J  | MG RESISTOR     | 150Ω 1/4W J   | 1   |       |
|      | R8         | RK73FB2B473J  | MG RESISTOR     | 47kΩ 1/8W J   | 1   |       |
|      | R10        | RK73GB2A152J  | MG RESISTOR     | 1.5kΩ 1/10W J | 1   |       |
|      | R12        | RK73GB2A182J  | MG RESISTOR     | 1.8kΩ 1/10W J | 1   |       |
|      | R13        | RK73GB2A182J  | MG RESISTOR     | 1.8kΩ 1/10W J | 1   |       |
|      | R14        | RK73GB2A124J  | MG RESISTOR     | 120kΩ 1/10W J | 1   |       |
|      | R21        | RK73EB2E471J  | MG RESISTOR     | 470Ω 1/4W J   | 1   |       |
|      | R22        | RK73EB2E181J  | MG RESISTOR     | 180Ω 1/4W J   | 1   |       |
|      | R23        | RK73EB2E221J  | MG RESISTOR     | 220Ω 1/4W J   | 1   |       |
|      | R25        | RK73FB2B182J  | MG RESISTOR     | 1.8kΩ 1/8W J  | 1   |       |
|      | R26        | RK73FB2B102J  | MG RESISTOR     | 1kΩ 1/8W J    | 1   |       |
|      | R27        | RK73FB2B102J  | MG RESISTOR     | 1kΩ 1/8W J    | 1   |       |
|      | R33        | RK73EB2E681J  | MG RESISTOR     | 680Ω 1/4W J   | 1   |       |
|      | R34        | RK73EB2E561J  | MG RESISTOR     | 560Ω 1/4W J   | 1   |       |
|      | R35        | RK73EB2E561J  | MG RESISTOR     | 560Ω 1/4W J   | 1   |       |
|      | R57        | RK73GB2A682J  | MG RESISTOR     | 6.8kΩ 1/10W J | 1   |       |
|      | R60        | RK73FB2B101J  | MG RESISTOR     | 100Ω 1/8W J   | 1   |       |
|      | R61        | RK73FB2B101J  | MG RESISTOR     | 100Ω 1/8W J   | 1   |       |
|      | R62        | RK73FB2B4R7J  | MG RESISTOR     | 4.7Ω 1/8W J   | 1   |       |
|      | R80        | RK73EB2E221J  | MG RESISTOR     | 220Ω 1/4W J   | 1   |       |
|      | RA1        | RK74GB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   |       |
|      | RA2        | RK74GB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   |       |
|      | RA3        | RK74GB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   |       |
|      | RA50       | RK74GB1J682J  | MG RESISTOR     | 6.8kΩ 1/16W J | 1   |       |
|      | RA53       | RK74GB1J682J  | MG RESISTOR     | 6.8kΩ 1/16W J | 1   |       |
|      | CN2        | E5K-0007-00   | R.PLUG          |               | 1   |       |
|      | FL80       | L7K-0038-00   | FILTER          |               | 1   |       |
|      | J60        | E1B-0037-00   | 3.5D PHONE JACK |               | 1   |       |
|      | J80        | E5J-0069-00   | USB TERMINAL    |               | 1   |       |
|      | S20        | T9K-0007-00   | ROTARY ENCODER  |               | 1   |       |

#### HD TUNER PWB ASSY (XJM-028K-00) <XJM>

|   |      |               |             |               |   |       |
|---|------|---------------|-------------|---------------|---|-------|
| △ | IC1  | SI4763-A42-GM | MOS IC      |               | 1 | K1,K0 |
| △ | IC2  | SI4613-A10-GM | MOS IC      |               | 1 | K1,K0 |
| △ | IC3  | W3F-0442-00   | ROM IC      |               | 1 | K1,K0 |
|   | IC4  | XC6213B182N-G | MOS IC      |               | 1 | K1,K0 |
|   | C2   | CC73HCH1H101J | C CAPACITOR | 100pF 50V J   | 1 | K1,K0 |
|   | C3   | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K  | 1 | K1,K0 |
|   | C4   | CK73GBB1H222K | C CAPACITOR | 2200pF 50V K  | 1 | K1,K0 |
|   | C5   | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K  | 1 | K1,K0 |
|   | C6   | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1 | K1,K0 |
|   | C7   | CK73HXR1C473K | C CAPACITOR | 0.047uF 16V K | 1 | K1,K0 |
|   | C8   | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1 | K1,K0 |
|   | C9   | CC73GCH1H390J | C CAPACITOR | 39pF 50V J    | 1 | K1,K0 |
|   | C10  | CC73GCH1H270J | C CAPACITOR | 27pF 50V J    | 1 | K1,K0 |
|   | C11  | CC73GCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1 | K1,K0 |
|   | C15  | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1 | K1,K0 |
|   | C16  | CC73HCH1H050C | C CAPACITOR | 5pF 50V C     | 1 | K1,K0 |
|   | C18  | CK73HXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 | K1,K0 |
|   | C19  | CK73HXR1C103K | C CAPACITOR | 0.01uF 16V K  | 1 | K1,K0 |
|   | C20  | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1 | K1,K0 |
|   | C21  | CK73HXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 | K1,K0 |
|   | C22  | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J  | 1 | K1,K0 |
|   | C25  | CK73HXR1H682K | C CAPACITOR | 6800pF 50V K  | 1 | K1,K0 |
|   | C26  | CK73HXR1H682K | C CAPACITOR | 6800pF 50V K  | 1 | K1,K0 |
|   | C27  | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1 | K1,K0 |
|   | C28  | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1 | K1,K0 |
|   | C29  | CC73HCH1H060D | C CAPACITOR | 6pF 50V D     | 1 | K1,K0 |
|   | C30  | CC73HCH1H060D | C CAPACITOR | 6pF 50V D     | 1 | K1,K0 |
|   | C33  | CK73HXR1C105K | C CAPACITOR | 1uF 16V K     | 1 | K1,K0 |
|   | C40  | CC73HCH1H020C | C CAPACITOR | 2pF 50V C     | 1 | K1,K0 |
|   | C42  | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1 | K1,K0 |
|   | C43  | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1 | K1,K0 |
|   | C44  | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1 | K1,K0 |
|   | C48  | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1 | K1,K0 |
|   | C50  | CC73GCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1 | K1,K0 |
|   | C51  | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1 | K1,K0 |
|   | C52  | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1 | K1,K0 |
|   | C53  | CC73GCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1 | K1,K0 |
|   | C54  | CC73GCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1 | K1,K0 |
|   | C55  | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1 | K1,K0 |
|   | C56  | CC73GCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1 | K1,K0 |
|   | C57  | CK73GXR1A475K | C CAPACITOR | 4.7uF 10V K   | 1 | K1,K0 |
|   | C58  | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K1,K0 |
|   | C59  | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1 | K1,K0 |
|   | C101 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J    | 1 | K1,K0 |
|   | C102 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J    | 1 | K1,K0 |
|   | C103 | CC73HCH1H220J | C CAPACITOR | 22pF 50V J    | 1 | K1,K0 |
|   | C111 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1 | K1,K0 |
|   | C113 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1 | K1,K0 |
|   | C119 | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1 | K1,K0 |
|   | C121 | CK73HBB1C104K | C CAPACITOR | 0.1uF 16V K   | 1 | K1,K0 |
|   | C122 | CC73HCH1H102J | C CAPACITOR | 1000pF 50V J  | 1 | K1,K0 |
|   | C123 | CC73HCH1H180J | C CAPACITOR | 18pF 50V J    | 1 | K1,K0 |
|   | C124 | CC73HCH1H180J | C CAPACITOR | 18pF 50V J    | 1 | K1,K0 |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name      | Description   | QTY | Local |
|------|------------|---------------|-----------------|---------------|-----|-------|
|      | C125       | CK73HCH1H180J | C CAPACITOR     | 18pF 50V J    | 1   | K1,K0 |
|      | C127       | CK73HBB1A104K | C CAPACITOR     | 0.1uF 10V K   | 1   | K1,K0 |
|      | C128       | CK73HCH1H020C | C CAPACITOR     | 2pF 50V C     | 1   | K1,K0 |
|      | C129       | CK73HBB1H222K | C CAPACITOR     | 2200pF 50V K  | 1   | K1,K0 |
|      | C131       | CK73HCH1H180J | C CAPACITOR     | 18pF 50V J    | 1   | K1,K0 |
|      | C143       | CK73HBB1H222K | C CAPACITOR     | 2200pF 50V K  | 1   | K1,K0 |
|      | C144       | CK73HBB1H222K | C CAPACITOR     | 2200pF 50V K  | 1   | K1,K0 |
|      | C146       | CK73HBB1H222K | C CAPACITOR     | 2200pF 50V K  | 1   | K1,K0 |
|      | C9002      | CK73FXR0J106K | C CAPACITOR     | 10uF 6.3V K   | 1   | K1,K0 |
|      | C9003      | CK73GXR1A105K | C CAPACITOR     | 1uF 10V K     | 1   | K1,K0 |
|      | C9004      | CC73HCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | C9005      | CC73HCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | C9006      | CC73GCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | C9007      | CC73GCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | C9009      | CK73HXR0J474K | C CAPACITOR     | 0.47uF 6.3V K | 1   | K1,K0 |
|      | C9010      | CC73HCH1H150J | C CAPACITOR     | 15pF 50V J    | 1   | K1,K0 |
|      | C9011      | CC73HCH1H150J | C CAPACITOR     | 15pF 50V J    | 1   | K1,K0 |
|      | C9013      | CC73HCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | C9016      | CC73HCH1H010C | C CAPACITOR     | 1pF 50V C     | 1   | K1,K0 |
|      | R1         | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R3         | RK73HB1J240J  | MG RESISTOR     | 24Ω 1/16W J   | 1   | K1,K0 |
|      | R4         | RK73HB1J474J  | MG RESISTOR     | 470kΩ 1/16W J | 1   | K1,K0 |
|      | R5         | RK73HB1J474J  | MG RESISTOR     | 470kΩ 1/16W J | 1   | K1,K0 |
|      | R10        | RK73HB1J222J  | MG RESISTOR     | 2.2kΩ 1/16W J | 1   | K1,K0 |
|      | R11        | RK73HB1J222J  | MG RESISTOR     | 2.2kΩ 1/16W J | 1   | K1,K0 |
|      | R12        | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R14        | RK73HB1J471J  | MG RESISTOR     | 470Ω 1/16W J  | 1   | K1,K0 |
|      | R16        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R17        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R18        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R20        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | K1,K0 |
|      | R26        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R30        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | K1,K0 |
|      | R31        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | K1,K0 |
|      | R39        | RK73HB1J102J  | MG RESISTOR     | 1kΩ 1/16W J   | 1   | K1,K0 |
|      | R40        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | K1,K0 |
|      | R41        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R42        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R43        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R44        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R51        | RK73HB1J331J  | MG RESISTOR     | 330Ω 1/16W J  | 1   | K1,K0 |
|      | R52        | RK73HB1J331J  | MG RESISTOR     | 330Ω 1/16W J  | 1   | K1,K0 |
|      | R53        | RK73HB1J331J  | MG RESISTOR     | 330Ω 1/16W J  | 1   | K1,K0 |
|      | R54        | RK73HB1J222J  | MG RESISTOR     | 2.2kΩ 1/16W J | 1   | K1,K0 |
|      | R60        | RK73HB1J102J  | MG RESISTOR     | 1kΩ 1/16W J   | 1   | K1,K0 |
|      | R61        | RK73HB1J102J  | MG RESISTOR     | 1kΩ 1/16W J   | 1   | K1,K0 |
|      | R62        | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J     | 1   | K1,K0 |
|      | R103       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R104       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R105       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R107       | RK73HB1J330J  | MG RESISTOR     | 33Ω 1/16W J   | 1   | K1,K0 |
|      | R108       | RK73HB1J330J  | MG RESISTOR     | 33Ω 1/16W J   | 1   | K1,K0 |
|      | R109       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R110       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R111       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R112       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R114       | RK73GB2A470J  | MG RESISTOR     | 47Ω 1/10W J   | 1   | K1,K0 |
|      | R115       | RK73HB1J223J  | MG RESISTOR     | 22kΩ 1/16W J  | 1   | K1,K0 |
|      | R116       | RK73HB1J223J  | MG RESISTOR     | 22kΩ 1/16W J  | 1   | K1,K0 |
|      | R121       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R122       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R123       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R124       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R127       | RK73HB1J122J  | MG RESISTOR     | 1.2kΩ 1/16W J | 1   | K1,K0 |
|      | R129       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R140       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | R141       | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R142       | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R143       | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R144       | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J  | 1   | K1,K0 |
|      | R145       | RK73HB1J102J  | MG RESISTOR     | 1kΩ 1/16W J   | 1   | K1,K0 |
|      | R155       | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | K1,K0 |
|      | R166       | RK73HB1J102J  | MG RESISTOR     | 1kΩ 1/16W J   | 1   | K1,K0 |
|      | R9005      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J     | 1   | K1,K0 |
|      | R9006      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J     | 1   | K1,K0 |
|      | R9007      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J     | 1   | K1,K0 |
|      | R9008      | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | K1,K0 |
|      | L1         | LK73H0BUR18K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L2         | LK73G0BE82NK  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L3         | LK73G0BER12K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L4         | LK73H0BU1R2K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L5         | LK73G0BE1R8K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L8         | LK73G0BER39K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L9         | LK73G0AS10NJ  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L10        | L1K-0001-00   | BALUN TRANS     |               | 1   | K1,K0 |
|      | L14        | LK73G0BE100K  | M.CHIP INDUCTOR |               | 1   | K1,K0 |
|      | L21        | LB73G0BP-001  | CHIP FERRITE    |               | 1   | K1,K0 |
|      | L22        | LB73G0BP-001  | CHIP FERRITE    |               | 1   | K1,K0 |
|      | L101       | LB73G0FK-001  | CHIP FERRITE    |               | 1   | K1,K0 |
|      | L9001      | LR73Z0AD4R7M  | CHIP INDUCTOR   |               | 1   | K1,K0 |
|      | CN1        | EB740BH-0830B | B TO B CONNE    |               | 1   | K1,K0 |
|      | E1         | F1B-0107-00   | SHIELDING CASE  |               | 1   | K1,K0 |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe                                   | Symbol No. | Parts No.     | Parts Name     | Description  | QTY | Local |
|----------------------------------------|------------|---------------|----------------|--------------|-----|-------|
|                                        | X1         | L7J-0021-00   | QUARTZ CRYSTAL |              | 1   | K1,K0 |
| DAB TUNER PWB ASSY (XJM-029E-00) <XJM> |            |               |                |              |     |       |
|                                        | IC1        | SI4763-A42-GM | MOS IC         |              | 1   | E1,X1 |
|                                        | IC2        | MTV301CQ      | MOS IC         |              | 1   | E1,X1 |
|                                        | IC3        | GL3511SB169   | MOS IC         |              | 1   | E1,X1 |
|                                        | IC4        | W3F-0441-00   | ROM IC         |              | 1   | E1,X1 |
|                                        | IC5        | XC6213B122N-G | MOS IC         |              | 1   | E1,X1 |
|                                        | IC6        | XC6213B182N-G | MOS IC         |              | 1   | E1,X1 |
|                                        | IC7        | XC6213B182N-G | MOS IC         |              | 1   | E1,X1 |
|                                        | D431       | UDZV3.3B      | ZENER DIODE    |              | 1   | E1,X1 |
|                                        | C1         | CC73HCH1H270J | C CAPACITOR    | 27pF 50V J   | 1   | E1,X1 |
|                                        | C2         | CC73HCH1H390J | C CAPACITOR    | 39pF 50V J   | 1   | E1,X1 |
|                                        | C3         | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K | 1   | E1,X1 |
|                                        | C4         | CK73HBB1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C5         | CK73HBB1H103K | C CAPACITOR    | 0.01uF 50V K | 1   | E1,X1 |
|                                        | C6         | CC73HCH1H010C | C CAPACITOR    | 1pF 50V C    | 1   | E1,X1 |
|                                        | C7         | CC73HCH1H050C | C CAPACITOR    | 5pF 50V C    | 1   | E1,X1 |
|                                        | C10        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C13        | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K | 1   | E1,X1 |
|                                        | C14        | CK73GBB1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C15        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K   | 1   | E1,X1 |
|                                        | C16        | CK73HBB1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C17        | CK73HBB1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C18        | CC73HCH1H101J | C CAPACITOR    | 100pF 50V J  | 1   | E1,X1 |
|                                        | C19        | CK73HBB1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C20        | CK73HXR1A105K | C CAPACITOR    | 1uF 10V K    | 1   | E1,X1 |
|                                        | C21        | CK73GXR1C105K | C CAPACITOR    | 1uF 16V K    | 1   | E1,X1 |
|                                        | C22        | CK73GXR1C105K | C CAPACITOR    | 1uF 16V K    | 1   | E1,X1 |
|                                        | C23        | CK73HBB1H682K | C CAPACITOR    | 6800pF 50V K | 1   | E1,X1 |
|                                        | C24        | CK73HBB1H682K | C CAPACITOR    | 6800pF 50V K | 1   | E1,X1 |
|                                        | C25        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K   | 1   | E1,X1 |
|                                        | C26        | CC73HCH1H150J | C CAPACITOR    | 15pF 50V J   | 1   | E1,X1 |
|                                        | C27        | CC73HCH1H100D | C CAPACITOR    | 10pF 50V D   | 1   | E1,X1 |
|                                        | C28        | CC73HCH1H180J | C CAPACITOR    | 18pF 50V J   | 1   | E1,X1 |
|                                        | C29        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C30        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C31        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C32        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C33        | CK73GXR1H104K | C CAPACITOR    | 0.1uF 50V K  | 1   | E1,X1 |
|                                        | C36        | CC73HCH1H060D | C CAPACITOR    | 6pF 50V D    | 1   | E1,X1 |
|                                        | C37        | CC73HCH1H060D | C CAPACITOR    | 6pF 50V D    | 1   | E1,X1 |
|                                        | C38        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C39        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K   | 1   | E1,X1 |
|                                        | C41        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C42        | CC73HCH1H080D | C CAPACITOR    | 8pF 50V D    | 1   | E1,X1 |
|                                        | C43        | CC73HCH1H030C | C CAPACITOR    | 3pF 50V C    | 1   | E1,X1 |
|                                        | C44        | CC73HCH1H330J | C CAPACITOR    | 33pF 50V J   | 1   | E1,X1 |
|                                        | C45        | CK73HXR1H222K | C CAPACITOR    | 2200pF 50V K | 1   | E1,X1 |
|                                        | C46        | CC73HCH1H680J | C CAPACITOR    | 68pF 50V J   | 1   | E1,X1 |
|                                        | C47        | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K | 1   | E1,X1 |
|                                        | C48        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C49        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C50        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C51        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C52        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C53        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C54        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C55        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C56        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C57        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C58        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C59        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C60        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C61        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C62        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C63        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C64        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C65        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C66        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C67        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C68        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C69        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C70        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C71        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C72        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C73        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C74        | CK73HBB1C104K | C CAPACITOR    | 0.1uF 16V K  | 1   | E1,X1 |
|                                        | C75        | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K | 1   | E1,X1 |
|                                        | C76        | CK73GXR0J475K | C CAPACITOR    | 4.7uF 6.3V K | 1   | E1,X1 |
|                                        | C77        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K   | 1   | E1,X1 |
|                                        | C78        | CK73GXR1C225K | C CAPACITOR    | 2.2uF 16V K  | 1   | E1,X1 |
|                                        | C79        | CK73FXR0J226M | C CAPACITOR    | 22uF 6.3V M  | 1   | E1,X1 |
|                                        | C80        | CK73GXR0J225K | C CAPACITOR    | 2.2uF 6.3V K | 1   | E1,X1 |
|                                        | C81        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K   | 1   | E1,X1 |
|                                        | C82        | CC73HCH1H100D | C CAPACITOR    | 10pF 50V D   | 1   | E1,X1 |
|                                        | C86        | CC73HCH1H100D | C CAPACITOR    | 10pF 50V D   | 1   | E1,X1 |
|                                        | C87        | CK73GXR1A105K | C CAPACITOR    | 1uF 10V K    | 1   | E1,X1 |
|                                        | C96        | CC73HCH1H221J | C CAPACITOR    | 220pF 50V J  | 1   | E1,X1 |
|                                        | C97        | CC73HCH1H100D | C CAPACITOR    | 10pF 50V D   | 1   | E1,X1 |
|                                        | C9008      | CK73HXR1H472K | C CAPACITOR    | 4700pF 50V K | 1   | E1,X1 |
|                                        | C9012      | CK73HXR1H472K | C CAPACITOR    | 4700pF 50V K | 1   | E1,X1 |
|                                        | C9014      | CK73HXR1H103K | C CAPACITOR    | 0.01uF 50V K | 1   | E1,X1 |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
|      | C9017      | CK73HXR1H222K | C CAPACITOR | 2200pF 50V K  | 1   | E1,X1 |
|      | C9020      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9021      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9023      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9024      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9026      | CC73HCH1H120J | C CAPACITOR | 12pF 50V J    | 1   | E1,X1 |
|      | C9027      | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | E1,X1 |
|      | C9028      | CC73HCH1H561J | C CAPACITOR | 560pF 50V J   | 1   | E1,X1 |
|      | C9029      | CC73HCH1H561J | C CAPACITOR | 560pF 50V J   | 1   | E1,X1 |
|      | C9030      | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   | E1,X1 |
|      | C9031      | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   | E1,X1 |
|      | C9033      | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   | E1,X1 |
|      | C9035      | CC73HCH1H0R5C | C CAPACITOR | 0.5pF 50V C   | 1   | E1,X1 |
|      | C9036      | CK73HXR1H472K | C CAPACITOR | 4700pF 50V K  | 1   | E1,X1 |
|      | C9037      | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   | E1,X1 |
|      | C9038      | CK73HXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1   | E1,X1 |
|      | C9039      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9040      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9041      | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   | E1,X1 |
|      | C9042      | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | E1,X1 |
| △    | C9043      | CC73GCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | C9045      | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
| △    | C9046      | CC73GCH1H010C | C CAPACITOR | 1pF 50V C     | 1   | E1,X1 |
|      | R1         | RK73HB1J474J  | MG RESISTOR | 470kΩ 1/16W J | 1   | E1,X1 |
|      | R2         | RK73HB1J474J  | MG RESISTOR | 470kΩ 1/16W J | 1   | E1,X1 |
|      | R3         | RK73HB1J471J  | MG RESISTOR | 470Ω 1/16W J  | 1   | E1,X1 |
|      | R5         | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R6         | RK73HB1J240J  | MG RESISTOR | 24Ω 1/16W J   | 1   | E1,X1 |
|      | R13        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R14        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R15        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R16        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R17        | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1   | E1,X1 |
|      | R18        | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1   | E1,X1 |
|      | R19        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R20        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R21        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R22        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R23        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R24        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R25        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R26        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R27        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R28        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R29        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R30        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R33        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R34        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R35        | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1   | E1,X1 |
|      | R36        | RK73HB1J222J  | MG RESISTOR | 2.2kΩ 1/16W J | 1   | E1,X1 |
|      | R37        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R38        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R39        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R40        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R41        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R44        | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R46        | RK73HH1J433D  | MG RESISTOR | 43kΩ 1/16W D  | 1   | E1,X1 |
|      | R47        | RK73HH1J433D  | MG RESISTOR | 43kΩ 1/16W D  | 1   | E1,X1 |
|      | R48        | RK73HH1J623D  | MG RESISTOR | 62kΩ 1/16W D  | 1   | E1,X1 |
|      | R49        | RK73HH1J623D  | MG RESISTOR | 62kΩ 1/16W D  | 1   | E1,X1 |
|      | R50        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R51        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R52        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R53        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R54        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R55        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R56        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R57        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R58        | RK73HB1J104J  | MG RESISTOR | 100kΩ 1/16W J | 1   | E1,X1 |
|      | R59        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R60        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R61        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R62        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R63        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R64        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R65        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R66        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R67        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R68        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R69        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R70        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R71        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R72        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R73        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R74        | RK73HB1J101J  | MG RESISTOR | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R75        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R76        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R77        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R78        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R79        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R80        | RK73HB1J103J  | MG RESISTOR | 10kΩ 1/16W J  | 1   | E1,X1 |
|      | R81        | RK73HB1J470J  | MG RESISTOR | 47Ω 1/16W J   | 1   | E1,X1 |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name      | Description   | QTY | Local |
|------|------------|---------------|-----------------|---------------|-----|-------|
|      | R82        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R83        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R84        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R88        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R89        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R90        | RK73HB1J470J  | MG RESISTOR     | 47Ω 1/16W J   | 1   | E1,X1 |
|      | R91        | RK73GB2A102J  | MG RESISTOR     | 1kΩ 1/10W J   | 1   | E1,X1 |
|      | R92        | RK73GB2A102J  | MG RESISTOR     | 1kΩ 1/10W J   | 1   | E1,X1 |
|      | R93        | RK73GB2A102J  | MG RESISTOR     | 1kΩ 1/10W J   | 1   | E1,X1 |
|      | R95        | RK73HB1J105J  | MG RESISTOR     | 1MΩ 1/16W J   | 1   | E1,X1 |
|      | R96        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | E1,X1 |
|      | R97        | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | E1,X1 |
|      | R98        | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R100       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R102       | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | E1,X1 |
|      | R105       | RK73GB2A102J  | MG RESISTOR     | 1kΩ 1/10W J   | 1   | E1,X1 |
|      | R447       | RK73HB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R448       | RK73HB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R449       | RK73HB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R450       | RK73HB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R451       | RK73HB1J101J  | MG RESISTOR     | 100Ω 1/16W J  | 1   | E1,X1 |
|      | R457       | RK73GB2A152J  | MG RESISTOR     | 1.5kΩ 1/10W J | 1   | E1,X1 |
|      | R458       | RK73GB2A473J  | MG RESISTOR     | 47kΩ 1/10W J  | 1   | E1,X1 |
|      | R459       | RK73GB2A221J  | MG RESISTOR     | 220Ω 1/10W J  | 1   | E1,X1 |
|      | R9004      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J    | 1   | E1,X1 |
|      | R9005      | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J    | 1   | E1,X1 |
|      | L2         | LK73G0BER12K  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L3         | LK73G0BE82NK  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L4         | LK73G0BER12K  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L5         | L1K-0001-00   | BALUN TRANS     |               | 1   | E1,X1 |
|      | L6         | LK73G0BE1R8K  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L7         | LK73G0BER39K  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L8         | LK73G0BE100K  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L10        | LK73G0BF33NJ  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L11        | LK73G0BF68NJ  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L12        | LK73G0BFR15J  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L13        | LK73G0BFR15J  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L14        | LK73G0BF3N3S  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L15        | LK73G0BF5N6S  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L16        | LK73G0BF10NJ  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L17        | LK73G0BF10NJ  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L18        | LK73G0BF82NJ  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L20        | LK73G0BFR22J  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L21        | LK73G0BFR22J  | M.CHIP INDUCTOR |               | 1   | E1,X1 |
|      | L22        | LB73G0FK-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L23        | LB73G0BP-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L24        | LB73G0BP-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L26        | LB73G0BP-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L29        | LB73H0CG-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L30        | LB73H0CG-001  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L31        | LB73G0AM-004  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L32        | LR73Z0AD4R7M  | CHIP INDUCTOR   |               | 1   | E1,X1 |
|      | L33        | LB73H0AY-004  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L34        | LB73H0AY-004  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | L35        | LB73H0AY-004  | CHIP FERRITE    |               | 1   | E1,X1 |
|      | CN1        | EB740BH-0830B | B TO B CONNE    |               | 1   | E1,X1 |
|      | E1         | F1B-0106-00   | SHIELDING CASE  |               | 1   | E1,X1 |
|      | J1         | QNB0353-001   | ANT TERMINAL    |               | 1   | E1,X1 |
|      | TH1        | FSMD035-R     | P THERMISTOR    |               | 1   | E1,X1 |
|      | VA1        | F0K-0014-00   | SURGE ABSORBER  |               | 1   | E1,X1 |
|      | X1         | L7J-0028-00   | QUARTZ CRYSTAL  |               | 1   | E1,X1 |
|      | X2         | L7J-0027-00   | QUARTZ CRYSTAL  |               | 1   | E1,X1 |

CD MECHA PWB ASSY (XJD-018W-00) <XJD>

|     |               |             |               |   |  |
|-----|---------------|-------------|---------------|---|--|
| IC1 | MN6627553APA  | ANALOG IC   |               | 1 |  |
| IC2 | BD8266EFV-M   | ANALOG IC   |               | 1 |  |
| Q1  | 2SB1197K/QR/  | TRANSISTOR  |               | 1 |  |
| C1  | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C3  | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C4  | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C7  | CK73HXR1A334K | C CAPACITOR | 0.33uF 10V K  | 1 |  |
| C8  | CC73JCH1E102J | C CAPACITOR | 1000pF 25V J  | 1 |  |
| C9  | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C10 | CC73JCH1E102J | C CAPACITOR | 1000pF 25V J  | 1 |  |
| C11 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C12 | CK73JXR1A153K | C CAPACITOR | 0.015uF 10V K | 1 |  |
| C13 | CC73JCH1E681J | C CAPACITOR | 680pF 25V J   | 1 |  |
| C14 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C15 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1 |  |
| C16 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K    | 1 |  |
| C17 | CK73HXR1A334K | C CAPACITOR | 0.33uF 10V K  | 1 |  |
| C18 | CK73JXR1H332K | C CAPACITOR | 3300pF 50V K  | 1 |  |
| C19 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 |  |
| C20 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1 |  |
| C21 | CK73HXR1A334K | C CAPACITOR | 0.33uF 10V K  | 1 |  |
| C26 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K    | 1 |  |
| C27 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C28 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K   | 1 |  |
| C50 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K  | 1 |  |
| C51 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K  | 1 |  |
| C52 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1 |  |
| C53 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K  | 1 |  |
| C55 | CK73HXR1A154K | C CAPACITOR | 0.15uF 10V K  | 1 |  |

| MODEL        | MARK | MODEL        | MARK | MODEL       | MARK | MODEL    | MARK |
|--------------|------|--------------|------|-------------|------|----------|------|
| KDC-BT740DAB | E1   | KDC-BT740DAB | X1   | KDC-BT778HD | K1   | KDC-X704 | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name     | Description   | QTY | Local |
|------|------------|---------------|----------------|---------------|-----|-------|
|      | C60        | CC73JCH1E102J | C CAPACITOR    | 1000pF 25V J  | 1   |       |
|      | C61        | CC73JCH1E102J | C CAPACITOR    | 1000pF 25V J  | 1   |       |
|      | C62        | CK73GXR1A106K | C CAPACITOR    | 10uF 10V K    | 1   |       |
|      | C82        | CC73JCH1E681J | C CAPACITOR    | 680pF 25V J   | 1   |       |
|      | C83        | CC73JCH1H120J | C CAPACITOR    | 12pF 50V J    | 1   |       |
|      | C84        | CC73JCH1H120J | C CAPACITOR    | 12pF 50V J    | 1   |       |
|      | C85        | CK73JXR1A104K | C CAPACITOR    | 0.1uF 10V K   | 1   |       |
|      | C244       | CK73HXR1A154K | C CAPACITOR    | 0.15uF 10V K  | 1   |       |
|      | R3         | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J  | 1   |       |
|      | R4         | RK73HB1J105J  | MG RESISTOR    | 1MΩ 1/16W J   | 1   |       |
|      | R7         | RK73HB1J272J  | MG RESISTOR    | 2.7kΩ 1/16W J | 1   |       |
|      | R8         | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J  | 1   |       |
|      | R9         | RK73HB1J823J  | MG RESISTOR    | 82kΩ 1/16W J  | 1   |       |
|      | R10        | RK73FB2B4R7J  | MG RESISTOR    | 4.7Ω 1/8W J   | 1   |       |
|      | R11        | RK73HB1J822J  | MG RESISTOR    | 8.2kΩ 1/16W J | 1   |       |
|      | R12        | RK73HB1J105J  | MG RESISTOR    | 1MΩ 1/16W J   | 1   |       |
|      | R17        | RK73HB1J123J  | MG RESISTOR    | 12kΩ 1/16W J  | 1   |       |
|      | R18        | RK73HB1J822J  | MG RESISTOR    | 8.2kΩ 1/16W J | 1   |       |
|      | R20        | RK73HB1J103J  | MG RESISTOR    | 10kΩ 1/16W J  | 1   |       |
|      | R21        | RK73HB1J822J  | MG RESISTOR    | 8.2kΩ 1/16W J | 1   |       |
|      | R23        | RK73HB1J183J  | MG RESISTOR    | 18kΩ 1/16W J  | 1   |       |
|      | R24        | RK73HB1J272J  | MG RESISTOR    | 2.7kΩ 1/16W J | 1   |       |
|      | R26        | RK73HB1J223J  | MG RESISTOR    | 22kΩ 1/16W J  | 1   |       |
|      | R28        | RK73HB1J114J  | MG RESISTOR    | 110kΩ 1/16W J | 1   |       |
|      | R31        | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J  | 1   |       |
|      | R32        | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J  | 1   |       |
|      | R33        | RK73HB1J131J  | MG RESISTOR    | 130Ω 1/16W J  | 1   |       |
|      | R37        | RK73HB1J103J  | MG RESISTOR    | 10kΩ 1/16W J  | 1   |       |
|      | R44        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R47        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R48        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R49        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R50        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R51        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | R52        | RK73HB1J562J  | MG RESISTOR    | 5.6kΩ 1/16W J | 1   |       |
|      | R53        | RK73HB1J562J  | MG RESISTOR    | 5.6kΩ 1/16W J | 1   |       |
|      | R54        | RK73HB1J562J  | MG RESISTOR    | 5.6kΩ 1/16W J | 1   |       |
|      | R305       | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J  | 1   |       |
|      | L1         | LB73G0EA-002  | CHIP FERRITE   |               | 1   |       |
|      | L2         | LB73H0AY-004  | CHIP FERRITE   |               | 1   |       |
|      | L3         | LB73H0AY-004  | CHIP FERRITE   |               | 1   |       |
|      | CN1        | EC720AE-1026B | FFC FPC CONNE  |               | 1   |       |
|      | CN2        | EC720AK-0515A | FFC FPC CONNE  |               | 1   |       |
|      | S1         | S6J-0001-00   | PUSH SWITCH    |               | 1   |       |
|      | S2         | S6J-0001-00   | PUSH SWITCH    |               | 1   |       |
|      | S3         | S6J-0002-00   | PUSH SWITCH    |               | 1   |       |
|      | X1         | L7J-0005-00   | QUARTZ CRYSTAL |               | 1   |       |