
9. EXPLODED VIEWS AND PARTS LIST

*NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
• Screw adjacent to▽ mark on the product are used for disassembly.
• For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)

9.1 PACKING

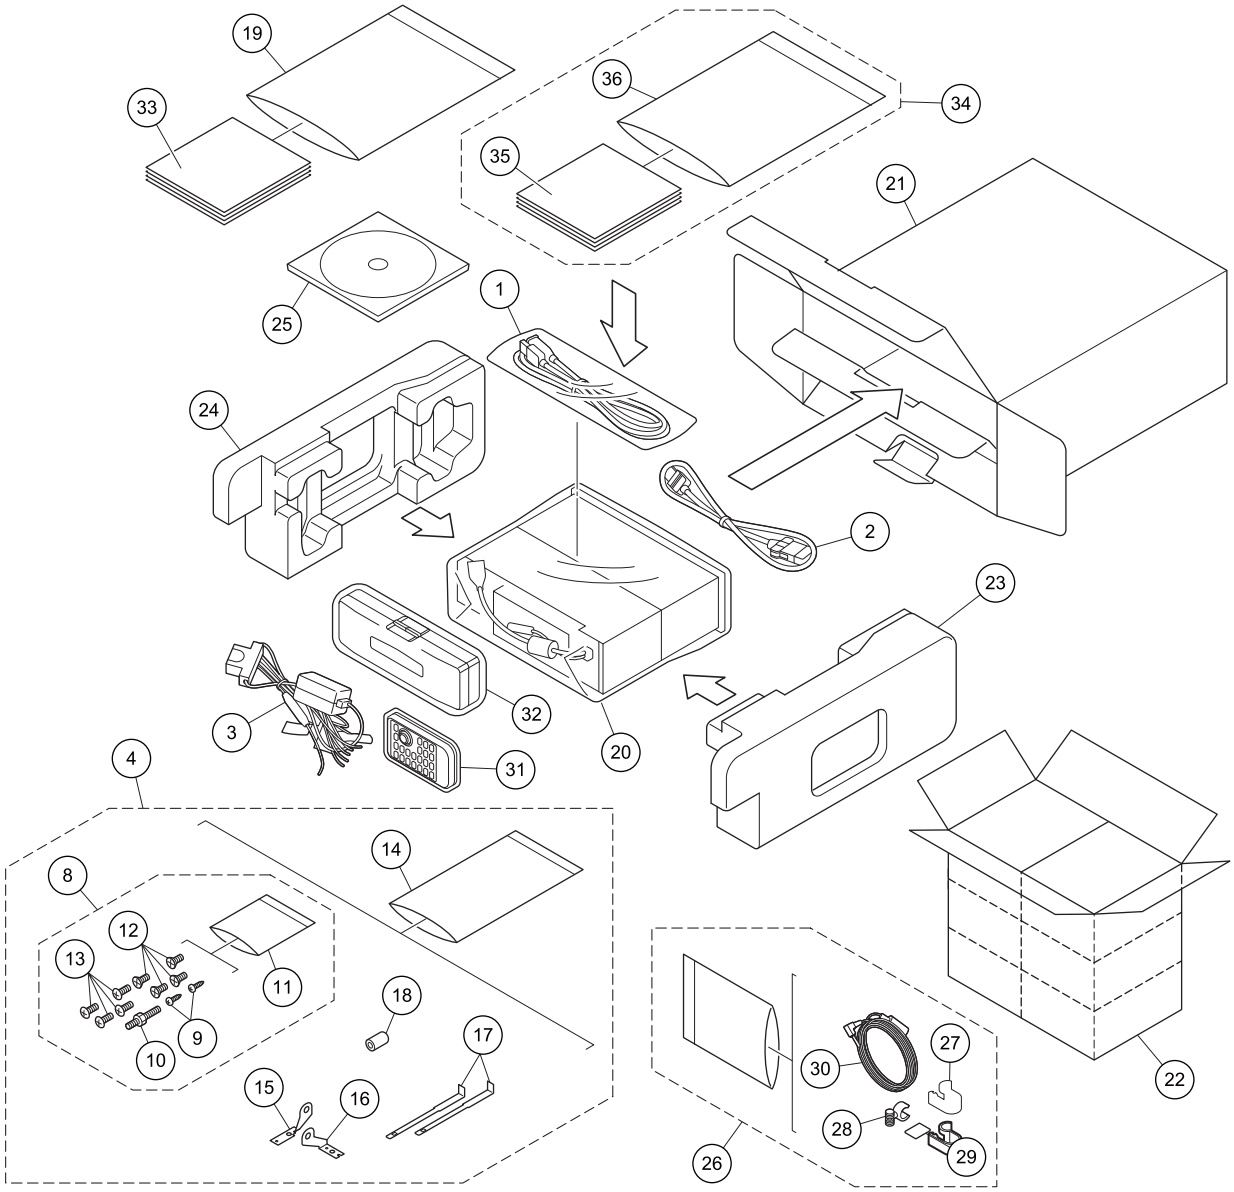

(1)PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDP1040
	2	Cord Assy	See Contrast table(2)
	3	Cord Assy	CDP1118
*	4	Accessory Assy	See Contrast table(2)
	5	•••••	
	6	•••••	
	7	•••••	
	8	Screw Assy	See Contrast table(2)
	9	Screw	See Contrast table(2)
	10	Screw	CBA1650
*	11	Polyethylene Bag	CEG-127
	12	Screw	CRZ50P090FTC
	13	Screw	TRZ50P080FTC
	14	Polyethylene Bag	CEG1160
	15	Holder(R)	See Contrast table(2)
	16	Holder(L)	See Contrast table(2)
	17	Handle	CND3707
	18	Bush	CNV3930
	19	Polyethylene Bag	CEG1116
	20	Polyethylene Bag	See Contrast table(2)
	21	Unit Box	See Contrast table(2)
	22	Contain Box	See Contrast table(2)
	23	Protector	CHP3519

Mark	No.	Description	Part No.
	24	Protector	CHP3520
	25	CD-ROM(Operation Manual)	See Contrast table(2)
	26	Microphone Assy	CPM1064
	27	Clip Holder	CZN5471
	28	Microphone Holder	CZN5472
	29	Cushion	CZN5473
*	30	Microphone	CZX5059
	31	Remote Control Unit	CXC9115
	32	Case Assy	QXA3049
	33-1	Installation Manual	See Contrast table(2)
	33-2	Caution Card	CRP1310
*	33-3	Caution Card	See Contrast table(2)
*	33-4	Caution Card	See Contrast table(2)
*	33-5	Caution Card	CRP1366
*	33-6	Warranty Card	See Contrast table(2)
	34	Owner's Manual Assy	See Contrast table(2)
*	35	Quick Start Guide	See Language table(3)
*	36	Polyethylene Bag	CEG1250

(2) CONTRAST TABLE

DEH-P700BT/XN/UC, DEH-P7000BT/XN/UC and DEH-P7050BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P700BT/XN/UC	DEH-P7000BT/XN/UC	DEH-P7050BT/XN/ES
	2	Cord Assy	CDP1041	Not used	Not used
	4	Accessory Assy	* CEA8695	* CEA8695	CEA6708
	8	Screw Assy	CEA5317	CEA5317	CEA3849
	9	Screw	BPZ20P060FTB	BPZ20P060FTB	Not used
	15	Holder(R)	CND1250	CND1250	Not used
	16	Holder(L)	CND2699	CND2699	Not used
	20	Polyethylene Bag	CEG1173	CEG1173	CEG-162
	21	Unit Box	CHG6466	CHG6465	CHG6467
	22	Contain Box	CHL6466	CHL6465	CHL6467
	25	CD-ROM(Operation Manual)	CPJ1221	CPJ1220	CPJ1219
	33-1	Installation Manual	CRD4301	CRD4303	CRD4305
*	33-3	Caution Card	Not used	Not used	CRP1364
*	33-4	Caution Card	CRP1365	CRP1365	Not used
*	33-6	Warranty Card	CRY1070	CRY1246	Not used
	34	Owner's Manual Assy	CXC9829	CXC9830	CXC9831

(3) Language of Quick Start Guide (Owner's Manual Assy)

Mark	DEH-P700BT/XN/UC (CXC9829)	DEH-P7000BT/XN/UC (CXC9830)	Language
*	CRB2585	CRB2587	English
*	CRB2586	CRB2588	French
*	CRB2793	CRB2795	Spanish(Espanol)

Mark	DEH-P7050BT/XN/ES (CXC9831)	Language
*	CRB2589	English
*	CRB2590	Spanish(Espanol)
*	CRB2591	Portuguese(B)
*	CRB2592	Traditional Chinese
*	CRB2593	Arabic

(4) CONTENTS OF CD-ROM (Operation Manual)

Mark	DEH-P700BT/XN/UC (CPJ1221)	DEH-P7000BT/XN/UC (CPJ1220)	Language
*	CRB2544	CRB2546	English
*	CRB2545	CRB2547	French
*	CRB2792	CRB2794	Spanish(Espanol)


Mark	DEH-P7050BT/XN/ES (CPJ1219)	Language
*	CRB2548	English
*	CRB2549	Spanish(Espanol)
*	CRB2550	Portuguese(B)
*	CRB2551	Traditional Chinese
*	CRB2552	Arabic

All operation manuals are supplied in PDF files by the CD-ROM. No printed papers are available.

(5) Language of Installation Manual

Mark	Part No.		Language
	CRD4301	CRD4303	English, French, Spanish(Espanol)
	CRD4305		English, Spanish(Espanol), Portuguese(B), Traditional Chinese, Arabic

9.2 EXTERIOR(1)

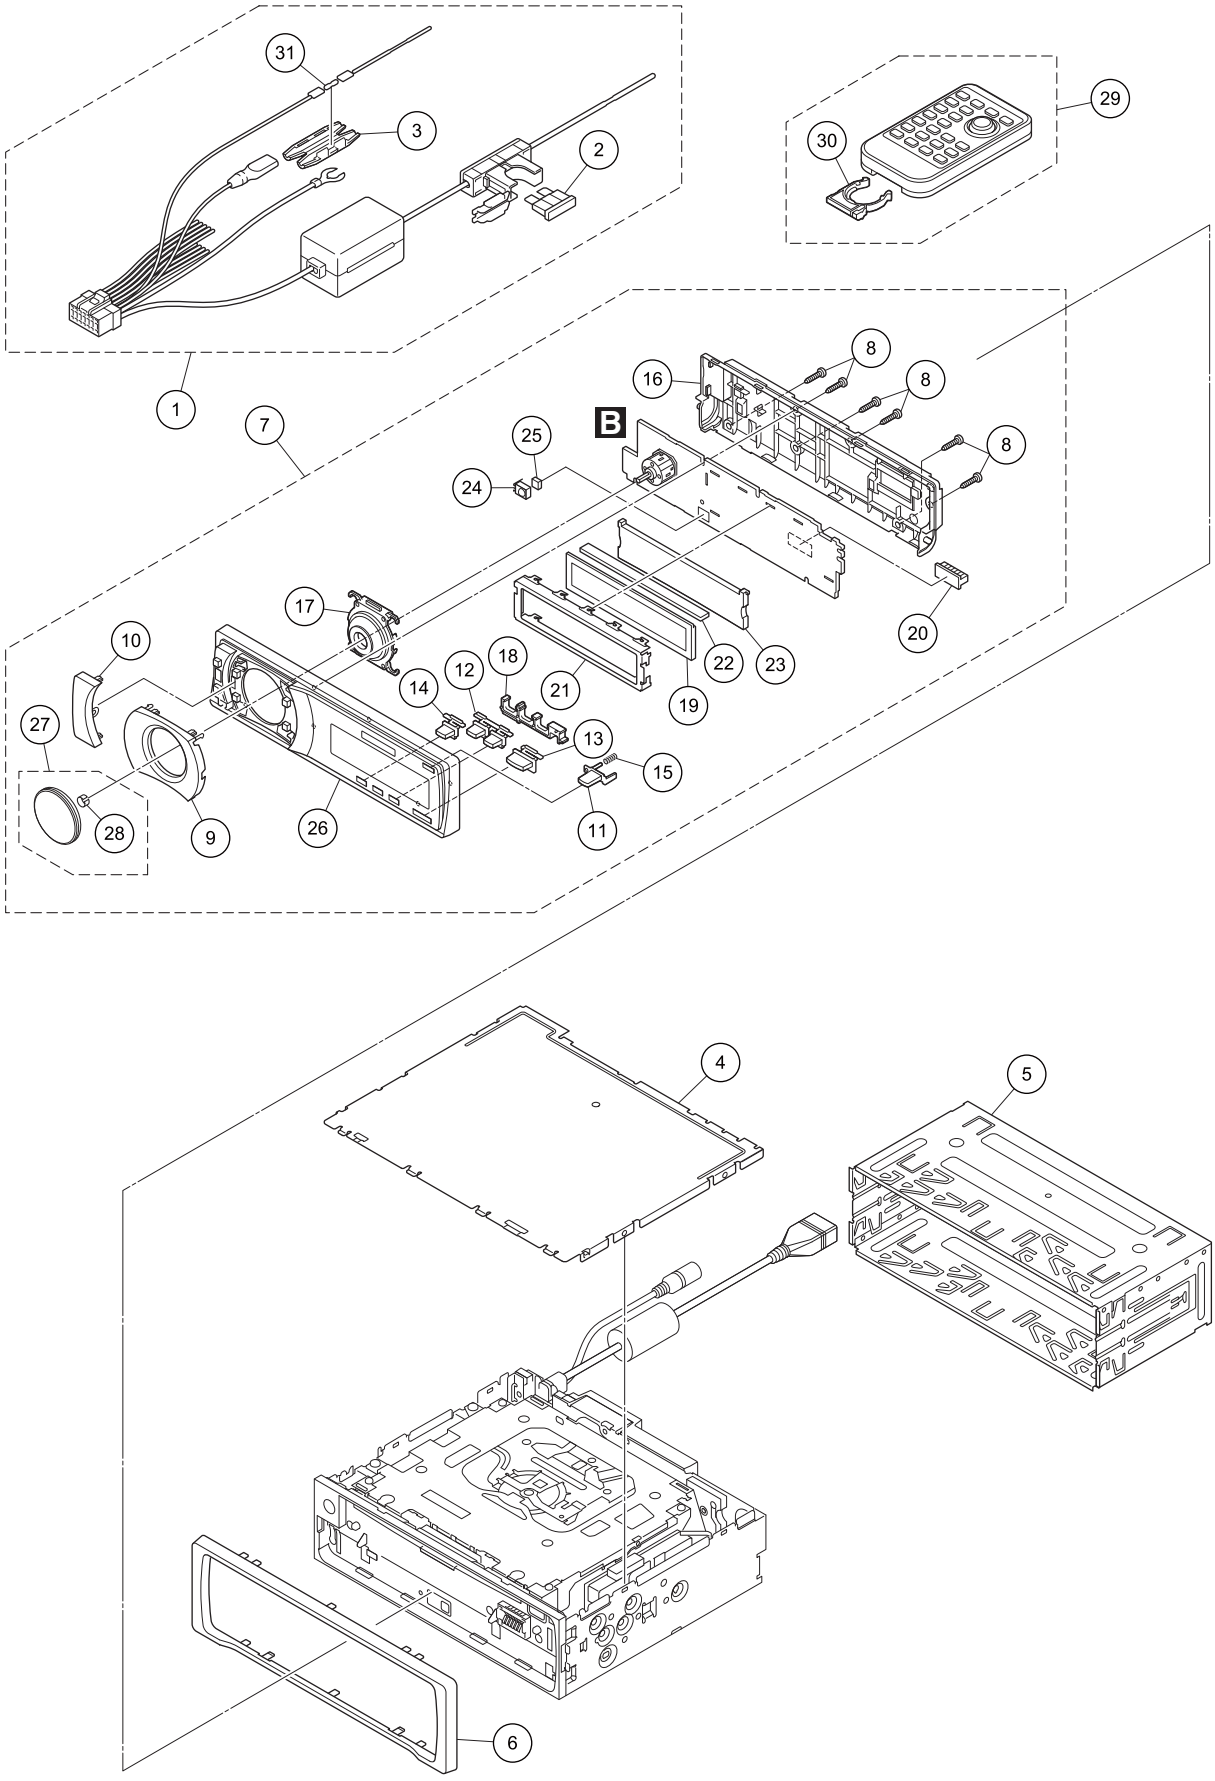

(1) EXTERIOR(1) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Cord Assy	CDP1118
⚠	2	Fuse(10 A)	CEK1136
	3	Cap	CNS1472
	4	Case	CNB3377
	5	Holder	CND3598
	6	Panel	See Contrast table(2)
	7	Detach Grille Assy	See Contrast table(2)
	8	Screw	BPZ20P080FTB
	9	Button(SRC, DISP, BAND, MUTE)	See Contrast table(2)
	10	Button(PHONE)	CAI1689
	11	Button(OPEN)	CAI1691
	12	Button(RDM, S.Rtrv)	CAI1697
	13	Button(LIST)	CAI1890
	14	Button(CLOCK)	CAI1699
	15	Spring	CBH2967
	16	Cover	CNS9336
	17	Lighting Conductor	CNV9900
	18	Holder	CNV9906
	19	LCD	See Contrast table(2)
	20	Connector(CN1101)	CKS5207
	21	Holder	CND4310
	22	Connector	CNV9493
	23	Lighting Conductor	CNV9899
	24	Remote IC(IC1102)	GP1UX51RK
	25	Spacer	CNN2403
	26	Grille Unit	See Contrast table(2)
	27	Knob Unit	See Contrast table(2)
	28	Spring	XBL7005
	29	Remote Control Unit	CXC9115
	30	Cover	CZN5357
	31	Resistor	RS1/2PMF102J

(2) CONTRAST TABLE

DEH-P700BT/XN/UC, DEH-P7000BT/XN/UC and DEH-P7050BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P700BT/XN/UC	DEH-P7000BT/XN/UC	DEH-P7050BT/XN/ES
	6	Panel	CNS9472	CNS9473	CNS9473
	7	Detach Grille Assy	CXC9065	CXC9064	CXC8909
	9	Button (SRC, DISP, BAND, MUTE)	CAI1687	CAI1688	CAI1687
	19	LCD	CAW1952	CAW1952	CAW1956
	26	Grille Unit	CXC8957	CXC8956	CXC8958
	27	Knob Unit	QXA3006	QXA3012	QXA3006

9.3 EXTERIOR(2)

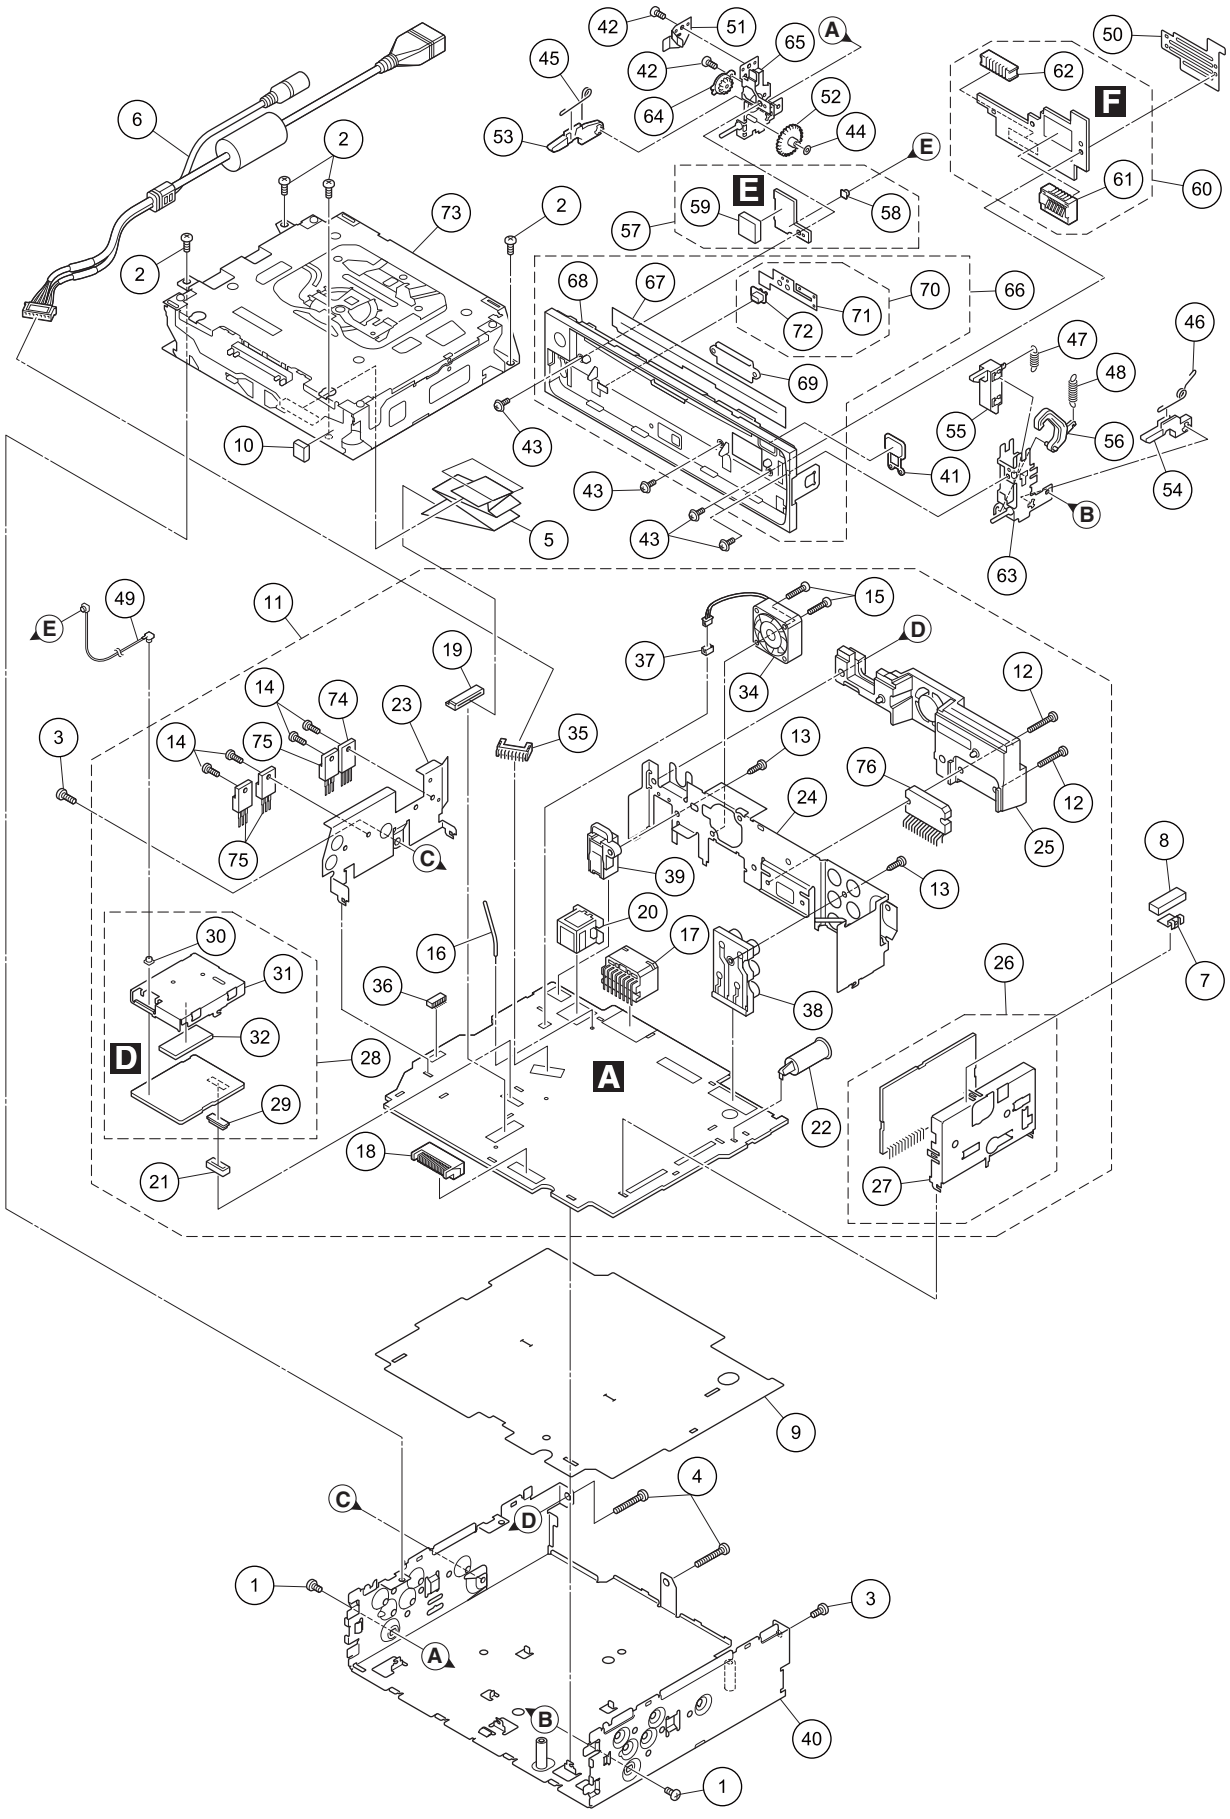

(1) EXTERIOR(2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	BMZ30P040FTB
	2	Screw	BSZ26P060FTC
	3	Screw	BSZ30P060FTC
	4	Screw	BSZ30P200FTC
	5	Cable	CDE8564
	6	Cord Assy	CDE8578
	7	Earth Plate	CNC8915
	8	Cushion	CNM8890
	9	Insulator	CNN1563
	10	Insulator	CNN1653
	11	Tuner Amp Unit	See Contrast table(2)
	12	Screw	BMZ26P200FTC
	13	Screw	BPZ26P070FTC
	14	Screw	BSZ26P060FTC
	15	Screw(M2.6 x 14)	CBA1632
	16	Clamper	CEF1048
	17	Plug(CN981)	CKM1278
	18	Plug(CN801)	CKS3537
	19	Connector(CN701)	CKS3833
	20	Connector(JA101)	CKS5271
	21	Connector(CN552)	CKS5321
	22	Antenna Jack(JA401)	CKX1056
	23	Holder	CND3826
	24	Holder	CND4311
	25	Heat Sink	CNR1903
	26	FM/AM Tuner Unit	CWE2098
	27	Holder	CND4324
	28	Bluetooth Unit	CWN3394
	29	Connector(CN76)	CKS5320
	30	Connector(CN1)	CKS5749
	31	Shield	CND3134
	32	Sheet	CNM9598
	33	•••••	
	34	Fan Motor	CXM1288
	35	7P Plug(CN741)	KM200NA7L
	36	7P FFC Connector(CN551)	VKN1299
	37	ZH Connector(CN891)	VKN1928
	38	Pin Jack(JA301)	XKB7001
	39	Jack(JA151)	See Contrast table(2)
	40	Chassis Unit	CXC8964
	41	Button	CAC7752
	42	Screw(M2 x 4)	CBA1649
	43	Screw(M2 x 4.5)	CBA1925
	44	Washer	CBF1038
	45	Spring	CBH2650
	46	Spring	CBH2651
	47	Spring	CBH2652
	48	Spring	CBH2653
	49	Cord Assy	CDE8467
	50	Holder	CND1254
	51	Earth Plate	CND2708
	52	Gear	CNV5997
	53	Arm	CNV7400
	54	Arm	CNV7401
	55	Arm	CNV7402
	56	Arm	CNV7403
	57	Antenna Unit	CWN2338
	58	Connector(ANT1102)	CKS5749
	59	BT Antenna(ANT1101)	CWX3132
	60	Panel Unit	CWN3286
	61	Connector(CN1972)	CKS4806
	62	Connector(CN1971)	CKS5192
	63	Holder Unit	CXB9502
	64	Damper Unit	CXB9503
	65	Holder Unit	CXC5760
	66	Sub Panel Unit	CXC9408
	67	Cover	CNM6854
	68	Panel	CNS9396
	69	Lighting Conductor	CNV6487
	70	Sub Spring Assy	XXA7363
	71	Spring	CBL1512
	72	Pin	CNV6486
	73	CD Mechanism Module(S10.5)	CXK5775
	74	IC(IC911)	NJM2388F84
	75	Transistor(Q452, Q751, Q901)	2SD2396
	76	IC(IC351)	PAL007C

(2) CONTRAST TABLE

DEH-P700BT/XN/UC, DEH-P7000BT/XN/UC and DEH-P7050BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P700BT/XN/UC	DEH-P7000BT/XN/UC	DEH-P7050BT/XN/ES
	11	Tuner Amp Unit	CWN3277	CWN3278	CWN3279
	39	Jack(JA151)	YKS5001	YKS5001	YKS5017

9.4 CD MECHANISM MODULE

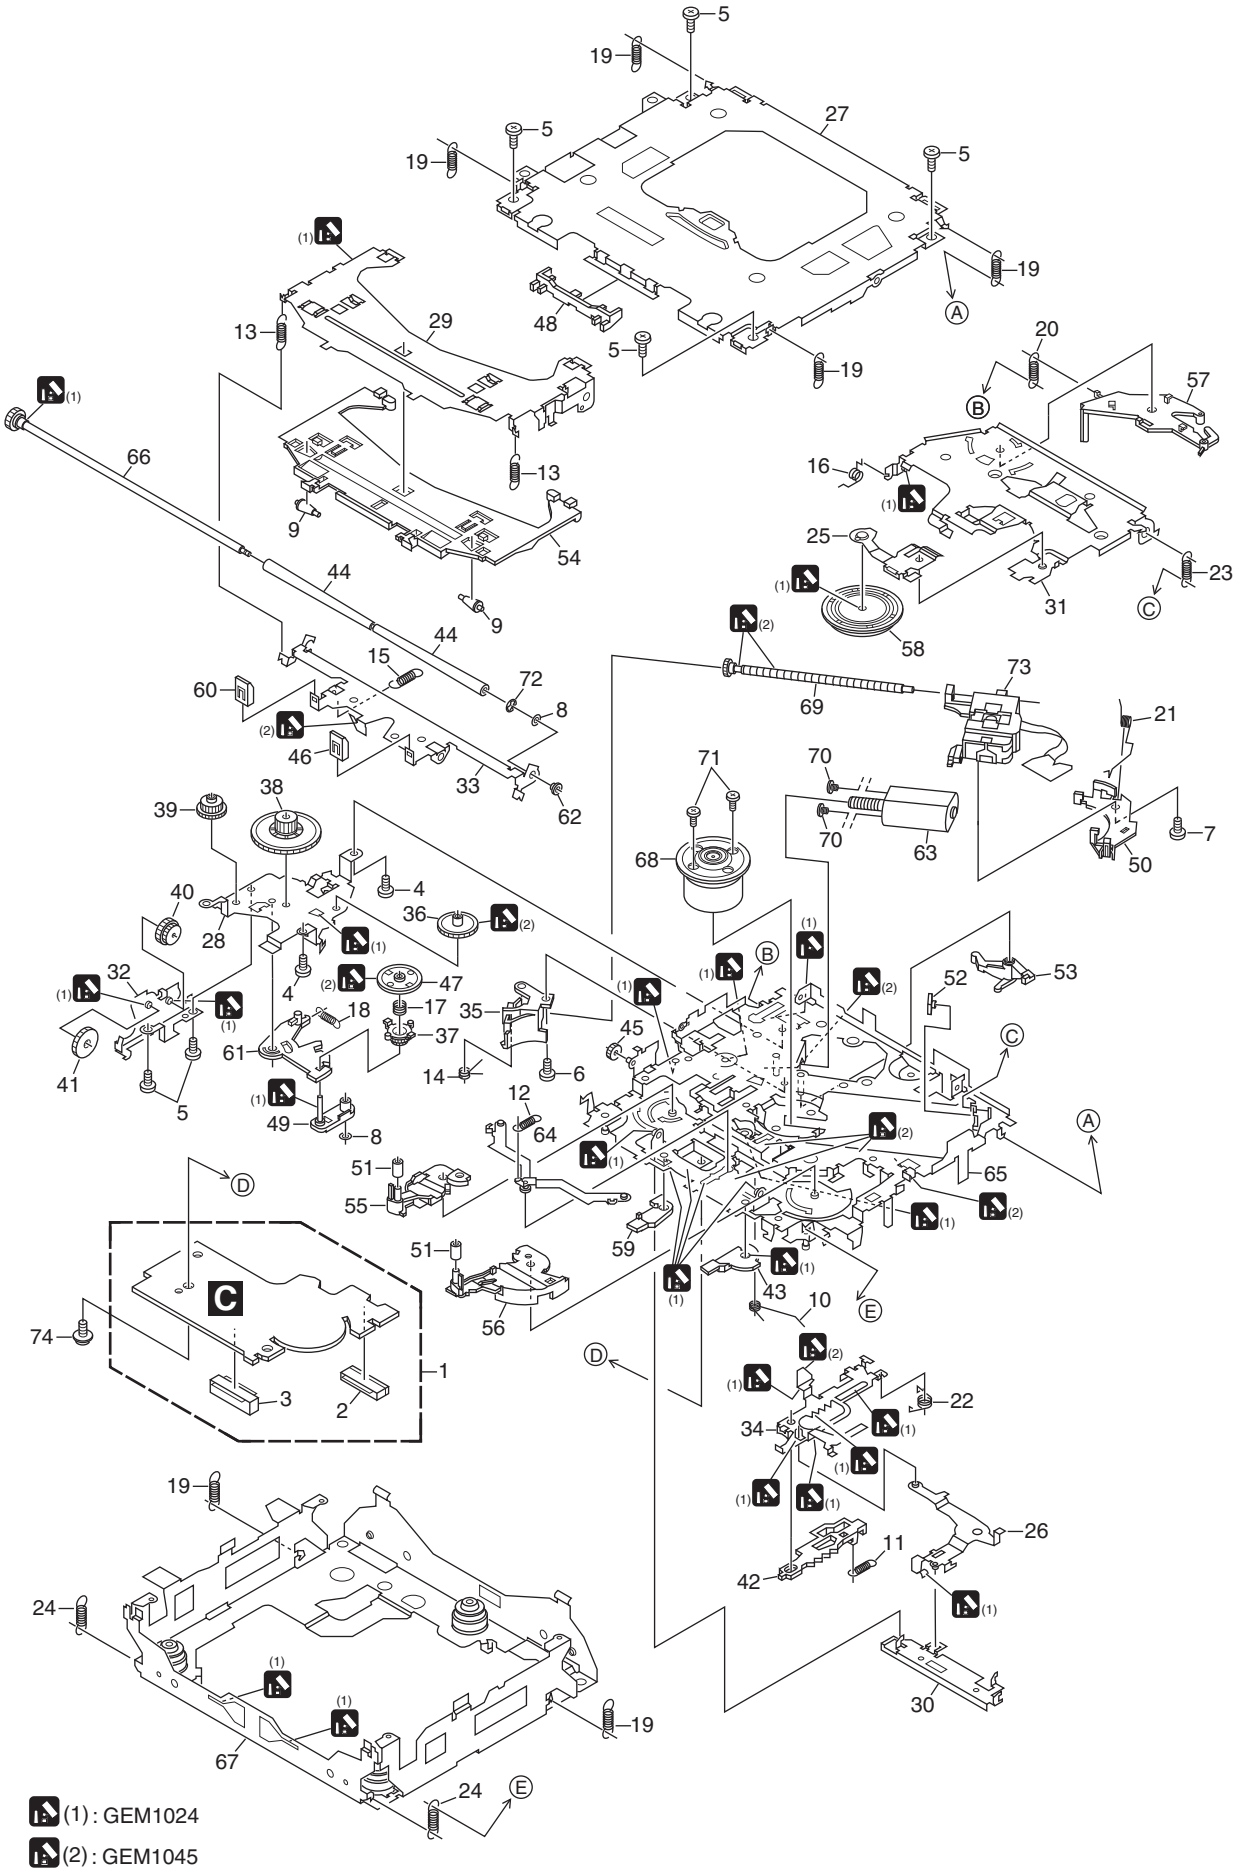

CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.
1	CD Core Unit(S10.5COMP2-iPod-C2)	CWX3624
2	Connector(CN101)	CKS4182
3	Connector(CN701)	CKS4186
4	Screw	BMZ20P025FTC
5	Screw	BSZ20P040FTC
6	Screw(M2 x 3)	CBA1511
7	Screw(M2 x 4)	CBA1835
8	Washer	CBF1038
9	Roller	CNV9499
10	Spring	CBH2609
11	Spring	CBH2612
12	Spring	CBH2614
13	Spring	CBH2616
14	Spring	CBH2617
15	Spring	CBH2620
16	Spring	CBH2855
17	Spring	CBH2937
18	Spring	CBH2735
19	Spring	CBH2854
20	Spring	CBH2642
21	Spring	CBH2856
22	Spring	CBH2857
23	Spring	CBH2860
24	Spring	CBH2861
25	Spring	CBL1686
26	Arm	CND1909
27	Frame	CND2582
28	Bracket	CND2583
29	Arm	CND3831
30	Lever	CND2585
31	Arm	CND2586
32	Bracket	CND2587
33	Arm	CND2588
34	Lever	CND2589
35	Holder	CNV7201
36	Gear	CNV7207
37	Gear	CNV7208
38	Gear	CNV7209
39	Gear	CNV7210
40	Gear	CNV7211
41	Gear	CNV7212
42	Rack	CNV7214
43	Arm	CNV7216
44	Roller	CNV7218
45	Gear	CNV7219
46	Guide	CNV7361
47	Gear	CNV7595
48	Guide	CNV7799
49	Arm	CNV7805
50	Rack	CNV8342
51	Roller	CNV8343
52	Holder	CNV8344
53	Arm	CNV8345
54	Guide	CNV9498
55	Arm	CNV8348
56	Arm	CNV8349
57	Arm	CNV8350
58	Clamper	CNV8365
59	Arm	CNV8386
60	Guide	CNV8396
61	Arm	CNV8413
62	Collar	CNV8938
63	Motor Unit(M2)	CXC4026
64	Arm Unit	CXC4027
65	Chassis Unit	CXC4028
66	Gear Unit	CXC4029
67	Frame Unit	CXC4031
68	Motor Unit(M1)	CXC7134
69	Screw Unit	CXC6359
70	Screw	JFZ20P020FTC
71	Screw	JGZ17P022FTC
72	Washer	YE20FTC
73	Pickup Unit(P10.5)(Service)	CXX1942
74	Screw	IMS26P030FTC

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- *The expression of the unit in this manual is shown by u instead of µ. Please do not make a mistake.*

Unit Number : CWN3277(P700BT)
Unit Number : CWN3278(P7000BT)
Unit Number : CWN3279(P7050BT)
Unit Name : Tuner Amp Unit
Unit Number : (UC)
Unit Number : (ES)
Unit Name : Keyboard Unit
Unit Number : CWX3624
Unit Name : CD Core Unit(S10.5COMP2-iPod-C2)
Unit Number : CWN3394
Unit Name : Bluetooth Unit
Unit Number : CWN2338
Unit Name : Antenna Unit
Unit Number : CWN3286
Unit Name : Panel Unit

A

Unit Number : CWN3277(P700BT)
Unit Number : CWN3278(P7000BT)
Unit Number : CWN3279(P7050BT)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	(B,32,115) IC	HA12241FP
IC 201	(B,132,97) IC	PML018A
IC 251	(A,120,88) IC	TC4066BFT
IC 261	(B,24,26) IC	NJM2360M
IC 351	(A,104,135) IC	PAL007C
IC 431	(B,145,19) IC	NJM2885DL1-33
IC 461	(B,27,84) IC	NJM2885DL1-33
IC 501	(A,77,58) IC	TC74VHCT08AFTS1
IC 521	(A,91,59) IC	TC74VHC08FTS1
IC 541	(A,84,57) IC	LE25FW203PATT
IC 561	(A,92,104) IC	NJM4558MD
IC 601	(A,131,59) IC	PEG441B8
IC 651	(A,140,35) IC	S-80835CNMC-B8U
IC 701	(B,92,32) IC	NJM2885DL1-33
IC 741	(A,70,70) IC	R5523N001B
IC 761	(A,84,91) Regulator IC	BD9781HFP
IC 911	(A,6,116) IC	NJM2388F84
IC 941	(A,115,115) IC(P700BT)	TPD1018F
Q 101	(A,34,119) Transistor	UMF23N
Q 202	(A,143,82) Transistor	2SC4081
Q 251	(B,112,89) Transistor	RT3T22M
Q 252	(A,126,78) Chip Transistor	DTC124EUA
Q 261	(A,16,33) Transistor	2SD1767
Q 262	(A,12,30) Transistor	RT3T22M
Q 301	(A,136,122) Transistor	IMH23
Q 302	(A,142,120) Transistor	IMH23
Q 303	(A,159,122) Transistor	IMH23
Q 304	(A,134,119) Transistor	RT3T22M
Q 381	(B,133,116) Transistor	2SC4081
Q 382	(B,132,112) Chip Transistor	DTC124EUA
Q 383	(A,130,118) Chip Transistor	DTC114EUA
Q 451	(B,15,73) Transistor	RT3T22M
Q 452	(A,6,70) Transistor	2SD2396
Q 562	(A,106,101) Transistor	DTC314TU
Q 563	(A,96,88) Transistor	DTC314TU
Q 751	(A,6,47) Transistor	2SD2396
Q 752	(A,17,52) Transistor	RT3T22M
Q 821	(A,35,8) Transistor	2SD1767
Q 823	(B,69,13) Transistor	RT3T22M
Q 831	(B,49,22) Chip Transistor	DTC114EUA
Q 832	(B,44,22) Transistor	2SA1576A
Q 841	(A,152,19) Transistor	2SA1576A
Q 842	(A,144,31) Chip Transistor	DTC114EUA
Q 891	(A,35,115) Transistor	RT3T22M
Q 892	(A,42,111) Transistor	2SD1767

Circuit Symbol and No.		Part No.
Q 901	(A,6,101) Transistor	2SD2396
Q 902	(A,29,98) Transistor	RT3T22M
Q 921	(A,49,111) Transistor	UMX1N
Q 951	(B,63,114) Transistor	2SA1576A
D 151	(B,12,136) Diode	MALS068X
D 152	(B,23,129) Diode	MALS068X
D 153	(B,12,134) Diode(P700BT,P7000BT)	MALS068X
D 154	(B,23,131) Diode(P700BT,P7000BT)	MALS068X
D 155	(B,16,136) Diode	MALS068X
D 201	(A,150,81) Diode	HZS12L(B1)
D 251	(A,119,82) Diode	DAN202U
D 261	(B,32,25) Diode	RB551V-30
D 262	(A,16,25) Diode	HZS11L(A1)
D 301	(A,126,122) Diode	1SS133
D 381	(A,129,108) Diode	HZU8R2(B3)
D 382	(A,134,115) Diode	DAN202U
D 451	(A,34,69) Diode	MPG06G-6415G50
D 452	(B,11,76) Diode	UDZS5R6(B)
D 453	(A,16,56) Diode	DAN202U
D 551	(A,22,60) Diode	DAN202U
D 562	(A,110,96) Diode	1SS355
D 563	(A,97,69) Diode	1SS355
D 651	(A,139,29) Diode	1SS355
D 751	(A,13,47) Diode	HZS7L(C3)
D 761	(A,75,80) Diode	RB060L-40
D 762	(A,65,94) Diode	1SR154-400
D 801	(B,108,18) Diode	HZM6R2ZMWA
D 802	(B,98,20) Diode	MALS068X
D 803	(B,119,21) Diode	RSB6R8F2
D 804	(B,126,21) Diode	RSB6R8F2
D 805	(B,114,18) Diode	RSB6R8F2
D 807	(B,101,17) Diode	HZM6R2ZMWA
D 821	(A,59,10) Diode	HZS9L(C2)
D 891	(A,40,115) Diode	UDZS12(B)
D 901	(A,20,95) Diode	UDZS5R6(B)
D 902	(A,15,99) Diode	MPG06G-6415G50
D 921	(B,46,119) Diode	UDZS7R5(B)
D 922	(B,50,121) Diode	HZU6R8(B2)
D 941	(A,118,124) Diode	MPG06G-6415G50
D 942	(A,122,124) Diode	MPG06G-6415G50
D 951	(B,59,118) Diode	DAN202U
D 981	(A,72,127) Diode	MPG06G-6415G50
D 982	(A,43,125) Diode	MPG06G-6415G50
L 101	(A,24,116) Inductor	LCTC1R0K1608
L 261	(A,28,22) Inductor	CTF1660
L 401	(B,158,99) Inductor	LCTAW220J2520
L 402	(A,154,81) Inductor	LAU1R0K
L 403	(A,154,36) Inductor	LAU2R2K
L 601	(A,136,36) Ferri-Inductor	LAU100K
L 741	(A,53,66) Inductor	CTF1713
L 761	(A,79,72) Inductor	CTH1385
L 841	(A,147,19) Chip Coil	LCTAW100J2520
L 951	(A,57,127) Inductor	LCTAW2R2J2520
X 601	(A,114,59) Crystal 20 MHz	VSS1167
S 651	(A,70,5) Switch(RESET)	CSG1020
S 801	(A,25,5) Switch(DETACH)	CSN1039
VA741	(B,55,82) Varistor	EZJZ1V800AM
VA742	(B,57,84) Varistor	EZJZ1V800AM
P 401	(B,164,110) Surge Protector	IMSA-6801-01Y901
⚠P451	(B,9,68) Fuse 1 A	CEK1280
⚠P301	(A,127,129) Fuse 3 A	CEK1286

Circuit Symbol and No.		Part No.
BZ601	(A,138,20) Buzzer	CPV1062

RESISTORS

R 101	(B,42,115)	RS1/16S181J
R 102	(B,40,123)	RS1/16S181J
R 103	(B,40,119)	RS1/16S102J
R 104	(B,39,127)	RS1/16S102J
R 105	(B,39,125)	RS1/16S223J
R 106	(A,29,119)	RS1/16S222J
R 107	(B,34,131)	RS1/16S150J
R 108	(B,34,132)	RS1/16S470J
R 109	(B,39,112)	RS1/16S101J
R 110	(B,38,131)	RS1/16S101J
R 111	(B,30,132)	RS1/16S101J
R 112	(B,39,110)	RS1/16S102J
R 113	(A,38,120)	RS1/16S562J
R 114	(A,40,119)	RS1/16S332J
R 115	(B,41,117)	RS1/16S223J
R 151	(A,12,125)	RS1/16S101J
R 152	(A,17,125)	RS1/16S101J
R 153	(A,13,125)	RS1/16S223J
R 154	(A,16,125)	RS1/16S223J
R 155	(A,8,125) (P700BT,P7000BT)	RS1/16S102J
R 156	(A,20,125) (P700BT,P7000BT)	RS1/16S102J
R 201	(A,144,79)	RS1/16S681J
R 202	(A,139,74)	RS1/16S102J
R 203	(A,136,74)	RS1/16S102J
R 204	(A,138,74)	RS1/16S102J
R 251	(A,115,89)	RS1/16S103J
R 252	(B,119,90)	RS1/16S472J
R 253	(A,130,77)	RS1/16S103J
R 261	(B,30,20)	RS1/16S472J
R 262	(B,26,19)	RS1/16S102J
R 263	(B,26,17)	RS1/16S821J
R 264	(B,20,30)	RS1/10SR821J
R 265	(A,20,30)	RS1/16S1R0J
R 266	(A,12,34)	RS1/16S102J
R 301	(A,134,126)	RS1/16S0R0J
R 303	(A,142,126)	RS1/16S0R0J
R 304	(B,131,120)	RS1/16S390J
R 305	(B,145,117)	RS1/16S390J
R 306	(B,131,122)	RS1/16S223J
R 307	(B,143,119)	RS1/16S223J
R 308	(B,141,117)	RS1/16S390J
R 309	(B,162,119)	RS1/16S390J
R 310	(B,140,124)	RS1/16S223J
R 311	(B,162,124)	RS1/16S223J
R 312	(B,135,120)	RS1/16S390J
R 313	(B,158,120)	RS1/16S390J
R 314	(B,135,122)	RS1/16S223J
R 315	(B,158,122)	RS1/16S223J
R 316	(A,130,121)	RS1/16S102J
R 317	(A,125,129)	RS1/16S820J
R 351	(A,115,123)	RS1/16S153J
R 352	(A,103,116)	RS1/16S182J
R 353	(A,106,114)	RS1/16S182J
R 354	(A,108,114)	RS1/16S182J
R 355	(A,110,116)	RS1/16S182J

Circuit Symbol and No.		Part No.
R 356	(B,102,114)	RS1/16S272J
R 357	(B,105,114)	RS1/16S272J
R 358	(B,109,114)	RS1/16S272J
R 359	(B,111,114)	RS1/16S272J
R 381	(A,134,111)	RS1/16S473J
R 382	(A,141,74)	RS1/16S473J
R 383	(A,133,113)	RS1/16S104J
R 384	(B,134,110)	RS1/16S472J
R 385	(A,133,108)	RS1/16S103J
R 386	(A,135,109)	RS1/16S103J
R 387	(A,131,111)	RS1/16S331J
R 388	(B,123,116)	RS1/16S101J
R 413	(B,155,64)	RS1/16S681J
R 415	(B,155,68)	RS1/16S681J
R 416	(B,155,70)	RS1/16S681J
R 417	(B,155,72)	RS1/16S681J
R 418	(B,155,74)	RS1/16S681J
R 419	(B,155,76)	RS1/16S681J
R 451	(B,9,73)	RS1/16S392J
R 452	(A,28,71)	RD1/4PU0R0J
R 453	(A,25,58)	RS1/16S0R0J
R 501	(A,82,64)	RS1/16S681J
R 502	(A,81,64)	RS1/16S681J
R 503	(A,76,52)	RAB4C681J
R 504	(B,60,40)	RS1/16S0R0J
R 521	(A,90,65)	RAB4C681J
R 522	(B,66,50)	RS1/16S182J
R 523	(B,100,58)	RS1/16S182J
R 524	(B,95,57)	RS1/16S332J
R 525	(B,61,43)	RS1/16S332J
R 526	(A,90,53)	RAB4C681J
R 527	(B,91,55)	RS1/16S0R0J
R 541	(A,85,63)	RAB4C101J
R 542	(B,87,55)	RS1/16S0R0J
R 543	(A,86,52)	RS1/16S101J
R 544	(A,86,50)	RS1/16S101J
R 553	(B,65,59)	RS1/16S101J
R 554	(B,64,63)	RS1/16S101J
R 562	(A,87,110)	RS1/16S104J
R 563	(A,85,107)	RS1/16S473J
R 564	(A,88,110)	RS1/16S151J
R 565	(A,99,106)	RS1/16S473J
R 566	(A,102,102)	RS1/16S473J
R 567	(A,99,104)	RS1/16S473J
R 568	(B,98,101)	RS1/16S473J
R 569	(A,103,107)	RS1/16S223J
R 570	(A,99,107)	RS1/16S102J
R 571	(A,103,102)	RS1/16S102J
R 572	(B,105,110)	RS1/16S473J
R 573	(A,87,103)	RS1/16S823J
R 574	(A,99,96)	RS1/16S103J
R 575	(A,99,98)	RS1/16S103J
R 576	(A,83,103)	RS1/16S333J
R 577	(A,87,100)	RS1/16S332J
R 578	(A,85,106)	RS1/16S153J
R 582	(A,84,99)	RS1/16S272J
R 583	(A,94,95)	RS1/16S220J
R 584	(A,93,91)	RS1/16S102J
R 585	(A,93,90)	RS1/16S223J
R 603	(A,130,23)	RS1/16S102J

Circuit Symbol and No.			Part No.
R 605	(B,128,50)		RS1/16S104J
R 606	(B,104,42)		RS1/16S101J
R 607	(B,115,45)		RS1/16S472J
R 608	(A,151,59)		RAB4C681J
R 609	(B,117,41)		RS1/16S472J
R 610	(A,144,57)		RS1/16S104J
R 611	(A,144,55)		RAB4C681J
R 612	(A,119,58)		RS1/16S473J
R 613	(A,144,61)		RAB4C681J
R 614	(B,118,63)		RS1/16S681J
R 615	(A,117,68)		RS1/16S473J
R 616	(B,121,72)		RS1/16S104J
R 619	(A,122,72)		RS1/16S104J
R 620	(A,122,78)		RS1/16S104J
R 621	(A,122,80)		RS1/16S104J
R 622	(A,122,74)		RS1/16S0R0J
R 623	(B,129,68)		RS1/16S103J
R 624	(B,136,63)		RS1/16S473J
R 625	(A,131,74)		RS1/16S223J
R 626	(B,133,68)		RS1/16S103J
R 627	(B,106,47)		RS1/16S222J
R 628	(B,124,60)		RS1/16S103J
R 629	(A,135,48)		RS1/16S473J
R 631	(B,122,39)		RS1/16S103J
R 633	(B,141,49)	(P700BT,P7000BT)	RS1/16S104J
R 634	(B,132,40)	(P7050BT)	RS1/16S104J
R 635	(B,145,51)	(P700BT,P7050BT)	RS1/16S104J
R 636	(B,132,42)	(P7000BT)	RS1/16S104J
R 641	(A,142,71)		RS1/16S104J
R 651	(A,139,31)		RS1/16S183J
R 652	(B,141,37)		RS1/16S102J
R 701	(A,78,42)		RAB4C682J
R 702	(B,73,27)		RS1/16S104J
R 703	(B,69,27)		RS1/16S473J
R 704	(B,82,49)		RS1/16S221J
R 705	(B,88,48)		RS1/16S221J
R 706	(B,83,35)		RS1/16S221J
R 707	(B,83,31)		RS1/16S221J
R 708	(B,83,29)		RS1/16S221J
R 709	(B,83,25)		RS1/16S102J
R 741	(B,52,78)		RS1/16S0R0J
R 742	(B,54,80)		RS1/16S0R0J
R 743	(A,54,71)		RS1/16S0R0J
R 744	(A,52,71)		RS1/16S0R0J
R 745	(A,76,65)		RS1/16S102J
R 751	(A,21,53)		RD1/4PU102J
R 762	(A,90,80)		RS1/16S333J
R 763	(A,92,80)		RS1/10S471J
R 764	(A,87,81)		RS1/16S683J
R 765	(A,89,82)		RS1/16S3302F
R 766	(A,90,79)		RS1/16S8201F
R 767	(A,82,81)		RS1/16S8202F
R 768	(A,84,80)		RS1/16S123J
R 801	(B,99,22)		RS1/16S102J
R 802	(B,122,23)		RS1/16S222J
R 803	(B,125,14)		RS1/16S222J
R 804	(B,117,24)		RS1/16S222J
R 805	(B,126,16)		RS1/16S222J
R 806	(B,112,23)		RS1/16S222J
R 810	(B,114,28)		RS1/16S102J
R 811	(B,99,24)		RS1/16S183J

Circuit Symbol and No.			Part No.
R 812	(B,119,29)		RS1/16S104J
R 813	(B,127,26)		RS1/16S104J
R 814	(B,119,27)		RS1/16S104J
R 815	(B,115,26)		RS1/16S104J
R 816	(A,76,15)		RS1/16S104J
R 817	(B,46,26)		RS1/16S102J
R 824	(A,61,7)		RS1/16S271J
R 825	(A,63,7)		RS1/16S271J
R 826	(A,55,7)		RS1/16S271J
R 828	(A,76,12)		RS1/16S0R0J
R 829	(B,61,8)		RS1/16S222J
R 830	(A,53,4)		RS1/16S1R0J
R 831	(B,48,19)		RS1/16S103J
R 832	(B,39,20)		RS1/16S473J
R 833	(A,27,13)		RD1/4PU391J
R 841	(A,143,28)		RS1/16S102J
R 842	(A,143,27)		RS1/16S473J
R 843	(A,152,15)		RS1/16S472J
R 891	(A,38,112)		RS1/16S181J
R 892	(A,36,113)		RS1/16S181J
R 894	(A,36,112)		RS1/16S1R0J
R 901	(A,24,98)		RS1/16S333J
R 902	(A,26,97)		RS1/16S821J
R 903	(A,26,99)		RS1/16S821J
R 912	(A,12,109)		RS1/16S473J
R 921	(B,48,113)		RS1/16S104J
R 922	(B,54,115)		RS1/16S103J
R 923	(B,50,115)		RS1/16S473J
R 924	(B,54,117)		RS1/16S223J
R 925	(B,50,119)		RS1/16S472J
R 941	(B,115,125)	(P7000BT,P7050BT)	RS1/16S0R0J
R 942	(A,114,120)	(P700BT)	RS1/16S103J
R 951	(B,84,105)		RS1/16S102J
R 952	(B,59,115)		RS1/16S472J
R 954	(B,55,122)		RS1/16S153J

CAPACITORS

C 103	(A,43,131)		CKSRYB104K16
C 106	(A,24,112)		CKSRYB104K16
C 151	(B,16,134)		CKSRYB473K50
C 201	(A,146,80)		CKSRYB104K16
C 202	(A,117,97)		CKSRYB105K10
C 203	(B,121,97)		CKSRYB105K10
C 204	(B,113,102)		CKSRYB105K10
C 205	(B,111,106)		CKSRYB105K10
C 206	(B,146,100)		CKSRYB224K16
C 207	(B,146,103)		CKSRYB224K16
C 208	(B,112,104)		CKSRYB105K10
C 209	(B,110,108)		CKSRYB105K10
C 210	(B,115,94)		CKSRYB105K10
C 211	(B,115,97)		CKSRYB105K10
C 212	(A,133,85)		CEJQ470M16
C 213	(A,127,86)		CKSRYB105K10
C 214	(B,146,83)		CKSRYB104K16
C 215	(A,144,98)		CEJQ100M25
C 216	(A,144,93)		CEJQ4R7M50
C 217	(B,120,103)		CKSRYB105K10
C 218	(B,120,99)		CKSRYB105K10
C 219	(B,120,101)		CKSQYB225K10
C 220	(A,144,87)		CEJQ470M16
C 251	(A,115,97)		CKSRYB104K16
C 252	(B,118,88)		CKSRYB105K6R3
C 253	(B,119,92)		CKSRYB105K6R3
C 254	(A,115,85)		CKSRYB104K16
C 262	(B,30,19)		CCSRCH101J50
C 263	(A,28,31)		CEJQ470M25
C 264	(A,23,30)	4.7 uF	CCG1111
C 265	(B,32,23)		CCSRCH331J50
C 266	(A,29,39)		CEJQ101M16
C 267	(B,25,36)		CKSRYB104K16
C 269	(A,12,27)		CKSRYB104K16
C 301	(A,140,114)		CEJQ100M25
C 302	(A,146,109)		CEJQ100M25
C 305	(A,146,114)		CEJQ100M25
C 306	(A,158,114)		CEJQ100M25
C 309	(A,140,109)		CEJQ100M25
C 310	(A,152,114)		CEJQ100M25
C 313	(A,124,113)		CEJQ220M35
C 351	(B,105,120)		CKSRYB474K16
C 352	(B,102,121)		CKSRYB474K16
C 353	(B,109,121)		CKSRYB474K16
C 354	(B,111,121)		CKSRYB474K16
C 355	(B,105,124)		CKSQYB474K16
C 356	(B,102,125)		CKSQYB474K16
C 357	(B,109,125)		CKSQYB474K16
C 358	(B,111,125)		CKSQYB474K16
C 359	(B,123,129)		CKSQYB225K10
C 360	(B,119,131)		CKSQYB225K10
C 362	(A,115,109)		CEJQ100M25
C 363	(B,112,136)		CKSRYB104K16
C 364	(A,81,119)	3 300 uF/16 V	CCH1486
C 382	(A,121,108)		CEJQ330M16
C 412	(B,144,30)		CKSRYB103K50
C 413	(B,155,50)	(P700BT,P7000BT)	CKSRYB103K50
	(B,155,50)	(P7050BT)	CKSRYB102K50
C 414	(A,148,27)		CEJQ470M10
C 416	(B,150,94)		CKSRYB103K50
C 417	(A,151,91)		CEJQ101M16
C 419	(B,165,62)		CCSRCH101J50
C 431	(A,153,27)		CEJQ470M6R3
C 432	(B,154,20)		CKSRYB103K50
C 433	(B,153,23)		CKSRYB103K50
C 434	(A,159,27)		CEJQ4R7M50
C 451	(A,17,66)		CEJQ101M16
C 452	(B,11,78)		CKSRYB103K50
C 453	(A,28,77)		CEJQ101M10
C 454	(A,18,76)	470 uF/16 V	CCH1339
C 463	(A,35,77)		CEJQ220M35
C 464	(B,35,79)		CKSRYB103K50
C 465	(B,38,81)		CKSRYB103K50
C 466	(B,38,84)		CKSYB475K16
C 501	(B,75,55)		CKSRYB104K16
C 521	(B,88,57)		CKSRYB104K16
C 541	(B,83,57)		CKSRYB104K16
C 561	(A,85,110)		CKSRYB104K16
C 562	(A,100,102)		CCSRCH470J50
C 563	(A,102,104)		CKSRYB104K16
C 564	(A,101,107)		CKSRYB104K16
C 565	(A,95,97)		CKSRYB104K16

Circuit Symbol and No.		Part No.
C 566	(A,85,103)	CKSRYB331K50
C 567	(A,83,104)	CKSRYB682K50
C 568	(A,98,100)	CKSQYB225K10
C 571	(A,99,92)	CEJQ330M25
C 572	(A,82,106)	CKSRYB104K16
C 601	(A,149,63)	CCSRCH470J50
C 602	(B,131,61)	CKSQYB475K6R3
C 603	(B,118,57)	CCSRCH100D50
C 605	(B,118,60)	CCSRCH100D50
C 606	(A,139,43)	CEJQ4R7M25
C 607	(A,140,40)	CKSRYB103K50
C 609	(A,126,72)	CKSRYB474K10
C 610	(A,128,72)	CKSRYB474K10
C 611	(B,127,65)	CKSRYB102K50
C 612	(A,115,69)	CKSRYB102K50
C 651	(A,136,29)	CKSRYB105K10
C 702	(B,88,45)	CKSRYB104K16
C 704	(A,93,43)	CEJQ220M16
C 705	(B,88,37)	CKSRYB103K50
C 706	(B,87,23)	CKSRYB474K10
C 709	(B,73,23)	CKSRYB104K16
C 742	(A,68,67)	CKSRYB104K16
C 743	(B,66,74)	CKSRYB104K16
C 744	(B,62,84)	CKSRYB104K16
C 751	(A,20,45)	CEJQ101M10
C 753	(B,19,48)	CKSRYB102K50
C 754	(B,13,53)	CKSRYB473K50
C 761	(A,90,82)	CCSRCH221J50
C 762	(A,86,81)	CKSRYB102K50
C 764	(A,73,91)	CEJQ221M16
C 765	(A,79,85)	CKSRYB105K16
C 766	(A,89,73) 150 uF/6.3 V	CCH1781
C 767	(A,84,83)	CKSRYB104K16
C 807	(A,98,15)	CKSRYB104K16
C 821	(A,81,10)	CEJQ1R0M50
C 823	(B,59,13)	CKSRYB104K16
C 842	(A,148,17)	CKSRYB102K50
C 891	(A,44,116)	CKSRYB224K16
C 892	(A,36,110)	CKSRYB103K50
C 893	(A,37,106)	CEJQ100M50
C 901	(A,34,99)	CEJQ101M16
C 902	(B,44,99)	CKSRYB104K16
C 903	(A,22,95)	CKSRYB103K50
C 904	(A,16,88) 2 200 uF/16 V	CCH1405
C 911	(A,17,104)	CEHAS101M10
C 912	(A,12,112)	CKSRYB103K50
C 913	(A,17,112) 100 uF/25 V	CCH1316
C 921	(B,50,117)	CKSRYB104K25
C 942	(B,116,118) (P7000BT,P7050BT)	CKSRYB473K50
C 943	(A,120,117) (P700BT)	CKSRYB104K16
C 944	(B,115,122) (P700BT)	CKSRYB473K50
C 951	(B,55,120)	CKSRYB104K25

B

Unit Number : (UC)
Unit Number : (ES)
Unit Name : Keyboard Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 1101	(B,97,17) IC	PD6538A
IC 1102	(A,57,8) REMOTE IC	GP1UX51RK
Q 1101	(B,79,7) Chip Transistor	DTC114EUA
Q 1102	(B,73,5) Chip Transistor	DTC114EUA
Q 1103	(B,118,11) Chip Transistor	DTC114EUA
D 1101	(B,123,16) Diode	MALS068X
D 1102	(B,112,15) Diode	MALS068X
D 1103	(A,71,9) LED	CL-197HB1-D(CDE)
D 1104	(A,79,9) LED	CL-197HB1-D(CDE)
D 1105	(A,104,8) LED	CL-197HB1-D(CDE)
D 1106	(A,157,24) White LED	NESW505C-5273
D 1107	(A,5,13) LED	CL-197HB1-D(CDE)
D 1108	(A,16,12) LED	CL-197HB1-D(CDE)
D 1109	(A,51,36) LED	CL-197HB1-D(CDE)
D 1110	(A,16,36) LED	CL-197HB1-D(CDE)
D 1111	(A,127,8) LED	CL-197HB1-D(CDE)
D 1112	(A,148,8) LED	CL-197HB1-D(CDE)
D 1113	(A,116,8) LED	CL-197HB1-D(CDE)
D 1114	(A,51,12) LED	CL-197HB1-D(CDE)
D 1115	(A,63,24) White LED	NESW505C-5273
X 1101	(B,111,12) Ceramic Resonator 5.00 MHz	CSS1731
S 1101	(A,19,40) Push Switch	CSG1155
S 1102	(A,19,9) Push Switch	CSG1155
S 1103	(A,6,8) Push Switch	CSG1155
S 1104	(A,48,40) Push Switch	CSG1155
S 1105	(A,48,9) Push Switch	CSG1155
S 1106	(A,102,5) Push Switch	CSG1155
S 1107	(A,114,5) Push Switch	CSG1155
S 1108	(A,125,5) Push Switch	CSG1155
S 1109	(A,148,5) Push Switch	CSG1155
S 1110	(A,34,24) Switch (MULTI-CONTROL)	CSX1120
	LCD (P700BT,P7000BT)	CAW1952
	LCD (P7050BT)	CAW1956

RESISTORS

R 1101	(A,73,7)	RS1/16S331J
R 1102	(B,112,9)	RS1/16S222J
R 1103	(B,24,34)	RS1/16S473J
R 1104	(B,43,34)	RS1/16S153J
R 1105	(B,52,5)	RS1/16S101J
R 1106	(B,54,15)	RS1/16S2R2J
R 1107	(B,42,14)	RS1/16S682J
R 1108	(B,51,27)	RS1/16S103J
R 1109	(B,153,27)	RS1/16S102J
R 1110	(A,80,7)	RS1/16S331J
R 1111	(B,24,12)	RS1/16S272J
R 1113	(B,128,18)	RS1/16S0R0J
R 1114	(B,155,22)	RS1/16S102J
R 1115	(B,142,16)	RS1/16S102J
R 1116	(B,141,10)	RS1/16S102J
R 1117	(A,107,7)	RS1/16S681J
R 1120	(B,139,17)	RS1/16S223J
R 1121	(A,21,14)	RS1/16S471J
R 1122	(A,20,34)	RS1/16S471J
R 1123	(A,151,9)	RS1/16S471J
R 1124	(A,47,12)	RS1/16S471J
R 1125	(A,57,23)	RS1/16S221J
R 1126	(A,19,16)	RS1/16S0R0J
R 1127	(A,21,36)	RS1/16S0R0J

Circuit Symbol and No.		Part No.
R 1128	(A,154,9)	RS1/16S471J
R 1129	(A,48,14)	RS1/16S0R0J

CAPACITORS

C 1101	(B,127,11)	CKSRYB103K50
C 1102	(B,124,11)	CKSRYB103K50
C 1106	(A,157,32)	CKSRYF104Z50
C 1115	(A,59,26)	CKSRYF104Z50
C 1116	(B,122,18)	CKSRYB104K16
C 1117	(B,49,6)	CKSQYB475K6R3
C 1118	(B,133,14)	CKSRYB104K25

C

Unit Number : CWX3624
Unit Name : CD Core
Unit(S10.5COMP2-iPod-C2)

MISCELLANEOUS

IC 201	(A,35,46)	IC	PE5647A
IC 205	(B,24,49)	IC	341S2159
IC 301	(A,28,15)	IC	BA5839FP
Q 101	(B,58,69)	Transistor	2SA1577
Q 102	(B,48,58)	Chip Transistor	2SB1689
Q 201	(B,27,54)	Transistor	2SA1577
X 201	(A,22,37)	Ceramic Resonator 16.934 MHz	CSS1603
X 205	(B,33,63)	Oscillator 48.000 MHz	CSS1753
S 901	(A,55,37)	Switch(HOME)	CSN1067
S 903	(B,19,58)	Switch(DSCSNS)	CSN1067
S 904	(B,40,68)	Switch(12EJ)	CSN1068
S 905	(B,25,69)	Switch(8EJ)	CSN1068

RESISTORS

R 101	(B,61,74)	RS1/10SR2R4J
R 102	(B,61,72)	RS1/10SR2R4J
R 103	(B,61,71)	RS1/10SR2R7J
R 104	(B,53,66)	RS1/16SS222J
R 105	(B,44,57)	RS1/16SS102J
R 107	(B,52,60)	RS1/16SS105J
R 202	(A,27,32)	RS1/16SS473J
R 203	(A,51,44)	RS1/16S473J
R 204	(A,23,58)	RS1/16SS221J
R 206	(B,10,26)	RS1/16SS104J
R 209	(B,18,52)	RS1/16SS103J
R 210	(B,10,23)	RS1/16SS102J
R 214	(B,49,50)	RS1/16SS472J
R 216	(B,48,49)	RS1/16SS472J
R 221	(A,51,48)	RS1/16SS103J
R 222	(A,51,46)	RS1/16SS103J
R 223	(B,13,43)	RS1/16SS473J
R 225	(A,50,50)	RS1/16SS103J
R 226	(A,50,51)	RS1/16SS393J
R 227	(B,47,51)	RS1/16SS562J
R 228	(B,44,51)	RS1/16SS122J
R 229	(B,46,53)	RS1/16SS472J
R 230	(B,21,25)	RS1/16SS0R0J
R 232	(B,45,51)	RS1/16SS122J
R 233	(B,26,59)	RS1/16SS103J
R 234	(B,22,26)	RS1/16SS473J
R 235	(A,26,59)	RS1/16SS473J
R 237	(A,24,35)	RS1/16SS151J
R 240	(B,14,26)	RS1/16S473J
R 241	(B,13,25)	RS1/16SS103J
R 244	(B,22,55)	RS1/16SS473J
R 249	(B,14,50)	RS1/16SS103J
R 250	(B,19,50)	RS1/16SS101J
R 252	(B,18,47)	RS1/16SS101J
R 254	(A,25,64)	RS1/16SS104J
R 255	(A,26,63)	RS1/16SS104J
R 256	(A,25,62)	RS1/16SS104J
R 259	(A,27,66)	RS1/16SS0R0J
R 261	(A,26,65)	RS1/16SS104J
R 262	(A,29,59)	RS1/16SS0R0J
R 263	(A,27,63)	RS1/16SS0R0J
R 273	(B,18,48)	RS1/16SS103J
R 277	(B,18,50)	RS1/16SS103J
R 282	(A,30,61)	RS1/16SS240J
R 283	(A,29,61)	RS1/16SS240J
R 284	(B,29,63)	RS1/16SS153J
R 285	(B,28,63)	RS1/16SS153J
R 291	(B,42,62)	RS1/16SS272J
R 292	(B,24,43)	RS1/16SS272J
R 293	(B,27,52)	RS1/16SS472J
R 294	(A,31,62)	RS1/16SS471J
R 307	(A,35,19)	RS1/16SS183J
R 308	(A,37,19)	RS1/16SS183J
R 309	(A,35,21)	RS1/16SS183J
R 310	(A,37,22)	RS1/16SS183J
R 601	(B,30,31)	RS1/16SS0R0J
R 602	(B,27,31)	RS1/16SS0R0J
R 606	(B,28,23)	RS1/16S0R0J
R 701	(B,11,37)	RS1/16SS221J
R 702	(A,23,56)	RS1/16SS221J
R 708	(B,15,37)	RS1/16S0R0J
R 712	(B,14,54)	RS1/16SS0R0J
R 713	(B,14,53)	RS1/16SS0R0J

CAPACITORS

C 106	(B,56,67)	CKSQYB475K6R3
C 202	(A,28,57)	CKSSYB104K10
C 204	(A,23,59)	CKSSYB103K16
C 205	(B,27,41)	CKSQYB475K6R3
C 206	(A,23,40)	CKSSYB104K10
C 207	(A,24,37)	CKSRYB104K16
C 209	(B,35,34)	CEVW220M6R3
C 210	(B,29,37)	CKSSYB104K10
C 211	(A,28,35)	CKSSYB104K10
C 212	(A,28,30)	CKSRYB104K16
C 213	(A,46,39)	CKSSYB104K10
C 214	(A,29,33)	CKSSYB104K10
C 216	(A,51,52)	CKSSYB332K50
C 217	(A,48,51)	CKSSYB104K10
C 218	(A,50,52)	CKSSYB473K10
C 219	(A,47,53)	CKSSYB104K10
C 220	(A,48,53)	CKSSYB182K50
C 221	(A,46,54)	CKSSYB104K10
C 222	(B,45,53)	CCSSCH560J50
C 223	(B,47,53)	CCSSCH4R0C50

Circuit Symbol and No.		Part No.
C 224	(A,44,55)	CKSSYB104K10
C 226	(A,42,59)	CCSSCH680J50
C 227	(A,42,61)	CCSSCH470J50
C 228	(B,41,61)	CKSSYB103K16
C 229	(B,48,60)	CKSSYB104K10
C 236	(A,49,58)	CKSSYB104K10
C 239	(B,46,51)	CCSSCH220J50
C 240	(A,38,61)	CKSSYB104K10
C 243	(B,22,41)	CKSQYB475K6R3
C 250	(A,52,48)	CKSSYB102K50
C 251	(A,52,46)	CKSSYB102K50
C 260	(A,28,61)	CKSSYB104K10
C 261	(B,33,66)	CCSSCH8R0D50
C 262	(B,31,66)	CCSSCH8R0D50
C 290	(B,26,45)	CKSSYB104K10
C 293	(B,43,61)	CKSSYB102K50
C 294	(B,24,41)	CKSSYB104K10
C 303	(A,36,19)	CKSSYB472K25
C 304	(A,36,21)	CKSSYB223K16
C 307	(A,22,11)	CKSRYB104K16
C 308	(B,11,18)	CKSRYB105K10
C 703	(B,14,35)	CCSSCH101J50
C 704	(B,11,36)	CKSSYB102K50
C 711	(A,31,25)	CKSSYB104K10

D

Unit Number : CWN3394
Unit Name : Bluetooth Unit

MISCELLANEOUS

IC 21	(A,29,43)	IC	TC74VHC02FTS1
IC 22	(A,23,43)	IC	TC7PAU04FU
IC 23	(B,22,40)	IC	TC7PAU04FU
IC 36	(A,10,14)	IC	AK2301A
IC 51	(A,16,27)	IC	AN6123MS
IC 56	(B,9,13)	IC	PCM1742KE
IC 66	(B,12,21)	IC	NJM4558V
Q 1	(A,30,13)	Chip Transistor	DTC124EUA
Q 2	(A,34,29)	Chip Transistor	DTC124EUA
Q 21	(B,27,40)	Transistor	UMD2N
Q 22	(B,31,43)	Chip Transistor	DTC124EUA
Q 23	(B,27,43)	Transistor	UMD2N
Q 36	(A,17,8)	Chip Transistor	DTC124EUA
Q 37	(A,16,12)	Chip Transistor	DTC124EUA
L 1	(A,23,24)	Inductor	CTF1394
L 21	(A,26,39)	Inductor	CTF1379
L 22	(A,23,40)	Inductor	CTF1379
L 23	(B,22,44)	Inductor	CTF1379
L 36	(A,5,11)	Inductor	LCYC2R2K1608
L 51	(A,11,32)	Inductor	CTF1379
L 56	(B,17,7)	Inductor	CTF1379
L 57	(B,12,9)	Inductor	CTF1379
X 21	(A,18,41)	Oscillator 11.289 6 MHz	CSS1670
X 22	(B,17,42)	Oscillator 12.288 MHz	CSS1698
Y 1	(B,26,21)	Bluetooth Module	CWX3619

RESISTORS

R 1	(A,22,12)	RS1/16S334J
R 2	(A,31,32)	RS1/16S103J
R 3	(A,34,26)	RS1/16S473J
R 4	(A,27,29)	RS1/16S103J
R 5	(A,20,24)	RS1/16S103J
R 7	(A,34,23)	RS1/16S103J
R 8	(A,31,23)	RS1/16S101J
R 9	(A,31,20)	RS1/16S103J
R 21	(A,33,39)	RS1/16S101J
R 22	(B,21,38)	RS1/16S473J
R 23	(A,23,37)	RS1/16S473J
R 24	(B,24,40)	RS1/16S101J
R 25	(A,24,40)	RS1/16S101J
R 26	(A,21,41)	RS1/16S332J
R 27	(A,21,43)	RS1/16S105J
R 28	(B,20,43)	RS1/16S332J
R 29	(B,20,40)	RS1/16S105J
R 36	(A,15,5)	RS1/16S103J
R 37	(A,14,7)	RS1/16S104J
R 41	(A,7,22)	RS1/16S103J
R 43	(A,10,21)	RS1/16S393J
R 44	(A,8,20)	RS1/16S393J
R 45	(A,14,21)	RAB4C101J
R 46	(A,4,18)	RS1/16S103J
R 47	(A,15,15)	RS1/16S203J
R 48	(A,18,18)	RS1/16S103J
R 49	(A,7,8)	RS1/16S203J
R 50	(A,14,8)	RS1/16S473J
R 51	(A,20,28)	RS1/16S105J
R 52	(A,7,5)	RS1/16S103J
R 57	(B,15,15)	RAB4C101J
R 58	(A,30,36)	RS1/16S821J
R 66	(B,18,21)	RS1/16S103J
R 67	(B,16,24)	RS1/16S103J
R 68	(B,12,19)	RS1/16S473J
R 69	(B,10,24)	RS1/16S103J
R 70	(B,7,24)	RS1/16S103J
R 71	(B,9,19)	RS1/16S473J
R 72	(B,3,17)	RS1/16S103J
R 73	(B,5,19)	RS1/16S103J
R 76	(A,4,30)	RS1/16S101J
R 77	(B,5,31)	RS1/16S101J
R 78	(A,6,32)	RS1/16S101J
R 79	(B,11,32)	RS1/16S0R0J
R 80	(A,3,33)	RS1/16S101J
R 81	(B,10,29)	RS1/16S101J
R 82	(B,16,29)	RS1/16S101J
R 83	(B,9,32)	RS1/16S101J
R 84	(B,16,31)	RS1/16S0R0J
R 85	(B,9,39)	RS1/16S101J
R 86	(B,6,39)	RAB4C101J
R 87	(B,12,39)	RAB4C101J

CAPACITORS

C 1	(A,28,12)	CKSRYB104K16
C 4	(A,26,21)	CSZS100M16
C 5	(A,22,16)	CKSRYB104K16
C 7	(A,25,13)	CSZS1R0M16
C 8	(A,23,21)	CKSRYB104K16
C 9	(A,23,19)	CKSRYB104K16
C 10	(A,22,15)	CCSRCH101J50

Circuit Symbol and No.		Part No.
C 21	(A,28,40)	CKSRYB104K16
C 22	(A,21,38)	CKSRYB105K10
C 23	(A,19,37)	CCSRCH120J50
C 24	(A,19,45)	CCSRCH120J50
C 25	(B,22,43)	CKSRYB105K10
C 26	(B,14,42)	CCSRCH120J50
C 27	(B,16,38)	CCSRCH120J50
C 28	(A,27,36)	CKSRYB102K50
C 36	(A,3,15)	CKSYB106K6R3
C 37	(A,5,15)	CKSRYB104K16
C 38	(A,10,22)	CKSRYB105K10
C 41	(A,10,19)	CCSRCH101J50
C 42	(A,6,20)	CKSRYB105K10
C 43	(A,4,20)	CKSRYB105K10
C 44	(A,11,8)	CKSRYB334K10
C 45	(A,12,5)	CKSRYB105K10
C 46	(A,16,17)	CCSRCH101J50
C 47	(A,7,7)	CCSRCH101J50
C 48	(A,9,5)	CKSRYB105K10
C 49	(A,9,8)	CKSRYB105K10
C 50	(A,16,20)	CKSRYB105K10
C 51	(A,19,24)	CKSRYB334K10
C 52	(A,16,24)	CCSRCH331J50
C 53	(A,18,29)	CKSYB106K6R3
C 54	(A,15,30)	CKSRYB105K10
C 55	(A,13,29)	CKSRYB104K16
C 56	(B,7,7)	CKSYB106K6R3
C 57	(B,14,12)	CKSRYB102K50
C 58	(B,16,11)	CKSYB106K6R3
C 59	(B,14,9)	CKSRYB102K50
C 60	(B,10,7)	CKSYB106K6R3
C 61	(B,14,6)	CKSRYB102K50
C 66	(B,16,18)	CKSYB475K16
C 67	(B,9,17)	CKSYB475K16
C 68	(B,16,21)	CCSRCH221J50
C 69	(B,16,26)	CCSRCH391J50
C 70	(B,9,26)	CKSYB106K6R3
C 71	(B,6,25)	CKSRYB105K10
C 72	(B,4,19)	CCSRCH391J50
C 73	(B,7,20)	CCSRCH221J50
C 76	(A,13,45)	CKSRYB102K50

E

Unit Number : CWN2338
Unit Name : Antenna Unit

MISCELLANEOUS

ANT1101	BT Antenna	CWX3132
ANT1102	Connector	CKS5749

F

Unit Number : CWN3286
Unit Name : Panel Unit

MISCELLANEOUS

D 1970	(A,5,19)	LED	CL220PGC
D 1971	(B,66,7)	Diode	UDZS10(B)
D 1972	(B,68,7)	Diode	UDZS10(B)
D 1973	(B,46,17)	Diode	MALS068X
D 1974	(B,56,6)	Diode	MALS068X
D 1975	(B,52,10)	Diode	MALS068X
D 1976	(B,47,16)	Diode	MALS068X
D 1977	(B,21,14)	Diode	MALS068X
S 1970	(A,78,40)	Push Switch(EJECT)	CSG1174

RESISTORS

R 1970	(B,63,10)	RS1/16S101J
R 1971	(B,66,10)	RS1/16S101J

CAPACITORS

C 1970	(B,37,18)	CKSRYB104K16
C 1971	(B,60,6)	CKSRYB104K16

Miscellaneous Parts List

	Pickup Unit(P10.5)(Service)	CXX1942
M 1	Motor Unit(SPINDLE)	CXC7134
M 2	Motor Unit(LOADING/CARRIAGE)	CXC4026
⚠	Fuse(10 A)(Cord Assy)	CEK1136
	Resistor(Cord Assy)	RS1/2PMF102J
	FAN MOTOR	CXM1288