

pin136: Memo Addrss 4: O : Address output to Memory IC.
pin137: Memo Addrss 5: O : Address output to Memory IC.
pin138: Memo Addrss 6: O : Address output to Memory IC.
pin139: Memo Addrss 7: O : Address output to Memory IC.
pin140: Memo Addrss 8: O : Address output to Memory IC.
pin141: Memo Addrss 9: O : Address output to Memory IC.
pin142: VDD : - : Positive supply voltage.
pin143: Memo Addrss 21: O : Control signal output for Memory IC.
pin144: VSS : - : Negative supply voltage.


051-6919-08 NJU6391PE Quarts Crystal Oscillator

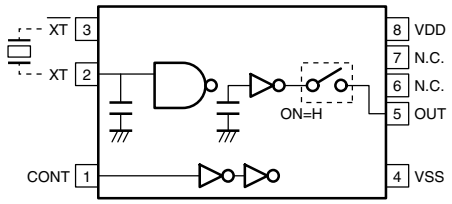

051-7280-38 TC7SU04FU Single Inverter



051-7518-18 SN74LVC139APWR
Dual 2-line to 4-line Decoders/Demultiplexers



Truth Table

G_	B	A	Y 0_	Y 1_	Y 2_	Y 3_
H	don't care	don't care	H	H	H	H
L	L	L	L	H	H	H
L	L	H	H	L	H	H
L	H	L	H	H	L	H
L	H	H	H	H	H	L


EXPLODED VIEW / PARTS LIST

CD mechanism section: 929-0301-83

* The exploded view is on page 11.


NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1
2	SMA-183-100	POW-MOTOR-ASSY	1
3	620-1022-26	CLAMPER LINK	1
4	966-0595-26	DRIVE-PLT-ASSY	1
5	966-1722-20	SH-RACK-ASSY	1
6	969-0065-31	PICK UP-ASSY	1
7	345-5476-20	CUSHION RUBBER	1
8	620-1025-22	ID-LOCK PLATE	1
9	620-1026-21	SPRING PLATE	1
10	620-1028-24	UPPER CHASSIS	1
11	620-1585-21	LOWER SHASSIS-W	1
12	621-0598-27	UPPER GUIDE	1
13	621-0600-26	SHIFT LEVER	1
14	621-1735-20	RACK	1
15	621-0602-22	LOCK ARM L	1
16	621-0603-25	LOCK ARM R	1
17	621-0605-22	GEAR COVER	1
18	621-0608-21	SECOND GEAR	1
19	621-0609-20	BASE GEAR	1
20	621-0610-20	IDLE GEAR A	1
21	621-0611-20	IDLE GEAR B	1
22	621-0612-21	ROLLER GEAR A	1
23	621-0616-20	POWER GEAR A	1
24	621-0617-20	POWER GEAR B	1
25	621-0618-20	POWER GEAR C	1
26	621-0619-20	POWER GEAR D	1
27	621-0620-20	THREAD GEAR A	1
28	621-0621-20	THREAD GEAR B	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-0623-23	LS-HOLDER	1
31	621-0624-22	GUIDE RAIL	1
32	621-0629-20	LOADING ROLLER	2
33	621-1729-20	SH-BASE	1
34	621-0718-21	ROLLER GUIDE	1
35	621-0719-20	ROLLER GEAR	1
36	621-0720-20	ROLLER GEAR C	1
37	621-0721-20	ROLLER GEAR D	1

NO.	PART NO.	DESCRIPTION	Q'TY
38	621-1719-20	IDLE CASE	1
39	621-0724-21	GEAR BASE	1
40	622-1660-20	ROLLER SHAFT	1
41	624-0018-01	LEAD SCREW	1
42	629-0086-20	DAMPER F	2
43	629-0087-20	DAMPER R	1
44	714-2003-81	MACHINE SCREW (M2x3)	2
45	716-1507-00	SCREW (M2x3)	7
46	716-1670-00	SCREW (M2x4)	2
47	716-1733-00	SCREW (M1.7x2.3)	2
48	716-3551-00	SCREW (M1.4x2.5)	2
49	716-3469-00	SCREW (phi1.7x4)	2
50	716-3473-00	SCREW (M2x3)	2
51	750-3465-21	ROLLER SPRING L	1
52	750-3466-20	ROLLER SPRING R	1
53	750-3467-21	SHIFT SPRING	1
54	750-3468-20	RACK SPRING	1
55	750-3469-20	CLAMPER SPRING	1
56	750-3470-20	ID-LOCK SPRING	1
57	750-3472-21	DR-SPRING F	2
58	750-3473-20	DR-SPRING RA	1
59	750-3474-20	DR-SPRING RB	1
60	750-3475-21	DR-SPRING C	1
61	803-4906-60	VINYL-COAT-WIRE (ORG.)	1
62	816-2590-00	EXTENSION LEAD (GRN.)	1
63	816-2591-00	EXTENSION LEAD (YEL.)	1
64	816-2592-00	EXTENSION LEAD (BLU.)	1
65	816-2593-00	EXTENSION LEAD (PUR.)	1
66	816-2624-50	FLAT WIRE	1
67	----------	LED PWB	1
68	----------	CD PWB	1
69	620-1023-23	CLAMPER PLATE	1
70	620-1721-20	SENSOR ARM	1
71	621-0626-21	STOPPER LINK	1
72	621-0627-21	DISC STOPPER	1
73	621-0708-20	CLAMPER RING	1
74	750-3471-20	SENSOR SPRING	1

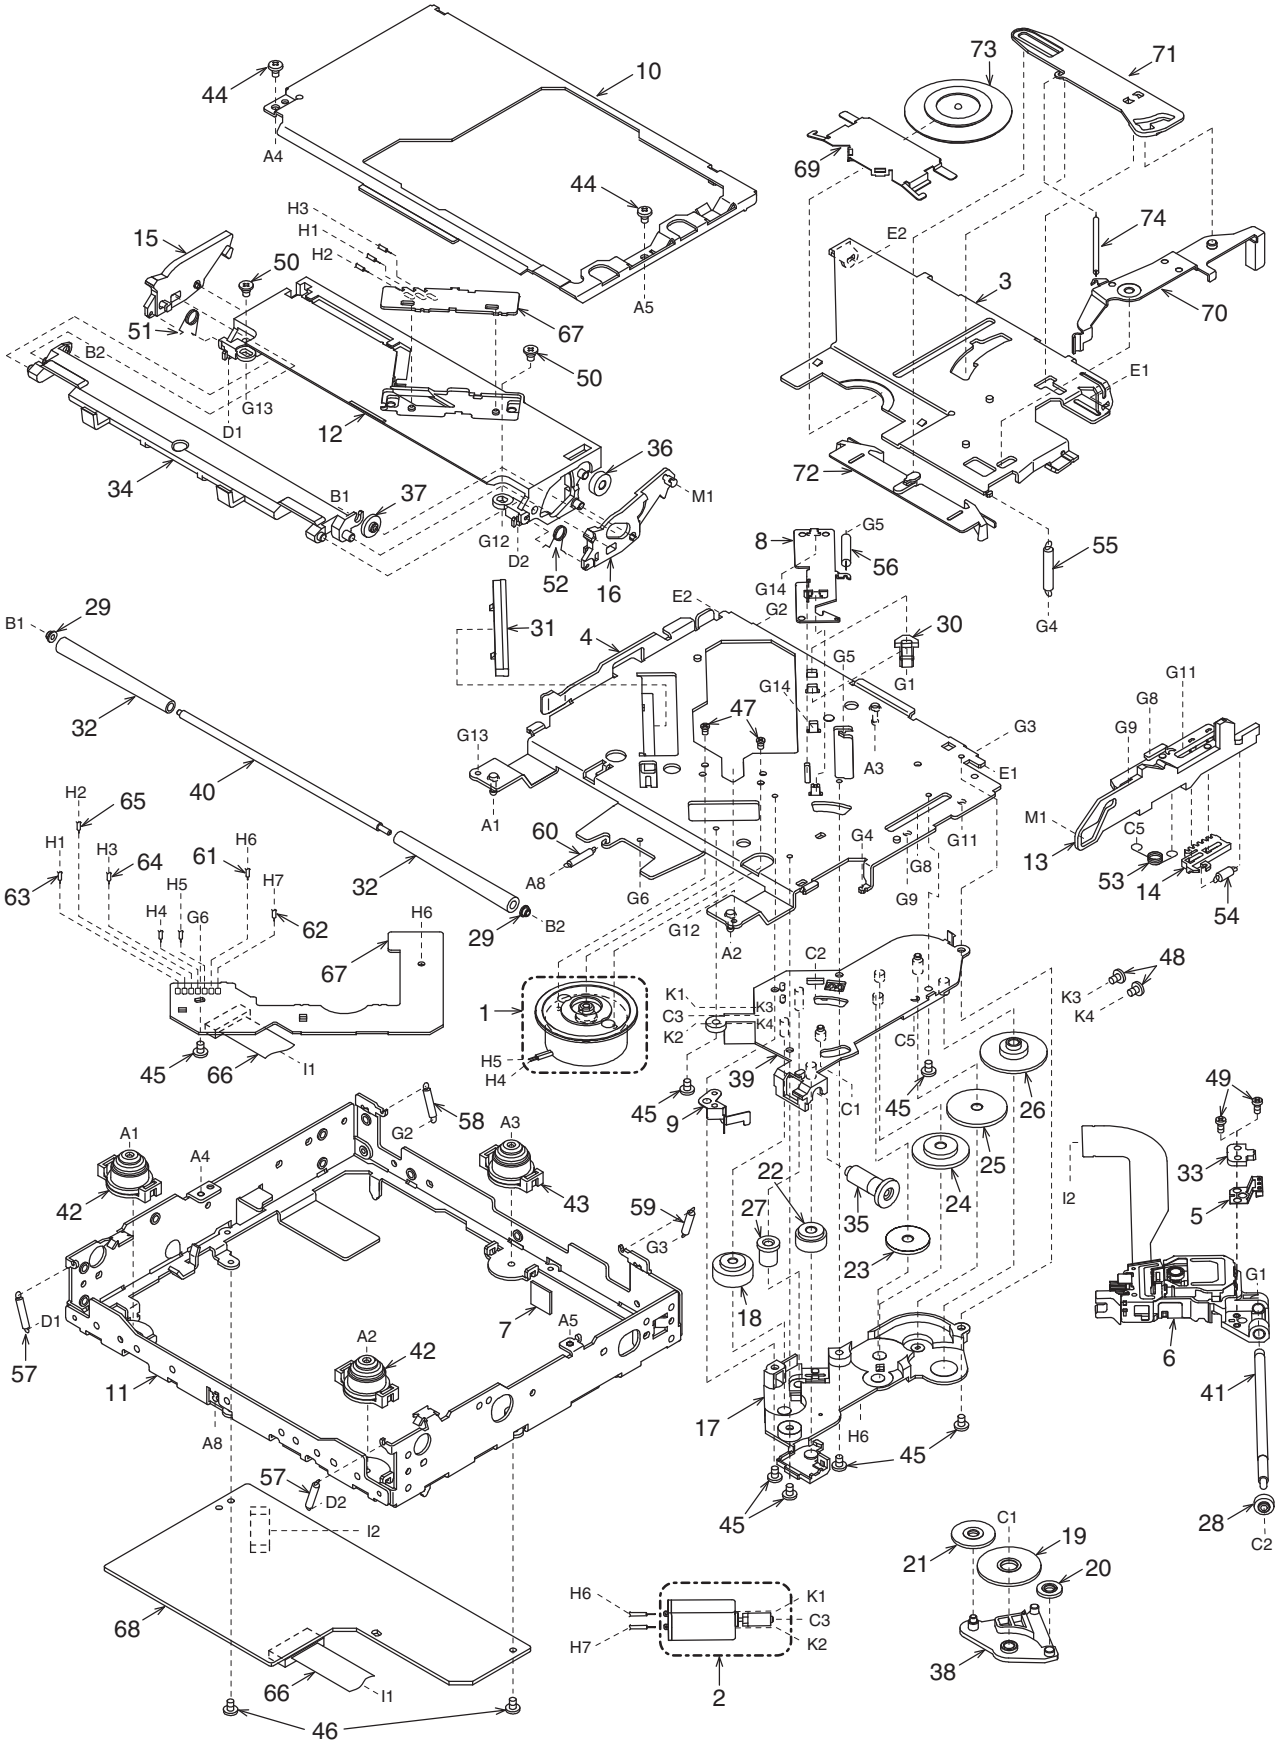

DXZ655MP/DXZ656MP

DCP section

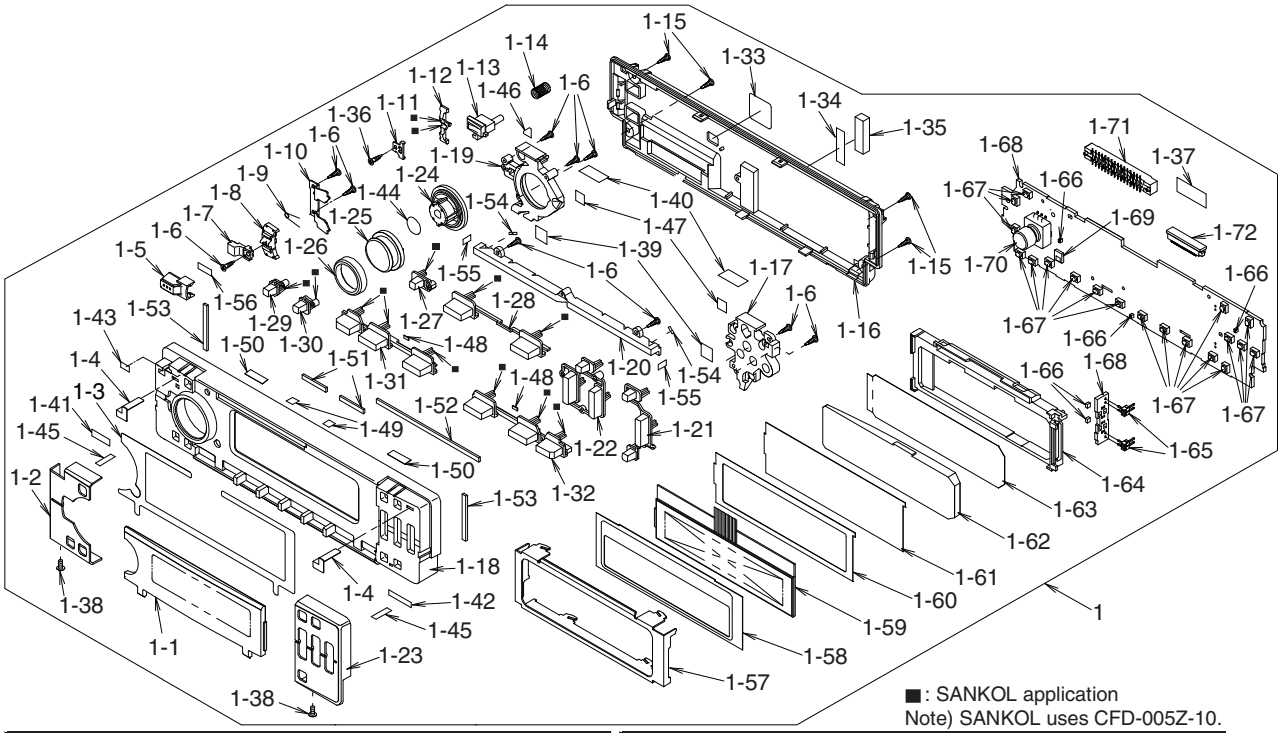


■: SANKOL application
Note) SANKOL uses CFD-005Z-10.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-518-600	DCP ASSY(PE-2726B)	1
	DCP-520-800	DCP ASSY(PE-2728K)	1
1-1	373-1045-05	DIAL COVER(PE-2726B)	1
	373-1045-06	DIAL COVER(PE-2728K)	1
1-2	371-5800-01	FACE PANCEL	1
1-3	347-7507-00	DOUBLE FACE	1
1-4	347-7506-00	SURGE FILM	2
1-5	335-7401-00	LEVER CAP	1
1-6	716-0872-01	PAD SCREW(M1.7x6)	10
1-7	335-7457-00	LEVER	1
1-8	335-7403-00	BASE LEVER	1
1-9	750-6794-00	SPRING	1
1-10	331-3945-00	LEVER HOLDER	1
1-11	331-3944-00	ARM COVER	1
1-12	335-7404-00	LEVER ARM	1
1-13	382-7232-00	BUTTON	1
1-14	750-6720-00	SPRING	1
1-15	716-0872-12	PAD SCREW(M1.7x8)	4
1-16	335-6899-01	REAR COVER	1
1-17	335-7349-00	ILLUMI PLATE	1
1-18	370-6138-00	ESCUTCHEON	1
1-19	335-7347-00	ILLUMI PLATE	1
1-20	335-7348-00	ILLUMI PLATE	1
1-21	382-7226-03	BUTTON	1
1-22	382-7229-00	BUTTON	1
1-23	371-5799-01	FACE PANCEL(PE-2726B)	1
	371-5799-00	FACE PANCEL(PE-2728K)	1
1-24	380-5608-00	KNOB	1
1-25	380-5609-00	KNOB COVER	1
1-26	345-5489-00	RUBBER RING	1
1-27	382-7230-00	BUTTON	1
1-28	382-7237-01	BUTTON	1
1-29	382-7231-00	BUTTON	1
1-30	382-7227-00	BUTTON	1
1-31	382-7233-01	BUTTON	1
1-32	382-7234-01	BUTTON	1
1-33	347-6977-00	COVER FILM	1
1-34	347-6628-00	SPACE FILM	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-35	345-8647-00	CUSHION	1
1-36	716-0872-20	PAD SCREW(M1.7x4)	1
1-37	347-7533-00	SPACER	1
1-38	778-6019-00	SCREW(M1.7x6)	2
1-39	347-7508-00	SHADE	2
1-40	347-7509-00	SHADE	2
1-41	347-7573-00	DOUBLE FACE	1
1-42	347-7510-00	DOUBLE FACE	1
1-43	347-7574-00	DOUBLE FACE	1
1-44	347-6988-00	DOUBLE FACE	1
1-45	347-7530-00	FILM	2
1-46	347-7539-00	SPACER	1
1-47	347-7534-00	REFLECTOR	2
1-48	347-7577-00	SPACER	2
1-49	347-7575-00	SPACER	2
1-50	347-7576-00	SPACER	2
1-51	347-7159-00	CUSHION	2
1-52	347-7037-00	CUSHION	1
1-53	347-7036-00	CUSHION	2
1-54	347-7540-00	REFLECTOR	2
1-55	347-7531-00	FILM	2
1-56	347-7537-00	DOUBLE FACE	1
1-57	331-3918-00	LCD COVER	1
1-58	347-7397-00	SHADE	1
1-59	379-1321-80	INDICATOR(LCD)	1
1-60	347-7394-00	FILM	1
1-61	347-7395-00	FILM	1
1-62	335-7351-00	ILLUMI PLATE	1
1-63	347-7396-00	REFLECTOR	1
1-64	335-7350-00	LCD HOLDER	1
1-65	076-0708-02	PLUG	2
1-66	001-7088-90	DIODE	5
1-67	013-6312-50	SWITCH	19
1-68	----------	SWITCH PWB	1
1-69	060-4017-90	IR-RECEIVER	1
1-70	016-9900-85	ENCODER-SW	1
1-71	076-0647-00	PLUG	1
1-72	074-2002-76	CONNECTOR	1

Inner-Escutcheon section

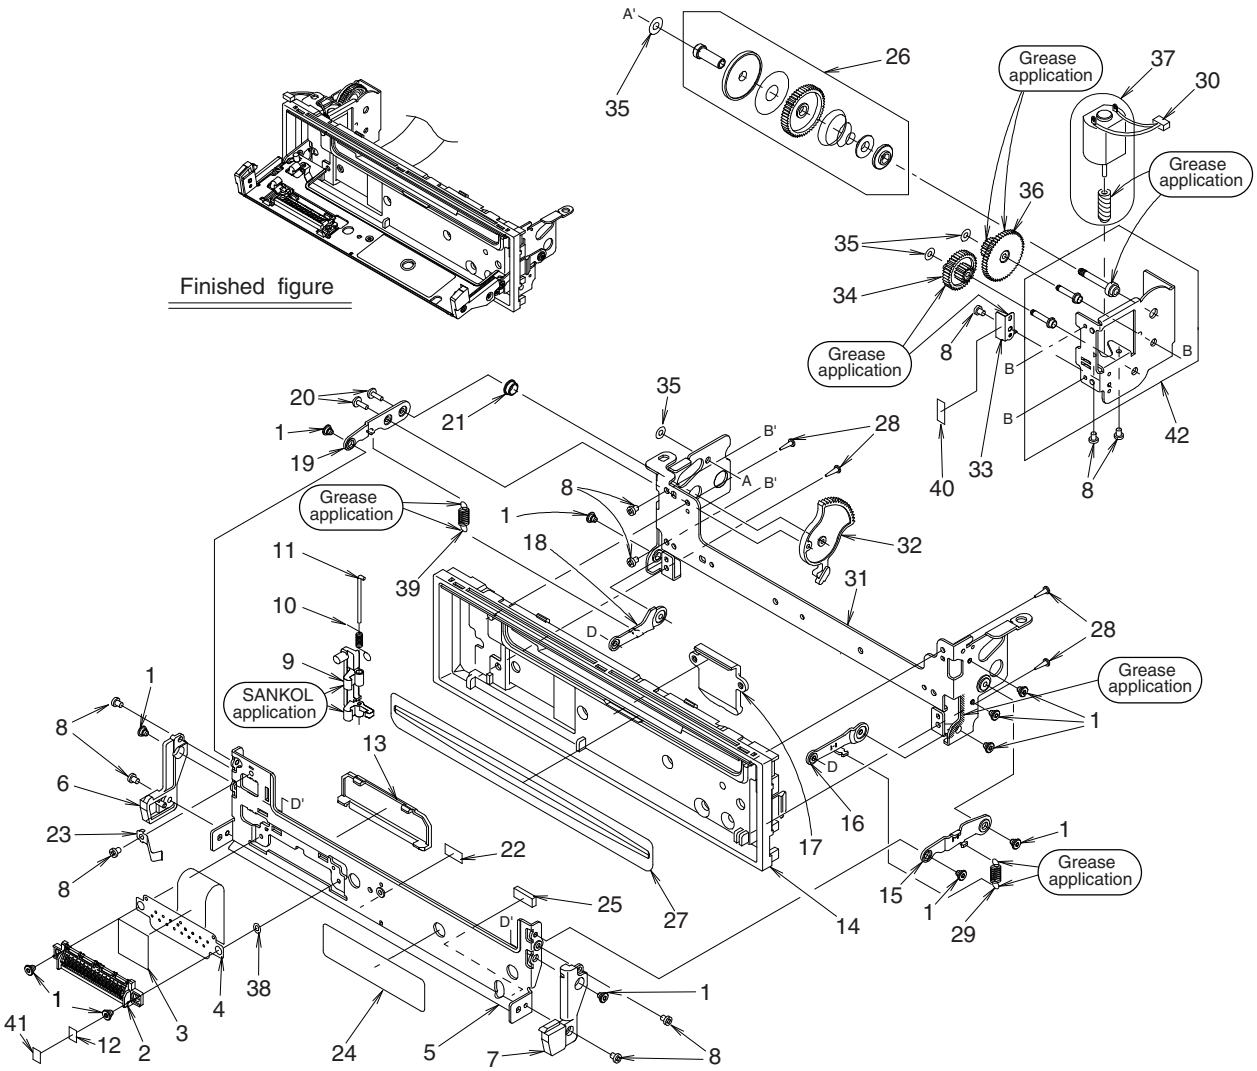


Note) SANKOL uses CFD-005Z-10
Grease uses FLOIL G-31SB

NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-02	DECORATIVE SCREW(M2)	11
2	074-1278-01	OUTLET SOCKET	1
3	347-6528-00	INSULATOR	1
4	039-2409-00	FPC PWB (WITHOUT COMPONENT)	1
5	331-3115-01	DCP-HOLDER	1
6	335-6903-00	ARM-COVER	1
7	335-6904-00	ARM-COVER	1
8	716-1468-20	SCREW(M2x2.5)	10
9	335-7484-00	HOOK	1
10	750-3431-02	SPRING	1
11	341-1802-00	SHAFT	1
12	345-5556-00	SPACER	1
13	335-6499-00	CN-COVER	1
14	370-5935-07	INNER-ES	1
15	331-3117-01	LEVER-UP	1
16	331-3118-01	LEVER-LO	1
17	335-6505-00	ILLUMI PLATE	1
18	331-3119-00	LEVER-LO	1
19	331-3120-00	LEVER-UP	1
20	716-1758-00	PAD SCREW(M2x5)	2
21	341-1740-00	ROLLER	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	347-6527-00	CUSHION	1
23	750-3457-00	SPRING	1
24	291-0102-00	STICKER	1
25	345-8627-00	CUSHION	1
26	947-0513-02	T-LIM GEAR ASSY	1
27	346-0150-02	LEATHER SHEET	1
28	716-0872-00	PAD SCREW(M1.7x5)	4
29	750-3304-20	SPRING	1
30	854-4380-01	EX-LEAD	1
31	309-0772-02	FRONT-PLATE	1
32	613-0719-00	ARM-GEAR	1
33	750-3432-00	SPRING	1
34	613-0733-00	HUS-GEAR	1
35	746-0768-20	WASHER(M1.0/T0.5)	4
36	613-0717-00	INPUT-GEAR	1
37	634-0023-00	MOTOR ASSY	1
38	347-7347-00	SPACER	1
39	750-3303-20	SPRING	1
40	347-6275-00	FILM	1
41	345-5557-00	CUSHION	1
42	946-0079-01	GEAR BOX ASSY	1

Main section

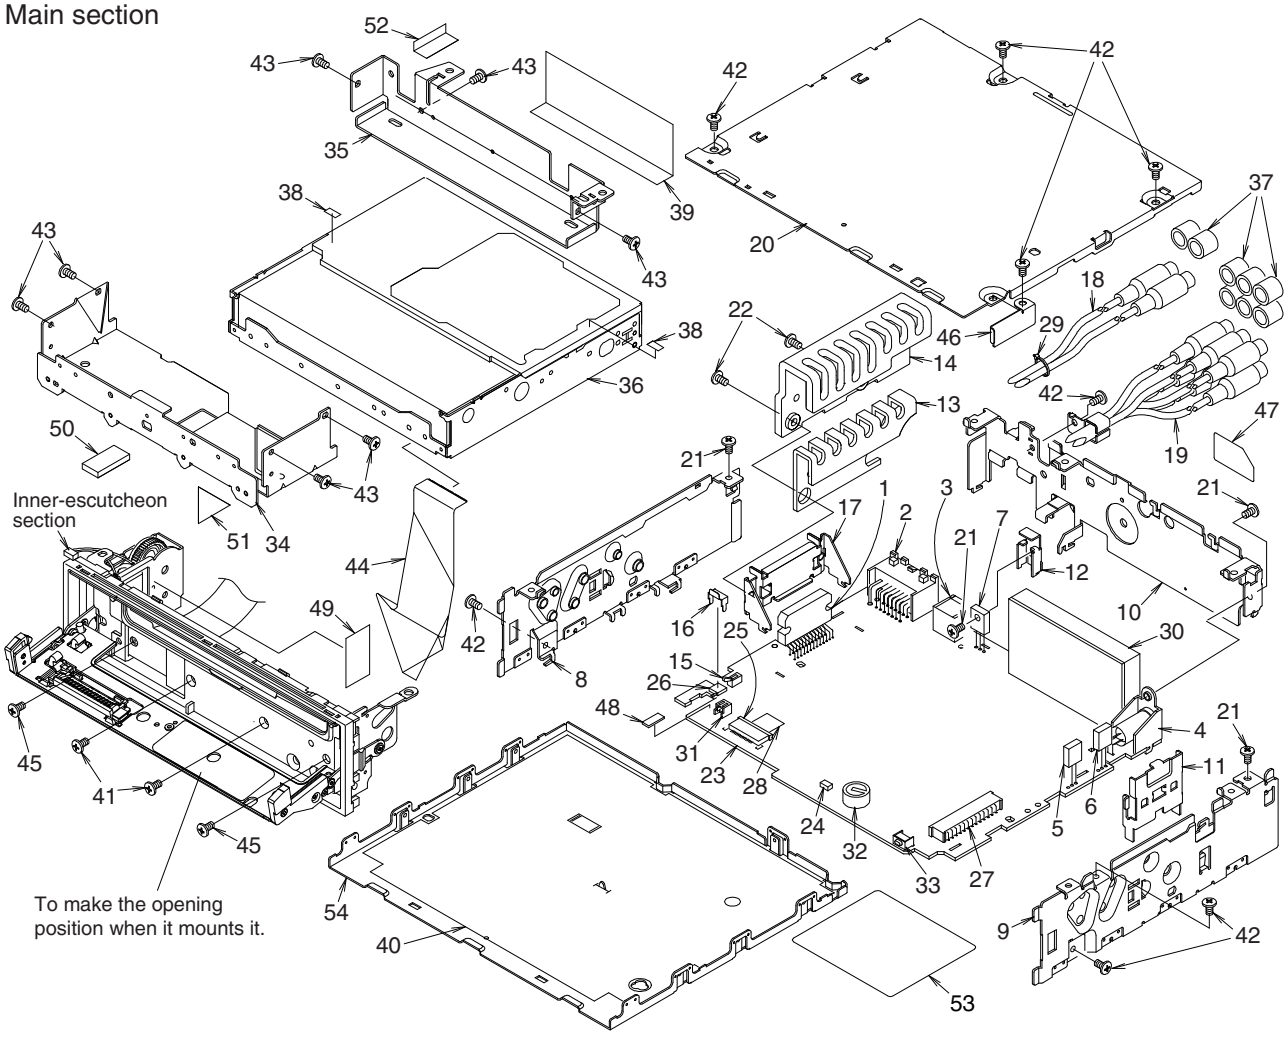

NO.	PART NO.	DESCRIPTION	Q'TY
1	051-2057-00	IC	1
2	074-1214-00	OUTLET SOCKET	1
3	074-1194-00	OUTLET SOCKET	1
4	092-4000-51	ANT-RECEPT	1
5	101-0941-00	TRANSISTOR	1
6	125-4015-90	TRANSISTOR	1
7	102-3420-00	TRANSISTOR	1
8	305-0274-01	SIDE COVER	1
9	305-0275-00	SIDE COVER	1
10	307-0616-03	REAR COVER	1
11	313-1651-21	HEAT SINK	1
12	313-1715-20	HEAT SINK	1
13	313-1845-00	HEAT SINK	1
14	313-1844-00	HEAT SINK	1
15	013-7106-00	DETECTOR SWITCH	1
16	331-3378-00	SW-HOLDER	1
17	331-4009-00	IC-HOLDER	1
18	855-5480-50	RCA PIN CORD	1
19	855-5424-50	RCA PIN CORD	1
20	303-0472-06	UPPER COVER	1
21	714-3006-81	MACHINE SCREW(M3x6)	4
22	731-3008-87	TAPTIGHT(M3x8)	2
23	----------	MAIN PWB	1
24	001-7062-90	DIODE	1
25	074-1198-68	OUTLET SOCKET	1
26	013-7206-50	DETECTOR SWITCH	1
27	074-1138-70	OUTLET SOCKET	1
28	347-6215-00	SPACER FILM	1

NO.	PART NO.	DESCRIPTION	Q'TY
29	335-0833-01	LEAD HOLDER	1
30	880-2090B	TUNER	1
31	076-0313-02	PLUG	1
32	042-0559-00	DOUBLE FACE	1
33	013-6100-00	SWITCH	1
34	331-3581-00	MECH-BRKT	1
35	331-3324-00	MECH-BRKT	1
36	929-0301-83	CD-MECH-MODULE	1
37	345-3799-20	RUBBER PART	8
38	347-6821-00	SPACER FILM	2
39	347-6705-00	INSULATOR	1
40	347-5918-00	INSULATOR	1
41	716-0717-10	STEEL SCREW(M2.3x3)	2
42	731-3006-80	TAPTIGHT(M3x6)	8
43	714-2603-80	MACHINE SCREW(M2.6x3)	7
44	816-2626-50	FLAT CABLE	1
45	780-2005-00	SCREW(M2x5)	2
46	331-2744-00	STOPPER	1
47	347-6245-00	FILM	1
48	345-8701-00	CUSHION	1
49	347-6536-00	PROTECT SHEET	1
50	345-5318-00	CUSHION	1
51	347-7017-00	DOUBLE FACE	1
52	347-7018-00	INSULATOR	1
53	286-6546-00	SETPLATE(PE-2726B)	1
	286-6578-00	SETPLATE(PE-2728K)	1
54	304-0460-01	LOWER COVER	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT
BL1	880-2090B	TUNER
C1	168-2232-55	0.022uF K
C4	163-1053-65	50V 1uF
C7	188-4763-37	16V 47uF
C8	168-2232-55	0.022uF K
C9	168-2232-55	0.022uF K
C10	168-6822-55	6800pF K
C11	042-1631-50	10V 100uF
C12	042-1631-50	10V 100uF
C14	166-1011-50	100pF CH
C16	168-1042-78	16V 0.1uF
C18	163-1053-65	50V 1uF
C20	163-4763-15	6.3V 47uF
C21	166-2096-50	2pF CK
C22	166-1011-50	100pF CH
C23	166-1011-50	100pF CH
C24	166-3311-50	330pF CH
C25	166-1501-50	15pF CH
C26	166-1501-50	15pF CH
C28	168-1532-55	0.015uF
C29	168-2232-55	0.022uF K
C30	168-2732-55	0.027uF
C31	168-2732-55	0.027uF
C55	166-2201-50	22pF CH
C66	166-2201-50	22pF CH
C67	168-1032-55	0.01uF K
C68	168-2232-55	0.022uF K
C101	178-2242-78	0.22uF
C102	178-2242-78	0.22uF
C103	178-2242-78	0.22uF
C104	178-2242-78	0.22uF
C106	187-1063-35	16V 10uF
C107	187-1053-65	50V 1uF
C110	168-1042-78	16V 0.1uF
C111	178-1052-78	1uF
C112	168-1042-78	16V 0.1uF
C113	166-4711-50	470pF CH
C114	166-4711-50	470pF CH
C115	166-4711-50	470pF CH
C116	166-4711-50	470pF CH
C117	166-4711-50	470pF CH
C118	166-4711-50	470pF CH
C120	168-1222-55	1200pF K
C121	187-2263-15	6.3V 22uF
C122	187-2263-15	6.3V 22uF
C123	187-2263-15	6.3V 22uF
C124	187-2263-15	6.3V 22uF
C125	168-1222-55	1200pF K
C126	168-1222-55	1200pF K
C127	168-1222-55	1200pF K
C128	168-1222-55	1200pF K
C129	168-1222-55	1200pF K
C130	168-1222-55	1200pF K
C131	168-1222-55	1200pF K
C132	168-1222-55	1200pF K
C201	042-1691-00	16V 3300pF
C202	172-2231-15	0.022uF
C203	042-1669-00	16V 100uF
C204	188-2263-37	16V 22uF
C205	168-4732-78	0.047uF K
C210	187-2263-15	6.3V 22uF
C211	187-3363-45	25V 33uF
C216	187-1073-35	16V 100uF
C217	187-4763-35	16V 47uF
C218	166-1011-50	100pF CH
C219	168-1022-55	1000pF CH
C220	166-1007-50	10pF CH
C222	042-1631-50	10V 100uF
C223	168-2232-55	0.022uF K
C224	172-4731-15	0.047uF K
C230	042-1631-50	10V 100uF
C241	188-1063-37	16V 10uF
C243	042-1631-50	10V 100uF
C245	168-1042-78	16V 0.1uF
C279	188-1073-27	10V 100uF
C310	187-1063-35	16V 10uF
C311	187-1063-35	16V 10uF
C312	187-1063-35	16V 10uF
C313	187-1063-35	16V 10uF
C314	168-4732-78	0.047uF K
C315	168-4732-78	0.047uF K
C316	187-2253-65	50V 2.2uF
C317	187-2253-65	50V 2.2uF
C320	187-1063-35	16V 10uF
C321	187-2253-65	50V 2.2uF
C322	187-2253-65	50V 2.2uF
C324	187-2263-35	16V 22uF
C325	168-1022-55	1000pF CH
C328	168-1042-78	16V 0.1uF
C332	187-1063-35	16V 10uF
C333	187-1063-35	16V 10uF
C334	187-1063-35	16V 10uF
C335	187-1063-35	16V 10uF
C337	187-2253-65	50V 2.2uF
C338	187-2253-65	50V 2.2uF
C340	168-1032-55	0.01uF K
C351	166-2201-50	22pF CH
C352	166-2201-50	22pF CH
C353	178-1042-78	0.1uF
C354	178-1042-78	0.1uF
C366	168-1042-78	16V 0.1uF
C367	168-1042-78	16V 0.1uF
C368	168-1042-78	16V 0.1uF
C369	168-1042-78	16V 0.1uF
C370	166-2201-50	22pF CH
C371	166-2201-50	22pF CH
C372	166-2201-50	22pF CH
C373	166-2201-50	22pF CH
C444	187-2263-35	16V 22uF
C445	168-1042-78	16V 0.1uF
C446	168-1042-78	16V 0.1uF
C447	168-1042-78	16V 0.1uF
C448	168-1042-78	16V 0.1uF
C449	168-1042-78	16V 0.1uF
C450	189-2273-21	10V 220uF
C451	187-1073-15	6.3V 100uF
C456	187-1063-35	16V 10uF
C457	187-1063-35	16V 10uF
C531	187-2263-15	6.3V 22uF
C532	187-2263-15	6.3V 22uF
C533	187-2263-15	6.3V 22uF
C534	187-2263-15	6.3V 22uF
C539	187-2263-15	6.3V 22uF
C540	187-2263-15	6.3V 22uF
C603	168-4722-55	4700pF K
C604	168-4722-55	4700pF K
C605	042-1505-80	25V 1uF
C606	168-4732-78	0.047uF K
C613	042-0559-00	5.5V 0.1F
C614	168-1032-55	0.01uF K
C615	042-1577-00	6.3V 100uF
C616	163-1063-35	16V 10uF
C617	168-1022-55	1000pF CH
C619	168-4732-78	0.047uF K
C620	178-2242-78	0.22uF
C630	166-1011-50	100pF CH
C631	168-1022-55	1000pF CH
C636	166-1011-50	100pF CH
C637	166-1011-50	100pF CH
C638	166-1011-50	100pF CH
C643	166-1011-50	100pF CH
C904	168-1032-55	0.01uF K
C905	168-1032-55	0.01uF K
C907	168-1032-55	0.01uF K
C913	168-4722-55	4700pF K
D201	001-0592-61	IN5404
D203	001-0504-46	HZS9B2L
D210	001-0347-38	MA4068M
D211	001-0347-29	MA4051M
D212	001-1310-00	KDS160
D214	001-0466-61	1A4
D220	001-1310-00	KDS160
D221	001-0466-61	1A4
D222	001-0466-61	1A4
D223	001-1310-00	KDS160
D224	001-0466-61	1A4
D225	001-0466-61	1A4
D227	001-1310-00	KDS160
D230	001-0466-60	1A2
D231	001-0466-60	1A2
D241	001-0504-45	HZS9B1L
D242	001-0504-47	HZS9B3L
D401	001-1310-00	KDS160
D402	001-1310-00	KDS160
D403	001-4301-44	DIODE
D403	001-0529-44	MA8082M
D404	001-4301-23	DIODE
D404	001-0529-23	MA8043M
D603	001-1310-00	KDS160
D610	001-1310-00	KDS160
D651	001-7062-90	DIODE
F101	060-8023-58	CHIIP FUSE
IC1	051-6201-90	LC72146M
IC101	051-2057-00	TB2906
IC220	051-3201-90	AN77L06
IC230	051-1014-08	TA7291F
IC301	051-5030-90	M61523FP
IC302	051-3049-90	HA17558AF
IC401	051-5834-90	UPD5701-028
IC402	051-5818-90	BA3834F
IC602	051-6600-38	CA0008AM
IC604	052-3952-00	M30620MCP-194GP
IC605	051-5437-08	S-80821ANMP
IC606	051-869-55	NJM2103M
J201	074-1214-00	16P
J601	074-1194-00	13P
J602	074-1198-68	18P
J603	074-1138-70	20P
J604	076-0313-02	2P
L1	010-2275-53	220uH

REF No.	PART No.	DESCRIPTION
L2	010-3105-62	1K ohm 100MHz
L3	010-3105-62	1K ohm 100MHz
L52	010-2003-04	30uH
L101	010-8026-00	CHOKE
L201	010-3406-66	22uH
L202	010-3406-54	2.2uH
L211	010-3407-59	5.6uH
L301	010-3406-66	22uH
L302	010-3105-62	1K ohm 100MHz
L303	010-3105-62	1K ohm 100MHz
L304	010-3105-62	1K ohm 100MHz
L305	010-3105-62	1K ohm 100MHz
L306	010-3105-62	1K ohm 100MHz
L307	010-3105-62	1K ohm 100MHz
L308	010-3105-62	1K ohm 100MHz
L309	010-3105-62	1K ohm 100MHz
L314	010-3406-50	1uH
L401	010-3406-66	22uH
L402	010-3105-62	1K ohm 100MHz
L403	010-3105-62	1K ohm 100MHz
L404	010-3105-62	1K ohm 100MHz
L405	010-3105-62	1K ohm 100MHz
L501	010-3105-62	1K ohm 100MHz
L502	010-3105-62	1K ohm 100MHz
L503	010-3105-62	1K ohm 100MHz
L504	010-3105-62	1K ohm 100MHz
Q6	190-1602-00	2SA1602A
Q7	190-1602-00	2SA1602A
Q8	125-2027-92	TRANSISTOR
Q8	125-2041-93	RT1N241M
Q200	193-1858-50	2SD1858
Q201	102-3420-00	2SC3420
Q202	108-0241-50	2SK241
Q210	190-1602-00	2SA1602A
Q211	125-2027-95	TRANSISTOR
Q211	125-2041-96	RT1N436M
Q212	190-1602-00	2SA1602A
Q213	192-4155-51	2SC4155A
Q214	190-1365-50	2SA1365-T122-1F
Q214	191-1197-50	TRANSISTOR
Q222	190-1602-00	2SA1602A
Q223	125-2027-92	TRANSISTOR
Q223	125-2041-93	RT1N241M
Q224	101-0941-00	2SB941
Q225	190-1602-00	2SA1602A
Q226	192-4155-51	2SC4155A
Q227	125-4014-90	KTC2020D
Q228	125-2041-93	RT1N241M
Q229	190-1416-00	2SA1416
Q230	190-1602-00	2SA1602A
Q231	190-1416-00	2SA1416
Q232	125-0034-92	RT1P141M
Q233	125-2027-92	TRANSISTOR
Q233	125-2041-93	RT1N241M
Q240	125-2027-92	TRANSISTOR
Q240	125-2041-93	RT1N241M
Q242	125-2027-92	TRANSISTOR
Q242	125-2041-93	RT1N241M
Q244	125-0034-92	RT1P141M
Q245	125-2027-95	TRANSISTOR
Q245	125-2041-96	RT1N436M
Q248	125-2027-92	TRANSISTOR
Q248	125-2041-93	RT1N241M
Q250	125-4015-90	KTC2026D
Q251	125-0034-96	RT1P436M
Q252	125-2027-95	TRANSISTOR
Q252	125-2041-96	RT1N436M

REF No.	PART No.	DESCRIPTION
Q401	125-0034-92	RT1P141M
Q402	192-3440-50	2SC3440
Q414	125-2027-95	TRANSISTOR
Q414	125-2041-96	RT1N436M
Q415	192-4155-51	2SC4155A
Q416	125-0034-96	RT1P436M
Q501	193-1306-00	2SD1306
Q502	193-1306-00	2SD1306
Q503	193-1306-00	2SD1306
Q504	193-1306-00	2SD1306
Q505	193-1306-00	2SD1306
Q506	193-1306-00	2SD1306
Q602	125-2027-92	TRANSISTOR
Q602	125-2041-93	RT1N241M
Q603	190-1602-00	2SA1602A
Q617	125-2027-92	TRANSISTOR
Q617	125-2041-93	RT1N241M
R1	119-1021-15	1/10W 1K ohm
R7	119-1231-15	1/10W 12K ohm
R8	119-1031-15	1/10W 10K ohm
R9	119-4741-15	1/10W 470K ohm
R10	119-2221-15	1/10W 2.2K ohm
R14	119-5631-15	1/10W 56K ohm
R15	119-1031-15	1/10W 10K ohm
R16	119-2221-15	1/10W 2.2K ohm
R18	119-1031-15	1/10W 10K ohm
R19	119-1031-15	1/10W 10K ohm
R21	119-1021-15	1/10W 1K ohm
R24	119-1521-15	1/10W 1.5K ohm
R25	119-1521-15	1/10W 1.5K ohm
R26	119-1031-15	1/10W 10K ohm
R27	119-1021-15	1/10W 1K ohm
R28	119-1021-15	1/10W 1K ohm
R29	119-1021-15	1/10W 1K ohm
R30	119-1041-15	1/10W 100K ohm
R83	119-2221-15	1/10W 2.2K ohm
R84	119-0000-05	1/10W 0 ohm JM
R101	119-1031-15	1/10W 10K ohm
R102	119-4731-15	1/10W 47K ohm
R103	117-0000-05	1/8W 0 ohm JM
R106	119-0000-05	1/10W 0 ohm JM
R121	119-4721-15	1/10W 4.7K ohm
R122	119-4721-15	1/10W 4.7K ohm
R123	119-4721-15	1/10W 4.7K ohm
R124	119-4721-15	1/10W 4.7K ohm
R209	119-1021-15	1/10W 1K ohm
R210	119-1031-15	1/10W 10K ohm
R211	119-4731-15	1/10W 47K ohm
R212	119-1531-15	1/10W 15K ohm
R213	119-1031-15	1/10W 10K ohm
R214	119-4731-15	1/10W 47K ohm
R215	119-2221-15	1/10W 2.2K ohm
R216	119-2221-15	1/10W 2.2K ohm
R219	119-1031-15	1/10W 10K ohm
R220	119-1031-15	1/10W 10K ohm
R221	119-3921-15	1/10W 3.9K ohm
R222	119-1801-15	1/10W 18 ohm
R223	119-1031-15	1/10W 10K ohm
R224	116-1591-15	1/4WS 1.5 ohm
R225	116-1591-15	1/4WS 1.5 ohm
R226	119-4731-15	1/10W 47K ohm
R227	119-3321-15	1/10W 3.3K ohm
R228	119-3321-15	1/10W 3.3K ohm
R229	116-1591-15	1/4WS 1.5 ohm
R230	119-2231-15	1/10W 22K ohm
R231	116-1591-15	1/4WS 1.5 ohm
R232	119-6801-15	1/10W 68 ohm

REF No.	PART No.	DESCRIPTION
R233	119-1031-15	1/10W 10K ohm
R234	119-5611-15	1/10W 560 ohm
R236	119-1031-15	1/10W 10K ohm
R238	119-1031-15	1/10W 10K ohm
R239	119-1221-15	1/10W 1.2K ohm
R240	116-4711-15	1/4WS 470 ohm
R242	116-4711-15	1/4WS 470 ohm
R243	119-1031-15	1/10W 10K ohm
R244	116-1811-15	1/4WS 180 ohm
R245	116-2791-15	1/4WS 2.7 ohm
R246	116-2791-15	1/4WS 2.7 ohm
R247	119-1011-15	1/10W 100 ohm
R248	119-1031-15	1/10W 10K ohm
R249	116-1221-15	1/4WS 1.2K ohm
R250	119-1031-15	1/10W 10K ohm
R251	116-1221-15	1/4WS 1.2K ohm
R252	116-1521-15	1/4WS 1.5K ohm
R316	119-1021-15	1/10W 1K ohm
R317	119-1021-15	1/10W 1K ohm
R325	032-0140-64	1/10W 43K ohm F
R326	032-0140-64	1/10W 43K ohm F
R327	032-0140-64	1/10W 43K ohm F
R328	032-0140-64	1/10W 43K ohm F
R329	032-0140-89	1/10W 47K ohm F
R330	032-0140-89	1/4W 47K ohm F
R340	119-0000-05	1/10W 0 ohm JM
R341	119-0000-05	1/10W 0 ohm JM
R342	119-0000-05	1/10W 0 ohm JM
R343	119-0000-05	1/10W 0 ohm JM
R344	032-0140-89	1/4W 47K ohm F
R345	119-1041-15	1/10W 100K ohm
R346	119-1041-15	1/10W 100K ohm
R347	032-0140-89	1/4W 47K ohm F
R348	119-1021-15	1/10W 1K ohm
R350	119-1041-15	1/10W 100K ohm
R351	119-2231-15	1/10W 22K ohm
R352	119-0000-05	1/10W 0 ohm JM
R353	119-4721-15	1/10W 4.7K ohm
R354	119-4721-15	1/10W 4.7K ohm
R355	119-1041-15	1/10W 100K ohm
R356	119-1041-15	1/10W 100K ohm
R363	032-0140-62	1/10W 1K ohm F
R364	032-0140-62	1/10W 1K ohm F
R365	032-0140-62	1/10W 1K ohm F
R366	032-0140-62	1/10W 1K ohm F
R480	119-3931-15	1/10W 39K ohm
R481	119-4721-15	1/10W 4.7K ohm
R482	119-3311-15	1/10W 330 ohm
R483	119-8221-15	1/10W 8.2K ohm
R484	119-1021-15	1/10W 1K ohm
R485	119-1021-15	1/10W 1K ohm
R486	119-1021-15	1/10W 1K ohm
R487	119-2231-15	1/10W 22K ohm
R531	119-2231-15	1/10W 22K ohm
R532	119-2231-15	1/10W 22K ohm
R533	119-2231-15	1/10W 22K ohm
R534	119-2231-15	1/10W 22K ohm
R535	119-2231-15	1/10W 22K ohm
R536	119-2231-15	1/10W 22K ohm
R537	119-3311-15	1/10W 330 ohm
R538	119-3311-15	1/10W 330 ohm
R539	119-3311-15	1/10W 330 ohm
R540	119-3311-15	1/10W 330 ohm
R541	119-3311-15	1/10W 330 ohm
R542	119-3311-15	1/10W 330 ohm
R544	119-1021-15	1/10W 1K ohm
R545	119-1021-15	1/10W 1K ohm

REF No.	PART No.	DESCRIPTION
R546	119-1021-15	1/10W 1K ohm
R603	116-6801-15	1/4WS 68 ohm
R604	119-3321-15	1/10W 3.3K ohm
R606	119-1041-15	1/10W 100K ohm
R607	119-2231-15	1/10W 22K ohm
R608	119-1031-15	1/10W 10K ohm
R609	119-4731-15	1/10W 47K ohm
R610	119-4721-15	1/10W 4.7K ohm
R620	119-0000-05	1/10W 0 ohm JM
R637	119-1041-15	1/10W 100K ohm
R638	119-4731-15	1/10W 47K ohm
R639	119-4721-15	1/10W 4.7K ohm
R640	119-3331-15	1/10W 33K ohm
R641	119-1831-15	1/10W 18K ohm
R642	119-1031-15	1/10W 10K ohm

REF No.	PART No.	DESCRIPTION
R643	119-5621-15	1/10W 5.6K ohm
R644	119-1541-15	1/10W 150K ohm
R645	119-8221-15	1/10W 8.2K ohm
R646	119-4321-15	1/10W 4.3K ohm
R660	119-3321-15	1/10W 3.3K ohm
R666	119-0000-05	1/10W 0 ohm JM
R667	119-0000-05	1/10W 0 ohm JM
R668	119-0000-05	1/10W 0 ohm JM
R674	119-2711-15	1/10W 270 ohm
R677	119-1031-15	1/10W 10K ohm
R678	119-1031-15	1/10W 10K ohm
R680	119-0000-05	1/10W 0 ohm JM
R681	119-0000-05	1/10W 0 ohm JM
R682	119-0000-05	1/10W 0 ohm JM
R683	119-0000-05	1/10W 0 ohm JM

REF No.	PART No.	DESCRIPTION
R685	119-0000-05	1/10W 0 ohm JM
R694	119-0000-05	1/10W 0 ohm JM
R695	119-1031-15	1/10W 10K ohm
R905	119-0000-05	1/10W 0 ohm JM
R907	119-6821-15	1/10W 6.8K ohm
R908	119-0000-05	1/10W 0 ohm JM
S601	013-6100-00	SWITCH
S602	013-7106-00	TKR00120670M
S603	013-7206-50	SPPB530701
SUP51	060-0122-91	DSP-141N-S00B
X1	061-1066-00	7.2MHz
X601	060-1505-50	10MHz
PWB	039-2650-00	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C700	178-1052-78	1uF
C701	178-1052-78	1uF
C702	178-1052-78	1uF
C703	178-1052-78	1uF
C704	178-1052-78	1uF
C706	178-1052-78	1uF
C707	042-0423-97	16V 10uF TAN
C710	042-0671-00	16V 4.7uF TAN
C711	042-0671-00	16V 4.7uF TAN
C712	043-0542-00	25V 4.7uF
C713	042-0671-00	16V 4.7uF TAN
C714	042-0671-00	16V 4.7uF TAN
C715	042-0671-00	16V 4.7uF TAN
C716	168-1042-78	16V 0.1uF
C720	168-1042-78	16V 0.1uF
C725	166-1011-50	100pF CH
C726	166-1011-50	100pF CH
C727	168-1022-55	1000pF CH
C728	178-4742-78	0.47uF
C729	168-4722-55	4700pF K
C730	168-4722-55	4700pF K
C731	168-4722-55	4700pF K
C734	168-1022-55	1000pF CH
C735	168-1022-55	1000pF CH
C736	168-1022-55	1000pF CH
C737	178-1052-78	1uF
C738	168-4732-78	0.047uF K
C739	166-1011-50	100pF CH
C740	042-0671-00	16V 4.7uF TAN
C741	166-1011-50	100pF CH
D701	001-7088-90	DIODE
D702	001-7088-90	DIODE
D703	001-7088-90	DIODE
D704	001-7088-90	DIODE
D705	001-7088-90	DIODE
D709	001-4301-35	HZU6.2B2
D710	001-4301-35	HZU6.2B2
D711	001-4301-35	HZU6.2B2
D712	001-4301-35	HZU6.2B2
D713	001-4301-35	HZU6.2B2
D714	001-4301-35	HZU6.2B2
D715	001-4301-35	HZU6.2B2
D716	001-4301-35	HZU6.2B2
D717	001-4301-35	HZU6.2B2
D721	001-4301-35	HZU6.2B2
D723	001-1310-00	KDS160
D724	001-1310-00	KDS160
D725	001-1310-00	KDS160
D726	001-1310-00	KDS160

REF No.	PART No.	DESCRIPTION
D727	001-4301-35	HZU6.2B2
D728	001-4301-35	HZU6.2B2
D729	001-4301-35	HZU6.2B2
D731	001-4301-35	HZU6.2B2
D732	001-4301-35	HZU6.2B2
D733	001-4301-35	HZU6.2B2
D734	001-4301-35	HZU6.2B2
D735	001-4301-35	HZU6.2B2
D738	001-4301-35	HZU6.2B2
D739	001-4301-35	HZU6.2B2
D740	001-4301-35	HZU6.2B2
D741	001-1310-00	KDS160
D742	001-1310-00	KDS160
D743	001-1310-00	KDS160
IC701	052-7075-00	uPD703037HGF-A07-3BA
IR701	060-4017-90	RS-671
P701	076-0647-00	16P
P704	074-2002-76	26P
Q708	125-2027-92	DTC124EUA
Q709	190-1365-50	2SA1635
Q710	125-2017-96	RN1426
Q711	125-2017-96	RN1426
Q712	125-2017-96	RN1426
Q713	125-2017-96	RN1426
Q714	125-2017-96	RN1426
Q715	125-2017-96	RN1426
Q716	190-1365-50	2SA1635
Q717	125-2027-92	DTC124EUA
R701	119-1041-15	1/10W 100k ohm
R703	119-1041-15	1/10W 100k ohm
R704	119-1031-15	1/10W 10k ohm
R705	119-1031-15	1/10W 10k ohm
R710	119-1031-15	1/10W 10k ohm
R711	119-1031-15	1/10W 10k ohm
R714	119-6811-15	1/10W 680 ohm
R715	119-1521-15	1/10W 1.5K ohm
R716	119-1521-15	1/10W 1.5K ohm
R717	119-6811-15	1/10W 680 ohm
R718	119-8211-15	1/10W 820 ohm
R719	119-4711-15	1/10W 470 ohm
R720	119-6811-15	1/10W 680 ohm
R721	119-1521-15	1/10W 1.5K ohm
R722	119-1521-15	1/10W 1.5K ohm
R723	119-8211-15	1/10W 820 ohm
R724	119-3911-15	1/10W 390 ohm
R725	119-4311-15	1/10W 430 ohm
R726	119-8211-15	1/10W 820 ohm
R727	119-3911-15	1/10W 390 ohm

REF No.	PART No.	DESCRIPTION
R728	119-4311-15	1/10W 430 ohm
R729	119-1031-15	1/10W 10k ohm
R730	119-1031-15	1/10W 10k ohm
R734	119-8211-15	1/10W 820 ohm
R735	119-8211-15	1/10W 820 ohm
R736	119-6811-15	1/10W 680 ohm
R737	119-5611-15	1/10W 560 ohm
R739	119-8211-15	1/10W 820 ohm
R740	119-6811-15	1/10W 680 ohm
R741	119-1031-15	1/10W 10k ohm
R742	119-2221-15	1/10W 2.2k ohm
R743	119-1031-15	1/10W 10k ohm
R744	119-2221-15	1/10W 2.2k ohm
R745	119-5611-15	1/10W 560 ohm
R750	119-0000-05	1/10W 0 ohm JM
R751	119-0000-05	1/10W 0 ohm JM
R752	119-0000-05	1/10W 0 ohm JM
R753	119-1031-15	1/10W 10k ohm
R754	119-1031-15	1/10W 10k ohm
R755	119-1031-15	1/10W 10k ohm
R756	119-1031-15	1/10W 10k ohm
R757	119-1031-15	1/10W 10k ohm
R758	119-4721-15	1/10W 4.7K ohm
R759	119-4721-15	1/10W 4.7K ohm
R760	119-3921-15	1/10W 3.9k ohm
R761	119-1041-15	1/10W 100k ohm
R762	119-1011-15	1/10W 100 ohm
R763	119-1011-15	1/10W 100 ohm
R764	119-1011-15	1/10W 100 ohm
R767	119-0000-05	1/10W 0 ohm JM
R768	119-0000-05	1/10W 0 ohm JM
R772	119-0000-05	1/10W 0 ohm JM
R777	119-0000-05	1/10W 0 ohm JM
S701	013-6312-50	SWITCH
S702	013-6312-50	SWITCH
S703	013-6312-50	SWITCH
S704	013-6312-50	SWITCH
S705	013-6312-50	SWITCH
S706	013-6312-50	SWITCH
S707	013-6312-50	SWITCH
S708	013-6312-50	SWITCH
S709	013-6312-50	SWITCH
S710	013-6312-50	SWITCH
S711	013-6312-50	SWITCH
S712	013-6312-50	SWITCH
S713	013-6312-50	SWITCH
S714	013-6312-50	SWITCH
S715	013-6312-50	SWITCH
S718	013-6312-50	SWITCH

REF No.	PART No.	DESCRIPTION
S720	013-6312-50	SWITCH
S721	013-6312-50	SWITCH
S722	013-6312-50	SWITCH

REF No.	PART No.	DESCRIPTION
S723	016-9900-85	ENCODER-SW
X701	060-1519-90	12.58MHZ

REF No.	PART No.	DESCRIPTION
PWB	039-2659-01	PWB(WITHOUT COMPONENT)

CD PWB(B3) section: 929-0301-83

REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF
C4	168-1042-78	16V 0.1uF
C5	046-1032-78	0.01uF
C9	046-4722-58	4700pF
C10	045-1011-50	100pF
C13	168-1042-78	16V 0.1uF
C16	168-1042-78	16V 0.1uF
C17	046-1032-78	0.01uF
C18	178-1052-78	1uF
C19	046-1032-78	0.01uF
C20	168-1042-78	16V 0.1uF
C21	042-0595-53	4V 220uF
C22	168-1042-78	16V 0.1uF
C23	168-1042-78	16V 0.1uF
C24	046-1032-78	0.01uF
C25	045-8097-50	8pF
C26	045-8097-50	8pF
C27	042-0416-52	10V10uF TAN
C28	046-1032-78	0.01uF
C29	168-1042-78	16V 0.1uF
C30	045-1201-50	12pF
C31	168-1042-78	16V 0.1uF
C32	046-1032-78	0.01uF
C33	046-1032-78	0.01uF
C34	046-1032-78	0.01uF
C35	046-1022-58	1000pF
C102	163-1073-35	16V 100uF
C103	046-4722-58	4700pF
C104	046-1032-78	0.01uF
C105	168-1042-78	16V 0.1uF
C106	168-1042-78	16V 0.1uF
C107	042-0416-52	10V 10uF TAN
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	168-1042-78	16V 0.1uF
C112	168-4732-78	0.047uF
C113	168-4732-78	0.047uF
C114	168-1042-78	16V 0.1uF
C115	045-4701-50	47pF
C116	046-4712-58	470pF
C117	046-4712-58	470pF
C118	168-1042-78	16V 0.1uF
C119	168-1042-78	16V 0.1uF
C120	046-1532-78	0.015uF
C121	046-6822-58	6800pF
C122	168-1042-78	16V 0.1uF
C123	046-1032-78	0.01uF
C126	046-3332-78	0.033uF
C127	046-4722-58	4700pF
C130	168-1042-78	16V 0.1uF
C131	046-1522-58	1500pF
C132	168-1042-78	16V 0.1uF
C133	046-1532-78	0.015uF

REF No.	PART No.	DESCRIPTION
C134	168-1042-78	16V 0.1uF
C135	045-6801-50	50V 68pF
C136	178-1052-78	1uF
C138	168-1042-78	16V 0.1uF
C139	168-1042-78	16V 0.1uF
C140	046-6812-58	680pF
C142	178-1052-78	1uF
C144	042-0560-85	6.3V 100uF
C145	168-1042-78	16V 0.1uF
C146	168-1042-78	16V 0.1uF
C147	178-1052-78	1uF
C148	042-0595-53	4V 220uF
C149	163-1073-35	16V 100uF
C150	168-1042-78	16V 0.1uF
C151	178-1052-78	1uF
C200	178-1052-78	1uF
CCT1	050-0145-54	1/16W 47k ohm x4
CCT2	050-0145-58	2.2k ohm x 4
CCT3	050-0140-63	1/32W 47k ohm x4J
CCT101	050-0140-68	1/32W 3.3k ohm x4J
D1	001-2610-90	RB480KTL
D2	001-2610-90	RB480KTL
D3	001-2610-90	RB480KTL
D4	001-2610-90	RB480KTL
D5	001-2610-90	RB480KTL
D6	001-2610-90	RB480KTL
D101	001-0367-91	1SS226
IC1	051-7518-18	SN74LVC139A-PWR
IC2	051-3315-90	TPS76316DBVR
IC3	051-7239-38	SN74AHCT08PWR
IC5	051-5441-08	BD4828G-TR
IC6	051-6700-00	TMS320DA140
IC10	052-5055-33	MBM29DL800BA-90PFTN
IC11	051-6919-08	NJU6391PE
IC12	051-7221-58	SN74AHC1G04-HDCKR
IC13	051-7280-38	TC7SU04FU-TE85L
IC14	051-7280-38	TC7SU04FU-TE85L
IC101	051-6069-08	FAN8047G3
IC102	051-6399-00	TC94A15F
J1	074-1138-65	15P
J2	074-1138-60	10P
J3	074-1237-70	20P
Q1	131-1188-50	2SB1188PQR
Q2	125-2004-92	RN1402
Q101	131-1188-50	2SB1188PQR
Q102	131-1188-50	2SB1188PQR
R1	033-4721-15	1/10W 4.7k ohm
R2	033-1041-15	1/10W 100k ohm
R3	033-1041-15	1/10W 100k ohm
R4	033-1031-15	1/10W 10k ohm
R5	033-2231-15	1/10W 22k ohm
R6	033-3911-15	1/10W 390 ohm

REF No.	PART No.	DESCRIPTION
R7	033-4731-15	1/10W 47k ohm
R8	033-1051-15	1/10W 1M ohm
R9	033-3311-15	1/10W 330 ohm
R12	033-4731-15	1/10W 47k ohm
R13	033-1041-15	1/10W 100k ohm
R14	033-4721-15	1/10W 4.7k ohm
R15	033-4721-15	1/10W 4.7k ohm
R16	033-1021-15	1/10W 1k ohm
R17	033-1021-15	1/10W 1k ohm
R19	033-4731-15	1/10W 47k ohm
R20	033-4731-15	1/10W 47k ohm
R23	033-2211-15	1/10W 220 ohm
R24	033-4731-15	1/10W 47k ohm
R28	033-6841-15	1/10W 680k ohm
R29	033-6841-15	1/10W 680k ohm
R30	033-1041-15	1/10W 100k ohm
R31	033-1031-15	1/10W 10k ohm
R32	033-1031-15	1/10W 10k ohm
R33	033-1031-15	1/10W 10k ohm
R34	033-6831-15	1/10W 68k ohm
R35	033-6831-15	1/10W 68k ohm
R36	033-3311-15	1/10W 330 ohm
R43	033-4731-15	1/10W 47k ohm
R44	033-4731-15	1/10W 47k ohm
R45	033-4731-15	1/10W 47k ohm
R101	033-1231-15	1/10W 12k ohm
R102	033-3321-15	1/10W 3.3k ohm
R103	033-3331-15	1/10W 33k ohm
R104	033-4731-15	1/10W 47k ohm
R105	033-4731-15	1/10W 47k ohm
R106	033-2211-15	1/10W 220 ohm
R107	033-2211-15	1/10W 220 ohm
R108	033-1021-15	1/10W 1k ohm
R109	033-1021-15	1/10W 1k ohm
R110	033-4731-15	1/10W 47k ohm
R115	033-0000-05	1/10W 0 ohm
R116	033-5621-15	1/10W 5.6k ohm
R117	033-4731-15	1/10W 47k ohm
R118	033-3341-15	1/10W 330k ohm
R119	033-2231-15	1/10W 22k ohm
R120	033-2231-15	1/10W 22k ohm
R121	117-1001-15	1/10W 10 ohm
R122	033-2211-15	1/10W 220 ohm
R123	117-6811-15	1/10W 680 ohm
R124	032-0162-50	1/10W 0.51 ohm
R126	033-1021-15	1/10W 1k ohm
R127	033-1021-15	1/10W 1k ohm
R130	033-1051-15	1/10W 1M ohm
TM101	073-0768-90	TERMINAL
X1	061-3534-90	16.92MHz
PWB	039-2429-21	PWB(WITHOUT COMPONENT)

LED PWB(B4) section: 929-0301-83

REF No.	PART No.	DESCRIPTION
D11	001-7058-90	AN1105W-RR
D12	001-7058-90	AN1105W-RR
J4	074-1138-60	10P

REF No.	PART No.	DESCRIPTION
Q11	060-4015-90	PS1192H
Q12	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING

REF No.	PART No.	DESCRIPTION
S2	013-7413-50	LIMIT
PWB	039-1944-21	PWB(WITHOUT COMPONENT)