


9. EXPLODED VIEWS AND PARTS LIST

*NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to  mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

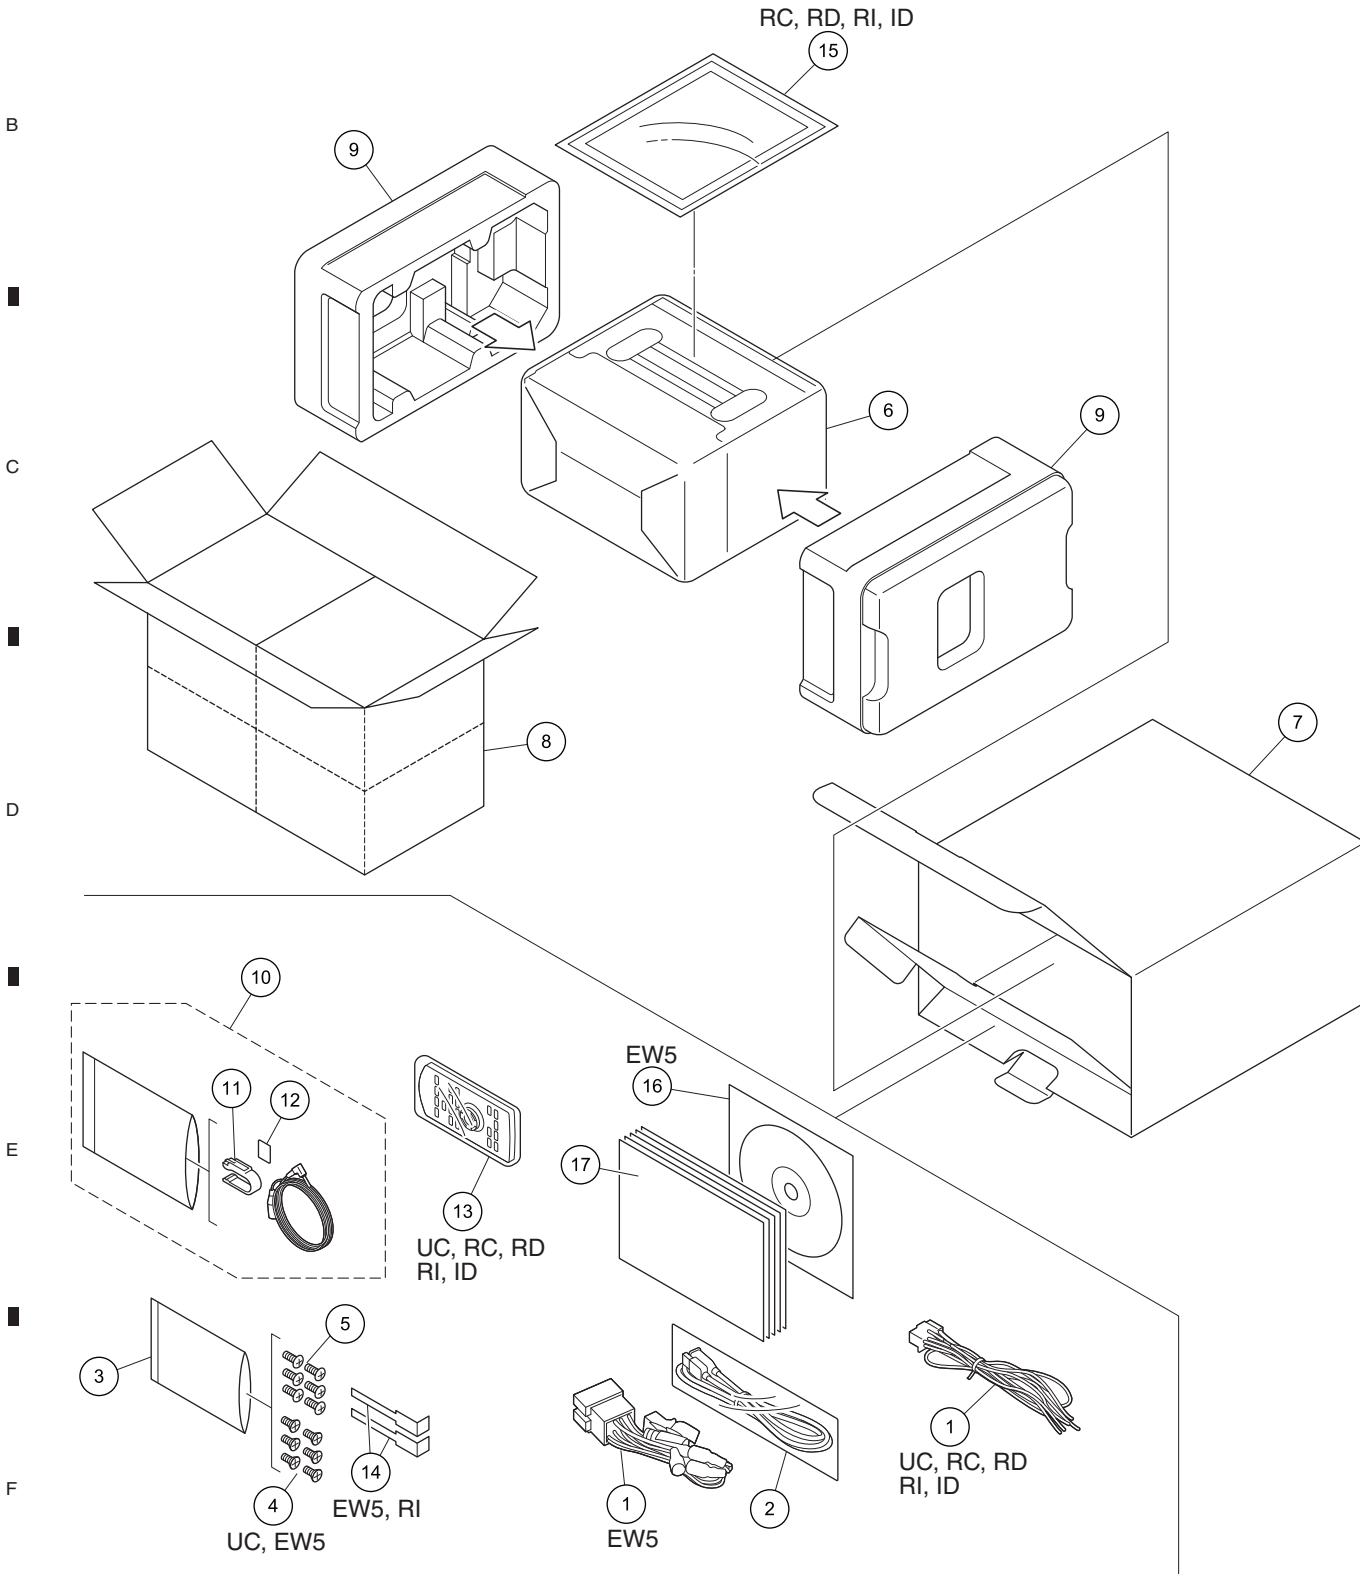

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Cord Assy	See Contrast table (2)	13	Card Remote Control Unit	See Contrast table (2)
2	USB Extended Cable	CDP1585	14	Handle	See Contrast table (2)
3	Polyethylene Bag	CEG1160	15	Panel	See Contrast table (2)
4	Screw	See Contrast table (2)			
5	Screw	TRZ50P080FTC	16	IM CD-ROM	See Contrast table (2)
			17-1	Owner's Manual	See Contrast table (2)
6	Cover	See Contrast table (2)	* 17-2	Warranty Card	See Contrast table (2)
7	Unit Box	See Contrast table (2)	17-3	Installation Manual	See Contrast table (2)
8	Contain Box	See Contrast table (2)	17-4	Installation Manual	See Contrast table (2)
9	Protector	See Contrast table (2)			
10	Microphone Assy	CPM1083	* 17-5	Caution Card	See Contrast table (2)
			* 17-6	Caution Card	See Contrast table (2)
11	Holder	CZN7192	* 17-7	Service Network	See Contrast table (2)
12	Cushion	CZN7193			

(2) CONTRAST TABLE

AVH-X5500BHS/XNUC, AVH-X5500BT/XNEW5, AVH-X5550BT/XNRC, AVH-X5550BT/XNRD, AVH-X5550BT/XNRI and AVH-X5590BT/XNID are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVH-X5500BHS/XNUC</u>	<u>AVH-X5500BT/XNEW5</u>	<u>AVH-X5550BT/XNRC</u>
	1	Cord Assy	CDP1435	CDP1436	CDP1435
	4	Screw	CRZ50P090FTC	CRZ50P090FTC	Not used
	6	Cover	CEG1359	CEG1356	CEG1356
	7	Unit Box	CHG8154	CHG8162	CHG8155
	8	Contain Box	CHL8154	CHL8162	CHL8155
	9	Protector	CHP4598	CHP4599	CHP4598
	13	Card Remote Control Unit	CXE5116	Not used	CXE5116
	14	Handle	Not used	CND6289	Not used
	15	Panel	Not used	Not used	CNS9475
	16	IM CD-ROM	Not used	CPJ1446	Not used
	17-1	Owner's Manual	CRD4703	Not used	CRD4704
*	17-2	Warranty Card	QRY3001	CRY1376	Not used
	17-3	Installation Manual	Not used	CRD4652	Not used
	17-4	Installation Manual	Not used	CRD4653	Not used
*	17-5	Caution Card	Not used	CRP1436	Not used
*	17-6	Caution Card	Not used	CRP1441	Not used
*	17-7	Service Network	Not used	Not used	Not used

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVH-X5550BT/XNRD</u>	<u>AVH-X5550BT/XNRI</u>	<u>AVH-X5590BT/XNID</u>
	1	Cord Assy	CDP1435	CDP1435	CDP1435
	4	Screw	Not used	Not used	Not used
	6	Cover	CEG1356	CEG1356	CEG1356
	7	Unit Box	CHG8156	CHG8163	CHG8157
	8	Contain Box	CHL8156	CHL8163	CHL8157
	9	Protector	CHP4598	CHP4599	CHP4598
	13	Card Remote Control Unit	CXE5116	CXE5116	CXE5116
	14	Handle	Not used	CND6289	Not used
	15	Panel	CNS9475	CNS9475	CNS9475
	16	IM CD-ROM	Not used	Not used	Not used
	17-1	Owner's Manual	CRD4706	CRD4705	CRB4065
*	17-2	Warranty Card	Not used	Not used	CRY1304
	17-3	Installation Manual	Not used	Not used	Not used
	17-4	Installation Manual	Not used	Not used	Not used

9.2 EXTERIOR (1)

A


B

C

D

E

F

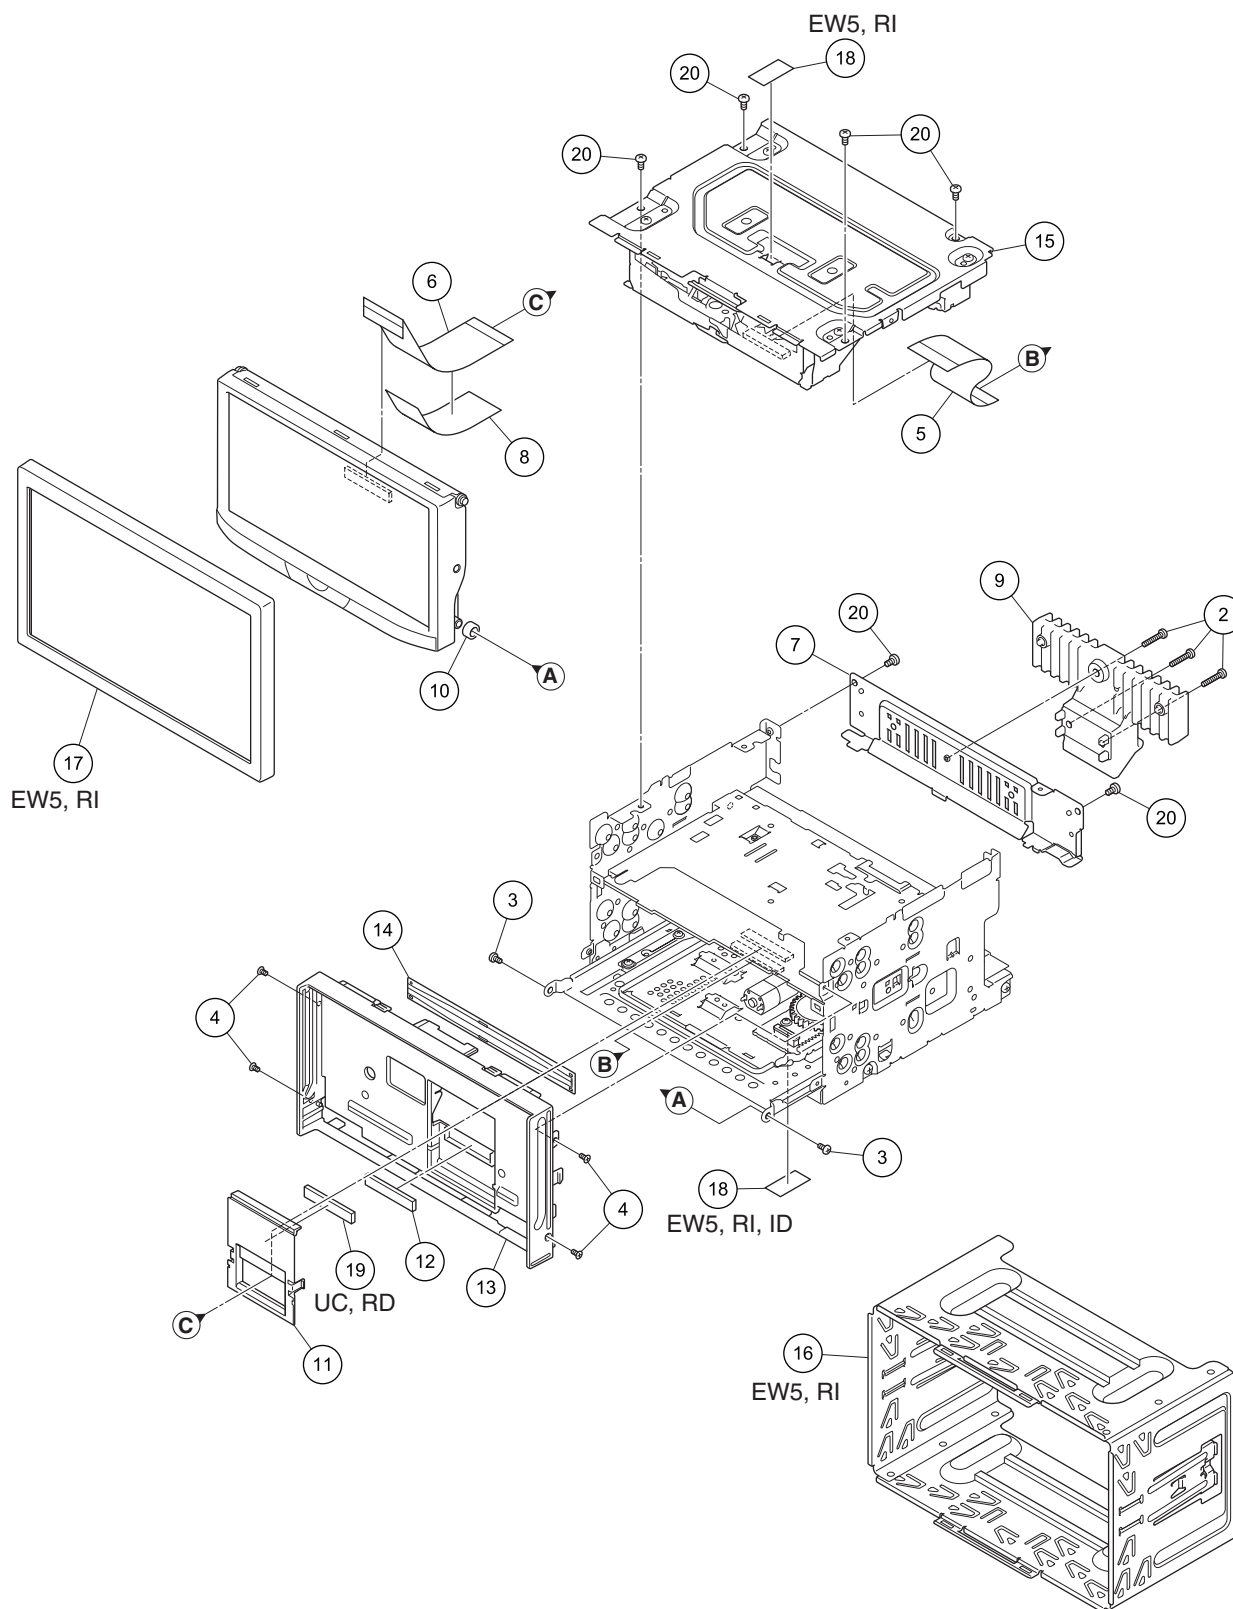


	5		6		7		8	
(1) EXTERIOR (1) SECTION PARTS LIST								
Mark No.	Description	Part No.	Mark No.	Description	Part No.			
1	Screw	BSZ26P050FTC	11	Cover	CNW2316			
2	Screw	BSZ26P120FTC	12	Cushion	CNN3206			
3	Screw	CBA1735	13	Panel	See Contrast table (2)			
4	Screw (M2 x 3)	CBA1877	14	Cover	QNM3029			
5	FFC	CDE9765	15	DVD Mechanism Module (LS2)	CXK8002			
6	FFC	CDE9769	16	Holder	See Contrast table (2)			
7	Holder	CND6246	17	Panel	See Contrast table (2)			
8	Sheet	CNN4247	18	Label	See Contrast table (2)			
9	Heat Sink	CNR2147	19	Cushion	See Contrast table (2)			
10	Collar	CNW2038	20	Screw	BSZ26P060FTC			

(2) CONTRAST TABLE

AVH-X5500BHS/XNUC, AVH-X5500BT/XNEW5, AVH-X5550BT/XNRC, AVH-X5550BT/XNRD, AVH-X5550BT/XNRI and AVH-X5590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X5500BHS/XNUC	AVH-X5500BT/XNEW5	AVH-X5550BT/XNRC
	13	Panel	CNU2048	CNU2047	CNU2049
	16	Holder	Not used	CND6288	Not used
	17	Panel	Not used	CNS9952	Not used
	18	Label	Not used	CNN3533	Not used
	19	Cushion	CNN3206	Not used	Not used
Mark	No.	Description	AVH-X5550BT/XNRD	AVH-X5550BT/XNRI	AVH-X5590BT/XNID
	13	Panel	CNU2049	CNU2049	CNU2049
	16	Holder	Not used	CND6288	Not used
	17	Panel	Not used	CNS9952	Not used
	18	Label	Not used	CNN3533	CNN3533
	19	Cushion	CNN3206	Not used	Not used

9.3 EXTERIOR (2)

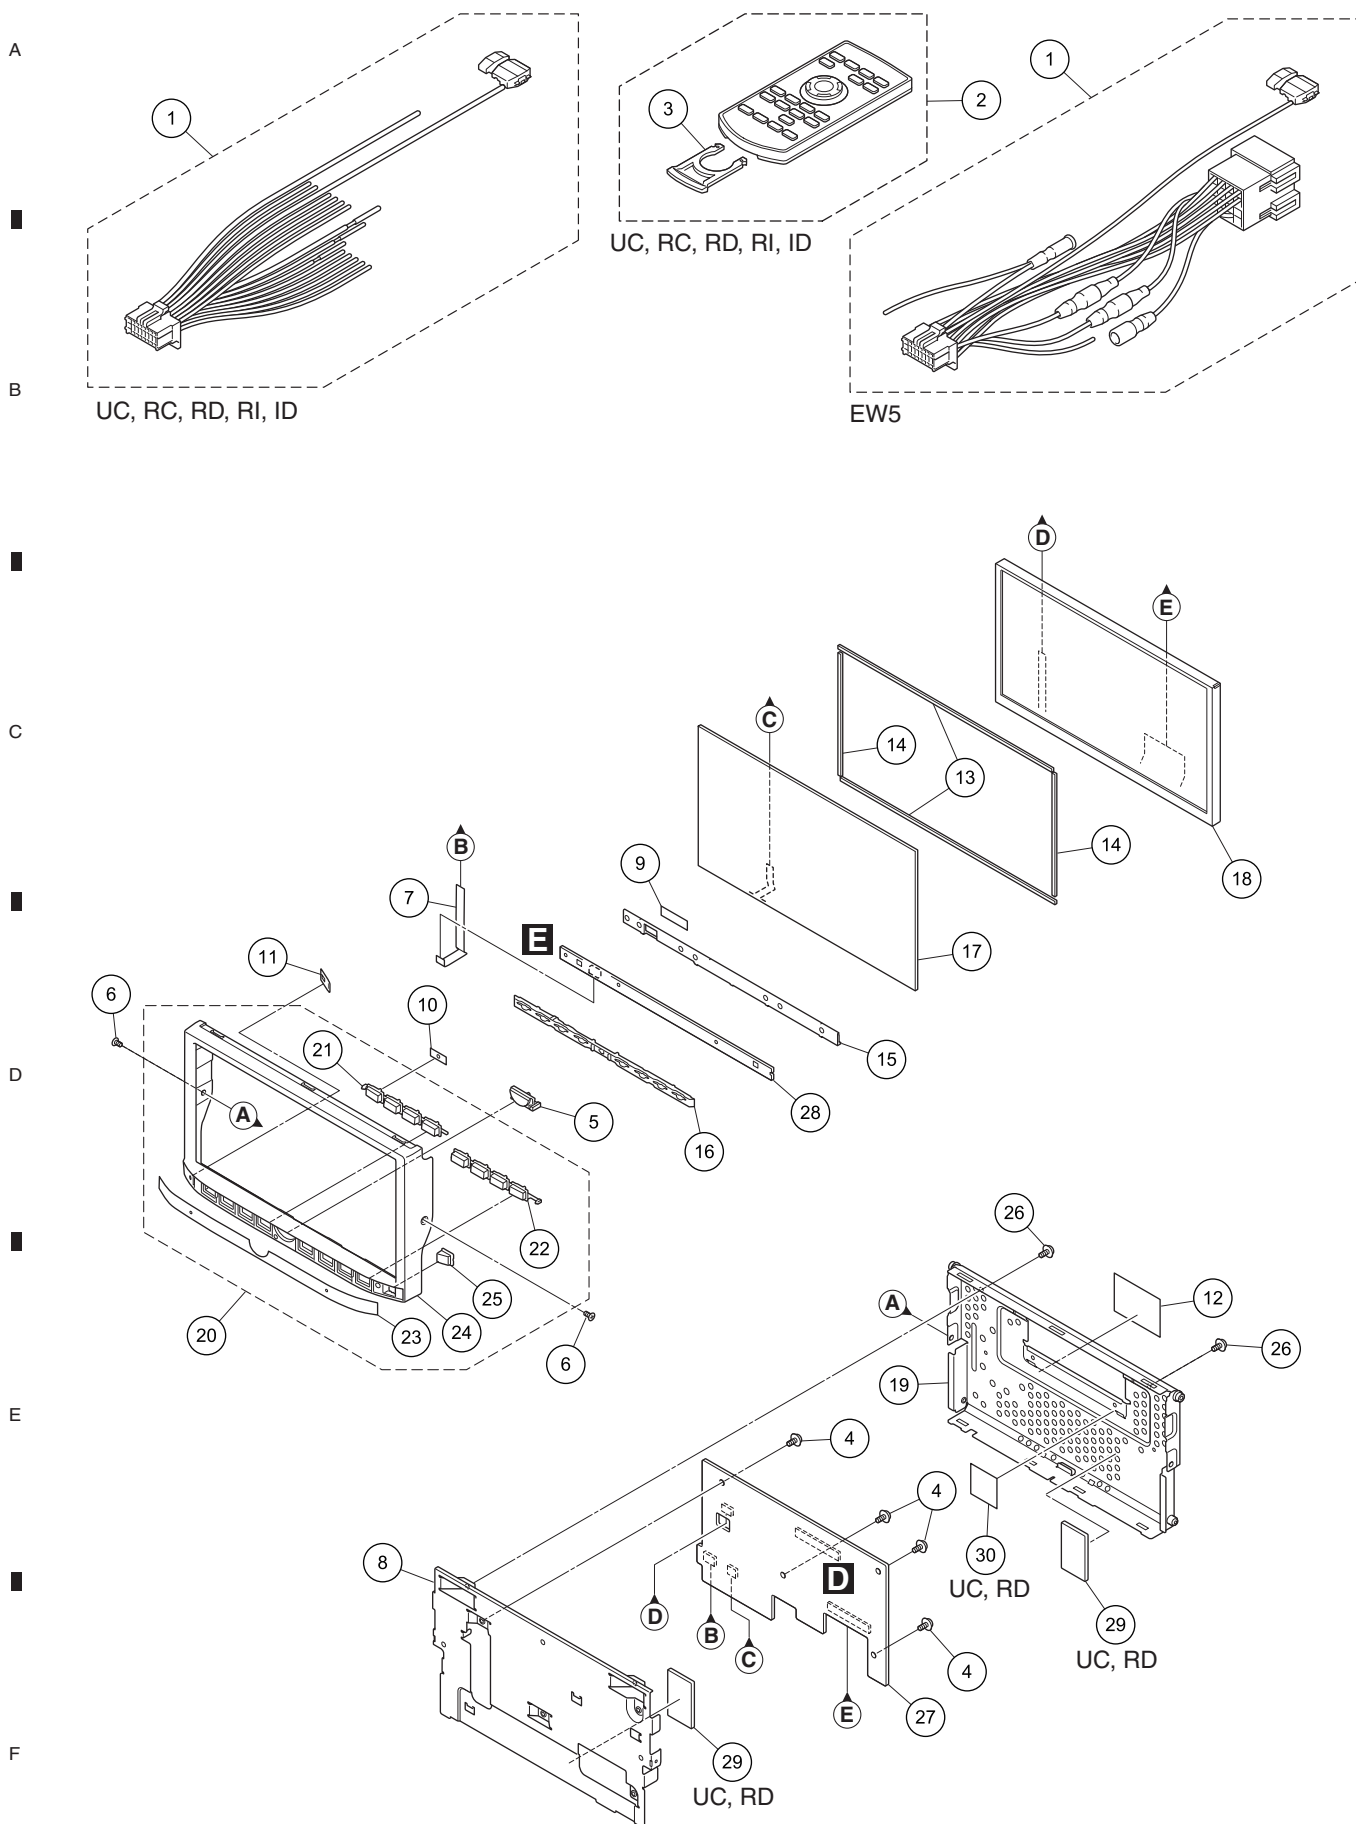

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Cord Assy	See Contrast table (2)	16	Lighting Conductor	CNW2312
2	Card Remote Control Unit	See Contrast table (2)	17	Touch Panel	CSX1194
3	Battery Cover	See Contrast table (2)	18	TFT LCD	CWX4182
4	Screw	AMZ26P040FTC	19	Case Unit	CXE4761
5	Button (HOME)	CAI3846	20	Grille Assy	See Contrast table (2)
6	Screw (M2 x 3)	CBA1877	21	Button (SRC, VOL+/-, MUTE)	CAI3613
7	FFC	CDE9393	22	Button (MODE, TRK UP/DOWN, EJECT)	CAI3690
8	Holder	CND6526	23	Plate	See Contrast table (2)
9	Sheet	CNN3991	24	Grille	CNU2015
10	Sheet	CNN4033	25	Lighting Conductor	CNW2313
11	Sheet	CNN4196	26	Screw	IMS20P030FTC
12	Sheet	CNN4232	27	Service Unit (Monitor)	CXX4997
13	Cushion	CNN4271	28	Service Unit (Key)	CXX5005
14	Cushion	CNN4272	29	Gasket	See Contrast table (2)
15	Holder	CNU1756	30	Sheet	See Contrast table (2)

(2) CONTRAST TABLE

AVH-X5500BHS/XNUC, AVH-X5500BT/XNEW5, AVH-X5550BT/XNRC, AVH-X5550BT/XNRD, AVH-X5550BT/XNRI and AVH-X5590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X5500BHS/XNUC	AVH-X5500BT/XNEW5	AVH-X5550BT/XNRC
	1	Cord Assy	CDP1435	CDP1436	CDP1435
	2	Card Remote Control Unit	CXE5116	Not used	CXE5116
	3	Battery Cover	CNU1624	Not used	CNU1624
	20	Grille Assy	CXE5621	CXE5620	CXE5622
	23	Plate	CNN4177	CNN4176	CNN4178
	29	Gasket	CNN4360	Not used	Not used
	30	Sheet	CNN3881	Not used	Not used
Mark	No.	Description	AVH-X5550BT/XNRD	AVH-X5550BT/XNRI	AVH-X5590BT/XNID
	1	Cord Assy	CDP1435	CDP1435	CDP1435
	2	Card Remote Control Unit	CXE5116	CXE5116	CXE5116
	3	Battery Cover	CNU1624	CNU1624	CNU1624
	20	Grille Assy	CXE5622	CXE5622	CXE5623
	23	Plate	CNN4178	CNN4178	CNN4179
	29	Gasket	CNN4360	Not used	Not used
	30	Sheet	CNN3881	Not used	Not used

9.4 EXTERIOR (3)

A


B

C

D

E

F

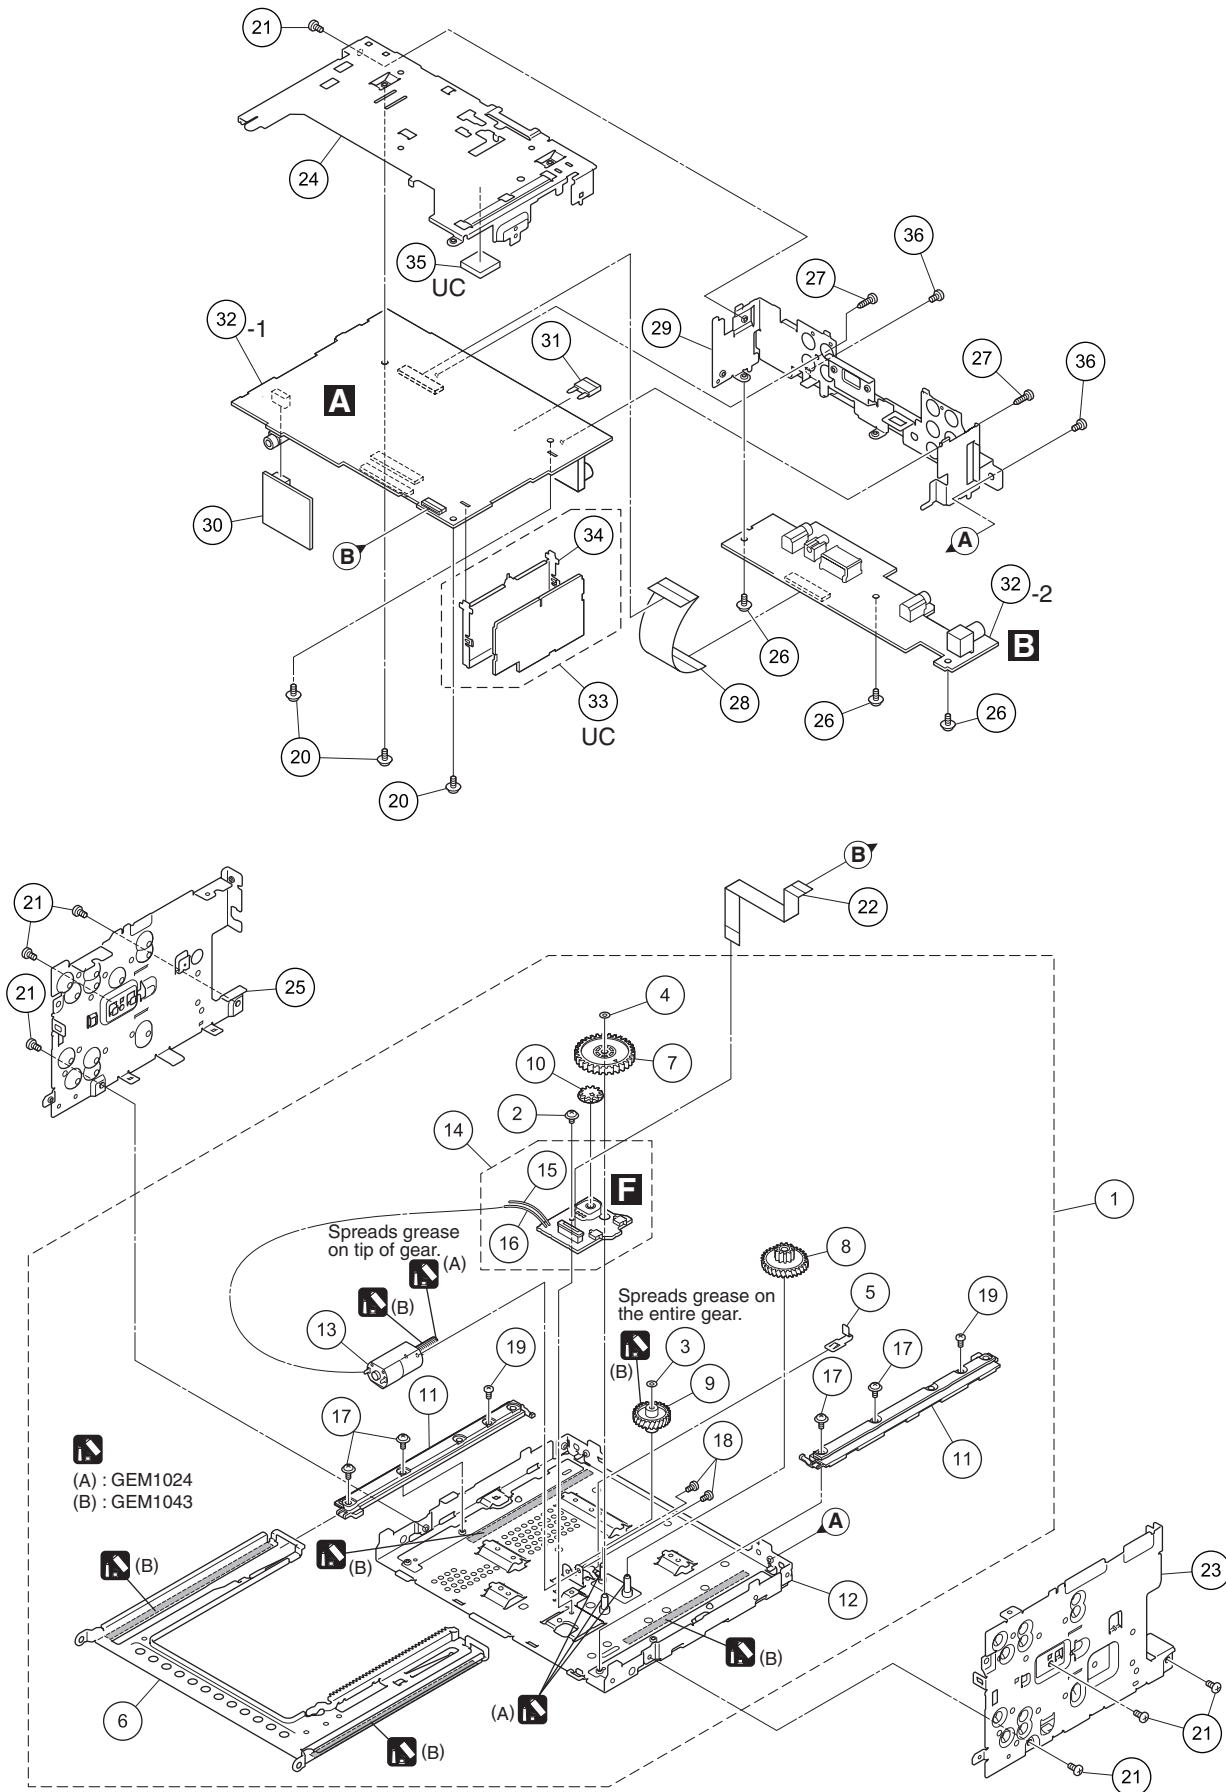

(1) EXTERIOR (3) SECTION PARTS LIST					
Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Drive Mechanism Unit	CXE3878	20	Screw	ASZ26P050FTC
2	Screw	AMZ26P030FTC	21	Screw	BSZ26P050FTC
3	Washer	CBF1039	22	FFC	CDE9554
4	Washer	CBF1064	23	Bracket	CND6335
5	Spring	EBL1034	24	Holder	CND6530
6	Frame	ENC2001	25	Bracket	CND6636
7	Gear	ENV1630	26	Screw	ASZ26P050FTC
8	Gear	ENV1631	27	Screw	BPZ26P080FTC
9	Gear	ENV1632	28	FFC	CDE9766
10	Gear	ENV1635	29	Holder	See Contrast table (2)
11	Guide	ENV3001	30	BT Module (U1671)	CWX4306
12	Chassis Unit	EXA4001	31	Fuse (10A)	YEK5001
13	Motor Unit	EXA4003	32	Service Unit (Mother I/F)	See Contrast table (2)
14	PCB Unit (Service)	EXX2001	33	WWR Core TUN Umit (U401)	See Contrast table (2)
* 15	Cord (Green)	CDC1056	34	Holder	See Contrast table (2)
* 16	Cord (White)	CDC1057	35	Sheet	See Contrast table (2)
17	Screw	IMS26P060FTC	36	Screw	BSZ26P060FTC
18	Screw	JFZ20P025FTC			
19	Screw	EBA2002			

(2) CONTRAST TABLE
 AVH-X5500BHS/XNUC, AVH-X5500BT/XNEW5, AVH-X5550BT/XNRC, AVH-X5550BT/XNRD, AVH-X5550BT/XNRI and AVH-X5590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X5500BHS/XNUC	AVH-X5500BT/XNEW5	AVH-X5550BT/XNRC
	29	Holder	CND6554	CND6531	CND6531
	32	Service Unit (Mother I/F)	CXX4970	CXX4969	CXX4972
	33	WWR Core TUN Umit (U401)	CWE2364	Not used	Not used
	34	Holder	CND6449	Not used	Not used
	35	Sheet	CNN4314	Not used	Not used
Mark	No.	Description	AVH-X5550BT/XNRD	AVH-X5550BT/XNRI	AVH-X5590BT/XNID
	29	Holder	CND6531	CND6531	CND6531
	32	Service Unit (Mother I/F)	CXX4973	CXX4974	CXX4975
	33	WWR Core TUN Umit (U401)	Not used	Not used	Not used
	34	Holder	Not used	Not used	Not used
	35	Sheet	Not used	Not used	Not used

9.5 DVD MECHANISM MODULE (1)

A


B

C

D

E

F

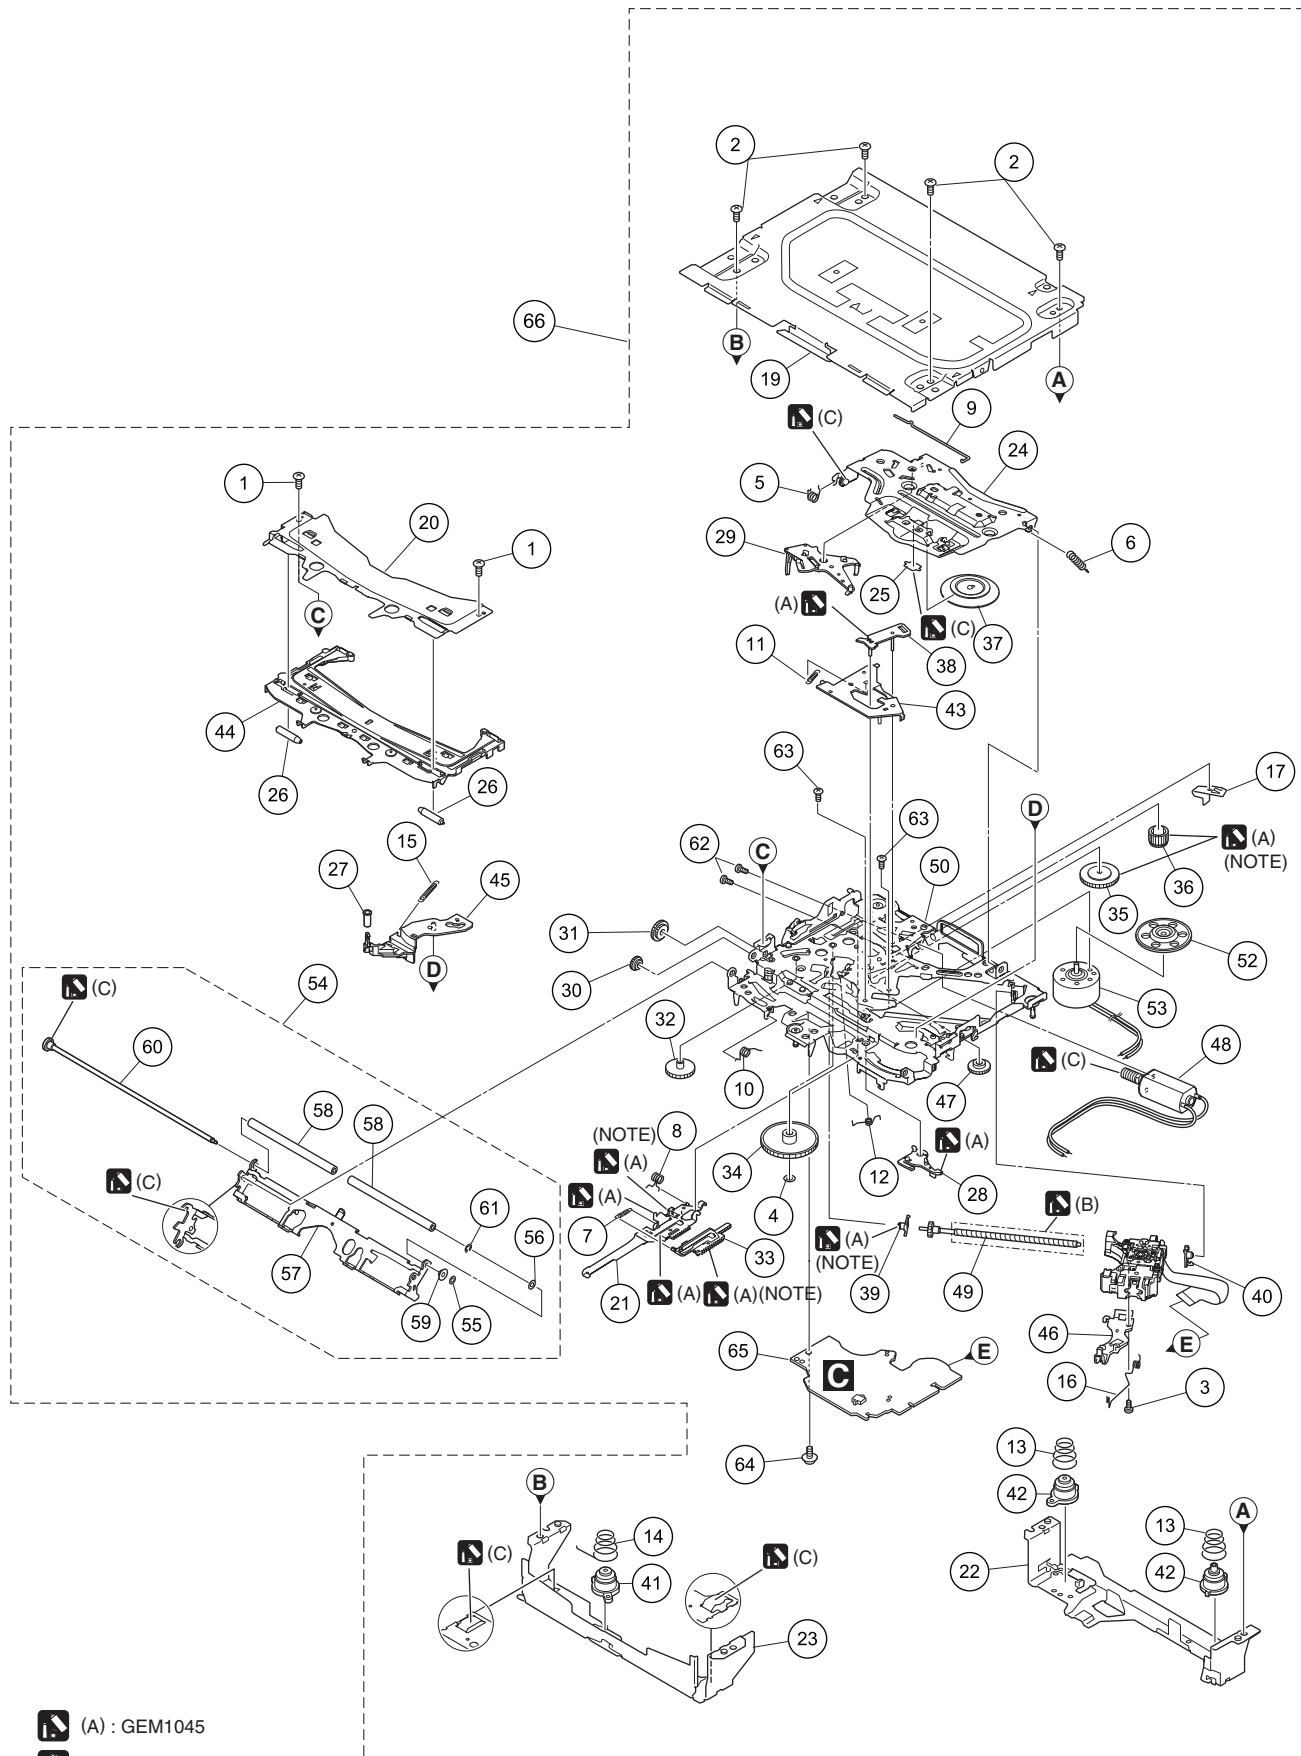

F

On this mechanism, Pickup and Spindle Motor can not be replaced at the service site, because a special facility is required for the adjustment after replacing them.
So, if Pickup or Spindle Motor is defective, replace the Mechanism Unit.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.
Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by μ instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVH-X5500BHS/XNUC	
B:AVH-X5500BT/XNEW5	
C:AVH-X5550BT/XNRC	
D:AVH-X5550BT/XNRD	
E:AVH-X5550BT/XNRI	
F:AVH-X5590BT/XNID	
Unit Number : CXX4970(A)	
Unit Number : CXX4969(B)	
Unit Number : CXX4972(C)	
Unit Number : CXX4973(D)	
Unit Number : CXX4974(E)	
Unit Number : CXX4975(F)	
Unit Name : Service Unit(Mother I/F)	
Unit Number : YWX5032	
Unit Name : DVD Core Unit	
Unit Number : CXX4997	
Unit Name : Service Unit(Monitor)	
Unit Number : CXX5005	
Unit Name : Service Unit(Key)	
Unit Number : EXX2001	
Unit Name : PCB Unit(Service)	

Service Unit(Mother I/F)

Consists of

Mother PCB

Interface PCB

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A B	
Unit Number : CXX4970(A)	
Unit Number : CXX4969(B)	
Unit Number : CXX4972(C)	
Unit Number : CXX4973(D)	
Unit Number : CXX4974(E)	
Unit Number : CXX4975(F)	
Unit Name : Service Unit(Mother I/F)	

MISCELLANEOUS

IC 101	(B,132,74) IC	AK4223VQ
IC 251	(B,119,96) IC	PML020A
IC 301	(A,112,107) IC	TPD1052F
IC 341	(A,97,121) IC	PA2030A
IC 501	(A,40,78) IC	TDA7706
IC 601	(A,56,55) IC(A)	PDB091A8
	(A,56,55) IC(B,C,D,E,F)	PDB094A8
IC 751	(A,132,69) Logic IC	TC7USB221FT
IC 1001	(B,89,68) IC	BH7673G
IC 1002	(B,86,68) IC	BH7673G
IC 1003	(B,80,68) IC	BH7673G
IC 1004	(B,77,68) IC	BH7673G
IC 1051	(B,82,41) LSI	ML86V7675TBZ03A
IC 1101	(B,123,41) IC	M12L128168A-5TG2N
IC 1151	(B,104,49) IC	WM8761BGED
IC 1202	(B,105,40) IC	337S3959
IC 1251	(B,146,54)Flash ROM Unit(Service) (A,C)	CXX4926
	(B,146,54)Flash ROM Unit(Service) (B,D,E,F)	CXX4927
IC 1301	(B,96,22)Serial Flash Memory	MX25L8006EM2I-12G
IC 1302	(A,107,42) IC	R5S72690RW266FP
IC 1671	(A,150,18) IC	WM8761BGED
IC 1721	(A,126,100) IC	NJM4558V
IC 1731	(A,128,112) IC	NJM4558V
IC 1741	(B,119,79) IC(A)	TC7SH126FU
IC 1751	(B,63,69) L-MOS And Gate(A)	TC7SET08FUS1
IC 1801	(B,60,83) Regulator IC	NJW4181U3-33B
IC 1821	(A,91,101) IC	NJM2387ADL3
IC 1901	(B,33,53) IC	NJM2886DL3-05

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

IC 1911 (B,26,31) IC(A) NJM2886DL3-33
 IC 1921 (B,25,49) Regulator IC(A) S-1172B12-E6
 IC 1951 (B,158,68) IC AN33012UA
 IC 2011 (B,116,15) Regulator IC BD001A5WEFJ
 IC 2031 (B,78,24) Regulator IC NJM2878F3-15
 IC 2061 (B,163,11) Regulator IC NJM2856DL3-18
 IC 2101 (B,164,96) Regulator IC BD9876EFJ
 IC 2161 (B,165,108) IC AN33014UA
 Q 302 (A,108,113) Transistor LTC014YEB

D 1662 (B,130,22) Diode DZ2S068C
 D 1663 (B,129,11) Diode DZ2S068C
 D 1721 (A,137,101) Diode RKZ4.7KG(B2)
 D 1781 (B,56,35) Diode DZ2S068C
 D 1782 (B,58,33) Diode DZ2S068C
 D 1801 (B,66,83) Diode 1SR154-400
 D 1851 (A,101,88) Diode HZU13(B1)
 D 1902 (B,38,42) Diode CRG03
 D 1903 (B,84,91) Diode(A) RKZ16KG(B2)

Q 311 (B,90,103) Transistor RN4987
 Q 321 (B,87,107) Chip Transistor RN1903
 Q 331 (A,84,108) Chip Transistor RN4982
 Q 601 (A,71,48) Transistor LSCR523UB
 Q 751 (B,65,18) Chip Transistor HN1C01FU

D 1921 (B,29,42) Diode(A) CRG03
 D 1951 (A,161,63) Diode RB056L-40
 D 1952 (A,153,59) Diode RB056L-40
 D 1953 (A,140,109) Diode RSX201L-30
 D 1954 (A,140,113) Diode RSX201L-30

Q 752 (B,61,18) Chip Transistor RN4982
 Q 831 (B,65,77) Transistor LTC014EEB
 Q 841 (B,67,73) Transistor LTC014EEB
 Q 854 (A,53,98) Chip Transistor HN1A01FU
 Q 871 (A,56,78) Chip Transistor HN1C01FU

D 2101 (A,164,94) Diode RB056L-40
 D 2131 (B,42,21) Diode RKZ6.2KG(B2)
 D 2161 (B,163,102) Diode DB2X41400
 D 2162 (B,154,105) Diode RSX201L-30

Q 1001 (B,82,58) Transistor LSCR523UB
 Q 1002 (B,85,58) Transistor LSCR523UB
 Q 1003 (B,88,58) Transistor LSCR523UB
 Q 1004 (B,78,58) Transistor LSCR523UB
 Q 1201 (B,110,32) Transistor LSAR523UB

D 3641 (B,77,37) Diode DZ2S068C
 D 3642 (B,62,37) Diode DZ2S068C
 D 3643 (B,77,41) Diode DZ2S068C
 L 501 (A,46,91) Chip Coil LCTAWR15J2520

Q 1631 (A,36,113) Chip Transistor HN1C03FU
 Q 1632 (A,43,113) Chip Transistor HN1C03FU
 Q 1633 (A,30,113) Chip Transistor HN1C03FU
 Q 1662 (B,128,14) Transistor RN4984
 Q 1701 (A,135,105) Transistor UMF23N

L 502 (A,43,90) Chip Coil LCTAWR27J2520
 L 503 (A,40,90) Inductor CTF1786
 L 504 (A,38,89) SMD Ferrite Beads CTF1806
 L 505 (A,34,95) Inductor CTF1389
 L 506 (A,43,88) Inductor CTF1794

Q 1721 (A,136,97) Transistor LSCR523UB
 Q 1851 (A,98,87) Transistor LSCR523UB
 Q 1852 (A,102,79) Chip Transistor HN1B04FU
 Q 1853 (A,100,75) Chip Transistor RN4982
 Q 1856 (A,99,82) Chip Transistor RN1907

L 507 (A,32,89) Inductor LCYC220K1608
 L 508 (A,32,85) Inductor(A,D) LCYB68NJ1005
 L 509 (A,29,79) Chip Coil LCTAW470J2520
 L 510 (A,31,75) Inductor CTF1786
 L 511 (A,35,70) Inductor(B,C,D,E,F) CTF1786
 L 512 (A,50,83) Inductor CTF1786

Q 1901 (B,94,94) Transistor(A) 2SB1132
 Q 1902 (B,93,85) Transistor(A) LTC014EEB
 Q 1903 (B,87,94) Transistor(A) 2SD1664
 Q 1951 (A,163,70) FET SFT1342
 Q 1952 (A,153,67) FET SFT1342

L 513 (A,51,83) Inductor CTF1786
 L 514 (A,44,68) Inductor CTF1786
 L 517 (A,50,71) Inductor CTF1786
 L 518 (A,35,68) Inductor(A) CTF1786
 L 519 (A,33,93) Inductor LCYB10NJ1608

Q 2131 (B,39,15) Transistor 2SD1760F5
 Q 2132 (B,37,20) Transistor LTC014EEB
 D 303 (A,113,113) Diode CRG03
 D 304 (A,109,111) Diode CRG03
 D 312 (B,90,100) Diode DA2J101

L 801 (A,63,92) Choke Coil 600 uH CTH1221
 L 1001 (B,87,62) Inductor CTF1545
 L 1002 (B,80,62) Inductor CTF1545
 L 1003 (B,76,62) Inductor CTF1545
 L 1004 (B,83,62) Inductor CTF1545

D 501 (A,46,95) Diode RN731VN
 D 502 (A,46,88) Diode RN731VN
 D 801 (B,64,122) Diode 1SR154-400
 D 802 (B,60,122) Diode 1SR154-400
 D 821 (A,48,101) Diode DAN202UM

L 1005 (B,96,68) Chip Coil LCTAW100J2520
 L 1051 (B,77,34) Inductor CTF1740
 L 1101 (B,135,43) Inductor CTF1786
 L 1107 (B,119,50) Inductor CTF1645
 L 1151 (B,106,55) Inductor CTF1786

D 831 (B,63,76) Diode RKZ5.6KG(B2)
 D 841 (B,70,76) Diode DA2J101
 D 853 (A,51,102) Diode DAN202UM
 D 871 (B,63,103) Diode HZU7L(A1)
 D 873 (B,67,101) Diode HZU7L(C3)

L 1251 (B,138,55) Inductor CTF1786
 L 1301 (B,109,44) Inductor CTF1786
 L 1302 (B,110,57) Inductor CTF1545
 L 1303 (B,108,21) Chip Beads VTL1129
 L 1304 (B,138,43) Chip Beads VTL1129

D 1601 (A,153,108) Diode EZAEG2A50AX
 D 1602 (A,150,108) Diode EZAEG2A50AX
 D 1622 (B,123,112) Diode DZ2S068C
 D 1623 (B,134,111) Diode DZ2S068C
 D 1624 (B,140,110) Diode DZ2S068C

L 1305 (A,127,37) Chip Beads VTL1126
 L 1306 (A,86,34) Chip Beads VTL1127
 L 1311 (A,124,29) Chip Beads VTL1127
 L 1312 (A,126,32) Chip Beads VTL1127
 L 1313 (A,124,35) Chip Beads VTL1127

D 1661 (B,125,12) Diode RKZ3.9KG(B2)

L 1315 (A,125,41) Chip Beads VTL1127
 L 1316 (A,124,43) Chip Beads VTL1127

1

2

3

4

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
L 1317	(A,125,42)	Chip Beads	VTL1127			JA451	(A,14,111)	Antenna Jack	YKS5041		
L 1318	(A,125,46)	Chip Beads	VTL1127			JA801	(A,62,118)	Plug	CKM1376		
L 1319	(A,125,49)	Chip Beads	VTL1127			JA1601	(A,151,121)	USB Jack	CKN1091		
						JA1621	(A,129,121)	RCA Jack	CKB1102		A
L 1322	(A,125,54)	Chip Beads	VTL1127			JA1631	(A,35,120)	Pin Jack	XKB7001		
L 1323	(A,125,58)	Chip Beads	VTL1127								
L 1377	(A,86,30)	Chip Beads	VTL1126			JA1661	(A,138,10)	Jack	CKS6437		
L 1381	(A,87,54)	Chip Beads	VTL1126			JA3621	(A,13,33)	RCA Jack	CKB1106		
L 1383	(A,83,54)	Chip Beads	VTL1126			JA3641	(A,69,19)	Mini Jack	AKN1073		
						JA3691	(A,131,26)	Jack	CKN1040		
L 1384	(A,85,52)	Chip Beads	VTL1126			JA3701	(A,164,22)	Connector(A)	CKS3806		
L 1387	(A,87,46)	Chip Beads	VTL1126								
L 1390	(A,83,46)	Chip Beads	VTL1126			JA3731	(A,145,28)	Jack	CKS6437		
L 1391	(A,87,45)	Chip Beads	VTL1126								
L 1393	(A,83,44)	Chip Beads	VTL1126								
						RESISTORS					
L 1394	(A,87,44)	Chip Beads	VTL1126			R 101	(B,122,71)		RAB4CQ101J		B
L 1397	(A,83,43)	Chip Beads	VTL1126			R 102	(B,122,74)		RAB4CQ101J		
L 1399	(A,87,43)	Chip Beads	VTL1126			R 104	(B,125,80)		RS1/16SS75R0F		
L 1401	(A,87,42)	Chip Beads	VTL1126			R 105	(B,125,81)		RS1/16SS75R0F		
L 1403	(A,84,41)	Chip Beads	VTL1126			R 108	(B,141,66)		RS1/10SR560J		
L 1405	(A,87,40)	Chip Beads	VTL1126			R 109	(B,143,74)		RAB4CQ101J		
L 1407	(A,84,39)	Chip Beads	VTL1126			R 110	(B,143,79)		RAB4CQ101J		
L 1409	(A,87,38)	Chip Beads	VTL1126			R 112	(B,129,63)		RS1/16SS101J		
L 1411	(A,87,37)	Chip Beads	VTL1126			R 113	(B,132,64)		RS1/16SS101J		
L 1413	(A,87,36)	Chip Beads	VTL1126			R 114	(B,133,64)		RS1/16SS101J		
L 1415	(A,86,35)	Chip Beads	VTL1126			R 115	(B,136,63)		RS1/16SS101J		
L 1601	(A,151,106)	Inductor	CTF1713			R 116	(B,131,64)		RS1/16SS101J		C
L 1671	(A,160,22)	Inductor	CTF1786			R 117	(B,135,64)		RS1/16SS101J		
L 1672	(A,143,16)	Inductor	CTF1786			R 119	(B,144,67)		RS1/10SR560J		
L 1951	(A,164,55)	Choke Coil 10 uH	CTH1446			R 120	(B,143,69)		RS1/10SR560J		
L 1952	(A,151,54)	Inductor	CTH1519			R 121	(B,144,71)		RS1/10SR560J		
L 1953	(A,144,102)	Choke Coil 10 uH	CTH1486			R 202	(B,129,102)		RS1/16SS182J		
L 2101	(A,158,94)	Inductor	CTH1524			R 255	(B,124,88)		RS1/16SS473J		
L 2161	(A,164,102)	Inductor	CTH1524			R 256	(A,102,108)		RS1/8SQ272J		
L 2162	(B,167,102)	Inductor	CTF1793			R 257	(A,98,108)		RS1/8SQ272J		
X 501	(A,52,75)	Resonator 36.480 MHz	CSS1805			R 258	(A,100,108)		RS1/8SQ182J		
X 601	(A,71,56)	Crystal Resonator 12.500 MHz	CSS1839			R 259	(A,96,108)		RS1/8SQ182J		
X 1051	(B,71,34)	Crystal Resonator 32.000 MHz	CSS1818			R 260	(A,104,107)		RS1/8SQ182J		D
X 1301	(A,102,65)	Resonator 48.000 MHz	CSS1760			R 261	(A,92,108)		RS1/8SQ182J		
X 1302	(A,113,65)	Crystal Resonator 13.333 33 MHz	CSS1840			R 262	(A,105,110)		RS1/8SQ272J		
X 1303	(A,86,50)	Resonator 16.93 MHz	CSS1794			R 263	(A,94,108)		RS1/8SQ272J		
P 451	(A,21,96)	Surge Absorber	IMSA-6803-01Y900			R 264	(B,102,93)		RS1/16SS0R0J		
P 1623	(B,130,108)	Poly Switch	FSMD075-24R			R 305	(A,110,113)		RS1/16SS103J		
P 1631	(B,28,109)	Poly Switch	FSMD075-24R			R 306	(A,66,43)		RS1/16SS103J		
P 1701	(A,121,77)	Poly Switch	FSMD075-24R			R 312	(B,89,98)		RS1/16SS102J		
⚠ P1901	(B,86,97)	Fuse 0.75 A(A)	CEK1380			R 322	(B,85,108)		RS1/16SS221J		
⚠ P1951	(A,45,37)	Fuse 1.0 A	CEK1381			R 323	(B,83,105)		RS1/16SS103J		
⚠ P2071	(A,145,38)	Fuse 1.25 A	CEK1382			R 331	(A,83,105)		RS1/16SS103J		
⚠ P2081	(A,23,20)	Fuse 0.75 A	CEK1380			R 332	(A,83,110)		RS1/16SS473J		E
⚠ P2131	(A,43,25)	Fuse 2.0 A	CEK1384			R 401	(A,19,36) (A)		RAB4CQ0R0J		
⚠ P2151	(A,46,25)	Fuse 2.5 A	CEK1385			R 402	(A,19,50) (A)		RAB4CQ0R0J		
⚠ P2152	(A,49,27)	Fuse 1.5 A	CEK1383			R 403	(A,25,25) (A)		RAB4CQ0R0J		
BZ3631	(A,45,44)	Buzzer	CPV1062			R 405	(A,25,58) (A)		RS1/16SS0R0J		
U 401	(A,13,59)	WWR C-TUN Unit(A)	CWE2364			R 406	(A,25,57) (A)		RS1/16SS0R0J		
U 1671	(A,161,31)	BT Module	CWX4306			R 407	(A,25,59) (A)		RS1/16SS0R0J		
CN751	(A,63,14)	Connector	CKS6025			R 410	(B,22,41) (A)		RS1/16SS102J		
CN1651	(B,25,12)	Connector	CKS6095			R 452	(A,9,95)		RS1/10SR0R0J		
CN1671	(A,161,31)	Connector	CKS6346			R 454	(B,49,84) (B,C,D,E,F)		RS1/8SQ0R0J		
CN1701	(A,119,86)	Connector	CKS6535			R 455	(B,35,85) (A)		RS1/10SR0R0J		F
CN1751	(A,67,27)	Connector	CKS6536			R 456	(A,8,74)		RS1/10SR0R0J		
CN3601	(B,119,49)	Connector	CKS6429			R 457	(B,22,96)		RS1/10SR0R0J		
CN3661	(A,111,25)	Connector	CKS4497								

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 501	(A,42,68) (A)	RS1/16SS221J	R 647	(A,68,64)	RS1/16SS104J
	R 519	(A,47,86)	RS1/16SS221J	R 648	(A,68,63)	RS1/16SS121J
	R 520	(A,31,94)	RS1/16SS105J			
	R 521	(A,47,87)	RS1/16SS751J	R 652	(A,73,48)	RS1/16SS473J
	R 522	(A,32,87)	RS1/16SS152J	R 653	(A,68,48)	RS1/16SS471J
B	R 523	(A,33,85)	RS1/16SS105J	R 654	(A,68,49)	RS1/16SS471J
	R 524	(A,31,85) (B,C,E,F)	RS1/16SS0R0J	R 655	(A,71,51)	RS1/16SS472J
	R 525	(A,29,82)	RS1/16SS471J	R 656	(B,60,51)	RS1/16SS681J
	R 526	(A,31,81)	RS1/16SS330J			
	R 527	(A,31,79)	RS1/16SS681J	R 658	(B,68,59)	RS1/16SS104J
C	R 528	(A,28,71)	RS1/4SA5R6J	R 659	(A,67,66)	RS1/16SS0R0J
	R 529	(A,26,72)	RS1/4SA5R6J	R 660	(A,67,67)	RS1/16SS0R0J
	R 530	(A,26,75)	RS1/4SA5R6J	R 661	(A,67,68)	RS1/16SS0R0J
	R 531	(A,41,68) (A)	RS1/16SS0R0J	R 662	(A,67,69)	RS1/16SS0R0J
	R 532	(A,40,66) (A)	RS1/16SS0R0J			
D	R 533	(A,40,68) (A)	RS1/16SS0R0J	R 663	(A,61,69)	RS1/16SS473J
	R 534	(A,39,66) (A)	RS1/16SS0R0J	R 664	(A,59,69)	RS1/16SS103J
	R 535	(A,39,68) (A)	RS1/16SS0R0J	R 665	(B,54,67)	RS1/16SS0R0J
	R 536	(A,38,66) (A)	RS1/16SS0R0J	R 666	(A,59,72)	RS1/16SS104J
	R 537	(A,37,68) (A)	RS1/16SS0R0J	R 667	(A,58,69)	RS1/16SS103J
E	R 538	(A,37,66) (A)	RS1/16SS0R0J			
	R 539	(A,33,73)	RS1/16SS102J	R 668	(B,56,67)	RS1/16SS102J
	R 540	(A,48,77)	RS1/16SS0R0J	R 669	(A,56,67) (A)	RS1/16SS471J
	R 601	(B,51,41) (B,C,D)	RS1/16SS104J	R 672	(A,56,70) (A)	RS1/16SS473J
	R 602	(B,49,41) (E,F)	RS1/16SS104J	R 673	(A,56,73)	RS1/16SS473J
F	R 603	(B,51,40) (B,E,F)	RS1/16SS104J	R 677	(A,51,68)	RS1/16SS473J
	R 604	(B,49,40) (C,D)	RS1/16SS104J			
	R 605	(B,51,39) (B,C,E)	RS1/16SS104J	R 678	(A,51,67)	RS1/16SS473J
	R 606	(B,49,39) (D,F)	RS1/16SS104J	R 679	(B,57,41) (A)	RS1/16SS0R0J
	R 608	(B,49,37) (B,C,D,E,F)	RS1/16SS104J	R 680	(B,60,63) (A)	RS1/16SS0R0J
G	R 609	(B,51,36)	RS1/16SS104J	R 681	(A,44,44)	RS1/16SS221J
	R 611	(B,51,45)	RS1/16SS103J	R 682	(B,43,44)	RS1/16SS221J
	R 612	(B,55,50)	RS1/16SS221J			
	R 613	(B,61,40)	RS1/16SS472J	R 683	(A,43,44)	RS1/16SS221J
	R 614	(B,63,40)	RS1/16SS471J	R 684	(B,47,44)	RS1/16SS221J
H	R 615	(B,64,40)	RS1/16SS472J	R 685	(B,45,44)	RS1/16SS221J
	R 616	(B,62,40)	RS1/16SS471J	R 686	(B,44,44)	RS1/16SS221J
	R 617	(B,55,45)	RS1/16SS104J	R 687	(B,50,53)	RS1/16SS104J
	R 618	(B,55,44)	RS1/16SS104J			
	R 619	(A,59,66)	RS1/16SS102J	R 688	(A,44,56)	RS1/16SS473J
I	R 620	(B,50,45)	RS1/16SS103J	R 689	(A,43,61)	RS1/16SS473J
	R 621	(B,66,61)	RS1/16SS473J	R 690	(B,46,62)	RS1/16SS272J
	R 622	(A,55,42)	RS1/16SS101J	R 691	(B,46,60)	RS1/16SS102J
	R 623	(B,61,44)	RS1/16SS104J	R 692	(B,53,46)	RS1/16SS104J
	R 624	(B,61,45)	RS1/16SS103J			
J	R 626	(B,58,45)	RS1/16SS0R0J	R 698	(B,42,44)	RS1/16SS473J
	R 627	(B,62,45)	RS1/16SS473J	R 699	(A,45,44)	RS1/16SS104J
	R 629	(A,69,56)	RS1/16SS0R0J	R 700	(B,54,50)	RS1/16SS221J
	R 630	(A,69,45)	RS1/16SS473J	R 701	(A,68,61)	RS1/16SS473J
	R 631	(A,70,46)	RS1/16SS104J	R 702	(A,66,71) (A)	RS1/16SS0R0J
K	R 632	(A,70,50)	RS1/16SS473J			
	R 633	(A,68,50)	RS1/16SS102J	R 705	(B,48,62)	RS1/16SS822J
	R 634	(B,64,45)	RS1/16SS473J	R 707	(B,50,50)	RS1/16SS104J
	R 635	(B,59,42)	RS1/16SS273J	R 750	(A,134,64)	RS1/10SR0R0J
	R 636	(A,68,52)	RS1/16SS472J	R 751	(B,59,23)	RAB4CQ221J
L	R 637	(A,68,53)	RS1/16SS472J	R 752	(B,58,18)	RS1/16SS471J
	R 638	(A,63,69)	RS1/16SS102J			
	R 642	(B,65,52)	RS1/16SS473J	R 753	(B,58,19)	RS1/16SS102J
	R 644	(A,70,53)	RS1/16SS102J	R 754	(B,68,18)	RS1/16SS0R0J
	R 645	(B,66,60)	RS1/16SS102J	R 757	(B,64,16)	RS1/16SS472J
M	R 646	(A,68,62)	RS1/16SS121J	R 758	(B,66,16)	RS1/16SS472J
				R 759	(B,61,16)	RS1/16SS102J
				R 821	(A,45,101)	RS1/16SS153J
				R 832	(B,65,75)	RS1/16SS104J
N				R 833	(B,59,75)	RS1/16SS103J
				R 834	(B,55,103)	RS1/4SA102J
				R 841	(B,69,75)	RS1/16SS103J
				R 842	(B,72,79)	RS1/4SA102J
O				R 861	(A,44,63)	RS1/16SS473J
				R 863	(A,50,98)	RS1/16SS223J

1

2

3

4

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 864	(A,55,97)	RS1/16SS473J		R 1151	(B,98,52)	RS1/16SS821J	
R 865	(A,49,98)	RS1/16SS473J		R 1152	(B,109,52)	RS1/16SS821J	
R 866	(A,51,105)	RS1/16SS103J		R 1201	(B,107,41)	RS1/16SS222J	
R 867	(A,43,63)	RS1/16SS102J		R 1202	(B,109,37)	RS1/16SS183J	
R 868	(B,43,66)	RS1/16SS102J		R 1203	(B,104,42)	RS1/16SS222J	
R 873	(B,66,103)	RS1/16SS103J		R 1205	(B,108,41)	RS1/16SS101J	
R 874	(B,65,103)	RS1/16SS473J		R 1206	(B,104,43)	RS1/16SS101J	
R 875	(B,60,103)	RS1/16SS472J		R 1209	(B,109,41)	RS1/16SS221J	
R 878	(B,62,101)	RS1/16SS104J		R 1251	(A,126,50)	RS1/16SS220J	
R 879	(B,64,101)	RS1/16SS473J		R 1252	(A,130,52)	RS1/16SS470J	
R 880	(B,55,100)	RS1/4SA102J		R 1253	(B,76,30)	RS1/16SS0R0J	
R 1009	(B,78,64)	RS1/16SS101J		R 1256	(B,75,30)	RS1/16SS0R0J	
R 1010	(B,81,64)	RS1/16SS101J		R 1257	(A,128,52)	RS1/16SS470J	
R 1011	(B,90,63)	RS1/16SS101J		R 1258	(A,130,49)	RS1/16SS470J	
R 1012	(B,86,64)	RS1/16SS101J		R 1259	(A,129,56)	RS1/16SS470J	
R 1013	(B,83,69)	RS1/10SR101J		R 1260	(B,139,57)	RS1/16SS470J	
R 1051	(B,71,49)	RS1/16SS750J		R 1302	(A,97,22)	RS1/16SS273J	
R 1052	(B,69,40)	RS1/10SR0R0J		R 1303	(B,107,44)	RS1/16SS0R0J	
R 1053	(A,76,40)	RS1/16SS472J		R 1305	(A,106,21)	RS1/16SS121J	
R 1054	(B,92,40)	RS1/16SS473J		R 1306	(A,106,19)	RS1/16SS104J	
R 1055	(B,71,39)	RS1/16SS101J		R 1307	(B,123,27)	RS1/16SS473J	
R 1056	(B,71,38)	RS1/16SS101J		R 1310	(B,102,32)	RS1/16SS101J	
R 1057	(B,92,39)	RS1/16SS561J		R 1311	(B,120,28)	RS1/16SS472J	
R 1058	(B,74,36)	RS1/16SS105J		R 1312	(B,121,29)	RS1/16SS472J	
R 1059	(B,72,37)	RS1/16SS471J		R 1313	(B,118,28)	RS1/16SS472J	
R 1060	(B,82,30)	RS1/16SS391J		R 1314	(A,124,31)	RS1/16SS472J	
R 1061	(B,83,30)	RS1/16SS391J		R 1315	(B,119,28)	RS1/16SS472J	
R 1062	(B,83,32)	RS1/16SS391J		R 1316	(B,117,28)	RS1/16SS472J	
R 1063	(B,84,30)	RS1/16SS391J		R 1318	(B,110,51)	RS1/16SS104J	
R 1064	(B,85,30)	RS1/16SS391J		R 1319	(A,128,43)	RS1/16SS104J	
R 1065	(B,86,31)	RS1/16SS391J		R 1320	(A,126,52)	RS1/16SS104J	
R 1066	(B,88,31)	RS1/16SS391J		R 1321	(A,126,56)	RS1/16SS104J	
R 1067	(B,86,32)	RS1/16SS391J		R 1322	(A,128,51)	RS1/16SS473J	
R 1068	(B,88,32)	RS1/16SS221J		R 1323	(A,118,61)	RS1/16SS101J	
R 1069	(B,87,34)	RS1/16SS221J		R 1324	(A,123,57)	RS1/16SS104J	
R 1070	(B,89,34)	RS1/16SS561J		R 1325	(A,100,59)	RS1/16SS2402F	
R 1071	(B,74,33)	RS1/16SS473J		R 1326	(A,103,61)	RS1/16SS681J	
R 1072	(B,81,30)	RS1/16SS101J		R 1327	(B,105,60)	RS1/16SS5601F	
R 1073	(B,77,33)	RS1/16SS101J		R 1328	(A,112,62)	RS1/16SS222J	
R 1074	(B,69,39)	RS1/16SS222J		R 1329	(B,113,57)	RS1/16SS473J	
R 1075	(B,69,37)	RS1/16SS222J		R 1330	(B,114,57)	RS1/16SS473J	
R 1076	(B,72,26)	RS1/10SR0R0J		R 1331	(A,106,64)	RS1/16SS103J	
R 1077	(B,70,26)	RS1/10SR0R0J		R 1332	(A,106,65)	RS1/16SS101J	
R 1080	(B,73,49)	RS1/16SS0R0J		R 1333	(B,118,58)	RS1/16SS473J	
R 1081	(B,87,54)	RS1/16SS750J		R 1334	(A,114,62)	RS1/16SS473J	
R 1082	(B,84,54)	RS1/16SS750J		R 1335	(B,99,28)	RS1/16SS0R0J	
R 1083	(B,69,26)	RS1/10SR0R0J		R 1337	(A,96,23)	RS1/16SS101J	
R 1084	(B,81,54)	RS1/16SS750J		R 1338	(A,109,64)	RS1/16SS104J	
R 1085	(B,78,55)	RS1/16SS750J		R 1339	(A,98,65)	RS1/16SS273J	
R 1101	(B,128,29)	RAB4CQ221J		R 1340	(A,93,66)	RS1/16SS104J	
R 1102	(B,125,29)	RAB4CQ221J		R 1341	(A,126,46)	RS1/16SS104J	
R 1103	(B,120,33)	RAB4CQ471J		R 1344	(B,119,53)	RS1/16SS150J	
R 1104	(B,116,33)	RAB4CQ471J		R 1345	(B,103,29)	RS1/16SS473J	
R 1105	(B,113,33)	RAB4CQ471J		R 1347	(A,129,46)	RS1/16SS0R0J	
R 1106	(B,122,50)	RS1/16SS471J		R 1348	(A,94,25)	RS1/16SS101J	
R 1108	(B,130,52)	RAB4CQ221J		R 1349	(B,95,16)	RS1/16SS0R0J	
R 1109	(B,126,52)	RAB4CQ221J		R 1350	(A,90,50)	RS1/16SS152J	
R 1110	(B,115,51)	RAB4CQ471J		R 1351	(A,92,60)	RS1/16SS102J	
R 1111	(B,112,51)	RAB4CQ471J		R 1352	(A,90,66)	RAB4CQ473J	
R 1112	(B,118,51)	RS1/16SS471J		R 1353	(B,118,54)	RS1/16SS0R0J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1355 (B,115,55)
R 1356 (A,129,47)

RS1/16SS0R0J
RS1/16SS0R0J

R 1640 (A,43,109)
R 1641 (A,32,113)

RS1/16SS472J
RS1/16SS223J

A

R 1359 (A,128,49)
R 1360 (B,122,56)
R 1365 (A,91,24)
R 1376 (A,91,27)
R 1378 (A,88,28)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS331J
RS1/16SS0R0J
RS1/16SS0R0J

R 1642 (B,37,110)
R 1643 (B,41,110)
R 1644 (A,38,113)
R 1645 (A,30,111)
R 1646 (A,29,111)

RS1/16SS390J
RS1/16SS390J
RS1/16SS223J
RS1/16SS472J
RS1/16SS472J

■

R 1379 (A,87,32)
R 1380 (A,89,54)
R 1381 (A,88,26)
R 1382 (A,85,53)
R 1383 (A,117,61)

RS1/16SS0R0J
RS1/16SS101J
RS1/16SS0R0J
RS1/16SS101J
RS1/16SS101J

R 1647 (A,27,113)
R 1648 (B,35,110)
R 1651 (B,33,18)
R 1652 (B,32,18)
R 1653 (B,23,18)

RS1/16SS223J
RS1/16SS390J
RS1/16SS473J
RS1/16SS473J
RS1/16SS681J

B

R 1384 (A,120,61)
R 1385 (A,89,53)
R 1386 (A,88,46)
R 1387 (B,113,55)
R 1388 (A,84,46)

RS1/16SS102J
RS1/16SS101J
RS1/16SS101J
RS1/16SS472J
RS1/16SS101J

R 1663 (B,126,10)
R 1664 (B,130,13)
R 1674 (B,155,37)
R 1677 (A,151,34)
R 1678 (A,166,24)

RS1/16SS122J
RS1/16SS152J
RS1/16SS101J
RS1/16SS101J
RS1/16SS102J

■

R 1389 (A,88,45)
R 1391 (A,111,62)
R 1392 (A,84,44)
R 1393 (A,90,30)
R 1395 (A,88,44)

RS1/16SS101J
RS1/16SS102J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1679 (A,165,24)
R 1680 (B,165,25)
R 1683 (A,162,24)
R 1684 (A,146,13)
R 1685 (A,147,23)

RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J
RS1/16SS821J
RS1/16SS821J

C

R 1396 (A,85,43)
R 1398 (A,89,43)
R 1400 (A,89,42)
R 1402 (A,86,41)
R 1404 (A,89,40)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1686 (A,147,35)
R 1687 (A,147,34)
R 1690 (A,154,23)
R 1692 (A,160,24)
R 1693 (A,158,24)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

■

R 1406 (A,86,40)
R 1408 (A,89,38)
R 1410 (A,89,37)
R 1412 (A,89,36)
R 1414 (A,87,35)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1701 (A,138,104)
R 1702 (A,133,104)
R 1703 (A,133,105)
R 1711 (B,67,71) (A)
R 1712 (A,124,71) (A)

RS1/10SR222J
RS1/16SS562J
RS1/16SS332J
RS1/16SS0R0J
RS1/16SS471J

D

R 1416 (A,87,34)
R 1418 (A,126,39)
R 1419 (A,97,25)
R 1423 (A,113,23)
R 1424 (A,123,59)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS222J
RS1/16SS0R0J

R 1721 (A,122,98)
R 1722 (A,121,99)
R 1723 (A,121,101)
R 1724 (A,131,98)
R 1725 (A,132,98)

RS1/16SS153J
RS1/16SS153J
RS1/16SS153J
RS1/16SS153J
RS1/16SS153J

■

R 1425 (A,89,24)
R 1426 (A,91,26)
R 1427 (A,85,32)
R 1428 (A,130,46)
R 1429 (A,130,47)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 1726 (A,132,100)
R 1727 (A,123,97)
R 1729 (A,135,94)
R 1730 (A,134,98)
R 1731 (A,130,97)

RS1/16SS153J
RS1/16SS153J
RS1/16SS102J
RS1/16SS472J
RS1/16SS153J

E

R 1431 (A,100,61)
R 1432 (A,98,61)
R 1433 (A,98,64)
R 1434 (A,96,64)
R 1435 (A,91,63)

RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J

R 1732 (A,133,112)
R 1733 (A,124,107)
R 1734 (A,126,107)
R 1735 (A,125,115)
R 1736 (A,133,113)

RS1/16SS153J
RS1/16SS273J
RS1/16SS273J
RS1/16SS153J
RS1/16SS473J

■

R 1436 (B,92,54)
R 1621 (B,140,108)
R 1622 (B,134,106)
R 1623 (B,123,110)
R 1631 (B,45,110)

RS1/16SS104J
RS1/16SS750J
RS1/16SS223J
RS1/16SS223J
RS1/16SS390J

R 1737 (A,123,114)
R 1738 (A,124,115)
R 1739 (A,123,112)
R 1740 (A,123,107)
R 1763 (A,100,72)

RS1/16SS153J
RS1/16SS153J
RS1/16SS153J
RS1/16SS153J
RS1/16SS103J

F

R 1632 (A,45,113)
R 1633 (A,37,109)
R 1634 (A,34,113)
R 1635 (A,36,109)
R 1636 (B,39,110)

RS1/16SS223J
RS1/16SS472J
RS1/16SS223J
RS1/16SS472J
RS1/16SS390J

R 1764 (A,109,80)
R 1781 (B,64,26)
R 1782 (B,78,26)
R 1822 (A,88,96)
R 1823 (A,90,96)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS823J
RS1/16SS103J

R 1637 (B,43,110)
R 1638 (A,40,113)
R 1639 (A,42,109)

RS1/16SS390J
RS1/16SS223J
RS1/16SS472J

R 1824 (A,86,97)
R 1851 (A,100,86)
R 1852 (A,103,84)

RS1/16SS153J
RS1/16SS681J
RS1/16SS223J

1

2

3

4

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 1853	(A,103,83)	RS1/16SS274J		R 2174	(B,171,104)	RS1/16SS204J	
R 1854	(A,102,76)	RS1/16SS273J		R 2177	(B,166,113)	RS1/16SS0R0J	
				R 2178	(B,164,113)	RS1/16SS0R0J	
R 1856	(A,99,85)	RS1/16SS0R0J					
R 1857	(A,98,84)	RS1/16SS683J		R 3621	(B,29,35)	RS1/16SS750J	
R 1866	(A,101,83)	RS1/16SS100J		R 3641	(B,81,42)	RS1/16SS223J	
R 1868	(A,97,75)	RS1/16SS103J		R 3642	(B,61,40)	RS1/16SS223J	
R 1901	(A,94,75) (A)	RS1/16SS0R0J		R 3643	(B,86,38)	RS1/16SS750J	
R 1902	(A,93,76) (B,C,D,E,F)	RS1/16SS0R0J		R 3661	(B,108,39)	RAB4CQ750J	
R 1903	(B,32,33) (A)	RS1/10SR0R0J		R 3662	(B,114,33)	RS1/16SS223J	
R 1906	(B,90,95) (A)	RS1/16SS103J		R 3663	(B,113,32)	RS1/16SS223J	
R 1907	(B,91,89) (A)	RS1/4SA471J		R 3664	(B,113,27)	RS1/16SS562J	
R 1908	(B,93,89) (A)	RS1/4SA471J		R 3665	(A,115,41)	RS1/10SR102J	
R 1909	(B,96,91) (A)	RS1/16SS1003F		R 3666	(A,116,40)	RS1/10SR102J	
R 1910	(B,97,88) (A)	RS1/16SS1802D		R 3668	(A,121,38)	RS1/10SR471J	
R 1911	(B,86,90) (A)	RS1/16SS911J		R 3669	(A,122,39)	RS1/10SR471J	
R 1952	(B,149,66)	RS1/16SS561J		R 3677	(B,111,28)	RS1/16SS272J	
R 1953	(B,150,67)	RS1/16SS3302D		R 3678	(B,111,27)	RS1/16SS272J	
R 1954	(B,150,65)	RS1/16SS4301D		R 3701	(B,150,42) (A)	RS1/16SS471J	
R 1955	(B,150,64)	RS1/16SS3601D		R 3702	(B,151,40) (A)	RS1/16SS223J	
R 1956	(B,150,68)	RS1/16SS123J		R 3703	(B,150,44) (A)	RS1/16SS223J	
R 1957	(B,159,63)	RS1/16SS103J		R 3704	(B,152,39) (A)	RS1/16SS181J	
R 1959	(B,160,75) 0.011 ohm	CCN1341		R 3705	(B,150,47) (A)	RS1/16SS181J	
R 1960	(B,163,64)	RS1/16SS204J		R 3706	(A,152,35) (A)	RS1/10SR822J	
R 1961	(B,163,63)	RS1/16SS394J		R 3707	(A,153,37) (A)	RS1/10SR471J	
R 1962	(B,154,75) 0.012 ohm	CCN1321		R 3713	(A,153,34) (A)	RS1/16SS104J	
R 1963	(B,157,63)	RS1/16SS224J		R 3731	(B,136,46)	RS1/10SR102J	
R 1964	(B,165,67)	RS1/16SS472J		R 3732	(B,136,44)	RS1/10SR102J	
R 1965	(B,165,64)	RS1/16SS1101D					
				CAPACITORS			
R 1966	(B,167,64)	RS1/16SS3000D					
R 1967	(B,165,66)	RS1/16SS1002D		C 101	(B,125,69)	CKSSYB104K10	
R 1968	(B,167,66)	RS1/16SS511J		C 102	(B,125,70)	CKSSYB104K10	
R 2003	(B,145,39)	RS1/10SR0R0J		C 103	(B,125,71)	CKSSYB104K10	
R 2011	(B,111,14)	RS1/16SS472J		C 104	(B,125,72)	CKSSYB104K10	
				C 105	(B,125,73)	CKSSYB104K10	
R 2012	(B,112,13)	RS1/16SS223J					
R 2013	(B,112,15)	RS1/16SS473J		C 106	(B,125,74)	CKSSYB104K10	
R 2022	(B,82,18)	RS1/16SS0R0J		C 107	(B,125,75)	CKSSYB104K10	
R 2024	(B,81,19)	RS1/10SR0R0J		C 108	(B,125,76)	CKSSYB104K10	
R 2031	(B,79,22)	RS1/16SS102J		C 109	(B,125,79)	CKSSYB104K10	
				C 110	(B,127,81) 10 uF	CCG1192	
R 2052	(B,154,18)	RS1/16SS0R0J					
R 2101	(B,170,97)	RS1/16SS3601D		C 111	(B,126,83)	CKSSYB104K10	
R 2102	(B,168,97)	RS1/16SS4702D		C 112	(B,125,83)	CKSSYB104K10	
R 2103	(B,168,98)	RS1/16SS2202D		C 113	(B,128,66) 10 uF	CCG1192	
R 2104	(B,170,98)	RS1/16SS222J		C 114	(B,126,67)	CKSSYB104K10	
				C 115	(B,130,83)	CKSRYB104K16	
R 2105	(B,158,90)	RS1/8SQ0R0J					
R 2131	(A,40,15)	RS1/16SS473J		C 116	(B,130,81) 10 uF	CCG1192	
R 2132	(B,43,19)	RS1/10SR121J		C 117	(B,133,80)	CKSRYB104K16	
R 2133	(B,39,20)	RS1/16SS220J		C 118	(B,134,81) 10 uF	CCG1192	
R 2161	(A,156,110)	RS1/16SS102J		C 119	(B,140,70)	CKSRYB105K10	
				C 120	(B,140,71)	CKSRYB105K10	
R 2162	(A,156,111)	RS1/16SS102J					
R 2163	(A,156,108)	RS1/16SS102J		C 121	(B,140,73)	CKSRYB105K10	
R 2164	(B,171,113)	RS1/16SS224J		C 122	(B,140,74)	CKSRYB105K10	
R 2165	(B,171,110)	RS1/16SS4702D		C 123	(B,140,75)	CKSRYB105K10	
R 2166	(B,164,115)	RS1/16SS152J		C 124	(B,140,77)	CKSRYB105K10	
				C 125	(B,140,78)	CKSRYB105K10	
R 2167	(B,165,115)	RS1/16SS3302D					
R 2168	(B,166,115)	RS1/16SS8201D		C 126	(B,140,79)	CKSRYB105K10	
R 2169	(B,157,110)	RS1/16SS752J		C 127	(B,140,81)	CKSRYB105K10	
R 2170	(A,156,109)	RS1/16SS102J		C 128	(B,132,66)	CKSRYB105K10	
R 2171	(A,158,103) 0.056 ohm	ACN7160		C 129	(B,129,66)	CKSRYB105K10	
				C 130	(B,122,77)	CKSSYB104K10	
R 2172	(B,159,107)	RS1/16SS0R0J					
R 2173	(B,172,103)	RS1/16SS394J					

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 131 (B,125,77) CKSSYB104K10
 C 132 (B,133,66) CKSRYB105K10
 C 133 (B,136,65) CKSRYB105K10
 A C 134 (B,139,67) CKSRYB105K10
 C 135 (B,141,67) CKSRYB105K10

C 136 (B,140,69) CKSRYB105K10
 C 137 (B,131,66) CKSRYB105K10
 C 138 (B,135,66) CKSRYB105K10
 C 139 (B,134,83) CCSSCH102J50
 C 201 (B,129,103) CKSSYB332K50

C 203 (B,126,103) 2.2 uF CCG1218
 C 251 (B,116,107) CCSSCH100D50
 C 252 (B,110,94) CCSSCH101J50
 C 253 (B,113,103) CKSRYB105K10
 B C 254 (B,112,106) CCSQCH223J50

C 255 (B,114,106) CCSQCH223J50
 C 256 (B,116,105) CKSRYB105K10
 C 257 (B,117,105) CKSRYB105K10
 C 258 (B,119,105) (A) CKSRYB105K10
 C 259 (B,120,105) (A) CKSRYB105K10

C 260 (B,122,105) CKSRYB105K10
 C 261 (B,123,105) CKSRYB105K10
 C 262 (B,127,98) CCSSCH101J50
 C 263 (B,130,99) CKSRYB104K16
 C 264 (B,127,100) CKSRYB474K10

C 265 (B,135,98) 10 uF CCG1192
 C 266 (B,126,96) CCSSCH101J50
 C 267 (B,129,95) 10 uF CCG1192
 C 268 (B,119,87) CKSRYB105K10
 C 269 (B,113,87) CKSRYB105K10

C 270 (B,114,87) CKSRYB105K10
 C 271 (B,116,87) CKSRYB105K10
 C 272 (B,117,87) CKSRYB105K10
 C 273 (B,120,87) (A) CKSRYB105K10
 C 274 (B,122,87) (A) CKSRYB105K10

D C 275 (B,117,85) CCSSCH100D50
 C 276 (B,124,87) CKSSYB104K10
 C 277 (B,130,92) 10 uF CCG1192
 C 278 (B,108,100) CCSRCH102J50
 C 279 (B,111,101) CKSRYB105K10

C 280 (B,108,96) 10 uF CCG1236
 C 281 (B,111,95) CCSSCH101J50
 C 282 (B,105,93) CCSRCH102J50
 C 285 (B,107,92) 10 uF CCG1236
 C 286 (B,103,94) CKSSYB104K16

E C 287 (B,127,96) CCSSCH102J50
 C 289 (B,130,100) CCSSCH102J50
 C 302 (A,109,105) CKSRYB104K16
 C 304 (A,109,108) CKSRYB104K16
 C 305 (A,113,111) CKSRYB104K16

C 307 (B,74,123) CCSSCH101J50
 C 308 (B,74,122) CCSSCH100D50
 C 311 (A,85,89) Capacitor CEHVW101M16
 C 321 (B,83,107) CKSRYB105K16
 C 341 (A,95,111) 0.22 uF CCG1313

C 342 (A,92,111) 0.22 uF CCG1313
 F C 343 (A,102,112) 0.22 uF CCG1313
 C 344 (A,99,112) 0.22 uF CCG1313
 C 349 (A,105,112) 1 uF CCG1325
 C 350 (A,88,110) 10 uF/16 V CCH1998

C 352 (B,74,121) CKSRYB104K16
 C 401 (B,20,40) 10 uF(A) CCG1192
 C 402 (B,21,53) 10 uF(A) CCG1192
 C 454 (A,30,96) (A,D) CCSSCK2R0C50
 C 455 (A,23,96) (A,D) CCSSCJ3R0C50

C 456 (B,24,83) (A) CCSSCH5R0C50
 C 458 (B,35,88) (A,D) CCSSCH5R0C50
 C 459 (B,31,82) (A,D) CCSSCH4R0C50
 C 460 (B,33,82) (A,D) CCSSCH4R0C50
 C 461 (B,29,84) (A,D) CCSSCH4R0C50

C 509 (A,43,93) CCSSCH330J50
 C 510 (A,45,93) CCSSCH6R0D50
 C 512 (A,32,96) CKSRYB103K50
 C 513 (A,48,93) CKSSYB103K16
 C 514 (A,40,88) CKSSYB104K10

C 515 (A,37,87) CKSSYB104K10
 C 517 (A,48,90) CKSSYB103K16
 C 518 (A,46,85) CKSSYB103K16
 C 519 (A,39,87) CKSSYB104K10
 C 520 (A,33,90) (A,D) CCSSCJ3R0C50

C 521 (A,39,86) CKSSYB103K16
 C 522 (A,36,87) CKSSYB103K16
 C 523 (A,35,87) 10 uF CCG1192
 C 524 (A,33,86) CKSSYB223K16
 C 525 (A,41,90) CKSRYB105K10

C 527 (A,42,86) CKSSYB103K16
 C 529 (A,38,92) 10 uF CCG1192
 C 530 (A,30,83) 10 uF CCG1192
 C 531 (A,33,83) (A,D) CCSSCJ3R0C50
 C 538 (A,31,82) CKSSYB104K10

C 539 (A,29,81) CCSSCH101J50
 C 540 (A,35,85) CKSSYB104K10
 C 541 (A,28,81) CKSSYB103K16
 C 542 (A,32,79) CCSSCH820J50
 C 543 (A,31,76) (A,D) CKSSYB104K10

C 544 (A,30,73) 2.2 uF CCG1218
 C 545 (A,32,77) CCSSCH101J50
 C 547 (A,31,72) CKSSYB104K10
 C 548 (A,34,70) CKSSYB104K10
 C 549 (A,33,70) CKSSYB104K10

C 550 (A,29,75) CKSSYB104K10
 C 553 (A,32,72) (A,D) CCSSCH220J50
 C 554 (A,34,73) CKSSYB102K50
 C 555 (A,38,71) CKSSYB104K10
 C 556 (A,48,83) (A,D) CCSSCH220J50

C 557 (A,52,85) CKSRYB224K16
 C 558 (A,48,81) CKSSYB224K6R3
 C 559 (A,51,82) CKSRYB105K10
 C 560 (A,50,79) (A,D) CCSSCH100D50
 C 561 (A,52,80) (A,D) CCSSCH100D50

C 562 (A,53,80) CKSSYB472K25
 C 563 (A,51,79) CKSSYB472K25
 C 564 (A,52,78) CCSSCH100D50
 C 565 (A,48,78) CKSSYB104K10
 C 566 (A,52,73) CCSSCH100D50

C 568 (A,46,71) 2.2 uF CCG1218
 C 569 (A,46,72) (A,D) CCSRCH220J50
 C 570 (A,46,70) CKSSYB104K10
 C 571 (A,43,70) 2.2 uF CCG1218
 C 573 (A,44,71) CKSSYB104K10

5			6		7			8	
<u>Circuit Symbol and No.</u>			<u>Part No.</u>		<u>Circuit Symbol and No.</u>			<u>Part No.</u>	
C 574	(A,48,75)	(A,D)	CCSSCH220J50		C 1069	(B,90,37)		CKSSYB104K10	
C 601	(A,62,43)		CKSSYB104K10		C 1070	(B,73,35)		CCSSCH5R0C50	
C 602	(A,65,43)		CKSSYB104K10		C 1071	(B,68,35)		CCSSCH5R0C50	
C 603	(B,58,44)		CKSSYB331K50		C 1072	(B,74,29)	10 uF	CCG1192	
C 604	(A,63,68)		CKSSYB104K16		C 1073	(B,79,33)		CKSSYB104K10	
C 606	(A,71,54)		CCSSCH8R0D50						
C 607	(A,68,57)		CCSSCH100D50		C 1074	(B,81,33)		CKSSYB104K10	
C 608	(A,68,60)		CKSSYB104K10		C 1075	(B,74,32)		CKSSYB103K16	
C 610	(B,64,56)		CKSSYB104K10		C 1076	(B,71,29)	10 uF	CCG1192	
C 612	(B,65,59)		CKSSYB102K50		C 1078	(B,86,54)		CKSRYB105K10	
C 613	(A,44,54)		CKSSYB104K10		C 1079	(B,89,54)		CKSRYB105K10	
C 614	(A,57,73)		CKSSYB103K16		C 1080	(B,85,50)		CKSSYB103K16	
C 615	(A,57,74)	0.1 uF	CCG1321		C 1081	(B,85,49)		CKSSYB102K50	
C 619	(A,73,63)		CKSSYB105K6R3		C 1082	(B,83,54)		CKSRYB105K10	
C 620	(A,68,59)		CKSSYB105K6R3		C 1083	(B,79,55)		CKSRYB105K10	
C 621	(A,57,72)		CCSSCH102J50		C 1085	(B,76,34)	(A,D)	CCSSCH5R0C50	
C 751	(B,49,22)		CKSSYB104K10		C 1101	(B,135,38)		CKSSYB104K10	
C 753	(B,47,19)	10 uF	CCG1192		C 1102	(B,131,33)		CKSSYB104K10	
C 754	(B,52,17)	10 uF	CCG1192		C 1103	(B,127,33)		CKSSYB104K10	
C 756	(A,133,65)		CKSSYB104K10		C 1104	(B,123,33)		CKSSYB104K10	
C 801	(A,76,98)		XCEHAT332M16		C 1105	(B,110,38)		CKSSYB104K10	
C 821	(A,49,104)		CKSRYB104K50		C 1106	(B,129,49)		CKSSYB104K10	
C 831	(B,63,78)		CKSRYB104K50		C 1107	(B,125,49)		CKSSYB104K10	
C 841	(B,68,76)		CKSRYB105K10		C 1108	(B,120,49)		CCSSCH470J50	
C 861	(A,54,102)		CKSRYB104K50		C 1152	(B,98,49)	10 uF	CCG1192	
C 1001	(B,88,61)		CKSSYB104K10		C 1153	(B,104,55)		CKSSYB104K10	
C 1002	(B,85,61)		CKSSYB104K10		C 1154	(B,102,56)	10 uF	CCG1192	
C 1003	(B,81,61)		CKSSYB104K10		C 1155	(B,98,53)		CKSSYB182K50	
C 1004	(B,77,61)		CKSSYB104K10		C 1156	(B,109,54)		CKSSYB182K50	
C 1005	(B,89,65)		CKSSYB104K10		C 1201	(B,109,38)		CKSSYB104K10	
C 1006	(B,93,67)	10 uF	CCG1192		C 1202	(B,109,39)		CKSSYB102K50	
C 1007	(B,85,65)		CKSSYB104K10		C 1251	(B,139,53)		CKSSYB104K10	
C 1008	(B,80,65)		CKSSYB104K10		C 1301	(A,96,25)		CKSSYB104K16	
C 1009	(B,76,65)		CKSSYB104K10		C 1302	(A,100,25)		CKSSYB104K16	
C 1010	(B,90,71)		CKSRYB105K10		C 1303	(A,103,26)		CKSSYB104K16	
C 1011	(B,88,71)		CKSRYB105K10		C 1304	(A,106,25)		CKSSYB104K16	
C 1012	(B,86,71)		CKSRYB105K10		C 1305	(A,108,24)		CKSSYB104K16	
C 1013	(B,85,71)		CKSRYB105K10		C 1306	(A,110,25)		CKSSYB104K16	
C 1014	(B,83,72)		CKSRYB105K10		C 1307	(A,114,25)		CKSSYB104K16	
C 1015	(B,81,71)		CKSRYB105K10		C 1308	(A,117,25)		CKSSYB104K16	
C 1016	(B,79,71)		CKSRYB105K10		C 1309	(B,109,43)		CCSSCH470J50	
C 1017	(B,78,71)		CKSRYB105K10		C 1310	(A,124,30)		CKSSYB104K16	
C 1018	(B,76,71)		CKSRYB105K10		C 1311	(A,124,32)		CKSSYB104K16	
C 1051	(B,82,50)		CKSSYB474K6R3		C 1312	(A,124,34)		CKSSYB104K16	
C 1052	(B,83,50)		CKSSYB474K6R3		C 1313	(A,125,36)		CKSSYB104K16	
C 1053	(B,83,48)		CKSSYB474K6R3		C 1314	(A,124,38)		CKSSYB104K16	
C 1054	(B,79,50)		CKSSYB103K16		C 1315	(A,124,40)		CKSSYB104K16	
C 1055	(B,79,49)		CKSSYB102K50		C 1316	(A,124,41)		CKSSYB104K16	
C 1056	(B,81,50)		CKSSYB103K25		C 1317	(A,125,43)		CKSSYB104K16	
C 1057	(B,72,46)	10 uF	CCG1192		C 1318	(A,124,46)		CKSSYB104K16	
C 1058	(B,74,45)		CKSSYB102K50		C 1319	(A,124,49)		CKSSYB104K16	
C 1059	(B,90,45)		CKSSYB104K10		C 1320	(B,122,52)		CKSSYB104K16	
C 1060	(B,73,45)		CKSSYB103K16		C 1321	(B,122,53)		CKSSYB104K16	
C 1061	(B,90,43)		CKSSYB104K10		C 1322	(A,123,54)		CKSSYB104K16	
C 1062	(B,70,46)		CKSRYB105K10		C 1323	(A,125,57)		CKSSYB104K16	
C 1063	(B,72,42)	10 uF	CCG1192		C 1324	(A,94,60)		CKSSYB104K16	
C 1064	(B,74,42)		CKSSYB104K10		C 1325	(A,96,60)		CKSSYB104K16	
C 1065	(B,74,40)		CKSSYB104K10		C 1326	(A,101,59)		CKSSYB104K16	
C 1066	(B,90,41)		CKSSYB104K10		C 1327	(A,102,60)		CKSSYB104K16	
C 1067	(B,73,39)		CKSSYB104K10		C 1328	(B,105,57)		CKSSYB104K16	
C 1068	(B,90,39)		CKSSYB104K10		C 1329	(B,106,57)		CKSSYB104K16	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 1330	(A,105,60)	CKSSYB104K16	C 1606	(B,145,10)	CKSRYB104K16
	C 1331	(B,107,57)	CKSSYB104K16	C 1607	(A,46,112) (A,D)	CCSRCH270J50
	C 1332	(A,109,60)	CKSSYB104K16	C 1608	(A,36,115) (A,D)	CCSRCH270J50
	C 1333	(A,113,60)	CKSSYB104K16	C 1609	(A,42,115) (A,D)	CCSRCH270J50
	C 1334	(B,111,57)	CKSSYB104K16	C 1610	(A,32,111) (A,D)	CCSRCH270J50
■	C 1335	(A,114,60)	CKSSYB104K16	C 1611	(A,40,110) (A,D)	CCSRCH270J50
	C 1336	(A,106,63)	CKSSYB105K6R3	C 1612	(A,27,115) (A,D)	CCSRCH270J50
	C 1337	(A,103,63)	CCSSCH100D50	C 1621	(B,139,111)	CKSRYB104K50
	C 1338	(A,102,67)	CCSSCH100D50	C 1622	(B,120,110)	CKSRYB104K50
	C 1339	(A,110,64)	CCSSCH120J50	C 1624	(B,131,111)	CKSRYB104K50
B	C 1340	(A,116,65)	CCSSCH120J50	C 1631	(B,45,107) 4.7 uF	CCG1201
	C 1341	(B,93,22)	CKSSYB104K10	C 1632	(B,39,107) 4.7 uF	CCG1201
	C 1342	(B,92,32)	CKSSYB104K16	C 1633	(B,43,107) 4.7 uF	CCG1201
	C 1343	(B,92,33)	CKSSYB104K16	C 1634	(B,37,107) 4.7 uF	CCG1201
	C 1344	(B,92,37)	CKSSYB104K16	C 1635	(B,41,107) 4.7 uF	CCG1201
■	C 1345	(B,92,38)	CKSSYB104K16	C 1636	(B,35,107) 4.7 uF	CCG1201
	C 1346	(B,92,41)	CKSSYB104K16	C 1651	(B,23,20)	CKSSYB104K10
	C 1347	(B,92,42)	CKSSYB104K16	C 1661	(B,126,13)	CKSSYB471K50
	C 1348	(B,92,45)	CKSSYB104K16	C 1671	(A,160,21)	CCSSCH101J50
	C 1349	(B,92,46)	CKSSYB104K16	C 1672	(A,163,36) 10 uF	CCG1192
C	C 1350	(B,92,49)	CKSSYB104K16	C 1673	(A,158,37) 10 uF	CCG1192
	C 1351	(A,84,49)	CCSSCH120J50	C 1676	(A,162,17) Capacitor	CEVW221M4
	C 1352	(B,92,50)	CKSSYB104K16	C 1677	(B,155,36)	CKSSYB103K16
	C 1353	(A,89,50)	CCSSCH120J50	C 1678	(B,163,25)	CKSRYB105K10
	C 1354	(B,93,51)	CKSSYB104K16	C 1681	(A,160,36)	CKSRYB104K16
■	C 1355	(B,108,22)	CKSSYB103K16	C 1682	(A,143,19) 10 uF	CCG1192
	C 1356	(B,138,46)	CKSSYB103K16	C 1683	(A,146,23)	CKSSYB182K50
	C 1357	(B,106,25) 10 uF	CCG1192	C 1685	(A,145,18)	CKSSYB104K10
	C 1358	(B,139,45) 10 uF	CCG1192	C 1686	(A,145,12)	CKSSYB182K50
	C 1360	(A,88,30)	CCSSCH470J50	C 1687	(A,143,23) 10 uF	CCG1192
D	C 1361	(B,101,34)	CCSSCH560J50	C 1688	(B,146,6)	CCSSCH101J50
	C 1362	(A,84,34)	CCSSCH560J50	C 1689	(B,146,7)	CKSSYB104K10
	C 1363	(A,83,34)	CCSSCH560J50	C 1701	(B,65,25)	CKSSYB471K50
	C 1364	(A,82,35)	CCSSCH560J50	C 1702	(B,63,25)	CKSSYB104K10
	C 1365	(A,86,37)	CCSSCH560J50	C 1703	(A,83,32)	CKSSYB104K16
■	C 1366	(A,84,37)	CCSSCH560J50	C 1704	(B,78,29)	CKSSYB104K10
	C 1367	(A,83,38)	CCSSCH560J50	C 1721	(A,122,101)	CCSSCH101J50
	C 1368	(A,81,38)	CCSSCH560J50	C 1722	(A,130,93)	CKSRYB105K10
	C 1369	(A,82,41)	CCSSCH560J50	C 1723	(A,134,100)	CKSRYB105K10
	C 1370	(A,82,40)	CCSSCH560J50	C 1724	(A,131,100)	CCSSCH101J50
■	C 1371	(A,80,41)	CCSSCH560J50	C 1725	(A,127,103)	CKSSYB104K10
	C 1372	(A,80,42)	CCSSCH560J50	C 1731	(A,126,104) 2.2 uF	CCG1218
	C 1373	(A,79,42)	CCSSCH560J50	C 1732	(A,124,104) 2.2 uF	CCG1218
	C 1374	(A,77,42)	CCSSCH560J50	C 1733	(A,127,110)	CKSSYB104K10
	C 1375	(A,81,46)	CCSSCH560J50	C 1734	(A,124,112)	CCSSCH101J50
E	C 1376	(A,79,46)	CCSSCH560J50	C 1735	(A,123,104) 2.2 uF	CCG1218
	C 1377	(A,81,50)	CCSSCH560J50	C 1736	(B,120,78) (A)	CKSSYB104K10
	C 1379	(A,81,52)	CCSSCH560J50	C 1751	(B,62,67) (A)	CKSSYB104K10
	C 1380	(A,81,54)	CCSSCH560J50	C 1801	(A,64,76) Capacitor	CEHVW470M16
	C 1382	(A,86,26)	CCSSCH150J50	C 1802	(B,57,85)	CKSSYB104K10
■	C 1383	(A,86,33)	CCSSCH6R0D50	C 1803	(B,63,82)	CKSRYB104K50
	C 1384	(A,110,60)	CKSSYB105K6R3	C 1804	(A,75,86)	XCEHAT102M16
	C 1386	(B,139,48)	CCSRCH102J50	C 1821	(A,101,99) Capacitor	CEHVW101M16
	C 1387	(B,108,26)	CCSRCH331J50	C 1822	(A,84,102)	CKSRYB105K16
	C 1388	(B,136,48)	CCSRCH331J50	C 1851	(A,98,90)	CKSSYB104K16
F	C 1389	(B,110,26)	CCSRCH102J50	C 1855	(A,102,86) 10 uF	CCG1244
	C 1390	(A,90,31) (A,D)	CCSSCH100D50	C 1901	(B,35,62) 10 uF	CCG1192
	C 1601	(A,156,105)	CKSRYB104K50	C 1902	(B,32,61)	CKSRYB105K10
	C 1604	(B,129,22)	CKSRYB104K16	C 1903	(B,85,89) (A)	CKSSYB104K16
	C 1605	(B,128,11)	CKSRYB104K16	C 1906	(B,96,92) (A)	CKSSYB103K25

1

2

3

4

5

C 1911	(B,27,38)	2.2 uF(A)	CCG1218
C 1912	(B,24,39)	(A)	CKSRYB105K10
C 1921	(B,25,54)	4.7 uF(A)	CCG1201
C 1922	(B,25,44)	4.7 uF(A)	CCG1201
C 1951	(B,150,66)		CCSSCH471J50
C 1952	(B,150,69)		CKSSYB103K16
C 1953	(B,152,68)		CCSSCH8R0D50
C 1954	(B,164,68)		CCSSCH8R0D50
C 1955	(B,165,68)		CKSSYB103K16
C 1956	(B,165,65)		CCSSCH102J50
C 1957	(A,163,39)		CKSSYB102K50
C 1958	(A,163,40)		CKSSYB104K10
C 1959	(A,162,42)	10 uF	CCG1236
C 1960	(A,162,44)	10 uF	CCG1236
C 1961	(A,162,47)	47 uF	CCG1229
C 1963	(B,159,73)		CKSRYB473K50
C 1964	(B,156,73)		CKSRYB102K50
C 1965	(B,157,82)	10 uF	CCG1236
C 1966	(B,158,63)		CKSSYB104K10
C 1967	(B,157,79)	10 uF	CCG1236
C 1968	(B,157,77)	10 uF	CCG1236
C 1969	(B,164,69)		CKSSYB104K16
C 1970	(B,152,70)		CKSSYB104K16
C 1971	(B,156,63)		CKSSYB104K10
C 1972	(B,152,66)		CKSRYB105K10
C 1974	(A,152,48)	47 uF	CCG1229
C 1975	(B,158,86)		CKSRYB102K50
C 1976	(A,152,45)	10 uF	CCG1236
C 1977	(B,157,84)	10 uF	CCG1236
C 1978	(A,152,43)	10 uF	CCG1236
C 1979	(A,164,83)		XCEHAT332M16
C 1980	(A,151,41)		CKSSYB104K10
C 1981	(A,151,40)		CKSSYB102K50
C 2011	(B,109,15)		CKSRYB105K10
C 2012	(B,122,12)		CKSRYB105K10
C 2023	(B,85,25)	10 uF	CCG1192
C 2031	(B,76,23)		CKSRYB105K10
C 2032	(B,80,25)		CKSRYB105K10
C 2061	(B,164,19)	4.7 uF	CCG1201
C 2062	(B,161,18)		CKSRYB105K10
C 2071	(A,147,38)		CKSSYB104K10
C 2083	(A,21,15)		CKSSYB104K10
C 2101	(A,157,90)		CKSSYB103K16
C 2102	(A,156,88)	10 uF	CCG1236
C 2105	(B,168,100)		CKSSYB682K25
C 2106	(B,163,91)		CKSSYB103K16
C 2107	(B,159,94)	10 uF	CCG1236
C 2108	(B,158,92)		CKSSYB103K25
C 2109	(A,154,82)	Capacitor	CEVW470M16
C 2131	(A,35,17)		CEVW101M16
C 2132	(A,39,15)		CKSRYB105K10
C 2133	(B,39,21)		CKSSYB104K10
C 2134	(B,45,22)		CKSSYB102K50
C 2151	(A,50,23)		CKSRYB104K16
C 2152	(A,140,85)	(A,D)	CKSSYB102K50
C 2161	(B,170,103)		CKSSYB104K16
C 2162	(B,158,104)	10 uF	CCG1236
C 2163	(A,165,118)	Capacitor	CEHVW101M16
C 2164	(B,167,113)		CKSRYB105K10
C 2165	(B,172,113)		CKSSYB102K50

7	8
Circuit Symbol and No.	Part No.

C 2166	(B,170,113)		CKSSYB472K25
C 2167	(B,171,106)		CKSSYB104K16
C 2168	(B,163,113)		CCSSCH471J50
C 2169	(B,157,109)		CKSSYB222K50
C 2170	(B,158,109)		CCSSCH270J50
C 2172	(A,164,110)	Capacitor	CEHVW470M16
C 2173	(B,160,108)		CKSSYB104K16
C 2185	(A,156,107)		CKSSYB104K16
C 2186	(A,159,106)	22 uF	DCH1256
C 3601	(B,117,34)	2.2 uF	CCG1218
C 3602	(B,117,32)	2.2 uF	CCG1218
C 3603	(B,117,30)	2.2 uF	CCG1218
C 3604	(B,117,28)	2.2 uF	CCG1218
C 3605	(B,117,26)	2.2 uF	CCG1218
C 3641	(B,80,35)		CKSRYB104K50
C 3642	(B,70,21)		CKSRYB104K50
C 3692	(B,123,40)		CKSSYB104K10
C 3702	(A,163,38)	(A)	CKSRYB104K25
C 3721	(B,106,30)		CKSRYB102K50
C 3722	(A,118,35)		CKSRYB102K50
C 3723	(A,119,39)		CKSRYB102K50
C 3724	(A,116,44)		CKSRYB102K50
C 3725	(A,120,44)		CCSRCH180J50
C 3726	(A,123,43)		CCSRCH180J50



Unit Number: YWX5032

Unit Name : DVD Core Unit

MISCELLANEOUS

IC 1002	(B,15,13)	Regulator IC	S-1133B50-U5
IC 1003	(B,37,11)	IC	S-1200B50-M5
IC 1004	(B,64,28)	IC	NJM2855DL1-33
IC 1251	(A,12,42)	IC	BA5839FP
IC 1401	(B,27,41)	Flash ROM Unit	CWW5043
IC 1402	(B,45,28)	Flash ROM Unit	CWW5044
IC 1480	(A,64,30)	SDRAM(16M)	M12L64164A-5TG2M
IC 1501	(A,39,33)	IC	MN2DS0018MA
IC 1801	(B,34,16)	D/A Converter	PCM1753DBQ
IC 1951	(A,28,49)	Logic IC	TC7SZU04FU
IC 1953	(B,57,17)	IC	S-1135D12-A6
Q 1101	(B,13,59)	Transistor	LSC4081UB
Q 1102	(B,13,56)	Transistor	LSC4081UB
Q 1103	(B,10,63)	Transistor	2SB1132
Q 1104	(B,22,54)	Transistor	2SB1132
D 1901	(B,50,10)	Diode	RKZ6.8TKJ
D 1902	(B,50,9)	Diode	RKZ6.8TKJ
L 1501	(A,54,31)	Inductor	CTF1743
L 1511	(A,48,17)	Chip Beads	VTL1126
L 1902	(A,17,17)	Inductor	CTF1487
L 1903	(B,63,16)	Inductor	CTF1558
L 1904	(A,68,18)	Ferrite Bead	CTF1528
X 1501	(B,48,18)	Oscillator 27.000 MHz	CSS1823
X 1950	(A,23,51)	Oscillator 48.000 MHz	CSS1760
F 1001	(A,14,19)	Chip EMI Filter	DTF1106
F 1002	(B,63,18)	Chip EMI Filter	DTL1106
S 1	(A,47,55)	Spring Switch(HOME)	CSN1080

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

S 3 (B,25,13) Spring Switch(12EJ) CSN1081
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B) CCP1447
 VR1102 (A,7,60) Semi-fixed 15 kohm(B) CCP1449

R 1508 (B,42,18)
 R 1509 (A,20,34)
 R 1510 (A,11,29)

RS1/16SS221J
 RS1/16SS102J
 RS1/16SS102J

A CN1101 (A,21,63) Connector CKS6331
 CN1952 (A,42,11) Connector CKS6025

R 1512 (A,55,32)
 R 1513 (A,23,38)
 R 1514 (A,24,40)
 R 1516 (A,24,36)
 R 1517 (B,57,22)

RS1/16SS470J
 RS1/16SS103J
 RS1/16SS183J
 RS1/16SS104J
 RS1/16SS103J

RESISTORS

R 1004 (B,12,20) RS1/16SS4702D
 R 1007 (B,12,21) RS1/16SS6801D
 R 1019 (B,34,7) RS1/16SS101J
 R 1025 (B,36,6) RS1/16SS101J
 R 1027 (A,40,18) RS1/16SS101J

R 1518 (B,33,31)
 R 1519 (A,24,43)
 R 1522 (A,21,37)
 R 1523 (A,22,37)
 R 1524 (B,29,33)

RS1/16SS103J
 RS1/16SS102J
 RS1/16SS104J
 RS1/16SS221J
 RS1/16SS472J

B R 1101 (B,15,57) RS1/16SS104J
 R 1102 (B,10,56) RS1/16SS104J
 R 1103 (B,14,61) RS1/16SS4300F
 R 1104 (B,11,59) RS1/16SS5100F
 R 1105 (B,17,54) RS1/16SS4300F

R 1525 (A,24,44)
 R 1526 (A,22,40)
 R 1527 (A,35,49)
 R 1528 (B,19,34)
 R 1529 (B,35,21)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS682J
 RS1/16SS103J
 RS1/16SS103J

R 1106 (B,10,57) RS1/16SS5600F
 R 1109 (B,6,57) RS1/16SS3R3J
 R 1110 (B,16,54) RS1/16SS3R3J
 R 1111 (B,6,63) RS1/10SR3R3J
 R 1112 (B,5,58) RS1/10SR3R3J

R 1530 (B,17,34)
 R 1531 (B,33,30)
 R 1532 (A,24,42)
 R 1534 (B,29,48)
 R 1535 (A,22,44)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS101J
 RS1/16SS221J
 RS1/16SS104J

C R 1113 (B,15,59) RS1/10SR3R9J
 R 1114 (B,19,57) RS1/10SR3R3J
 R 1115 (B,6,61) RS1/10SR2R7J
 R 1116 (B,6,62) RS1/10SR2R7J
 R 1117 (B,17,59) RS1/10SR3R9J

R 1536 (B,32,48)
 R 1537 (A,24,46)
 R 1538 (A,55,35)
 R 1539 (B,33,48)
 R 1540 (A,26,46)

RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS104J
 RS1/16SS221J

R 1118 (B,16,59) RS1/10SR3R9J
 R 1223 (A,42,50) RS1/16SS561J
 R 1225 (B,29,8) RS1/16SS471J
 R 1251 (A,5,48) RS1/16SS333J
 R 1252 (A,5,47) RS1/16SS473J

R 1541 (A,26,45)
 R 1542 (B,26,34)
 R 1543 (A,32,48)
 R 1544 (A,36,48)
 R 1546 (A,33,49)

RS1/16SS221J
 RS1/16SS103J
 RS1/16SS181J
 RS1/16SS181J
 RS1/16SS682J

R 1253 (A,5,46) RS1/16SS333J
 R 1254 (A,5,45) RS1/16SS473J
 R 1255 (A,21,48) RS1/16SS183J
 D R 1256 (A,21,46) RS1/16SS752J
 R 1257 (B,8,37) RS1/16SS221J

R 1601 (A,32,17)
 R 1602 (A,32,18)
 R 1603 (B,31,21)
 R 1604 (A,23,21)
 R 1605 (A,22,23)

RS1/16SS123J
 RS1/16SS123J
 RS1/16SS1002D
 RS1/16SS105J
 RS1/16SS105J

R 1258 (A,19,39) RS1/16SS221J
 R 1401 (B,34,28) RS1/16SS221J
 R 1402 (B,34,47) RS1/16SS104J
 R 1405 (B,55,35) RS1/16SS104J
 R 1406 (B,39,45) RS1/16SS472J

R 1670 (B,40,21)
 R 1671 (B,42,19)
 R 1672 (A,39,18)
 R 1674 (A,36,17)
 R 1801 (B,41,8)

RS1/16SS1002D
 RS1/16SS2402D
 RS1/16SS2000D
 RS1/16SS3002D
 RS1/16SS104J

R 1480 (A,72,24) RAB4CQ560J
 R 1481 (A,72,28) RAB4CQ560J
 R 1482 (A,72,32) RAB4CQ560J
 R 1483 (A,72,35) RAB4CQ560J
 E R 1484 (A,72,39) RAB4CQ560J

R 1802 (B,43,8)
 R 1803 (B,37,13)
 R 1804 (B,39,14)
 R 1950 (A,44,18)
 R 1951 (A,42,18)

RS1/16SS104J
 RS1/16SS821J
 RS1/16SS821J
 RS1/10SR24R0F
 RS1/10SR24R0F

R 1485 (A,55,22) RAB4CQ560J
 R 1486 (A,55,28) RAB4CQ560J
 R 1487 (A,56,37) RAB4CQ560J
 R 1488 (A,55,40) RAB4CQ560J
 R 1489 (A,54,30) RS1/16SS560J

R 1952 (A,26,50)
 R 1953 (A,26,51)
 R 1954 (A,48,5)
 R 1955 (A,50,5)
 R 1982 (A,10,62)

RS1/16SS105J
 RS1/16SS821J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS822J

R 1490 (A,72,21) RS1/16SS560J
 R 1501 (B,48,21) RS1/16SS122J
 R 1503 (B,46,21) RS1/16SS105J
 R 1504 (A,50,17) RS1/16SS121J
 F R 1505 (B,45,15) RS1/16SS101J

R 1983 (B,40,20)
 R 1987 (B,43,21)

RS1/16SS1000D
 RS1/16SS0R0J

R 1506 (B,45,14) RS1/16SS101J
 R 1507 (B,43,17) RS1/16SS101J

C 1001 (B,34,10)
 C 1002 (B,12,17)

CKSRYB105K10
 CKSSYB104K16

CAPACITORS

1

2

3

4

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 1003	(B,15,19)		CKSSYB104K16			C 1519	(A,34,47)		CKSSYB104K10		
C 1004	(B,15,17)	4.7 uF	CCG1201			C 1520	(A,27,47)		CKSSYB104K10		
C 1005	(B,40,11)		CKSRYB105K16			C 1521	(A,24,34)		CKSSYB104K10		
C 1010	(B,60,23)		CKSQYB225K10			C 1522	(A,25,38)		CKSSYB104K10	A	
C 1011	(B,64,22)		CKSRYB105K10			C 1523	(A,20,46)		CKSSYB224K6R3		
C 1015	(A,25,7)		CKSSYB102K50			C 1524	(A,20,48)		CKSSYB473K16		
C 1016	(B,64,15)		CKSSYB102K50			C 1526	(A,24,37)		CKSSYB103K16		
C 1018	(B,14,21)		CKSSYB104K10			C 1528	(B,30,48)		CCSSCH471J50		
C 1040	(B,51,7)		CCSRCH821J50			C 1601	(A,32,19)		CKSSYB103K16		
C 1041	(B,19,11)		CCSRCH271J50			C 1602	(A,34,17)		CCSSCH101J50		
C 1101	(B,14,53)	10 uF	CCG1192			C 1603	(A,33,18)		CCSSCH101J50		
C 1104	(B,7,57)		CKSSYB104K10			C 1604	(A,30,17)		CCSSCH680J50		
C 1105	(B,18,54)		CKSSYB104K10			C 1605	(A,30,18)		CCSSCH680J50		
C 1106	(B,8,66)		CKSSYB103K16			C 1606	(A,35,19)		CKSSYB104K10	B	
C 1107	(B,25,53)		CKSSYB103K16			C 1607	(A,20,24)	10 uF	CCG1192		
C 1108	(A,19,57)		CKSSYB103K16			C 1608	(A,28,18)	4.7 uF	CCG1201		
C 1109	(A,7,57)		CKSRYB224K16			C 1609	(A,26,22)		CKSSYB104K10		
C 1110	(A,17,58)		CKSSYB103K16			C 1612	(A,24,24)		CKSSYB104K10		
C 1111	(A,9,66)		CKSRYB224K16			C 1613	(A,24,25)		CKSSYB104K10		
C 1112	(B,17,52)	22 uF	DCH1256			C 1614	(A,22,24)		CKSSYB104K10		
C 1113	(B,8,58)	22 uF	DCH1256			C 1615	(A,23,26)		CKSSYB104K10		
C 1210	(B,77,34)		CKSSYB104K16			C 1616	(A,24,27)		CKSSYB104K10		
C 1251	(B,12,41)		CEVW101M16			C 1617	(B,27,28)		CKSSYB104K10		
C 1252	(B,7,41)	4.7 uF	CCG1222			C 1618	(A,22,29)		CCSSCH101J50		
C 1253	(B,7,39)		CKSSYB104K16			C 1619	(A,23,30)		CKSSYB562K25	C	
C 1254	(A,6,38)		CKSSYB104K16			C 1620	(B,27,30)		CKSSYB224K6R3		
C 1255	(A,18,37)		CKSSYB104K16			C 1621	(A,22,31)		CKSSYB224K6R3		
C 1401	(B,34,27)		CKSSYB104K16			C 1622	(A,24,31)		CKSSYB333K16		
C 1403	(B,39,40)		CKSSYB104K10			C 1623	(A,27,20)		CKSRYB105K10		
C 1404	(B,40,40)	4.7 uF	CCG1201			C 1624	(A,24,32)		CKSSYB104K10		
C 1408	(B,57,27)		CKSSYB104K10			C 1625	(A,24,29)		CKSSYB104K10		
C 1409	(B,58,29)	4.7 uF	CCG1201			C 1671	(A,41,18)		CKSSYB104K10		
C 1410	(B,33,29)		CKSSYB104K16			C 1673	(A,37,19)		CKSSYB104K10		
C 1480	(A,71,19)		CKSSYB104K10			C 1674	(B,42,20)		CKSSYB104K10		
C 1481	(A,72,22)		CKSSYB104K10			C 1676	(B,38,21)		CKSRYB105K10		
C 1482	(A,72,26)		CKSSYB104K10			C 1801	(B,42,10)	4.7 uF	CCG1201	D	
C 1484	(A,72,30)		CKSSYB104K10			C 1802	(B,46,10)	4.7 uF	CCG1201		
C 1485	(A,72,41)		CKSSYB104K10			C 1803	(B,42,12)		CCSRCH182J50		
C 1487	(A,57,29)		CKSSYB104K10			C 1804	(B,45,12)		CCSRCH182J50		
C 1488	(A,57,25)		CKSSYB104K10			C 1805	(B,34,13)		CKSSYB104K10		
C 1489	(A,64,17)	10 uF	CCG1192			C 1806	(B,32,13)	10 uF	CCG1192		
C 1490	(A,66,18)		CKSSYB102K50			C 1809	(B,39,16)		CKSSYB104K10		
C 1501	(B,61,20)	10 uF	CCG1192			C 1950	(A,27,51)		CKSSYB104K10		
C 1502	(B,54,20)	10 uF	CCG1192			C 1951	(A,23,54)		CCSSCH100D50		
C 1503	(A,54,33)		CKSSYB104K10			C 1952	(A,24,48)		CCSSCH100D50		
C 1504	(A,53,24)		CKSSYB104K10			C 1953	(B,60,17)		CKSRYB105K10		
C 1505	(A,53,27)		CKSSYB104K10			C 1954	(B,54,17)		CKSRYB105K10	E	
C 1506	(B,52,35)		CKSSYB104K10			C 1955	(B,77,40)		CKSSYB104K16		
C 1507	(A,53,36)		CKSSYB104K10								
C 1508	(A,53,39)		CKSSYB104K10								
C 1509	(A,53,42)		CKSSYB104K10								
C 1510	(B,51,18)		CCSSCH100D50								
C 1511	(A,48,18)		CKSSYB104K10								
C 1512	(B,45,18)		CCSSCH100D50								
C 1513	(A,48,48)		CKSSYB104K10								
C 1514	(B,45,21)		CKSSYB104K10								
C 1515	(A,45,18)		CKSSYB104K10								
C 1516	(A,43,48)		CKSSYB104K10								
C 1517	(A,42,48)		CKSSYB104K10								
C 1518	(A,38,48)		CKSSYB104K10								



Unit Number : CXX4997

Unit Name : Service Unit(Monitor)

MISCELLANEOUS

IC 5101	(A,25,67)	IC	R1290K103A
IC 5102	(A,71,40)	Regulator IC	S-1155B33-U5
IC 5201	(A,110,69)	IC	BD81A04EFV-M
IC 5301	(A,114,26)	IC	AK4187VN

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 5101 (A,30,61) Transistor LTC014EEB
 Q 5103 (A,13,28) Transistor LSAR523UB
 Q 5106 (A,24,76) Transistor 2SA1577
 Q 5401 (A,101,42) Chip Transistor HN1C01FU
 Q 5402 (A,99,45) Transistor LSCR523UB

R 5109 (A,30,63)
 R 5110 (A,28,64)
 R 5111 (A,28,63)
 R 5112 (B,65,79)
 R 5116 (A,21,63)

RS1/16SS1502D
 RS1/16SS8201D
 RS1/16SS1502D
 RS1/16SS0R0J
 RS1/16SS3001D

D 5101 (A,17,71) Diode RB162M-40
 D 5103 (A,32,75) Diode RB548W
 D 5104 (A,34,75) Diode RB548W
 D 5105 (A,34,67) Diode RB548W
 D 5132 (A,72,49) Diode CRG03

R 5117 (A,21,62)
 R 5122 (A,9,28)
 R 5124 (A,10,28)
 R 5125 (A,13,30)
 R 5126 (A,14,30)

RS1/16SS1502D
 RS1/16SS472J
 RS1/16SS105J
 RS1/16SS682J
 RS1/16SS0R0J

D 5201 (A,111,57) Diode DB2X41400
 L 5001 (A,9,46) Inductor CTF1635
 L 5002 (A,9,52) Inductor DTL1096
 L 5003 (A,21,44) Inductor DTL1096
 L 5004 (A,14,36) Chip Ferrite Bead BTX1042

R 5128 (A,15,35)
 R 5129 (A,15,32)
 R 5134 (A,16,62)
 R 5135 (A,19,62)
 R 5136 (A,18,62)

RS1/16SS101J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS1203D
 RS1/16SS472J

L 5101 (A,21,73) Choke Coil 22 uH CTH1426
 L 5102 (A,8,32) Inductor LCTAW101J2520
 L 5202 (A,106,58) Inductor CTH1526
 TH5201 (A,104,15) Thermistor CCX1058

R 5140 (A,30,67)
 R 5141 (A,30,66)
 R 5142 (A,30,69)
 R 5143 (A,28,69)
 R 5202 (A,113,76)

RS1/16SS9102D
 RS1/16SS1802D
 RS1/16SS1003D
 RS1/16SS9101D
 RS1/16SS273J

CN5001 (A,34,32) Connector CKS6536
 CN5201 (A,127,56) Connector CKS6523
 CN5301 (A,121,17) Connector CKS6327
 CN5401 (A,58,69) Connector CKS6536
 CN5403 (A,140,17) Connector CKS6524

R 5203 (A,114,76)
 R 5205 (B,108,66)
 R 5206 (B,108,67)
 R 5207 (A,97,74)
 R 5212 (B,106,65)

RS1/16SS511J
 RS1/16SS1503D
 RS1/16SS1003D
 RS1/16SS101J
 RS1/16SS3603D

RESISTORS

R 5001 (A,60,18) RS1/16SS4R7J
 R 5002 (A,62,18) RS1/16SS56R0D
 R 5003 (A,61,20) RS1/16SS1800D
 R 5004 (A,60,21) RS1/16SS2R2J

R 5213 (B,106,66)
 R 5219 (A,103,74)
 R 5220 (A,103,73)
 R 5301 (A,112,18)
 R 5302 (B,119,21)

RS1/16SS2402D
 RS1/16SS104J
 RS1/16SS154J
 RS1/10SR0R0J
 RS1/16SS201J

R 5005 (A,61,22) RS1/16SS47R0D
 R 5006 (A,60,22) RS1/16SS0R0J
 R 5007 (A,61,23) RS1/16SS39R0D
 R 5008 (A,60,24) RS1/16SS4R7J

R 5304 (A,109,27)
 R 5305 (A,109,28)
 R 5306 (A,119,25)
 R 5307 (A,118,25)
 R 5308 (A,118,27)

RS1/16SS472J
 RS1/16SS472J
 RS1/16SS0R0J
 RS1/16SS621J
 RS1/16SS181J

R 5009 (A,61,25) RS1/16SS1000D
 R 5010 (A,60,26) RS1/16SS8R2J
 R 5011 (A,61,27) RS1/16SS1300D
 R 5012 (A,60,28) RS1/16SS0R0J
 R 5013 (A,61,29) RS1/16SS1000D

R 5309 (B,110,27)
 R 5310 (B,117,25)
 R 5311 (A,109,29)
 R 5312 (A,119,26)
 R 5318 (B,111,24)

RS1/16SS101J
 RS1/16SS0R0J
 RS1/16SS101J
 RS1/16SS620J
 RS1/16SS101J

R 5014 (A,60,30) RS1/16SS8R2J
 R 5015 (A,61,31) RS1/16SS39R0D
 R 5016 (A,61,33) RS1/16SS4R7J
 R 5017 (A,64,33) RS1/16SS47R0D
 R 5018 (A,66,33) RS1/16SS0R0J

R 5401 (A,102,45)
 R 5402 (A,103,45)
 R 5405 (A,100,40)
 R 5406 (A,99,40)
 R 5409 (A,97,44)

RS1/16SS680J
 RS1/16SS560J
 RS1/16SS680J
 RS1/16SS560J
 RS1/16SS680J

R 5019 (A,67,33) RS1/16SS1800D
 R 5020 (A,69,33) RS1/16SS2R2J
 R 5021 (A,70,32) RS1/16SS33R0D
 R 5022 (A,70,30) RS1/16SS2R4J
 R 5023 (A,38,73) RS1/16SS0R0J

R 5410 (A,96,44)
 R 5413 (A,99,42)
 R 5414 (A,101,39)
 R 5415 (A,96,46)
 R 5416 (A,39,60)

RS1/16SS560J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS0R0J

R 5024 (B,30,35) RS1/16SS473J
 R 5026 (B,24,35) RS1/16SS473J
 R 5028 (B,25,33) RS1/16SS473J
 R 5029 (B,26,35) RS1/16SS473J
 R 5101 (A,17,60) RS1/16SS103J

R 5417 (A,40,61)
 R 5418 (A,41,60)
 R 5419 (A,42,61)
 R 5420 (A,44,61)
 R 5421 (A,44,58)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS270J
 RS1/16SS0R0J

R 5103 (A,24,61) RS1/16SS203J
 R 5104 (A,25,60) RS1/16SS104J
 R 5106 (A,27,63) RS1/16SS472J
 R 5107 (A,21,70) RS1/16SS0R0J
 R 5108 (A,24,73) RS1/16SS103J

R 5422 (A,43,57)
 R 5423 (A,45,58)
 R 5424 (A,45,57)
 R 5425 (A,47,58)
 R 5426 (A,47,56)

RS1/16SS270J
 RS1/16SS270J
 RS1/16SS270J
 RS1/16SS270J
 RS1/16SS270J

5
Circuit Symbol and No.

R 5427	(A,48,58)
R 5428	(A,48,56)
R 5429	(A,50,58)
R 5430	(A,50,56)
R 5431	(A,51,58)
R 5432	(A,51,56)
R 5433	(A,52,56)
R 5434	(A,53,58)
R 5435	(A,54,56)
R 5436	(A,55,58)
R 5437	(A,55,56)
R 5438	(A,56,58)
R 5439	(A,57,56)
R 5440	(A,59,58)

CAPACITORS

C 5009	(A,63,27)
C 5010	(A,63,28)
C 5011	(A,63,29)
C 5012	(A,63,30)
C 5021	(A,31,37)
C 5023	(A,31,39)
C 5025	(A,15,47) 10 uF
C 5026	(A,8,44)
C 5029	(A,28,38)
C 5030	(A,28,39)
C 5031	(A,9,50) 10 uF
C 5034	(A,22,40)
C 5035	(A,21,42) 4.7 uF
C 5037	(A,17,43)
C 5039	(A,20,38)
C 5040	(A,17,37)
C 5042	(A,16,33)
C 5051	(A,39,73)
C 5101	(A,20,78)
C 5102	(A,21,67)
C 5103	(A,20,66)
C 5104	(A,21,60)
C 5105	(A,23,60)
C 5106	(A,28,60)
C 5107	(A,24,62)
C 5109	(A,32,63)
C 5110	(A,35,64)
C 5111	(A,15,64) 10 uF
C 5112	(A,15,67) 10 uF
C 5113	(A,21,64)
C 5114	(A,11,28)
C 5115	(A,8,30) 10 uF
C 5116	(A,69,44) 4.7 uF
C 5117	(A,73,44) 4.7 uF
C 5118	(A,60,63)
C 5120	(A,33,72)
C 5121	(A,35,72)
C 5122	(A,32,67)
C 5123	(A,35,66)
C 5124	(A,31,77)
C 5125	(A,34,77)
C 5127	(A,28,73)
C 5140	(A,30,70)
C 5203	(B,110,66) 2.2 uF

6
Part No.

RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS270J	
RS1/16SS0R0J	
CKSSYB102K50	
CKSSYB104K16	
CKSSYB102K50	
CKSSYB104K16	
CKSSYB102K50	
CKSSYB104K16	
CCG1236	
CKSSYB102K50	
CKSSYB102K50	
CKSSYB104K10	
CCG1192	
CKSSYB104K16	
CCG1201	
CKSQYB225K16	
CKSRYB104K50	
CKSQYB334K50	
CKSSYB104K16	
CKSSYB471K50	
CKSQYB475K6R3	
CKSSYB102K50	
CKSSYB105K6R3	
CKSSYB123K16	
CKSSYB104K10	
CKSRYB105K10	
CKSSYB102K50	
CCSSCH101J50	
CKSSYB122K50	
CCG1236	
CCG1236	
CKSSYB102K50	
CKSSYB104K16	
CCG1236	
CCG1201	
CCG1201	
CKSSYB104K10	
CKSQYB105K25	
CKSQYB105K25	
CKSRYB105K10	
CKSRYB104K50	
CKSQYB474K25	
CKSQYB474K25	
CKSYB475K16	
CKSSYB561K50	
CCG1218	

7
Circuit Symbol and No.

C 5204	(A,115,76)
C 5205	(A,101,62) 10 uF
C 5206	(A,114,77)
C 5208	(A,116,57) 10 uF
C 5209	(A,104,17)
C 5212	(A,122,63)
C 5213	(A,79,65)
C 5214	(A,116,74)
C 5301	(A,113,21) 10 uF
C 5302	(A,109,24) 10 uF
C 5303	(A,114,23)
C 5304	(A,111,25)
C 5305	(B,123,25)
C 5306	(B,116,25)
C 5307	(A,117,24)
C 5308	(B,121,21)
C 5401	(A,68,64)

8
Part No.

CKSSYB104K10
CCG1236
CKSSYB104K10
CCG1236
CKSSYB104K10
CCSSCH101J50
CKSSYB104K16
CKSSYB104K16
CCG1192
CCG1192
CKSSYB104K10
CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10

E

Unit Number : CXX5005

Unit Name : Service Unit(Key)

MISCELLANEOUS

D 3801	(A,151,6) LED	SMLVN6RGB2U(A)
D 3802	(A,15,6) LED	SMLVN6RGB2U(A)
S 3801	(A,24,6) Switch	VSG1020
S 3802	(A,128,6) Switch	VSG1020
S 3803	(A,114,6) Switch	VSG1020
S 3804	(A,99,6) Switch	VSG1020
S 3805	(A,83,6) Switch	VSG1020
S 3806	(A,142,6) Switch	VSG1020
S 3807	(A,67,6) Switch	VSG1020
S 3808	(A,52,6) Switch	VSG1020
S 3809	(A,38,6) Switch	VSG1020
S 3810	(A,9,6) Push Switch	CSG1155
U 3801	(A,159,6) Remote Receiver Unit	RS-470
CN3801	(B,22,6) Connector	CKS6291

RESISTORS

R 3802	(A,153,8)	RS1/16SS470J
R 3803	(A,29,7)	RS1/16SS182J
R 3804	(A,123,8)	RS1/16SS222J
R 3805	(A,109,8)	RS1/16SS472J
R 3806	(A,95,8)	RS1/16SS123J
R 3807	(A,138,8)	RS1/16SS182J
R 3808	(A,62,7)	RS1/16SS222J
R 3809	(A,47,8)	RS1/16SS472J

CAPACITORS

C 3807	(A,154,8)	CKSSYB104K10
--------	-----------	--------------

F

Unit Number : EXX2001

Unit Name : PCB Unit(Service)

Circuit Symbol and No.

Part No.

MISCELLANEOUS

A	IC 101	Driver IC	BA6288FS
	VR101	Volume 10 kohm	CCW1029
	S 101	Switch	CSN1067
	S 102	Switch	CSN1068
	CN101	Connector	CKS4997

RESISTORS

■	R 101	RS1/16S221J
	R 102	RS1/16S221J
	R 103	RS1/16S0R0J

CAPACITORS

B	C 101	CEVW220M16
	C 102	CKSRYB104K16

■

C

■

D

■

E

■

F