EXPLODED VIEW

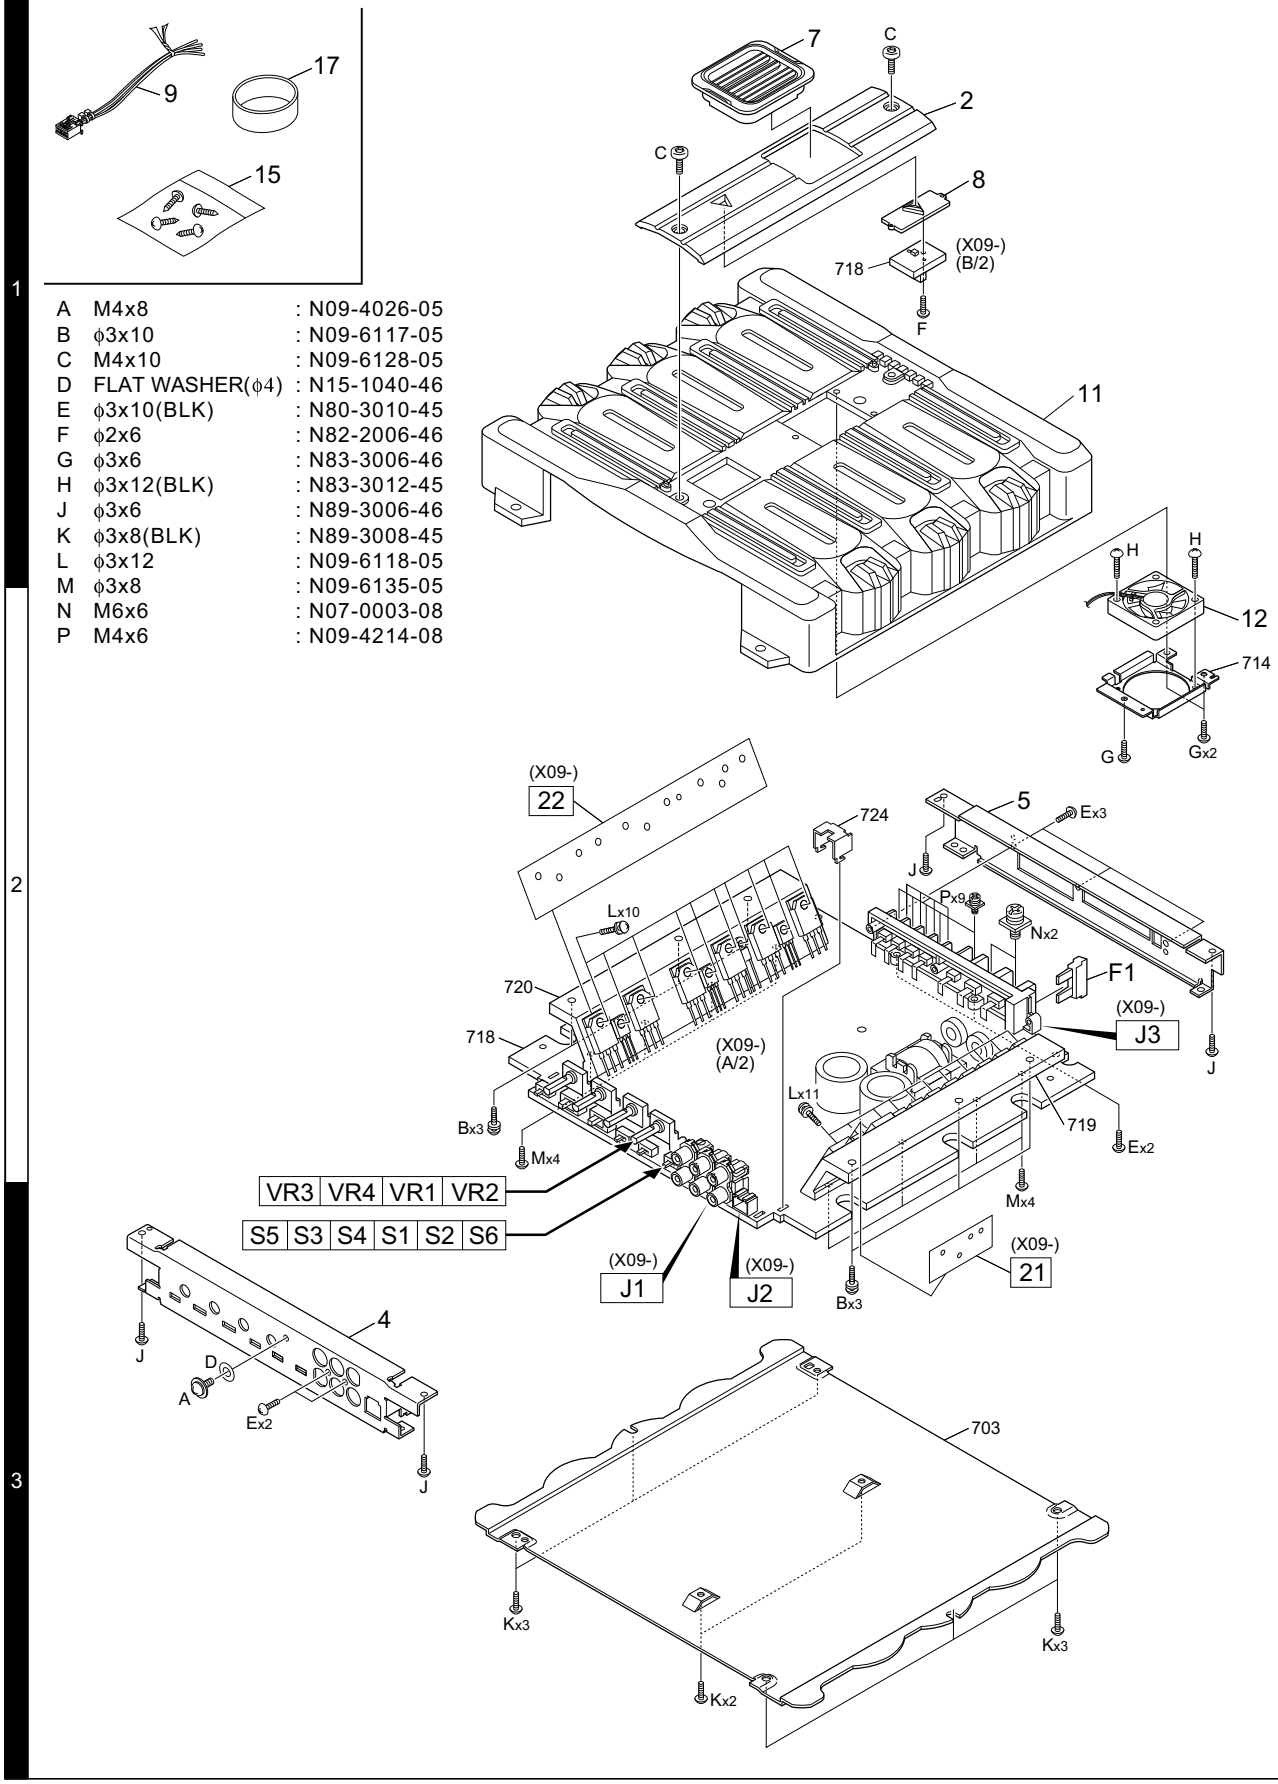

A	M4x8	: N09-4026-05
B	ϕ3x10	: N09-6117-05
C	M4x10	: N09-6128-05
D	FLAT WASHER(ϕ4)	: N15-1040-46
E	ϕ3x10(BLK)	: N80-3010-45
F	ϕ2x6	: N82-2006-46
G	ϕ3x6	: N83-3006-46
H	ϕ3x12(BLK)	: N83-3012-45
J	ϕ3x6	: N89-3006-46
K	ϕ3x8(BLK)	: N89-3008-45
L	ϕ3x12	: N09-6118-05
M	ϕ3x8	: N09-6135-05
N	M6x6	: N07-0003-08
P	M4x6	: N09-4214-08

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
KAC-8401					
2	1B	✻	A21-4270-03	DRESSING PANEL	
4	3A	✻	A64-3053-02	PANEL	
5	2B	✻	A84-0347-02	REAR PANEL	
7	1B		B07-3084-02	ESCUTCHEON	
8	1B	✻	B19-2214-13	LIGHTING BOARD	
-			B46-0100-50	WARRANTY CARD	
-		✻	B64-2573-00	INSTRUCTI.MANUAL (ENG.FRE.SPA.)	KE1
-		✻	B64-2574-00	INSTR.MANUAL (GER.DUT.ITA.POR.)	E1
-		✻	B64-2575-00	INSTRUCTION MANUAL (ENG.T-CHI.)	M1
9	1A		E30-6144-05	CONNECTING CORD ASSY	
11	1B	✻	F01-1728-11	HEAT SINK	
12	2B	✻	F09-1846-05	FAN	
⚠ F1	2B		F52-0016-05	FUSE (BLADE TYPE) 40A	
-		✻	H10-4870-13	POLYSTYRENE FOAMED FIXTURE	
-			H25-0336-04	PROTECTION BAG (170X250X0.03)	
-		✻	H25-1192-04	PROTECTION BAG (370X440)	
-		✻	H54-2879-03	ITEM CARTON CASE	E1
-		✻	H54-2880-03	ITEM CARTON CASE	M1
-		✻	H54-2925-03	ITEM CARTON CASE	K
15	1A		N99-1587-05	SCREW SET	
A	3A		N09-4026-05	TAPPING SCREW (4X8,TP,S)	
B	2A		N09-6117-05	TAPTITE SCREW	
C	1B		N09-6128-05	DRESSED SCREW (TORX)	
D	3A		N15-1040-46	FLAT WASHER (4)	
E	3A		N80-3010-45	PAN HEAD TAPTITE SCREW	
F	1B		N82-2006-46	BINDING HEAD TAPTITE SCREW	
G	2B		N83-3006-46	PAN HEAD TAPTITE SCREW	
H	1B		N83-3012-45	PAN HEAD TAPTITE SCREW	
J	2B		N89-3006-46	BINDING HEAD TAPTITE SCREW	
K	3B		N89-3008-45	BINDING HEAD TAPTITE SCREW	
N	2B		N07-0003-08	PAN HEAD SEMS SCREW	
P	2B		N09-4214-08	PAN HEAD SEMS SCREW	
17	1A		W01-1606-05	ACCESSORY	
AUDIO UNIT (X09-5610-10)					
D13			B30-1669-05	LED (BLUE)	
C1			CE04DW1C100M	ELECTRO 10UF 16WV	
C2,3			CE04DW1V470M	ELECTRO 47UF 35WV	
C4			CE04DW1H010M	ELECTRO 1.0UF 50WV	
C5			CE04DW1C100M	ELECTRO 10UF 16WV	
C6			CK73GB1H102K	CHIP C 1000PF K	
C7			CE04HW1H2R2M	NP-ELEC 2.2UF 50WV	
C8			CK73GB1H103K	CHIP C 0.010UF K	
C9			CF92FV1H332J	MF-C 3300PF J	
C10			C90-2688-05	ELECTRO 2200UF 16WV	
C11,12			C90-5372-05	ELECTRO 4700UF 35WV	
C13-16			CE04DW1E220M	ELECTRO 22UF 25WV	
C17-24			CK73GB1H471K	CHIP C 470PF K	
C25			CE04DW0J101M	ELECTRO 100UF 6.3WV	
C26			CE04DW1H221M	ELECTRO 220UF 50WV	

Ref. No.	Add	New	Parts No.	Description	Destination
C27			CE04DW0J101M	ELECTRO 100UF 6.3WV	
C28			CE04DW1C470M	ELECTRO 47UF 16WV	
C29			CE04DW1H010M	ELECTRO 1.0UF 50WV	
C30			CE04DW1E330M	ELECTRO 33UF 25WV	
C31			CE04DW1E470M	ELECTRO 47UF 25WV	
C32-44			CK73GB1H103K	CHIP C 0.010UF K	
C45			C90-2688-05	ELECTRO 2200UF 16WV	
C46			CE04DW1V100M	ELECTRO 10UF 35WV	
C47,48			CK73GB1H103K	CHIP C 0.010UF K	
C49			CK73GB1H104K	CHIP C 0.10UF K	
C50,51			CK73GB1H103K	CHIP C 0.010UF K	
C52			CK73GB0J105K	CHIP C 1.0UF K	
C53,54			CK73FB1H104K	CHIP C 0.10UF K	
C55,56			CK73GB1H471K	CHIP C 470PF K	
C57			CF92FV1H332J	MF-C 3300PF J	
C100			CF92FV1H102J	MF-C 1000PF J	
C101,102			CK73GB1H122K	CHIP C 1200PF K	
C103,104			CE04DW1C100M	ELECTRO 10UF 16WV	
C105,106			CC73GCH1H150J	CHIP C 15PF J	
C109-112			CE04DW1C100M	ELECTRO 10UF 16WV	
C113,114			CC73GCH1H150J	CHIP C 15PF J	
C115,116			CE04DW1C100M	ELECTRO 10UF 16WV	
C117,118			CK73FB1C334K	CHIP C 0.33UF K	
C119,120			CK73GB1H473K	CHIP C 0.047UF K	
C121-124			CE04DW1C100M	ELECTRO 10UF 16WV	
C126			CK73GB1H102K	CHIP C 1000PF K	
C128			CE04DW1C100M	ELECTRO 10UF 16WV	
C130			CC73GCH1H470J	CHIP C 47PF J	
C131,132			CC73GCH1H150J	CHIP C 15PF J	
C150			CE04DW1C220M	ELECTRO 22UF 16WV	
C151,152			CE04DW1C100M	ELECTRO 10UF 16WV	
C153,154			CK73GB1H681K	CHIP C 680PF K	
C155,156			CF92FV1H562J	MF-C 5600PF J	
C157,158			CE04DW1E470M	ELECTRO 47UF 25WV	
C159,160			CC45FSL1H100D	CERAMIC 10PF D	
C161,162			CC45FSL1H820J	CERAMIC 82PF J	
C163,164			CE04DW1V100M	ELECTRO 10UF 35WV	
C165,166			CF92FV1H102J	MF-C 1000PF J	
C167-170			CC45FSL1H470J	CERAMIC 47PF J	
C171			CK73GB1H472K	CHIP C 4700PF K	
C173			CK73GB1H472K	CHIP C 4700PF K	
C175,176			CC73GCH1H101J	CHIP C 100PF J	
C191,192			CF92FV1H473J	MF-C 0.047UF J	
C200			CF92FV1H102J	MF-C 1000PF J	
C201,202			CK73GB1H122K	CHIP C 1200PF K	
C203,204			CE04DW1C100M	ELECTRO 10UF 16WV	
C205,206			CC73GCH1H150J	CHIP C 15PF J	
C209-212			CE04DW1C100M	ELECTRO 10UF 16WV	
C213,214			CC73GCH1H150J	CHIP C 15PF J	
C215,216			CE04DW1C100M	ELECTRO 10UF 16WV	
C217,218			CK73FB1C334K	CHIP C 0.33UF K	
C219,220			CK73GB1H473K	CHIP C 0.047UF K	
C221-224			CE04DW1C100M	ELECTRO 10UF 16WV	
C226			CK73GB1H102K	CHIP C 1000PF K	
C228			CE04DW1C100M	ELECTRO 10UF 16WV	

E1 : KAC-8401 (For Europe) **K** : KAC-8401 (For North America)
M1 : KAC-8401 (For Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

AUDIO UNIT (X09-5610-10)

Ref. No.	Add	New	Parts No.	Description				Destination
C230			CC73GCH1H470J	CHIP C	47PF	J		
C231,232			CC73GCH1H150J	CHIP C	15PF	J		
C250			CE04DW1C220M	ELECTRO	22UF	16WV		
C251,252			CE04DW1C100M	ELECTRO	10UF	16WV		
C253,254			CK73GB1H681K	CHIP C	680PF	K		
C255,256			CF92FV1H562J	MF-C	5600PF	J		
C257,258			CE04DW1E470M	ELECTRO	47UF	25WV		
C259,260			CC45FSL1H100D	CERAMIC	10PF	D		
C261,262			CC45FSL1H820J	CERAMIC	82PF	J		
C263,264			CE04DW1V100M	ELECTRO	10UF	35WV		
C265,266			CF92FV1H102J	MF-C	1000PF	J		
C267-270			CC45FSL1H470J	CERAMIC	47PF	J		
C271			CK73GB1H472K	CHIP C	4700PF	K		
C273			CK73GB1H472K	CHIP C	4700PF	K		
C275,276			CC73GCH1H101J	CHIP C	100PF	J		
C291,292			CF92FV1H473J	MF-C	0.047UF	J		
C301,302			CC73GCH1H101J	CHIP C	100PF	J		
C303,304			CK73FB1C224K	CHIP C	0.22UF	K		
C305,306			CE04HW1H2R2M	NP-ELEC	2.2UF	50WV		
C307,308			CE04DW1C100M	ELECTRO	10UF	16WV		
C309			CE04HW1C100M	NP-ELEC	10UF	16WV		
CN1			E40-3247-05	PIN ASSY				
CN2			E40-3246-05	PIN ASSY				
J1		✻	E63-0890-05	PIN JACK				
J2			E58-0919-05	RECTANGULAR RECEPTACLE				
J3		✻	E70-0839-05	SCREW TERMINAL BOARD				
WH1			E39-0538-05	WIRING HARNESS				
21	3B	✻	F20-2245-04	INSULATING SHEET				
22	2A	✻	F20-2246-04	INSULATING SHEET				
L1,2			L33-1920-05	CHOKE COIL				
L3		✻	L19-0744-05	TRANSFORMER FOR CONVERTER				
E	2B		N80-3010-45	PAN HEAD TAPTITE SCREW				
L	2A		N09-6118-05	TAPTITE SCREW				
M	2A	✻	N09-6135-05	TAPTITE SCREW (3X8 BT)				
R1-4			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R5			RK73GB2A512J	CHIP R	5.1K	J	1/10W	
R6			RK73GB2A303J	CHIP R	30K	J	1/10W	
R7			RK73GB2A512J	CHIP R	5.1K	J	1/10W	
R8			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R9			RK73GB2A154J	CHIP R	150K	J	1/10W	
R10			RK73GB2A182J	CHIP R	1.8K	J	1/10W	
R11			RK73GB2A333J	CHIP R	33K	J	1/10W	
R12			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R13			RK73GB2A223J	CHIP R	22K	J	1/10W	
R14			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R15			RK73GB2A681J	CHIP R	680	J	1/10W	
R16			RK73GB2A163J	CHIP R	16K	J	1/10W	
R17			RK73GB2A103J	CHIP R	10K	J	1/10W	
R18			RK73GB2A681J	CHIP R	680	J	1/10W	
R19			RK73GB2A683J	CHIP R	68K	J	1/10W	
R20		✻	RK73GB2A304J	CHIP R	300K	J	1/10W	
R21			RK73GB2A103J	CHIP R	10K	J	1/10W	

Ref. No.	Add	New	Parts No.	Description				Destination
R22,23			RK73GB2A303J	CHIP R	30K	J	1/10W	
R24,25			RK73FB2B681J	CHIP R	680	J	1/8W	
R26			RK73GB2A223J	CHIP R	22K	J	1/10W	
R27			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R28,29			RK73GB2A103J	CHIP R	10K	J	1/10W	
R30			RD14BB2C560J	RD	56	J	1/6W	
R31,32			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R33,34		✻	RK73GB2A430J	CHIP R	43	J	1/10W	
R35,36			RK73GB2A151J	CHIP R	150	J	1/10W	
R37,38			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R39,40			RD14DB2H100J	SMALL-RD	10	J	1/2W	
R41,42			RD14DB2H330J	SMALL-RD	33	J	1/2W	
R43,44		✻	RK73EB2E392J	CHIP R	3.9K	J	1/4W	
R45			RK73GB2A560J	CHIP R	56	J	1/10W	
R46			RK73GB2A103J	CHIP R	10K	J	1/10W	
R47			RK73GB2A473J	CHIP R	47K	J	1/10W	
R48			RK73GB2A103J	CHIP R	10K	J	1/10W	
R49			RK73GB2A223J	CHIP R	22K	J	1/10W	
R50			RK73GB2A103J	CHIP R	10K	J	1/10W	
R51-54			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R55-58			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R59,60			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R61-64			RK73GB2A152J	CHIP R	1.5K	J	1/10W	
R65-68			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R69,70			RK73GB2A332J	CHIP R	3.3K	J	1/10W	
R71-74			RK73GB2A473J	CHIP R	47K	J	1/10W	
R75			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R77,78			RK73GB2A473J	CHIP R	47K	J	1/10W	
R79			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R80,81			RK73GB2A473J	CHIP R	47K	J	1/10W	
R84			RD14NB2E220J	RD	22	J	1/4W	
R86,87			RK73GB2A221J	CHIP R	220	J	1/10W	
R100			RK73EB2E102J	CHIP R	1.0K	J	1/4W	
R101,102			RD14BB2C102J	RD	1.0K	J	1/6W	
R103-108			RK73GB2A103J	CHIP R	10K	J	1/10W	
R109-112			RN73GH1J103D	CHIP R	10K	D	1/16W	
R113-116			RK73GB2A823J	CHIP R	82K	J	1/10W	
R117-120		✻	RK73EB2E513J	CHIP R	51K	J	1/4W	
R121,122			RK73EB2E222J	CHIP R	2.2K	J	1/4W	
R123-126			RN73GH1J103D	CHIP R	10K	D	1/16W	
R127,128			RK73GB2A223J	CHIP R	22K	J	1/10W	
R129-134			RK73GB2A103J	CHIP R	10K	J	1/10W	
R135,136			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R137,138			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R139,140			RK73GB2A103J	CHIP R	10K	J	1/10W	
R141,142			RK73GB2A163J	CHIP R	16K	J	1/10W	
R143-146			RK73GB2A223J	CHIP R	22K	J	1/10W	
R148			RK73GB2A153J	CHIP R	15K	J	1/10W	
R149,150			RK73GB2A471J	CHIP R	470	J	1/10W	
R151,152			RK73GB2A302J	CHIP R	3.0K	J	1/10W	
R153,154			RK73GB2A433J	CHIP R	43K	J	1/10W	
R155,156			RK73GB2A822J	CHIP R	8.2K	J	1/10W	
R157-160			RK73GB2A821J	CHIP R	820	J	1/10W	
R161,162			RK73GB2A101J	CHIP R	100	J	1/10W	
R163,164			RK73GB2A102J	CHIP R	1.0K	J	1/10W	

E1 : KAC-8401 (For Europe) **K** : KAC-8401 (For North America)
M1 : KAC-8401 (For Other Areas)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

AUDIO UNIT (X09-5610-10)

Ref. No.	Add	New	Parts No.	Description	Destination
R165,166			RK73GB2A433J	CHIP R 43K J 1/10W	
R167,168			RK73GB2A820J	CHIP R 82 J 1/10W	
R169-172			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R173,174			RK73GB2A431J	CHIP R 430 J 1/10W	
R175,176			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R177-180			RD14NB2E101J	RD 100 J 1/4W	
R181,182			RD14NB2E221J	RD 220 J 1/4W	
R183-186			RD14NB2E4R7J	RD 4.7 J 1/4W	
R187-190			R92-0205-05	METAL-PLATE 0.1 K 2W	
R191,192			RD14DB2H100J	SMALL-RD 10 J 1/2W	
R194-196			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R197			RD14BB2C301J	RD 300 J 1/6W	
R198			RK73GB2A153J	CHIP R 15K J 1/10W	
R199			RK73GB2A101J	CHIP R 100 J 1/10W	
R200			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R201,202			RD14BB2C102J	RD 1.0K J 1/6W	
R203-208			RK73GB2A103J	CHIP R 10K J 1/10W	
R209-212			RN73GH1J103D	CHIP R 10K D 1/16W	
R213-216			RK73GB2A823J	CHIP R 82K J 1/10W	
R217-220		✻	RK73EB2E513J	CHIP R 51K J 1/4W	
R221,222			RK73EB2E222J	CHIP R 2.2K J 1/4W	
R223-226			RN73GH1J103D	CHIP R 10K D 1/16W	
R227,228			RK73GB2A223J	CHIP R 22K J 1/10W	
R229-234			RK73GB2A103J	CHIP R 10K J 1/10W	
R235,236			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R237,238			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R239,240			RK73GB2A103J	CHIP R 10K J 1/10W	
R241,242			RK73GB2A163J	CHIP R 16K J 1/10W	
R243-246			RK73GB2A223J	CHIP R 22K J 1/10W	
R248			RK73GB2A153J	CHIP R 15K J 1/10W	
R249,250			RK73GB2A471J	CHIP R 470 J 1/10W	
R251,252			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R253,254			RK73GB2A433J	CHIP R 43K J 1/10W	
R255,256			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R257-260			RK73GB2A821J	CHIP R 820 J 1/10W	
R261,262			RK73GB2A101J	CHIP R 100 J 1/10W	
R263,264			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R265,266			RK73GB2A433J	CHIP R 43K J 1/10W	
R267,268			RK73GB2A820J	CHIP R 82 J 1/10W	
R269-272			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R273,274			RK73GB2A431J	CHIP R 430 J 1/10W	
R275,276			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R277-280			RD14NB2E101J	RD 100 J 1/4W	
R281,282			RD14NB2E221J	RD 220 J 1/4W	
R283-286			RD14NB2E4R7J	RD 4.7 J 1/4W	
R287-290			R92-0205-05	METAL-PLATE 0.1 K 2W	
R291,292			RD14DB2H100J	SMALL-RD 10 J 1/2W	
R294-296			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R297			RD14BB2C301J	RD 300 J 1/6W	
R298			RK73GB2A153J	CHIP R 15K J 1/10W	
R299			RK73GB2A101J	CHIP R 100 J 1/10W	
R301-306			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R307,308			RK73GB2A243J	CHIP R 24K J 1/10W	
R309,310			RK73GB2A301J	CHIP R 300 J 1/10W	
R311,312			RK73GB2A362J	CHIP R 3.6K J 1/10W	
R313,314			RK73GB2A112J	CHIP R 1.1K J 1/10W	
R315,316			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R317,318			RK73GB2A104J	CHIP R 100K J 1/10W	
R319,320			RK73GB2A223J	CHIP R 22K J 1/10W	
R321-324			RK73GB2A330J	CHIP R 33 J 1/10W	
R325-328			RD14BB2C152J	RD 1.5K J 1/6W	
R329-332			RK73GB2A102J	CHIP R 1.0K J 1/10W	
VR1,2			R31-0208-05	VARIABLE RESISTOR	
VR3,4			R31-0223-05	VARIABLE RESISTOR	
VR5-8			R12-0092-05	TRIMMING POT. (220)	
W501-543			R92-1252-05	CHIP R 0 OHM J 1/16W	
S1,2			S62-0842-05	SLIDE SWITCH	
S3,4			S31-2630-05	SLIDE SWITCH	
S5,6			S62-0842-05	SLIDE SWITCH	
D1			RM4ZLF-J1	DIODE	
D2			HZM7.5N(B2)	ZENER DIODE	
D2			MA3075-M	ZENER DIODE	
D3			HZM16N(B2)	ZENER DIODE	
D4			MA142WA	DIODE	
D5			1SS133	DIODE	
D6			HZM5.1N(B2)	ZENER DIODE	
D6			MA3051-M	ZENER DIODE	
D7			RD10JS(B)	ZENER DIODE	
D8			MA142WK	DIODE	
D9			RM4ZLF-J1	DIODE	
D10-12			1SS133	DIODE	
D14,15			1SS133	DIODE	
D16			FML22S	DIODE	
D17			FML22R	DIODE	
D18,19			HZM16N(B2)	ZENER DIODE	
D21			MA142WA	DIODE	
D22			MA142WK	DIODE	
D23-26			MA142WA	DIODE	
D27,28			MA142WK	DIODE	
D29			MA142WA	DIODE	
D31,32			MA142WK	DIODE	
D33-35			MA142WA	DIODE	
D38			MA142WA	DIODE	
D39-42			1SS133	DIODE	
D43			HZM10N(B1)	ZENER DIODE	
D43			MA3100-M	ZENER DIODE	
D100			MA3068WA	ZENER DIODE	
D101			MA142WK	DIODE	
D102			MA142WA	DIODE	
D200			MA3068WA	ZENER DIODE	
D201			MA142WK	DIODE	
D202			MA142WA	DIODE	
IC1-5			NJM2058M	ANALOGUE IC	
IC6			NJM4565M	ANALOGUE IC	
IC7			NJM2058M	ANALOGUE IC	
IC8			UPC494GS	ANALOGUE IC	
Q1,2			2SD1819A	TRANSISTOR	
Q3			2SA1534A(R,S)	TRANSISTOR	
Q4			2SB1218A	TRANSISTOR	

E1 : KAC-8401 (For Europe) **K** : KAC-8401 (For North America)
M1 : KAC-8401 (For Other Areas)

⚠ Indicates safety critical components.

KAC-8401

PARTS LIST / SPECIFICATIONS

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
Q5			2SC3940A(R,S)	TRANSISTOR	
Q6			2SC945(A)(Q,P)	TRANSISTOR	
Q7,8			2SD1819A	TRANSISTOR	
Q9,10			2SC945(A)(Q,P)	TRANSISTOR	
Q11,12			2SA733(A)(Q,P)	TRANSISTOR	
Q13-16			FKV550T	FET	
Q17			2SD2375	TRANSISTOR	
Q18			2SB1548(P)	TRANSISTOR	
Q20-22			2SD1819A	TRANSISTOR	
Q23			2SB1218A	TRANSISTOR	
Q24			2SD1819A	TRANSISTOR	
Q25,26			2SC945(A)(Q,P)	TRANSISTOR	
Q27			2SC1845(F,E)	TRANSISTOR	
Q28,29			2SA992(F,E)	TRANSISTOR	
Q30			2SC1845(F,E)	TRANSISTOR	
Q31,32			2SC945(A)(Q,P)	TRANSISTOR	
Q33			2SC1845(F,E)	TRANSISTOR	
Q34,35			2SA992(F,E)	TRANSISTOR	
Q36			2SC1845(F,E)	TRANSISTOR	
Q101-104			2SA733(A)(Q,P)	TRANSISTOR	
Q105-108			2SC1845(F,E)	TRANSISTOR	
Q109,110			2SC4137(V,W)	TRANSISTOR	
Q111,112			2SC1627A	TRANSISTOR	
Q113,114			2SA817A	TRANSISTOR	
Q115,116			2SC4468	TRANSISTOR	
Q117,118			2SA1695	TRANSISTOR	
Q201-204			2SA733(A)(Q,P)	TRANSISTOR	
Q205-208			2SC1845(F,E)	TRANSISTOR	
Q209,210			2SC4137(V,W)	TRANSISTOR	
Q211,212			2SC1627A	TRANSISTOR	
Q213,214			2SA817A	TRANSISTOR	
Q215,216			2SC4468	TRANSISTOR	
Q217,218			2SA1695	TRANSISTOR	
TH1			PTH9L04BD222TS	POSITIVE RESISTOR	
TH3			PTH9M04BD222T	POSITIVE RESISTOR	

E1 : KAC-8401 (For Europe)
K : KAC-8401 (For North America)
M1 : KAC-8401 (For Other Areas)

⚠ Indicates safety critical components.

Audio Section

Max Power Output ..... 320W x 2
Rated Power Output
Normal (4Ω) (20Hz~20kHz, 0.08% THD) ..... 60W x 4
(4Ω) (DIN : 45324 , +B=14.4V) ..... 60W x 4
(2Ω) (1kHz, 0.8% THD) ..... 90W x 4
Bridged (4Ω) (1kHz, 0.8% THD) ..... 180W x 2
Frequency Response (+0, –3dB) ..... 5Hz~50kHz
Sensitivity (rated output) (MAX.) 0.2V
Sensitivity (rated output) (MIN.) 5.0V
Signal to Noise Ratio 100dB
Input Impedance 10kΩ
Low Pass Filter Frequency (12dB/oct.) ..... 50~200Hz (variable)
High Pass Filter Frequency (12dB/oct.) ..... 50~200Hz (variable)
Bass Boost Circuit (90Hz) ..... OFF/+6dB

General

Operating Voltage ..... 14.4V (11~16V allowable)
Current Consumption (4Ω, 10% THD) 39A
Dimensions (W x H x D) ..... 285 x 57 x 268 mm
11-1/4 x 2-1/4 x 10-9/16 inch
Weight ..... 2.96kg (6.5 lbs)

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

KENWOOD CORPORATION
2967-3, Ishikawa-machi, Hachioji-shi, Tokyo 192-8525, Japan

KENWOOD USA CORPORATION
P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.
P.O. Box 55-2791 Paitilla, Plaza Credicorp Bank Panama,
Piso 9, Oficina 901, Calle 50, Panama, Rep. de Panama

KENWOOD ELECTRONICS BRASIL LTDA.
Alameda Ministro Rocha Azevedo No. 456,
Edificio Jaú, 10o Andar, Cerqueira César, Cep 0140-001,
São Paulo-SP-Brasil

KENWOOD ELECTRONICS UK LIMITED
Kenwood House, Dwight Road, Watford, Herts, WD18 9EB, United Kingdom

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker-Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.
13, Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS BELGIUM N.V.
Leuvensesteenweg 248 J, 1800 Vilvoorde, Belgium

KENWOOD ELECTRONICS ITALIA S.p.A.
Via G. Sirtori 7/9, 20129 Milano, Italy

KENWOOD IBÉRICA S.A.
Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)
16 Giffnock Avenue, Centrecourt Estate, North Ryde,
N.S.W. 2113, Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.
Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T.,
Hong Kong

KENWOOD ELECTRONICS GULF FZE
P.O. Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS (THAILAND) CO., LTD.
2019 New Pechburi Road, Bangkapi, Huaykwang, Bangkok, 10320 Thailand

KENWOOD ELECTRONICS SINGAPORE PTE. LTD.
1 Genting Lane, #07-00, Kenwood Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD
#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1, 46300 Petaling Jaya, Selangor Darul Ehsan,
Malaysia