


COMPONENTS

PE-3419B-A/K-B

1. Source unit		1
2. Extension lead	854-6487-50	1
3. Parts bag		1
3-1. Screw(M5x8)	716-0496-51	8
3-2. Machine Screw(M5x8)	714-5008-4B	8
3-3. Finisher	383-0591-00	1
3-4. Spacer	340-1581-00	8
3-5. Double face	347-3913-20	2
4. Remote control unit(PE-3419B-A)	RCB-176-600	1
(including battery CR2025)		

CAUTION

Use of controls, adjustments, or performance of procedures other than those specified herein, may result in hazardous radiation exposure. The compact disc player should not be adjusted or repaired by anyone except properly qualified service personnel.



Bottom view of PE-3419B-A

ERROR DISPLAYS

If an error occurs, one of the following displays is displayed. Take the measures described below to eliminate the problem.


	Error Display	Cause	Measure
CD/MP3/WMA	ERROR 2	A CD is caught inside the CD deck and is not ejected.	This is a failure of CD deck's mechanism.
	ERROR 3	A CD cannot be played due to scratches, etc.	Replace with a non-scratched, non-warped disc.
	ERROR 6	A CD is loaded upside-down inside the CD deck and does not play.	Eject the disc then reload it properly.
USB/iPod	ERROR 7 (iPod mode)	The connected iPod is not recognized.	Disconnect and reconnect the iPod.
	ERROR 7	Overcurrent detection.	Disconnect the devices and reconnect. If the devices are still not recognized, try replacing with a different devices.
	ERROR 7	Do not support the HUB devices.	Do not use the HUB devices.

* If an error display other than the ones described above appears, press the reset button.

* iPhone can also be connected to this system and "iPod" appearing in this manual should be referred to as "iPod/iPhone".

EXPLODED VIEW / PARTS LIST


Escutcheon section

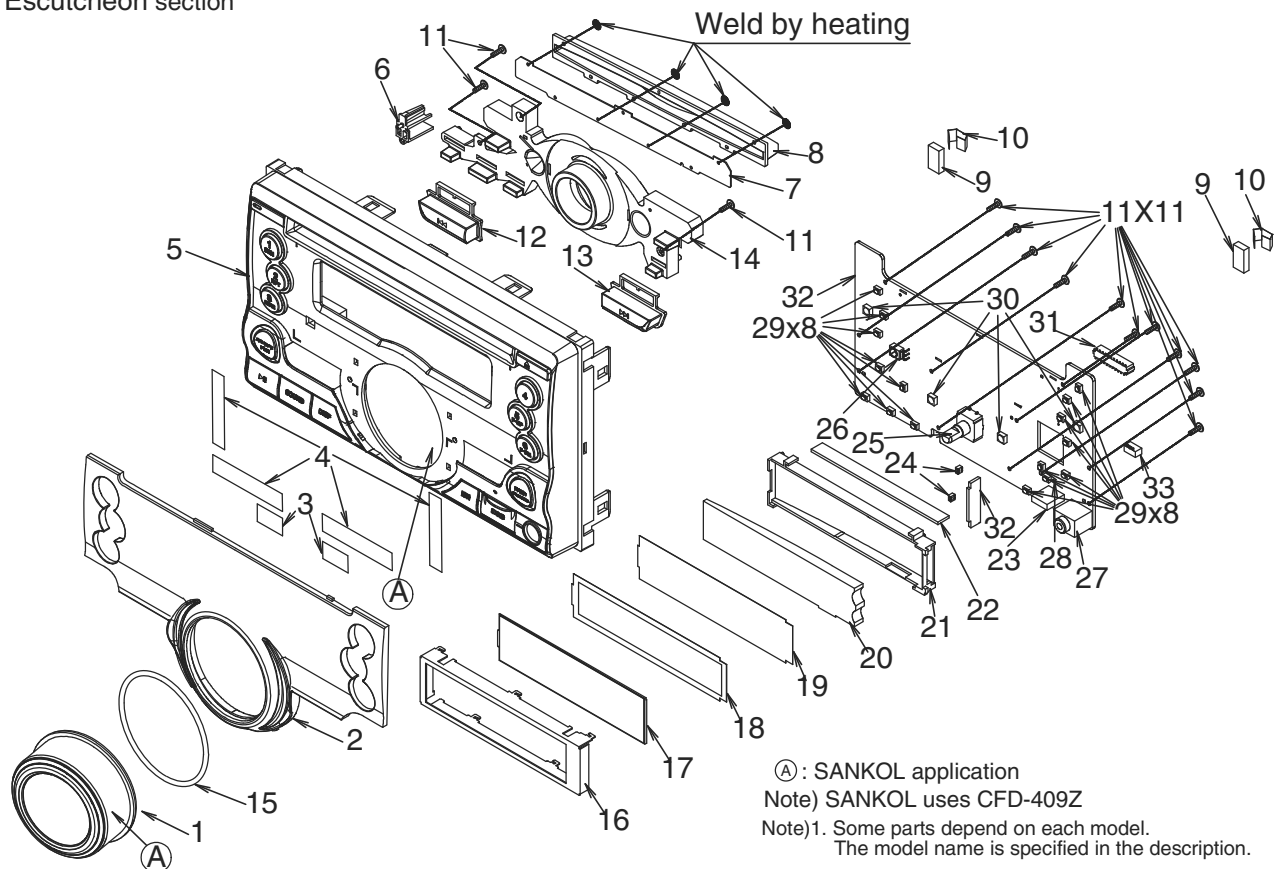

NO.	PART NO.	DESCRIPTION	Q'TY
1	947-0785-00	KNOB ASSY	1
2	947-0784-00	DIAL ASSY	1
3	347-8918-00	DOUBLE FACE	2
4	347-8298-00	DOUBLE FACE	4
5	940-8602-05	ES ASSY(PE-3419B-A)	1
	940-8602-06	ES ASSY(PE-3419K-B)	1
6	382-9582-00	BUTTON(RESET)	1
7	346-0209-00	LEATHER SHEET	1
8	371-3827-03	TRIM PLATE	1
9	345-5312-00	CUSHION	2
10	347-7321-00	E-SHEET	2
11	716-0872-51	SCREW(M1.7x5)	14
12	382-9580-00	BUTTON(FW)	1
13	382-9579-00	BUTTON(FF)	1
14	335-9044-00	ILLUMI(MID)	1
15	347-8968-00	FILM	1
16	331-5080-00	LCD COVER	1
17	379-1457-51	INDICATOR(LCD)	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	347-8922-00	BLACK FILM	1
19	347-8921-00	WHITE FILM	1
20	335-9037-00	LCD ILLUMI	1
21	335-9038-00	LCD HOLDER	1
22	345-6526-00	RUBBER PART	1
23	074-4036-50	USB JACK	1
24	001-7114-91	DIODE	2
25	016-9900-94	VR W/SHAFT	1
26	060-4021-00	IR-RECEIVER	1
27	075-9021-50	AUX JACK	1
28	001-7062-90	DIODE	1
29	013-6312-50	TACT SWITCH	16
30	001-7097-91	DIODE	4
31	074-3014-72	OUTLET SOCKET(22P)	1
32	-----	SWITCH PWB1	1
	-----	SWITCH PWB2	1
33	076-0502-55	PLUG(5P)	1

Main section

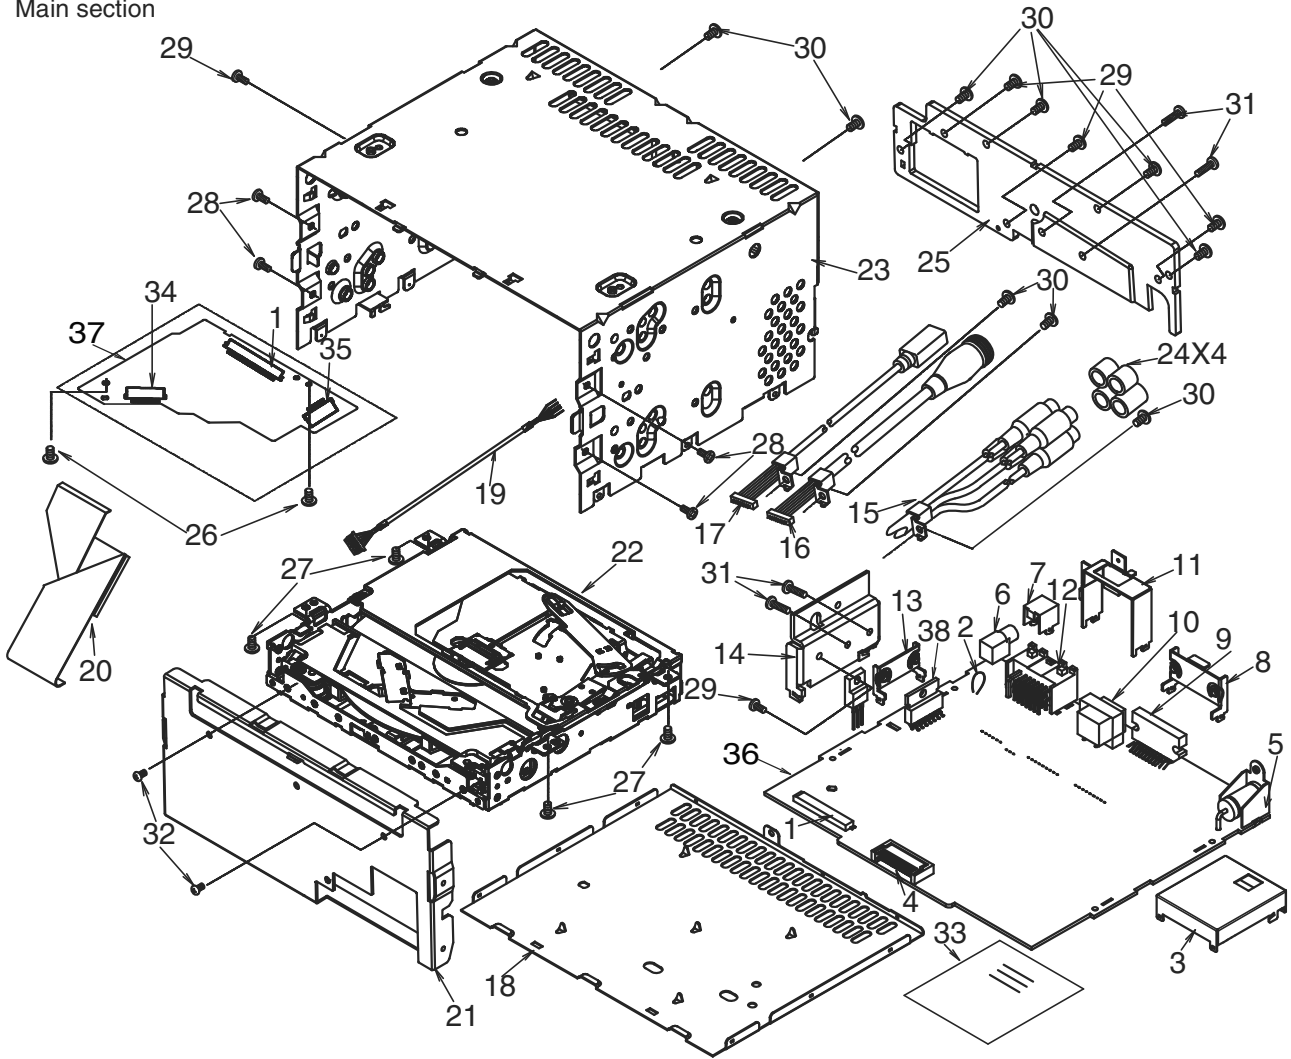

NO.	PART NO.	DESCRIPTION	Q'TY
1	074-2226-90	OUTLET SOCKET(40P)	2
2	321-0969-00	CLAMP(PE-3419B-A)	1
3	331-4794-00	TUNER BRKT	1
4	076-0648-22	PLUG(22P)	1
5	092-4000-51	ANT-RECEPT	1
6	075-0393-50	JACK	1
7	331-4533-00	JACK HOLDER	1
8	331-3459-00	IC HOLDER	1
9	051-2074-00	IC	1
10	009-9006-60	CHOK	1
11	331-4749-01	CONNECTOR HOLD	1
12	074-1214-50	OUTLET SOCKET	1
13	331-5081-00	IC HOLDER	1
14	313-2039-03	HEAT SINK	1
15	855-5585-50	RCA PIN CORD(4CH)	1
16	855-2508-50	SSP MINI DIN CORD(PE-3419B-A)	1
17	855-2507-50	HD MINI DIN CORD(PE-3419B-A)	1
18	311-1859-08	LOWER CASE	1
19	854-4620-50	USB LEAD	1
20	816-3063-55	FLAT WIRE	1

NO.	PART NO.	DESCRIPTION	Q'TY
21	331-4637-02	ES PLATE	1
22	929-5110-80	CD-MECH-MODULE	1
23	310-1973-00	UPPER CASE	1
24	345-3799-20	RUBBER PART	4
25	313-2006-14	HEAT SINK	1
26	716-1670-01	SCREW(M2X4)	2
27	714-2603-8B	MACHINE SCREW(M2.6x3)	4
28	714-2606-8B	MACHINE SCREW(M2.6x6)	4
29	714-3006-8B	MACHINE SCREW(M3x6)	5
30	731-3008-89	TAPTIGHT(M3X8)	9
31	714-2610-8B	MACHINE SCREW(M2.6x10)	4
32	731-2604-8H	TAPTIGHT(M2.6X4)	2
33	276-0858-00	SETPLATE(PE-3419B-A)	1
	276-0859-00	SETPLATE(PE-3419K-B)	1
34	074-2215-65	OUTLET SOCKET(15P)	1
35	074-2215-60	OUTLET SOCKET(10P)	1
36	-----	MAIN PWB	1
37	-----	CD PWB	1
38	051-3730-00	IC	1

ELECTRICAL PARTS LIST

Note)1. Some parts depend on each model.
The model name is specified in the description.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT201	092-4000-51	ANTENNA RECEP	C214	168-1052-78	16V 1uF	D121	001-0466-61	1A4
C101	187-1073-35	16V 100uF	C215	168-1032-55	0.01uF K	D160	001-1310-00	KDS160-RTK
C102	187-1073-35	16V 100uF	C216	168-1032-55	0.01uF K	D203	001-2630-90	1SS420-TPL3,F
C103	043-1735-90	100pF CH	C217	168-1042-78	16V 0.1uF	D303	001-4316-17	LM3Z4V3T1G
C104	043-1835-90	3900pF	C218	168-2242-58	0.22uF B	D401	001-4316-24	LM3Z8V2T1G
C105	043-1619-90	0.068uF	C219	168-2232-55	0.022uF K	D403	001-1310-00	KDS160-RTK
C106	168-1022-55	1000pF K	C220	177-1062-78	10pF	D404	001-1310-00	KDS160-RTK
C107	043-1735-90	100pF CH	C221	168-1042-78	16V 0.1uF	D405	001-1310-00	KDS160-RTK
C108	189-1083-32	16V 1000uF	C222	168-1042-78	16V 0.1uF	D406	001-0592-61	1N5404
C109	043-1719-90	22pF CH	C223	166-1201-50	12pF CH	IC101	-----	LC88F40HOPAU-QIP
C110	043-1802-90	0.01uF	C247	166-1201-50	12pF CH			(Software should
C111	043-1719-90	22pF CH	C249	168-1042-78	16V 0.1uF			be wrritten on
C112	042-1577-00	6.3V 100uF	C301	043-1838-90	4700pF			production)
C113	168-1042-78	16V 0.1uF	C302	043-1841-90	0.047uF			(034900-052)
C114	168-3332-78	0.033uF K	C303	043-1838-90	4700pF	IC102	051-3218-90	TA76431F
C115	168-1042-78	16V 0.1uF	C304	187-1063-35	16V 10uF	IC103	-----	24LC256I-SN
C116	187-1073-35	16V 100uF	C305	187-1063-35	16V 10uF			(E2PROM Data
C117	043-1802-90	0.01uF	C308	187-1053-65	50V 1uF			should be wrritten
C118	043-1802-90	0.01uF	C309	187-1053-65	50V 1uF			on production)
C119	043-1800-90	1000pF	C310	187-1053-65	50V 1uF			(942990-051)
C120	168-1032-55	0.01uF K	C311	187-1053-65	50V 1uF	IC104	051-5438-08	S-80830CN
C121	187-2253-65	50V 2.2uF	C314	187-1063-35	16V 10uF	IC105	051-5437-58	R3111N211A
C123	043-1804-90	0.1uF	C315	187-1063-35	16V 10uF	IC106	051-3535-90	MM3144ANRE
C124	187-2273-15	6.3V 220uF	C320	043-1804-90	0.1uF	IC107	051-3730-00	LV5680P
C125	043-1735-90	100pF CH	C321	043-1804-90	0.1uF	IC108	051-3577-90	S-1206B33-U3TIG
C126	187-1063-35	16V 10uF	C322	187-4763-15	6.3V 47uF	IC201	051-4028-90	TEF6606
C127	187-2253-65	50V 2.2uF	C325	043-1804-90	0.1uF	IC301	051-3060-90	AZ4558M
C128	187-1063-35	16V 10uF	C326	043-1804-90	0.1uF	IC302	051-5048-90	NJW1222
C129	187-1053-65	50V 1uF	C327	043-1804-90	0.1uF	IC402	051-2074-00	LV47017P
C130	043-1735-90	100pF CH	C328	043-1804-90	0.1uF	J100	075-0393-50	3P
C131	043-1841-90	0.047uF	C329	187-1063-35	16V 10uF	J102	076-0648-22	22P
C132	043-1804-90	0.1uF	C330	043-1804-90	0.1uF	J105	074-2226-90	40P
C133	187-1073-35	16V 100uF	C331	043-1800-90	1000pF	J401	074-1214-50	16P
C134	187-1073-35	16V 100uF	C337	043-1804-90	0.1uF	L102	010-3100-66	2.2uH
C135	187-3363-45	25V 33uF	C338	187-4763-35	16V 47uF	L103	010-3100-66	2.2uH
C136	187-1063-35	16V 10uF	C339	043-1735-90	100pF CH	L104	010-3100-66	2.2uH
C138	187-1063-35	16V 10uF	C340	043-1735-90	100pF CH	L105	010-3407-59	5.6uH J
C139	187-1063-35	16V 10uF	C341	187-1053-65	50V 1uF	L106	010-3105-67	1.5k ohm/100kHz
C140	168-2242-58	0.22uF B	C342	187-1053-65	50V 1uF	L201	010-2003-04	30uH
C141	043-1804-90	0.1uF	C343	043-1735-90	100pF CH	L202	010-3406-50	1uH J
C145	043-1802-90	0.01uF	C344	043-1735-90	100pF CH	L203	010-3406-53	1.8uH J
C147	187-1053-65	50V 1uF	C345	043-1735-90	100pF CH	L204	010-3406-43	0.27uH J
C148	043-1804-90	0.1uF	C346	043-1735-90	100pF CH	L205	010-3062-54	LQH31HNR2
C149	043-1804-90	0.1uF	C409	178-4742-78	0.47uF	L206	010-4054-00	#886ANS-0904QH
C150	043-1804-90	0.1uF	C410	178-4742-78	0.47uF	L207	010-3072-90	560uH
C151	165-1063-35	16V 10uF	C411	178-4742-78	0.47uF	L208	010-3072-90	560uH
C152	043-1804-90	0.1uF	C412	178-4742-78	0.47uF	L209	010-3105-62	1k ohm/100MHz
C153	168-2242-58	0.22uF B	C415	187-1063-35	16V 10uF	L210	010-3105-62	1k ohm/100MHz
C154	187-1063-35	16V 10uF	C417	187-1063-35	16V 10uF	L213	010-3407-58	4.7uH J
C156	168-2242-58	0.22uF B	C418	187-1063-35	16V 10uF	L214	010-2198-87	82NH
C157	187-1063-35	16V 10uF	C419	187-1063-35	16V 10uF	L302	010-3105-62	1k ohm/100MHz
C158	168-2242-58	0.22uF B	C420	187-2263-35	16V 22uF	Q101	125-9017-92	UMD3N-TR
C159	168-2242-58	0.22uF B	C421	043-1735-90	100pF CH	Q102	103-2394-00	2SD2394
C160	187-1063-35	16V 10uF	C422	043-1735-90	100pF CH	Q104	190-1576-00	2SA1576A
C161	168-2242-58	0.22uF B	C423	043-1735-90	100pF CH	Q105	125-2027-92	DTC124EUA
C162	165-1063-35	16V 10uF	C424	043-1735-90	100pF CH	Q106	125-3015-90	3CG1298
C201	166-2096-50	2pF CK	C425	178-4742-78	0.47uF	Q109	125-2027-91	DTC114EUA
C202	166-2201-50	22pF CH	C426	187-1053-65	50V 1uF	Q110	125-0021-92	DTA124EUA
C203	168-1022-55	1000pF K	C427	172-1041-11	0.1uF	Q111	125-4024-90	3DG3875
C204	168-1022-55	1000pF K	C428	042-1447-00	16V 2200uF	Q112	125-2041-93	RT1N241M
C205	166-1201-50	12pF CH	D100	001-4301-41	HZU 7.5B2	Q113	125-4024-90	3DG3875
C206	168-1032-55	0.01uF K	D101	001-1323-00	L1SS355T1G	Q114	190-1576-00	2SA1576A
C207	168-1032-55	0.01uF K	D106	001-1310-00	KDS160-RTK	Q115	131-1260-00	2SB1260
C208	168-1052-78	16V 1uF	D107	001-4301-26	HZU4.7B2	Q116	125-2027-92	DTC124EUA
C209	168-2242-58	0.22uF B	D109	001-0466-61	1A4	Q117	125-0021-95	DTA143ZUA-T106
C210	166-1501-50	15pF CH	D110	001-4301-26	HZU4.7B2	Q118	125-2027-92	DTC124EUA
C211	166-3901-50	39pF CH	D111	001-0466-61	1A4	Q120	190-1576-00	2SA1576A
C212	168-2242-58	0.22uF B	D112	001-1310-00	KDS160-RTK	Q123	131-1260-00	2SB1260
C213	168-1042-78	16V 0.1uF	D113	001-1310-00	KDS160-RTK	Q124	125-2041-93	RT1N241M

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q401	198-3018-00	2SK3018	R141	032-0140-52	1/10W 33k ohm F	R302	119-1041-15	1/10W 100k ohm
Q403	192-4081-00	2SC4081	R142	032-0215-58	1/10W 24k ohm(F)	R303	119-4721-15	1/10W 4.7k ohm
Q404	125-2027-95	DTC143ZU	R143	032-0140-80	1/10W 18k ohm F	R304	119-4721-15	1/10W 4.7k ohm
Q405	125-0021-95	DTA143ZUA-T106	R144	119-4731-15	1/10W 47k ohm	R305	119-1021-15	1/10W 1k ohm
Q406	125-2198-90	KRC110S	R145	116-1521-15	1/4W 1.5k ohm	R306	119-1021-15	1/10W 1k ohm
Q409	125-4012-90	KTD1304	R146	119-4731-15	1/10W 47k ohm	R307	119-1021-15	1/10W 1k ohm
Q410	125-4012-90	KTD1304	R147	119-4731-15	1/10W 47k ohm	R308	032-0140-89	1/10W 47k ohm F
Q411	125-4012-90	KTD1304	R148	116-1521-15	1/4W 1.5k ohm	R309	032-0140-89	1/10W 47k ohm F
Q412	125-4012-90	KTD1304	R149	116-4721-15	1/4W 4.7k ohm	R311	032-0140-89	1/10W 47k ohm F
Q413	125-2027-95	DTC143ZU	R150	119-1031-15	1/10W 10k ohm	R312	032-0140-89	1/10W 47k ohm F
Q417	192-4081-00	2SC4081	R151	119-6831-15	1/10W 68k ohm	R316	032-0140-89	1/10W 47k ohm F
R3	032-0140-70	1/10W 1.8k ohm F	R152	119-4721-15	1/10W 4.7k ohm	R317	032-0140-89	1/10W 47k ohm F
R12	033-0000-05	1/10W 0 ohm	R153	119-1031-15	1/10W 10k ohm	R322	032-0140-89	1/10W 47k ohm F
R13	119-5631-15	1/10W 56k ohm	R171	119-6831-15	1/10W 68k ohm	R325	032-0140-89	1/10W 47k ohm F
R14	119-1541-15	1/10W 150k ohm	R172	119-4731-15	1/10W 47k ohm	R326	119-3311-15	1/10W 330 ohm
R101	116-6811-15	1/4W 680 ohm	R174	119-1021-15	1/10W 1k ohm	R329	119-1011-15	1/10W 100 ohm
R102	116-6811-15	1/4W 680 ohm	R175	119-0000-05	1/10W 0 ohm JW	R330	119-1011-15	1/10W 100 ohm
R103	119-0000-05	1/10W 0 ohm JW	R176	119-0000-05	1/10W 0 ohm JW	R331	119-1011-15	1/10W 100 ohm
R104	119-1031-15	1/10W 10k ohm	R177	119-0000-05	1/10W 0 ohm JW	R332	119-1011-15	1/10W 100 ohm
R105	119-1041-15	1/10W 100k ohm	R178	119-0000-05	1/10W 0 ohm JW	R333	119-1011-15	1/10W 100 ohm
R106	119-1031-15	1/10W 10k ohm	R181	119-0000-05	1/10W 0 ohm JW	R334	119-1011-15	1/10W 100 ohm
R107	119-1811-15	1/10W 180 ohm	R184	119-0000-05	1/10W 0 ohm JW	R337	119-0000-05	1/10W 0 ohm JW
R108	119-4721-15	1/10W 4.7k ohm	R187	116-1521-15	1/4W 1.5k ohm	R338	119-0000-05	1/10W 0 ohm JW
R109	119-1811-15	1/10W 180 ohm	R188	119-1031-15	1/10W 10k ohm	R404	119-4721-15	1/10W 4.7k ohm
R110	119-1031-15	1/10W 10k ohm	R192	119-1031-15	1/10W 10k ohm	R406	119-1021-15	1/10W 1k ohm
R111	119-1031-15	1/10W 10k ohm	R193	119-4721-15	1/10W 4.7k ohm	R407	119-8221-15	1/10W 8.2k ohm
R112	119-2221-15	1/10W 2.2k ohm	R194	119-0000-05	1/10W 0 ohm JW	R408	119-1021-15	1/10W 1k ohm
R113	032-0140-54	1/10W 22k ohm F	R195	119-0000-05	1/10W 0 ohm JW	R409	119-2231-15	1/10W 22k ohm
R114	119-1031-15	1/10W 10k ohm	R196	119-4721-15	1/10W 4.7k ohm	R411	119-4711-15	1/10W 470 ohm
R115	032-0140-54	1/10W 22k ohm F	R197	119-1041-15	1/10W 100k ohm	R412	119-1031-15	1/10W 10k ohm
R116	119-5641-15	1/10W 560k ohm	R198	119-1031-15	1/10W 10k ohm	R415	119-2231-15	1/10W 22k ohm
R118	119-4721-15	1/10W 4.7k ohm	R199	119-1031-15	1/10W 10k ohm	R416	119-2231-15	1/10W 22k ohm
R120	119-4731-15	1/10W 47k ohm	R200	119-1041-15	1/10W 100k ohm	R417	119-2231-15	1/10W 22k ohm
R121	119-1031-15	1/10W 10k ohm	R201	119-4741-15	1/10W 470k ohm	R418	119-2231-15	1/10W 22k ohm
R122	119-1031-15	1/10W 10k ohm	R202	119-4741-15	1/10W 470k ohm	R420	119-3311-15	1/10W 330 ohm
R123	119-1811-15	1/10W 180 ohm	R203	119-1011-15	1/10W 100 ohm	R421	119-3311-15	1/10W 330 ohm
R126	119-2221-15	1/10W 2.2k ohm	R204	119-0000-05	1/10W 0 ohm JW	R422	119-3311-15	1/10W 330 ohm
R127	119-1031-15	1/10W 10k ohm	R206	119-0000-05	1/10W 0 ohm JW	R424	119-3311-15	1/10W 330 ohm
R128	119-2231-15	1/10W 22k ohm	R207	119-0000-05	1/10W 0 ohm JW	R426	119-1021-15	1/10W 1k ohm
R129	119-1031-15	1/10W 10k ohm	R208	119-4721-15	1/10W 4.7k ohm	R427	119-1021-15	1/10W 1k ohm
R130	119-1031-15	1/10W 10k ohm	R209	116-2201-15	1/4W 22 ohm	R428	119-1031-15	1/10W 10k ohm
R131	119-1031-15	1/10W 10k ohm	R210	119-1011-15	1/10W 100 ohm	R429	116-4721-15	1/4W 4.7k ohm
R132	119-3321-15	1/10W 3.3k ohm	R211	119-1011-15	1/10W 100 ohm	R430	119-6831-15	1/10W 68k ohm
R133	032-0140-56	1/10W 12k ohm F	R229	119-0000-05	1/10W 0 ohm JW	R431	119-1041-15	1/10W 100k ohm
R134	119-2241-15	1/10W 220k ohm	R235	119-0000-05	1/10W 0 ohm JW	R445	119-4731-15	1/10W 47k ohm
R135	032-0215-59	1/10W 3.9k ohm(F)	R272	119-0000-05	1/10W 0 ohm JW	SUP202	060-0122-20	DSP-141N-S00B
R136	119-1031-15	1/10W 10k ohm	R274	119-0000-05	1/10W 0 ohm JW	T401	009-9006-60	CHOKE 0.23mH
R137	119-1041-15	1/10W 100k ohm	R275	119-0000-05	1/10W 0 ohm JW	X101	061-1056-00	32.768kHz
R138	119-2241-15	1/10W 220k ohm	R276	119-0000-05	1/10W 0 ohm JW	X202	061-3031-00	4.00MHz
R139	119-5621-15	1/10W 5.6k ohm	R277	119-0000-05	1/10W 0 ohm JW	PWB	039-3740-00	PWB(WITHOUT COMPONENT)
R140	119-2231-15	1/10W 22k ohm	R301	119-1041-15	1/10W 100k ohm			

The parts for PE-3419K-B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C248	187-1073-35	16V 100uF	R185	119-1031-15	1/10W 10k ohm	R279	119-0000-05	1/10W 0 ohm JW
R173	119-1031-15	1/10W 10k ohm	R186	119-1031-15	1/10W 10k ohm			

The parts for PE-3419B-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C233	043-1608-90	0.1uF	Q201	125-2027-95	DTC143ZU	R245	032-0140-89	1/10W 47k ohm F
C234	043-1841-90	0.047uF	Q202	191-1197-50	2SB1197K Q,R	R246	032-0140-89	1/10W 47k ohm F
C235	043-1841-90	0.047uF	Q203	125-4024-90	3DG3875	R247	032-0140-89	1/10W 47k ohm F
C236	187-1063-35	16V 10uF	Q204	125-4024-90	3DG3875	R248	032-0140-89	1/10W 47k ohm F
C237	187-1063-35	16V 10uF	Q205	125-2027-92	DTC124EUA	R249	032-0140-89	1/10W 47k ohm F
C238	187-1063-35	16V 10uF	Q206	125-3005-90	KTA1273	R250	032-0140-89	1/10W 47k ohm F
C239	187-1063-35	16V 10uF	R218	119-3321-15	1/10W 3.3k ohm	R251	032-0140-89	1/10W 47k ohm F
C240	187-1063-35	16V 10uF	R219	119-1031-15	1/10W 10k ohm	R252	032-0140-63	1/10W 27k ohm F
C241	187-1063-35	16V 10uF	R220	119-1821-15	1/10W 1.8k ohm	R253	032-0140-63	1/10W 27k ohm F
C242	187-1063-35	16V 10uF	R221	119-4731-15	1/10W 47k ohm	R254	032-0140-89	1/10W 47k ohm F
C243	187-1063-35	16V 10uF	R224	119-1011-15	1/10W 100 ohm	R255	032-0140-89	1/10W 47k ohm F
C244	189-1083-32	16V 1000uF	R225	119-1021-15	1/10W 1k ohm	R256	032-0140-63	1/10W 27k ohm F
C245	165-1073-35	16V 100uF	R226	119-1021-15	1/10W 1k ohm	R257	032-0140-63	1/10W 27k ohm F
C306	187-1053-65	50V 1uF	R227	119-1031-15	1/10W 10k ohm	R258	119-1011-15	1/10W 100 ohm
C307	187-1053-65	50V 1uF	R228	119-1031-15	1/10W 10k ohm	R259	119-1011-15	1/10W 100 ohm
C312	187-1053-65	50V 1uF	R230	119-0000-05	1/10W 0 ohm JW	R261	119-4731-15	1/10W 47k ohm
C313	187-1053-65	50V 1uF	R231	119-0000-05	1/10W 0 ohm JW	R262	119-1031-15	1/10W 10k ohm
D200	001-4301-29	HZU 5.1B2	R234	119-6831-15	1/10W 68k ohm	R263	119-0000-05	1/10W 0 ohm JW
D201	001-4301-29	HZU 5.1B2	R236	119-1041-15	1/10W 100k ohm	R264	119-1031-15	1/10W 10k ohm
D202	001-1310-00	KDS160-RTK	R237	119-1041-15	1/10W 100k ohm	R265	119-1031-15	1/10W 10k ohm
D301	001-4301-29	HZU 5.1B2	R238	119-1021-15	1/10W 1k ohm	R266	119-4721-15	1/10W 4.7k ohm
D304	001-4301-29	HZU 5.1B2	R239	119-1041-15	1/10W 100k ohm	R267	119-1531-15	1/10W 15k ohm
F301	060-0108-90	1/6ZP 0 ohm JW	R240	119-1021-15	1/10W 1k ohm	R268	119-1021-15	1/10W 1k ohm
F302	060-8056-93	CCP2E20HTTE	R241	119-1041-15	1/10W 100k ohm	R270	116-1521-15	1/4W 1.5k ohm
IC204	051-7538-90	SN74LVC3G17DCTR	R242	032-0140-89	1/10W 47k ohm F	R271	116-1521-15	1/4W 1.5k ohm
IC205	051-3060-90	AZ4558M	R243	032-0140-89	1/10W 47k ohm F	R281	119-1031-15	1/10W 10k ohm
IC206	051-3060-90	AZ4558M	R244	032-0140-89	1/10W 47k ohm F			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	043-1802-90	0.01uF	J702	075-9021-50	YW1310E431	R956	119-1821-15	1/10W 1.8k ohm
C902	043-1804-90	0.1uF	J901	074-3014-72	22P	R957	119-1821-15	1/10W 1.8k ohm
C903	043-1804-90	0.1uF	J904	074-4036-50	4P	R964	119-1821-15	1/10W 1.8k ohm
C904	043-1804-90	0.1uF	LCD901	379-1457-51	(INDICATORLCD)	R965	119-1821-15	1/10W 1.8k ohm
C905	043-1804-90	0.1uF	P904	076-0502-55	5P	R976	119-1821-15	1/10W 1.8k ohm
C906	043-1804-90	0.1uF	Q903	193-1781-50	2SC3440	R977	119-1821-15	1/10W 1.8k ohm
C907	043-1804-90	0.1uF	Q904	125-2027-95	DTC143ZU	R999	119-0000-05	1/10W 0 ohm JW
C908	043-0603-90	16V 10uF	R903	119-4711-15	1/10W 470 ohm	S901	013-6312-50	SKRP-ABE-010
C909	043-0603-90	16V 10uF	R904	119-2211-15	1/10W 220 ohm	S902	013-6312-50	SKRP-ABE-010
C910	043-0603-90	16V 10uF	R905	119-1241-15	1/10W 120k ohm	S903	013-6312-50	SKRP-ABE-010
C911	043-1808-90	1200pF	R906	119-4721-15	1/10W 4.7k ohm	S920	013-6312-50	SKRP-ABE-010
C912	043-1808-90	1200pF	R907	119-1021-15	1/10W 1k ohm	S922	013-6312-50	SKRP-ABE-010
C914	043-1804-90	0.1uF	R908	119-2711-15	1/10W 270 ohm	S923	013-6312-50	SKRP-ABE-010
D909	001-4301-43	HZU8.2B1	R910	119-1021-15	1/10W 1k ohm	S924	013-6312-50	SKRP-ABE-010
D910	001-4301-29	HZU 5.1B2	R911	119-1041-15	1/10W 100k ohm	S926	013-6312-50	SKRP-ABE-010
D911	001-7114-91	DIODE	R912	119-1031-15	1/10W 10k ohm	S927	013-6312-50	SKRP-ABE-010
D912	001-7097-92	DIODE	R913	119-1031-15	1/10W 10k ohm	S928	013-6312-50	SKRP-ABE-010
D913	001-7097-92	DIODE	R914	119-3921-15	1/10W 3.9k ohm	S930	013-6312-50	SKRP-ABE-010
D914	001-7097-92	DIODE	R915	119-1011-15	1/10W 100 ohm	S931	013-6312-50	SKRP-ABE-010
D915	001-7097-92	DIODE	R928	119-3311-15	1/10W 330 ohm	S932	013-6312-50	SKRP-ABE-010
D916	001-7114-91	DIODE	R929	119-1031-15	1/10W 10k ohm	S936	013-6312-50	SKRP-ABE-010
D918	001-2601-90	MA728-TX	R936	119-1821-15	1/10W 1.8k ohm	S938	013-6312-50	SKRP-ABE-010
D919	001-1323-90	L1SS355T1G	R937	119-1821-15	1/10W 1.8k ohm	S939	013-6312-50	SKRP-ABE-010
D931	001-0584-21	MA8062	R946	119-1821-15	1/10W 1.8k ohm	VR901	016-9900-94	VR W/SHAFT
D934	001-7062-90	RBR1111C	R947	119-1821-15	1/10W 1.8k ohm	PWB	039-3854-00	PWB(WITHOUT COMPONENT)
IC901	051-6089-00	NJU6539FG1	R952	119-1821-15	1/10W 1.8k ohm			
IR901	060-4021-00	GPIUX51	R953	119-1821-15	1/10W 1.8k ohm			

CD PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C501	043-1608-90	0.1uF	C547	043-1706-90	5pF	R521	033-1021-15	1/10W 1k ohm
C502	165-1073-35	16V 100uF	C548	043-1706-90	5pF	R522	033-0000-05	1/10W 0 ohm
C503	043-1608-90	0.1uF	C549	043-1608-90	0.1uF	R523	033-0000-05	1/10W 0 ohm
C504	043-1608-90	0.1uF	C550	043-1608-90	0.1uF	R524	033-1011-15	1/10W 100 ohm
C505	042-0560-85	6.3V 100uF	C551	043-1608-90	0.1uF	R525	033-2211-15	1/10W 220 ohm
C506	043-1608-90	0.1uF	C552	043-1606-90	1000pF	R526	033-1011-15	1/10W 100 ohm
C507	043-1608-90	0.1uF	C553	043-1608-90	0.1uF	R527	033-1041-15	1/10W 100k ohm
C508	043-1625-90	0.022uF	C554	165-4763-15	6.3V 47uF	R530	033-1031-15	1/10W 10k ohm
C509	043-1824-90	0.22uF	C555	043-1608-90	0.1uF	R531	033-1031-15	1/10W 10k ohm
C510	043-1608-90	0.1uF	C556	043-1608-90	0.1uF	R532	033-6831-15	1/10W 68k ohm
C511	043-1806-90	1pF	C557	043-1608-90	0.1uF	R533	033-1811-15	1/10W 180 ohm
C512	043-1605-90	68pF	C558	042-0560-85	6.3V 100uF	R534	033-1011-15	1/10W 100 ohm
C513	042-2273-25	10V 220uF M	C560	043-1615-90	0.047uF	R535	033-1811-15	1/10W 180 ohm
C514	043-1606-90	1000pF	C561	043-1615-90	0.047uF	R536	033-0000-05	1/10W 0 ohm
C515	043-1608-90	0.1uF	C562	043-1614-90	470pF	R537	033-0000-05	1/10W 0 ohm
C516	043-1608-90	0.1uF	C563	043-1614-90	470pF	R538	033-0000-05	1/10W 0 ohm
C517	042-0560-85	6.3V 100uF	D501	001-4326-50	RSB27F2T106	R539	033-1231-15	1/10W 12k ohm
C518	043-1605-90	68pF	IC501	051-6101-90	BD8226EFV	R540	033-0000-05	1/10W 0 ohm
C519	043-1607-90	0.01uF	IC502	051-6934-90	MFI341S2313	R541	033-3321-15	1/10W 3.3k ohm
C520	043-1608-90	0.1uF	IC503	051-6754-00	LC786960E-6AXX-L	R542	033-0000-05	1/10W 0 ohm
C521	042-0560-85	6.3V 100uF	IC505	051-6926-90	BD2051AFJ-TR	R543	033-3311-15	1/10W 330 ohm
C522	043-1608-90	0.1uF	J501	074-2215-60	10P	R544	116-1501-15	1/4W 15 ohm
C523	043-1607-90	0.01uF	J502	074-2215-65	15P	R545	116-1501-15	1/4W 15 ohm
C525	043-1608-90	0.1uF	J503	074-2226-90	40P	R546	033-4701-15	1/10W 47 ohm
C526	043-1615-90	0.047uF	L501	010-3112-90	1k ohm/100MHz	R547	033-4731-15	1/10W 47k ohm
C527	043-1607-90	0.01uF	L502	010-3112-90	1k ohm/100MHz	R548	033-0000-05	1/10W 0 ohm
C528	043-1620-90	4700pF	Q501	190-2060-00	2SA2060	R549	033-0000-05	1/10W 0 ohm
C529	043-1608-90	0.1uF	R501	117-1821-15	1/8W 1.8k ohm	R550	033-0000-05	1/10W 0 ohm
C530	043-1615-90	0.047uF	R503	033-2731-15	1/10W 27k ohm	R551	033-1031-15	1/10W 10k ohm
C531	043-1625-90	0.022uF	R504	033-8231-15	1/10W 82k ohm	R552	033-1031-15	1/10W 10k ohm
C532	042-0560-85	6.3V 100uF	R505	033-1241-15	1/10W 120k ohm	R553	033-4791-15	1/16W 4.7 ohm
C533	043-0603-90	16V 10uF	R506	033-8231-15	1/10W 82k ohm	R554	033-6801-15	1/16W 68 ohm
C534	042-0560-85	6.3V 100uF	R507	033-0000-05	1/10W 0 ohm	R555	033-6801-15	1/16W 68 ohm
C535	043-0603-90	16V 10uF	R508	033-1031-15	1/10W 10k ohm	R556	033-1041-15	1/10W 100k ohm
C536	043-1607-90	0.01uF	R510	033-1031-15	1/10W 10k ohm	R557	033-1041-15	1/10W 100k ohm
C537	043-1713-90	12pF	R511	033-1031-15	1/10W 10k ohm	R559	033-1031-15	1/10W 10k ohm
C538	043-1713-90	12pF	R512	033-1031-15	1/10W 10k ohm	R560	033-1041-15	1/10W 100k ohm
C539	043-1608-90	0.1uF	R513	033-4711-15	1/10W 470 ohm	R561	033-1041-15	1/10W 100k ohm
C540	043-1608-90	0.1uF	R514	033-6831-15	1/10W 68k ohm	R562	033-1531-15	1/10W 15k ohm
C541	043-1606-90	1000pF	R515	033-2231-15	1/10W 22k ohm	R563	033-1531-15	1/10W 15k ohm
C542	043-1606-90	1000pF	R516	033-6811-15	1/10W 680 ohm	R564	033-0000-05	1/10W 0 ohm
C543	043-0552-90	6.3V 47uF M	R517	033-4731-15	1/10W 47k ohm	X501	060-1535-90	16.934MHz
C544	043-1608-90	0.1uF	R518	033-6811-15	1/10W 680 ohm	X502	061-3580-90	12MHz
C545	042-0560-85	6.3V 100uF	R519	116-3391-15	1/4W 3.3 ohm	PWB	039-3737-00	PWB(WITHOUT COMPONENT)
C546	042-0560-85	6.3V 100uF	R520	033-4731-15	1/10W 47k ohm			