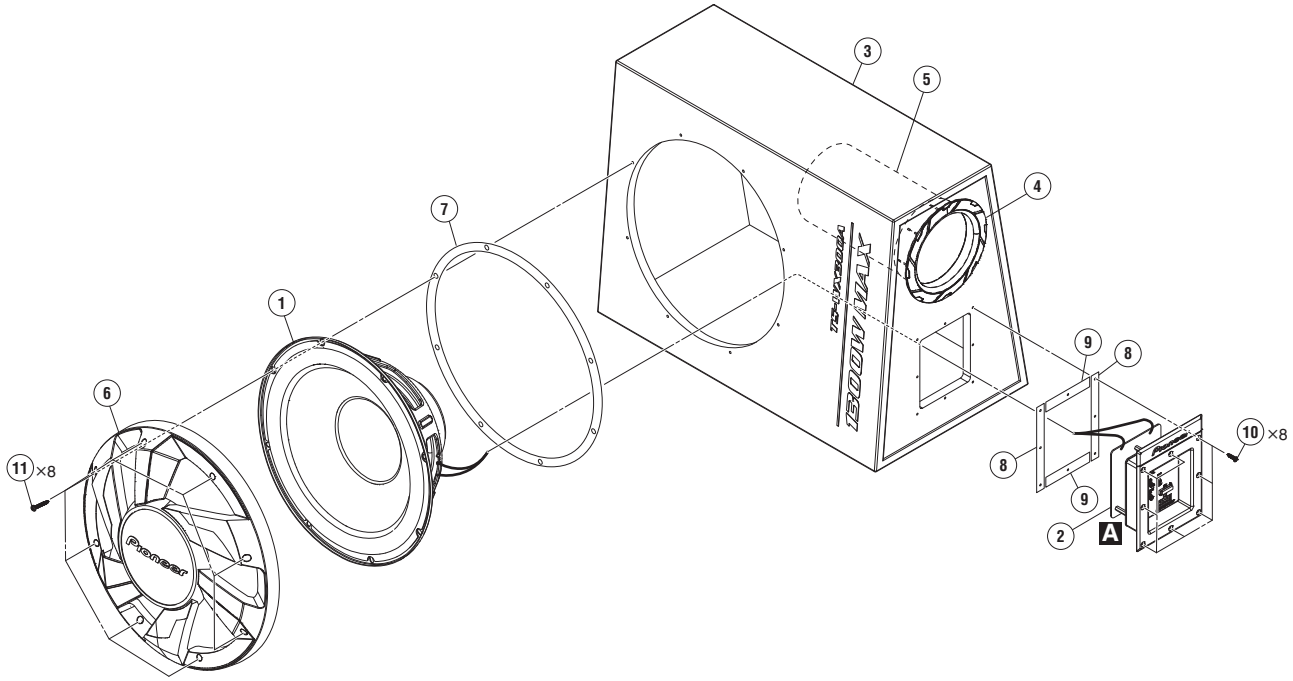
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 EXTERIOR SECTION



• EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.	Remarks
	1	Woofer	02.SA200010	×1
	2	AMP Unit	02.P0030037	×1
NSP	3	Cabinet	01.P0102045	×1
NSP	4	Port Duct	01.P2500080	×1
NSP	5	Port	01.P2500081	×1
	6	Grille	01.E9500359	×1
	7	Packing	01.P0500169	×1
	8	Packing	01.P0500171	×2
	9	Packing	01.P0500172	×2
	10	Screw	01.E8200325	×8
	11	Screw	01.E8200665	×8

2.2 ACCESSORIES and PACKING SECTION

• ACCESSORIES SECTION PARTS LIST

Mark	No.	Description	Part No.	Remarks
	1	Bracket	01.E6600011	×2
	2	Screw	01.E8200666	×8
	3	Cord (0.2 m)	01.45-18500-A01	×1
	4	Cord (4.8 m)	01.45-18500-101	×1
		Operating Instructions	01.E91B1169	×1
NSP		Warranty	CRY1376	×1

• PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.	Remarks
		Packing Case	01.E9102506	×1
		Protector	01.E9130341	×1
		Protector	01.E9130342	×1

1 


×2

2 

×8

3 

×1

4 

×1

5. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*
Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→ *56 × 10¹*	→ *561*	*RD1/4PU 5 6 1 J*
47 kΩ	→ *47 × 10³*	→ *473*	*RD1/4PU 4 7 3 J*
0.5 Ω	→ *R50*		*RN2H R 5 0 K*
1 Ω	→ *1R0*		*RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→ *562 × 10¹*	→ *5621*	*RN1/4PC 5 6 2 1 F*

Mark	No.	Description	Part No.
A		**AMP UNIT**	
SEMICONDUCTORS			
	IC	1	01.24-T1008-001
	IC	2	01.24-4013B-001
	IC	3	01.284-04580-110
	U	1-3,9,10,14,15	01.284-04580-110
	U	11	01.24-LM393-001
	U	12,13	01.24-P3420-001
	Q	1-4	01.23-A6522-521
	Q	5,8-10,12,13,16,18,20,21	01.23-08050-300
	Q	6,7,14,15	01.23-KRC10-421
	Q	11,17,19,22	01.23-A8550-300
	Q	23	B772GZ-TRB
	Z	3,6-10,16,18	01.21-21Z3V-701
	Z	1	01.21-2Z13B-701
	Z	2	01.21-2Z16B-701
	Z	4,11,21	01.21-25V1B-701
	Z	5	01.21-21Z9V-701
	Z	15	01.21-2Z6V2-701
	D	9,10,33,35	01.21-3160T-901
	D	32,34	01.21-3360T-A01
	D	1	01.21-35402-200
	D	2-4,6,7,11-13,29-31	1N4148
	LED	1	01.22-10300-611
	R	7 POSISTOR	01.31-54711-631
MISCELLANEOUS			
	J	1 BUS BAR	01.31-B0011-101
	L	7,8 CHOKE COIL	01.35-112U0-001
	L	5 CHOKE COIL	01.35-116U0-001
	SW	2 SLIDE SW	01.41-442D4-911
⚠		FUSE	01.42-10020-329
	F	2 FUSE HOLDER	01.42-0XS06-009
NSP		TERMINAL BASE	01.E11H0001
NSP		HOLDER	01.E8300027
	J	3 CONNECTOR	01.44-ZFH01-121
	J	6 CONNECTOR	01.44-ZPH01-121
	J	4 CONNECTOR	01.44-ZZFH0-051
	J	2 CONNECTOR	01.44-ZZPH0-051
NSP		PACKING	01.P0500168
		SCREW	01.E8200219-1
		SCREW	01.E8200596
		SCREW	01.E8200614
RESISTORS			
	VR	1	01.32-120K2-131
	VR	3	01.32-150K2-131
	VR	2	01.32-22032-801
	R	9	RS1/10SQ1401F
	R	44	RS1/10SQ1500F
	R	195	RS1/10SQ2201F
	R	56,65	RS1/10SQ2400F
	R	16	RS1/10SQ2601F
	R	61,214	RS1/10SQ3200F
	R	43	RS1/10SQ3900F
	R	197,201,204,279	RS1/10SQ4302F
	R	49,200,202,203,208	RS1/10SQ4702F
	R	6	RS1/10SQ5621F
	R	22,29	RS1/10SQ6041F
	R	72	RS1/10SQ6800F
	R	99	RS1/10SQ6802F
	R	24,27	RS1/10SQ8250F
	R	87	RS1/4SA1R0J
	R	60,106	RS1/4SA4R7J
	R	10,58,59,82,103,176,177,199,210	RS1/8SQ102J
	R	116,143,175	RS1/8SQ153J
		Other Resistors	RS1/10SQ###J
CAPACITORS			
	C	152	01.34-21041-021
	C	151	01.34-22241-061
	C	10,11	01.34-25632-021
	C	121	01.34-A1521-051
	C	114,118	01.34-A1531-021
	C	153,154	01.34-A2741-021
	C	105,106,110,111	01.34-A4701-054
	C	124	01.34-A5611-051
	C	104	01.34-B1041-021
	C	100,131,132,138,140,142	01.34-C2266-022
	C	143,145,149	01.34-C2266-022
	C	71,76,120 ,123	CCSQCH101J50
	C	16,26,27,30-33,70,72,73,75	CCSQCH102J50
	C	77,78,86,87,150	CCSQCH102J50
	C	68,69	CCSQCH470J50
	C	62,64,109	CEAT100M25
	C	3,35,42,53,162,169	CEAT101M25
	C	98,99,107,187	CEAT1R0M50
	C	15,25	CEAT221M25
	CE	1-3	CEAT332M25
	C	45,49,96	CEAT470M25
	C	9,18,37,40,59,60,63,89	CKSQYB103J25
	C	4-7,13,14,17,19,22,24,28,29,34,36,38	CKSQYB104J25

Mark	No.	Description	Part No.
	C	43,44,46-48,51,52,54,57,66,85,88,90	CKSQYB104J25
	C	122,126,133,161,163-166,175,188	CKSQYB104J25
	C	8,74,79	CKSQYB105K50
	C	12,84	CKSQYB106K25
	C	58	CKSQYB227K16
	C	125	CKSQYB471J50
	C	80,81	CKSQYB473K50
	C	20,23	CKSQYB475K25
	C	134-137	CKSQYB682J25
	C	82,83	CKSYB103J25
	C	21,39,50	CKSYB104K2A
	C	67	CKSYB106K25
	C	129,130	CKSYB475K25