
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 PACKING SECTION

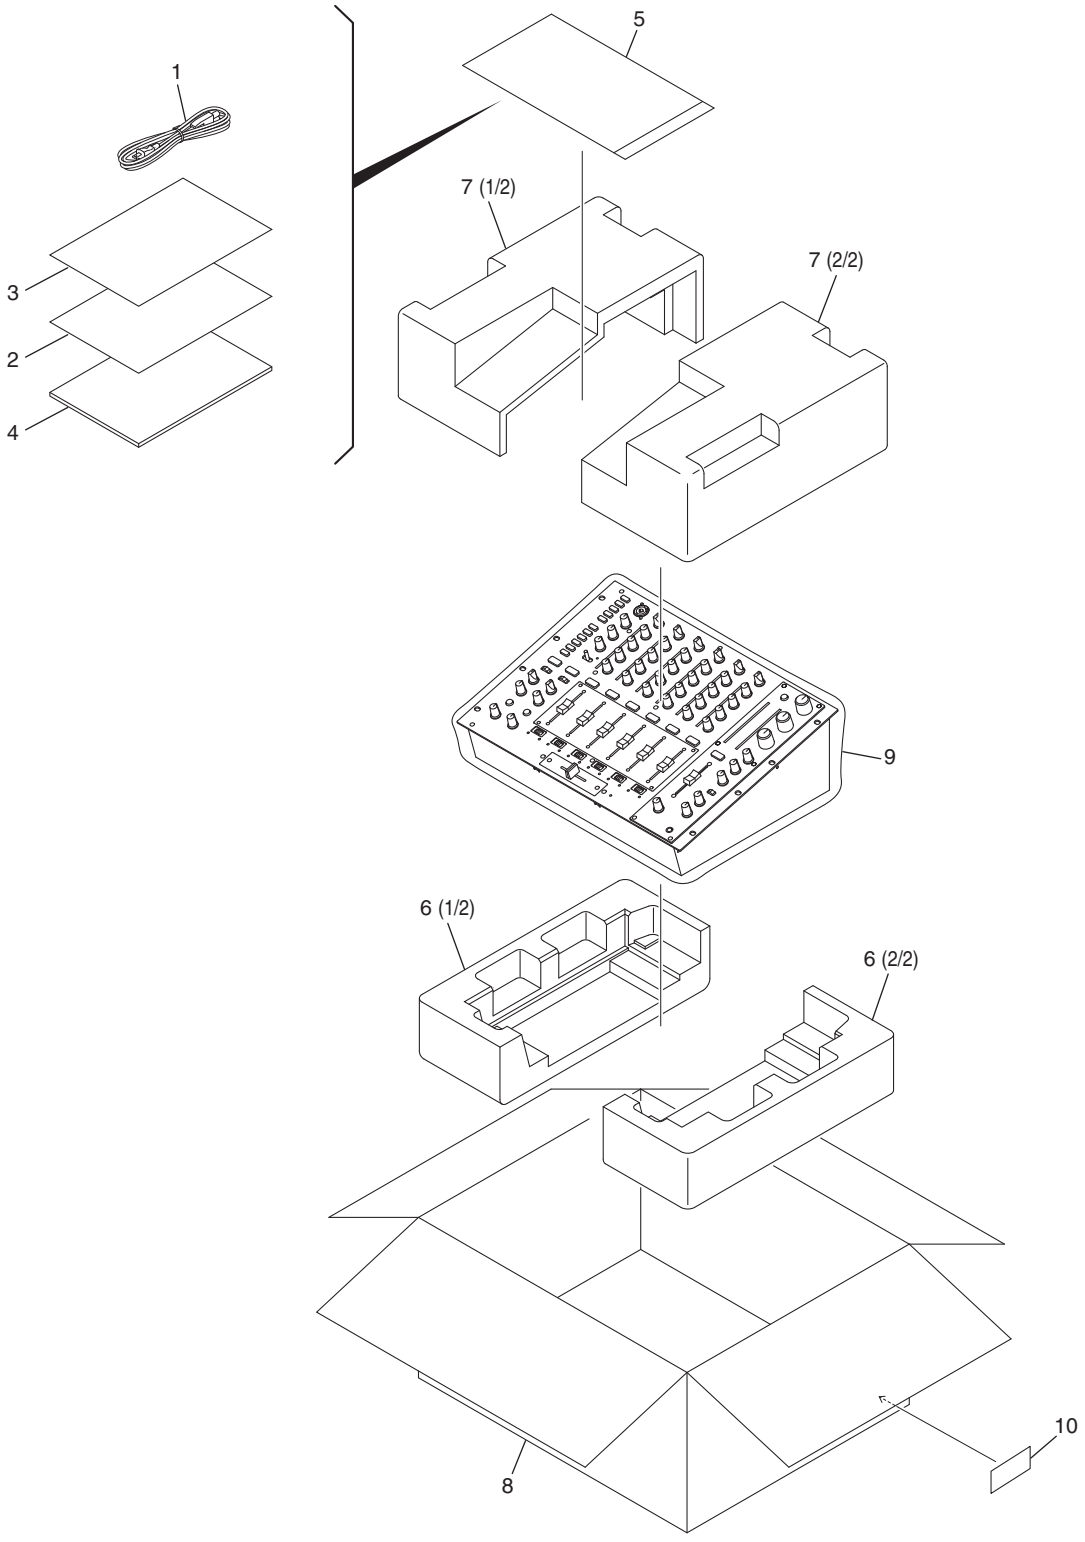

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power Cord	See Contrast table (2)
NSP	2	Warranty	See Contrast table (2)
NSP	3	User Seat	DRM1262
	4	Operating Instructions	See Contrast table (2)
NSP	5	Polyethylene Bag (0.06 x 230 x 340)	AHG7117
	6	Bottom Pad	DHA1641
	7	Top Pad	DHA1642
	8	Packing Case	See Contrast table (2)
	9	Packing Sheet	RHC1023
NSP	10	Label	VRW1629

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
⚠	1	Power Cord	DDG1028	ADG7062	ADG7062
NSP	2	Warranty	ARY7043	Not used	Not used
	4	Operating Instructins (English)	DRB1371	Not used	Not used
	4	Operating Instructins (English/ French/ German/ Italian/ Duch/ Spanish)	Not used	DRB1372	Not used
	4	Operating Instructins (English/ Spanish/ Chinese)	Not used	Not used	DRB1373
	8	Packing Case	DHG2501	DHG2502	DHG2503

2.2 BOTTOM SECTION

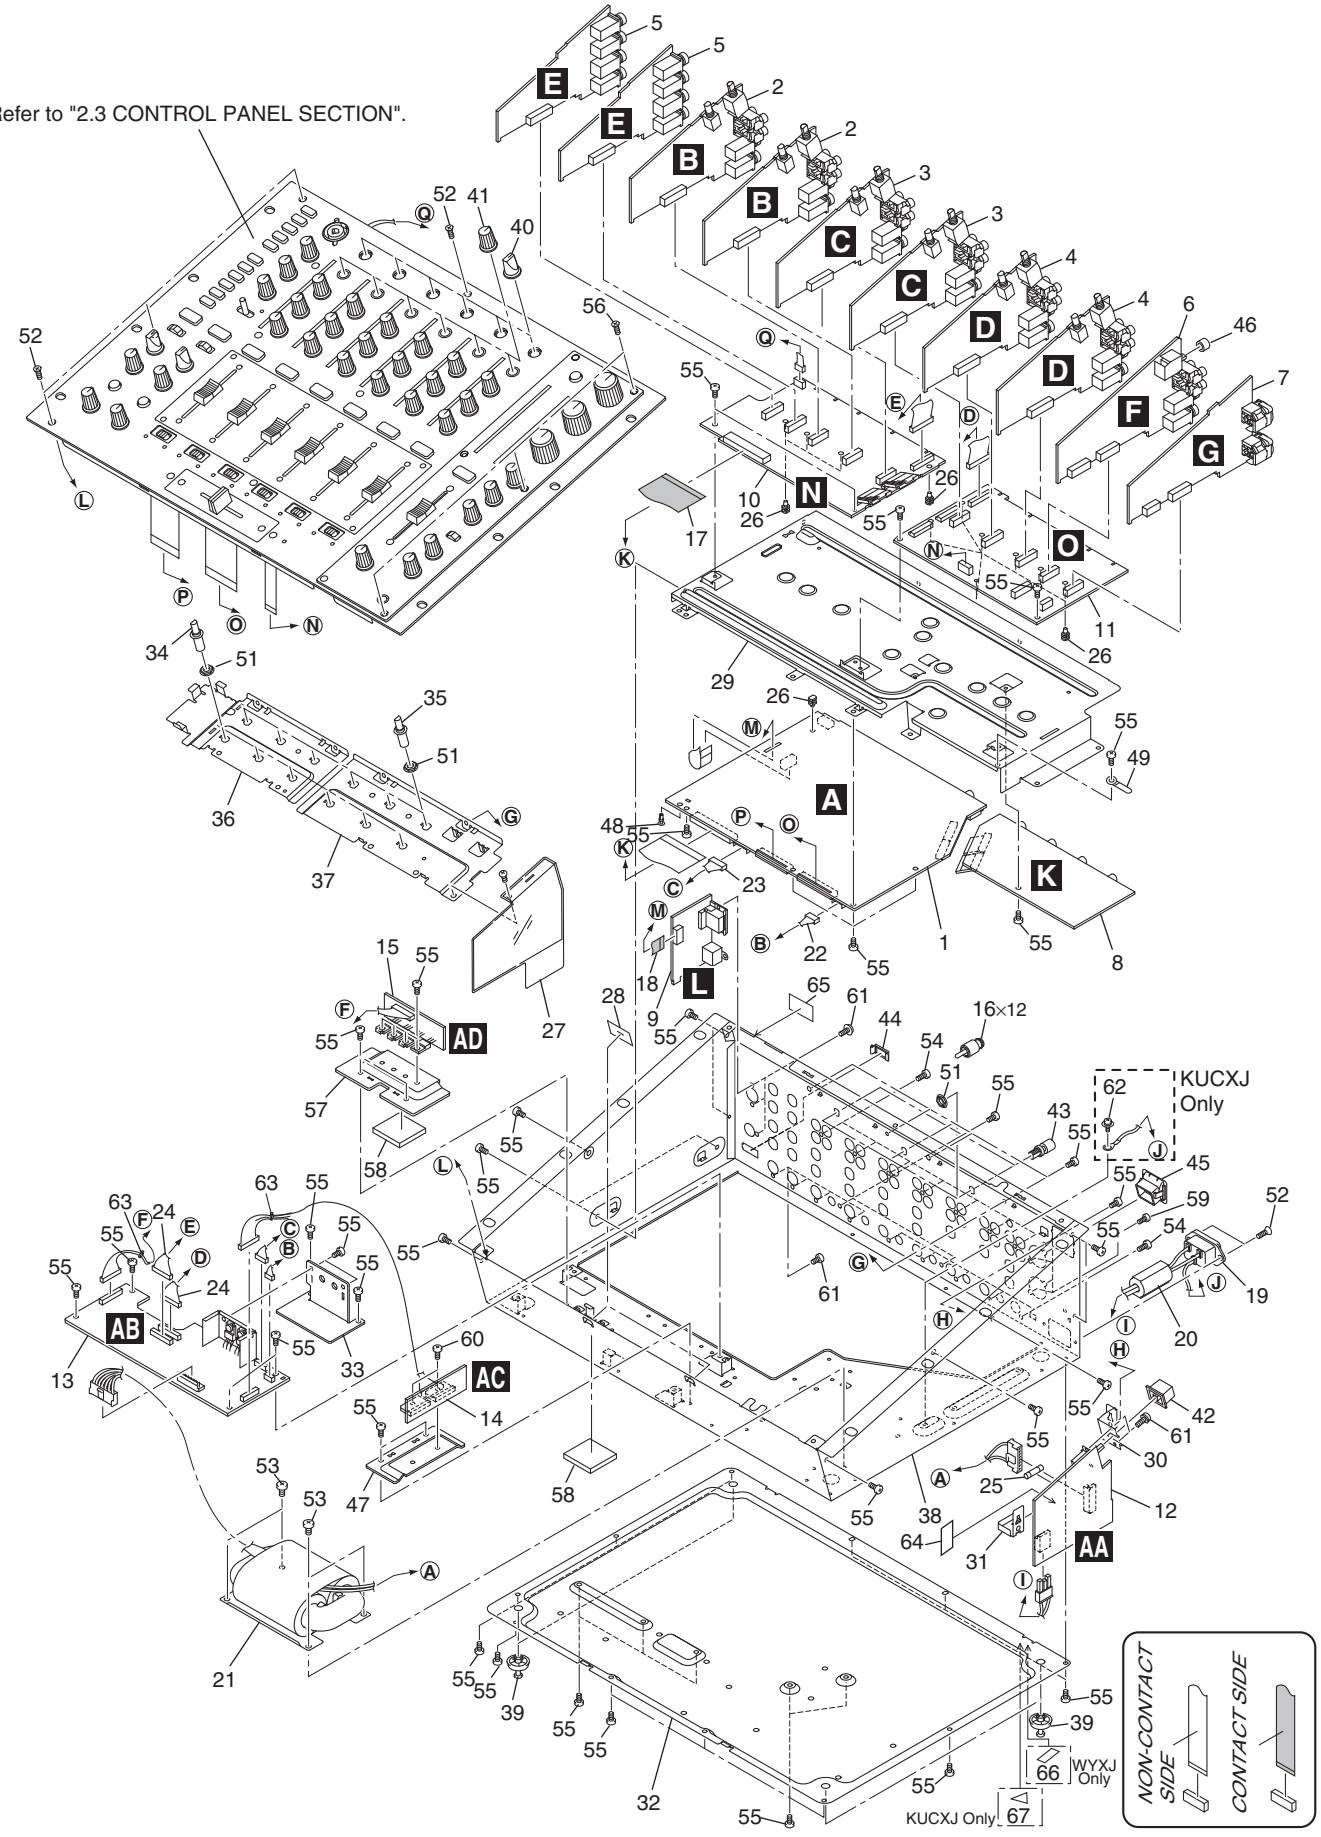

(1) BOTTOM SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	DIGITAL MAIN Assy	DWG1586
	2	CH1/CH2 INPUT Assy	DWX2501
	3	CH3/CH4 INPUT Assy	DWX2502
	4	CH5/CH6 INPUT Assy	DWX2503
	5	SEND/RETURN Assy	DWX2408
	6	BOOTH/REC Assy	DWX2409
	7	MASTER Assy	DWX2410
	8	DIGITAL SUB Assy	DWX2414
	9	VISUAL LINK Assy	DWX2413
	10	BUS1 Assy	DWX2422
	11	BUS2 Assy	DWX2423
	12	ACIN Assy	See Contrast table (2)
	13	POWER Assy	DWR1384
	14	REG1 Assy	DWR1385
	15	REG2 Assy	DWR1386
	16	Short Pin Plug	AKM7008
	17	40P Flexible Cable	DDD1288
	18	10P Flexible Cable	DDD1289
⚠	19	AC Inlet Assy	See Contrast table (2)
⚠	20	Ferrite Core	DTH1195
⚠	21	Power Transformer	See Contrast table (2)
	22	Connector	PF04EE-S07
	23	Connector	PF06EE-S15
	24	Connector	PF10EE-S30
⚠	25	Fuse (FU1)	See Contrast table (2)
	26	Card Spacer	AEC7214
	27	Shield Plate (A)	DEC2839
	28	Shade Sheet A	DEC2842
	29	PCB Stay (H)	DNF1704
	30	Power Switch Stay	DNF1705
	31	Power PCB Stay	DNF1716
	32	Bottom Plate	DNH2620
NSP	33	Heatsink Plate B	DNH2644
	34	Extension Shaft (L)	DNK4336
	35	Extension Shaft (L2)	DNK4491
	36	PCB Stay V (A) Assy	DXB1856
	37	PCB Stay V (B) Assy	DXB1857
NSP	38	Chassis	See Contrast table (2)
	39	Leg Assy	REC-434
	40	Rotary SW Knob	DAA1167
	41	Rotary Knob B	DAA1171
	42	Power Knob	DAC2133
	43	Earth Terminal with Knob	DKE1014
	44	Blind Cap	DNK4218
	45	Power Knob Guard	DNK4335
	46	Select Knob (S)	DAA1166
	47	Heatsink A	DNG1092
	48	Nyron Rivet (3 x 4.5)	RBM-003
NSP	49	Cord Clamper	ZCB-069Z
	50	Flange Nut M12	DBN1012
	51	Flange Nut M7	DBN1011
	52	Screw	CMZ30P100FTB
	53	Screw	BBZ40P060FTC
	54	Screw	BPZ30P080FTB
	55	Screw	BBZ30P060FTB
	56	Screw	CMZ30P100FNI
	57	Heatsink B	DNG1093
NSP	58	Silicone Sheet C	DEB1764
	59	Screw	BBZ26P060FTB
	60	Screw	BBZ30P080FTC
	61	Screw	PMH30P100FTB
	62	Screw	See Contrast table (2)
NSP	63	Binder	ZCA-BK1
NSP	64	Fuse Card	DAX1015
NSP	65	Label	VRW1629
	66	Label (WEEE)	See Contrast table (2)
	67	Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
	12	ACIN Assy	DWR1383	DWR1383	DWR1399
⚠	19	AC Inlet Assy (3P)	DKP3730	Not used	Not used
⚠	19	AC Inlet Assy (2P)	Not used	DKP3731	DKP3731
⚠	21	Power Transformer	DTT1179	DTT1178	DTT1180
⚠	25	Fuse (FU1 : 2A)	REK1111	Not used	Not used
⚠	25	Fuse (FU1 : 1.6A)	Not used	REK1024	REK1024
NSP	38	Chassis	DNA1304	DNA1306	DNA1326
	62	Screw	PMH40P080FTC	Not used	Not used
	66	Label (WEEE)	Not used	ARW7322	Not used
	66	Label	DRW1975	Not used	Not used

2.3 CONTROL PANEL SECTION

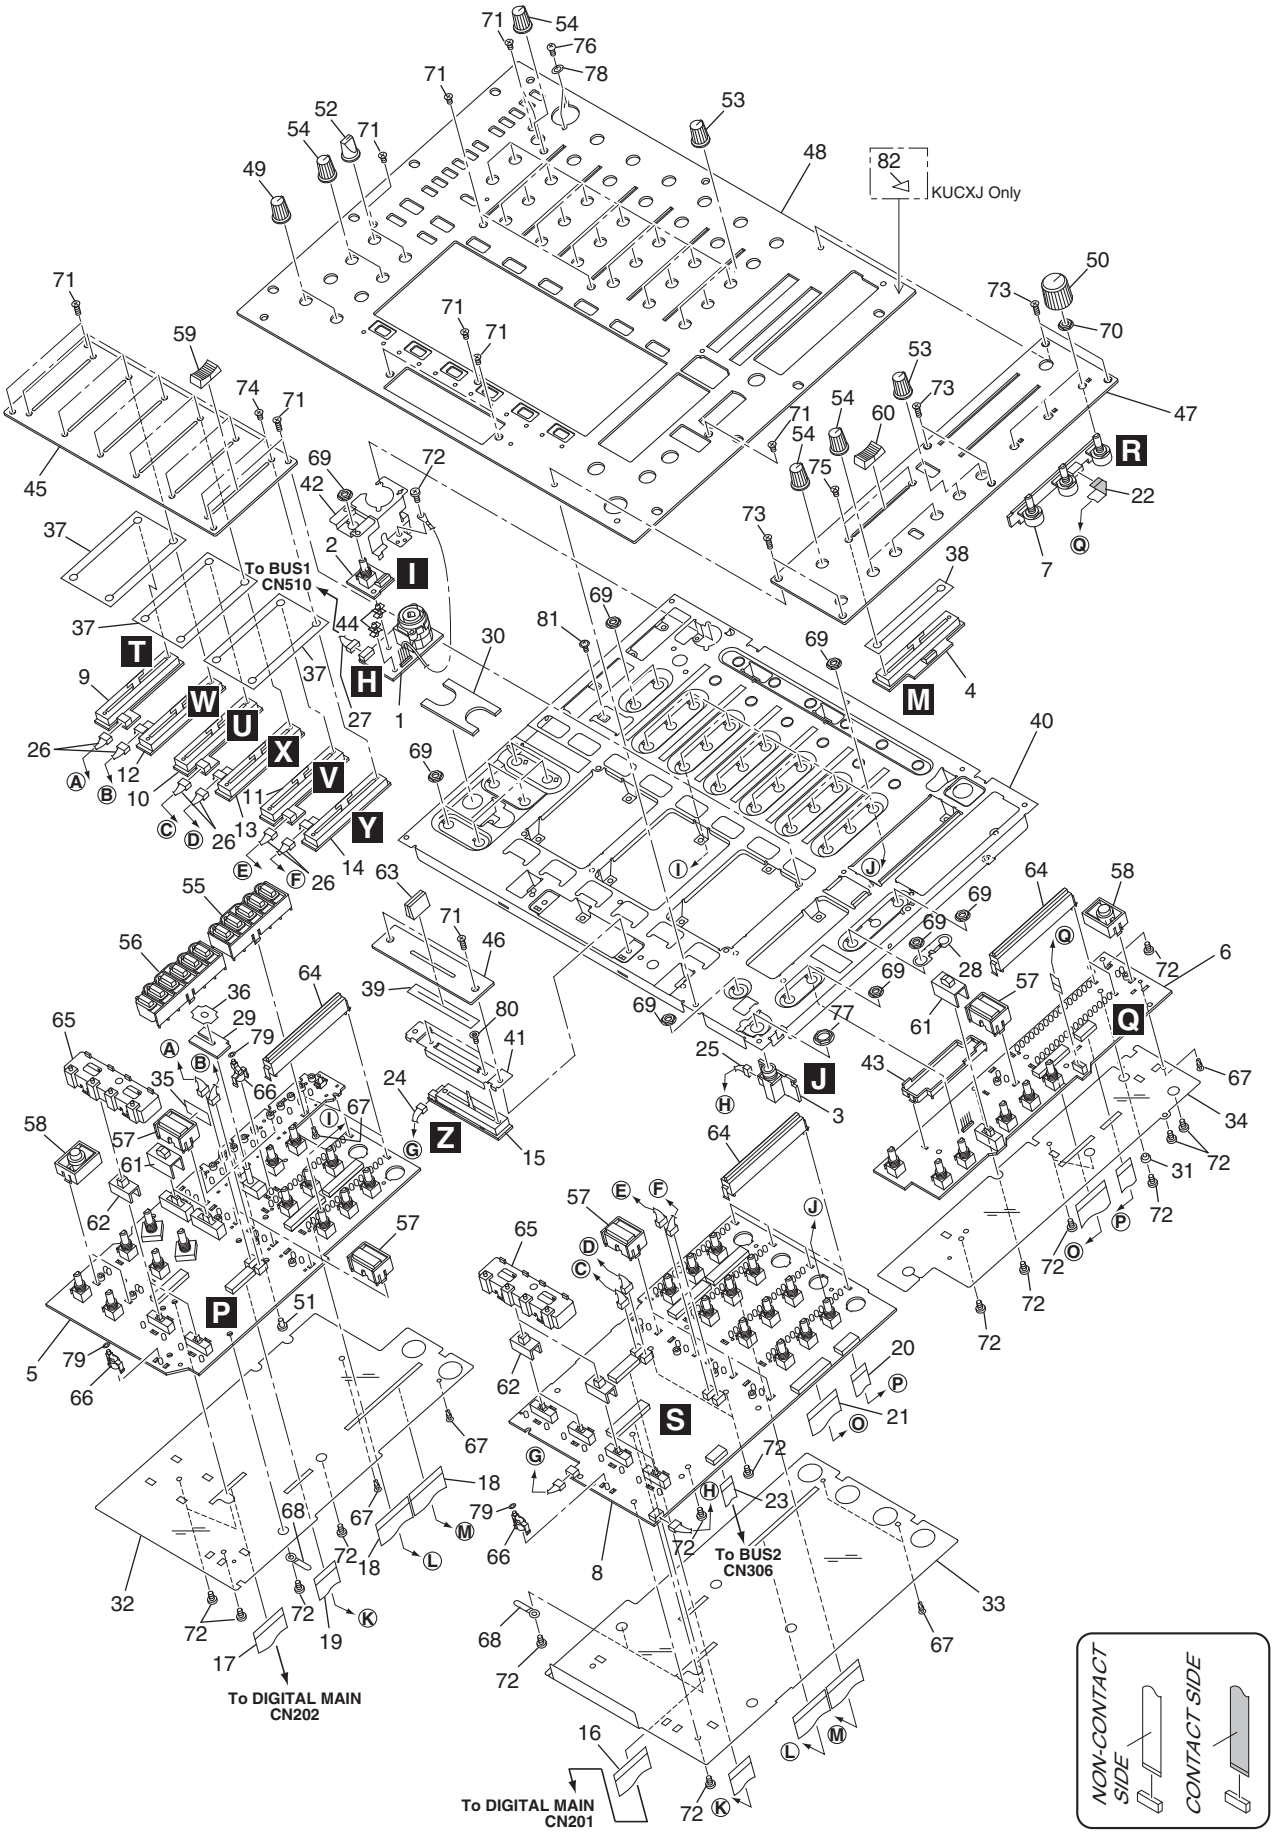

CONTROL PANEL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MIC Assy	DWX2411
	2	MIC VR Assy	DWX2466
	3	HP Assy	DWX2412
	4	MASTER FADER Assy	DWX2421
	5	PANEL1 Assy	DWX2427
	6	PANEL2 Assy	DWX2428
	7	ISOLATOR Assy	DWX2425
	8	PANEL3 Assy	DWX2426
	9	CH1/CH3/CH5 FADER Assy	DWX2416
	10	CH1/CH3/CH5 FADER Assy	DWX2418
	11	CH1/CH3/CH5 FADER Assy	DWX2443
	12	CH2/CH4/CH6 FADER Assy	DWX2415
	13	CH2/CH4/CH6 FADER Assy	DWX2417
	14	CH2/CH4/CH6 FADER Assy	DWX2442
	15	CROSS FADER Assy	DWX2424
	16	31P Flexible Cable	DDD1280
	17	28P Flexible Cable	DDD1281
	18	31P Flexible Cable	DDD1282
	19	20P Flexible Cable	DDD1283
	20	13P Flexible Cable	DDD1284
	21	28P Flexible Cable	DDD1285
	22	7P Flexible Cable	DDD1286
	23	10P Flexible Cable	DDD1287
	24	Connector	PF03PP-R10
	25	Connector	PF04PP-R07
	26	Connector	PF04PP-R10
	27	Connector	PF05PP-R10
	28	Earth Spring	DBK1265
	29	Shade Spacer A	DEB1729
	30	Shade Spacer B	DEB1730
	31	POM Bush (M3)	DEC2397
	32	Insulation Sheet (A)	DEC2762
	33	Insulation Sheet (B)	DEC2763
	34	Insulation Sheet (C)	DEC2764
	35	Shade Sheet B	DEC2843
	36	SW Packing	DEC2848
	37	CH Fader Packing	DEC2865
	38	Master Fader Packing	DEC2866
	39	Fader Packing	DEC2867
NSP	40	Panel Stay	DND1253
	41	CRF Stay	DNF1706
	42	MIC. Stay	DNF1720
	43	Master Fader Holder	DNK4374
NSP	44	PC Support	VEC1508
	45	CHF Panel	DAH2414
	46	CRF Panel	DAH2415
	47	Master Panel	DNB1135
	48	Control Panel	DNB1136
	49	Rotary Knob (SS)	DAA1164
	50	VR Knob (ISO)	DAA1165
	51	Nyron Rivet	DEC2870
	52	Rotary SW Knob	DAA1167
	53	Rotary Knob A	DAA1170
	54	Rotary Knob B	DAA1171
	55	Set Knob (LINK)	DAC2213
	56	Set Knob (FS)	DAC2214
	57	CUE Knob	DAC2215
	58	ISO Knob	DAC2216
	59	CHF Knob	DAC2217
	60	MF Knob	DAC2218
	61	Slide SW Cap (A)	DAC2219
	62	Slide SW Cap (B)	DAC2220
	63	Slider Knob (L)	DNK4210
	64	Level Meter Lens	DNK4332
	65	Set Lens	DNK4333
	66	LED Lens	DNK4334
	67	Nyron Rivet (3 x 4.5)	RBM-003
NSP	68	Cord Clamper	ZCB-069Z
	69	Flange Nut M9	DBN1008
	70	Flange Nut M7	DBN1011
	71	Screw	CMZ30P100FTB
	72	Screw	BBZ30P060FTB
	73	Screw	CMZ30P100FNI
	74	Screw	CMZ30P050FTB
	75	Screw	CMZ30P050FNI
	76	Screw	BPZ30P120FTB
	77	Flange Nut M12	DBN1012
	78	PC Washer	DEC2868
	79	Poly. Slider Washer	WA26D080D025
	80	Screw	DBA1262
	81	Screw	AMZ26P040FTC
	82	Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-1000/KUCXJ, WYXJ and RLTXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-1000 /KUCXJ	DJM-1000 /WYXJ	DJM-1000 /RLTXJ
	82	Label	DRW1975	Not used	Not used

5. PCB PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω → 56 x 10[1] → 561 ..... RD1/4PU 5 6 1 J
47k Ω → 47 x 10[3] → 473 ..... RD1/4PU 4 7 3 J
0.5 Ω → R50 ..... RN2H R 5 0 K
1 Ω → 1R0 ..... RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω → 562 x 10[1] → 5621 ..... RN1/4PC 5 6 2 1 F

■ LIST OF HOLE PCB ASSEMBLIES

Mark	Symbol and Description	DJM-1000/ KUCXJ	DJM-1000/ WYXJ	DJM-1000/ RLTXJ
	1..DIGITAL MAIN ASSY	DWG1586	DWG1586	DWG1586
NSP	1..INPUT ASSY	DWM2190	DWM2190	DWM2190
	2..CH1/CH2 INPUT ASSY	DWX2405	DWX2405	DWX2405
	2..CH3/CH4 INPUT ASSY	DWX2406	DWX2406	DWX2406
	2..CH5/CH6 INPUT ASSY	DWX2407	DWX2407	DWX2407
	2..SEND/RETURN ASSY	DWX2408	DWX2408	DWX2408
NSP	1..SUB ASSY	DWM2191	DWM2191	DWM2191
	2..BOOTH/REC ASSY	DWX2409	DWX2409	DWX2409
	2..MASTER ASSY	DWX2410	DWX2410	DWX2410
	2..MIC ASSY	DWX2411	DWX2411	DWX2411
	2..MIC VR ASSY	DWX2466	DWX2466	DWX2466
	2..HP ASSY	DWX2412	DWX2412	DWX2412
	2..DIGITAL SUB ASSY	DWX2414	DWX2414	DWX2414
NSP	1..BUS ASSY	DWM2202	DWM2202	DWM2202
	2..VISUAL LINK ASSY	DWX2413	DWX2413	DWX2413
	2..MASTER FADER ASSY	DWX2421	DWX2421	DWX2421
	2..BUS1 ASSY	DWX2422	DWX2422	DWX2422
	2..BUS2 ASSY	DWX2423	DWX2423	DWX2423
NSP	1..PANEL B ASSY	DWM2194	DWM2194	DWM2194
	2..PANEL1 ASSY	DWX2427	DWX2427	DWX2427
	2..PANEL2 ASSY	DWX2428	DWX2428	DWX2428
NSP	1..PANEL A ASSY	DWM2193	DWM2193	DWM2193
	2..ISOLATOR ASSY	DWX2425	DWX2425	DWX2425
	2..PANEL3 ASSY	DWX2426	DWX2426	DWX2426
NSP	1..POWER ASSY	DWM2192	DWM2192	DWM2203
	2..CH1/CH3/CH5 FADER ASSY	DWX2416	DWX2416	DWX2416
	2..CH1/CH3/CH5 FADER ASSY	DWX2418	DWX2418	DWX2418
	2..CH1/CH3/CH5 FADER ASSY	DWX2443	DWX2443	DWX2443
	2..CH2/CH4/CH6 FADER ASSY	DWX2415	DWX2415	DWX2415
	2..CH2/CH4/CH6 FADER ASSY	DWX2417	DWX2417	DWX2417
	2..CH2/CH4/CH6 FADER ASSY	DWX2442	DWX2442	DWX2442
	2..CROSS FADER ASSY	DWX2424	DWX2424	DWX2424
	2..ACIN ASSY	DWR1383	DWR1383	DWR1399
	2..POWER ASSY	DWR1384	DWR1384	DWR1384
	2..REG1 ASSY	DWR1385	DWR1385	DWR1385
	2..REG2 ASSY	DWR1386	DWR1386	DWR1386

■ CONTRAST OF PCB ASSEMBLIES

AA ACIN ASSY

DWR1383 and DWR1399 are constructed the same except for the following :

Mark	Symbol and Description	DWR1383	DWR1399
⚠	S1 VOLTAGE SELECTOR	Not used	AKX7004

■ PCB PARTS LIST FOR DJM-1000/KUCXJ UNLESS OTHER WISE NOTED

A DIGITAL MAIN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC8,IC9		ADS7842E
⚠	IC51 (750mA)		AEK7077
	(Serial No. EAMP000001JP to 15JP (JJXJ))		
	(Serial No. EAMP000001YY to 40YY (WYXJ))		
	(Serial No. EAMP000001LY to 20LY (RLTXJ))		
⚠	IC51 (1.5A) (OTHERS)		AEK7011
⚠	IC50 (2.5A)		AEK7014
	IC38		BA033FP
	IC16,IC17,IC20,IC36,IC37		CS8420-CSZD1
	IC22		CY7C024AV-25AXC
	IC32		D610A002BPYP225
	IC7		DYW1739
	IC2		DYW1740
	IC3		M30802SGP
	IC33		NJM2068M
	IC101		NJM2872F05
	IC102		NJM2872F33
	IC5		NJM4580MD
	IC1		PCM1742KE
	IC49		PST591JM
	IC14		TC74HC238AF
	IC30		TC74HC541AF
	IC12		TC74LCX157FTS1
	IC6		TC74VHC157FTS1
	IC29,IC31		TC74VHC163FT
	IC10,IC21,IC4		TC74VHC573FTS1
	IC24,IC26,IC34,IC41		TC74VHCT04AFTS1
	IC23		TC74VHCU04FT
	IC15		TC7SET08FUS1
	IC11,IC13,IC18,IC400		TC7SH08FUS1
	IC434-IC436,IC45,IC47,IC48		TC7SH08FUS1
	IC405,IC406,IC409,IC413,IC417		TC7WH157FU
	IC412,IC430-IC433		TC7WU04FU
	IC19,IC27		TPS54110PWP
	Q44,Q52		2SB1238X
	Q14		2SC2411K
	Q41,Q42		2SC3326
	Q102,Q105		2SC4081
	Q43,Q51		2SD1859X
	Q110		DTA124EUA
	Q2,Q24,Q3-Q5,Q53		DTC124EUA
	Q6,Q7		DTC124EUA
	D1,D11-D13,D16-D19		1SS355
	D2,D21,D23-D25,D3		1SS355
	D10,D101-D104,D106-D116		DAN217
	D14,D15,D20,D22		DAN217
	D6-D8		DAN217
	D51-D58		NNCD6.2MF
	D105		SLI-343URCW(RST)

COILS AND FILTERS

Mark	No.	Description	Part No.
	L7,L8		LFEA100J
	L10-L14	COMMON CHOKE COIL	PTL1017
	L40	EMI FILTER	RTF1189
	F101-F148	FERRITE BEAD	VTF1093

SWITCHES AND RELAYS

Mark	No.	Description	Part No.
	RY1		DSR1018

CAPACITORS

Mark	No.	Description	Part No.
	C15		CCSRCH150J50
	C18		CCSRCH180J50
	C315,C323,C331,C337,C347		CCSRCH220J50
	C8		CCSRCH220J50
	C313,C321,C328,C335,C345		CCSRCH221J50
	C404		CCSRCH221J50
	C13		CCSRCH270J50
	C114,C121,C316,C325,C332		CCSRCH470J50
	C339,C349		CCSRCH470J50
	C109,C119		CCSRCH561J50
	C104,C139		CCSRCH820J50
	C137,C95		CEANP100M16
	C110,C92		CEANP221M16
	C1,C11,C124,C14,C145		CEAT100M50
	C156,C17,C174-C176		CEAT100M50
	C178,C179,C186,C188		CEAT100M50
	C21-C23,C4,C59		CEAT100M50
	C67,C68,C7,C73,C77		CEAT100M50
	C87		CEAT100M50
	C245,C246,C3		CEAT101M16
	C471		CEAT101M25
	C100,C135		CEAT470M16
	C149		CEAT471M10
	C29,C30		CEAT471M25
	C318,C343,C352,C353		CFTLA104J50
	C113,C120,C153,C163-C169		CKSRYB102K50
	C131,C140-C144,C172,C25		CKSRYB103K50
	C27,C309,C314,C322,C326		CKSRYB103K50
	C329,C333,C336,C34,C342		CKSRYB103K50
	C346,C35,C351,C36,C37		CKSRYB103K50
	C39-C41,C411,C43		CKSRYB103K50
	C46-C48,C56,C85		CKSRYB103K50
	C10,C105-C108,C111,C112		CKSRYB104K25
	C115,C118,C12,C122,C123		CKSRYB104K25
	C125-C127,C132,C134,C136		CKSRYB104K25
	C138,C146,C148,C150-C152		CKSRYB104K25
	C154,C155,C157,C158,C16		CKSRYB104K25
	C177,C181-C185,C187,C189		CKSRYB104K25
	C19,C194,C195,C197-C199		CKSRYB104K25
	C2,C200,C201,C203-C205		CKSRYB104K25
	C208-C222,C224-C228		CKSRYB104K25
	C230,C231,C234,C235,C237		CKSRYB104K25
	C24,C255-C259,C26		CKSRYB104K25
	C260-C265,C28,C299-C308		CKSRYB104K25
	C31,C317,C32,C324,C33		CKSRYB104K25
	C338,C341,C348,C400-C403		CKSRYB104K25
	C406,C407,C410,C412,C413		CKSRYB104K25
	C416-C419,C42,C421-C429		CKSRYB104K25
	C436,C437,C439,C44		CKSRYB104K25
	C440-C442,C445,C448		CKSRYB104K25
	C450,C451,C454,C455,C458		CKSRYB104K25
	C460,C461,C463-C466,C468		CKSRYB104K25
	C470,C472-C477,C49,C5		CKSRYB104K25
	C50-C55,C58,C6,C60		CKSRYB104K25
	C69,C76,C80,C82-C84		CKSRYB104K25

Mark	No.	Description	Part No.
	C86,C9,C90,C93,C96		CKSRYB104K25
	C98,C99		CKSRYB104K25
	C467,C469		CKSRYB105K6R3
A	C61,C64		CKSRYB222K50
	C130,C171		CKSRYB223K50
	C129,C170		CKSRYB224K16
	C74,C78,C88		CKSRYB334K10
	C62,C65,C75,C79,C89		CKSRYB472K50
	C116,C133,C20,C232,C38		CKSRYB473K50
	C45,C57		CKSRYB473K50
	C250-C254		CQMA221J50

RESISTORS

R161,R162,R172,R173		RD1/2VM122J
B R179,R221		RD1/2VM221J
R308,R314,R321,R366,R369		RD1/2VM820J
R198,R355		RN1/16SE1002D
R95		RN1/16SE2402D
R11		RN1/16SE3601D
R75		RN1/16SE5102D
R163,R164,R174,R175		RS2LMF270J
Other Resistors		RS1/16S###J

OTHERS

CN1,CN2 1.25 FJ CONNECTOR		19R-1.25FJ
C CN4 10P FFC CONNECTOR		52045-1045
CN202 FFC CONNECTOR 28P		52492-2820
CN201 FFC CONNECTOR 31P		52492-3120
X2 CRYSTAL RESONATOR (24MHz)		ASS7025
JA12-JA15 8P MINI DIN CONNECTOR		DKN1035
JA4,JA5,JA7 HEADPHONE JACK		DKN1393
X1 CRYSTAL RESONATOR		DSS1153
CN8 FFC CONNECTOR 40P		HLEM40R-1
JA11 1P JACK (ORG)		PKB1036
CN3 6P SIDE POST		S6B-EH
CN6 KR CONNECTOR		S6B-PH-K-S
D KN1 WRAPPING TERMINAL		VNF1084

B CH1/CH2 INPUT ASSY

SEMICONDUCTORS

IC301	AK5394AVS
IC302	NE5532AD
IC304,IC305,IC307-IC310	NJM4580MD
IC311,IC312	TC7SH08FUS1
D301-D304	RB706D-40

COILS AND FILTERS

E F351-F354 FERRITE BEAD		VTF1093

SWITCHES AND RELAYS

S301		DSG1083

CAPACITORS

C305,C306,C317,C318		CCH1559
C329,C330,C333,C334		CCH1559
C322,C323,C325-C328		CCSRCH101J50
C335-C338,C365-C368		CCSRCH101J50
C303,C304		CCSRCH181J50
F		

Mark	No.	Description	Part No.
	C347,C348		CCSRCH221J50
	C309,C310		CCSRCH331J50
	C343,C344		CEANP100M16
	C307,C308		CEAT101M16
	C341,C342		CEHANP100M35
	C383		CEHAT100M50
	C375-C378,C385,C388		CEHAT101M10
	C391		CEHAT220M50
	C387,C389		CEHAT221M25
	C361-C364		CEHAT330M25
	C351-C356		CFTNA334J50
	C301,C302,C319-C321		CKSRYB104K25
	C331,C332,C339,C340		CKSRYB104K25
	C345,C346,C357-C360		CKSRYB104K25
	C369-C374,C384,C386		CKSRYB104K25
	C395-C398		CKSRYB104K25
	C379,C390		CKSRYB222K50
	C381,C382		CKSRYB224K16
	C311,C312		CQMA103J50
	C313,C314		CQMA222J50
	C315,C316		CQMA331J50

RESISTORS

R361,R362,R365,R366		RN1/16SC47R0D
R367-R370		RN1/16SE1000D
R321,R322,R331,R332		RN1/16SE1001D
R347-R350,R359,R360		RN1/16SE1001D
R363,R364		RN1/16SE1001D
R343,R344		RN1/16SE1002D
R323,R324,R333,R334		RN1/16SE1102D
R325,R326,R335,R336		RN1/16SE1502D
R345,R346		RN1/16SE1503D
R341,R342		RN1/16SE2202D
R353-R356		RN1/16SE2401D
R313,R314		RSK1/16S101J
R301,R302		RSK1/16S222J
R311,R312		RSK1/16S303J
R309,R310		RSK1/16S334J
R307,R308		RSK1/16S681J
Other Resistors		RS1/16S###J
VR301		DCS1082

OTHERS

CN301 PLUG		CKS3158
JA301 4P PIN JACK		DKB1073
JA302,JA303 MIC. JACK		DKN1248
0 SHIELD CASE S		DNH2589
0 ROTARY SW STAY		DNH2646

C CH3/CH4 INPUT ASSY

SEMICONDUCTORS

IC601	AK5394AVS
IC602	NE5532AD
IC604,IC605,IC607-IC610	NJM4580MD
IC611,IC612	TC7SH08FUS1
D601-D604	RB706D-40

COILS AND FILTERS

F651-F654 FERRITE BEAD		VTF1093

SWITCHES AND RELAYS

S601		DSG1083

Mark No.	Description	Part No.
CAPACITORS		
C605,C606,C617,C618		CCH1559
C629,C630,C633,C634		CCH1559
C622,C623,C625-C628		CCSRCH101J50
C635-C638,C665-C668		CCSRCH101J50
C603,C604		CCSRCH181J50
C698,C691		CCSRCH221J50
C609,C610		CCSRCH331J50
C643,C644		CEANP100M16
C607,C608		CEAT101M16
C641,C642		CEHANP100M35
C683		CEHAT100M50
C675-C678,C685,C688		CEHAT101M10
C694		CEHAT220M50
C687,C689		CEHAT221M25
C661-C664		CEHAT330M25
C651-C656		CFTNA334J50
C601,C602,C619-C621		CKSRYB104K25
C631,C632,C639,C640		CKSRYB104K25
C645,C646,C657-C660		CKSRYB104K25
C669-C674,C684,C686,C690		CKSRYB104K25
C695-C697		CKSRYB104K25
C679,C680		CKSRYB222K50
C681,C682		CKSRYB224K16
C611,C612		CQMA103J50
C613,C614		CQMA222J50
C615,C616		CQMA331J50
RESISTORS		
R661,R662,R665,R666		RN1/16SC47R0D
R667-R670		RN1/16SE1000D
R621,R622,R631,R632		RN1/16SE1001D
R647-R650,R659,R660		RN1/16SE1001D
R663,R664		RN1/16SE1001D
R643,R644		RN1/16SE1002D
R623,R624,R633,R634		RN1/16SE1102D
R625,R626,R635,R636		RN1/16SE1502D
R645,R646		RN1/16SE1503D
R641,R642		RN1/16SE2202D
R653-R656		RN1/16SE2401D
R613,R614		RSK1/16S101J
R601,R602		RSK1/16S222J
R611,R612		RSK1/16S303J
R609,R610		RSK1/16S334J
R607,R608		RSK1/16S681J
Other Resistors		RS1/16S###J
VR601		DCS1082
OTHERS		
CN601 PLUG		CKS3158
JA601 4P PIN JACK		DKB1073
JA602,JA603 MIC. JACK		DKN1248
0 SHIELD CASE S		DNH2589
0 ROTARY SW STAY		DNH2646

D CH5/CH6 INPUT ASSY

SEMICONDUCTORS

IC409	AK5394AVS
IC401	NE5532AD
IC403-IC408	NJM4580MD
IC410,IC411	TC7SH08FUS1
Q401,Q402	2SC4081
D401,D402	DAN217
D403-D406	RB706D-40

COILS AND FILTERS

F451-F454 FERRITE BEAD	VTF1093
L401,L402 CHIP BEAD	VTL1105

SWITCHES AND RELAYS

S401	DSG1083

CAPACITORS

C405,C406,C419,C420,	CCH1559
C429,C430,C433,C434	CCH1559
C425-C428,C442,C443	CCSRCH101J50
C463-C466,C496,C497	CCSRCH101J50
C435,C436,C439,C440	CCSRCH102J50
C403,C404	CCSRCH181J50
C498,C499	CCSRCH221J50
C441,C407,C408	CCSRCH331J50
C437,C438	CEANP100M16
C409,C410	CEAT101M16
C419,C420,C433,C434,C446	CEHANP100M35
C448	CEHANP100M35
C484	CEHAT100M50
C473,C474,C476,C480,C481	CEHAT101M10
C487	CEHAT101M10
C490	CEHAT220M50
C485,C486	CEHAT221M25
C459-C462	CEHAT330M25
C449-C454	CFTNA334J50
C411,C412,C421-C424	CKSRYB104K25
C431,C432,C445,C447	CKSRYB104K25
C455-C458,C467-C470	CKSRYB104K25
C477-C479,C483,C488,C491	CKSRYB104K25
C493-C495	CKSRYB104K25
C471,C472	CKSRYB222K50
C475,C482	CKSRYB224K16
C413,C414	CQMA103J50
C417,C418	CQMA222J50
C415,C416	CQMA331J50

RESISTORS

R457-R460	RN1/16SC47R0D
R433,R461-R464	RN1/16SE1000D
R437,R438,R443,R444	RN1/16SE1001D
R453-R456,R483,R484	RN1/16SE1001D
R429,R439,R440	RN1/16SE1002D
R485,R486	RN1/16SE1102D
R487,R488	RN1/16SE1502D
R441,R442	RN1/16SE1503D
R419,R420	RN1/16SE2200D
R435,R436	RN1/16SE2202D
R447-R450	RN1/16SE2401D
R426	RN1/16SE3300D
R432	RN1/16SE3901D
R424,R427	RN1/16SE4701D
R413,R414	RSK1/16S101J
R401,R402	RSK1/16S222J
R411,R412	RSK1/16S303J
R409,R410	RSK1/16S334J

Mark No.	Description	Part No.
	R407,R408	RSK1/16S681J
	Other Resistors	RS1/16S###J
	VR401	DCS1082
	OTHERS	
	CN401 PLUG	CKS3159
	JA402 HEADPHONE JACK	DKB1065
	JA401 4P PIN JACK	DKB1073
	0 SHIELD CASE S	DNH2589
	0 ROTARY SW STAY	DNH2646

E SEND/RETURN ASSY

	SEMICONDUCTORS	
	IC501	AK4393VF
	IC503	AK5385AVS
	IC507,IC508	NJM2100M
	IC502,IC504-IC506	NJM4580MD
	Q501-Q504	2SC3326
	COILS AND FILTERS	
	F551-F554 FERRITE BEAD	VTF1093
	CAPACITORS	
	C518,C521,C541-C544	CCSRCH101J50
	C507,C508,C513,C514	CCSRCH121J50
	C515,C516	CCSRCH821J50
	C563,C564,C581,C582	CEANP100M16
	C505,C506,C517,C525,C549	CEAT100M50
	C555,C560,C562	CEAT100M50
	C537-C540	CEAT220M25
	C523	CEAT221M10
	C565,C566	CEAT221M25
	C528,C553,C595	CEAT470M16
	C529,C530	CKSRYB102K50
	C526	CKSRYB103K50
	C511,C512,C519,C520,C524	CKSRYB104K25
	C531-C536,C545,C546,C552	CKSRYB104K25
	C554,C556,C559,C561,C567	CKSRYB104K25
	C596-C599	CKSRYB104K25
	C501,C502,C547,C548	CKSRYB222K50
	C558	CKSRYB224K16
	C503,C504	CKSRYB392K50
	C522,C550	CKSRYB682K50
	RESISTORS	
	R565,R566,R569,R570	RN1/16SC47R0D
	R598,R599	RN1/16SE1000D
	R563,R564,R567,R568	RN1/16SE1001D
	R515,R516,R525,R526	RN1/16SE1002D
	R545,R546	RN1/16SE1202D
	R501,R502	RN1/16SE2200D
	R549-R552	RN1/16SE2202D
	R557-R560	RN1/16SE2401D
	R507,R508	RN1/16SE2700D
	R505,R506	RN1/16SE3300D
	R517-R524	RN1/16SE3901D
	Other Resistors	RS1/16S###J
	OTHERS	
	CN501 PLUG	CKS3159
	JA503 HEADPHONE JACK	DKB1065
	JA501,JA502,JA504 MIC. JACK	DKN1248

Mark No.	Description	Part No.

F BOOTH/REC ASSY

	SEMICONDUCTORS	
	IC201,IC202	AK4393VF
	IC204,IC205,IC209-IC211	NJM4580MD
	IC206,IC207	NJM5532DD
	IC212,IC213	TC7SH08FUS1
	Q205-Q220	2SC3326
	COILS AND FILTERS	
	F201-F214 FERRITE BEAD	VTF1093
	SWITCHES AND RELAYS	
	S201	DSG1084
	CAPACITORS	
	C265-C272	CCSRCH151J50
	C212-C215,C231-C234	CCSRCH271J50
	C229,C230	CCSRCH821J50
	C218,C219,C237,C238	CEHANP100M35
	C245-C248,C253-C256	CEHANP100M35
	C277-C280	CEHANP470M25
	C202,C205,C222,C226	CEHAT100M50
	C241,C242	CEHAT101M10
	C285,C286	CEHAT101M25
	C204,C225	CEHAT221M10
	C201,C224,C273-C276	CKSRYB103K50
	C203,C206-C209,C216,C217	CKSRYB104K25
	C223,C227,C228,C235,C236	CKSRYB104K25
	C239,C240,C243,C244	CKSRYB104K25
	C251,C252,C261,C263	CKSRYB104K25
	C281-C284,C290	CKSRYB104K25
	C210,C211	CKSRYB152K50
	C401-C404	CQMA103J50
	C405-C408	CQMA222J50
	C249,C250,C257,C258	CQMA392J50
	C389-C396	CQMA682J50
	RESISTORS	
	R321-R324	RD1/2VM101J
	R313-R316	RN1/16SC68R0D
	R287-R290,R293-R296	RN1/16SE1002D
	R249,R250	RN1/16SE1802D
	R193,R196	RN1/16SE2002D
	R291,R292,R297-R300	RN1/16SE2202D
	R325,R326	RN1/16SE2202D
	R253,R254,R263,R264	RN1/16SE2700D
	R267,R268,R277,R278	RN1/16SE2700D
	R301-R304	RN1/16SE2700D
	R209-R212,R215-R218	RN1/16SE3901D
	R233-R244	RN1/16SE3901D
	R192,R197	RN1/16SE3902D
	R257,R258,R269,R270	RN1/16SE4300D
	R247,R248	RN1/16SE6201D
	R213,R214,R219,R220	RN1/16SE8201D
	Other Resistors	RS1/16S###J
	OTHERS	
	CN201,CN202 PLUG	CKS3158
	JA203 4P PIN JACK	DKB1073
	JA201,JA202 HEADPHONE JACK	DKN1281
	0 ROTARY SW STAY	DNH2646

Mark No.	Description	Part No.

G MASTER ASSY

SEMICONDUCTORS

	IC331	AK4393VF
	IC333,IC334	NJM4580MD
	IC335,IC336	NJM5532DD
	IC332	PGA2310UA
	IC337,IC338	TC7SH08FUS1
	Q331-Q338	2SC3326
	D331-D338	1SS355

COILS AND FILTERS

	F301-F308 FERRITE BEAD	VTF1093

CAPACITORS

	C360-C365,C368,C369	CCSRCH151J50
	C342-C345	CCSRCH271J50
	C330,C381	CCSRCH330J50
	C332,C335,C350,C353,C355	CEAT100M50
	C382,C383	CEAT101M25
	C334	CEAT221M10
	C348,C349	CEHANP100M35
	C372-C375	CEHANP470M25
	C331,C358,C359,C366,C367	CKSRYB103K50
	C370,C371,C386,C388	CKSRYB103K50
	C311,C312,C333,C336,C337	CKSRYB104K25
	C346,C347,C351,C352,C354	CKSRYB104K25
	C901-C904	CKSRYB104K25
	C340,C341	CKSRYB152K50
	C376-C379	CQMA103J50
	C397-C400	CQMA682J50

RESISTORS

	R391-R394	RD1/2VM101J
	R387-R390	RN1/16SC68R0D
	R355-R362	RN1/16SE1002D
	R996,R997	RN1/16SE2002D
	R363-R370	RN1/16SE2202D
	R371-R374	RN1/16SE2700D
	R339-R346	RN1/16SE3901D
	R331,R998	RN1/16SE3902D
	R347-R350	RN1/16SE8201D
	Other Resistors	RS1/16S###J

OTHERS

	CN331 PLUG	CKS3155
	CN332 PLUG	CKS3158
	JA331,JA332 CANON CONNECTOR	DKB1072

H MIC ASSY

SEMICONDUCTORS

	IC601	NJM4580MD
	Q601,Q602	2SC4081
	D601-D604	1SS355

COILS AND FILTERS

	F601,F602 FERRITE BEAD	VTF1093
	L601,L602 CHIP BEAD	VTL1105

CAPACITORS

	C607,C608	CCSRCH101J50
	C601,C602,C605,C606	CCSRCH102J50
	C609	CCSRCH331J50
	C611	CEALNP220M16
	C603,C604,C612,C616	CEHAS100M16
	C814	CFTNA334J50
	C610,C613	CKSRYB104K25

RESISTORS

	R601,R602	RN1/16SE1000D
	R611	RN1/16SE1002D
	R615	RN1/16SE2202D
	R608	RN1/16SE3300D
	R614	RN1/16SE3901D
	R609,R610	RN1/16SE4701D
	Other Resistors	RS1/16S###J

OTHERS

	JA601 CANON CONNECTOR	DKB1068
	CN602 5P HEADER	DKN1389
	CN601 KR CONNECTOR	S5B-PH-K-S

I MIC VR ASSY

RESISTORS

	VR601	DCS1083

OTHERS

	CN901 B TO B CONNECTOR 5P	DKP3681

J HP ASSY

COILS AND FILTERS

	F801-F803 FERRITE BEAD	VTF1093

CAPACITORS

	C815	CFTLA103J50
	C806	CFTLA474J50
	C809,C810	CKSRYB104K25

RESISTORS

	All Resistors	RS1/16S###J

OTHERS

	JA10 HEADPHONE JACK	DKN1281
	CN9 KR CONNECTOR	S4B-PH-K-S

K DIGITAL SUB ASSY

SEMICONDUCTORS

	IC701,IC705-IC707	CS8420-CSZD1
	IC721	TC74VHCU04FT
	IC711,IC722	TC7SH08FUS1
	IC702,IC708,IC716	TC7WH157FU
	IC710,IC719,IC720	TC7WU04FU
	Q704-Q709	DTC124EUA
	D701-D703	1SS355
	D706-D708	DAN217

COILS AND FILTERS

	L707 PULSE TRANS.	PTL1003
	L751-L753 COMMON CHOKE COIL	PTL1017
	F701-F726 FERRITE BEAD	VTF1093

Mark	No.	Description	Part No.
		SWITCHES AND RELAYS	
	S701		VSH1009
		CAPACITORS	
	C771,C777,C785		CCSRCH220J50
	C769,C775,C783		CCSRCH221J50
	C772,C778,C787		CCSRCH470J50
	C722,C729,C737,C745		CEAT100M50
	C761		CEAT101M16
	C759		CEAT470M16
	C703,C705-C708,C710-C713		CKSRYB103K50
	C715-C718,C721,C727,C732		CKSRYB103K50
	C740,C748,C770,C776,C780		CKSRYB103K50
	C784,C788-C792		CKSRYB103K50
	C701,C702,C719,C720,C723		CKSRYB104K25
	C726,C728,C730,C731		CKSRYB104K25
	C735,C736,C738,C739		CKSRYB104K25
	C743,C744,C746,C747		CKSRYB104K25
	C751-C755,C760,C762,C767		CKSRYB104K25
	C773,C779,C786,C796-C798		CKSRYB104K25
	C725		CKSRYB223K50
	C724		CKSRYB224K16
	C733,C741,C749		CKSRYB334K10
	C734,C742,C750		CKSRYB472K50
	C704,C709,C714		CKSRYB473K50
	C768,C774,C782		CQMA221J50
		RESISTORS	
	R750,R755,R790		RD1/2VM820J
	Other Resistors		RS1/16S###J
		OTHERS	
	JA704-JA706	HEADPHONE JACK	DKN1393
	JA701-JA703,JA707	1P JACK (ORG)	PKB1036
	CN701,CN702	19P 1.25FJ CONNECTOR	VKN1775
	KN1	WRAPPING TERMINAL	VNF1084

L VISUAL LINK ASSY

Mark	No.	Description	Part No.
		SEMICONDUCTORS	
	IC801		TC74HCT04AF
	IC802		TC74HCT08AF
	Q801		DTC124EUA
	D801,D802,D804		DAN217
	D803		NNCD6.2MF
		CAPACITORS	
	C803		CKSRYB103K50
	C801,C802		CKSRYB104K25
		RESISTORS	
	R802,R803		RD1/2VM221J
	Other Resistors		RS1/16S###J
		OTHERS	
	CN801	10P FFC CONNECTOR	52044-1045
	JA801	8P MINI DIN CONNECTOR	DKN1035
	JA802	DIN CONNECTOR 5P	DKN1188

M MASTER FADER ASSY

Mark	No.	Description	Part No.
		RESISTORS	
	VR201		DCV1018
		OTHERS	
	CN907	B TO B CONNECTOR 5P	DKP3681

N BUS1 ASSY

Mark	No.	Description	Part No.
		SEMICONDUCTORS	
	IC505		AK5385AVS
	IC513		NJM2903M
	IC503,IC504		NJM4580MD
	IC506,IC508-IC512		TC7SH08FUS1
	Q532		2SC1740S
	Q531		2SC2458
	Q533		DTC124EUA
	D501,D502		RB706D-40
		COILS AND FILTERS	
	F501-F508	FERRITE BEAD	VTF1093
		CAPACITORS	
	C518,C526		CCSRCH101J50
	C507,C513,C515		CEAT100M50
	C506,C514		CEAT220M25
	C502,C516		CEAT221M10
	C501,C504		CEAT221M25
	C510		CEAT470M16
	C503		CEAT471M10
	C508,C512		CFTNA334J50
	C558-C560		CFTNA473J50
	C519,C521-C523,C525,C527		CKSRYB104K25
	C529,C531-C534,C538-C547		CKSRYB104K25
	C549-C551,C554,C555		CKSRYB104K25
	C561-C575		CKSRYB104K25
	C520,C528		CKSRYB222K50
	C524		CKSRYB224K16
		RESISTORS	
	R528,R535		RN1/16SC47R0D
	R527,R534		RN1/16SE1000D
	R521,R523,R531,R536		RN1/16SE1001D
	R526		RN1/16SE1002D
	R538		RN1/16SE1503D
	R522,R537		RN1/16SE2401D
	Other Resistors		RS1/16S###J
		OTHERS	
	CN501	10P TOP POST	B10B-EH
	CN510	KR CONNECTOR	B5B-PH-K
	CN504-CN506	CONNECTOR	CKS2648
	CN508,CN509	CONNECTOR	CKS2649
	CN507	FFC CONNECTOR 40P	HLEM40R-1
	0	PCB BINDER	VEF1040
	CN502,CN503	19P 1.25FJ CONNECTOR	VKN1775
	KN1,KN2	WRAPPING TERMINAL	VNF1084

O BUS2 ASSY

Mark	No.	Description	Part No.
		SEMICONDUCTORS	
	IC301,IC302,IC304-IC306		TC7SH08FUS1
	Q301		2SC1740S

Mark No.	Description	Part No.
Q302		2SC2458
COILS AND FILTERS		
F301-F305	FERRITE BEAD	VTF1093
CAPACITORS		
C303,C323		CEAT221M10
C301,C304		CEAT221M25
C326		CEAT470M16
C305		CEAT471M10
C324,C325		CFTNA473J50
C306-C310,C312-C318		CKSRYB104K25
C320-C322,C327-C339		CKSRYB104K25
RESISTORS		
All Resistors		RS1/16S###J
OTHERS		
CN302,CN303	1.25FJ CONNECTOR	19R-1.25FJ
CN306	10P FFC CONNECTOR	52045-1045
CN301	10P TOP POST	B10B-EH
CN311	CONNECTOR	CKS2645
CN304,CN308-CN310	CONNECTOR	CKS2648
CN305,CN307	CONNECTOR	CKS2649
KN3	WRAPPING TERMINAL	VNF1084

P PANEL1 ASSY

SEMICONDUCTORS		
IC4501-IC4503		TC74HC4051AF
Q4502,Q4505,Q4506,Q4508,Q4510		2SB1188
Q4501,Q4503,Q4504,Q4507,Q4509		DTC143EUA
D4594-D4615,D4621-D4624		1SS355
D4547		NSPW315BS-0359
D4506,D4507,D4525,D4526,D4540		SLI-343URCW(RST)
D4502-D4505,D4508-D4511		SLI-343YCW(RST)
D4522-D4524,D4527-D4530		SLI-343YCW(RST)
D4541-D4546,D4552-D4559		SLI-343YCW(RST)
D4548-D4551		SLR-343BBT(HJKL)
D4501,D4512-D4521,D4531-D4539		TLGE68TG(NP)
SWITCHES AND RELAYS		
S4502,S4504,S4508,S4509		DSG1079
S4512,S4513		DSG1079
S4507,S4511		DSG1085
S4501,S4503		DSH1058
S4505,S4510		DSH1060
S4506		DSK1026
S4514-S4524		VSG1024
CAPACITORS		
C4501-C4517		CKSRYB104K25
RESISTORS		
VR4501-VR4508		DCS1065
VR4509-VR4512		DCS1086
Other Resistors		RS1/16S###J
OTHERS		
CN4503	FFC CONNECTOR 20P	52492-2020
CN4501	FFC CONNECTOR 28P	52492-2820
CN4505,CN4506	FFCCONNECTOR 31P	52492-3120
CN4504	KR CONNECTOR	B4B-PH-K-S
CN4502	KR CONNECTOR	B4B-PH-K-Y

Q PANEL2 ASSY

SEMICONDUCTORS		
IC4504		TC74HC4051AF
Q4513,Q4514,Q4517,Q4518		2SB1188
Q4511,Q4512,Q4515,Q4516		DTC143EUA
D4616-D4620		1SS355
D4560,D4561,D4576,D4577		SLI-343URCW(RST)
D4579,D4580		SLI-343URCW(RST)
D4562-D4565,D4575,D4578		SLI-343YCW(RST)
D4581-D4584		SLI-343YCW(RST)
D4566-D4574,D4585-D4593		TLGE68TG(NP)
SWITCHES AND RELAYS		
S4526,S4527		DSG1079
S4525		DSH1057
CAPACITORS		
C4518-C4528		CKSRYB104K25
RESISTORS		
VR4513,VR4514,VR4516,VR4518		DCS1065
VR4515,VR4517		DCS1086
Other Resistors		RS1/16S###J
OTHERS		
CN4507	7P FFC CONNECTOR	52045-0745
CN4508	FFC CONNECTOR 13P	52492-1320
CN4509	FFC CONNECTOR 28P	52492-2820
CN4510	5P HEADER	DKN1366

R ISOLATOR ASSY

RESISTORS		
VR4013-VR4015		DCS1084
OTHERS		
CN4014	7P FFC CONNECTOR	52045-0745

S PANEL3 ASSY

SEMICONDUCTORS		
IC4008,IC4009,IC4011		TC74HC238AF
IC4001,IC4002,IC4006		TC74HC273AF
IC4005,IC4007		TC74HC4051AF
IC4003,IC4004		TD62083APG
Q4002,Q4004,Q4006,Q4009,Q4010		2SB1188
Q4012		2SB1188
Q4001,Q4003,Q4005,Q4007,Q4008		DTC143EUA
Q4011,Q4013-Q4020		DTC143EUA
D4078-D4095		1SS355
D4005,D4006,D4025,D4026		SLI-343URCW(RST)
D4044,D4045,D4063,D4064		SLI-343URCW(RST)
D4002-D4004,D4007-D4010		SLI-343YCW(RST)
D4022-D4024,D4027-D4030		SLI-343YCW(RST)
D4041-D4043,D4046-D4049		SLI-343YCW(RST)
D4060-D4062,D4065-D4068		SLI-343YCW(RST)
D4001,D4011-D4021,D4031-D4040		TLGE68TG(NP)
D4050-D4059,D4069-D4077		TLGE68TG(NP)
SWITCHES AND RELAYS		
S4001-S4004		DSG1079

Mark	No.	Description	Part No.
	S4005-S4008		DSH1058
	CAPACITORS		
	C4001,C4027		CEJQ221M6R3
	C4002-C4026		CKSRYB104K25
	RESISTORS		
	VR4001-VR4012		DCS1065
	Other Resistors		RS1/16S###J
	OTHERS		
	CN4004	FFC CONNECTOR 10P	52492-1020
	CN4001	FFFC CONNECTOR 13P	52492-1320
	CN4010	FFC CONNECTOR 20P	52492-2020
	CN4002	FFC CONNECTOR 28P	52492-2820
	CN4009,CN4012,CN4013	FFC CONNECTOR 31P	52492-3120
	CN4006,CN4011	KR CONNECTOR	B4B-PH-K-S
	CN4007	KR CONNECTOR	S3B-PH-K-S
	CN4003	KR CONNECTOR	S4B-PH-K-S
	CN4005, CN4008	KR CONNECTOR	S4B-PH-K-Y

POWER ASSY

	OTHERS		
	0	SCREW	BBZ30P060FZK
	0	SCREW	BBZ30P080FTC
	0	SCREW	PMH30P080FTC

T CH1/CH3/CH5 FADER ASSY

	RESISTORS		
	VR206		DCV1018
	OTHERS		
	CN901	KR CONNECTOR	S4B-PH-K-S

U CH1/CH3/CH5 FADER ASSY

	RESISTORS		
	VR203		DCV1018
	OTHERS		
	CN903	KR CONNECTOR	S4B-PH-K-S

V CH1/CH3/CH5 FADER ASSY

	RESISTORS		
	VR207		DCV1018
	OTHERS		
	CN905	KR CONNECTOR	S4B-PH-K-S

W CH2/CH4/CH6 FADER ASSY

	RESISTORS		
	VR205		DCV1018
	OTHERS		
	CN902	KR CONNECTOR	S4B-PH-K-S

X CH2/CH4/CH6 FADER ASSY

	RESISTORS		
	VR208		DCV1018
	OTHERS		
	CN906	KR CONNECTOR	S4B-PH-K-S

Y CH2/CH4/CH6 FADER ASSY

	RESISTORS		
	VR204		DCV1018
	OTHERS		
	CN904	KR CONNECTOR	S4B-PH-K-S

Z CROSS FADER ASSY

	RESISTORS		
	VR202		DCV1016
	OTHERS		
	CN908	KR CONNECTOR	S3B-PH-K-S

AA ACIN ASSY

	COILS AND FILTERS		
	⚠L1,L2	LINE FILTER	DTL1131
	SWITCHES AND RELAYS		
	⚠S2		DSA1031
	CAPACITORS		
	⚠C2,C3		ACE7045
	⚠C1 (10000pF/AC250V)		ACG7033
	OTHERS		
	⚠CN1	AMP U-P CONNECTOR 2P	2-178496-4
	⚠H1,H2	FUSE CLIP	AKR1004
	⚠CN2	4P-VH CONNECTOR	B4P7-VH
	0	PCB BINDER	VEF1040
	0	SCREW PLATE	VNE1948

AB POWER ASSY

	SEMICONDUCTORS		
	⚠IC121 (250mA)		AEK7002
	⚠IC127,IC128 (315mA)		AEK7003
	⚠IC111,IC122-IC125 (750mA)		AEK7007
	⚠IC110 (2A)		AEK7013
	⚠IC112,IC113 (2.5A)		AEK7014
	⚠IC117 (5A)		AEK7019
	⚠IC118-IC120 (7A)		AEK7021
	⚠IC106		BA05T
	⚠IC104,IC105,IC116		BD9702T-V5
	⚠IC114		NJM2360AD
	⚠IC126		NJM78L05A
	Q121		2SC2458

Mark No.	Description	Part No.
D114		1SS355
⚠D106,D111,D116		RB060L-40
⚠D112		RB160L-40
⚠D117-D120		RB160L-60
⚠D104,D105,D115,D124		S5566G(TPB2)

COILS AND FILTERS

L101,L105	RADIAL READ INDUCTOR	DTL1120
L102,L104	RADIAL READ INDUCTOR	DTL1121

CAPACITORS

C138	CCSRCH221J50
C144,C145	CEAT101M16
C126,C137	CEAT471M25
C117,C124,C125	CEAT472M10
C121	CEHANP4R7M50
C130	CEHAT101M35
C127	CEHAT102M10
C131,C132	CEHAT102M25
C128	CEHAT222M10
C120,C139,C147	CEHAT471M16
C133,C134	CEHAT471M25
C118,C119,C146	CKSRYB104K25
C101-C107	CKSRYB473K50
C116,C135,C136 (4700/35)	DCH1211
C115 (3300/25)	DCH1235

RESISTORS

R116	RN1/16SE1001D
R126	RN1/16SE1601D
R102,R112	RN1/16SE2701D
R125	RN1/16SE3901D
R103	RN1/16SE4300D
R117	RN1/16SE4701D
R113	RN1/16SE6200D
Other Resistors	RS1/16S###J

OTHERS

CN104,CN105 10P TOP POST	B10B-EH
CN102 4P TOP POST	B4B-EH
CN103 6P TOP POST	B6B-EH
CN101 7P-VH CONNECTOR	B7P-VH
CN107 9P TOP POST	B9B-EH
0 HEATSINK	DNG1094
0 PCB BINDER	VEF1040
KN1 WRAPPING TERMINAL	VNF1084

AC REG1 ASSY

SEMICONDUCTORS

⚠D101,D102	D4SBS4-7100

OTHERS

0 HEATSINK A	DNG1092
J108 BOARD IN CONNECTOR ASSY	PF08NN-S12

AD REG2 ASSY

SEMICONDUCTORS

⚠IC103,IC115	BA05T
⚠IC101	BA15T
⚠IC102	NJM7915FA

CAPACITORS

C109-C114,C142,C143	CKSRYB104K25

RESISTORS

All Resistors	RS1/16S###J

OTHERS

0 HEATSINK B	DNG1093
J109 BOARD IN CONNECTOR ASSY	PF09EN-S07

6. ADJUSTMENT

• There is no information to be shown in this chapter.