
9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

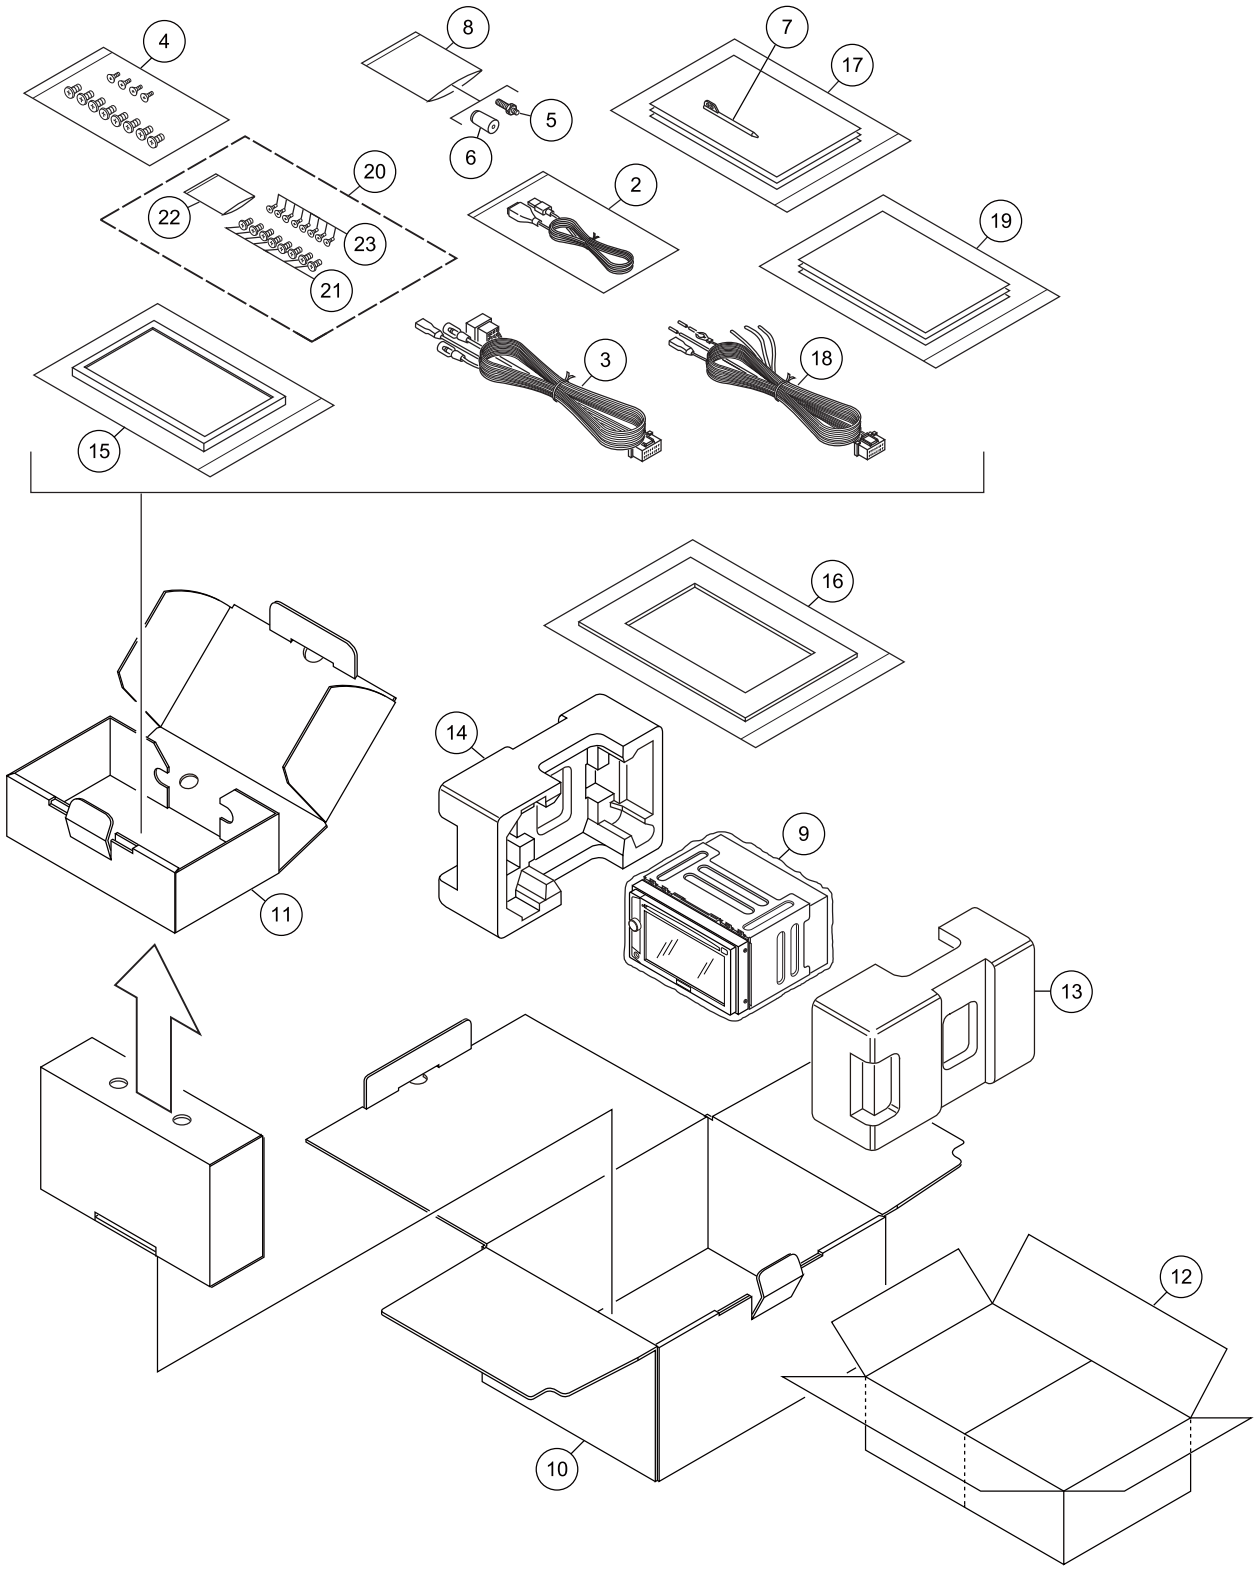


PACKING SECTION PARTS LIST

Mark	No.	Description	AVH-P4000DVD/XN/UC	AVH-P4000DVD/XNEW5	AVH-P4000DVD/XN/RE
	1	•••••			
	2	Cord Assy	CDP1040	CDP1040	CDP1040
	3	Cord Assy	Not used	CDP1116	CDP1116
	4	Screw Assy	Not used	CEA7395	CEA7395
	5	Screw	Not used	CBA1650	CBA1650
	6	Bush	Not used	CNV3930	CNV3930
	7	Pen	CNV8969	CNV8969	CNV8969
*	8	Polyethylene Bag	Not used	E36-615	E36-615
	9	Polyethylene Bag	CEG1402	CEG1401	CEG1401
	10	Unit Box	CHG6448	CHG6447	CHG6449
	11	Sub Unit Box	CHG6454	CHG6453	CHG6453
	12	Contain Box	CHL6448	CHL6447	CHL6449
	13	Protector	CHP3516	CHP3514	CHP3514
	14	Protector	CHP3517	CHP3515	CHP3515
	15	Panel	CNS9475	CNS9365	CNS9365
	16	Panel	Not used	CNS9366	CNS9366
	17-1	Polyethylene Bag	CEG1116	CEG1116	CEG1116
	17-2	Owner's Manual	CRB2528	CRB2514	CRB2526
	17-3	Owner's Manual	CRB2529	CRB2515	CRB2527
	17-4	Owner's Manual	Not used	CRB2516	Not used
	17-5	Installation Manual	CRD4281	CRD4276	CRD4280
*	17-6	Warranty Card	CRY1246	CRY1265	CRY1265
	17-7	Caution Card	CRP1310	Not used	Not used
	18	Cord Assy	CDP1089	Not used	Not used
	19-1	Polyethylene Bag	Not used	CEG1116	Not used
	19-2	Owner's Manual	Not used	CRB2517	Not used
	19-3	Owner's Manual	Not used	CRB2518	Not used
	19-4	Owner's Manual	Not used	CRB2519	Not used
	20	Screw Assy	CEA3797	Not used	Not used
	21	Screw	BMZ50P060FTC	Not used	Not used
*	22	Polyethylene Bag	CEG-127	Not used	Not used
	23	Screw	CMZ50P060FTC	Not used	Not used

Owner's Manual,Installation Manual

Part No.	Language
CRB2528	English
CRB2529	French
CRD4281	English, French
CRB2514	English
CRB2515	Spanish
CRB2516	German
CRB2517	French
CRB2518	Italian
CRB2519	Dutch
CRD4276	English, Spanish, German, French, Italian, Dutch
CRB2526	English
CRB2527	Russian
CRD4280	English, Russian

9.2 EXTERIOR(1)

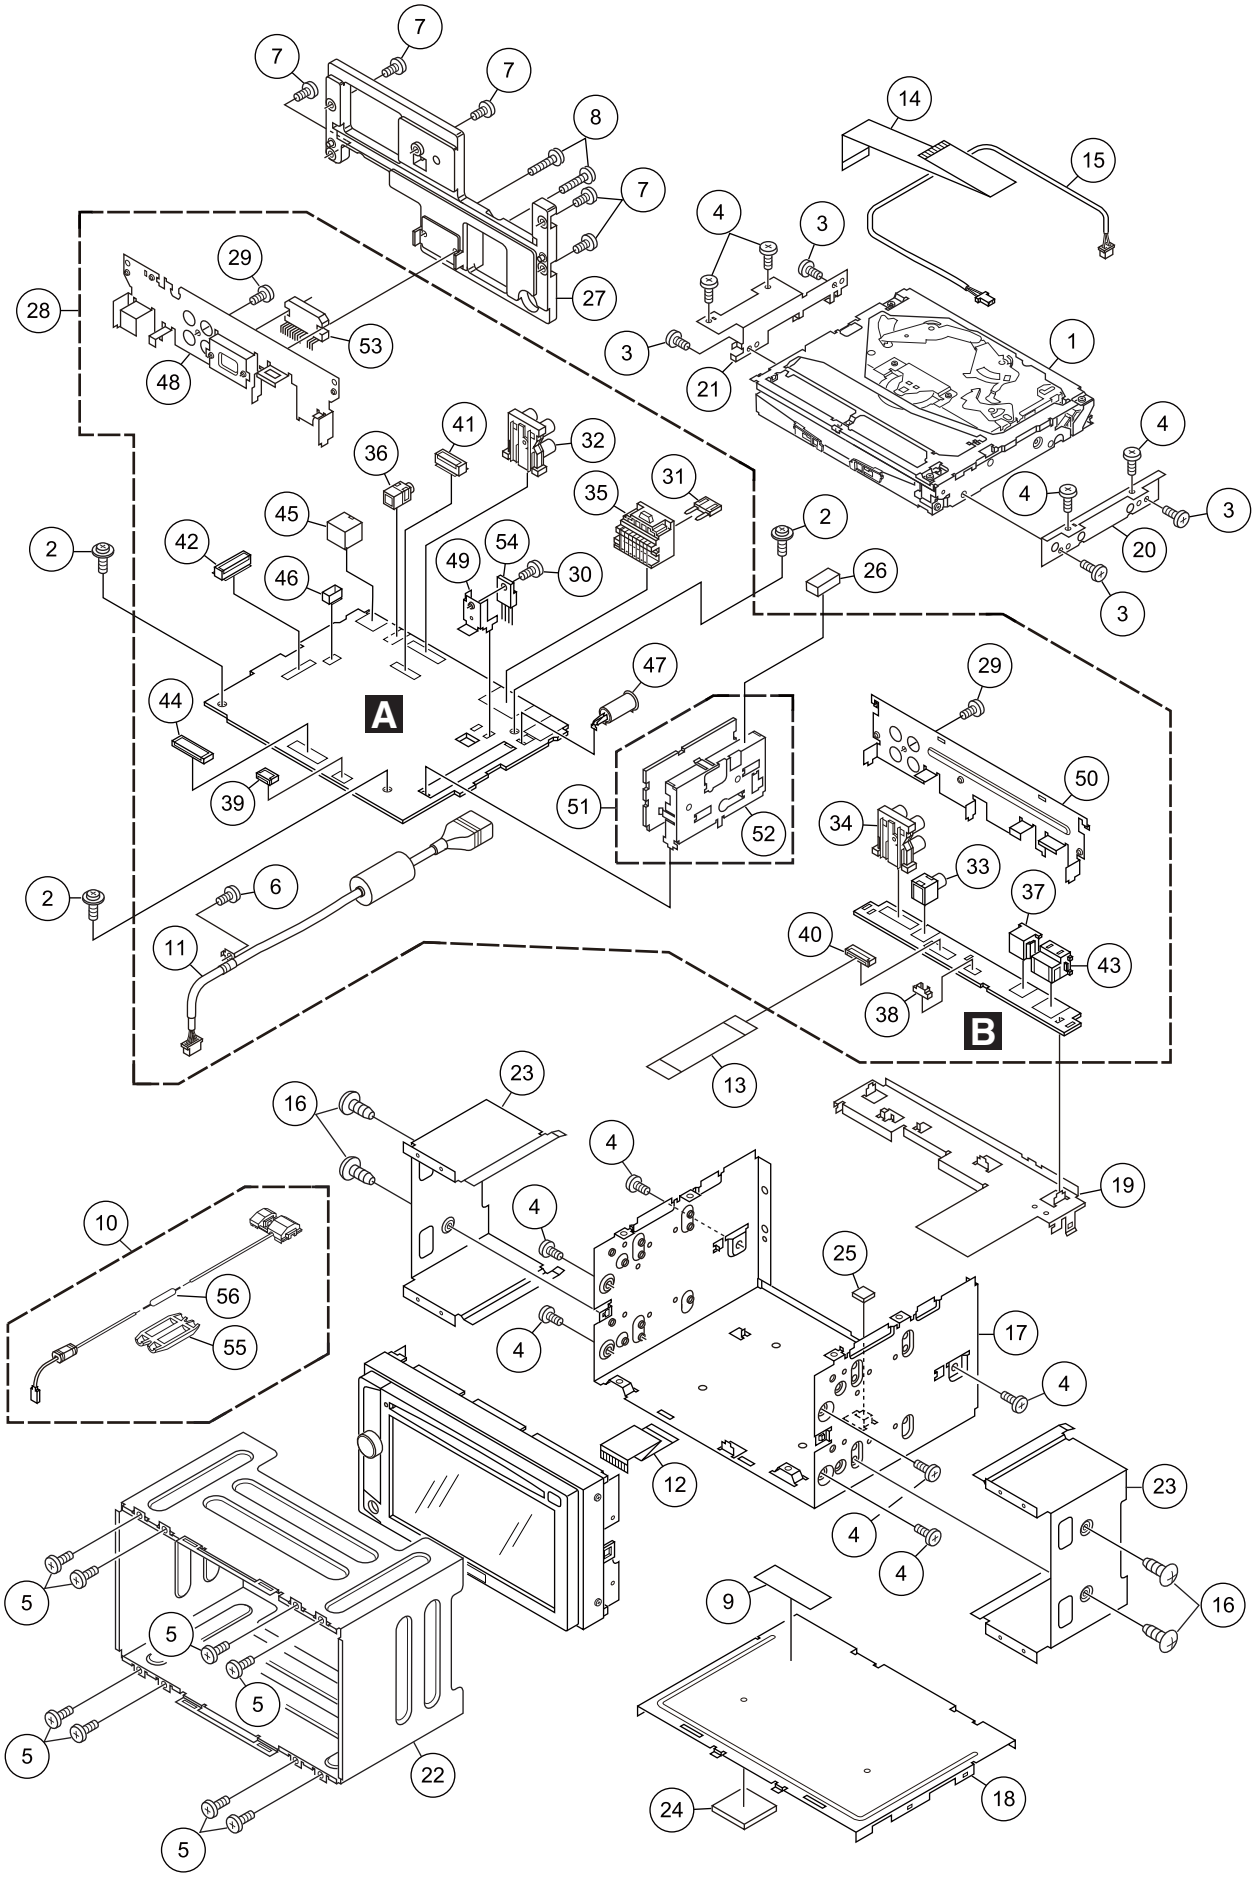

(1) EXTERIOR(1) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	DVD Mechanism Module(MS5AVCOD)	CXK6631
	2	Screw	ASZ26P050FTC
	3	Screw	BMZ20P030FTC
	4	Screw	BMZ26P050FTC
	5	Screw	See Contrast table(2)
	6	Screw	BSZ26P080FTC
	7	Screw	BSZ26P080FTC
	8	Screw	BSZ26P160FTC
	9	Label	See Contrast table(2)
	10	Cord Assy	CDE8697
	11	Cord Assy	CDE8530
	12	FFC	CDE8542
	13	FFC	CDE8547
	14	FFC	CDE8548
	15	Cord Assy	CDE8636
	16	Screw	See Contrast table(2)
	17	Chassis	CNA3038
	18	Case	CNB3470
	19	Holder	CND4300
	20	Bracket	CND4307
	21	Bracket	CND4308
	22	Holder	See Contrast table(2)
	23	Holder	See Contrast table(2)
	24	Sheet	CNN2211
	25	Sheet	CNN2226
	26	Gasket	CNN2330
	27	Heat Sink	CNR1942
	28	Mother Unit	See Contrast table(2)
	29	Screw	BPZ26P060FTC
	30	Screw	BSZ26P060FTC
⚠	31	Fuse(10 A)	YEK5001
	32	Pin Jack(JA101)	CKB1051
	33	Pin Jack(JA2004)	CKB1065
	34	Pin Jack(JA2003)	CKB1085
	35	Plug(JA141)	CKM1376
	36	Jack(JA501)	CKN1042
	37	Connector(JA2002)	CKS2104
	38	Connector(CN2002)	CKS4823
	39	Connector(CN601)	CKS5036
	40	Connector(CN2001)	CKS5049
	41	Connector(CN121)	CKS5070
	42	Connector(CN901)	CKS5075
	43	Connector(JA2001)	CKS5271
	44	Connector(CN521)	CKS5486
	45	Connector(JA831)	CKS5683
	46	Connector(CN542)	CKS5968
	47	Antenna Jack(JA401)	CKX1056
	48	Holder	CND4298
	49	Holder	CND4299
	50	Holder	CND4301
	51	FM/AM Tuner Unit(U401)	See Contrast table(2)
	52	Holder	CND4324
	53	IC(IC181)	PAL007C
	54	IC(IC1101)	NJM2388F84
	55	Cap	CNS1472
	56	Resistor	RS1/2PMF102J


(2) CONTRAST TABLE


AVH-P4000DVD/XN/UC, AVH-P4000DVD/XNEW5 and AVH-P4000DVD/XN/RE are constructed the same except for the following:

Mark	No.	Description	AVH-P4000DVD/XN/UC	AVH-P4000DVD/XNEW5	AVH-P4000DVD/XN/RE
	5	Screw	Not used	BMZ30P060FTC	BMZ30P060FTC
	9	Label	Not used	CAN5448	Not used
	16	Screw	Not used	CMZ50P060FTC	CMZ50P060FTC
	22	Holder	Not used	CND4337	CND4337
	23	Holder	Not used	CND4338	CND4338
	28	Mother Unit	CWN3118	CWN3116	CWN3117
	51	FM/AM Tuner Unit(U401)	CWE2098	CWE2097	CWE2097

9.3 EXTERIOR(2)

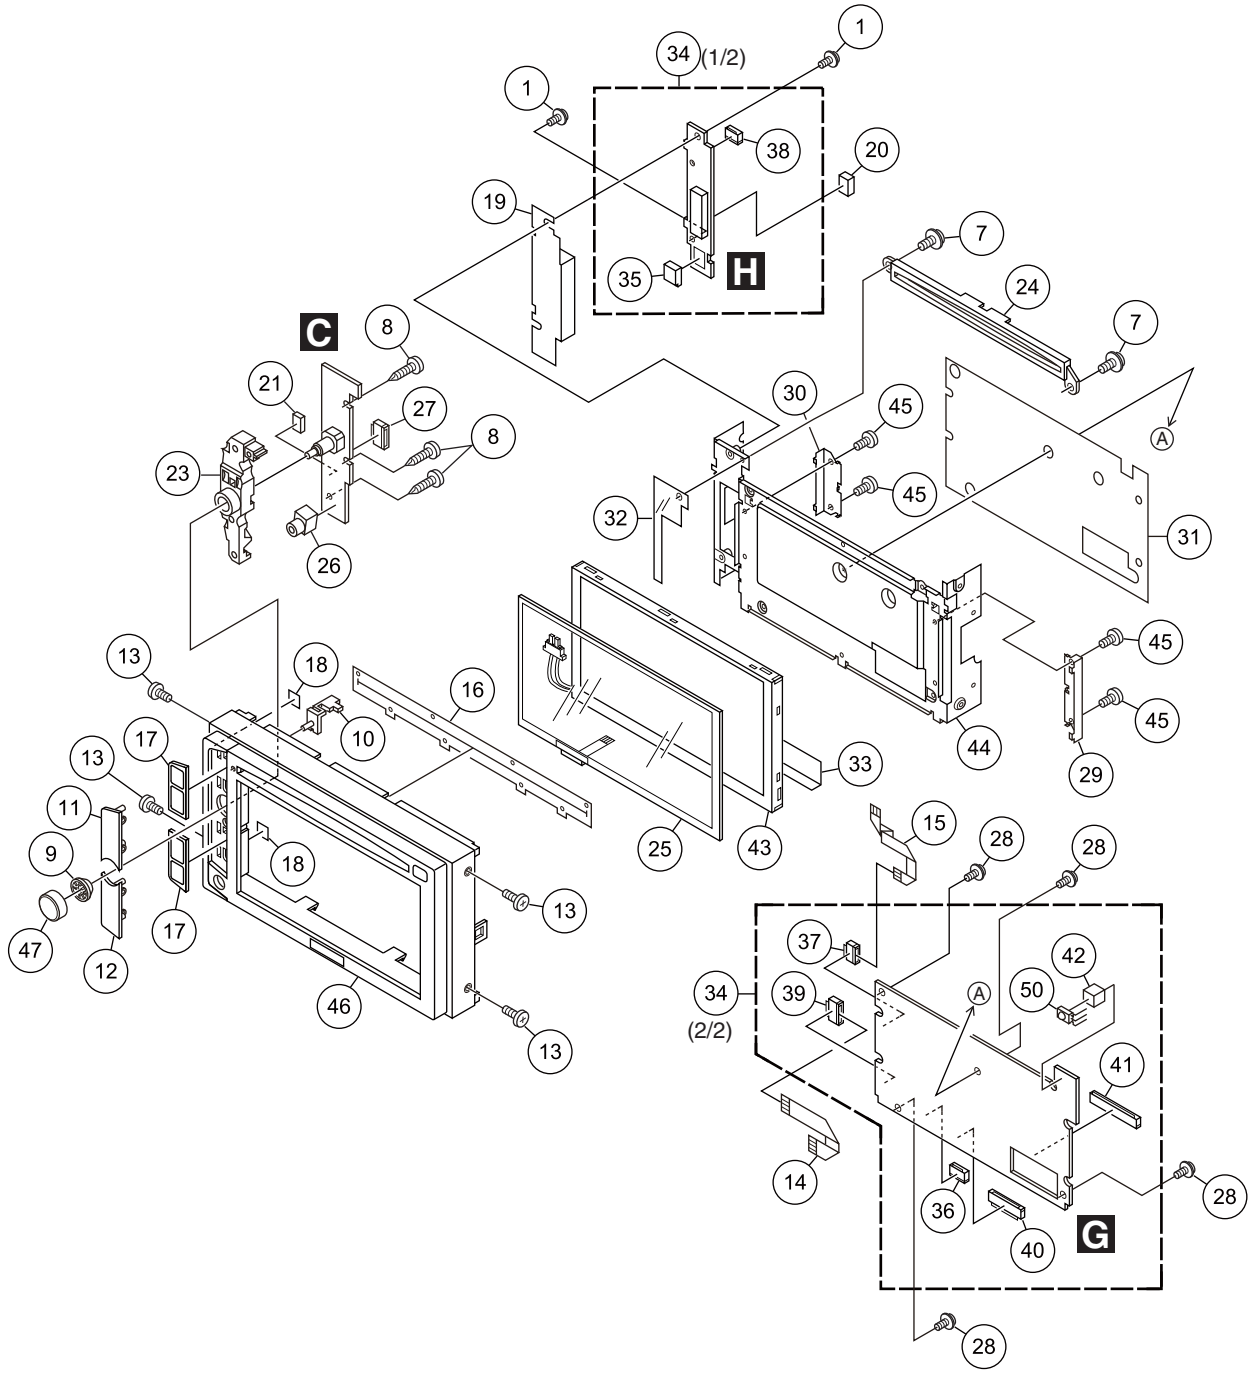

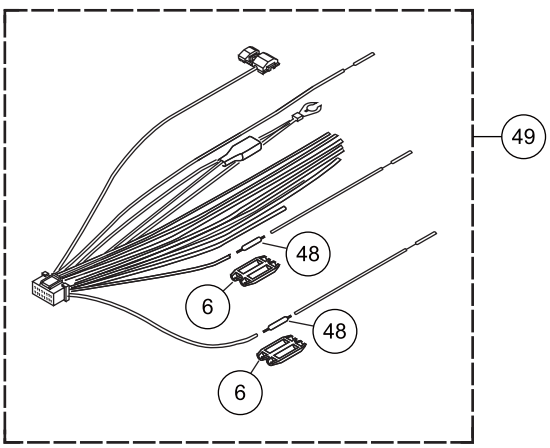

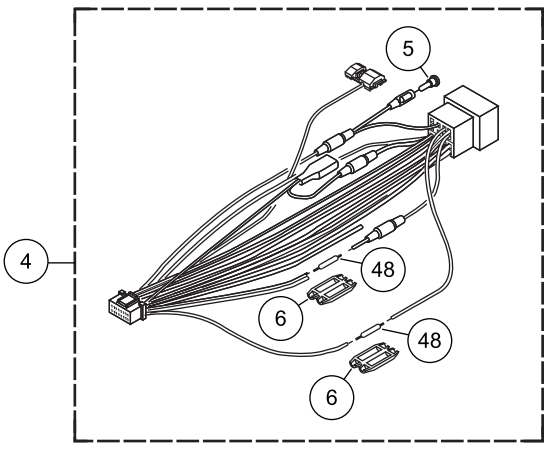

(1) EXTERIOR(2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw(M2 x 3)	CBA1677
	2	•••••	
	3	•••••	
	4	Cord Assy	See Contrast table(2)
	5	Cap	See Contrast table(2)
	6	Cap	CNS1472
	7	Screw(M2.6 x 3.5)	CBA2144
	8	Screw	BPZ20P080FTC
	9	Knob	CAA2997
	10	Button(RESET)	CAI1657
	11	Button(EJECT, SRC)	CAI1658
	12	Button(EQ, DISP OFF)	CAI1659
	13	Screw(M2 x 3)	CBA1877
	14	FFC	CDE8538
	15	FFC	CDE8539
	16	Cover	CNM7086
	17	Cushion	CNN2377
	18	Sheet	CNN2213
	19	Sheet	CNN2334
	20	Spacer	CNN2335
	21	Gasket	CNN2341
	22	•••••	
	23	Lighting Conductor	CNV9880
	24	Holder	CNV9881
	25	Touch Panel	CSX1114
	26	Jack(JA3001)	CKN1049
	27	Connector(CN3001)	CKS5043
	28	Screw	AMZ20P030FTC
	29	Holder	CND4289
	30	Holder	CND4290
	31	Insulator	CNN2017
	32	Insulator	CNN2018
	33	Insulator	CNN2207
	34	Monitor Unit	CWN3126
	35	Connector(CN5201)	CKS4428
	36	Connector(CN5003)	CKS5033
	37	Connector(CN5005)	CKS5033
	38	Connector(CN5602)	CKS5033
	39	Connector(CN5008)	CKS5043
	40	Connector(CN5009)	CKS5100
	41	Connector(CN5501)	CKS5111
	42	Cushion	CNN2016
	43	LCD	CWX3589
	44	Holder Unit	CXC8922
	45	Screw(M2 x 2)	CBA1771
	46	Grille Unit	See Contrast table(2)
	47	Knob Unit	CXC8921
	48	Resistor	RS1/2PMF102J
	49	Cord Assy	See Contrast table(2)
	50	IC(IC5001)	GP1UX31RK

(2) CONTRAST TABLE

AVH-P4000DVD/XN/UC, AVH-P4000DVD/XNEW5 and AVH-P4000DVD/XN/RE are constructed the same except for the following:

Mark	No.	Description	AVH-P4000DVD/XN/UC	AVH-P4000DVD/XNEW5	AVH-P4000DVD/XN/RE
	4	Cord Assy	Not used	CDP1116	CDP1116
	5	Cap	Not used	CKX-003	CKX-003
	46	Grille Unit	CXC8919	CXC8918	CXC8918
	49	Cord Assy	CDP1089	Not used	Not used

9.4 DVD MECHANISM MODULE

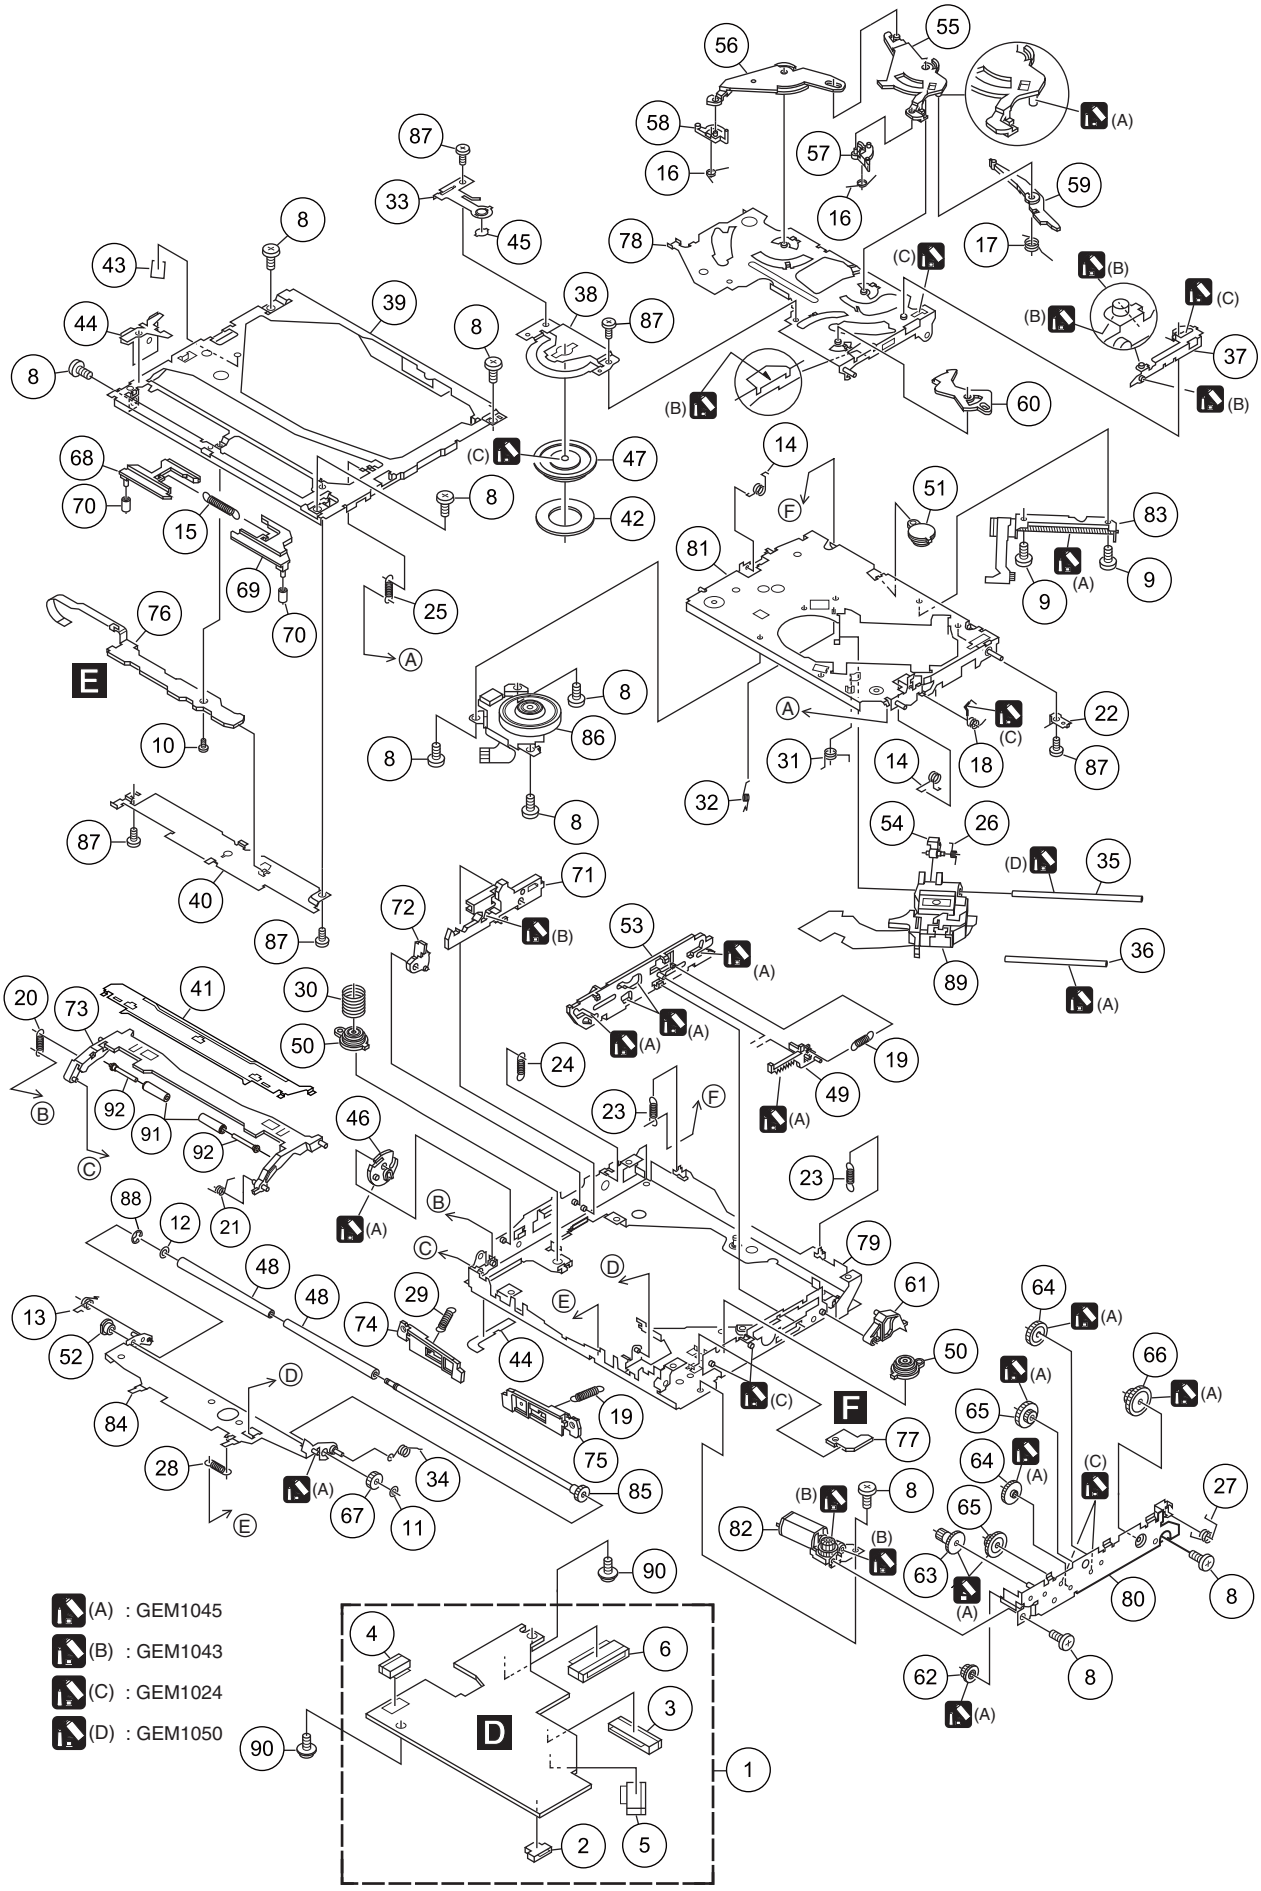

AVH-P4000DVD/XN/UC

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	DVD Core Unit	YWX5005
	2	Connector(CN1852)	CKS4817
	3	Connector(CN1101)	CKS4841
	4	Connector(CN1301)	CKS5017
	5	Connector(CN1201)	CKS5043
	6	Connector(CN1901)	CKS5054
	7	•••••	
	8	Screw	BMZ20P020FTC
	9	Screw	BMZ20P025FNI
	10	Screw	CBA1787
	11	Washer	CBF1038
	12	Washer	CBF1064
	13	Spring	CBH3022
	14	Spring	CBH3023
	15	Spring	CBH2589
	16	Spring	CBH2590
	17	Spring	CBH2591
	18	Spring	CBH2592
	19	Spring	CBH2593
	20	Spring	CBH2596
	21	Spring	CBH2597
	22	Spring	CBL1726
	23	Spring	CBH2599
	24	Spring	CBH2600
	25	Spring	CBH2601
	26	Spring	CBH3025
	27	Spring	CBH2604
	28	Spring	CBH2605
	29	Spring	CBH2710
	30	Spring	CBH2711
	31	Spring	CBH2935
	32	Spring	CBH2890
	33	Spring	CBL1689
	34	Spring	CBH3024
	35	Shaft	CLA4206
	36	Shaft	CLA4701
	37	Lever	CNC9933
	38	Holder	CND2643
	39	Frame	CND2250
	40	Holder	CND2251
	41	Holder	CND3936
	42	Sheet	CNM6883
	43	Sheet	CNM8697
	44	Sheet	CNM9658
	45	Sheet	CNM9407
	46	Cam	CNV7156
	47	Clamper	CNV7158
	48	Roller	CNV7165
	49	Rack	CNV7175
	50	Damper	CNV9061
	51	Damper	CNV9062
	52	Collar	CNV8845
	53	Lever	CNV8865
	54	Rack	CNV9063
	55	Arm	CNV8867
	56	Arm	CNV8868
	57	Arm	CNV9577
	58	Arm	CNV8870
	59	Arm	CNV8871
	60	Arm	CNV8872
	61	Arm	CNV8873
	62	Gear	CNV8874
	63	Gear	CNV8875
	64	Gear	CNV8876
	65	Gear	CNV8877
	66	Gear	CNV8878
	67	Gear	CNV8879
	68	Lever	CNV8903
	69	Lever	CNV8904
	70	Roller	CNV8905
	71	Lever	CNV8908
	72	Arm	CNV8909
	73	Guide	CNV9569
	74	Arm	CNV9116
	75	Arm	CNV9117
	76	Compound Unit(A)	CWX3595
	77	Compound Unit(B)	CWX3559
	78	Arm Unit	CXC7872
	79	Frame Unit	CXC6442
	80	Bracket Unit	CXB8685
	81	Chassis Unit	CXC6443
	82	Motor Unit(LOAD)(M1)	CXC4912
	83	Motor(STEPPING)(M2)	CXM1364
	84	Arm Unit	CXC5486
	85	Roller Unit	CXC5708
	86	Motor(SPDL)(M3)	CXM1362
	87	Screw	JFZ20P018FTC
	88	Washer	YE20FTC
	89	Pickup Unit(Service)	CXX2118
	90	Screw	IMS20P030FTC
	91	Collar	CNV9570
	92	Shaft	CLA4771

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of µ. Please do not make a mistake.*

Unit Number : CWN3116(EW5)
Unit Number : CWN3117(RE)
Unit Number : CWN3118(UC)
Unit Name : Mother Unit
Unit Number :
Unit Name : Keyboard Unit
Unit Number : CWN3126
Unit Name : Monitor Unit
Unit Number : YWX5005
Unit Name : DVD Core Unit
Unit Number : CWX3595
Unit Name : Compound Unit(A)
Unit Number : CWX3559
Unit Name : Compound Unit(B)

Mother Unit
Consists of
Mother PCB
Interface PCB

A B
Unit Number : CWN3116(EW5)
Unit Number : CWN3117(RE)
Unit Number : CWN3118(UC)
Unit Name : Mother Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 181	(A,90,132) IC	PAL007C
IC 201	(B,117,78) IC	PML018A
IC 301	(B,81,75) IC	AN15887A

Circuit Symbol and No.		Part No.
IC 541	(A,49,82) IC	PE5611B
IC 543	(A,26,96) IC	R5523N001B
IC 601	(A,79,33) IC(EW5,RE)	PE5632A
	(A,79,33) IC(UC)	PE5633A
IC 602	(A,97,18) IC	S-80827CNNB-B8M
IC 751	(A,95,60) IC	HA12241FP
IC 801	(A,97,51) IC	341S2094
IC 831	(B,7,105) IC	TC7WH08FU
IC 1001	(B,127,59) IC	S-812C33AUA-C2N
IC 1021	(B,38,54) IC	S-1206B41-U3
IC 1101	(A,140,93) IC	NJM2388F84
IC 1151	(B,145,31) IC	NJM2391DL1-33
IC 1201	(B,10,84) IC	LT3461AES6
IC 1401	(B,25,19) IC	AN8011S
IC 1601	(B,48,39) IC	BA00BC0WFP
IC 2001	(A,116,14) L-MOS And Gate	TC7SET08FUS1
Q 101	(A,61,125) Transistor	IMH23
Q 102	(A,57,125) Transistor	IMH23
Q 104	(A,59,120) Transistor	UMD2N
Q 121	(A,78,113) Transistor	UMF23N
Q 161	(B,134,130) Chip Transistor	DTC114EUA
Q 162	(B,117,96) Transistor	UMX1N
Q 163	(B,112,53) Transistor	UMT1N
Q 164	(B,42,107) Chip Transistor	DTC114EUA
Q 181	(B,80,110) Transistor	2SC4081
Q 182	(B,83,117) Transistor	UMH1N
Q 183	(B,80,105) Transistor	UMD3N
Q 371	(B,68,58) Transistor	2SC4081
Q 372	(B,68,55) Chip Transistor	2SA1576A
Q 401	(B,168,52) Transistor	2SC4081
Q 402	(B,164,51) Transistor	2SC4081
Q 403	(B,151,40) Transistor(EW5,RE)	UMH1N
Q 404	(B,151,47) Transistor(EW5,RE)	UMH1N
Q 831	(B,26,107) Transistor	UMD2N
Q 832	(B,23,107) Transistor	IMH23
Q 833	(B,11,109) Chip Transistor	UMG1N
Q 834	(B,18,107) Transistor	IMH23
Q 901	(A,6,60) Transistor	UMD3N
Q 902	(A,12,63) Transistor	IMH23
Q 1001	(B,124,51) Transistor	2SB1184F5

Circuit Symbol and No.		Part No.
Q 1002	(B,130,41) Transistor	2SD1767
Q 1021	(B,41,60) Chip Transistor	2SA1576A
Q 1022	(B,46,55) Transistor	UMH1N
Q 1053	(B,114,15) Chip Transistor	DTC114EUA
Q 1054	(B,123,20) Transistor	2SA1615-ZS1
Q 1201	(B,14,96) Transistor	UMD3N
Q 1202	(B,6,96) Transistor	2SD1767
Q 1303	(A,23,111) Transistor	2SC4081
Q 1305	(A,28,111) Chip Transistor	DTC114EUA
Q 1306	(A,13,108) Transistor	2SA1952
Q 1401	(A,33,28) Transistor	2SJ529S
Q 1402	(A,29,8) Transistor	2SJ529S
Q 1403	(B,26,28) Transistor	2SC4097
Q 1404	(B,23,10) Transistor	2SC4097
Q 1405	(B,32,17) Chip Transistor	DTC114EUA
Q 1501	(B,37,42) Transistor	2SC4081
Q 1502	(B,32,39) Transistor	2SB1708
Q 1522	(B,62,11) Transistor	UMF23N
Q 1621	(B,53,29) Chip Transistor	DTC114EUA
Q 1622	(B,58,24) Transistor	2SB1132
Q 1701	(B,21,55) Transistor	2SC4081
Q 1702	(B,10,62) Transistor	2SB1708
Q 2001	(A,108,12) Chip Transistor	2SA1576A
D 101	(B,59,121) Diode	DAP202U
D 102	(B,55,121) Diode	DAP202U
D 103	(A,59,117) Diode	DAN202U
D 104	(A,74,125) Diode	S1G-6904G2P
D 141	(B,119,112) Diode	S1G-6904G2P
D 142	(B,119,109) Diode	S1G-6904G2P
D 161	(B,128,130) Diode	1SS355
D 162	(B,120,131) Diode	HZU7L(A1)
D 163	(B,112,97) Diode	HZU7L(C3)
D 164	(B,111,58) Diode	DAN202U
D 165	(B,143,124) Diode	DAN202U
D 166	(B,42,109) Diode	UDZS5R6(B)
D 181	(B,84,113) Diode	1SS355
D 182	(B,84,109) Diode	UDZS8R2(B)
D 183	(B,119,103) Diode	S1G-6904G2P
D 184	(B,119,106) Diode	S1G-6904G2P
D 301	(A,77,94) Diode	S1G-6904G2P
D 302	(A,78,91) Diode	S1G-6904G2P
D 501	(B,37,125) Diode	MALS068X
D 502	(B,37,126) Diode	MALS068X
D 503	(A,33,86) Diode	EMZC6.8N
D 601	(A,100,17) Diode	1SS355
D 621	(B,90,24) Diode	RB521S-30
D 622	(B,62,28) Diode	RB521S-30
D 831	(A,6,120) Diode	MALS068X
D 832	(A,24,123) Diode	MALS068X
D 833	(A,12,120) Diode	MALS068X
D 834	(A,24,127) Diode	MALS068X
D 835	(A,10,120) Diode	MALS068X
D 836	(A,8,120) Diode	MALS068X
D 837	(A,14,120) Diode	MALS068X
D 838	(A,17,120) Diode	MALS068X
D 901	(A,8,64) Diode	DAP202U
D 1001	(B,128,37) Diode	UDZS18(B)
D 1002	(B,125,41) Diode	S1G-6904G2P
D 1021	(B,46,52) Diode	S1G-6904G2P
D 1051	(B,126,28) Diode	S1G-6904G2P

Circuit Symbol and No.		Part No.
D 1101	(A,125,103) Diode	S1G-6904G2P
D 1151	(B,143,44) Diode	S1G-6904G2P
D 1152	(B,146,44) Diode	S1G-6904G2P
D 1153	(B,143,51) Diode	S1G-6904G2P
D 1201	(B,11,94) Diode	HZU5R6(B2)
D 1301	(B,28,128) Diode	MALS068X
D 1302	(A,33,112) Diode	UDZS16(B)
D 1401	(A,37,20) Diode	RSX201L-30
D 1402	(A,37,17) Diode	RSX201L-30
D 1403	(B,23,28) Diode	MA111
D 1404	(B,20,10) Diode	MA111
D 1405	(B,41,37) Diode	RSX201L-30
D 1406	(A,20,49) Diode	RSX201L-30
D 1407	(A,24,49) Diode	RSX201L-30
D 1702	(B,10,67) Diode	RSX201L-30
D 2001	(A,138,11) Diode	RSB6R8F2
D 2002	(A,138,5) Diode	RSB6R8F2
D 2006	(A,137,13) Diode	MALS068X
D 2007	(B,31,6) Diode	RSB6R8F2
D 2008	(B,66,7) Diode	RSB6R8F2
L 141	(A,111,109) Choke Coil 600 uH	CTH1347
L 161	(B,143,128) Inductor	LCTAW2R2J2520
L 162	(B,118,59) Inductor	LCTAW2R2J2520
L 163	(B,44,112) Inductor	CTF1295
L 201	(B,113,66) Inductor	LCTAW2R2J2520
L 401	(B,151,100) Inductor	LCTAW220J2520
L 402	(A,146,97) Chip Coil	LCTAW1R0J2520
L 403	(A,145,46) Inductor	LCTAW1R0J3225
L 404	(A,147,61) Inductor	CTF1379
L 501	(A,32,69) Inductor	CTF1473
L 541	(A,34,88) Inductor	CTF1713
L 601	(A,101,21) Inductor	LCTAW2R2J2520
L 602	(A,93,20) Inductor	CTF1473
L 603	(A,89,59) Inductor	CTF1389
L 801	(A,103,57) Chip Coil	LCTAW100J2520
L 831	(B,6,101) Inductor	CTF1306
L 1051	(A,127,30) Coil	CTH1267
L 1052	(A,127,20) Inductor	CTH1262
L 1201	(A,8,84) Power Inductor(10U)	DTL1124
L 1202	(B,7,92) Inductor	CTF1473
L 1401	(A,42,29) Coil	CTH1303
L 1402	(A,39,10) Coil	CTH1303
L 1403	(B,15,21) Chip Coil	LCTAW100J2520
L 1404	(A,15,32) Inductor	CTH1254
X 541	(A,48,68) Ceramic Resonator 16.934 MHz	CSS1603
X 542	(A,35,95) Oscillator 48.000 MHz	CSS1756
X 601	(A,98,31) Oscillator 4.718 592 MHz	CSS1703
VR1401	(A,32,19) Semi-fixed 10 kohm(B)	CCP1448
BZ601	(A,159,11) Buzzer	CPV1062
⚠P101	(B,71,120) Fuse 40 A	MINISMDC075F/24
P 401	(B,152,105) Surge Protector	IMSA-6801-01Y901
⚠P1051	(A,130,36) Fuse 1.25 A	CEK1281
⚠P1052	(A,135,12) Fuse 2 A	CEK1284
⚠P1301	(A,29,116) Fuse 40 A	MINISMDC075F/24
⚠P1401	(A,43,5) Fuse 4 A	CEK1288
⚠P1402	(A,47,28) Fuse 3 A	CEK1286
⚠P1403	(A,13,40) Fuse 3.5 A	CEK1287
⚠P1701	(B,11,72) Fuse 1.25 A	CEK1281
⚠P2001	(A,31,5) Fuse 40 A	MINISMDC075F/24
U 401	(A,157,95) FM/AM Tuner Unit(EW5,RE)	CWE2097
	(A,157,95) FM/AM Tuner Unit(UC)	CWE2098

RESISTORS

Circuit Symbol and No.		Part No.
R 101	(B,66,112)	RS1/16SS820J
R 102	(B,73,112)	RS1/16SS820J
R 103	(B,68,112)	RS1/16SS820J
R 104	(B,70,112)	RS1/16SS820J
R 105	(A,53,124)	RS1/16SS473J
R 106	(A,51,124)	RS1/16SS473J
R 107	(A,67,125)	RS1/16SS473J
R 108	(A,65,125)	RS1/16SS473J
R 109	(B,63,120)	RS1/16SS0R0J
R 110	(A,74,119)	RS1/16SS222J
R 121	(A,79,110)	RS1/16SS562J
R 122	(A,77,110)	RS1/16SS332J
R 123	(A,68,104)	RS1/16SS181J
R 124	(A,71,104)	RS1/16SS181J
R 125	(A,76,114)	RS1/16SS222J
R 126	(A,70,102)	RS1/16SS223J
R 127	(A,68,102)	RS1/16SS223J
R 128	(A,69,99)	RS1/16SS102J
R 129	(A,67,100)	RS1/16SS102J
R 161	(B,129,131)	RS1/16SS103J
R 162	(B,114,54)	RS1/16SS473J
R 163	(B,122,133)	RS1/16SS103J
R 164	(B,114,99)	RS1/16SS104J
R 165	(B,112,51)	RS1/16SS473J
R 166	(B,121,133)	RS1/16SS473J
R 167	(B,117,94)	RS1/16SS473J
R 168	(B,112,56)	RS1/16SS473J
R 170	(B,114,52)	RS1/16SS473J
R 171	(B,143,121)	RS1/16SS472J
R 172	(B,45,105)	RS1/16SS104J
R 173	(B,120,133)	RS1/16SS472J
R 174	(B,114,59)	RS1/16SS103J
R 175	(B,42,111)	RS1/16SS103J
R 176	(B,140,130)	RS1/16SS153J
R 177	(B,120,96)	RS1/16SS0R0J
R 178	(B,117,98)	RS1/16SS0R0J
R 181	(B,83,111)	RS1/16SS103J
R 182	(B,81,108)	RS1/16SS104J
R 183	(B,81,109)	RS1/16SS473J
R 184	(B,84,117)	RS1/16SS683J
R 185	(B,80,118)	RS1/16SS152J
R 186	(B,85,117)	RS1/16SS683J
R 187	(B,83,105)	RS1/16SS103J
R 188	(B,78,118)	RS1/16SS101J
R 189	(B,78,105)	RS1/16SS473J
R 201	(B,97,109)	RS1/16SS162J
R 202	(B,98,112)	RS1/16SS272J
R 203	(B,97,112)	RS1/16SS272J
R 204	(B,98,109)	RS1/16SS162J
R 205	(A,121,79)	RS1/16SS102J
R 206	(A,121,80)	RS1/16SS102J
R 207	(B,114,86)	RS1/16SS102J
R 208	(B,105,75)	RS1/16S0R0J
R 209	(B,102,109)	RS1/16SS162J
R 210	(B,100,109)	RS1/16SS162J
R 211	(B,102,112)	RS1/16SS272J
R 212	(B,100,112)	RS1/16SS272J
R 213	(B,118,65)	RS1/16SS1000D
R 214	(A,118,87)	RS1/16SS1000D
R 215	(B,116,65)	RS1/16SS563J
R 216	(B,116,86)	RS1/16SS563J
R 301	(B,83,89)	RS1/16SS223J
R 302	(B,65,71)	RS1/16SS0R0J
R 305	(B,82,85)	RS1/16SS1000D
R 306	(B,90,81)	RS1/16SS1000D
R 307	(B,83,85)	RS1/16SS1000D
R 308	(B,91,81)	RS1/16SS1000D
R 309	(B,91,89)	RS1/16SS223J
R 311	(B,90,78)	RS1/16SS0R0J
R 312	(B,90,77)	RS1/16SS0R0J
R 313	(B,92,77)	RS1/16SS0R0J
R 314	(B,92,76)	RS1/16SS0R0J
R 315	(B,90,75)	RS1/16SS1000D
R 316	(B,90,73)	RS1/16SS1000D
R 317	(B,92,74)	RS1/16SS1000D
R 318	(B,92,72)	RS1/16SS1000D
R 319	(B,91,65)	RS1/16SS1000D
R 320	(B,87,65)	RS1/16SS1000D
R 321	(B,89,65)	RS1/16SS1000D
R 322	(B,86,65)	RS1/16SS1000D
R 324	(B,69,85)	RS1/16SS1000D
R 325	(B,66,85)	RS1/16SS1000D
R 326	(B,66,77)	RS1/16SS1000D
R 328	(A,74,82)	RS1/16SS680J
R 329	(B,97,76)	RS1/16SS223J
R 330	(A,74,84)	RS1/16SS4R7J
R 333	(B,94,83)	RS1/16SS0R0J
R 334	(B,94,84)	RS1/16SS0R0J
R 335	(B,66,73)	RS1/16SS1000D
R 337	(B,97,73)	RS1/16SS223J
R 341	(B,73,67)	RS1/16SS221J
R 342	(B,73,66)	RS1/16SS221J
R 346	(B,72,58)	RS1/16SS0R0J
R 348	(B,89,88)	RS1/16SS0R0J
R 349	(B,71,85)	RS1/16SS1000D
R 350	(B,67,85)	RS1/16SS1000D
R 351	(B,66,78)	RS1/16SS1000D
R 352	(B,66,74)	RS1/16SS1000D
R 371	(B,68,60)	RS1/16SS223J
R 372	(B,72,59)	RS1/16SS303J
R 373	(B,72,57)	RS1/16SS681J
R 374	(B,71,56)	RS1/16S8200D
R 375	(B,66,56)	RS1/16SS681J
R 376	(B,73,56)	RS1/16S1801D
R 401	(B,168,54)	RS1/16S224J
R 402	(B,169,48)	RS1/16SS274J
R 403	(B,166,53)	RS1/16SS0R0J
R 404	(B,164,48)	RS1/16S224J
R 405	(B,166,47)	RS1/16SS274J
R 406	(B,151,37) (EW5,RE)	RS1/16SS681J
R 407	(B,151,43) (EW5,RE)	RS1/16SS681J
R 408	(B,151,44) (EW5,RE)	RS1/16SS681J
R 409	(B,151,51) (EW5,RE)	RS1/16SS681J
R 410	(B,151,52)	RS1/16SS102J
R 411	(B,151,72) (EW5,RE)	RS1/16SS681J
R 412	(B,151,73)	RS1/16SS681J
R 413	(B,151,75)	RS1/16SS681J

Circuit Symbol and No.			Part No.
R 414	(B,151,76)		RS1/16SS681J
R 415	(B,151,77)		RS1/16SS681J
R 416	(B,151,78)		RS1/16SS681J
R 419	(A,148,46)	(EW5,RE)	RS1/16SS223J
R 420	(A,148,48)	(EW5,RE)	RS1/16SS223J
R 421	(A,148,44)	(EW5,RE)	RS1/16SS223J
R 422	(A,148,45)	(EW5,RE)	RS1/16SS223J
R 423	(B,169,49)		RS1/16SS472J
R 424	(B,164,53)		RS1/16SS472J
R 501	(B,37,124)		RS1/16SS102J
R 502	(B,37,122)		RS1/16SS102J
R 503	(B,52,86)		RS1/16S0R0J
R 504	(B,52,84)		RS1/16S0R0J
R 505	(B,38,85)		RS1/16S0R0J
R 506	(B,39,83)		RS1/16SS103J
R 508	(B,39,76)		RS1/16SS473J
R 509	(B,48,78)		RS1/16S0R0J
R 510	(B,52,78)		RS1/16S0R0J
R 511	(B,49,78)		RS1/16S0R0J
R 512	(B,51,78)		RS1/16S0R0J
R 513	(B,53,74)		RS1/16SS821J
R 514	(B,53,72)		RS1/16SS821J
R 515	(B,39,74)		RS1/16SS473J
R 516	(B,39,89)		RS1/16SS0R0J
R 517	(B,39,87)		RS1/16SS104J
R 518	(B,39,88)		RS1/16SS104J
R 519	(B,39,75)		RS1/16SS473J
R 521	(A,89,17)		RS1/16SS0R0J
R 522	(A,88,17)		RS1/16SS0R0J
R 524	(A,79,16)		RS1/16SS0R0J
R 541	(B,39,73)		RS1/16SS473J
R 542	(A,36,91)		RS1/16SS151J
R 543	(A,37,89)		RS1/16SS33R0D
R 544	(A,37,90)		RS1/16SS33R0D
R 545	(B,43,85)		RS1/16SS473J
R 546	(B,43,83)		RS1/16SS473J
R 547	(B,39,77)		RS1/16SS473J
R 549	(A,36,82)		RS1/16SS221J
R 550	(A,34,86)		RS1/16SS153J
R 551	(A,35,86)		RS1/16SS153J
R 552	(A,37,75)		RS1/16SS472J
R 553	(A,32,70)		RS1/16SS473J
R 554	(A,37,78)		RS1/16SS473J
R 555	(B,43,86)		RS1/16SS473J
R 556	(A,31,85)		RS1/16S0R0J
R 557	(B,39,86)		RS1/16SS134J
R 558	(A,29,94)		RS1/16S0R0J
R 559	(A,31,83)		RS1/16S0R0J
R 601	(A,98,20)		RS1/16SS104J
R 602	(B,84,34)		RS1/16SS182J
R 603	(B,84,35)		RS1/16SS182J
R 604	(A,94,37)		RS1/16SS102J
R 605	(A,94,38)		RS1/16SS102J
R 606	(B,89,29)		RS1/16SS0R0J
R 607	(B,84,41)		RS1/16SS0R0J
R 608	(A,72,47)		RS1/16SS681J
R 609	(B,72,44)		RS1/16SS681J
R 610	(A,70,48)		RS1/16SS681J
R 611	(B,84,29)		RS1/16SS101J
R 612	(B,89,27)		RS1/16SS101J

Circuit Symbol and No.		Part No.
R 613	(B,84,31)	RS1/16SS102J
R 614	(B,89,34)	RS1/16SS104J
R 615	(A,94,43)	RS1/16SS102J
R 616	(B,84,40)	RS1/16SS472J
R 617	(A,94,39)	RS1/16SS221J
R 618	(A,94,40)	RS1/16SS221J
R 619	(B,82,32)	RS1/16SS104J
R 620	(A,67,47)	RS1/16SS104J
R 621	(B,87,22)	RS1/16SS103J
R 622	(B,84,30)	RS1/16SS104J
R 623	(A,94,41)	RS1/16SS104J
R 624	(A,117,12)	RS1/16SS0R0J
R 625	(B,89,37)	RS1/16SS104J
R 626	(B,85,27)	RS1/16SS104J
R 627	(A,116,12)	RS1/16SS0R0J
R 628	(A,115,12)	RS1/16SS0R0J
R 629	(A,87,19)	RS1/16SS0R0J
R 630	(A,88,19)	RS1/16SS1501D
R 631	(A,89,47)	RS1/16SS0R0J
R 632	(A,114,12)	RS1/16SS0R0J
R 633	(B,84,27)	RS1/16SS104J
R 634	(B,86,22)	RS1/16SS472J
R 635	(A,113,12)	RS1/16SS0R0J
R 636	(A,87,47)	RS1/16SS0R0J
R 637	(A,112,12)	RS1/16SS0R0J
R 638	(B,86,44)	RS1/16SS104J
R 639	(A,86,47)	RS1/16SS0R0J
R 640	(A,111,12)	RS1/16SS102J
R 641	(A,85,47)	RS1/16SS0R0J
R 642	(B,85,44)	RS1/16SS104J
R 643	(A,84,47)	RS1/16SS0R0J
R 644	(A,110,12)	RS1/16SS0R0J
R 645	(B,84,44)	RS1/16SS104J
R 646	(B,83,27)	RS1/16SS104J
R 647	(B,82,27)	RS1/16SS104J
R 648	(A,86,19)	RS1/16SS102J
R 649	(B,82,41)	RS1/16SS104J
R 650	(B,80,27)	RS1/16SS102J
R 651	(A,81,51)	RS1/16SS102J
R 652	(B,81,23)	RS1/16SS473J
R 653	(B,79,27)	RS1/16SS102J
R 654	(A,81,48)	RS1/16SS221J
R 655	(B,82,47)	RS1/16SS472J
R 656	(B,78,27)	RS1/16SS102J
R 657	(A,88,47)	RS1/16SS0R0J
R 658	(A,80,48)	RS1/16SS221J
R 659	(B,81,47)	RS1/16SS472J
R 660	(A,85,19)	RS1/16SS102J
R 661	(B,80,47)	RS1/16SS104J
R 662	(A,79,48)	RS1/16SS221J
R 663	(B,79,47)	RS1/16SS104J
R 664	(A,78,48)	RS1/16SS221J
R 665	(B,88,22)	RS1/16SS472J
R 666	(A,76,50)	RS1/16SS102J
R 667	(A,76,48)	RS1/16SS102J
R 668	(A,94,42)	RS1/16SS102J
R 669	(B,75,47)	RS1/16SS104J
R 670	(A,93,33)	RS1/16SS102J
R 672	(A,77,48)	RS1/16SS102J
R 673	(B,74,47)	RS1/16SS104J

Circuit Symbol and No.		Part No.
R 674	(A,73,19)	RS1/16SS102J
R 675	(A,64,43)	RS1/16SS102J
R 676	(A,72,19)	RS1/16SS102J
R 677	(A,64,41)	RS1/16SS103J
R 678	(B,71,27)	RS1/16SS104J
R 679	(A,64,38)	RS1/16SS104J
R 680	(B,72,38)	RS1/16SS104J
R 682	(B,71,34)	RS1/16SS104J
R 683	(A,64,37)	RS1/16SS104J
R 684	(A,64,27)	RS1/16SS0R0J
R 685	(A,64,39)	RS1/16SS103J
R 686	(A,64,33) (RE)	RS1/16SS104J
R 687	(B,71,33) (EW5,UC)	RS1/16SS104J
R 688	(B,71,38)	RS1/16SS104J
R 690	(A,67,48)	RS1/16SS104J
R 691	(A,64,32)	RS1/16SS104J
R 693	(A,64,30)	RS1/16SS104J
R 694	(A,64,31)	RS1/16SS102J
R 695	(B,80,23)	RS1/16SS104J
R 696	(B,79,23)	RS1/16SS104J
R 698	(A,64,36)	RS1/16SS104J
R 700	(A,151,25) (EW5)	RS1/16S0R0J
R 701	(A,151,23) (RE)	RS1/16S0R0J
R 702	(A,151,21) (UC)	RS1/16S0R0J
R 751	(A,95,68)	RS1/16SS150J
R 752	(A,98,68)	RS1/16SS470J
R 753	(A,95,67)	RS1/16SS101J
R 754	(A,98,67)	RS1/16SS101J
R 755	(A,93,66)	RS1/16SS102J
R 801	(A,101,45)	RS1/16SS104J
R 802	(A,98,45)	RS1/16SS104J
R 803	(A,99,45)	RS1/16SS104J
R 804	(A,100,45)	RS1/16SS104J
R 805	(A,97,45)	RS1/16SS103J
R 806	(A,102,45)	RS1/16SS102J
R 807	(A,103,50)	RS1/16SS104J
R 808	(A,92,50)	RS1/16SS102J
R 809	(A,103,51)	RS1/16SS103J
R 810	(A,103,52)	RS1/16SS1003F
R 831	(B,5,101)	RS1/16SS102J
R 832	(B,25,110)	RS1/16SS102J
R 833	(B,10,105)	RS1/16SS102J
R 834	(B,7,110)	RS1/16SS102J
R 835	(B,13,110)	RS1/16SS472J
R 836	(A,19,121)	RS1/16SS0R0J
R 837	(A,26,127)	RS1/16SS0R0J
R 838	(A,26,123)	RS1/16S5103D
R 839	(A,5,121)	RS1/16SS471J
R 840	(B,7,109)	RS1/16SS104J
R 841	(B,5,110)	RS1/16SS471J
R 842	(A,24,121)	RS1/16S3902F
R 843	(B,12,106)	RS1/16SS104J
R 845	(B,11,106)	RS1/16SS104J
R 846	(B,13,106)	RS1/16SS472J
R 847	(A,15,121)	RS1/16SS750J
R 848	(B,17,110)	RS1/16SS0R0J
R 901	(B,19,66)	RS1/16SS102J
R 902	(A,16,64)	RS1/16SS0R0J
R 903	(A,16,61)	RS1/16SS0R0J
R 904	(B,25,59)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.
R 905	(B,25,56)	RS1/16SS0R0J
R 906	(B,26,66)	RS1/16SS221J
R 907	(A,26,68)	RS1/16SS471J
R 908	(A,6,66)	RS1/16SS102J
R 909	(B,19,65)	RS1/16SS221J
R 910	(B,26,65)	RS1/16SS221J
R 911	(B,19,64)	RS1/16SS221J
R 1001	(B,130,51)	RS1/16SS391J
R 1002	(B,128,45)	RS1/16S2R2J
R 1003	(B,125,45)	RS1/16S2R2J
R 1004	(B,128,46)	RS1/16S2R2J
R 1005	(B,125,46)	RS1/16S2R2J
R 1006	(B,131,37)	RS1/16SS271J
R 1022	(B,43,57)	RS1/16SS223J
R 1025	(B,41,57)	RS1/16SS473J
R 1026	(A,43,56)	RS1/16SS223J
R 1054	(B,133,20)	RS1/16SS301J
R 1055	(B,132,20)	RS1/16SS301J
R 1056	(B,129,20)	RS1/16SS153J
R 1057	(B,130,32)	RS1/16SS0R0J
R 1101	(B,127,108)	RS1/16SS0R0J
R 1102	(A,134,109)	RS1/16SS473J
R 1203	(B,16,97)	RS1/16SS223J
R 1204	(A,13,83)	RS1/16SS1503D
R 1205	(A,13,85)	RS1/16SS1103D
R 1206	(B,11,87)	RS1/16SS1202D
R 1207	(B,11,88)	RS1/16SS1202D
R 1208	(B,11,89)	RS1/16SS5601D
R 1209	(B,10,97)	RS1/16SS562J
R 1210	(B,15,83)	RS1/16SS0R0J
R 1213	(A,13,82)	RS1/16SS0R0J
R 1301	(B,28,131)	RS1/16SS683J
R 1302	(B,28,126)	RS1/16SS123J
R 1310	(A,26,110)	RS1/16SS223J
R 1311	(A,20,108)	RS1/16SS103J
R 1312	(A,25,110)	RS1/16SS222J
R 1313	(A,35,112)	RS1/16SS102J
R 1314	(A,23,106)	RAB4C330J
R 1315	(A,27,106)	RAB4C330J
R 1316	(A,31,106)	RAB4C330J
R 1401	(A,24,20)	RS1/16S4701D
R 1402	(B,32,27)	RS1/16S0R0J
R 1403	(B,29,24)	RS1/16S3901D
R 1404	(B,31,9)	RS1/16S0R0J
R 1405	(B,28,13)	RS1/16S6801D
R 1406	(B,31,27)	RS1/16S2202D
R 1407	(B,31,24)	RS1/16S2202D
R 1408	(B,27,10)	RS1/16S1200D
R 1409	(B,26,13)	RS1/16S3301D
R 1410	(A,28,17)	RS1/16S5600D
R 1411	(B,31,31)	RS1/16SS560J
R 1412	(A,21,12)	RS1/16SS560J
R 1413	(B,25,26)	RS1/16SS272J
R 1414	(B,23,24)	RS1/16SS221J
R 1415	(B,23,13)	RS1/16SS272J
R 1416	(A,29,19)	RS1/16SS6801D
R 1417	(B,22,13)	RS1/16SS221J
R 1418	(A,29,20)	RS1/16SS1502D
R 1419	(B,30,13)	RS1/16SS6801D
R 1420	(B,25,24)	RS1/16S2203D

Circuit Symbol and No.		Part No.
R 1421	(A,25,16)	RS1/16S4702D
R 1422	(B,25,13)	RS1/16S7501D
R 1423	(B,30,14)	RS1/16SS6802D
R 1425	(A,23,20)	RS1/16SS3302D
R 1426	(A,23,16)	RS1/16SS3302D
R 1501	(B,37,38)	RAB4C680J
R 1502	(B,32,36)	RS1/16SS473J
R 1503	(B,35,43)	RS1/16SS562J
R 1504	(B,39,42)	RS1/16SS103J
R 1521	(B,60,12)	RS1/16SS392J
R 1522	(B,60,10)	RS1/16SS223J
R 1602	(B,55,37)	RS1/16SS2201D
R 1603	(B,55,36)	RS1/16SS1502D
R 1604	(B,51,35)	RS1/16SS1002D
R 1605	(B,49,35)	RS1/16SS0R0J
R 1621	(B,56,29)	RS1/16SS102J
R 1622	(B,56,28)	RS1/16SS223J
R 1701	(B,15,58)	RAB4C680J
R 1702	(B,24,53)	RS1/16SS562J
R 1703	(B,11,59)	RS1/16SS103J
R 1704	(B,21,52)	RS1/16SS103J
R 2001	(A,106,15)	RS1/16SS104J
R 2002	(A,109,15)	RS1/16SS103J
R 2003	(B,118,10)	RS1/16SS391J
R 2004	(A,110,16)	RS1/16SS0R0J
R 2005	(A,111,16)	RS1/16SS473J
R 2006	(B,56,9)	RS1/16SS750J
R 2007	(B,36,8)	RS1/16SS750J

CAPACITORS

C 101	(B,66,108)	CKSYB475K10
C 102	(B,73,108)	CKSYB475K10
C 103	(B,68,108)	CKSYB475K10
C 104	(B,70,108)	CKSYB475K10
C 109	(A,68,121)	CEVW101M16
C 110	(B,77,135)	CKSRYB104K50
C 141	(A,90,109)	CEAT332M16(P35)
C 161	(B,128,133)	CKSRYB105K10
C 162	(B,126,133)	CKSRYB104K50
C 163	(B,119,133)	CKSRYB104K50
C 164	(B,41,111)	CKSRYB104K50
C 165	(B,115,59)	CKSRYB103K50
C 166	(B,122,101)	CKSRYB104K50
C 167	(B,137,130)	CKSRYB104K50
C 168	(B,41,113)	CKSRYB104K50
C 181	(B,80,113)	CKSYB106K10
C 182	(B,97,115)	CKSRYB474K16
C 183	(B,98,115)	CKSRYB474K16
C 184	(B,100,115)	CKSRYB474K16
C 185	(B,102,115)	CKSRYB474K16
C 186	(B,78,117)	CKSQYB475K10
C 187	(B,97,118)	CKSRYB474K16
C 188	(B,98,118)	CKSRYB474K16
C 189	(B,100,118)	CKSRYB474K16
C 190	(B,102,118)	CKSRYB474K16
C 191	(B,104,113)	CKSQYB225K16
C 192	(A,86,117)	CKSRYB104K50
C 193	(A,80,123) 10 uF	CCG1236
C 194	(B,104,117)	CKSQYB225K16
C 195	(B,118,100)	CKSQYB104K50

Circuit Symbol and No.		Part No.
C 202	(B,119,87)	CKSQYB225K10
C 203	(B,121,87)	CKSQYB225K10
C 204	(B,123,87)	CKSQYB225K10
C 205	(B,125,87)	CKSQYB225K10
C 206	(B,127,85)	CKSSYB104K10
C 207	(A,121,75)	CEVW100M10
C 208	(A,108,71)	CEVW100M10
C 209	(B,117,68)	CKSQYB225K10
C 210	(B,119,68)	CKSQYB225K10
C 211	(B,121,68)	CKSQYB225K10
C 212	(B,123,68)	CKSQYB225K10
C 213	(B,125,69)	CKSSYB104K10
C 214	(B,125,70)	CKSSYB224K6R3
C 215	(A,108,80)	CEVW470M16
C 216	(B,107,75)	CKSSYB104K10
C 217	(A,120,68)	CEVW470M16
C 218	(B,114,69)	CKSSYB104K10
C 219	(B,112,64)	CKSSYB104K16
C 220	(B,117,65)	CCSRCH152J50
C 221	(B,117,86)	CCSRCH152J50
C 301	(B,79,85)	CKSSYB104K10
C 302	(B,80,85)	CKSSYB104K10
C 303	(B,80,87)	CKSSYB104K10
C 304	(B,81,87)	CKSSYB104K10
C 305	(B,82,87)	CKSRYB105K10
C 306	(B,90,84)	CKSRYB105K10
C 307	(B,84,87)	CKSRYB105K10
C 308	(B,91,84)	CKSRYB105K10
C 309	(A,85,86)	CEVW470M16
C 310	(B,85,87)	CKSSYB104K16
C 311	(B,95,81)	CKSRYB105K10
C 312	(B,95,78)	CKSRYB105K10
C 313	(B,95,80)	CKSRYB105K10
C 314	(B,95,77)	CKSRYB105K10
C 315	(B,95,75)	CKSRYB105K10
C 316	(B,95,72)	CKSRYB105K10
C 317	(B,95,73)	CKSRYB105K10
C 318	(B,95,70)	CKSRYB105K10
C 319	(B,91,63)	CKSRYB105K10
C 320	(B,87,63)	CKSRYB105K10
C 321	(B,89,63)	CKSRYB105K10
C 322	(B,86,63)	CKSRYB105K10
C 323	(B,87,87)	CKSSYB104K16
C 324	(B,84,65)	CKSRYB105K10
C 325	(B,83,65)	CKSRYB105K10
C 328	(A,70,88)	CEVW470M16
C 329	(B,75,83)	CKSSYB104K16
C 330	(A,78,85)	CEVW220M16
C 331	(B,77,85)	CKSSYB104K16
C 332	(B,71,82)	CKSRYB105K10
C 333	(B,69,82)	CKSRYB105K10
C 334	(B,67,82)	CKSRYB105K10
C 335	(B,66,82)	CKSRYB105K10
C 336	(B,69,78)	CKSRYB105K10
C 337	(B,69,76)	CKSRYB105K10
C 338	(B,71,75)	CKSSYB104K10
C 339	(B,71,74)	CKSSYB104K10
C 340	(B,69,74)	CKSRYB105K10
C 341	(B,69,73)	CKSRYB105K10
C 342	(B,69,71)	CKSRYB105K10

Circuit Symbol and No.		Part No.
C 343	(B,69,69)	CKSRYB105K10
C 344	(A,80,67)	CEVW101M6R3
C 345	(A,80,77)	CEVW221M4
C 346	(A,72,77)	CEVW101M6R3
C 347	(B,85,59)	CKSSYB682K25
C 348	(A,88,77)	CEVW220M16
C 349	(B,89,59)	CKSSYB682K25
C 371	(B,71,61)	CKSRYB105K10
C 403	(A,148,51)	CKSSYB103K16
C 404	(A,146,67)	CEVW101M16
C 405	(A,146,78)	CKSSYB103K16
C 406	(A,146,51)	CKSQYB106K6R3
C 408	(A,146,83)	CEVW101M16
C 409	(A,149,51)	CKSSYB103K16
C 410	(B,169,47)	CKSSYB104K10
C 411	(B,164,47)	CKSSYB104K10
C 412	(B,169,50)	CKSSYB104K10
C 413	(B,164,54)	CKSSYB104K10
C 501	(A,37,87)	CKSRYB104K16
C 503	(A,50,69)	CKSSYB104K10
C 504	(A,53,69)	CKSSYB105K6R3
C 505	(A,51,69)	CKSSYB105K6R3
C 506	(B,51,74)	CCSRCH182J50
C 507	(B,51,71)	CCSRCH182J50
C 541	(B,57,85)	CKSSYB104K10
C 542	(A,54,95)	CKSSYB104K10
C 543	(A,55,69)	CKSSYB104K10
C 544	(A,54,69)	CKSSYB104K10
C 545	(A,50,63)	CEVW220M10
C 546	(A,53,67)	CKSSYB104K10
C 547	(A,49,95)	CKSSYB104K10
C 548	(A,45,68)	CKSSYB104K10
C 549	(A,43,68)	CKSQYB475K10
C 551	(A,41,95)	CKSSYB104K10
C 552	(A,24,95)	CKSSYB104K10
C 553	(A,36,83)	CKSSYB103K16
C 554	(A,28,74)	CKSSYB104K10
C 555	(A,35,92)	CCSSCK1R0C50
C 556	(A,36,92)	CCSSCK1R0C50
C 557	(A,37,85)	CKSSYB104K10
C 558	(A,29,96)	CKSSYB104K16
C 601	(A,95,24)	CKSQYB475K10
C 602	(A,97,16)	CKSRYB105K10
C 603	(A,98,22) 10 uF	CCG1171
C 604	(A,94,33)	CCSSCH100D50
C 605	(A,93,30)	CCSSCH100D50
C 606	(A,94,22)	CKSSYB104K10
C 607	(A,94,21)	CKSSYB102K50
C 610	(A,94,44)	CKSSYB103K16
C 611	(A,93,19)	CKSRYB105K10
C 612	(A,64,42)	CKSSYB104K10
C 613	(A,64,28)	CKSSYB103K16
C 614	(B,72,49)	CCSSCH101J50
C 615	(B,89,31)	CKSSYB102K50
C 751	(A,95,66)	CKSSYB102K50
C 752	(A,98,66)	CKSSYB102K50
C 753	(A,91,59)	CKSSYB104K10
C 801	(A,103,55)	CKSSYB104K10
C 802	(A,105,62)	CEVW220M6R3
C 831	(B,10,106)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 833	(B,12,105)	CKSSYB103K16
C 901	(A,17,70)	CKSSYB104K10
C 902	(A,17,75)	CKSSYB104K16
C 903	(A,11,75)	CEVW101M16
C 904	(A,14,67)	CKSQYB475K6R3
C 1002	(A,128,53)	CEVW470M6R3
C 1003	(B,123,57)	CKSSYB103K16
C 1004	(B,128,55)	CKSSYB103K16
C 1006	(A,117,40) 1 500 uF/16 V	CCH1312
C 1007	(B,128,35)	CKSRYB104K50
C 1021	(B,45,59) 10 uF	CCG1171
C 1022	(B,42,55)	CKSRYB105K16
C 1023	(B,42,52)	CKSRYB105K16
C 1051	(A,117,20)	CEVW470M16
C 1052	(A,120,29)	CEVW470M16
C 1053	(B,119,15)	CKSRYB104K50
C 1054	(B,130,17)	CKSYB475K16
C 1055	(A,127,8) 2 200 uF/16 V	CCH1659(P35)
C 1101	(A,140,112)	CEVW101M16
C 1102	(A,132,106)	CKSYB105K35
C 1151	(A,145,40)	CEVW220M16
C 1152	(B,146,38)	CKSSYB103K16
C 1153	(B,144,39)	CKSQYB475K10
C 1201	(B,18,82)	CKSSYB103K16
C 1203	(B,13,83)	CKSQYB105K16
C 1204	(A,9,87)	CKSRYB104K16
C 1205	(A,14,84)	CCSRCH150J50
C 1206	(B,7,84)	CKSQYB475K6R3
C 1207	(B,5,90)	CKSQYB475K6R3
C 1208	(B,10,96)	CKSSYB104K16
C 1402	(B,29,27)	CCSRCH101J50
C 1403	(B,29,10)	CKSRYB103K50
C 1404	(A,44,19) 220 uF/10 V	CCH1409
C 1405	(A,50,20) 220 uF/10 V	CCH1409
C 1406	(A,50,12) 470 uF/6.3 V	CCH1437
C 1409	(B,33,21)	CKSQYB475K6R3
C 1410	(A,29,17)	CCSRCH101J50
C 1412	(B,26,10)	CKSRYB683K16
C 1413	(B,19,21)	CKSRYB104K50
C 1414	(A,22,20)	CKSRYB104K50
C 1415	(A,22,17)	CKSRYB104K50
C 1417	(B,17,20)	CKSYB475K16
C 1418	(B,21,26)	CKSYB475K16
C 1419	(A,11,51)	CEAT332M16(P35)
C 1420	(A,50,6) 470 uF/6.3 V	CCH1437
C 1521	(B,62,9)	CKSSYB104K16
C 1601	(A,46,38)	CEVW101M6R3
C 1602	(B,55,39)	CKSSYB103K16
C 1603	(B,56,41)	CKSRYB105K10
C 1621	(A,61,18)	CEVW101M6R3
C 1701	(A,26,42)	CEVW101M6R3
C 2001	(A,140,14)	CKSRYB104K50
C 2004	(A,113,14)	CKSYB106K6R3
C 2005	(B,58,11)	CKSRYB104K50
C 2006	(B,37,6)	CKSRYB104K50
C 2007	(B,28,8)	CKSRYB104K50
C 2008	(B,23,7)	CKSRYB104K50

Circuit Symbol and No.		Part No.
C		
Unit Number :		
Unit Name : Keyboard Unit		
MISCELLANEOUS		
D 3001	(A,6,5) Diode	MALS068X
D 3002	(A,4,8) Diode	MALS068X
D 3003	(B,16,22) Diode	MALS068X
D 3004	(B,18,26) Diode	MALS068X
D 3101	(A,11,78) LED	NSSM025-6502
S 3201	(A,14,55) Rotary Switch(VOLUME)	CSD1151
S 3301	(A,14,89) Push Switch	CSG1155
S 3302	(A,14,66) Push Switch	CSG1155
S 3303	(A,14,20) Push Switch	CSG1155
S 3304	(A,13,44) Push Switch	CSG1155
S 3305	(A,23,89) Push Switch	CSG1155
RESISTORS		
R 3001	(A,6,3)	RS1/16S750J
R 3002	(B,16,19)	RS1/16S223J
R 3003	(B,18,18)	RS1/16S223J
R 3301	(A,15,37)	RS1/16S222J
R 3302	(A,15,39)	RS1/16S103J
R 3303	(B,15,66)	RS1/16S182J
CAPACITORS		
C 3101	(A,12,70)	CKSRYB104K16
C 3102	(A,12,72)	CKSRYB104K16
C 3103	(A,12,74)	CKSRYB104K16
C 3201	(B,7,44)	CKSRYB103K16
C 3202	(B,12,43)	CKSRYB103K16
C 3304	(A,4,9)	CKSRYB104K16
Monitor Unit		
Consists of		
Monitor PCB		
Invertor PCB		
G H		
Unit Number : CWN3126		
Unit Name : Monitor Unit		
MISCELLANEOUS		
IC 5001	(B,11,86) IC	GP1UX31RK
IC 5002	(A,141,39) IC	M62343FP
IC 5101	(A,64,56) Regulator IC	S-1132B15-U5
IC 5102	(A,63,62) IC	S-1132B25-U5
IC 5103	(A,72,39) IC	BD6171KV
IC 5201	(A,8,15) IC	TA78L05F
IC 5203	(A,39,16) L-MOS And Gate	TC7SET08FUS1
IC 5204	(A,33,7) IC	OZ961ISN
IC 5301	(A,79,71) IC	NJM2505AF
IC 5401	(A,39,56) IC	TC90A96BFGSING
IC 5501	(A,57,21) IC	M62343FP
IC 5502	(A,11,47) IC	TC7SET04FUS1
IC 5503	(A,15,51) IC	NJM2100V

Circuit Symbol and No.		Part No.
IC 5504	(A,57,46) IC	TC7SET04FUS1
IC 5505	(A,16,40) IC	TC7S66FU
IC 5506	(A,56,39) IC	TC74VHC04FTS1
IC 5507	(A,11,33) IC	NJM082BV
IC 5603	(A,118,35) IC	PE5634A
IC 5604	(A,135,36) IC	S-93C56BD0I-J8
IC 5801	(A,128,61) IC	PEH172A
IC 5802	(A,108,63) IC	PDC169B
Q 5001	(A,133,17) Transistor	UMX1N
Q 5002	(A,133,23) Transistor	UMX1N
Q 5003	(A,140,28) Transistor	UMX1N
Q 5102	(A,83,44) FET	RSQ035P03
Q 5103	(A,83,36) FET	RSQ035P03
Q 5201	(B,42,14) Transistor	UMX2N
Q 5202	(A,21,11) Transistor	2SC4617
Q 5203	(A,23,11) Transistor	2SC4617
Q 5204	(A,23,3) Transistor	2SA1774
Q 5205	(B,14,6) Transistor	2SC4617
Q 5206	(B,18,3) Transistor	2SC4617
Q 5207	(B,22,8) FET	TS8M1
Q 5208	(B,29,6) FET	TS8M1
Q 5301	(A,77,68) Transistor	2SC4081
Q 5302	(A,67,72) Transistor	2SA1576A
Q 5401	(A,40,76) Transistor	2SC4617
Q 5501	(A,7,26) Transistor	UMX2N
Q 5502	(A,12,24) Transistor	UMT2N
Q 5607	(A,130,11) Chip Transistor	DTC114EUA
Q 5608	(A,127,16) Transistor	2SA1797
Q 5701	(A,102,21) Transistor	UMF5N
Q 5702	(A,99,21) Transistor	UMF5N
Q 5703	(A,100,29) Transistor	FMG12
Q 5801	(A,97,62) Transistor	2SA1774
Q 5802	(A,98,55) Transistor	UMT1N
D 5001	(A,107,24) Diode	UDZS5R6(B)
D 5002	(A,103,16) Diode	UDZS5R6(B)
D 5003	(A,105,20) Diode	UDZS5R6(B)
D 5004	(A,105,22) Diode	UDZS5R6(B)
D 5101	(A,71,64) Diode	RB500V-40
D 5102	(A,70,64) Diode	RB500V-40
D 5103	(A,88,47) Diode	U2FWJ44N
D 5104	(A,87,34) Diode	RB160M-30
D 5105	(A,82,30) Diode	RB548W
D 5106	(A,80,30) Diode	RB548W
D 5107	(A,71,27) Diode	RB548W
D 5108	(A,69,27) Diode	RB548W
D 5109	(A,67,27) Diode	RB548W
D 5201	(A,19,14) Diode	UDZS6R2(B)
D 5202	(A,19,2) Diode	1SS355
D 5203	(A,40,14) Diode	RB751V-40
D 5204	(B,17,14) Diode	HZU6R2(B3)
D 5205	(B,27,11) Diode	HZU6R2(B3)
D 5206	(B,14,11) Diode	UDZS8R2(B)
D 5207	(A,45,4) Diode	MA143
D 5208	(A,70,3) Diode	HZU6R2(B3)
D 5209	(A,75,4) Diode	MA143
D 5601	(A,125,22) Diode	1SS355
D 5701	(A,104,28) Diode	MA111
L 5002	(A,140,61) Coil	CTH1338
L 5101	(A,57,68) Inductor	CTF1635
L 5102	(A,90,58) Choke Coil 10 uH	CTH1249

Circuit Symbol and No.			Part No.
L 5103	(A,82,50)	Choke Coil 18 uH	CTH1250
L 5104	(A,75,18)	Inductor	CTF1488
L 5105	(A,88,29)	Choke Coil 68 uH	CTH1318
L 5107	(A,83,26)	Inductor	DTL1096
L 5108	(A,12,65)	Inductor	CTF1635
L 5109	(A,59,74)	Inductor	CTF1635
L 5110	(A,59,51)	Inductor	CTF1635
L 5111	(A,59,53)	Inductor	CTF1635
L 5112	(A,62,65)	Inductor	CTF1635
L 5113	(A,83,61)	Choke Coil 18 uH	CTH1250
L 5114	(A,64,48)	Inductor	CTF1635
L 5115	(A,86,23)	Inductor	CTF1635
L 5116	(A,62,27)	Inductor	CTF1635
L 5301	(A,73,72)	Inductor	LCTAW220J2520
L 5302	(A,70,72)	Chip Coil	LCTAW270J2520
L 5303	(A,62,68)	Inductor	LCTAW101J2520
L 5304	(A,80,67)	Inductor	CTF1379
L 5401	(A,53,74)	Inductor	CTF1306
L 5402	(A,44,76)	Inductor	CTF1306
L 5403	(A,43,76)	Inductor	CTF1306
L 5404	(A,34,77)	Inductor	CTF1306
L 5405	(A,23,72)	Inductor	CTF1306
L 5406	(A,34,75)	Inductor	CTF1306
L 5407	(A,25,73)	Inductor	CTF1306
L 5408	(A,36,76)	Inductor	CTF1306
L 5409	(A,55,69)	Inductor	CTF1306
L 5411	(A,53,73)	Inductor	CTF1306
L 5412	(A,55,66)	Inductor	CTF1306
L 5413	(A,19,67)	Inductor	CTF1306
L 5414	(A,22,66)	Inductor	CTF1306
L 5415	(A,22,65)	Inductor	CTF1306
L 5416	(A,19,64)	Inductor	CTF1306
L 5417	(A,19,63)	Inductor	CTF1306
L 5418	(A,55,63)	Inductor	CTF1306
L 5419	(A,21,62)	Inductor	CTF1306
L 5420	(A,55,60)	Inductor	CTF1306
L 5421	(A,17,61)	Inductor	CTF1306
L 5422	(A,18,60)	Inductor	CTF1306
L 5423	(A,17,58)	Inductor	CTF1306
L 5424	(A,17,57)	Inductor	CTF1306
L 5425	(A,55,57)	Inductor	CTF1306
L 5426	(A,20,56)	Inductor	CTF1306
L 5427	(A,20,55)	Inductor	CTF1306
L 5428	(A,55,55)	Inductor	CTF1306
L 5429	(A,20,53)	Inductor	CTF1306
L 5430	(A,20,52)	Inductor	CTF1306
L 5431	(A,55,52)	Inductor	CTF1306
L 5432	(A,55,49)	Inductor	CTF1306
L 5433	(A,20,51)	Inductor	CTF1306
L 5434	(A,21,48)	Inductor	CTF1306
L 5435	(A,21,47)	Inductor	CTF1306
L 5436	(A,21,45)	Inductor	CTF1306
L 5437	(A,55,46)	Inductor	CTF1306
L 5438	(A,19,44)	Inductor	CTF1306
L 5439	(A,46,39)	Ferrite Bead	CTF1528
L 5440	(A,46,41)	Ferrite Bead	CTF1528
L 5441	(A,45,39)	Ferrite Bead	CTF1528
L 5442	(A,45,41)	Ferrite Bead	CTF1528
L 5443	(A,44,41)	Ferrite Bead	CTF1528
L 5444	(A,43,39)	Ferrite Bead	CTF1528
L 5445	(A,42,38)	Inductor	CTF1306
L 5446	(A,39,41)	Ferrite Bead	CTF1528
L 5447	(A,38,40)	Ferrite Bead	CTF1528
L 5448	(A,38,38)	Ferrite Bead	CTF1528
L 5449	(A,37,40)	Ferrite Bead	CTF1528
L 5450	(A,37,38)	Ferrite Bead	CTF1528
L 5451	(A,36,40)	Ferrite Bead	CTF1528
L 5452	(A,35,38)	Inductor	CTF1306
L 5453	(A,33,39)	Ferrite Bead	CTF1528
L 5454	(A,34,41)	Ferrite Bead	CTF1528
L 5455	(A,33,36)	Ferrite Bead	CTF1528
L 5456	(A,32,38)	Ferrite Bead	CTF1528
L 5457	(A,32,40)	Ferrite Bead	CTF1528
L 5458	(A,31,37)	Ferrite Bead	CTF1528
L 5459	(A,26,39)	Ferrite Bead	CTF1528
L 5460	(A,26,41)	Ferrite Bead	CTF1528
L 5461	(A,25,41)	Ferrite Bead	CTF1528
L 5462	(A,22,39)	Ferrite Bead	CTF1528
L 5463	(A,23,40)	Ferrite Bead	CTF1528
L 5464	(A,23,42)	Ferrite Bead	CTF1528
L 5465	(A,23,43)	Ferrite Bead	CTF1528
L 5466	(A,47,38)	Inductor	CTF1306
L 5467	(A,30,38)	Inductor	CTF1306
L 5468	(A,28,38)	Inductor	CTF1306
L 5469	(A,49,37)	Inductor	CTF1306
L 5470	(A,41,38)	Inductor	CTF1306
L 5471	(A,39,38)	Inductor	CTF1306
L 5472	(A,17,44)	Inductor	LCTAW101J2520
L 5501	(A,13,44)	Inductor	CTF1306
L 5502	(A,9,55)	Inductor	LCTAW101J2520
L 5503	(A,8,43)	Inductor	LCTAW101J2520
L 5504	(A,52,26)	Inductor	CTF1306
L 5505	(A,21,35)	Inductor	DTL1096
L 5506	(A,15,31)	Inductor	DTL1096
L 5508	(A,51,35)	Inductor	CTF1306
L 5509	(A,27,35)	Inductor	CTF1635
L 5510	(A,19,35)	Inductor	CTF1635
L 5511	(A,60,43)	Inductor	CTF1635
L 5601	(A,112,24)	Inductor	CTF1306
L 5602	(A,98,34)	Inductor	CTF1306
L 5603	(A,136,30)	Inductor	CTF1306
L 5605	(A,123,8)	Inductor	CTF1488
L 5701	(A,100,17)	Inductor	CTF1379
L 5801	(A,104,45)	Inductor	LCTAW2R2J2520
L 5802	(A,110,47)	Inductor	CTF1382
L 5803	(A,94,68)	Inductor	LCTAW2R2J2520
L 5804	(A,132,46)	Inductor	CTF1382
T 5201	(B,52,8)	Transformer	CTT1119
TH5601	(A,122,22)	Thermistor	CCX1051
X 5401	(A,48,75)	Crystal Resonator 42 MHz	CSS1604
X 5601	(A,117,25)	Ceramic Resonator 5.00 MHz	CSS1731
VR5201	(A,44,8)	Semi-fixed 22 kohm(B)	CCP1450

RESISTORS

R 5001	(A,103,7)	RS1/16SS0R0J
R 5002	(A,140,26)	RS1/16SS101J
R 5007	(A,104,8)	RS1/16SS0R0J
R 5008	(A,104,10)	RS1/16SS0R0J
R 5009	(A,104,13)	RS1/16SS0R0J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 5010	(A,101,14)	RS1/16SS0R0J	R 5207	(A,22,9)	RS1/16SS105J
R 5013	(A,11,83)	RS1/16SS0R0J	R 5208	(A,23,5)	RS1/16SS473J
R 5027	(A,10,80)	RS1/16SS470J	R 5209	(A,25,3)	RS1/16SS333J
R 5028	(A,11,72)	RS1/16SS470J	R 5210	(A,26,3)	RS1/16SS513J
R 5029	(A,134,15)	RS1/16SS101J	R 5211	(A,36,17)	RS1/16SS103J
R 5030	(A,131,17)	RS1/16SS221J	R 5212	(A,30,16)	RS1/16SS105J
R 5031	(A,142,34)	RS1/16SS104J	R 5213	(A,43,15)	RS1/16SS102J
R 5032	(A,146,44)	RS1/16SS104J	R 5214	(A,40,8)	RS1/16S5102D
R 5033	(A,134,21)	RS1/16SS101J	R 5215	(B,17,16)	RS1/16SS103J
R 5034	(A,131,24)	RS1/16SS181J	R 5216	(B,26,9)	RS1/16SS103J
R 5035	(A,131,22)	RS1/16SS271J	R 5217	(B,16,9)	RS1/16SS103J
R 5036	(A,140,34)	RS1/16SS104J	R 5218	(B,16,3)	RS1/16SS621J
R 5037	(A,145,44)	RS1/16SS104J	R 5219	(B,15,9)	RS1/16SS104J
R 5038	(A,144,44)	RS1/16SS104J	R 5220	(B,13,8)	RS1/16SS473J
R 5039	(A,139,30)	RS1/16SS101J	R 5221	(B,39,14)	RS1/16SS621J
R 5040	(A,142,26)	RS1/16SS151J	R 5222	(B,41,16)	RS1/16SS101J
R 5041	(A,139,34)	RS1/16SS104J	R 5223	(B,41,17)	RS1/16SS101J
R 5042	(A,141,26)	RS1/16SS151J	R 5224	(B,39,13)	RS1/16SS821J
R 5043	(A,131,16)	RS1/16SS221J	R 5225	(A,69,2)	RS1/16SS511J
R 5101	(A,67,58)	RS1/16SS684J	R 5227	(A,38,8)	RS1/16S1001D
R 5102	(A,67,62)	RS1/16SS474J	R 5301	(A,77,73)	RS1/16S5101D
R 5103	(A,70,53)	RS1/16SS0R0J	R 5302	(A,77,71)	RS1/16SS104J
R 5104	(A,71,53)	RS1/16S6801D	R 5303	(A,76,66)	RS1/16SS153J
R 5105	(A,87,54)	RS1/16S0R0J	R 5304	(A,74,66)	RS1/16SS104J
R 5106	(A,77,52)	RS1/16SS0R0J	R 5305	(A,73,68)	RS1/16SS681J
R 5107	(A,73,52)	RS1/16SS201J	R 5306	(A,74,69)	RS1/16SS471J
R 5108	(A,75,53)	RS1/16S1001D	R 5307	(A,70,69)	RS1/16SS272J
R 5109	(A,68,51)	RS1/16S1001D	R 5308	(A,62,70)	RS1/16SS391J
R 5110	(A,71,51)	RS1/16SS682J	R 5311	(A,87,67)	RS1/16SS101J
R 5111	(A,65,45)	RS1/16S5100F	R 5312	(A,87,68)	RS1/16SS101J
R 5112	(A,75,51)	RS1/16S1600D	R 5314	(A,63,72)	RS1/16S0R0J
R 5113	(A,75,48)	RS1/16SS102J	R 5316	(A,77,75)	RS1/16SS0R0J
R 5114	(A,68,46)	RS1/16S0R0J	R 5401	(A,45,72)	RS1/16SS391J
R 5115	(A,77,50)	RS1/16S2700D	R 5402	(A,15,60)	RS1/16SS222J
R 5116	(A,65,46)	RS1/16S2001D	R 5403	(A,46,71)	RS1/16SS105J
R 5117	(A,71,49)	RS1/16SS684J	R 5404	(A,41,74)	RS1/16SS331J
R 5118	(A,75,47)	RS1/16SS333J	R 5405	(A,38,75)	RS1/16SS152J
R 5119	(A,72,47)	RS1/16SS123J	R 5406	(A,23,69)	RS1/16SS0R0J
R 5120	(A,80,44)	RS1/16SS273J	R 5407	(A,20,66)	RS1/16SS331J
R 5121	(A,81,46)	RS1/16SS150J	R 5408	(A,16,64)	RS1/16SS101J
R 5122	(A,85,36)	RS1/16SS150J	R 5410	(A,16,63)	RS1/16SS101J
R 5123	(A,80,39)	RS1/16SS563J	R 5411	(A,15,58)	RS1/16SS470J
R 5124	(A,74,32)	RS1/16S6202D	R 5412	(A,15,57)	RS1/16SS470J
R 5125	(A,67,32)	RS1/16S0R0J	R 5413	(A,18,54)	RS1/16SS471J
R 5126	(A,66,34)	RS1/16S1002D	R 5414	(A,18,56)	RS1/16SS333J
R 5127	(A,74,30)	RS1/16S4300D	R 5416	(A,16,56)	RS1/16SS152J
R 5128	(A,64,33)	RS1/16S1802D	R 5417	(A,23,56)	RS1/16SS473J
R 5129	(A,76,32)	RS1/16S1802D	R 5418	(A,44,36)	RAB4CQ221J
R 5130	(A,64,30)	RS1/16S2202D	R 5419	(A,39,34)	RAB4CQ221J
R 5131	(A,64,27)	RS1/16SS0R0J	R 5420	(A,35,34)	RAB4CQ221J
R 5132	(A,77,29)	RS1/16S3303D	R 5421	(A,20,41)	RAB4CQ221J
R 5133	(A,79,34)	RS1/16S0R0J	R 5422	(A,48,35)	RS1/16SS221J
R 5134	(A,77,27)	RS1/16SS0R0J	R 5423	(A,46,35)	RS1/16SS221J
R 5139	(A,66,38)	RS1/16SS0R0J	R 5424	(A,37,36)	RS1/16SS221J
R 5140	(A,64,41)	RS1/16SS0R0J	R 5425	(A,36,36)	RS1/16SS221J
R 5141	(A,83,22)	RS1/16SS223J	R 5426	(A,32,36)	RS1/16SS221J
R 5202	(A,18,13)	RS1/16SS103J	R 5427	(A,31,35)	RS1/16SS221J
R 5203	(A,21,13)	RS1/16SS104J	R 5428	(A,30,35)	RS1/16SS221J
R 5205	(A,19,11)	RS1/16SS473J	R 5429	(A,25,38)	RS1/16SS221J
R 5206	(A,21,2)	RS1/16SS472J	R 5430	(A,24,39)	RS1/16SS221J

Circuit Symbol and No.		Part No.
R 5501	(A,63,20)	RAB4CQ221J
R 5503	(A,14,46)	RS1/16SS101J
R 5504	(A,18,40)	RS1/16SS681J
R 5506	(A,17,50)	RS1/16SS101J
R 5507	(A,16,38)	RS1/16SS472J
R 5508	(A,8,33)	RS1/16S3302D
R 5509	(A,55,28)	RS1/16S6800D
R 5510	(A,11,28)	RS1/16SS223J
R 5512	(A,51,28)	RS1/16S27R0D
R 5513	(A,52,28)	RS1/16S10R0D
R 5514	(A,54,28)	RS1/16S1000D
R 5515	(A,57,28)	RS1/16S82R0F
R 5516	(A,58,30)	RS1/16S56R0D
R 5517	(A,59,33)	RS1/16S47R0D
R 5518	(A,58,33)	RS1/16S36R0D
R 5519	(A,56,33)	RS1/16S33R0D
R 5520	(A,55,33)	RS1/16S27R0D
R 5521	(A,53,33)	RS1/16S1800D
R 5522	(A,52,33)	RS1/16S82R0F
R 5523	(A,51,33)	RS1/16S12R0F
R 5524	(A,8,31)	RS1/16S5602D
R 5525	(A,10,28)	RS1/16SS101J
R 5526	(A,7,23)	RS1/16SS153J
R 5527	(A,13,21)	RS1/16SS153J
R 5528	(A,10,23)	RS1/16SS0R0J
R 5529	(A,12,21)	RS1/16SS0R0J
R 5530	(A,31,31)	RS1/16SS102J
R 5531	(A,7,29)	RS1/16SS100J
R 5532	(A,10,25)	RS1/16SS100J
R 5533	(A,9,23)	RS1/16SS0R0J
R 5534	(A,11,21)	RS1/16SS0R0J
R 5601	(A,121,22)	RS1/16SS473J
R 5602	(A,139,44)	RS1/16SS471J
R 5603	(A,140,44)	RS1/16SS471J
R 5604	(A,142,44)	RS1/16SS471J
R 5605	(A,120,24)	RS1/16SS471J
R 5606	(A,119,21)	RS1/16SS473J
R 5607	(A,127,23)	RS1/16SS104J
R 5608	(A,129,30)	RS1/16SS473J
R 5610	(A,130,29)	RS1/16SS473J
R 5611	(A,131,29)	RS1/16SS473J
R 5612	(A,129,41)	RS1/16SS471J
R 5614	(A,127,43)	RS1/16SS471J
R 5615	(A,128,42)	RS1/16SS471J
R 5616	(A,119,46)	RS1/16SS471J
R 5617	(A,118,46)	RS1/16SS471J
R 5618	(A,129,31)	RS1/16SS471J
R 5619	(A,129,36)	RS1/16SS471J
R 5620	(A,129,26)	RS1/16SS471J
R 5621	(A,126,26)	RS1/16SS470J
R 5622	(A,129,32)	RS1/16SS471J
R 5623	(A,126,25)	RS1/16SS470J
R 5624	(A,98,24)	RS1/16SS105J
R 5625	(A,104,25)	RS1/16SS105J
R 5626	(A,129,34)	RS1/16SS471J
R 5627	(A,129,35)	RS1/16SS471J
R 5628	(A,132,32)	RS1/16SS473J
R 5629	(A,129,37)	RS1/16SS221J
R 5630	(A,124,22)	RS1/16SS153J
R 5631	(A,127,27)	RS1/16SS473J

Circuit Symbol and No.		Part No.
R 5632	(A,135,29)	RS1/16SS473J
R 5633	(A,117,46)	RS1/16SS473J
R 5634	(A,115,46)	RS1/16SS473J
R 5635	(A,133,29)	RS1/16SS473J
R 5636	(A,138,34)	RS1/16SS473J
R 5637	(A,137,41)	RS1/16SS103J
R 5638	(A,131,36)	RS1/16SS103J
R 5639	(A,106,39)	RS1/16SS471J
R 5640	(A,106,35)	RS1/16SS102J
R 5642	(A,107,42)	RS1/16SS104J
R 5643	(A,116,46)	RS1/16SS473J
R 5644	(A,103,41)	RS1/16SS103J
R 5646	(A,99,37)	RS1/16SS473J
R 5647	(A,126,12)	RS1/16SS103J
R 5648	(A,127,10)	RS1/16SS821J
R 5657	(A,129,38)	RS1/16SS221J
R 5658	(A,129,39)	RS1/16SS221J
R 5660	(A,129,40)	RS1/16SS221J
R 5701	(A,97,30)	RS1/16SS0R0J
R 5702	(A,102,24)	RS1/16SS0R0J
R 5703	(A,102,19)	RS1/16SS103J
R 5704	(A,99,19)	RS1/16SS103J
R 5705	(A,102,18)	RS1/16SS103J
R 5706	(A,98,18)	RS1/16SS103J
R 5707	(A,100,24)	RS1/16SS105J
R 5708	(A,96,21)	RS1/16SS105J
R 5709	(A,102,27)	RS1/16SS102J
R 5710	(A,98,26)	RS1/16SS102J
R 5801	(A,118,70)	RS1/16SS101J
R 5802	(A,118,69)	RS1/16SS101J
R 5803	(A,118,68)	RS1/16SS101J
R 5804	(A,118,67)	RS1/16SS101J
R 5805	(A,98,60)	RS1/16SS102J
R 5806	(A,99,59)	RS1/16SS102J
R 5807	(A,97,59)	RS1/16SS102J
R 5808	(A,113,72)	RS1/16SS473J
R 5809	(A,118,66)	RS1/16SS101J
R 5810	(A,118,65)	RS1/16SS101J
R 5811	(A,107,72)	RS1/16SS471J
R 5812	(A,104,72)	RS1/16SS473J
R 5813	(A,136,50)	RS1/16SS101J
R 5814	(A,118,64)	RS1/16SS101J
R 5815	(A,138,46)	RS1/16SS473J
R 5816	(A,135,46)	RS1/16SS101J
R 5817	(A,118,63)	RS1/16SS101J
R 5818	(A,97,50)	RS1/16S1500D
R 5819	(A,97,47)	RS1/16S0R0J
R 5820	(A,119,61)	RS1/16SS101J
R 5821	(A,134,46)	RS1/16SS101J
R 5822	(A,98,50)	RS1/16S1500D
R 5823	(A,98,47)	RS1/16S0R0J
R 5824	(A,118,60)	RS1/16SS101J
R 5825	(A,131,75)	RS1/16SS473J
R 5826	(A,100,50)	RS1/16S1500D
R 5827	(A,100,47)	RS1/16S0R0J
R 5828	(A,130,75)	RS1/16SS473J
R 5829	(A,129,46)	RS1/16SS101J
R 5830	(A,118,59)	RS1/16SS101J
R 5831	(A,129,75)	RS1/16SS473J
R 5832	(A,118,58)	RS1/16SS101J

Circuit Symbol and No.		Part No.
R 5833	(A,99,67)	RS1/16SS680J
R 5834	(A,119,49)	RS1/16SS101J
R 5835	(A,118,57)	RS1/16SS101J
R 5836	(A,118,56)	RS1/16SS101J
R 5837	(A,115,50)	RS1/16SS0R0J
R 5838	(A,118,55)	RS1/16SS101J
R 5839	(A,100,44)	RS1/16S1501D
R 5840	(A,115,51)	RS1/16SS0R0J
R 5841	(A,118,51)	RS1/16SS101J
R 5842	(A,114,53)	RS1/16SS101J
R 5843	(A,118,54)	RS1/16SS101J
R 5844	(A,112,72)	RS1/16SS101J
R 5845	(A,111,72)	RS1/16SS101J
R 5846	(A,113,53)	RS1/16SS470J
R 5847	(A,112,53)	RS1/16SS470J
R 5848	(A,115,53)	RS1/16SS101J
R 5849	(A,110,72)	RS1/16SS101J
R 5850	(A,112,73)	RS1/16SS473J
R 5851	(A,100,72)	RS1/16SS0R0J
R 5852	(A,110,74)	RS1/16SS103J
R 5853	(A,99,70)	RS1/16SS0R0J
R 5856	(A,114,72)	RS1/16SS0R0J
R 5857	(A,136,46)	RS1/16SS101J
R 5858	(A,137,46)	RS1/16SS101J
R 5865	(A,122,47)	RS1/16SS101J
R 5866	(A,123,46)	RS1/16SS101J
R 5867	(A,125,46)	RS1/16SS101J
R 5868	(A,128,46)	RS1/16SS101J
R 5869	(A,127,46)	RS1/16SS101J
R 5870	(A,126,46)	RS1/16SS101J

CAPACITORS

C 5001	(A,107,25)	CKSSYB102K50
C 5002	(A,104,15)	CKSSYB102K50
C 5003	(A,104,18)	CKSSYB102K50
C 5004	(A,108,23)	CKSSYB102K50
C 5007	(A,141,68) 10 uF	CCG1223
C 5008	(A,138,68) 10 uF	CCG1223
C 5009	(A,10,76) 22 uF	CCG1178
C 5010	(A,145,26) 10 uF	CCG1203
C 5011	(A,144,38)	CKSRYB105K16
C 5012	(A,133,14)	CKSQYB225K10
C 5013	(A,133,19)	CKSQYB225K10
C 5014	(A,138,26)	CKSQYB225K10
C 5015	(A,10,74) 22 uF	CCG1178
C 5018	(A,137,72)	CKSSYB104K10
C 5019	(A,138,72)	CKSSYB103K16
C 5020	(A,139,72)	CKSSYB102K50
C 5101	(A,55,76)	CKSRYB105K16
C 5102	(A,15,70)	CSZS100M10
C 5103	(A,57,74)	CKSRYB105K16
C 5104	(A,80,54)	CKSSYB104K10
C 5105	(A,59,49)	CSZS100M16
C 5106	(A,59,58)	CSZSR220M10
C 5107	(A,81,56)	CSZSR330M10
C 5108	(A,58,63)	CSZSR220M10
C 5109	(A,63,52) 10 uF	CCG1171
C 5110	(A,62,51)	CKSSYB104K10
C 5111	(A,65,65) 10 uF	CCG1171
C 5112	(A,67,67)	CKSSYB104K10
C 5113	(A,68,56)	CKSSYB104K10
C 5114	(A,68,60)	CKSRYB105K16
C 5115	(A,67,61)	CKSSYB104K10
C 5116	(A,68,63)	CKSRYB105K16
C 5117	(A,91,52)	CSZS100M16
C 5118	(A,93,53)	CKSRYB105K16
C 5119	(A,65,50)	CKSSYB104K10
C 5120	(A,13,70)	CSZS100M10
C 5121	(A,70,51)	CKSRYB473K50
C 5122	(A,88,52) 68 uF/6.3 V	CCH1440
C 5123	(A,75,50)	CCSRCH331J50
C 5124	(A,88,49)	CKSRYB104K50
C 5125	(A,68,48)	CKSRYB104K50
C 5126	(A,67,49)	CSZS100M16
C 5127	(A,73,50)	CKSRYB103K50
C 5128	(A,76,47)	CCSSCH101J50
C 5130	(A,77,47)	CKSRYB103K50
C 5131	(A,73,47)	CKSRYB393K50
C 5132	(A,70,48)	CKSRYB393K50
C 5133	(A,92,42)	CKSRYB103K50
C 5134	(A,79,45)	CKSRYB104K50
C 5135	(A,86,43) 10 uF	CCG1223
C 5136	(A,65,42)	CKSRYB393K50
C 5137	(A,90,43) 10 uF	CCG1223
C 5138	(A,75,20)	CKSRYB224K16
C 5139	(A,79,42)	CKSRYB105K16
C 5140	(A,79,41)	CKSSYB102K50
C 5141	(A,89,37) 10 uF	CCG1223
C 5143	(A,86,37)	CKSRYB103K50
C 5144	(A,63,38)	CKSSYB102K50
C 5145	(A,79,39)	CKSRYB104K50
C 5146	(A,64,34)	CKSRYB105K16
C 5147	(A,80,36)	CKSRYB105K16
C 5148	(A,79,36)	CKSRYB103K50
C 5149	(A,70,32)	CKSRYB104K50
C 5150	(A,76,25)	CKSYB475K16
C 5151	(A,80,32)	CKSRYB472K50
C 5152	(A,78,32)	CKSRYB472K50
C 5153	(A,93,27)	CKSRYB104K50
C 5154	(A,75,23)	CKSRYB103K50
C 5155	(A,70,30)	CKSRYB104K50
C 5156	(A,69,30)	CKSRYB104K50
C 5157	(A,68,30)	CKSRYB104K50
C 5158	(A,90,24) 33 uF/10 V	CCH1586
C 5159	(A,89,22)	CKSRYB105K16
C 5160	(A,79,27)	CKSRYB104K50
C 5161	(A,81,26)	CKSQYF105Z25
C 5163	(A,70,24)	CKSQYF105Z25
C 5164	(A,68,24)	CKSQYF105Z25
C 5165	(A,66,24)	CKSQYB225K16
C 5166	(A,64,24)	CKSQYB225K16
C 5167	(A,83,32)	CKSRYB105K16
C 5168	(A,66,30)	CKSRYB105K16
C 5169	(A,82,23)	CKSQYF105Z25
C 5170	(A,63,24)	CKSRYB105K16
C 5204	(A,5,16)	CKSRYB104K50
C 5205	(A,12,14)	CKSRYB105K16
C 5207	(A,28,10)	CKSRYB104K50
C 5208	(A,25,6)	CKSRYB104K50
C 5209	(A,31,13)	CKSRYB105K16

Circuit Symbol and No.		Part No.
C 5211	(A,27,10)	CKSRYB474K10
C 5212	(A,28,3)	CKSSYB332K50
C 5213	(A,28,7)	CKSRYB105K16
C 5214	(A,30,3)	CKSSYB152K50
C 5215	(A,42,17)	CKSSYB104K10
C 5216	(A,31,14)	CKSRYB103K50
C 5217	(A,38,4)	CKSRYB473K50
C 5218	(A,37,11)	CKSRYB473K50
C 5219	(A,40,11) 220 pF	CCG1260
C 5220	(B,26,6) 10 uF	CCG1223
C 5221	(B,18,7) 10 uF	CCG1223
C 5222	(B,32,15)	CKSRYB105K16
C 5223	(B,32,14)	CKSRYB105K16
C 5224	(B,38,16)	CKSRYB104K50
C 5225	(B,75,8) 15 pF	CCG1194
C 5226	(A,67,4)	CKSRYB223K50
C 5301	(A,75,72) 10 uF	CCG1171
C 5302	(A,73,69)	CCSSCH470J50
C 5303	(A,72,69)	CCSSCH680J50
C 5304	(A,68,74)	CCSSCH5R0C50
C 5305	(A,71,69)	CCSSCH470J50
C 5306	(A,64,71)	CKSSYB104K10
C 5307	(A,67,69)	CSZSR330M10
C 5308	(A,84,68) 10 uF	CCG1171
C 5309	(A,84,66) 10 uF	CCG1171
C 5310	(A,80,68)	CKSSYB104K10
C 5401	(A,49,73)	CCSSCH9R0D50
C 5402	(A,46,73)	CCSSCH9R0D50
C 5403	(A,44,74)	CKSSYB104K10
C 5404	(A,33,72)	CKSSYB104K10
C 5405	(A,33,74)	CKSSYB104K10
C 5406	(A,31,72)	CKSSYB104K10
C 5407	(A,39,74)	CCSSCH4R0C50
C 5410	(A,51,72)	CKSSYB104K10
C 5411	(A,51,74)	CKSSYB104K10
C 5412	(A,43,72)	CKSSYB104K10
C 5413	(A,42,75)	CKSSYB103K16
C 5414	(A,42,72)	CCSSCH181J25
C 5415	(A,41,72)	CKSSYB104K10
C 5416	(A,40,72)	CKSSYB104K10
C 5417	(A,28,75)	CKSSYB104K10
C 5418	(A,27,75)	CKSSYB104K10
C 5419	(A,38,73)	CKSSYB104K10
C 5420	(A,37,72)	CKSSYB104K10
C 5421	(A,26,75)	CKSSYB104K10
C 5422	(A,25,75)	CKSSYB104K10
C 5423	(A,35,72)	CKSSYB104K10
C 5424	(A,18,70)	CKSSYB104K10
C 5425	(A,19,70)	CKSSYB104K10
C 5426	(A,20,70)	CKSSYB104K10
C 5427	(A,21,70)	CKSSYB104K10
C 5428	(A,34,72)	CKSSYB104K10
C 5429	(A,31,74)	CKSSYB104K10
C 5430	(A,30,75)	CKSSYB104K10
C 5431	(A,29,72)	CKSSYB104K10
C 5432	(A,27,72)	CKSSYB104K10
C 5433	(A,25,72)	CKSSYB104K10
C 5434	(A,54,69)	CKSSYB104K10
C 5435	(A,54,66)	CKSSYB104K10
C 5436	(A,23,68)	CKSSYB104K10
C 5437	(A,21,63)	CKSSYB104K10
C 5438	(A,54,63)	CKSSYB104K10
C 5439	(A,23,62)	CKSSYB104K10
C 5440	(A,54,61)	CKSSYB104K10
C 5441	(A,21,60)	CKSSYB104K10
C 5442	(A,54,57)	CKSSYB104K10
C 5443	(A,21,58)	CKSSYB104K10
C 5444	(A,23,57)	CKSSYB104K10
C 5445	(A,54,55)	CKSSYB104K10
C 5447	(A,23,53)	CKSSYB104K10
C 5448	(A,23,52)	CKSSYB104K10
C 5449	(A,54,51)	CKSSYB104K10
C 5450	(A,54,49)	CKSSYB104K10
C 5451	(A,23,51)	CKSSYB104K10
C 5453	(A,23,50)	CKSSYB104K10
C 5454	(A,23,48)	CKSSYB104K10
C 5455	(A,23,46)	CKSSYB104K10
C 5456	(A,54,45)	CKSSYB104K10
C 5457	(A,22,44)	CKSRYB105K16
C 5458	(A,49,40)	CKSSYB104K10
C 5459	(A,42,40)	CKSSYB104K10
C 5460	(A,42,41)	CKSSYB104K10
C 5461	(A,40,41)	CKSSYB104K10
C 5462	(A,35,41)	CKSSYB104K10
C 5463	(A,30,40)	CKSSYB104K10
C 5464	(A,28,40)	CKSSYB104K10
C 5465	(A,47,41)	CKSSYB104K10
C 5466	(A,51,38)	CSZSR330M10
C 5467	(A,53,72)	CKSSYB104K10
C 5469	(A,18,66)	CKSSYB104K10
C 5503	(A,57,17)	CSZS100M16
C 5505	(A,11,44)	CKSSYB104K10
C 5507	(A,12,52)	CKSSYB104K10
C 5508	(A,13,41)	CKSRYB105K16
C 5509	(A,59,43)	CKSSYB104K10
C 5510	(A,13,38)	CKSRYB105K16
C 5511	(A,10,42)	CKSSYB104K10
C 5512	(A,14,29)	CKSSYB104K16
C 5513	(A,9,39)	CSZSR220M16
C 5514	(A,8,51) 4.7 uF	CCG1111
C 5515	(A,8,36)	CKSRYB105K16
C 5516	(A,59,36)	CKSSYB104K10
C 5517	(A,60,39)	CSZS100M16
C 5518	(A,12,28)	CKSSYB104K10
C 5519	(A,25,35)	CKSSYB104K10
C 5520	(A,23,36)	CKSSYB104K10
C 5521	(A,20,37)	CKSRYB104K50
C 5522	(A,14,33)	CKSSYB104K16
C 5523	(A,27,33)	CSZSR220M16
C 5524	(A,23,33)	CSZS100M16
C 5525	(A,20,32)	CKSQYB334K50
C 5526	(A,16,34) 4.7 uF	CCG1111
C 5527	(A,29,31)	CKSSYB104K10
C 5528	(A,25,31)	CKSSYB104K10
C 5529	(A,21,30)	CKSRYB104K50
C 5530	(A,18,31)	CKSSYB104K16
C 5601	(A,110,26)	CKSSYB104K10
C 5602	(A,112,26)	CKSSYB104K10
C 5604	(A,129,33)	CKSSYB104K10
C 5605	(A,129,19) 4.7 uF	CCG1206

Circuit Symbol and No.			Part No.
C 5606	(A,136,31)		CKSSYB104K10
C 5607	(A,114,25)		CKSSYB104K10
C 5608	(A,98,37)		CKSSYB104K10
C 5609	(A,123,17)		CKSSYB104K10
C 5610	(A,121,17)		CSZSC101M10
C 5611	(A,113,46)		CKSSYB104K10
C 5612	(A,120,22)		CKSSYB105K6R3
C 5701	(A,100,19)		CKSSYB102K50
C 5702	(A,100,23)		CKSSYB102K50
C 5703	(A,96,22)		CKSSYB102K50
C 5704	(A,101,26)		CKSSYB472K25
C 5705	(A,99,25)		CKSSYB472K25
C 5801	(A,104,48)	10 uF	CCG1171
C 5802	(A,108,49)		CSZSC101M10
C 5803	(A,110,50)		CKSSYB104K10
C 5804	(A,103,48)		CKSSYB104K10
C 5805	(A,97,68)		CSZSR330M10
C 5808	(A,99,62)		CKSSYB104K10
C 5809	(A,103,71)		CKSSYB104K10
C 5810	(A,131,46)	10 uF	CCG1171
C 5811	(A,97,44)		CKSRYB105K16
C 5812	(A,98,44)		CKSSYB104K10
C 5813	(A,111,54)		CKSSYB104K10
C 5814	(A,106,54)		CKSSYB104K10
C 5816	(A,111,50)		CKSSYB104K10
C 5819	(A,115,69)		CKSSYB104K10
C 5820	(A,105,71)		CKSSYB104K10
C 5821	(A,108,73)		CKSSYB104K10

D

Unit Number : YWX5005
Unit Name : DVD Core Unit

MISCELLANEOUS

IC 1003	(B,72,42)	IC	S-80859CNNB-B9K
IC 1004	(B,75,48)	Regulator IC	NJM2880U1-05
IC 1005	(B,61,58)	IC	S-L2980A50MC-C7J
IC 1007	(B,82,54)	IC	NJM2885DL1-33
IC 1008	(B,80,63)	IC	R1232D121B
IC 1201	(A,26,15)	IC	BD7996EFV
IC 1301	(B,90,27)	IC	TC7SZ125FU
IC 1351	(B,86,27)	IC	TC7SZ08FU
IC 1352	(B,79,13)	IC	TC74LCX16373FT
IC 1401	(B,61,32)	Flash ROM Unit	CWW1439
IC 1402	(B,37,10)	Flash ROM Unit	CWW1440
IC 1403	(B,47,29)	IC	TC7SZ32FU
IC 1481	(B,60,12)	IC	EDS1232AATA-75-E
IC 1501	(A,60,19)	IC	MN2DS0016AAUB
IC 1801	(A,70,52)	D/A Converter	PCM1753DBQ
Q 1101	(B,62,50)	Transistor	2SC4081
Q 1102	(B,68,50)	Transistor	2SC4081
Q 1103	(B,60,45)	Transistor	2SB1260
Q 1104	(B,66,45)	Transistor	2SB1260
D 1002	(A,88,66)	Diode	1SR154-400
D 1301	(B,12,10)	Chip LED	CL205IRXTU
L 1004	(B,63,60)	Inductor	CTF1472
L 1005	(B,81,49)	Inductor	CTF1465
L 1006	(B,86,64)	Inductor	CTF1678
L 1007	(B,74,63)	Inductor	CTF1623
L 1101	(B,66,54)	Inductor	CTF1305
L 1482	(B,77,29)	Inductor	CTF1473
L 1502	(A,71,46)	Inductor	CTF1378
L 1503	(A,60,47)	Inductor	CTF1487
L 1504	(A,35,10)	Inductor	CTF1387
L 1511	(A,63,3)	Inductor	CTF1680
L 1601	(A,41,23)	Inductor	CTF1473
L 1602	(A,55,42)	Inductor	CTF1473
L 1603	(A,54,42)	Inductor	CTF1473
L 1604	(A,52,42)	Inductor	CTF1473
L 1605	(A,38,32)	Inductor	CTF1395
L 1671	(A,41,19)	Inductor	CTF1473
L 1672	(A,41,20)	Inductor	CTF1473
L 1673	(A,41,21)	Inductor	CTF1473
L 1801	(A,70,61)	Inductor	CTF1473
L 1901	(A,91,73)	Inductor	CTF1487
L 1902	(A,91,62)	Inductor	CTF1558
X 1501	(A,40,15)	Crystal 27.000 MHz	CSS1714
VR1671	(A,35,20)	Semi-fixed 10 kohm(B)	CCP1448
EF1501	(A,68,46)	EMI Filter	DTL1106
EF1502	(A,61,44)	EMI Filter	DTL1106
EF1901	(A,87,74)	EMI Filter	DTF1106
EF1903	(A,91,64)	EMI Filter	DTL1106

RESISTORS

R 1011	(B,72,40)	RS1/16SS104J
R 1014	(B,82,61)	RS1/16SS473J
R 1015	(B,76,60)	RS1/16SS101J
R 1101	(B,63,52)	RS1/16SS391J
R 1102	(B,62,47)	RS1/16SS511J
R 1103	(B,67,53)	RS1/16SS391J
R 1104	(B,69,47)	RS1/16SS561J
R 1107	(B,61,53)	RS1/16SS6R8J
R 1108	(B,65,53)	RS1/16SS6R8J
R 1109	(B,57,40)	RS1/10S1R5J
R 1110	(B,63,40)	RS1/10S1R5J
R 1111	(B,70,40)	RS1/10S1R5J
R 1112	(B,64,40)	RS1/10S1R5J
R 1113	(B,61,40)	RS1/10S1R5J
R 1114	(B,59,40)	RS1/10S1R5J
R 1115	(B,66,40)	RS1/10S1R5J
R 1116	(B,68,40)	RS1/10S1R5J
R 1117	(B,64,49)	RS1/16SS104J
R 1118	(B,70,49)	RS1/16SS104J
R 1202	(A,19,12)	RS1/16SS221J
R 1203	(A,19,11)	RS1/16SS221J
R 1210	(A,30,27)	RS1/16SS101J
R 1211	(B,26,18)	RS1/16SS3R9J
R 1212	(B,27,18)	RS1/16SS3R9J
R 1214	(B,28,18)	RS1/16SS3R9J
R 1215	(B,29,18)	RS1/16SS3R9J
R 1216	(B,30,18)	RS1/16SS3R9J
R 1217	(B,31,18)	RS1/16SS3R9J
R 1219	(A,20,27)	RS1/16SS101J
R 1223	(A,19,4)	RS1/16SS753J
R 1225	(A,19,7)	RS1/16SS753J
R 1227	(B,13,21)	RS1/16SS3R9J
R 1228	(B,14,21)	RS1/16SS3R9J

Circuit Symbol and No.		Part No.
R 1229	(B,15,21)	RS1/16SS3R9J
R 1230	(B,16,21)	RS1/16SS3R9J
R 1231	(B,17,21)	RS1/16SS3R9J
R 1232	(B,18,21)	RS1/16SS3R9J
R 1233	(B,19,21)	RS1/16SS3R9J
R 1234	(B,20,21)	RS1/16SS3R9J
R 1240	(B,32,18)	RS1/16SS3R9J
R 1241	(B,33,18)	RS1/16SS3R9J
R 1242	(B,34,18)	RS1/16SS3R9J
R 1243	(B,37,18)	RS1/16SS3R9J
R 1244	(B,36,18)	RS1/16SS3R9J
R 1245	(B,35,18)	RS1/16SS3R9J
R 1301	(B,13,13)	RS1/16SS391J
R 1302	(B,15,13)	RS1/16SS471J
R 1304	(B,87,23)	RS1/16SS563J
R 1305	(B,86,23)	RS1/16SS243J
R 1306	(B,85,23)	RS1/16SS683J
R 1307	(B,88,23)	RS1/16SS243J
R 1314	(B,86,21)	RAB4CQ822J
R 1351	(B,84,25)	RS1/16SS331J
R 1401	(B,72,33)	RS1/16SS221J
R 1402	(B,50,27)	RS1/16SS104J
R 1405	(B,48,10)	RS1/16SS221J
R 1406	(B,25,4)	RS1/16SS104J
R 1407	(B,25,6)	RS1/16SS104J
R 1410	(B,47,31)	RS1/16SS104J
R 1501	(B,71,3)	RAB4CQ560J
R 1502	(A,85,3)	RS1/16SS104J
R 1503	(A,71,2)	RS1/16SS560J
R 1504	(A,87,23)	RAB4CQ104J
R 1505	(B,68,3)	RAB4CQ560J
R 1506	(A,87,19)	RAB4CQ104J
R 1507	(B,65,3)	RAB4CQ560J
R 1508	(A,86,16)	RAB4CQ104J
R 1509	(A,86,12)	RAB4CQ104J
R 1510	(A,78,11)	RAB4CQ104J
R 1511	(A,88,4)	RS1/16SS104J
R 1512	(B,59,3)	RAB4CQ560J
R 1513	(A,44,4)	RS1/16SS102J
R 1514	(A,80,7)	RAB4CQ104J
R 1515	(A,43,3)	RS1/16SS102J
R 1516	(A,76,8)	RS1/16SS103J
R 1518	(A,85,5)	RS1/16SS104J
R 1520	(A,35,8)	RS1/16SS221J
R 1521	(A,41,11)	RAB4CQ101J
R 1522	(B,56,3)	RAB4CQ560J
R 1523	(A,39,11)	RS1/16SS101J
R 1524	(A,39,12)	RS1/16SS101J
R 1525	(B,53,3)	RAB4CQ560J
R 1526	(A,36,10)	RS1/16SS270J
R 1528	(A,43,14)	RS1/16SS101J
R 1529	(B,53,22)	RAB4CQ560J
R 1530	(A,43,15)	RS1/16SS105J
R 1531	(B,50,22)	RAB4CQ560J
R 1532	(A,77,22)	RS1/16SS103J
R 1533	(A,76,27)	RS1/16SS103J
R 1534	(A,77,26)	RS1/16SS103J
R 1535	(A,63,36)	RS1/16SS221J
R 1537	(A,67,40)	RS1/16SS221J
R 1538	(A,66,41)	RS1/16SS221J

Circuit Symbol and No.		Part No.
R 1540	(A,70,43)	RS1/16SS102J
R 1541	(A,64,41)	RS1/16SS472J
R 1542	(A,60,36)	RS1/16SS223J
R 1543	(A,59,37)	RS1/16SS332J
R 1544	(A,57,41)	RS1/16SS183J
R 1545	(A,61,36)	RS1/16SS223J
R 1546	(A,59,42)	RS1/16SS104J
R 1547	(A,59,41)	RS1/16SS473J
R 1548	(A,59,36)	RS1/16SS104J
R 1554	(A,60,39)	RS1/16SS221J
R 1555	(A,57,38)	RS1/16SS221J
R 1556	(A,43,7)	RS1/16SS104J
R 1557	(A,57,39)	RS1/16SS104J
R 1559	(A,63,41)	RS1/16SS221J
R 1560	(A,68,42)	RAB4CQ104J
R 1562	(A,64,38)	RAB4CQ104J
R 1565	(A,73,36)	RS1/16SS103J
R 1566	(A,72,36)	RS1/16SS103J
R 1567	(B,68,22)	RAB4CQ560J
R 1568	(B,65,22)	RAB4CQ560J
R 1569	(B,62,3)	RAB4CQ560J
R 1570	(B,60,22)	RAB4CQ560J
R 1571	(B,57,22)	RAB4CQ560J
R 1573	(B,63,19)	RS1/16SS560J
R 1582	(A,81,25)	RS1/16SS103J
R 1583	(A,81,27)	RS1/16SS103J
R 1584	(A,77,28)	RS1/16SS103J
R 1601	(A,41,25)	RS1/16SS123J
R 1602	(A,39,24)	RS1/16SS123J
R 1607	(A,41,27)	RS1/16SS105J
R 1609	(A,37,28)	RN1/16SE1002D
R 1610	(A,43,28)	RS1/16SS222J
R 1613	(A,39,28)	RS1/16SS223J
R 1614	(A,46,35)	RS1/16SS105J
R 1615	(A,43,32)	RS1/16SS105J
R 1616	(A,53,36)	RS1/16SS2002D
R 1672	(A,43,21)	RS1/16SS303J
R 1673	(A,37,22)	RS1/16SS183J
R 1674	(A,34,23)	RS1/16SS562J
R 1705	(A,55,57)	RS1/16SS101J
R 1706	(A,52,56)	RS1/16SS201J
R 1707	(A,55,51)	RS1/16SS101J
R 1708	(A,52,50)	RS1/16SS201J
R 1715	(A,60,56)	RS1/16SS201J
R 1716	(A,62,57)	RS1/16SS101J
R 1719	(A,60,50)	RS1/16SS201J
R 1720	(A,62,51)	RS1/16SS101J
R 1803	(A,72,56)	RS1/16SS821J
R 1804	(A,74,56)	RS1/16SS821J
R 1805	(A,72,61)	RS1/16SS104J
R 1806	(A,74,61)	RS1/16SS104J
R 1903	(A,89,52)	RS1/16SS0R0J
R 1904	(A,90,59)	RS1/16S0R0J

CAPACITORS

C 1019	(B,58,59)	CCSSCH101J50
C 1020	(B,58,57)	CKSSYB104K10
C 1021	(B,60,60)	CKSRYB105K10
C 1022	(B,79,47)	CKSSYB103K16

Circuit Symbol and No.			Part No.	Circuit Symbol and No.		Part No.
C 1023	(B,79,49)		CKSSYB104K10	C 1496	(B,65,5)	CKSSYB102K50
C 1024	(B,71,48)		CKSQYB475K10	C 1497	(B,61,19)	CKSSYB102K50
C 1025	(B,64,58)		CKSRYB105K10	C 1498	(B,77,26)	CKSSYB102K50
C 1026	(B,12,19)		CKSSYB104K10	C 1499	(B,49,4)	CKSSYB102K50
C 1027	(A,90,53)		CCSSCH101J50	C 1501	(A,68,44)	CKSQYB106K6R3
C 1028	(B,89,56)		CKSRYB105K10	C 1502	(A,58,43)	CKSQYB106K6R3
C 1029	(B,89,52)		CKSQYB225K10	C 1503	(A,55,3)	CKSSYB104K10
C 1030	(B,84,59)		CKSQYB106K6R3	C 1504	(A,58,3)	CKSSYB104K10
C 1031	(B,85,59)		CKSQYB106K6R3	C 1505	(A,53,3)	CKSSYB104K10
C 1032	(B,82,59)		CKSRYB105K10	C 1506	(A,60,3)	CKSSYB104K10
C 1033	(B,73,59)		CKSQYB106K6R3	C 1507	(A,68,2)	CKSSYB104K10
C 1034	(B,73,57)		CKSQYB106K6R3	C 1508	(A,65,3)	CKSSYB104K10
C 1035	(B,45,27)		CCSSCH101J50	C 1509	(A,69,2)	CKSSYB104K10
C 1101	(B,61,54)	10 µF	CCG1192	C 1510	(A,43,11)	CKSSYB104K10
C 1102	(B,58,50)	100 µF	CCG1232	C 1511	(A,76,7)	CKSSYB104K10
C 1103	(B,65,50)	100 µF	CCG1232	C 1512	(A,76,11)	CKSSYB104K10
C 1104	(B,63,43)		CKSSYB104K10	C 1513	(A,43,10)	CKSSYB104K10
C 1105	(B,70,43)		CKSSYB104K10	C 1514	(A,76,17)	CKSSYB104K10
C 1106	(B,63,45)		CKSSYB103K16	C 1515	(A,43,16)	CKSSYB104K10
C 1107	(B,70,45)		CKSSYB103K16	C 1516	(A,76,15)	CKSSYB104K10
C 1108	(A,35,36)		CKSSYB103K16	C 1517	(A,43,17)	CKSSYB104K10
C 1109	(A,36,33)		CKSRYB105K10	C 1518	(A,37,14)	CCSSCH8R0D50
C 1110	(A,35,37)		CKSSYB103K16	C 1519	(A,37,16)	CCSSCH8R0D50
C 1111	(A,39,33)		CKSRYB105K10	C 1521	(A,76,24)	CKSSYB104K10
C 1201	(B,21,11)		CEVW101M16	C 1522	(A,77,24)	CKSSYB104K10
C 1202	(B,15,17)		CKSYB475K16	C 1523	(A,58,36)	CKSSYB104K10
C 1207	(B,16,10)		CKSQYB225K10	C 1524	(A,57,37)	CKSSYB103K16
C 1209	(A,32,17)		CKSSYB104K10	C 1525	(A,66,36)	CKSSYB104K10
C 1210	(A,32,19)		CKSSYB471K50	C 1526	(A,62,40)	CKSSYB103K16
C 1211	(A,19,16)		CKSSYB103K16	C 1527	(A,63,35)	CKSSYB471K50
C 1212	(A,19,8)		CKSSYB104K10	C 1528	(A,65,36)	CKSSYB104K10
C 1213	(A,19,9)		CKSSYB104K10	C 1529	(A,60,38)	CKSSYB103K16
C 1301	(B,90,25)		CKSSYB104K10	C 1530	(A,59,39)	CKSSYB224K6R3
C 1302	(B,88,25)		CKSSYB104K10	C 1531	(A,57,42)	CKSSYB123K16
C 1351	(B,86,25)		CKSSYB104K10	C 1536	(A,76,20)	CKSSYB104K10
C 1352	(B,75,19)		CKSSYB104K10	C 1537	(A,55,43)	CKSSYB102K50
C 1353	(B,81,19)		CKSSYB104K10	C 1538	(A,53,43)	CKSSYB102K50
C 1354	(B,74,7)		CKSSYB104K10	C 1539	(A,57,36)	CKSSYB104K10
C 1355	(B,85,8)		CKSSYB104K10	C 1540	(A,61,38)	CKSSYB103K16
C 1356	(B,83,28)		CKSYB106K6R3	C 1560	(A,51,3)	CKSSYB104K10
C 1401	(B,72,31)		CKSSYB103K16	C 1577	(A,77,30)	CKSSYB104K10
C 1402	(B,49,33)		CKSSYB104K10	C 1601	(A,41,24)	CCSSCH101J50
C 1403	(B,81,27)		CKSQYB475K6R3	C 1602	(A,43,24)	CCSSCH101J50
C 1405	(B,48,8)		CKSSYB103K16	C 1603	(A,37,23)	CCSSCH680J50
C 1406	(B,25,15)		CKSSYB104K10	C 1604	(A,39,25)	CCSSCH680J50
C 1407	(B,74,27)		CKSQYB475K6R3	C 1608	(A,41,26)	CKSSYB103K16
C 1408	(B,47,27)		CKSSYB104K10	C 1609	(A,43,26)	CKSSYB103K16
C 1481	(B,72,5)		CKSSYB104K10	C 1610	(A,53,39)	CCSSCH101J50
C 1482	(B,72,7)		CKSSYB104K10	C 1611	(A,53,37)	CKSSYB562K25
C 1483	(B,67,5)		CKSSYB104K10	C 1612	(A,55,36)	CKSSYB224K6R3
C 1484	(B,63,5)		CKSSYB104K10	C 1613	(A,55,37)	CKSSYB224K6R3
C 1485	(B,56,5)		CKSSYB104K10	C 1614	(A,56,37)	CKSSYB333K16
C 1486	(B,53,5)		CKSSYB104K10	C 1615	(A,41,30)	CKSRYB105K10
C 1487	(B,51,5)		CKSSYB104K10	C 1616	(A,48,36)	CKSSYB104K10
C 1488	(B,49,5)		CKSSYB104K10	C 1617	(A,49,38)	CKSSYB104K10
C 1490	(B,68,19)		CKSSYB104K10	C 1618	(A,51,38)	CKSSYB104K10
C 1491	(B,77,27)		CKSQYB106K6R3	C 1619	(A,51,36)	CKSSYB104K10
C 1492	(B,55,19)		CKSSYB104K10	C 1620	(A,50,36)	CKSSYB104K10
C 1493	(B,52,19)		CKSSYB104K10	C 1621	(A,50,38)	CKSSYB104K10
C 1494	(B,65,19)		CKSSYB104K10	C 1622	(A,52,38)	CKSSYB104K10

Circuit Symbol and No.			Part No.
C 1623	(A,52,39)		CKSSYB104K10
C 1624	(A,43,27)		CKSSYB103K16
C 1625	(A,56,36)		CKSSYB104K10
C 1626	(A,41,31)		CKSRYB105K10
C 1627	(A,43,23)		CKSSYB104K10
C 1628	(A,54,36)		CKSSYB104K10
C 1629	(A,49,36)		CKSSYB104K10
C 1630	(A,38,30)		CKSQYB106K6R3
C 1671	(A,43,18)		CKSSYB104K10
C 1672	(A,43,19)		CKSSYB104K10
C 1673	(A,37,21)		CKSSYB104K10
C 1674	(A,39,21)		CKSSYB104K10
C 1675	(A,39,19)		CKSRYB105K10
C 1676	(A,37,19)		CKSRYB105K10
C 1677	(A,43,22)		CKSSYB104K10
C 1801	(A,74,52)		CKSSYB104K10
C 1802	(A,67,58)	10 µF	CCG1192
C 1803	(A,67,56)		CKSSYB104K10
C 1804	(A,69,58)	10 µF	CCG1192
C 1805	(A,69,56)		CKSSYB104K10
C 1808	(A,72,57)		CCSRCH182J50
C 1809	(A,75,57)		CCSRCH182J50
C 1810	(A,72,59)		CKSQYB475K6R3
C 1811	(A,74,59)		CKSQYB475K6R3
C 1901	(A,84,74)		CKSSYB102K50

E

Unit Number : CWX3595
Unit Name : Compound Unit(A)

Q 1299	Photo-taransistor	CPT231SCTD
S 1201	Spring Switch(12cm)	CSN1069
S 1202	Spring Switch(8cm)	CSN1069
S 1203	Spring Switch(DISC SENS)	CSN1069
S 1204	Spring Switch(DISC SENS)	CSN1070
S 1205	Spring Switch(8cm)	CSN1070
R 1298		RS1/16S0R0J
R 1299		RS1/16S0R0J

F


Unit Number : CWX3559
Unit Name : Compound Unit(B)

S 1206	Switch(CLAMP)	CSN1067

Miscellaneous Parts List

	Pickup Unit(Service)	CXX2118
M 1	Motor Unit(LOADING)	CXC4912
M 2	Motor(STEPPING)	CXM1364
M 3	Motor(SPINDLE)	CXM1362
	LCD	CWX3589
	TOUCH PANEL	CSX1114

2.3 PANEL FACILITIES

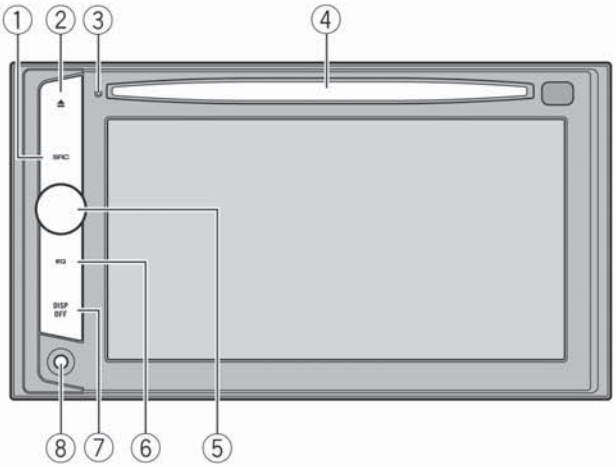

What's What

Head unit

① **SRC button**
This unit is turned on by selecting a source. Press to cycle through all the available sources.

② **⏏ (eject) button**
Press to eject a disc from this unit.

③ **RESET button**
Press to return to the factory settings (initial settings).

④ **Disc loading slot**
Insert a disc to play.

⑤ **VOLUME/MUTE button**
Rotate it to increase or decrease the volume.
Press to cut the sound.

⑥ **EQ button**
Press to select various equalizer curves.

⑦ **DISP OFF button**
Press to turn the information display on or off.


⑧ **AUX1 input jack (3.5 mm stereo/video jack)**
Use to connect an auxiliary device.


Optional remote control

The remote control CD-R55 is sold separately.
For details concerning operations, see the remote control manual. ▣

2.4 CONNECTION DIAGRAM

AVH-P4000DVD/XN/UC

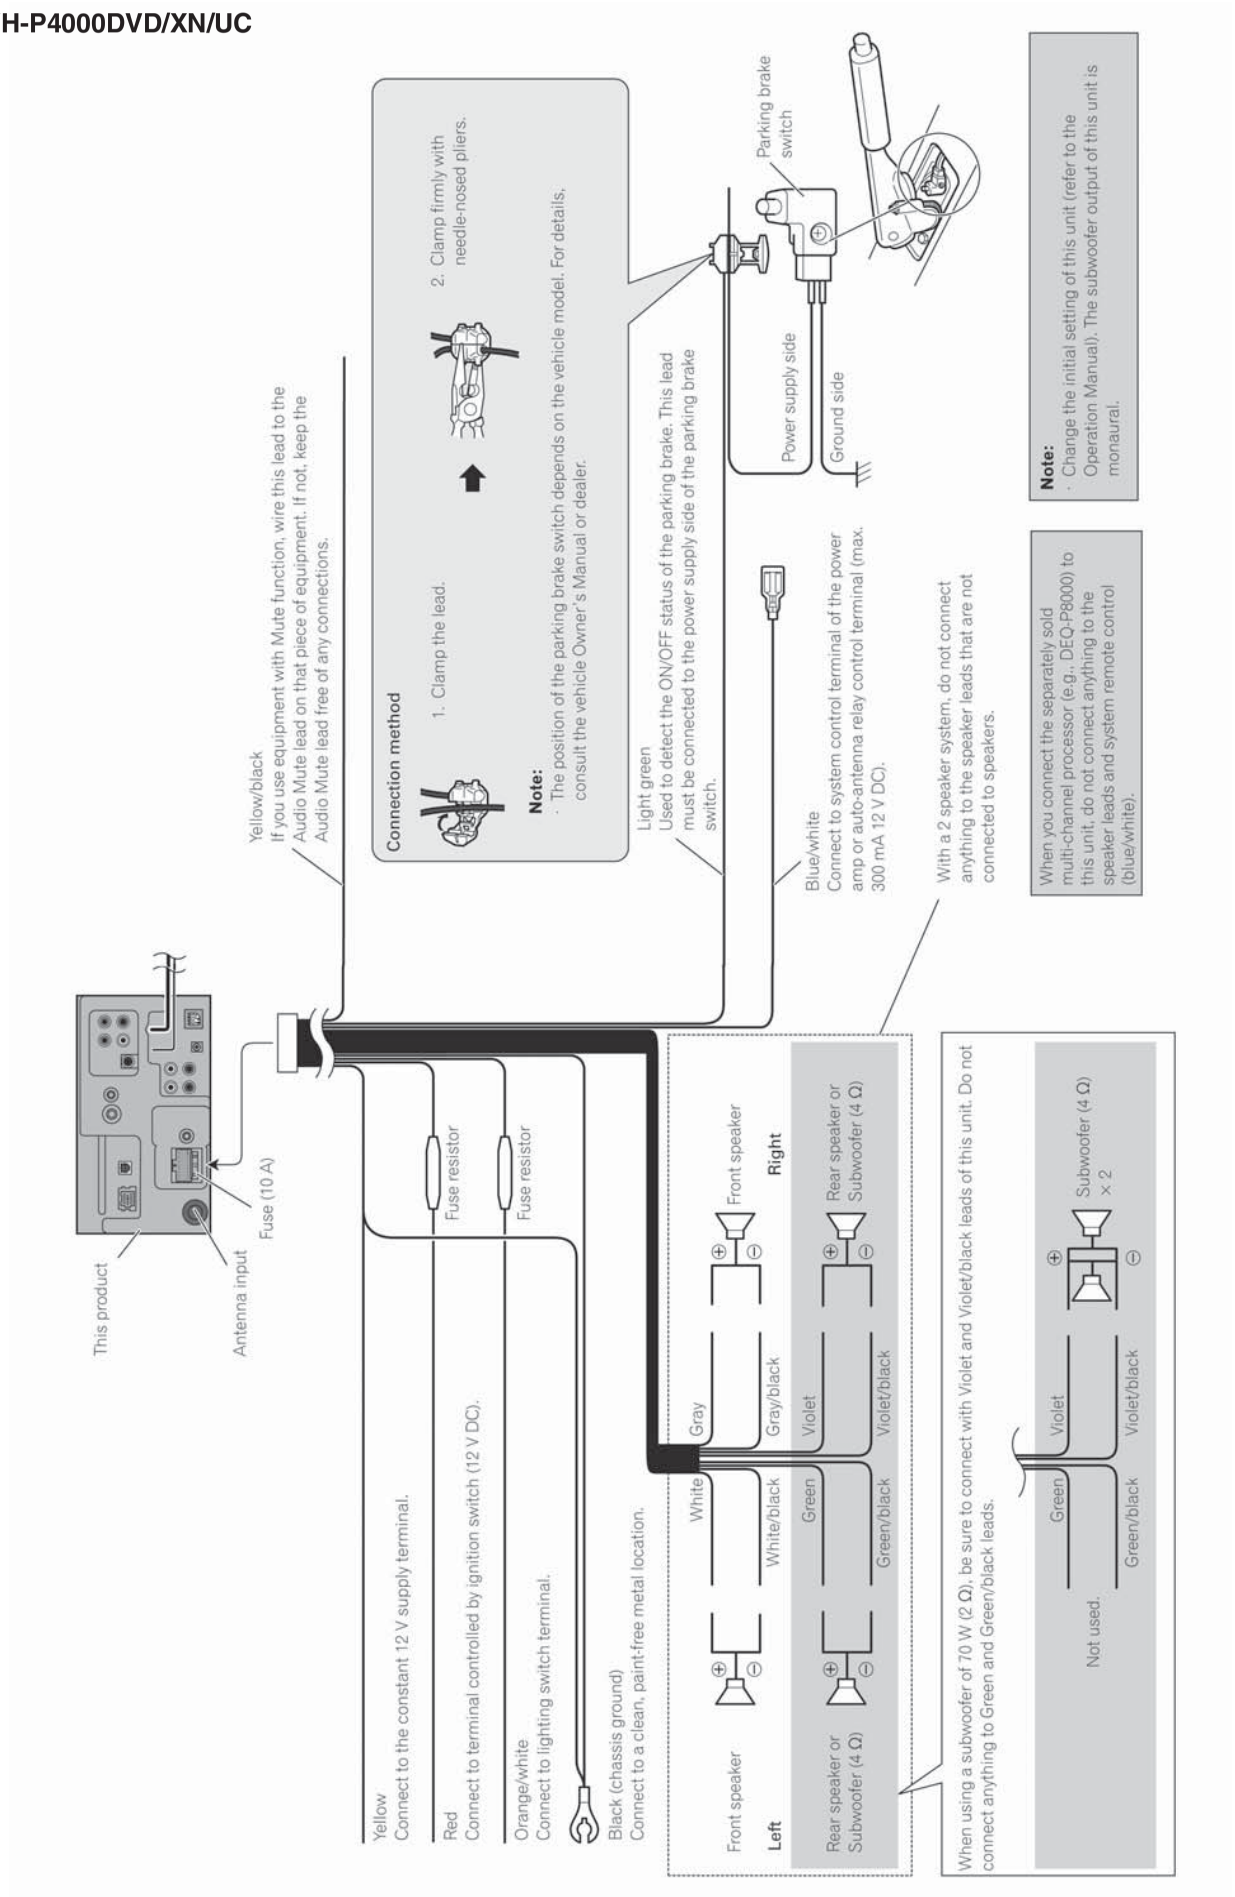

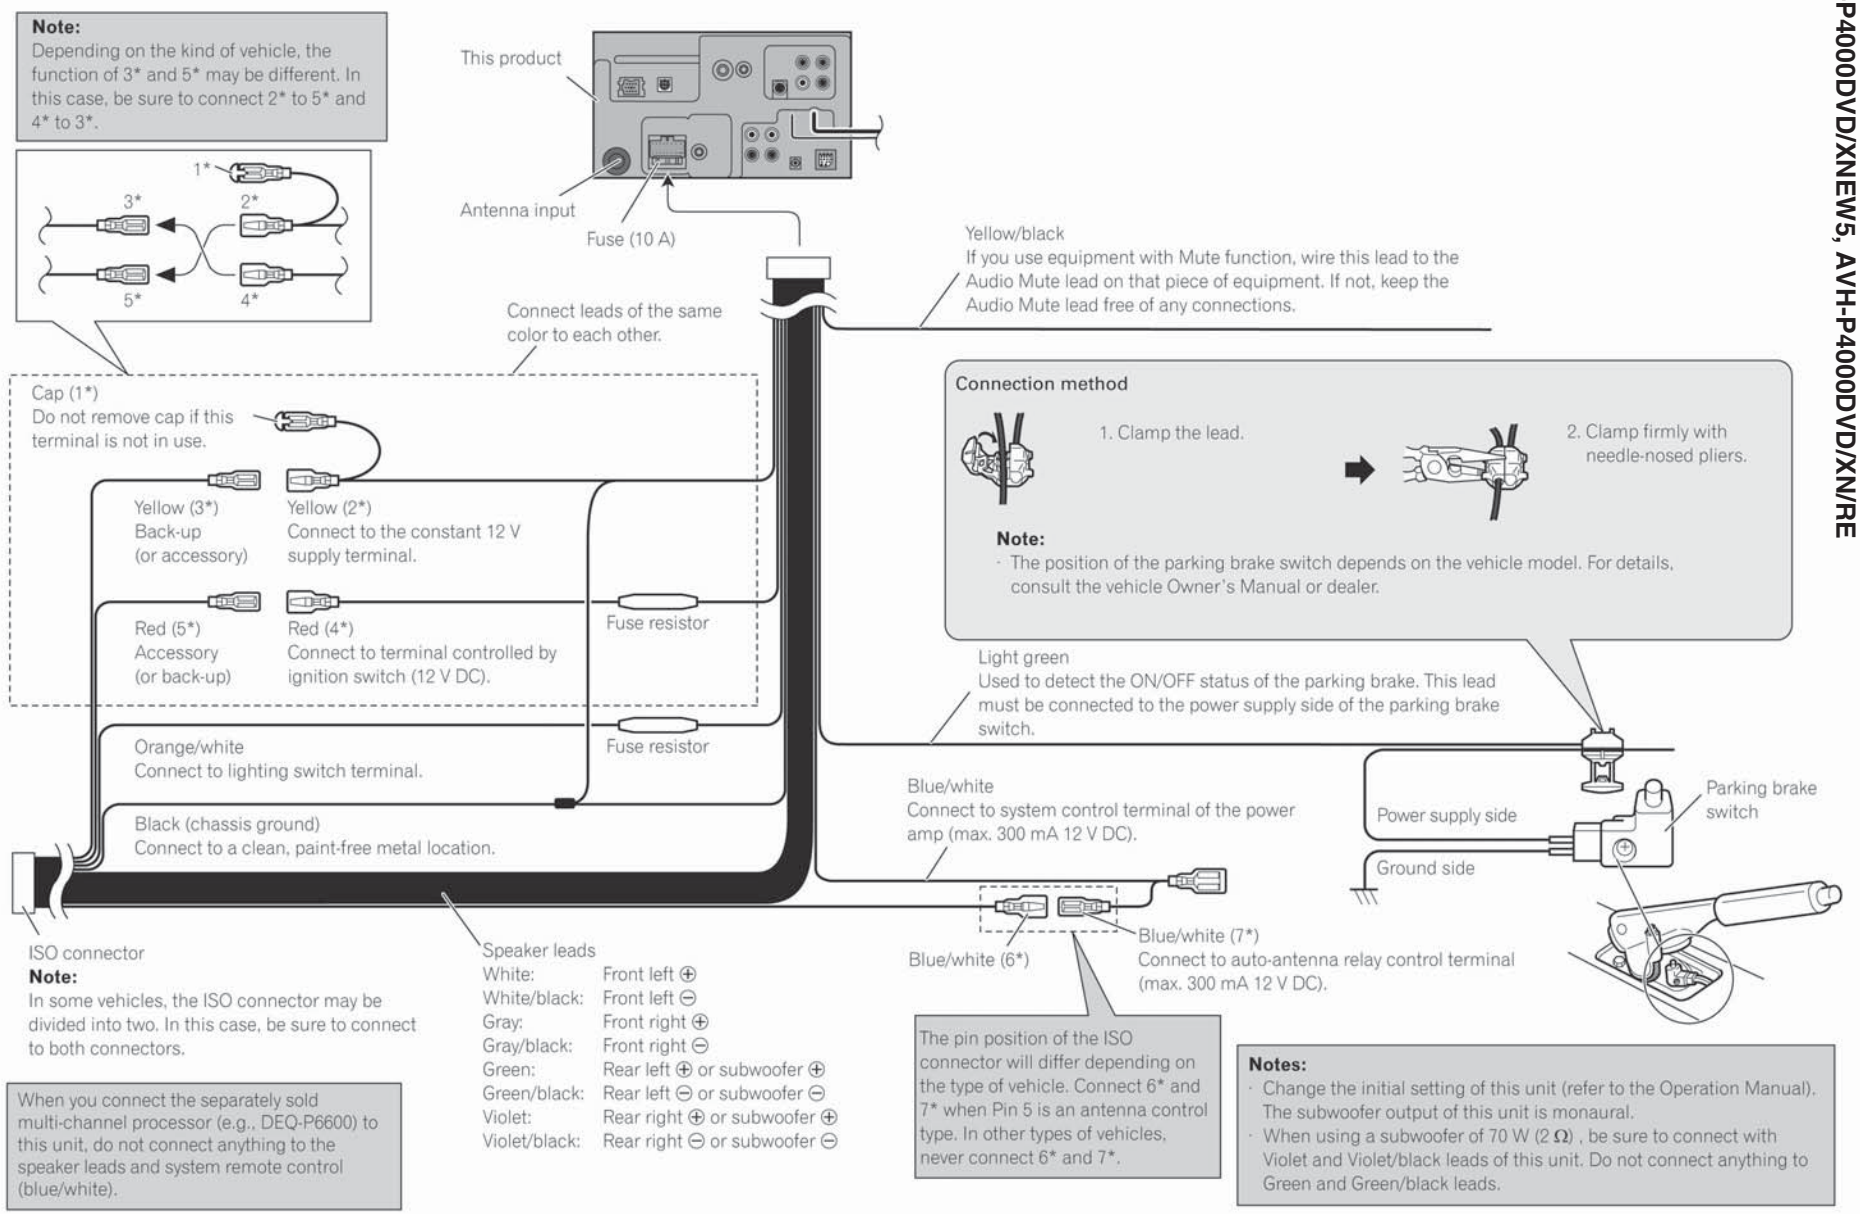
Note:
Depending on the kind of vehicle, the function of 3* and 5* may be different. In this case, be sure to connect 2* to 5* and 4* to 3*.
1*
2*
3*
4*
5*
This product
Antenna input
Fuse (10 A)
Yellow/black
If you use equipment with Mute function, wire this lead to the Audio Mute lead on that piece of equipment. If not, keep the Audio Mute lead free of any connections.
Connect leads of the same color to each other.
Cap (1*)
Do not remove cap if this terminal is not in use.
Yellow (3*)
Back-up
(or accessory)
Yellow (2*)
Connect to the constant 12 V supply terminal.
Red (5*)
Accessory
(or back-up)
Red (4*)
Connect to terminal controlled by ignition switch (12 V DC).
Fuse resistor
Fuse resistor
Orange/white
Connect to lighting switch terminal.
Black (chassis ground)
Connect to a clean, paint-free metal location.
Connection method
1. Clamp the lead.
2. Clamp firmly with needle-nosed pliers.
Note:
· The position of the parking brake switch depends on the vehicle model. For details, consult the vehicle Owner's Manual or dealer.
Light green
Used to detect the ON/OFF status of the parking brake. This lead must be connected to the power supply side of the parking brake switch.
Power supply side
Parking brake switch
Ground side
Blue/white
Connect to system control terminal of the power amp (max. 300 mA 12 V DC).
Blue/white (6*)
Blue/white (7*)
Connect to auto-antenna relay control terminal (max. 300 mA 12 V DC).
ISO connector
Note:
In some vehicles, the ISO connector may be divided into two. In this case, be sure to connect to both connectors.
Speaker leads
White: Front left ⊕
White/black: Front left ⊖
Gray: Front right ⊕
Gray/black: Front right ⊖
Green: Rear left ⊕ or subwoofer ⊕
Green/black: Rear left ⊖ or subwoofer ⊖
Violet: Rear right ⊕ or subwoofer ⊕
Violet/black: Rear right ⊖ or subwoofer ⊖
When you connect the separately sold multi-channel processor (e.g., DEQ-P6600) to this unit, do not connect anything to the speaker leads and system remote control (blue/white).
The pin position of the ISO connector will differ depending on the type of vehicle. Connect 6* and 7* when Pin 5 is an antenna control type. In other types of vehicles, never connect 6* and 7*.
Notes:
· Change the initial setting of this unit (refer to the Operation Manual). The subwoofer output of this unit is monaural.
· When using a subwoofer of 70 W (2 Ω) , be sure to connect with Violet and Violet/black leads of this unit. Do not connect anything to Green and Green/black leads.