

An exploded view diagram of the front panel assembly. The main component shown is the front panel (255) with various ports and labels like "POWER", "VOLUME", "MUTE", "STOP", "SKIP", "RECALL", "FADER", "TUNING", "MEMORY", "PUSH OPEN", "LOCK", "EJECT", "PAUSE", "PLAY", "STOP", "SKIP", "RECALL", "FADER", "TUNING", "MEMORY". Other parts include a small rectangular plate (256), a screw (260), two long thin strips (259 x2), a tray-like component (254), a rectangular frame (252), a circular control knob (RC1), a bundle of cables (DC1), and another bundle of cables (DC2).

This exploded view diagram illustrates the assembly of the PA1 unit. The main component, the PA1 unit (204), is shown with various parts being attached to it. The components and their assembly points are as follows:

- 242**: A circular cap or cover that fits onto the front of the unit.
- 215** and **214**: Two small rectangular components that fit into the top of the unit.
- 216**: A small rectangular component that fits into the top of the unit.
- 220**: A curved bracket that fits around the top of the unit.
- 206**: A large rectangular component that fits into the front of the unit.
- 222**: A vertical rectangular component that fits into the bottom of the unit.
- 218**: A small rectangular component that fits into the top of the unit.
- 203**: A long, thin component that fits into the top of the unit.
- 225**: A long, thin component that fits into the top of the unit.
- 223**: A long, thin component that fits into the top of the unit.
- 224**: A small rectangular component that fits into the top of the unit.
- 233**: A small rectangular component that fits into the top of the unit.
- 219**: A small rectangular component that fits into the bottom of the unit.

created date:2011-09-29

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <200>

	DC1	QAM1335-001	DC CORD		1	K0,K2,E6,K1,K4,M1
	DC1	QAM1399-001	DC CORD		1	K3
	DC2	QAM1333-001	DC CORD		1	E2,E1,E4,E3,E5,E7,M3,M2,E8,E9
	DC2	QAM1376-001	DC CORD		1	C0
△	DME1	X92-6740-00	CD MECHANISM ASSY	HCS-1100W	1	
	F901	QMFZ064-100-J1	CARTRIDGE FUSE	10A	1	
	FC1	WJT0277-001A-E	E-CARD WIRE		1	
	PA1	GE20288-002A	F.PANEL ASSY		1	K0
	PA1	GE20288-001A	F.PANEL ASSY		1	K2
	PA1	GE20288-004A	F.PANEL ASSY		1	E2,E1,E4
	PA1	GE20288-015A	F.PANEL ASSY		1	E3
	PA1	GE20288-006A	F.PANEL ASSY		1	E5
	PA1	GE20290-009A	F.PANEL ASSY		1	E7
	PA1	GE20290-004A	F.PANEL ASSY		1	E6
	PA1	GE20288-011A	F.PANEL ASSY		1	M3,M2
	PA1	GE20288-008A	F.PANEL ASSY		1	E8,E9
	PA1	GE20288-003A	F.PANEL ASSY		1	K1
	PA1	GE20289-002A	F.PANEL ASSY		1	K4
	PA1	GE20288-010A	F.PANEL ASSY		1	M1
	PA1	GE20289-005A	F.PANEL ASSY		1	K3
	RC1	QAL1303-001	REMOCON UNIT	RC-405	1	K0,K2,E7,K1,C0,K4,M1
A		GE40377-002A	SCREW		3	
B		QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
C		QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	3	
D		QYSPSF2006ZA	TAP SCREW	M2 x 6mm	1	
E		QYSPSF2008ZA	TAP SCREW	M2 x 8mm	4	
F		GE40377-005A	SPECIAL SCREW		2	
G		QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	J	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	K	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	3	
202		GE10283-001A	TOP CHASSIS		1	
203		GE10309-001A	LIGHT GUIDE	USB	1	
204		GE10311-001A	FRONT PANEL		1	C0
205		GE10313-001A	REAR COVER		1	
206		GE10314-026A-M	FINDER (USB)		1	C0
209		GE20296-003A	BOTTOM COVER		1	
210		GE34045-001A	LOCK LEVER		1	
211		GE34046-001A	RELEASE LEVER		1	
213		GE34074-001A	F.CHASSIS ASSY		1	K0,K2,M3,M2,E8,E9,K1,C0,K4,M1,K3
	213	GE34519-002A	F.CHASSIS ASSY		1	E2,E1,E4,E3,E5,E7,E6
	214	GE34291-001A	SRC BUTTON		1	
	215	GE34292-001A	BACK BUTTON		1	
	216	GE34293-001A	SEARCH BTN		1	
	218	GE34496-002A	ACC BTN(RANDOM)		1	
	218	GE34496-001A	ACC BTN (iPod)		1	K0,E2,E1,E4,E3,E5,E7,E6,M3,M2,K1,C0,M1
	219	GE34497-001A	EJECT BUTTON		1	K2,E8,E9,K4,K3
	220	GE34498-003A	RIM COVER		1	C0
	222	GE34502-001A	USB DOOR COVER		1	
	223	GE34504-001A	CONDUCT. RUBBER		1	
	224	GE34505-001A	DETACH BUTTON		1	
	225	GE34517-001A	PRESET BTN		1	
	231	GE40504-001A	SPRING		1	
	232	GE40505-001A	SPRING		1	
	233	GE40505-002A	SPRING		1	
	239	GE40536-001A	SCREW SET		1	K0,K2,K1,K4,M1,K3
	242	GE40557-001A	VOL KNOB RUBBER		1	
	242	GE40562-002A	VOL KNOB RUBBER		1	K0,K2,E2,E1,E4,E5,E7,E6,K1
	252	GE20300-001A	TRIM PLATE		1	E3,M3,M2,E8,E9,C0,K4,M1,K3
	252	GE20291-001A	TRIM PLATE		1	K0,K2,E2,E1,E4,E5,M3,M2,E8,E9,K1,C0,K4,M1
	252	GE20291-002A	TRIM PLATE		1	E3,E7,E6
	254	GE34332-002A	HARD CASE ASSY		1	K3
	255	GE34826-001A	M.SLEEVE ASSY		1	M1
	256	GE40521-001A	CARRYING CASE		1	
	259	GE40578-001A	HOOK		2	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	260	QYSPSF2008MA	TAP SCREW	M2 x 8mm	1	K0,K2,K1,K4,M1,K3
-		GET0743-001A	INST BOOK	ENG FRE SPA	1	K0,K2,K1,K4,K3
-		GET0744-001A	INST BOOK	ENG GER RUS UKR	1	E2,E3,E5,E8,E9
-		GET0744-004A	INST BOOK	FRE DUT ITA SPA POR	1	E2,E1,E3,E8,E9


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
-		GET0744-002A	INST BOOK	ENG GER	1	E1
-		GET0744-003A	INST BOOK	ENG RUS UKR	1	E4,E7,E6
-		GET0745-001A	INST BOOK	ENG	1	M3,M2,M1
-		GET0745-002A	INST BOOK	ARA	1	M3,M2,M1
-		GET0813-001A	INST BOOK	POR	1	C0
-		GE34568-001A	INNER CARTON		1	K0
-		GE34566-001A	INNER CARTON		1	K2
-		GE34602-001A	INNER CARTON		1	E2
-		GE34600-001A	INNER CARTON		1	E1
-		GE34604-001A	INNER CARTON		1	E4
-		GE34596-001A	INNER CARTON		1	E3
-		GE34608-001A	INNER CARTON		1	E5
-		GE34612-001A	INNER CARTON		1	E7
-		GE34606-001A	INNER CARTON		1	E6
-		GE34634-001A	INNER CARTON		1	M3
-		GE34636-001A	INNER CARTON		1	M2
-		GE34594-001A	INNER CARTON		1	E8
-		GE34592-001A	INNER CARTON		1	E9
-		GE34574-001A	INNER CARTON		1	K1
-		GE35025-001A	INNER CARTON		1	C0
-		GE34572-001A	INNER CARTON		1	K4
-		GE34590-001A	INNER CARTON		1	M1
-		GE34580-001A	INNER CARTON		1	K3

EXPLODED VIEW (CD MECHANISM)

Block No.130

HCS-1100W

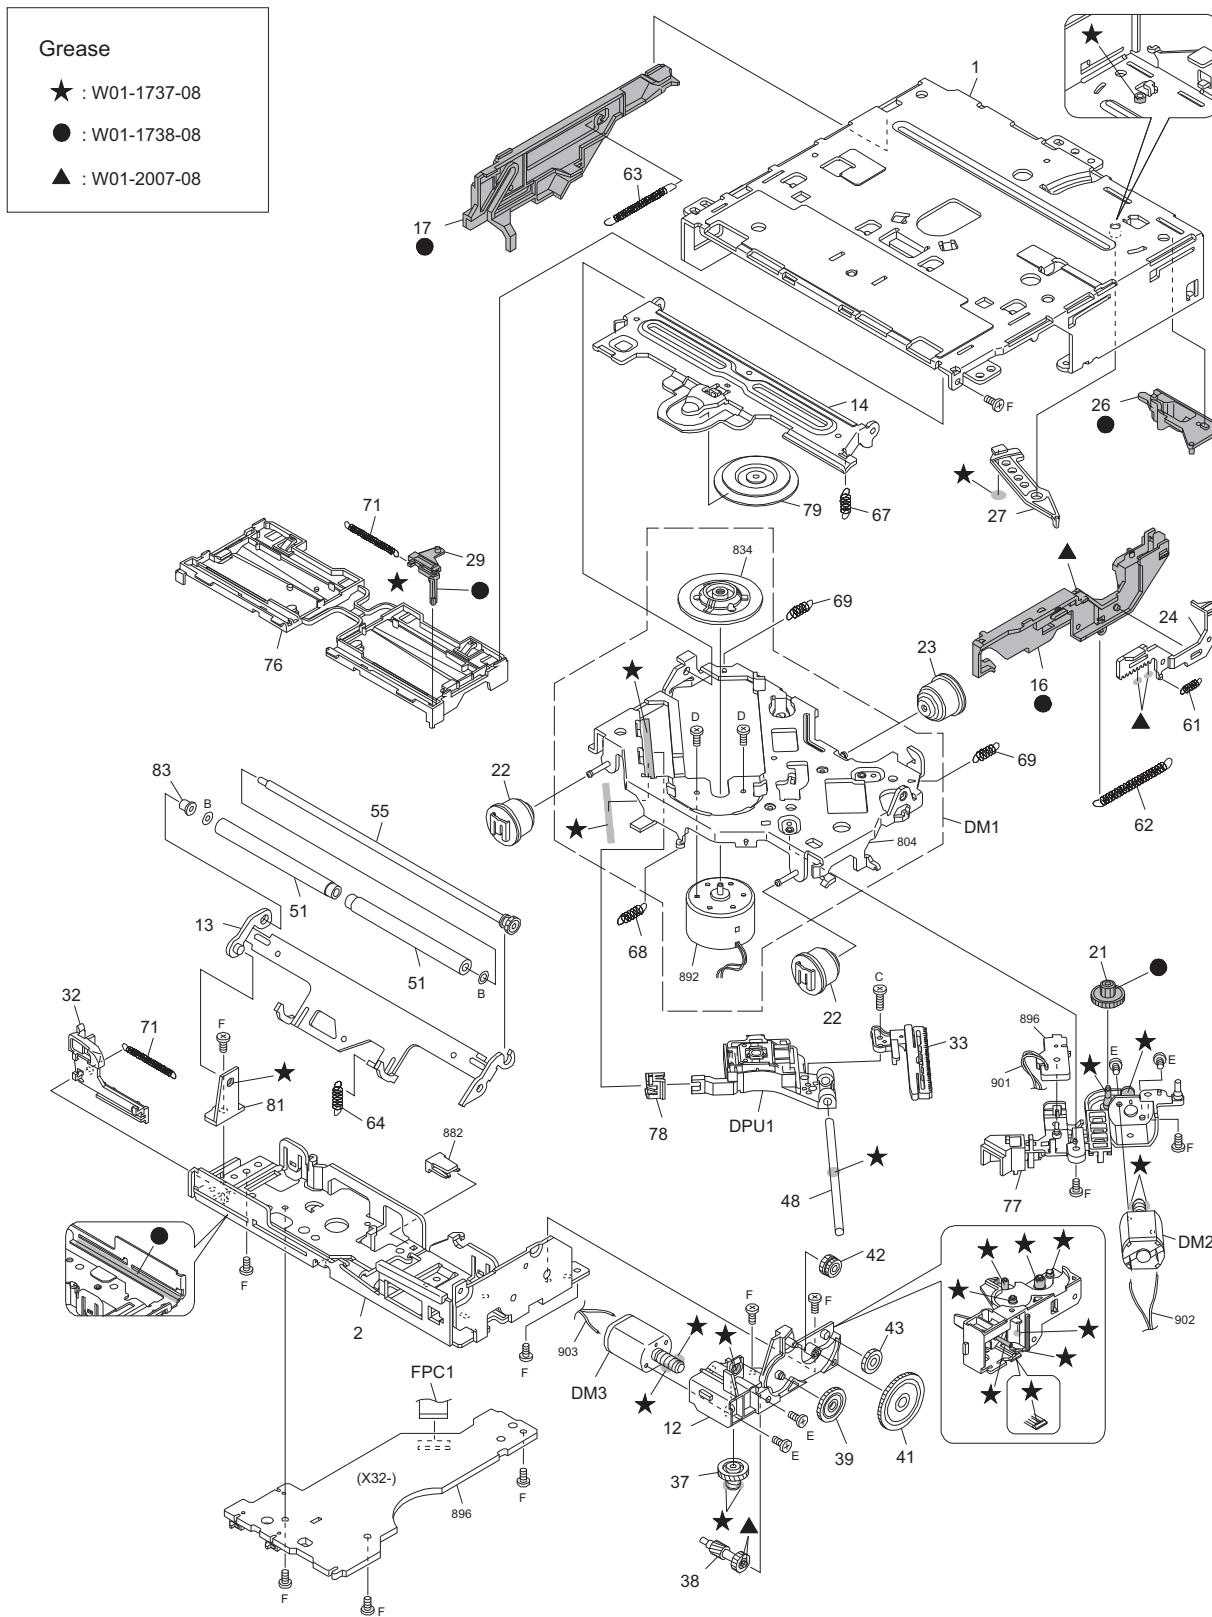

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM) <130>

DM1	X94-2150-00	SPINDLE MOTOR ASSY	1	
DM2	X94-2160-00	FEED MOTOR ASSY	1	
DM3	X94-2170-00	LOADING MOTOR ASSY	1	
DPU1	QAL1226-001	PICK UP	1	
FPC1	QAL0817-003	FPC	1	
B	LV45449-001A	WASHER	2	
C	QYSPSGT1745ZA	TAP SCREW	1	M1.7 x 4.5mm
D	LV45568-001A	MINI SCREW	2	
E	QYSPSPT2025MA	SCREW	4	M2 x 2.5mm
F	VKZ4539-054	MINI SCREW	11	
1	LV11685-503A	TOP FRAME	1	
2	LV11686-501A	BOTTOM FRAME	1	
12	LV11688-501A	LOADING BASE	1	
13	LV11690-501A	ROLLER ARM	1	
14	LV22825-502A	HC CLAMPER BASE	1	
16	LV22826-502A	LOAD CAM	1	
17	LV22827-501A	FL SLIDER(L)	1	
21	LV36815-501A	F WHEEL GEAR	1	
22	LV36904-001A	DAMPER	2	
23	LV37061-001A	DAMPER	1	
24	LV38951-501A	TRIGGER RACK	1	
26	LV38952-501A	FL SLIDER(B)	1	
27	LV38953-501A	TRIGGER PLATE	1	
29	LV38957-501A	SW SLIDER(R)	1	
32	LV39496-502A	SW ACTUATOR(2)	1	
33	LV38960-501A	FEED RACK	1	
37	LV38964-501A	D.WHEEL GEAR	1	
38	LV38965-501A	ACT GEAR(1)	1	
39	LV38966-501A	ACT GEAR(2)	1	
41	LV38967-501A	ACT GEAR(3)	1	
42	LV38968-501A	ROLLER ACT GEAR	1	
43	LV38969-501A	DRIVE GEAR	1	
48	LV44555-001A	MAIN SHAFT	1	
51	LV45424-001A	HC ROLLER	2	
55	X94-2190-00	ROLLER SHAFT ASSY	1	
61	LV45415-501A	TRIGGER SPRING	1	
62	LV45416-501A	LOAD CAM SPRING	1	
63	LV45417-501A	FL SLIDER SPRING	1	
64	LV45418-501A	R.ARM SPRING	1	
67	LV45421-501A	HC CL SPRING	1	
68	LV45422-501A	SUS SPRING(F)	1	
69	LV45423-501A	SUS SPRING(B)	2	
71	LV45505-502A	SW ACT SPRING	2	
76	LV11689-501A	DISC GUIDE	1	
77	LV22828-501A	FEED BRACKET	1	
78	LV36813-501A	SUB GUIDE CAP	1	
79	LV36819-502A	CLAMPER	1	
81	LV38954-501A	R.ARM GUIDE	1	
83	LV45648-501A	RA COLLAR (L) 2	1	

SWITCH UNIT (X16-721x-xx) <X16>

IC601	BU9755KV-X	IC(MOS)	1	
IC602	KSM-2003TN5B	IR SENSOR	1	
				K0,K2,E7,M3,M2,K1,C0,K4,M1
Q621	LTA014EUB-X	DIGI TRANSISTOR	1	
				K0,K2,E7,M3,M2,K1,C0,K4,M1
D601	RKZ5.1B2KG-X	SB DIODE	1	
				K0,K2,E7,M3,M2,K1,C0,K4,M1
D602	RKZ5.1B2KG-X	SB DIODE	1	
D603	RKZ5.1B2KG-X	SB DIODE	1	
D604	RKZ5.1B2KG-X	SB DIODE	1	
D605	RKZ5.1B2KG-X	SB DIODE	1	
D606	RKZ5.1B2KG-X	SB DIODE	1	
D607	RKZ5.1B2KG-X	SB DIODE	1	
D608	RKZ5.1B2KG-X	SB DIODE	1	
D611	RKZ5.1B2KG-X	SB DIODE	1	
D612	RKZ5.1B2KG-X	SB DIODE	1	
D641	RKZ5.1B2KG-X	SB DIODE	1	
D642	RKZ5.1B2KG-X	SB DIODE	1	
D651	CL-195SR-CD-X	LED	1	
D652	SML-D12V8W-X	LED	1	
				K0,K2,E1,E4,E3,E5,M2,E9,K1
D652	SML-D12P8W-X	LED	1	
D652	KLB-16B-X	LED	1	
D653	SML-D12V8W-X	LED	1	
				E2,E7,E6,M3,M1
				E8,C0,K4,K3
				K0,K2,E1,E4,E3,E5,M2,E9,K1
D653	SML-D12P8W-X	LED	1	
D653	KLB-16B-X	LED	1	
D654	SML-D12V8W-X	LED	1	
				E2,E7,E6,M3,M1
				E8,C0,K4,K3
				K0,K2,E1,E4,E3,E5,M2,E9,K1
D654	SML-D12P8W-X	LED	1	
				E2,E7,E6,M3,M1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D654	KLB-16B-X	LED		1	E8,C0,K4,K3
	D655	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D656	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D659	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	D659	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D659	KLB-16B-X	LED		1	E8,C0,K4,K3
	D661	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D662	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D663	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D663	KLB-16B-X	LED		1	E8,K3
	D664	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D664	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D664	KLB-16B-X	LED		1	E8,K3
	D665	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D666	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D667	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D667	KLB-16B-X	LED		1	E8,K3
	D668	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D669	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D671	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D671	KLB-16B-X	LED		1	E8,K3
	D672	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D673	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D674	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D674	KLB-16B-X	LED		1	E8,K3
	D676	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	D676	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D676	KLB-16B-X	LED		1	E8,C0,K4,K3
	D677	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	D677	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D677	KLB-16B-X	LED		1	E8,C0,K4,K3
	D678	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	D678	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D678	KLB-16B-X	LED		1	E8,C0,K4,K3
	D679	SML-D12V8W-X	LED		1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	D679	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D679	KLB-16B-X	LED		1	E8,K3
	D682	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D683	SML-D12P8W-X	LED		1	E2,E7,E6,M3,M1
	D691	RKZ2.4BKG-X	Z DIODE		1	E2,E1,E4,E3,E5,E6,E9,C0
	D692	RKZ2.4BKG-X	Z DIODE		1	E2,E1,E4,E3,E5,E6,E9,C0
	C601	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C602	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C611	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	1	
	C612	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C613	NCB31HK-471X	C CAPACITOR	470pF 50V K	1	
	C614	NCB31HK-471X	C CAPACITOR	470pF 50V K	1	
	C615	NCB31HK-471X	C CAPACITOR	470pF 50V K	1	
	C616	NCB31HK-471X	C CAPACITOR	470pF 50V K	1	
	C617	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C621	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C641	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	K0,K2,E7,M3,M2,K1,C0,K4,M1
	C642	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C643	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C644	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C645	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	C646	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C647	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	C648	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	C649	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	C650	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	C651	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R601	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R602	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R603	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R604	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R607	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R611	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K0,K2,E7,M3,M2,E8,K1,K4,M1,K3
	R612	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R614	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R615	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R616	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R617	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R622	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R623	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,K2,E7,M3,M2,K1,C0,K4,M1
	R623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C0
	R643	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R644	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E2,E7,E6,M3,M1
	R645	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E9,K1,M1,E8,C0,K4,K3
	R651	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R653	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R655	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	
	R655	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R656	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R656	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	R657	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	
	R657	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	E2,E7,E6,M3,M1
	R657	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R657	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E8,K3
	R660	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R661	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	C0,K4
	R661	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	R661	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R661	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E2,E7,E6,M3,M1
	R663	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R663	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	
	R665	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E2,E7,E6,M3,M1
	R665	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	R667	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	
	R667	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	E2,E7,E6,M3,M1
	R667	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	
	R669	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E8,K3
	R669	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	R669	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	
	R672	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E2,E7,E6,M3,M1
						E8,K3
						K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R672	NRS181J-391X	MG RESISTOR	390Ω 1/8W J	1	E2,E7,E6,M3,M1
	R672	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	E8,K3
	R674	NRS181J-511X	MG RESISTOR	510Ω 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	R674	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E2,E7,E6,M3,M1
	R674	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	E8,C0,K4,K3
	R675	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1
	R675	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	E2,E7,E6,M3,M1
	R675	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	E8,C0,K4,K3
	R676	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,M1,K3
	R676	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	C0,K4
	R684	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	R684	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	E8,K3
	R685	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	K0,K2,E1,E4,E3,E5,M2,E9,K1,C0,K4
	R685	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	E8,K3
	R688	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R692	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R693	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E2,E7,E6,M3,M1
	R694	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R695	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E2,E7,E6,M3,M1
	R696	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R698	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E1,E4,E3,E5,M2,E8,E9,K1,C0,K4,K3
	R699	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E2,E7,E6,M3,M1
	L601	NQR0007-002X	FERRITE BEADS		1	
	L602	NQR0007-002X	FERRITE BEADS		1	
	L603	NQR0007-002X	FERRITE BEADS		1	
	L611	NQR0502-001X	FERRITE BEADS		1	
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1	
	CN603	QNZ1057-001	USB CONNECTOR		1	
	EN601	QSW1288-001	ROTARY ENCODER		1	
	FL601	3-BT-267N	FL DISPLAY		1	
	J602	QNS0308-001	3.5 JACK		1	
	LF601	NQR0682-001X	CHOKE COIL		1	
	S611	NSW0246-001X	TACT SWITCH		1	
	S612	NSW0246-001X	TACT SWITCH		1	
	S613	NSW0246-001X	TACT SWITCH		1	
	S614	NSW0246-001X	TACT SWITCH		1	
	S615	NSW0246-001X	TACT SWITCH		1	
CD PLAYER UNIT (X32-6530-00) IN CD MECHA <X32>						
	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	B1	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	
ELECTRIC UNIT (X34-7xxx-xx) <X34>						
△	IC1	TEF6614TV1S4-X	IC(ANALOGUE)		1	K0,K2,K1,C0,K4,M1,K3
△	IC1	TEF6614TV1S3-X	IC(ANALOGUE)		1	
	IC80	MFI341S2313-X	IC(MICROPROCESSOR)		1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9
	IC161	TDA7718B-X	IC(ANALOGUE)		1	K2,E8,E9,K4,K3
△	IC301	TB2926CHQ	IC(ANALOGUE)		1	
△	IC501	LV8281VR-X	IC(MOS)		1	
	IC530	XC6213B332NG-X	IC(ANALOGUE)		1	
	IC531	XC6213B152NG-X	IC(ANALOGUE)		1	
	IC532	XC6213B152NG-X	IC(ANALOGUE)		1	
△	IC540	JCV8022	IC(MOS)		1	
△	IC701	JCV8019-8E4	IC(MCU)		1	
						K0,E2,E1,E4,E3,E5,E7,E6,M3,M2,K1,C0,M1
△	IC701	JCV8019-8E5	IC(MCU)		1	K2,E8,E9,K4,K3
	IC702	XC6120N282NG-X	IC(MOS)		1	
	IC771	BR24T02FJ-W-X	IC(ROM)		1	
△	IC901	LV5680P	IC(ANALOGUE)		1	
	IC931	XC6213B332NG-X	IC(ANALOGUE)		1	
	IC981	BD9673EFJ-X	IC(MOS)		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q321	IMX9-W	PAIR TRANSISTOR		1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	Q341	IMX9-W	PAIR TRANSISTOR		1	E5,E7,C0,K3
	Q540	2SA2188/F/-X	TRANSISTOR		1	
	Q701	LTA014YUB-X	DIGI TRANSISTOR		1	
	Q780	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q782	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q951	2SA812A/5-6/-X	TRANSISTOR		1	
	D9	NAF0029-001X	DIODE		1	
	D80	RKZ6.2B2KG-X	Z DIODE		1	K0,E2,E1,E4,E3,E5,E7,E6,M3,M2,K1,M1
	D100	RKZ6.2B2KG-X	Z DIODE		1	
	D101	RKZ6.2B2KG-X	Z DIODE		1	
	D110	RKZ6.2B2KG-X	Z DIODE		1	
	D111	RKZ6.2B2KG-X	Z DIODE		1	
	D321	BAW56-TP-X	SI DIODE		1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	D341	BAW56-TP-X	SI DIODE		1	E5,E7,C0,K3
	D502	GS1J-LTP-X	SI DIODE		1	
	D540	RKS801KF-X	SI DIODE		1	
	D704	RKZ6.2B2KG-X	Z DIODE		1	
	D780	BAW56-TP-X	SI DIODE		1	
	D781	BAW56-TP-X	SI DIODE		1	
	D782	RKS801KF-X	SI DIODE		1	
	D783	BAW56-TP-X	SI DIODE		1	
	D851	MBRX130-TP-X	SB DIODE		1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,M1
	D852	MBRX130-TP-X	SB DIODE		1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,M1
△	D891	BAW56-TP-X	SI DIODE		1	
	D901	1N5401-BPC04	SI DIODE		1	
	D902	MBRX130-TP-X	SB DIODE		1	
	D941	MBRX130-TP-X	SB DIODE		1	
	D942	MBRX130-TP-X	SB DIODE		1	
	D970	RKZ6.8B2KG-X	Z DIODE		1	
	D971	RKZ6.8B2KG-X	Z DIODE		1	
	D981	DB22306-X	SB DIODE		1	
	D992	RKZ6.2B2KG-X	Z DIODE		1	K0,E2,E1,E4,E3,E5,E7,E6,M3,M2,K1,M1
	C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	C2	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J	1	M1
	C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C4	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C6	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	C6	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J	1	M1
	C7	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C10	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C13	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C14	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C20	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C21	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C22	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C23	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C24	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C26	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C27	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	C28	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	K0,K2,K1,C0,K4,K3
	C80	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	K2,E8,E9,K4,K3
	C101	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C112	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K2,E8,E9,K4,K3
	C160	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C162	QERF1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C166	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C168	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C169	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K0,K2,E2,E1,E4,E3,E5,E7 ,E6,M3,M2,E8,E9,K1,K4, M1,K3
	C170	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C172	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C174	QERF1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C178	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C305	NCB21CK-224X-A	C CAPACITOR	0.22uF 16V K	1	
	C306	NCB21CK-224X-A	C CAPACITOR	0.22uF 16V K	1	
	C307	NCB21CK-224X-A	C CAPACITOR	0.22uF 16V K	1	
	C308	NCB21CK-224X-A	C CAPACITOR	0.22uF 16V K	1	
	C309	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C311	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C312	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	K0,K2,E2,E1,E4,E3,E5,E7 ,M3,M2,E8,E9,K1,C0,K4, M1,K3
	C313	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C314	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C320	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C321	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K0,K2,E2,E1,E4,E3,E5,E7 ,M3,M2,E8,E9,K1,C0,K4, M1,K3
	C330	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C331	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K0,K2,E2,E1,E4,E3,E5,E7 ,M3,M2,E8,E9,K1,C0,K4, M1,K3
	C340	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C341	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C350	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C351	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C368	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C501	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C504	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C505	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1	
	C506	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C507	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C513	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C514	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C530	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C531	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C532	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C533	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C534	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C535	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C540	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C541	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C543	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C544	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C545	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C546	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C547	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C548	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C549	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C550	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C552	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C553	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C554	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	E5,E7,C0,K3
	C555	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C556	NCB31CK-683X	C CAPACITOR	0.068uF 16V K	1	
	C557	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C558	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C559	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C561	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C562	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C565	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C566	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C567	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C568	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C569	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C571	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C572	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C576	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C582	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C583	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C592	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C593	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C701	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	
	C702	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	
	C703	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C704	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C705	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C706	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C708	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C711	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C712	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C713	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C714	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C716	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C717	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C718	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C722	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C723	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C724	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C725	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C729	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C731	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C733	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C788	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C794	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	
	C891	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C901	QE20934-338	E CAPACITOR	3300uF	1	
	C902	NCB31EK-474X	C CAPACITOR	0.47uF 25V K	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C905	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C907	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C908	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	E2,E1,E4,E3,E5,E7,E6,M
	C912	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	3,M2,E8,E9,M1
	C913	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C916	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K2,E8,E9,K4,K3
	C917	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K2,E8,E9,K4,K3
	C931	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C932	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C933	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C941	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C954	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C963	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C981	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C983	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C984	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C985	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C987	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C989	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C990	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C991	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C993	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C994	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C995	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C996	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C997	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7
	R1	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	,E6,M3,M2,E8,E9,K1,C0,
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	K4,K3
	R2	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	M1
	R3	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	,E6,M3,M2,E8,E9,K1,C0,
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	K4,K3
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	M1
	R8	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,M1
	R10	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	M1
	R12	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R82	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K2,E8,E9,K4,K3
	R100	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R102	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R110	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R112	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,E2,E1,E4,E3,E5,E7,E6,M3,M2,K1,C0,M1
	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R162	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R163	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R165	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R167	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1	
	R168	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R304	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R310	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R320	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R321	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R322	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R331	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R332	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R333	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K0,K2,E2,E1,E4,E3,M3,M2,E8,E9,K1,K4,M1
	R340	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	E5,E7,C0,K3
	R341	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	E5,E7,C0,K3
	R342	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	E5,E7,C0,K3
	R347	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E5,E7,C0,K3
	R349	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E5,E7,C0,K3
	R350	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	E5,E7,C0,K3
	R351	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	E5,E7,C0,K3
	R352	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	E5,E7,C0,K3
	R357	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R358	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K0,K2,E2,E1,E4,E3,E5,E7,M3,M2,E8,E9,K1,C0,K4,M1,K3
	R361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R362	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R363	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R400	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R401	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R403	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R405	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	
	R406	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R408	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R409	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R410	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R411	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R412	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R413	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R414	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R415	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R416	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R417	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R418	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R419	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R420	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R422	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R423	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R424	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R427	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R428	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R429	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R430	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R431	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R432	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R433	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R434	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R435	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R436	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R437	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R438	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R439	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R440	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R441	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R442	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R443	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R444	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R446	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R447	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R448	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,K2,E2,E1,E4,E3,E5,E7, ,M3,M2,E8,E9,K1,C0,K4, M1,K3
	R450	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R451	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R452	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R454	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R455	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R456	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R457	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R458	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R459	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R460	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R461	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R462	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R463	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R464	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R465	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R467	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R469	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R470	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R471	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R472	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R474	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R477	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R478	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R479	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R481	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R482	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R485	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R488	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R490	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R495	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R496	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R497	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R498	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K0,E2,E1,E4,E3,E5,E7,E6 ,M3,M2,K1,M1
	R501	NRSA63J-114X	MG RESISTOR	110kΩ 1/16W J	1	
	R502	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R503	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R504	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1	
	R505	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R506	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	1	
	R507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	1	
	R508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R510	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R511	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	1	
	R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R516	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R530	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R534	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R540	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R545	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	1	
	R547	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R548	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R549	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R550	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R553	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R554	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R555	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R557	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R558	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R559	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R561	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R562	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R563	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R564	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R565	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R566	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R567	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R568	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R569	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R570	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R571	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R572	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R573	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	1	
	R574	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R575	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R576	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R577	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R595	NRSA63J-202X	MG RESISTOR	2kΩ 1/16W J	1	
	R596	NRSA63J-202X	MG RESISTOR	2kΩ 1/16W J	1	
	R701	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R704	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R706	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R709	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R712	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R713	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R718	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R721	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R722	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R723	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R725	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R726	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R727	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R730	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R731	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R735	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R736	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R737	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R738	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R739	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R741	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R744	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R746	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R747	NRS181J-243X	MG RESISTOR	24kΩ 1/8W J	1	
	R749	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R750	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R751	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R753	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R754	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R757	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R758	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R759	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R763	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	

K2,E8,E9,K4,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R764	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9
	R764	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	M1
	R765	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	K2,E8,E9
	R765	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	E6,K1,C0
	R765	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K4
	R765	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	K3
	R766	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K0,K2,K1,C0,K4,K3
	R766	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9
	R766	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	M1
	R767	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K0,E2,E1,E4,E3,E5,E7,M3,M2,M1
	R767	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K2,E8,E9
	R767	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	E6,K1,C0
	R767	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	K4
	R767	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	K3
	R768	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R770	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R771	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R772	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R773	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R775	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R776	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R778	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R779	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R780	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R781	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R782	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R783	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R785	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	1	K0,K2,E7,M3,M2,K1,C0,K4,M1
	R785	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	E2,E1,E4,E3,E5,E6,E8,E9,K3
	R786	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R789	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R790	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R793	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R794	NRSA63J-300X	MG RESISTOR	30Ω 1/16W J	1	
	R795	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R796	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,M1
	R891	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R892	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	
	R893	NRS181J-123X	MG RESISTOR	12kΩ 1/8W J	1	
	R894	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1	
	R902	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	1	
	R906	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R907	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	
	R908	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R909	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R941	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R951	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R965	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R970	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R981	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R982	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	
	R983	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R986	NRSA63D-114X	MG RESISTOR	110kΩ 1/16W D	1	
	L1	NQL093K-R47X	PEAKING COIL	0.47uH K	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	L1	NQL093K-1R0X	PEAKING COIL	1uH K	1	M1
	L2	NQL093K-1R8X	PEAKING COIL	1.8uH K	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	L2	NQL093K-3R3X	PEAKING COIL	3.3uH K	1	M1
	L3	NQL093K-R27X	PEAKING COIL	0.27uH K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-202U	K0	KDC-252U	K2	KDC-3054UG	E2	KDC-3054UR	E1
KDC-3054URY	E4	KDC-316UR	E3	KDC-3254URY	E5	KDC-3354UGY	E7
KDC-3454UQ	E6	KDC-3554UGM	M3	KDC-3554URM	M2	KDC-4054UB	E8
KDC-4054UR	E9	KDC-MP152U	K1	KDC-MP2052U	C0	KDC-MP252U	K4
KDC-U3553	M1	KMR-350U	K3				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L4	QQR1872-001	RF COIL		1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	QQL244J-561Z	COIL	560uH J	1	
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-4R7X	PEAKING COIL	4.7uH K	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	L9	NQL093K-R47X	PEAKING COIL	0.47uH K	1	
	L10	NQL103J-10NX	COIL	10nH J	1	K0,K2,K1,C0,K4,K3
	L11	NQR0251-002X	FERRITE BEADS		1	
	L12	NQR0251-002X	FERRITE BEADS		1	
	L161	NQL553J-27NX	COIL	27nH J	1	K2,E8,E9,K4,K3
	L531	NQR0251-002X	FERRITE BEADS		1	
	L561	NQR0251-002X	FERRITE BEADS		1	
	L562	NQR0251-002X	FERRITE BEADS		1	
	L563	NQR0502-001X	FERRITE BEADS		1	
	L564	NQR0502-001X	FERRITE BEADS		1	
	L565	NQR0502-001X	FERRITE BEADS		1	
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	
	L703	NQR0502-001X	FERRITE BEADS		1	
	L901	QQR1882-001	CHOKE COIL		1	
	L981	QQL92AK-220Z	COIL	22uH K	1	K0,K2,E2,E1,E4,E3,E5,E7,E6,M3,M2,E8,E9,K1,C0,K4,K3
	L981	QQLA1AM-220	COIL	22uH M	1	M1
	L982	NQLH25M-4R7X	COIL	4.7uH M	1	
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0358-001	ANT TERMINAL		1	
	J321	QNN0874-001	PIN JACK		1	K0,K2,E2,E1,E4,E3,M3,M2,E8,E9,K1,K4,M1
	J321	QNN0868-001	PIN JACK		1	E5,E7,C0,K3
	S701	QSW0648-001Z	TACT SWITCH		1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X540	QAX0929-001Z	C RESONATOR		1	
	X701	QAX0966-001Z	CRYSTAL		1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	