


EXPLODED VIEW / PARTS LIST


Main section

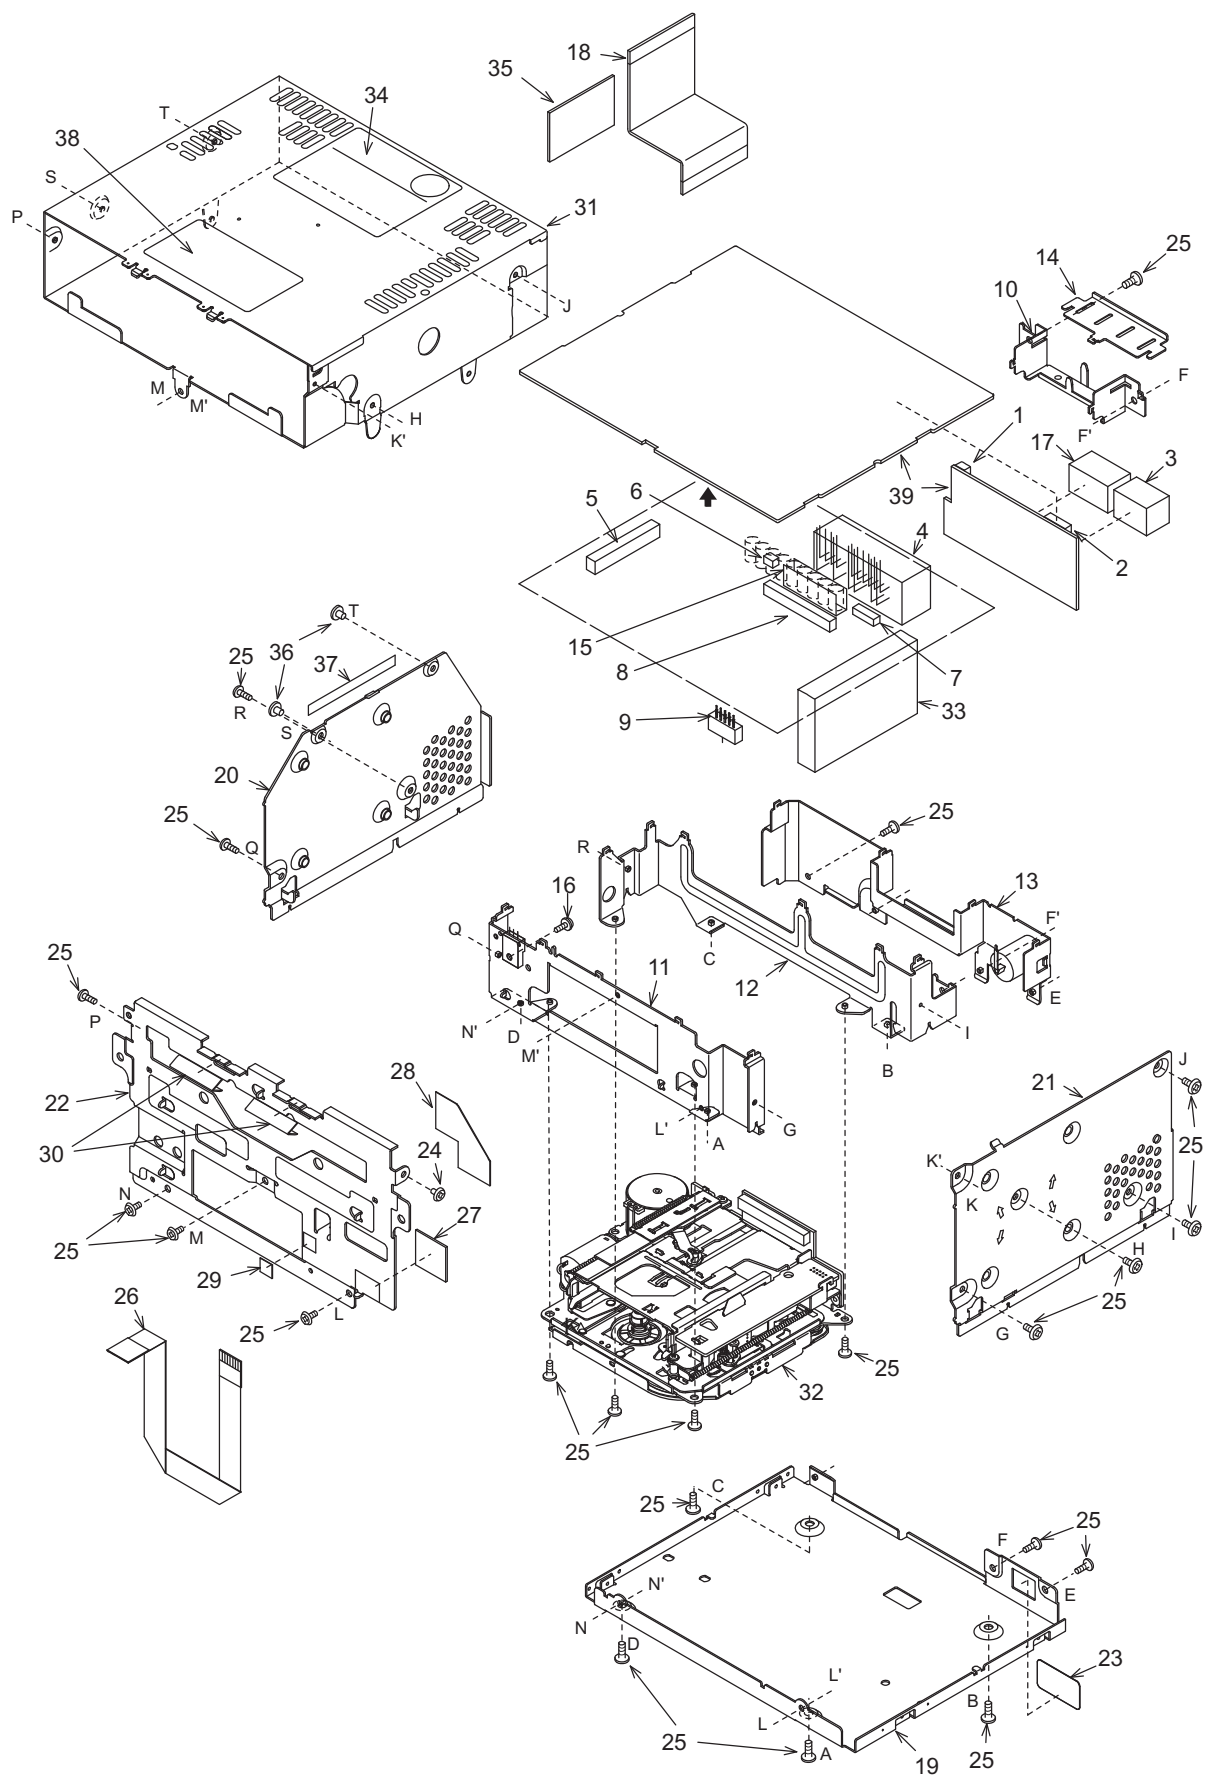

NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0898-06	OUTLET SOCKET(6P)	1
2	074-0898-18	OUTLET SOCKET(18P)	1
3	074-1087-12	OUTLET SOCKET(A16)	1
4	074-1141-00	OUTLET SOCKET(NS10+06)	1
5	074-1192-20	OUTLET SOCKET(20P)	1
6	076-0368-06	PLUG(6P)	1
7	076-0368-18	PLUG(18P)	1
8	076-0509-20	PLUG(20P)	1
9	074-0834-10	OUTLET SOCKET(TO-ES)	1
10	331-2025-21	CONN-HOLDER A	1
11	331-3236-22	MECH-BRKT(F)	1
12	331-3237-21	MECH-BRKT	1
13	331-3239-10	REAR PLATE	1
14	331-3257-20	CONN-HOLDER B	1
15	347-6595-01	INSULATOR	1
16	716-1494-00	IT SCREW(M2.6x6)	1
17	074-1013-30	OUTLET SOCKET(A12MW)	1
18	816-4021-50	FLAT WIRE(CD MECH)	1
19	311-1834-23	LOWER CASE	1
20	331-3258-22	SIDE CASE(L)	1
21	331-3259-22	SIDE CASE(R)	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	331-3519-01	ES-PLATE	1
23	347-6623-01	SPACER	1
24	714-2004-81	MACHINE SCREW(M2x4)	1
25	714-2605-81	MACHINE SCREW(M2.6x5)	22
26	816-2611-00	FLAT WIRE	1
27	347-6816-01	FILM	1
28	347-6817-01	FILM	1
29	347-6909-01	FILM	1
30	347-6910-00	PROTECTOR	2
31	929-0195-87	CD-CHANG-MODULE	1
32	930-0794-80	TAPE-MECH	1
33	880-1921T 880-1921O	TUNER PACK(for PN2764HA) TUNER PACK(for PN2764HB)	1
34	286-6666-50 286-6666-05	SETPLATE(for PN2764HA) SETPLATE(for PN2764HB)	1
35	335-6788-01	MOLDED PART	1
36	714-2603-80	MACHINE SCREW(M2.6x3)	2
37	285-1967-01 285-1967-00	GUIDE LABEL(for PN2764HA) GUIDE LABEL(for PN2764HB)	1
38	285-1986-00 285-1968-00	GUIDE LABEL(for PN2764HA) GUIDE LABEL(for PN2764HB)	1
39	-----	MAIN PWB	1


CD changer module section

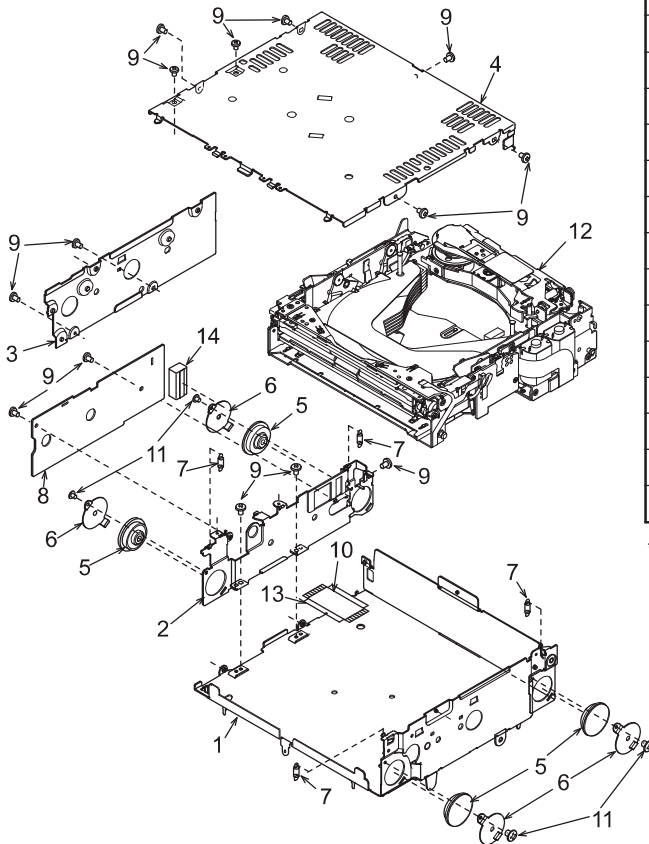

NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-25	LOWER CASE	1
2	331-3896-22	PWB-HOLDER	1
3	305-0334-21	SIDE CASE	1
4	310-1741-27	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	4
8	-----	CD PWB	1
9	716-1716-02	SCREW(M2 x 3)	14
10	HBS-561-100	FPC	1
11	716-3450-00	SCREW(M1.7 x 2)	4
12	-----	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8748-00	GASKET	1

* No.12: Refer to the next page.

CD changer mechanism section
(PARTS LIST : Page 12)

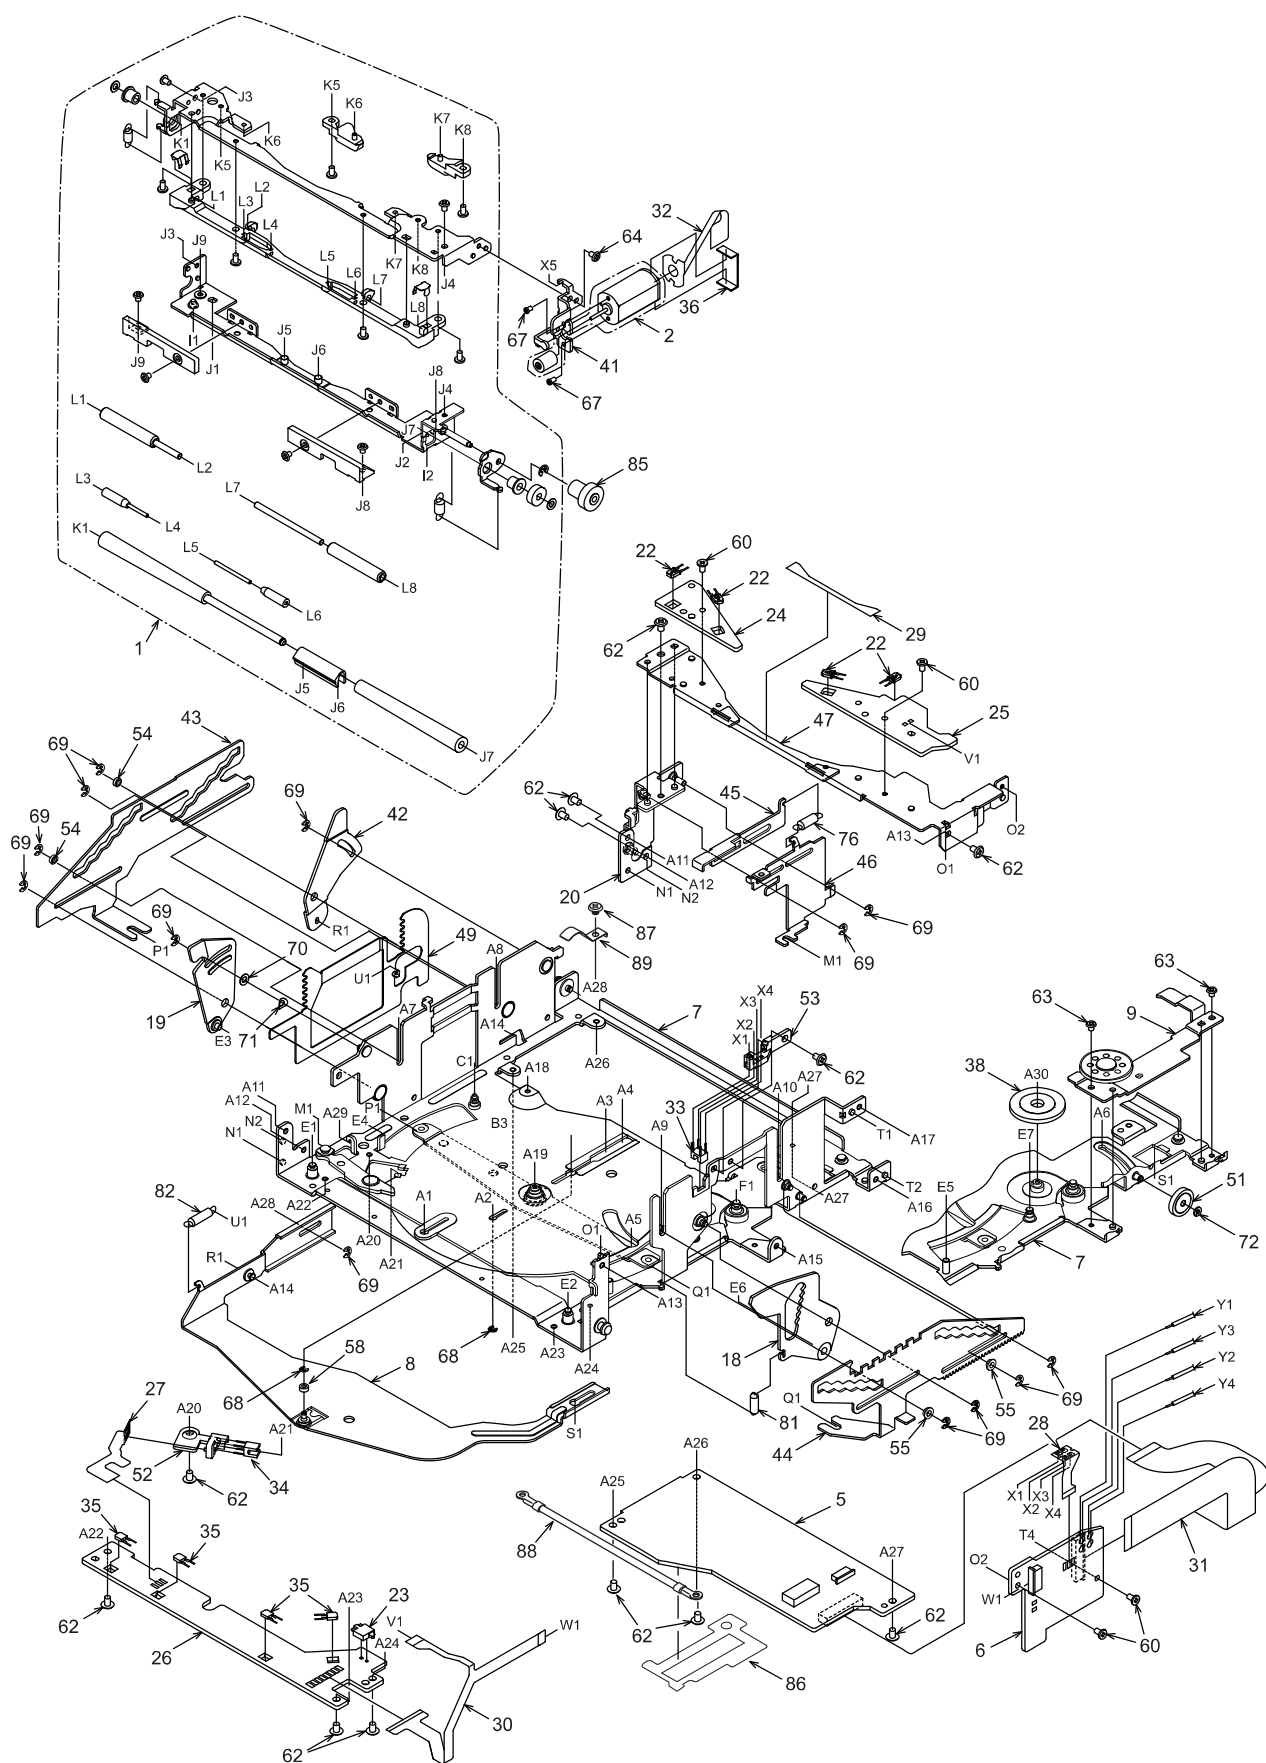


CD changer mechanism section

(EXPLODED VIEW : Page 10 and 11)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-562-100	LOADING UNIT	1	48	620-1083-20	FPC-PLATE	1
2	SMA-186-100	LOADING MOTOR ASSY	1	49	620-1090-20	GAP PLATE	1
3	HBS-530-100	MOTOR PLATE SUB ASSY	1	50	620-1568-21	RATTLE PLATE-F	2
4	HBS-531-104	DRIVE UNIT	1	51	621-0640-20	V-GEAR-G	1
5	-----	DSP PWB	1	52	621-0641-21	PI-HOLDER-M	1
6	-----	DRIVER PWB	1	53	621-0656-21	PI-HOLDER-V	1
7	966-1751-22	CHASSIS ASSY	1	54	622-1622-20	SL-G-ROLLER	2
8	966-0600-23	LOCK-P-RE-ASSY	1	55	622-1623-00	SL-G-ROLLER-R	2
9	966-0601-21	M-GEAR-P-ASSY	1	56	622-1648-23	DU-STP-SLEEVE	1
10	966-0602-26	DR-LINK-ASSY	1	57	622-1650-23	COV-PLATE PIN-B	2
11	966-0603-21	MODE-P-ASSY	1	58	622-1651-00	LOCK-RE-ROLLER	1
12	966-0604-26	LOCK-PF-ASSY	1	59	622-1652-00	LOCK-PF-ROLLER	1
13	966-0605-20	SHIFT-P-ASSY	1	60	716-1866-50	SCREW(M1.7 x 3)	4
14	966-0606-23	HLC-PLATE-ASSY	1	61	716-1873-00	SCREW(M2 x 1.6)	1
15	966-1788-22	COV-PLATE-ASSY	1	62	716-3449-50	SCREW(M2 x 3)	15
16	HBS-535-100	TOP-PLATE-ASSY	1	63	716-3450-00	SCREW(M1.7 x 2)	4
17	966-0652-24	DR-BASE-P-ASSY	1	64	716-3451-01	SCREW(M1.7 x 2.5)	4
18	966-0615-21	LOCK-L-RF-ASSY	1	65	716-3459-01	SCREW(M1.7 x 5)	1
19	966-0616-20	LOCK-L-LF-ASSY	1	66	716-3466-53	SCREW(M2 x 6)	1
20	966-0618-21	EJECT-B-ASSY	1	67	738-1422-1B	PRECISION SCREW	2
21	966-1742-20	DISC-HOL-ASSY	1	68	743-1200-10	E-RING	2
22	001-7042-00	DIODE (GL4800)	4	69	743-1500-10	E-RING	13
23	013-7414-50	DETECTOR SWITCH	1	70	746-0624-00	WASHER	1
24	-----	LED-L-PWB	1	71	746-0712-23	WASHER	1
25	-----	LED-R-PWB	1	72	746-0761-00	WASHER	1
26	-----	SENSOR PWB	1	73	750-3478-01	TOP-P-SP-L	2
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1	74	750-3479-01	TOP-P-SP-R	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1	75	750-3480-01	DR-LOCK-SP	1
29	039-2011-01	LED-FPC	1	76	750-3483-00	EJECT-A-SPRING	1
30	039-2012-00	SENSOR-FPC	1	77	750-3484-01	DR-BASE-SPRING	1
31	039-2013-04	MOS-FPC	1	78	750-3485-01	TENSION-SP-L	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1	79	750-3486-01	LO-TENSION-SP	1
33	051-5806-01	IC (GPIS93)	1	80	750-3489-01	DRIVE-P-SPRING	1
34	051-5806-02	IC (GPIS95)	1	81	750-3496-00	GAP-P-SPRING R	1
35	060-0252-01	PHOTO-TR	4	82	750-3497-00	GAP-P-SPRING L	1
36	347-6657-01	LO-COVER SHEET	1	83	750-6711-01	DU-STP-SPRING	1
37	620-1041-26	GEAR PLATE	1	84	750-6712-01	DR-LOCK-SP-B	1
38	620-1042-20	M-GEAR-H	1	85	621-0651-22	LOAD GEAR-A	1
39	620-1056-22	HLR-PLATE-L	1	86	347-6974-22	FPC COVER	1
40	620-1580-20	HLR-PLATE-R	1	87	716-1850-01	SCREW	1
41	620-1576-20	LO-MOTOR-PLT	1	88	854-4348-01	EXTENSION LEAD	1
42	620-1066-20	LOCK LINK-LR	1	89	620-1604-20	DR-PLATE-SCREW	1
43	620-1067-21	SLIDE PLATE-L	1				
44	620-1068-22	SLIDE PLATE-R	1				
45	620-1071-21	EJECT ARM	1				
46	620-1072-20	EJECT PLATE	1				
47	620-1577-20	FRONT PLATE	1				

* No.4: Refer to the next page.

Drive unit section

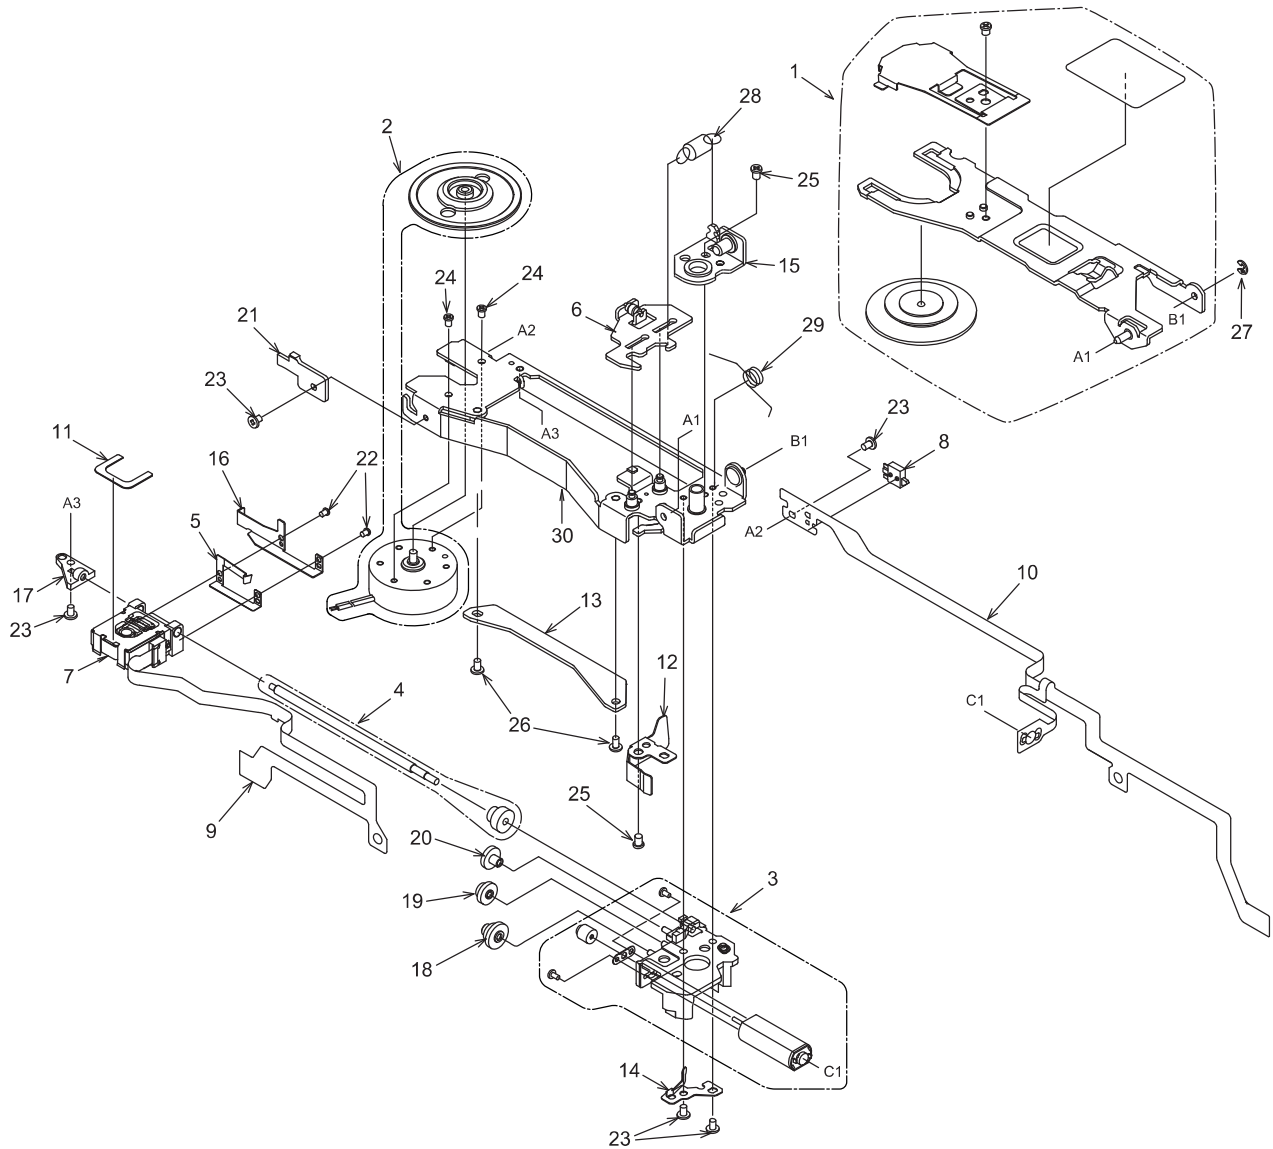

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1
2	SMA-193-101	SPINDLE MOTOR ASSY	1
3	SMA-191-100	SLED MOTOR ASSY	1
4	HBS-515-103	LS-ASSY	1
5	620-1587-83	SH-SP-PLT	1
6	HBS-542-101	D-SHIFT-P-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-21	PUSH PLATE	1
13	620-1080-22	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	966-0650-20	SPRING PLT ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	620-1730-81	SCREW-HOL-PLT	1
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3511-01	SCREW(M1.4 x 3)	2
23	716-3470-01	SCREW(M1.7 x 3)	5
24	738-1720-1H	PRECISION SCREW	2
25	738-2025-1H	PRECISION SCREW	2
26	716-3474-01	SCREW(M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0649-02	DRIVE PLT-ASSY	1

This exploded perspective view illustrates the assembly of a mechanical device. The components are numbered as follows:

- 1**: Main base plate.
- 2**: Upper housing or cover.
- 3**: Lever arm.
- 4**: Small bracket or pin.
- 5**: Small bracket or pin.
- 6**: Long thin plate.
- 7**: Small bracket or pin.
- 8**: Small bracket or pin.
- 9**: Wheel or pulley.
- 10**: Wheel or pulley.
- 11**: Bracket with spring.
- 11-1**: Spring component.
- 12**: Large base plate with multiple mounting points.
- 12-1** through **12-6**: Various mounting points or features on the base plate.
- 13**: Small bracket or pin.
- 14**: Small bracket or pin.
- 15**: Long thin plate.
- 16**: Small bracket or pin.
- 17**: Cylindrical component.
- 18**: Cylindrical component.
- 19**: Small bracket or pin.
- 20**: Lever arm.
- 21**: Lever arm.
- 22**: Bracket or housing.
- 23**: Small bracket or pin.
- 24**: Small bracket or pin.
- 25**: Wheel or pulley.
- 26**: Small bracket or pin.
- 27**: Small bracket or pin.
- 28**: Small bracket or pin.
- 29**: Small bracket or pin.
- 30**: Small bracket or pin.
- 31**: Small bracket or pin.
- 32**: Small bracket or pin.
- 33**: Small bracket or pin.
- 34**: Small bracket or pin.
- 35**: Small bracket or pin.
- 36**: Small bracket or pin.
- 37**: Small bracket or pin.
- 38**: Small bracket or pin.
- 39**: Small bracket or pin.
- 40**: Small bracket or pin.
- 41**: Small bracket or pin.
- 42**: Small bracket or pin.
- 43**: Small bracket or pin.
- 44**: Small bracket or pin.
- 45**: Small bracket or pin.
- 46**: Spring component.
- 47**: Spring component.
- 48**: Small bracket or pin.
- 49**: Spring component.
- 50**: Small bracket or pin.
- 51**: Cylindrical component.
- 52**: Cylindrical component.
- 53**: Cylindrical component.
- 54**: Small bracket or pin.
- 55**: Small bracket or pin.
- 56**: Small bracket or pin.

Dashed lines indicate the assembly sequence and alignment of the parts. The assembly includes a main base plate (1) with various mounting points (12-1 to 12-6). A lever arm (3) is connected to a wheel (25) via a pulley system (20, 21, 22). A spring (46) is used to maintain tension on a component (19). The assembly is secured with numerous screws (39) and pins (40, 41, 42, 43, 44, 45, 48, 49).

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-04	FF/REW-P ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-20	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-20	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM P-ASSY	1
12-2	099-9926-01	BOTTOM FPC (WITHOUT COMPONENT)	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	-----	SIDE PWB	1
16	-----	REAR PWB	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-01	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0093-07	PACK GUIDE	1
23	610-0342-01	HEAD P-ROLLER	1
24	610-0343-00	GUIDE A-ROLLER	1
25	611-0091-03	FLYWHEEL	2

NO.	PART NO.	DESCRIPTION	Q'TY
26	613-0662-00	IDLER GEAR	2
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-20	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-06	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-03	SCREW(M2x2.5)	13
40	716-1676-50	PWB SCREW(M2.6x6)	2
41	716-0833-10	SCREW(M2x5.6)	2
42	746-0624-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-2947-04	EJECT P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER P-SPRING	1
50	074-0898-10	OUTLET SOCKET(10P)	1
51	802-4909-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLUE)	1
53	816-2349-00	WIRE(WHITE)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-1012-20	OUTLET SOCKET(20P)	1
56	076-0368-10	PLUG(10P)	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1921T	TUNER PACK (for PN2764H-A)	C316	187-1073-37	16V 100uF	C468	042-1548-52	10V 220uF
	880-1921O	TUNER PACK (for PN2764H-B)	C317	187-1073-37	16V 100uF	C469	042-1548-52	10V 220uF
C101	166-1511-50	150pF CH	C318	168-2222-55	2200pF K	C470	042-1548-52	10V 220uF
C120	166-1201-50	12pF CH	C319	168-1042-78	16V 0.1uF	C471	042-1548-52	10V 220uF
C121	178-2242-78	0.22uF	C321	168-2222-55	2200pF K	C501	168-2232-55	0.022uF K
C122	188-4763-18	6.3V 47uF	C322	168-2222-55	2200pF K	C502	168-1042-78	16V 0.1uF
C123	166-1007-50	10pF CH	C323	168-2222-55	2200pF K	C503	168-1042-78	16V 0.1uF
C124	168-5612-55	560pF Z	C324	168-2222-55	2200pF K	C504	168-1042-78	16V 0.1uF
C125	166-4701-50	47pF CH	C325	168-2222-55	2200pF K	C505	168-1042-78	16V 0.1uF
C126	188-1073-28	10V 100uF	C326	168-2222-55	2200pF K	C506	168-1042-78	16V 0.1uF
C127	188-2253-68	50V 2.2uF	C327	168-2222-55	2200pF K	C507	042-1505-82	16V 10uF
C128	043-0277-51	0.022uF	C328	168-2222-55	2200pF K	C508	168-1022-55	1000pF K
C129	168-1042-78	16V 0.1uF	C329	168-1042-78	16V 0.1uF	C509	168-1022-55	1000pF K
C130	166-5601-50	56pF CH	C330	042-0416-57	10V 47uF M TAN	C510	168-1022-55	1000pF K
C131	188-1073-28	10V 100uF	C331	163-1063-35	16V 10uF	C511	168-1022-55	1000pF K
C132	168-1032-55	0.01uF K	C332	168-2222-55	2200pF K	C512	168-1022-55	1000pF K
C133	168-3312-55	330pF K	C333	168-1042-78	16V 0.1uF	C601	042-1562-17	16V 10uF
C134	166-1011-50	100pF CH	C334	042-1551-02	16V 1000uF	C602	042-1562-17	16V 10uF
C135	166-1011-50	100pF CH	C335	172-1041-15	0.1uF	C603	042-1562-17	16V 10uF
C136	168-1042-78	16V 0.1uF	C336	168-1042-78	16V 0.1uF	C604	042-1562-17	16V 10uF
C137	188-1073-28	10V 100uF	C338	187-1073-37	16V 100uF	C606	168-1022-55	1000pF K
C138	168-1022-55	1000pF K	C339	188-1053-68	50V 1uF	C608	168-1022-55	1000pF K
C140	178-1052-78	1uF	C402	163-2263-35	16V 22uF	C611	168-1022-55	1000pF K
C142	168-1232-55	0.012uF K	C403	042-0592-73	50V 1uF	C612	168-1022-55	1000pF K
C143	186-1053-69	50V 1uF	C404	188-1053-68	50V 1uF	C614	168-1022-55	1000pF K
C144	043-0277-51	0.022uF	C407	188-1053-68	50V 1uF	C615	168-2232-55	0.022uF K
C145	188-4763-38	16V 47uF	C408	042-0592-73	50V 1uF	C618	188-1066-38	16V 10uF NP
C147	168-1022-55	1000pF K	C409	188-1053-68	50V 1uF	C619	188-1066-38	16V 10uF NP
C149	168-2232-55	0.022uF K	C410	188-1053-68	50V 1uF	CCT201	050-0145-52	1/16W 1k ohm x4
C150	188-4763-38	16V 47uF	C411	178-1842-78	0.18uF	CCT501	050-0122-50	1/10W 10k ohm x4 J
C151	166-1011-50	100pF CH	C412	178-1842-78	0.18uF	D301	001-0529-32	MA8056-M
C152	166-1011-50	100pF CH	C414	178-1842-78	0.18uF	D302	001-0504-49	HZS9 C3L
C153	166-1011-50	100pF CH	C415	178-1842-78	0.18uF	D303	001-0529-34	MA8062-L
C154	166-1011-50	100pF CH	C417	168-8212-55	820pF K	D304	001-0504-48	HZS9C2L
C155	166-1801-50	18pF CH	C418	168-8212-55	820pF K	D305	001-0516-90	MA111
C156	168-3932-78	0.039uF K	C419	168-8212-55	820pF K	D306	001-0466-90	S5688B
C157	168-3932-78	0.039uF K	C420	168-8212-55	820pF K	D307	001-0516-90	MA111
C158	166-1501-50	15pF CH	C421	042-0592-58	16V 10uF	D308	001-0466-90	S5688B
C159	168-4722-55	4700pF K	C422	042-0592-58	16V 10uF	D309	001-2015-00	RL253
C160	168-3932-78	0.039uF K	C423	168-1832-55	0.018uF K	D310	001-0466-90	S5688B
C161	168-3932-78	0.039uF K	C433	042-0592-58	16V 10uF	D311	001-0466-90	S5688B
C162	168-2222-55	2200pF K	C434	042-0592-58	16V 10uF	D401	001-0516-90	MA111
C202	166-1011-50	100pF CH	C435	042-0592-58	16V 10uF	D402	001-0516-90	MA111
C203	166-1011-50	100pF CH	C436	042-0592-58	16V 10uF	D404	001-0356-91	1SS184
C204	188-4763-18	6.3V 47uF	C438	168-1042-78	16V 0.1uF	D501	001-0529-44	MA8082-M
C205	168-1042-78	16V 0.1uF	C439	166-5601-50	56pF CH	D602	001-0584-35	MA8240
C206	168-1022-55	1000pF K	C440	166-5601-50	56pF CH	D604	001-0516-90	MA111
C207	168-1032-55	0.01uF K	C441	166-2201-50	22pF CH	D605	001-0516-90	MA111
C208	168-1042-78	16V 0.1uF	C442	166-2201-50	22pF CH	D606	001-0516-90	MA111
C209	166-1011-50	100pF CH	C444	166-2201-50	22pF CH	D608	001-0422-38	MTZJ36
C210	166-1011-50	100pF CH	C445	166-2201-50	22pF CH	D609	001-0529-44	MA8082-M
C211	166-1011-50	100pF CH	C446	166-5601-50	56pF CH	IC103	051-4607-90	SAA6581T
C212	166-1011-50	100pF CH	C447	166-5601-50	56pF CH	IC104	051-6212-08	LC72191JM-TLM
C213	166-1011-50	100pF CH	C448	166-1011-50	100pF CH	IC202	052-3177-20	M30624MGA-632GP
C216	168-1042-78	16V 0.1uF	C450	178-1052-78	1uF	IC203	051-5436-08	S-80933CNMC- G83(ANMP-DDX)
C217	168-1022-55	1000pF K	C451	178-1052-78	1uF	IC301	051-3020-90	NJM4565V
C301	042-1548-52	10V 220uF	C453	166-1011-50	100pF CH	IC302	051-3020-90	NJM4565V
C302	187-4763-35	16V 47uF	C454	188-1053-68	50V 1uF	IC303	051-5441-08	BD4828G-TR
C305	188-1063-38	16V 10uF	C455	166-5601-50	56pF CH	IC304	051-3341-90	BD3931FP
C306	042-1562-15	10V 220uF	C456	166-5601-50	56pF CH	IC401	051-5027-00	LC75412WH
C307	166-2201-50	22pF CH	C457	166-2201-50	22pF CH	IC403	051-1407-00	NJM4556AL
C308	163-1073-35	16V 100uF	C458	166-2201-50	22pF CH	IC404	051-1407-00	NJM4556AL
C309	168-1042-78	16V 0.1uF	C459	166-2201-50	22pF CH	IC405	051-3034-90	NJM4558V
C310	168-6822-55	6800pF K	C460	166-2201-50	22pF CH	IC406	051-1407-00	NJM4556AL
C311	188-1073-28	10V 100uF	C461	166-5601-50	56pF CH	IC407	051-1407-00	NJM4556AL
C312	188-1063-38	16V 10uF	C462	166-5601-50	56pF CH	IC501	051-1014-08	TA7291F
C313	187-1073-27	10V 100uF	C463	188-1053-68	50V 1uF	J301	074-1141-00	NS10+6
C314	168-1042-78	16V 0.1uF	C464	042-1548-52	10V 220uF	J501	074-1192-20	20P
C315	163-1073-35	16V 100uF	C465	042-1548-52	10V 220uF	J602	074-1013-30	OUTLET SOCKET(A12MW)
			C466	042-1548-52	10V 220uF			
			C467	042-1548-52	10V 220uF			

REF No.	PART No.	DESCRIPTION
J603	074-1087-12	OUTLET SOCKET
L104	010-2003-04	30uH
L105	010-6009-76	22uH J
L106	010-6009-76	22uH J
L201	010-3407-66	NLV32 22uH J
L301	010-8028-00	520uH
P101	076-0368-06	PLUG 6P
P102	076-0368-18	18P
P202	074-0834-10	10P
P501	076-0509-20	20P
P601	074-0898-06	6P
P602	074-0898-18	18P
Q105	192-4116-00	2SC4116
Q106	192-4116-51	2SC4116 G,L
Q107	125-2026-91	UN5211
Q108	192-4116-51	2SC4116 G,L
Q109	190-1162-00	2SA1162
Q110	190-1162-00	2SA1162
Q301	193-2118-00	2SD2118F5 Q,R,S
Q302	125-9017-92	UMD3N-TR
Q303	103-2353-00	2SD2353
Q304	125-9017-92	UMD3N-TR
Q305	192-4116-00	2SC4116
Q306	193-2118-00	2SD2118F5 Q,R,S
Q307	125-2026-95	UN521N
Q308	193-1858-00	2SD1858
Q309	131-1188-00	2SB1188
Q310	125-9017-92	UMD3N-TR
Q311	125-2026-95	UN521N
Q312	190-1298-00	2SA1298
Q313	125-2026-91	UN5211
Q314	131-1188-00	2SB1188
Q404	191-0709-00	2SB709A Q,R,S
Q405	191-0709-00	2SB709A Q,R,S
Q406	191-0709-00	2SB709A Q,R,S
Q407	191-0709-00	2SB709A Q,R,S
Q408	125-2026-91	UN5211
Q409	191-0709-00	2SB709A Q,R,S
Q410	193-0601-00	2SD601A
Q411	193-0601-00	2SD601A
Q501	125-2026-91	UN5211
Q502	190-1428-00	2SA1428
Q503	125-2026-95	UN521N
Q601	125-0020-91	UN5111
Q602	192-4116-00	2SC4116
Q604	125-2026-91	UN5211
Q605	192-4116-00	2SC4116
Q606	125-2026-91	UN5211
Q607	192-4116-00	2SC4116
Q608	192-4116-00	2SC4116
Q610	125-0020-91	UN5111
Q613	192-4116-00	2SC4116
R110	119-0000-05	1/10W 0 ohm JW
R120	119-4741-15	1/10W 470k ohm
R121	119-2221-15	1/10W 2.2k ohm
R122	119-1021-15	1/10W 1k ohm
R123	119-8201-15	1/10W 82 ohm
R124	119-1021-15	1/10W 1k ohm
R125	119-1031-15	1/10W 10k ohm
R126	119-4721-15	1/10W 4.7k ohm
R127	119-1031-15	1/10W 10k ohm
R128	119-1021-15	1/10W 1k ohm
R129	119-2221-15	1/10W 2.2k ohm
R130	119-4721-15	1/10W 4.7k ohm
R131	119-3321-15	1/10W 3.3k ohm
R132	119-1001-15	1/10W 10 ohm
R133	119-1501-15	1/10W 15 ohm
R134	119-2221-15	1/10W 2.2k ohm
R135	119-2221-15	1/10W 2.2k ohm
R136	119-1031-15	1/10W 10k ohm
R137	119-1031-15	1/10W 10k ohm
R138	119-4721-15	1/10W 4.7k ohm
R139	119-4721-15	1/10W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R140	119-2221-15	1/10W 2.2k ohm
R141	119-1021-15	1/10W 1k ohm
R142	119-1021-15	1/10W 1k ohm
R143	119-1021-15	1/10W 1k ohm
R144	119-2701-15	1/10W 27 ohm
R145	119-4731-15	1/10W 47k ohm
R201	119-4731-15	1/10W 47k ohm
R202	119-4731-15	1/10W 47k ohm
R203	119-1021-15	1/10W 1k ohm
R204	119-1021-15	1/10W 1k ohm
R206	119-4731-15	1/10W 47k ohm
R207	119-1021-15	1/10W 1k ohm
R209	119-4731-15	1/10W 47k ohm
R210	119-4731-15	1/10W 47k ohm
R211	119-4731-15	1/10W 47k ohm
R212	119-4731-15	1/10W 47k ohm
R213	119-4731-15	1/10W 47k ohm
R214	119-4731-15	1/10W 47k ohm
R215	119-4731-15	1/10W 47k ohm
R216	119-4731-15	1/10W 47k ohm
R217	119-4731-15	1/10W 47k ohm
R219	119-2231-15	1/10W 22k ohm
R220	119-4731-15	1/10W 47k ohm
R221	119-2231-15	1/10W 22k ohm
R222	119-4731-15	1/10W 47k ohm
R223	119-4731-15	1/10W 47k ohm
R225	119-4731-15	1/10W 47k ohm
R226	119-1021-15	1/10W 1k ohm
R227	119-1021-15	1/10W 1k ohm
R228	119-4731-15	1/10W 47k ohm
R230	119-4731-15	1/10W 47k ohm
R231	119-4731-15	1/10W 47k ohm
R232	119-1031-15	1/10W 10k ohm
R233	119-1041-15	1/10W 100k ohm
R235	119-4731-15	1/10W 47k ohm
R236	119-4731-15	1/10W 47k ohm
R237	119-4731-15	1/10W 47k ohm
R238	119-4731-15	1/10W 47k ohm
R239	119-1041-15	1/10W 100k ohm
R241	119-4731-15	1/10W 47k ohm
R242	119-1021-15	1/10W 1k ohm
R245	119-1021-15	1/10W 1k ohm
R249	119-4731-15	1/10W 47k ohm
R251	119-4731-15	1/10W 47k ohm
R252	119-4731-15	1/10W 47k ohm
R301	119-1031-15	1/10W 10k ohm
R302	119-1031-15	1/10W 10k ohm
R303	119-4731-15	1/10W 47k ohm
R304	119-4731-15	1/10W 47k ohm
R305	117-2211-15	1/8W 220 ohm
R306	119-1041-15	1/10W 100k ohm
R307	032-0148-54	1/16W 180k ohm
R308	032-0148-50	1/10W 100k ohm
R309	111-2211-98	1/4W 220 ohm
R310	119-1041-15	1/10W 100k ohm
R311	119-5611-15	1/10W 560 ohm
R312	119-1031-15	1/10W 10k ohm
R313	116-3911-15	1/4W 390 ohm
R314	119-1031-15	1/10W 10k ohm
R315	116-1221-15	1/4W 1.2k ohm
R316	119-1031-15	1/10W 10k ohm
R317	116-1011-15	1/4W 100 ohm
R318	119-4721-15	1/10W 4.7k ohm
R319	116-1091-15	1/4W 1 ohm
R320	119-1031-15	1/10W 10k ohm
R321	116-1221-15	1/4W 1.2k ohm
R322	119-3321-15	1/10W 3.3k ohm
R323	119-1031-15	1/10W 10k ohm
R324	116-1091-15	1/4W 1 ohm
R326	116-1531-15	1/4W 15k ohm
R327	116-2721-15	1/4W 2.7k ohm
R402	119-2731-15	1/10W 27k ohm
R403	119-2731-15	1/10W 27k ohm

REF No.	PART No.	DESCRIPTION
R404	119-2731-15	1/10W 27k ohm
R405	119-2731-15	1/10W 27k ohm
R406	119-2731-15	1/10W 27k ohm
R407	119-2731-15	1/10W 27k ohm
R413	119-4721-15	1/10W 4.7k ohm
R414	119-4721-15	1/10W 4.7k ohm
R416	119-4721-15	1/10W 4.7k ohm
R417	119-4721-15	1/10W 4.7k ohm
R428	119-5621-15	1/10W 5.6k ohm
R429	119-5621-15	1/10W 5.6k ohm
R430	119-5621-15	1/10W 5.6k ohm
R431	119-5621-15	1/10W 5.6k ohm
R432	119-3321-15	1/10W 3.3k ohm
R433	119-1031-15	1/10W 10k ohm
R434	119-1031-15	1/10W 10k ohm
R435	119-3321-15	1/10W 3.3k ohm
R436	119-1031-15	1/10W 10k ohm
R437	119-1031-15	1/10W 10k ohm
R438	119-3321-15	1/10W 3.3k ohm
R439	119-3321-15	1/10W 3.3k ohm
R440	117-1001-15	1/8W 10 ohm
R441	119-2231-15	1/10W 22k ohm
R442	119-2231-15	1/10W 22k ohm
R443	117-1001-15	1/8W 10 ohm
R444	119-2031-15	1/10W 20k ohm
R445	119-2231-15	1/10W 22k ohm
R446	119-3931-15	1/10W 39k ohm
R447	119-3931-15	1/10W 39k ohm
R448	119-1021-15	1/10W 1k ohm
R449	119-1031-15	1/10W 10k ohm
R450	119-1031-15	1/10W 10k ohm
R452	119-2231-15	1/10W 22k ohm
R453	117-1001-15	1/8W 10 ohm
R454	119-2231-15	1/10W 22k ohm
R455	117-1001-15	1/8W 10 ohm
R456	119-2231-15	1/10W 22k ohm
R457	032-0140-52	1/10W 33k ohm F
R459	119-1241-15	1/10W 120k ohm
R460	119-1241-15	1/10W 120k ohm
R462	032-0140-52	1/10W 33k ohm F
R463	117-1001-15	1/8W 10 ohm
R464	119-2231-15	1/10W 22k ohm
R465	119-2231-15	1/10W 22k ohm
R466	117-1001-15	1/8W 10 ohm
R467	119-2031-15	1/10W 20k ohm
R468	119-2231-15	1/10W 22k ohm
R469	119-1031-15	1/10W 10k ohm
R472	032-0140-19	1/10W 75k ohm F
R473	032-0140-19	1/10W 75k ohm F
R474	119-1041-15	1/10W 100k ohm
R475	119-3931-15	1/10W 39k ohm
R476	119-3931-15	1/10W 39k ohm
R477	119-1031-15	1/10W 10k ohm
R478	119-1031-15	1/10W 10k ohm
R479	119-4731-15	1/10W 47k ohm
R480	117-1001-15	1/8W 10 ohm
R481	119-2231-15	1/10W 22k ohm
R482	117-1001-15	1/8W 10 ohm
R483	119-2231-15	1/10W 22k ohm
R484	119-1031-15	1/10W 10k ohm
R485	119-1041-15	1/10W 100k ohm
R486	119-4731-15	1/10W 47k ohm
R501	119-1031-15	1/10W 10k ohm
R502	119-1031-15	1/10W 10k ohm
R503	116-1221-15	1/4W 1.2k ohm
R504	116-1221-15	1/4W 1.2k ohm
R505	119-1031-15	1/10W 10k ohm
R506	116-1001-15	1/4W 10 ohm
R507	116-1001-15	1/4W 10 ohm
R508	116-1001-15	1/4W 10 ohm
R509	116-1001-15	1/4W 10 ohm
R510	119-2221-15	1/10W 2.2k ohm
R511	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R512	119-1021-15	1/10W 1k ohm	R616	119-4731-15	1/10W 47k ohm	R636	119-3011-15	1/10W 300 ohm
R513	119-1021-15	1/10W 1k ohm	R617	119-2231-15	1/10W 22k ohm	SUP102	060-0122-91	DSP-141N-S00B
R601	119-1031-15	1/10W 10k ohm	R619	119-1031-15	1/10W 10k ohm	TH301	002-0229-90	PTH8L05B
R602	119-5631-15	1/10W 56k ohm	R620	119-1031-15	1/10W 10k ohm	TH302	002-0229-90	PTH8L05B
R603	119-3011-15	1/10W 300 ohm	R621	119-1031-15	1/10W 10k ohm	VR102	012-5203-56	10k ohm
R604	119-3011-15	1/10W 300 ohm	R623	119-5631-15	1/10W 56k ohm	X101	061-3013-00	4.33MHz
R610	119-1031-15	1/10W 10k ohm	R628	119-5631-15	1/10W 56k ohm	X102	061-1066-00	7.2MHz
R611	119-4721-15	1/10W 4.7k ohm	R629	119-5631-15	1/10W 56k ohm	X201	060-1505-50	CSTCC10.0MG-TC
R612	119-1531-15	1/10W 15k ohm	R631	119-1021-15	1/10W 1k ohm	PWB	039-2758-00	PWB(WITHOUT COMPONENT)
R613	119-3321-15	1/10W 3.3k ohm	R632	119-5621-15	1/10W 5.6k ohm			
R614	119-4731-15	1/10W 47k ohm	R633	119-5621-15	1/10W 5.6k ohm			

CD PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-4735-56	0.047uF Z	IC2	051-5445-08	BD5227G-TR	R25	119-1031-15	1/10W 10k ohm
C2	168-4735-56	0.047uF Z	IC3	052-5061-01	M30621MCM-4S5GP	R26	119-4721-15	1/10W 4.7k ohm
C4	168-1222-55	1200pF K	IC4	051-9402-78	BR93L56RFVM-W	R27	119-1031-15	1/10W 10k ohm
C5	163-2263-35	16V22uF	IC5	051-3332-90	NJU7222U33	R28	119-1041-15	1/10W 100k ohm
C6	168-1222-55	1200pF K	IC6	051-3293-90	BA033SFP-E2	R29	119-1041-15	1/10W 100k ohm
C12	168-1222-55	1200pF K	J1	074-1189-95	45P	R31	119-4731-15	1/10W 47k ohm
C15	168-1222-55	1200pF K	J3	074-1237-70	20P	R32	119-0000-05	1/10W 0 ohm JW
C16	163-2263-35	16V22uF	P1	076-0478-55	PLUG 5P	R35	119-0000-05	1/10W 0 ohm JW
C18	168-1045-56	0.1uF Z	Q3	190-1162-00	2SA1162	R36	119-4731-15	1/10W 47k ohm
C19	166-1011-50	100pF CH	Q4	198-3018-00	2SK3018	R37	119-4731-15	1/10W 47k ohm
C21	168-1032-55	0.01uF K	Q5	131-1188-50	2SB1188PQR	R38	119-2231-15	1/10W 22k ohm
C22	168-1045-56	0.1uF Z	Q6	198-3018-00	2SK3018	R39	119-2231-15	1/10W 22k ohm
C23	168-1045-56	0.1uF Z	Q7	125-2004-92	RN1402	R40	119-2231-15	1/10W 22k ohm
C24	168-1032-55	0.01uF K	Q8	125-2004-92	RN1402	R41	119-4711-15	1/10W 470 ohm
C25	163-1073-15	6.3V100uF	Q9	125-0014-92	DTA114EK	R42	119-2231-15	1/10W 22k ohm
C26	178-1052-78	1uF	Q53	193-0601-00	2SD601A	R43	119-2241-15	1/10W 220k ohm
C27	168-1045-56	0.1uF Z	R2	119-2211-15	1/10W 220 ohm	R60	119-0000-05	1/10W 0 ohm JW
C28	042-0671-01	10V 47uF TA	R4	119-4731-15	1/10W 47k ohm	R530	119-4731-15	1/10W 47k ohm
C29	168-1045-56	0.1uF Z	R8	119-4731-15	1/10W 47k ohm	R550	119-4731-15	1/10W 47k ohm
C30	178-3342-78	0.33uF	R10	119-2211-15	1/10W 220 ohm	TM1	073-0768-90	TERMINAL
C31	042-1673-00	10V 220uF	R13	119-1041-15	1/10W 100k ohm	TM2	073-0766-90	TERMINAL
CCT4	050-0140-55	1/32W 2.2k ohmx4J	R14	119-2221-15	1/10W 2.2k ohm	TM4	073-0766-90	TERMINAL
CCT5	050-0145-54	1/16W 47k ohm x4	R15	119-1041-15	1/10W 100k ohm	TM5	073-0766-90	TERMINAL
CCT6	050-0145-53	1/16W 220k ohm x4 J	R16	119-1021-15	1/10W 1k ohm	X1	060-1533-90	CSTCE10M0G52-R0
D2	001-2610-90	RB480KTL	R20	119-4731-15	1/10W 47k ohm	PWB	039-2532-20	PWB(WITHOUT COMPONENT)
			R24	119-4731-15	1/10W 47k ohm			

DSP PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	042-0671-01	10V 47uF TA	C29	046-3332-78	0.033uF	C60	168-1045-56	0.1uF Z
C2	168-4735-56	0.047uF Z	C32	046-4722-58	4700pF	C61	046-1032-78	0.01uF
C3	046-4722-58	4700pF	C33	046-1522-58	1500pF	C62	042-0671-01	10V 47uF TA
C4	046-1032-78	0.01uF	C34	168-1045-56	0.1uF Z	C63	046-1032-78	0.01uF
C5	168-1045-56	0.1uF Z	C35	046-1532-78	0.015uF	C64	168-1045-56	0.1uF Z
C6	042-0671-01	10V 47uF TA	C36	168-1045-56	0.1uF Z	C65	045-1201-50	12pF
C7	168-1045-56	0.1uF Z	C37	168-1045-56	0.1uF Z	C66	046-1032-78	0.01uF
C8	168-1045-56	0.1uF Z	C38	042-0671-01	10V 47uF TA	C67	046-1032-78	0.01uF
C9	045-1007-50	10pF	C39	178-1052-78	1uF	C68	168-1045-56	0.1uF Z
C10	168-1045-56	0.1uF Z	C40	045-6801-50	68pF	C69	045-1201-50	12pF
C11	045-1007-50	10pF	C41	168-1045-56	0.1uF Z	C101	046-1032-78	0.01uF
C12	168-1045-56	0.1uF Z	C42	178-1052-78	1uF	C102	046-1032-78	0.01uF
C13	042-0672-00	25V 47uF TA	C43	042-0671-01	10V 47uF TA	CCT1	050-0140-68	1/32W 3.3k ohm x4J
C14	168-4735-56	0.047uF Z	C44	046-6812-58	680pF	CCT4	050-0140-63	1/32W 47k ohm x4J
C15	168-4735-56	0.047uF Z	C45	168-1045-56	0.1uF Z	D1	001-0367-91	1SS226
C16	168-4735-56	0.047uF Z	C46	168-1045-56	0.1uF Z	D2	001-2610-90	RB480KTL
C17	178-1052-78	1uF	C47	042-0671-01	10V 47uF TA	IC2	051-6399-00	TC94A15F
C18	045-4701-50	47pF	C48	168-5632-78	16V 0.056uF	IC3	051-6060-08	BD7961FM-E2
C19	168-1045-56	0.1uF Z	C49	168-1045-56	0.1uF Z	IC4	051-7518-18	SN74LVC139APWR
C20	046-4712-58	470pF	C50	168-1045-56	0.1uF Z	IC5	052-5062-03	MBM29DL800BA-90PFTN
C21	046-4712-58	470pF	C51	168-1045-56	0.1uF Z	IC6	051-7518-18	SN74LVC139APWR
C22	168-1045-56	0.1uF Z	C53	168-1045-56	0.1uF Z	IC7	051-9330-00	K4S641632F-TC60
C23	046-1532-78	0.015uF	C54	042-0671-01	10V 47uF TA	IC8	051-7203-48	SN74LV74APW
C24	168-1045-56	0.1uF Z	C56	168-4712-55	470pF K	IC9	051-6700-00	TMS320DA140
C25	046-6822-58	6800pF	C57	046-1032-78	0.01uF			PGE160
C26	046-1032-78	0.01uF	C58	168-4712-55	470pF K	IC10	051-3315-90	TPS76316DBVR
C28	046-1022-58	1000pF	C59	168-1045-56	0.1uF Z			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC11	051-7221-58	SN74AHC1G04 HDCKR	R15	117-1001-15	1/8W 10 ohm	R47	033-4731-15	1/10W 47k ohm
IC12	051-7525-08	SN74LVC2GU04 DCKR	R16	033-5631-15	1/10W 56k ohm	R48	033-1011-15	1/10W 100 ohm
IC13	051-7526-08	SN74LVC1G126 DCKR	R17	033-3331-15	1/10W 33k ohm	R49	033-0000-05	1/10W 0 ohm
J1	074-1201-65	15P	R18	033-6831-15	1/10W 68k ohm	R50	033-0000-05	1/10W 0 ohm
J2	074-1138-56	6P	R19	033-6831-15	1/10W 68k ohm	R51	033-8231-15	1/10W 82k ohm
J3	074-1059-76	26P	R20	033-1011-15	1/10W 100 ohm	R52	033-0000-05	1/10W 0 ohm
J4	074-1189-95	45P	R21	116-4711-15	1/4W 470 ohm	R53	033-4731-15	1/10W 47k ohm
J5	074-1201-60	10P	R22	117-1811-15	1/8W 180 ohm	R63	033-2231-15	1/10W 22k ohm
L2	010-3104-54	MPZ1608S601AT	R23	116-4711-15	1/4W 470 ohm	R64	033-2231-15	1/10W 22k ohm
L3	010-3104-54	MPZ1608S601AT	R24	033-2231-15	1/10W 22k ohm	R65	033-4731-15	1/10W 47k ohm
Q1	131-1188-50	2SB1188PQR	R25	033-2231-15	1/10W 22k ohm	R66	033-4731-15	1/10W 47k ohm
Q2	131-1188-50	2SB1188PQR	R26	033-2231-15	1/10W 22k ohm	R100	033-1011-15	1/10W 100 ohm
Q3	125-2004-92	RN1402	R27	033-1011-15	1/10W 100 ohm	R101	033-1011-15	1/10W 100 ohm
R1	033-1021-15	1/10W 1k ohm	R28	033-4731-15	1/10W 47k ohm	R102	033-1011-15	1/10W 100 ohm
R2	033-1021-15	1/10W 1k ohm	R29	033-2231-15	1/10W 22k ohm	R103	033-1011-15	1/10W 100 ohm
R3	033-3311-15	1/10W 330 ohm	R30	033-4721-15	1/10W 4.7k ohm	R104	033-1011-15	1/10W 100 ohm
R4	033-2211-15	1/10W 220 ohm	R31	033-4721-15	1/10W 4.7k ohm	R105	033-1011-15	1/10W 100 ohm
R5	033-2211-15	1/10W 220 ohm	R32	033-4731-15	1/10W 47k ohm	R106	033-1011-15	1/10W 100 ohm
R6	033-1021-15	1/10W 1k ohm	R33	033-4731-15	1/10W 47k ohm	R107	033-4731-15	1/10W 47k ohm
R7	033-1051-15	1/10W 1M ohm	R35	033-4731-15	1/10W 47k ohm	R200	033-1051-15	1/10W 1M ohm
R8	033-0000-05	1/10W 0 ohm	R36	033-3311-15	1/10W 330 ohm	R201	033-1021-15	1/10W 1k ohm
R10	033-5621-15	1/10W 5.6k ohm	R37	033-4731-15	1/10W 47k ohm	R202	033-1021-15	1/10W 1k ohm
R11	033-4731-15	1/10W 47k ohm	R38	033-3311-15	1/10W 330 ohm	R220	033-4731-15	1/10W 47k ohm
R12	119-3341-15	1/10W 330k ohm	R39	033-2211-15	1/10W 220 ohm	R301	119-2231-15	1/10W 22k ohm
R13	033-2231-15	1/10W 22k ohm	R40	033-1011-15	1/10W 100 ohm	R302	119-3911-15	1/10W 390 ohm
R14	033-2231-15	1/10W 22k ohm	R41	033-1001-15	1/10W 10 ohm	X1	061-3534-90	16.92MHz
			R42	033-1001-15	1/10W 10 ohm	PWB	039-2531-20	PWB(WITHOUT COMPONENT)
			R45	033-1011-15	1/10W 100 ohm			
			R46	033-4731-15	1/10W 47k ohm			

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	S1	013-7414-50	SPVG22
PT4	060-0252-01	PT4850F	PWB	039-1956-00	PWB(WITHOUT COMPONENT)
PT5	060-0252-01	PT4850F			
PT6	060-0252-01	PT4850F			

PIM-FPC(B5) section

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B6) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100uF	J2	074-1100-59	9P	S2	013-7412-50	SPVG21
D1	001-0529-29	MA8051-M	R1	033-1021-15	1/10W 1k ohm	PWB	039-2242-00	PWB(WITHOUT COMPONENT)
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC(B7) section

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B8) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	PWB	039-1954-20	PWB(WITHOUT COMPONENT)
LED4	001-7042-00	GL4800			

LED-R-PWB(B9) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	PWB	039-1955-20	PWB(WITHOUT COMPONENT)
LED6	001-7042-00	GL4800			

L-Motor-FPC(B10) section

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B11) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-193-101	SPINDLE	M3	SMA-191-100	SLED	S3	013-7414-50	SPVG22

Side PWB(B12) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-5612-05	560pF	C16	168-1032-05	0.01uF	R8	119-3341-10	1/10W 330k ohm
C2	168-5612-05	560pF	C17	178-4745-79	0.47uF	R9	119-1131-15	1/10W 11k ohm
C3	168-5612-05	560pF	C18	168-1042-78	0.1uF	R10	119-1131-15	1/10W 11k ohm
C4	168-5612-05	560pF	C19	163-2263-30	16V22uF	R11	119-1531-10	1/10W 15k ohm
C5	178-1055-79	1uF	IC1	051-5204-00	HA12216F	R12	119-1531-10	1/10W 15k ohm
C6	168-1232-05	0.012uF	J1	074-0898-10	10P	R13	032-0140-80	1/10W 18k ohm F
C7	168-1232-05	0.012uF	L1	010-2198-26	0.047uH	R14	119-1531-10	1/10W 15k ohm
C8	168-4732-78	0.047uF	L2	010-2198-26	0.047uH	R15	119-1031-10	1/10W 10k ohm
C9	168-4732-78	0.047uF	R1	119-2731-10	1/10W 27k ohm	R16	119-3921-10	1/10W 3.9k ohm
C10	168-5612-05	560pF	R2	119-2731-10	1/10W 27k ohm	R17	119-1241-10	1/10W 120k ohm
C11	168-5612-05	560pF	R3	119-2731-10	1/10W 27k ohm	R18	119-2231-10	1/10W 22k ohm
C12	168-1042-78	0.1uF	R4	119-2731-10	1/10W 27k ohm	VR1	012-6014-56	10kohm
C13	168-1042-78	0.1uF	R5	119-1811-10	1/10W 180 ohm	VR2	012-6014-56	10kohm
C14	168-1032-05	0.01uF	R6	119-1811-10	1/10W 180 ohm	PWB	039-1912-01	PWB(WITHOUT COMPONENT)
C15	163-4753-50	35V4.7uF	R7	119-3341-10	1/10W 330k ohm			

Bottom FPC(B13) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW1	013-3953-01	SPPB32	SW2	013-3951-32	MODE SWITCH

Rear PWB(B14) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
P1	076-0368-10	10P	R19	111-5611-91	1/4WS 560 ohm	PWB	039-1913-00	PWB(WITHOUT COMPONENT)
J2	074-1012-20	20P	S1	013-3906-00	SPPB51			